



US 20060257823A1

(19) **United States**(12) **Patent Application Publication**
Pfeiffer et al.(10) **Pub. No.: US 2006/0257823 A1**(43) **Pub. Date: Nov. 16, 2006**(54) **METHOD OF PRODUCING A DENTAL
PROSTHETIC ITEM, AND DENTAL
PROSTHETIC ITEM THUS PRODUCED****Publication Classification**(51) **Int. Cl.**
A61C 5/08 (2006.01)(52) **U.S. Cl.** **433/218; 433/223**(75) Inventors: **Joachim Pfeiffer**, Bensheim (DE);
Wilhelm Schneider, Grasellenbach
(DE)

Correspondence Address:


DYKEMA GOSSETT PLLC**FRANKLIN SQUARE, THIRD FLOOR WEST****1300 I STREET, NW****WASHINGTON, DC 20005 (US)**(73) Assignee: **SIRONA DENTAL SYSTEMS GMBH**(21) Appl. No.: **11/205,019**(22) Filed: **Aug. 17, 2005**(30) **Foreign Application Priority Data**



May 13, 2005 (DE)..... 10 2005 023 105.5

(57) **ABSTRACT**

A method of producing a dental prosthetic item 3, wherein the dental prosthetic item 3 is attached, via an interior surface 5, to another dental prosthetic item 2 by means of an adhesive 9, and for adhesive 9 there is provided a gap 8 disposed between an interior surface of the dental prosthetic item 3 and the other dental prosthetic item 2, wherein interior surface 5 of the dental prosthetic item is designed to make allowance for the visual properties of adhesive 9.

Furthermore, a dental prosthetic item 3 is produced on the above lines and a blank 41 for the production of such a dental prosthetic item 3 and the other dental prosthetic item 2 is disclosed.

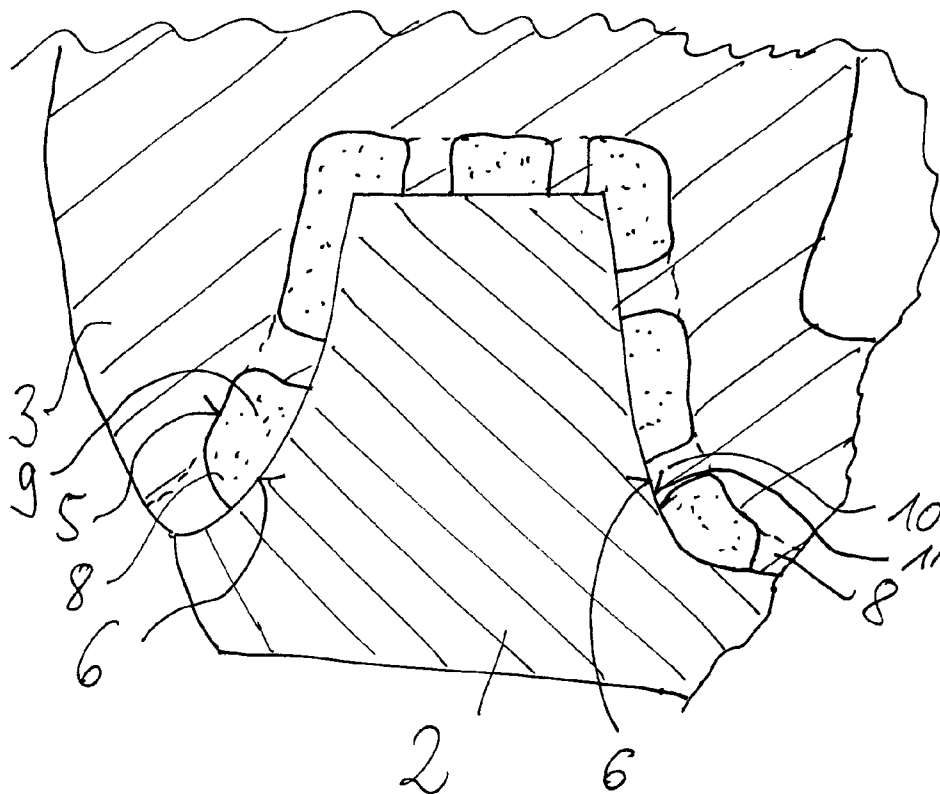

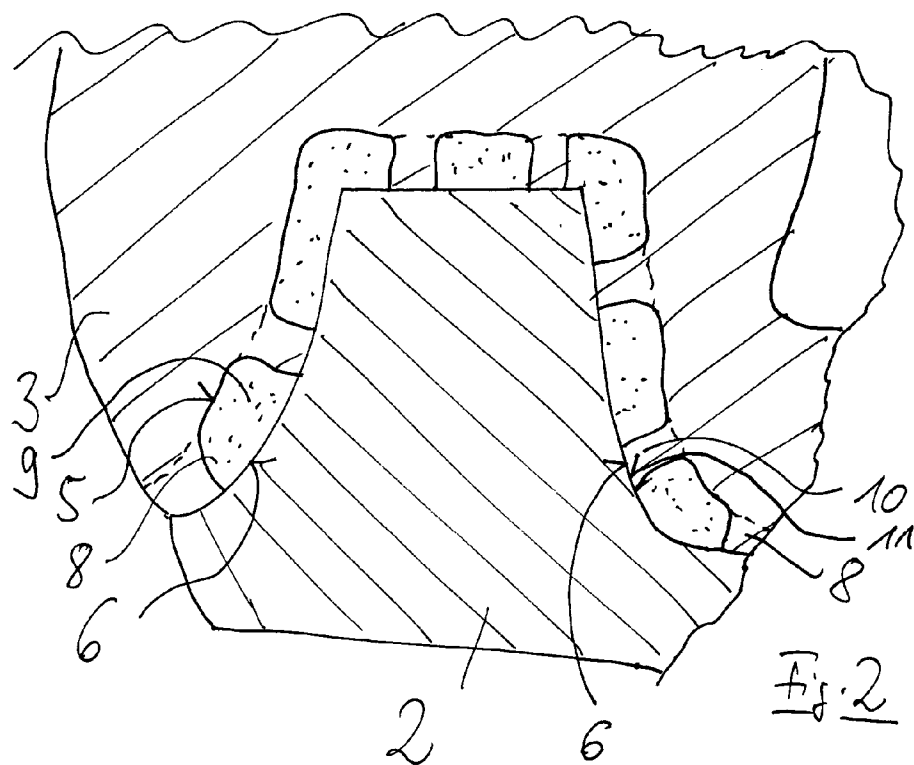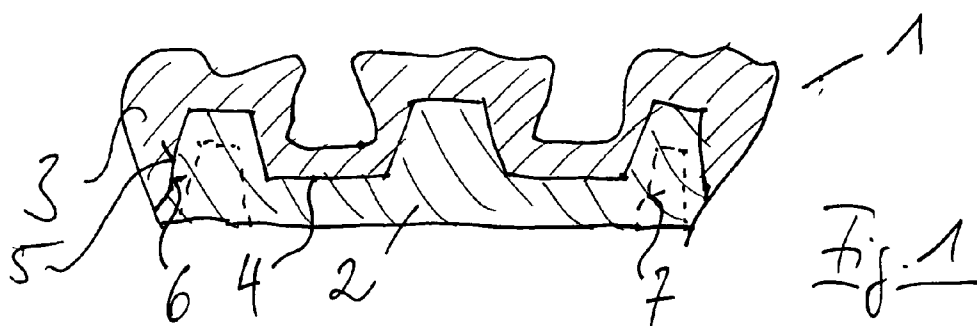

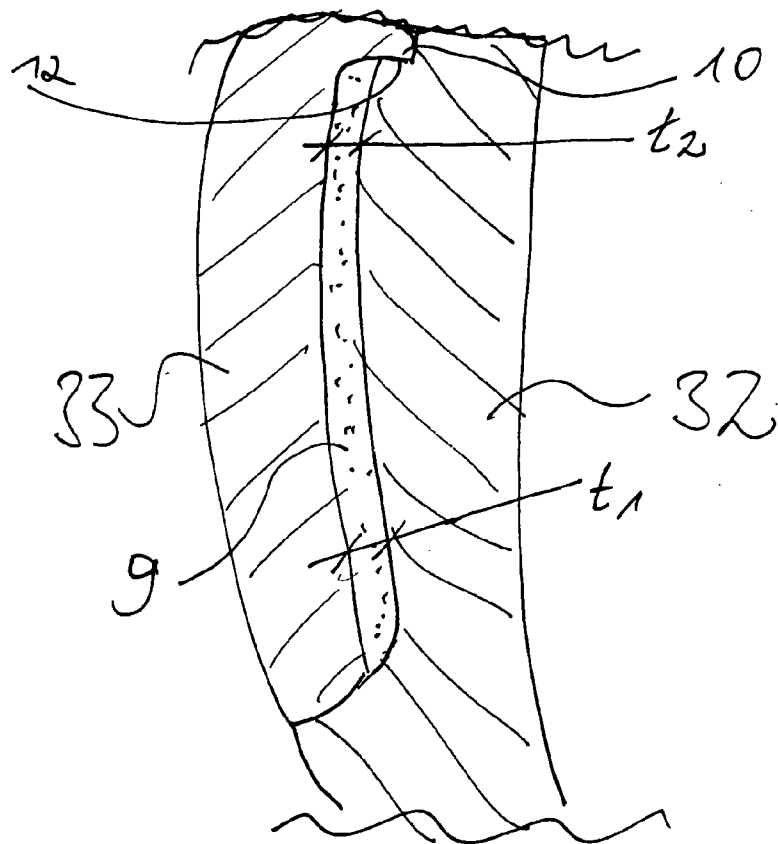


Fig. 3




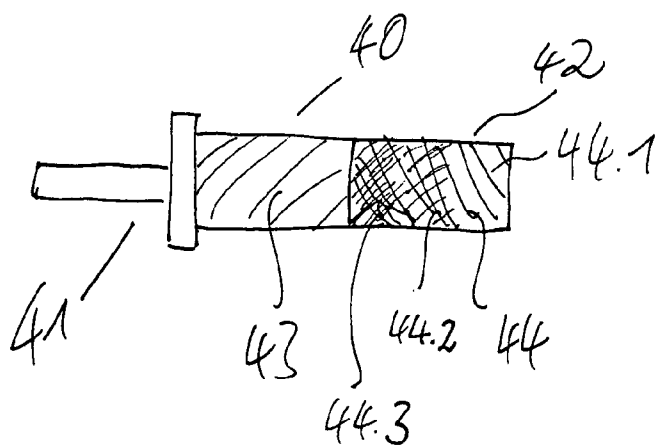


Fig. 4

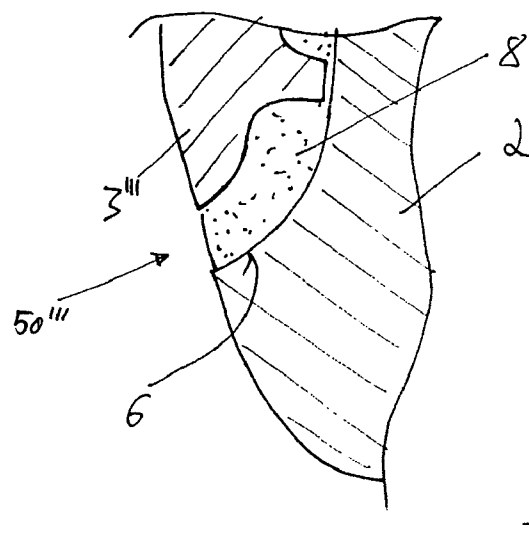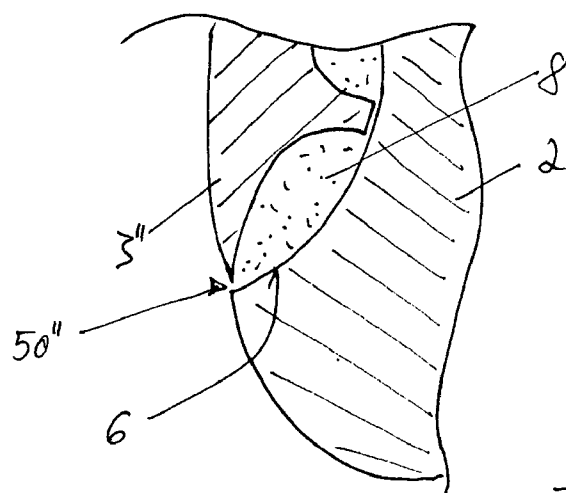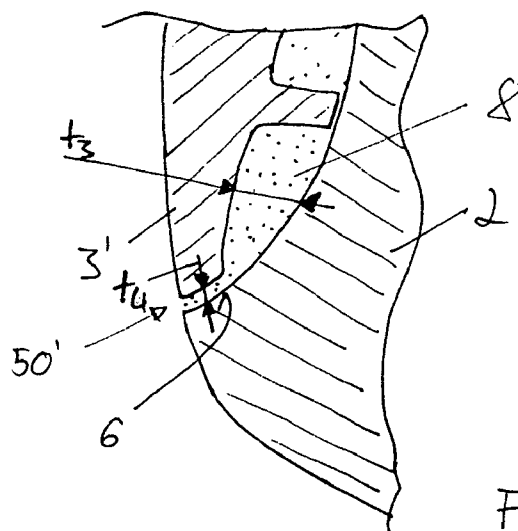

METHOD OF PRODUCING A DENTAL PROSTHETIC ITEM, AND DENTAL PROSTHETIC ITEM THUS PRODUCED

TECHNICAL FIELD

[0001] The invention relates to a method of producing a dental prosthetic item, which prosthetic item is attached to another prosthetic item via an interior surface. The method involves, in particular, the production of a dental prosthetic item using a CAD/CAM program. The invention further relates to a dental prosthetic item thus produced.

DESCRIPTION OF THE RELATED ART

[0002] In classical dental technology, crowns and bridges are fabricated by producing a framework that is subsequently faced with a veneer. The veneer serves to produce a highly aesthetic result. The production of the framework can be effected via CAD/CAM procedures, but the veneer must be applied manually.

[0003] Furthermore, it is known to make crowns from homogeneous blanks by means of CAD/CAM procedures. A certain degree of aesthetic adaptation can be achieved by appropriate selection of the color of the blank, but an optimal aesthetic result cannot be attained. Although the coloration of a solid, ground crown is improved somewhat when use is made of blanks that have a color gradient, exact matching is again not possible.

[0004] Furthermore, it is known to automatically apply different materials having different visual characteristics to a framework in order to produce the desired aesthetic appearance and the shape predetermined by the CAD data set. To this end, EP 1,400,232 A1 discloses that a dental prosthetic item having an aesthetic natural appearance can be produced by superimposing a number of layers, of which the bottom layers are opaque and at least one of the bottom layers is iridescent, whilst the surface layers are predominantly transparent and iridescent.

[0005] The object to be achieved by the invention is to provide a dental prosthetic item involving denture parts produced by grinding which is aesthetically on a par with the classical layer-by-layer veneering technique that is the norm in dental technology.

SUMMARY AND OBJECTS OF THE INVENTION

[0006] This problem has been solved by the invention as defined in the independent claims 1, 13, and 18. Further advantageous developments are defined in the subclaims.

[0007] In the method of producing a dental prosthetic item that, for example, is to be attached to another dental prosthetic item by means of an adhesive, a gap is provided between the interior surface of the first dental prosthetic item and the other dental prosthetic item, the interior surface of the prosthetic item being designed to make allowances for the visual characteristics of the adhesive.

[0008] By dividing a complete dental prosthetic item, such as a crown, into several parts with one of these parts being produced by the aforementioned procedure, the advantage gained is that the individual parts can be shaped in accordance with the respective requirements. High demands

regarding strength and biocompatibility are placed on the core of a complete dental prosthetic item, whereas the visual, haptic, and abrasive characteristics are more important with respect to the visible parts of the dental prosthetic item.

[0009] By dividing the dental prosthetic item into a number of parts, it is further possible to produce a gap of varying width between the parts, so that when adhesively joining the parts together, said width will be matched to the layer of adhesive.

[0010] When producing a crown from a framework and an external part and subsequently joining these parts together with a dyed adhesive, color matching can be achieved if the external part is translucent like tooth enamel. The colored layer under the external part shines through and produces the desired color effect, which is similar to a natural tooth.

[0011] The thickness of the adhesive layer is set in such a way that the desired color intensity and/or coloration are attained, since these depend on the thickness of the adhesive layer. If a thick adhesive layer is used, the visual impression is usually darker than with a thinner layer of adhesive.

[0012] The thickness of the layer of adhesive along the interface between two parts can differ very widely. A natural tooth is usually darker in its lower region than in its upper region. The adhesive layer is therefore typically designed to be thicker in the lower region of a dental prosthetic item.

[0013] In accordance with a further development, the coloration and/or color intensity of the dyed adhesive layer can be influenced after joining the parts and establishing an adhesive bond.

[0014] This influence on coloration and/or color intensity is advantageously achieved by irradiating the adhesive layer with light, in particular with light of a wavelength outside the visible range. The color of the dental prosthetic item can thus be matched to the existing teeth.

[0015] An advantageous feature for positioning the individual parts relatively to each other and creating an adhesive layer with the desired color characteristics is to provide at least one of the parts with contact surfaces disposed on protrusions to form a spacer. These spacers should be placed in regions that are not visible or only slightly visible.

[0016] The spacer delimits the gap to a predetermined width. The adhesive layer is located within this gap.

[0017] For the purpose of positioning one part relatively to the other it is advantageous to provide mating surfaces that enable precise and unambiguous alignment of the parts.

[0018] Furthermore, it may be advantageous to allow a CAD program to automatically propose how to divide up the dental prosthetic item to be fabricated. Using CAD procedures for the fabrication of a dental prosthetic item, it is possible to let the software select the interface between the at least two parts of the dental prosthetic item, making allowances for both the minimum size and the profile of the mating contours and for the provision of an interstice between the parts, the width of which can be varied on the basis of aesthetic criteria. The two parts can be composed of the materials that are most suitable for the purpose.

[0019] Fabrication can be advantageously simplified by using a single block in which several types of material are

combined, so that both of the necessary parts can be fabricated in a single milling operation without interim intervention.

[0020] The invention further relates to a dental prosthetic item for attachment to the stump of a tooth or to another dental prosthetic item, which first dental prosthetic item has a visible exterior surface and an interior surface suitable for attachment by means of an adhesive, said interior surface intended for the attachment of the dental prosthetic item being designed such that a gap is present for applying the adhesive between the internal surface of the dental prosthetic item and the stump of the tooth or the other dental prosthetic item. The internal surface of the dental prosthetic item is designed to make allowance for the visual characteristics of the adhesive.

[0021] Advantageously, the interior surface of the dental prosthetic item is shaped such that a gap width governed by a desired appearance is present between the interior surface of the dental prosthetic item and the stump of the tooth or the other dental prosthetic item. This makes it possible to manipulate the appearance even for given external dimensions.

[0022] It has proven to be particularly advantageous if the dental prosthetic item is translucent and the adhesive is visually perceptible through the dental prosthetic item. In this manner it is particularly easy to effect manipulation of the visual characteristics.

[0023] An advantageous development of the dental prosthetic item provides at least one spacer on the dental prosthetic item for alignment thereof relatively to the stump of a tooth or to said other dental prosthetic item. Thus the dental prosthetic item can be positioned particularly easily relatively to the other dental prosthetic item or to the stump of a tooth, and the desired layer thickness of adhesive can be adjusted particularly well.

[0024] Mating surfaces are advantageously provided on the dental prosthetic item, these serving to orient the dental prosthetic item relatively to the stump of a tooth or to the other dental prosthetic item and thereby enable precise and unambiguous alignment of the dental prosthetic items. This increases positioning accuracy even further.

[0025] A further object of the invention is a blank for the fabrication of a dental prosthetic item which consists of a number of parts and is to be carved from the blank by a material-removal machining technique. The blank consists of a first portion of a first material for the other dental prosthetic item and of a second portion of a second material for the dental prosthetic item. This enables simultaneous sequential fabrication of both dental prosthetic items in a single pass in the same machining equipment.

[0026] Advantageously, the material used for the other dental prosthetic item is Al_2O_3 or ZrO_2 , and the material used for the dental prosthetic item comprises feldspar ceramics. Both materials are particularly suitable for the respective applications.

[0027] In a particularly advantageous embodiment, the part of the blank used for the fabrication of the dental prosthetic item exhibits regions of different coloration. Therefore it is possible to reduce the thickness of the layer of adhesive necessary for the production of an aesthetic surface.

BRIEF DESCRIPTION OF THE DRAWINGS

[0028] Exemplary embodiments of the invention are illustrated in the drawings, in which:

[0029] **FIG. 1** shows a dental prosthetic item comprising a bridge and a veneer,

[0030] **FIG. 2** shows a detail of **FIG. 1** in the region of an internal interface,

[0031] **FIG. 3** shows another dental prosthetic item,

[0032] **FIG. 4** shows a blank with various material characteristics for the fabrication of parts of a dental prosthetic item, and

[0033] **FIGS. 5A to 5C** show sections of the dental prosthetic item of **FIG. 1**, each with a different design of the marginal region.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS OF THE INVENTION

[0034] **FIG. 1** shows a complete dental prosthetic item 1 as is to be fabricated, depicted in the form of a bridge, which is composed of a further dental prosthetic item in the form of a framework 2 and a dental prosthetic item of the invention in the form of a veneer 3. Between veneer 3 and framework 2 there is an interface 4 formed by the interior surface 5 of veneer 3 on one side and by the exterior surface 6 of frame 2 on the other. The profile of interface 4 is preferably specified automatically by a CAD program making allowances for the necessary design parameters.

[0035] Veneer 3 is fabricated from a translucent material which allows the layers beneath veneer 3 to shine through.

[0036] Framework 2 can itself exhibit an interior surface 7 for attachment to an abutment (not shown) or a tooth residue (not shown).

[0037] **FIG. 2** shows the profile of the interface in detail and illustrates the provision of a gap 8 between the interior surface 5 of veneer 3 and the exterior surface 6 of framework 2, said gap being filled with an adhesive 9.

[0038] In order to achieve a defined layer thickness of the adhesive layer, a protrusion 10 is located in gap 8, which protrusion bears against said exterior surface 6 by means of a contact surface 11.

[0039] Adhesive 9 is dyed and exhibits a color intensity and/or a coloration that depend on the thickness of the adhesive layer. If the layer thickness is increased, the color intensity increases and the adhesive layer appears darker. With a decreasing layer thickness, the color intensity decreases and the adhesive layer appears brighter.

[0040] Of course, adhesive 9 can be available in different basic colors and be selected in an appropriate way in order to obtain the desired color effects after having been introduced into the gap. The colors in the adhesive 9 shine through the translucent veneer 3.

[0041] **FIG. 3** shows a tooth restoration, in which an exterior part 33 is attached to an interior part 32. This is achieved by filling a gap 8 with an adhesive layer 9, whose width t_1 in a lower region is greater than its width t_2 in an upper region.

[0042] The exterior part is positioned relatively to the interior part at the predefined distance therefrom by means of a spacer element 10 on the exterior part 33, which engages an appropriate recess 12 on the interior part 32.

[0043] FIG. 4 depicts a blank for the fabrication of a dental prosthetic item consisting of several parts, the blank 40 itself comprising a handle 41 and a corpus 42.

[0044] Corpus 42 has two subregions 43, 44 exhibiting different material compositions. The differences in material composition may reside both in their visual characteristics, for example color or translucence, and in their mechanical properties, so that one component of a split dental prosthetic item can be made from one material and another component from the other material of subregion 44 at only one chuck setting and without having to change the tool.

[0045] The portion 44 intended for the fabrication of said second component 3 features differently colored regions 44.1-44.3.

[0046] In principle, the advantage produced by the invention can also be achieved when applying an undivided dental prosthetic item, for example a veneer, to a restored tooth, by using a color matched adhesive layer. The dental prosthetic item can also be provided, at the interface, with a gap, into which spacers project. The width of the gap and thus of the adhesive layer can be adapted by the design software according to the desired color profile, so that when the dental prosthetic item is mounted, the first step comprises applying an adequate quantity of adhesive. When the dental prosthetic item is pressed onto the stump of a tooth, the surplus adhesive will be squeezed out through the interstice and can be removed. When pressing, care must be taken to ensure that the required stop position is actually reached, so that the predetermined thickness of the adhesive layer is attained and not exceeded.

[0047] The adhesive can theoretically be organic or inorganic. In the case of an inorganic adhesive, the material used can be dyed solder glass, for example.

[0048] FIGS. 5A to 5C show different options for the design of the transition region 50', 50'', 50''' between veneer 3', 3'', 3''' and framework 2. Such a transition region 50', 50'', 50''' must fulfill several requirements. First of all it must be smooth, so that there is no risk of injury, or so that no moisture and/or harmful microorganisms can settle therein. Secondly, if it is in the anterior teeth region, it must be as invisible as possible in order not to disturb the overall aesthetic appearance. This primarily requires that adhesive layer 9 shines through uniformly, which in turn depends on the thickness of veneer 3', 3'', 3''' and also on the thickness of the adhesive layer in the marginal region. Furthermore, the entire dental prosthetic item must also be able to withstand all stresses in the transition region 50', 50'', 50'''.

[0049] To achieve this, it is now possible to form the transition region 50' as a truncated conical transition region 50', as shown in FIG. 5A.

[0050] The truncated conical transition region 50' is filled with a thin adhesive layer right up to the exterior visible edge of veneer 3'. The layer thickness t_4 , usually between 1 and 10 μm , is approximately one order of magnitude smaller than the average layer thickness of the adhesive layer t_3 in the rest of the region between the interior surface of veneer

3' and the exterior surface of the framework. Due to its minimal thickness t_4 , the adhesive layer 9 is only very faintly perceptible from the outside, whereby very good visual characteristics are achieved. Furthermore, it is possible with this type of transition to keep layer thickness t_3 of adhesive layer 9 relatively constant right down to the region of the transition region 50', which makes for a homogeneous color profile. The fact that the adhesive layer extends as far as the exterior of veneer 3' means that veneer 3' is additionally sealed. Thus very good hygienic characteristics are attained.

[0051] The advantage of a transition region 50'' providing a thin boundary wall of veneer 3'', as shown in FIG. 5B, is that while maintaining good visual characteristics, high sealing efficiency is also achieved.

[0052] Alternatively, the transition region 50''' can be in the form shown in FIG. 5C. This provides constant thickness of adhesive 9 up to the marginal region. The advantage of this transition region 50''' is that it is very smooth, on the one hand, and very dense on the other hand.

1. A method of producing a dental prosthetic item, wherein the dental prosthetic item is attached, via an interior surface, to another dental prosthetic item by means of an adhesive, and for said adhesive there is provided a gap disposed between an interior surface of said dental prosthetic item and said other dental prosthetic item, wherein said interior surface of said dental prosthetic item is designed to make allowance for the visual properties of said adhesive.

2. A method as defined in claim 1, wherein the width of said gap is such that when use is made of a colored adhesive there is attained a desired outwardly visible color intensity and/or coloration.

3. A method as defined in claim 1, wherein said coloration and/or said color intensity of said adhesive is capable of being influenced after said dental prosthetic item has been attached to the stump of a tooth or to said other dental prosthetic item and after the adhesive joint has been made.

4. A method as defined in claim 3, wherein said influence on said coloration and/or said color intensity of said adhesive is achieved by irradiation with light.

5. A method as defined in claim 4, wherein the light has a wavelength outside the visible range.

6. A method as defined in claim 1, wherein the thickness of the layer of said adhesive can be modified when designing said dental prosthetic item in the region of said interior surface of said dental prosthetic item.

7. A method as defined in claim 1, wherein the thickness of said layer of adhesive exhibits local differences.

8. A method as defined in claim 1, wherein said dental prosthetic item is oriented toward said other dental prosthetic item by means of at least one spacer.

9. A method as defined in claim 8, wherein said spacer is part of said interior surface of said dental prosthetic item.

10. A method as defined in claim 8, wherein said spacer is disposed in non-visible regions.

11. A method as defined in claim 1, wherein mating surfaces are provided on said dental prosthetic item for the purpose of orienting said dental prosthetic item relatively to said other dental prosthetic item to make exact and unambiguous alignment of said dental prosthetic item possible.

12. A method as defined in claim 1, wherein when said dental prosthetic item is designed by means of design

software making allowances for the external surface and the interior surface of said dental prosthetic item to be fabricated, the width of said gap is specified such that a predetermined color gradient is produced when a dyed adhesive is introduced into said gap.

13. A dental prosthetic item for attachment to a tooth stump or another dental prosthetic item, exhibiting a visible external surface and an interior surface to which an adhesive can be applied for attachment purposes, wherein said interior surface for attachment of said dental prosthetic item is designed such that a gap is present for the application of adhesive between said interior surface of said dental prosthetic item and the stump of a tooth or said other dental prosthetic item, wherein said interior surface of said dental prosthetic item is designed to make allowances for the visual properties of said adhesive.

14. A dental prosthetic item as defined in claim 13, wherein said interior surface of said dental prosthetic item is designed such that a gap width depending on a desired appearance is present between said interior surface of said dental prosthetic item and the stump of a tooth or said other dental prosthetic item.

15. A dental prosthetic item as defined in claim 13, wherein said dental prosthetic item is translucent and that said adhesive is visually perceptible through said dental prosthetic item.

16. A dental prosthetic item as defined in claim 13, wherein for orientation of said dental prosthetic item relative to the stump of a tooth or said other dental prosthetic item, at least one spacer is present on said dental prosthetic item.

17. A dental prosthetic item as defined in claim 13 wherein mating surfaces are provided on said dental prosthetic item for orientation of said dental prosthetic item relative to the stump of a tooth or said other dental prosthetic item, which mating surfaces enable exact and unambiguous alignment of said dental prosthetic item.

18. A blank for the production of a dental prosthetic item composed of a number of components by means of a material-removal machining technique, wherein a first portion of the blank consists of a first material for another dental prosthetic item and a second portion of said blank consists of a second material for said dental prosthetic item.

19. A blank as defined in claim 18, wherein said material for the other dental prosthetic item consists of Al_2O_3 or ZrO and said material for the dental prosthetic item consists of feldspar ceramics.

20. A blank as defined in claim 18, wherein said portion for the production of the dental prosthetic item has differently colored regions.

* * * * *