

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
3 February 2005 (03.02.2005)

PCT

(10) International Publication Number
WO 2005/009865 A1

(51) International Patent Classification⁷: B65D 79/00,
A47J 43/27, B01F 3/04, 5/06, 11/00

Armin, Sjoerd [NL/NL]; Appelstraat 9, NL-3581 ER Utrecht (NL). **TANJA, Age, Willem** [NL/NL]; Parkweg 22, NL-9725 EH Groningen (NL).

(21) International Application Number:
PCT/NL2004/000525

(74) **Agent: WINCKELS, J., H., F.**; Nieuwe Parklaan 97,
NL-2587 BN Den Haag (NL).

(22) International Filing Date: 22 July 2004 (22.07.2004)

(81) Designated States (unless otherwise indicated, for every

(25) Filing Language: Dutch

Dutch

(26) Publication Language: English

English

(30) Priority Data: 1024012 28 July 2003 (28.07.2003) NL

KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) **Applicant (for all designated States except US):** SARA LEE/DE N.V. [NL/NL]; Keulsekade 143, NL-3532 AA Utrecht (NL).

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: PACKAGE WITH PARTLY FOAMABLE LIQUID BY MEANS OF WHICH A REFRESHMENT CAN BE PREPARED

(57) Abstract: A package including a gas and an at least partly foamable liquid (2) by means of which a refreshment can be prepared, wherein the package is provided with manually operable means (7) with which a displacement of the gas and the liquid in the package can be effected such that foam formation occurs in the package.

WO 2005/009865 A1



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

PACKAGE WITH PARTLY FOAMABLE LIQUID BY MEANS OF WHICH A REFRESHMENT CAN BE PREPARED

The invention relates to a package including a gas and an at least partly foamable liquid by means of which a refreshment can be prepared.

The invention also relates to a method for obtaining foam in a package including a gas and an at least partly foamable liquid, by means of which foam a refreshment can be prepared while the method comprises displacing the liquid and the gas in the package.

In addition, the invention relates to a method for preparing coffee suitable for immediate consumption, which is provided with a foam layer.

Such a device is known from DE 43 32 387. Herein, an airtight holder is described in which a liquid extract is included. A part of the volume of the holder is occupied by air. Before opening of the package takes place, the holder can be shaken, the air and the liquid mixing such that foam is formed in the holder. During mixing, the gas is, as it were, taken up by the liquid leading to the formation of air bubbles. When air bubble formation occurs frequently, foam is formed. When the holder is opened, the foam can be drunk or be introduced into a cup or the like.

A drawback of such a package is that shaking requires rather conspicuous operations. For some people, these operations are unpleasant to perform. To effect sufficient foam formation, the package is sometimes to be shaken quite vigorously. This also requires space, which is not always available to the user of the known package.

An object of the invention is to meet at least one of the above-mentioned drawbacks.

This object is achieved with a package according to the invention which is characterized in that the package is provided with manually operable means with which a displacement of the gas and the liquid in the package can be effected such, that foam formation occurs in the package. Due to the

presence of manually operable means for displacing the liquid and the gas, it is no longer necessary to shake the package vigorously to and fro. Also, when in use, no additional space is required for carrying out the shaking movement.

5 In this document, the liquid and/or the gas is also sometimes expressed in a general term, i.e. a fluid.

A special embodiment of a package according to the invention is characterized in that the means are designed for manually varying, at least as to shape, the package space for the liquid and the gas. Thus, in a very simple manner, the gas and the liquid are displaced in the package. Further, with 10 respect to a shaking movement, the package can be held, at least virtually, stationary in one position, which entails a less conspicuous preparation of foam.

Preferably it holds, that the means comprise a material, designed so as to be flexible from which at least a part of the package has been 15 manufactured. The flexible material can be squeezed together, be dented or folded so that at least a part of the liquid and the gas, in fact the part that was present in a volume part of the package that is squeezed together, dented or folded, moves within the package so that foam formation can occur in the package.

20 In particular it holds, that the means also comprise at least two mutually connected chambers between which the liquid and/or the gas are displaceable. In that case, the liquid and/or the gas can move from one chamber to the other chamber and, optionally, vice versa. This can take place, for instance, by first decreasing the volume of the one chamber so that the 25 liquid and the gas flow to the other chamber. Then, the volume of this other chamber can be decreased, so that the liquid and the gas flow back again to the one chamber. This cycle can be repeated many times so that a much foam formation can occur and the liquid and the gas can turn to foam, if possible completely.

In particular, it holds that the means comprise a fluid flow disturber. By disturbing the fluid flow, gas and liquid are mixed better so that foam formation occurs easier. This fluid flow disturber can comprise at least one channel, constriction or grid located between the at least two chambers.

5 The fluid flow disturber can also comprise turbulence means for causing turbulence in a fluid flow. As a result, per volume unit, a highly efficient mixing of gas and liquid takes place which is beneficial to the formation of foam. The turbulence means can comprise small obstacles, breaking up the fluid flow at that location. The turbulence means can for 10 instance also comprise a widening of a channel through which the fluid flows.

Preferably it holds, that at least a part of the package is designed so as to be transparent. This offers the advantage that a user can observe to what extent foam formation has been effected.

15 The invention is presently elucidated with reference to a drawing. In the drawing:

Fig. 1a schematically shows a side view of a first embodiment of a package according to the invention;

Fig. 1b shows a top plan view of the embodiment shown in Fig. 1a;

20 Fig. 1c shows a side view of the embodiment shown in Fig. 1a, while a pressure is exerted on a part of the package;

Fig. 2 schematically shows a side view of a second embodiment of a package according to the invention;

Fig. 3 schematically shows a side view of a third embodiment of a package according to the invention;

25 Fig. 4 schematically shows a side view of a fourth embodiment of a package according to the invention;

Fig. 5 schematically shows a side view of a fifth embodiment of a package according to the invention;

30 Fig. 6a schematically shows a top plan view of a sixth embodiment of a package according to the invention;

Fig. 6b schematically shows a side view of the embodiment shown in Fig. 6a;

Fig. 7a schematically shows a top plan view of a seventh embodiment of a package according to the invention; and

5 Fig. 7b schematically shows a side view of the embodiment shown in Fig. 7a.

Identical parts are provided in the drawing with identical reference signs.

Each embodiment of a package 1 according to the invention
10 comprises a package including a gas (not shown) and an at least partly foamable liquid 2. With this liquid, a refreshment can be prepared. The package is provided with manually operable means with which a displacement of the gas and the liquid 2 in the package 1 can be effected such that foam formation occurs in the package 1. It will be clear to the skilled person that the
15 embodiments of the package according to the invention described here each comprise a closed package. In particular, the means are designed for manually varying, at least as to shape, a package space 3 for the liquid 2 and the gas. It is possible that the means comprise a material 7 designed so as to be flexible from which at least a part of the package 1 has been manufactured.

20 For the embodiment of Fig. 1a it holds, that the means comprise at least two mutually connected chambers 4, 4', between which the liquid 2 and the gas are displaceable. The means also comprise a fluid flow disturber. The fluid flow disturber can for instance comprise a channel 5 (see Figs. 1a-1c) or a constriction or grid 6 (see Fig. 5) located between the at least two chambers 4,
25 4'. In the embodiment shown in Fig. 1, the chambers 4, 4' comprise raised walls 8 comprising relatively rigid parts. An upper wall 9 and a lower wall 10 have been manufactured from flexible, and in this example even elastic, materials and can be squeezed together. According to this example, the raised walls 8 will hardly, if at all, bend along with the flexible upper wall 9 and
30 lower wall 10. When squeezing the upper wall 9 and lower wall 10 together as

indicated with the arrows P in Fig. 1c, the volume of the chamber 4 is decreased. The volume of chamber 4' will increase as shown in Fig. 1c. Both the liquid 2 and the gas will now flow from the chamber 4 via channel 5 to the chamber 4'. In an embodiment in which the flexible material is designed to be 5 also elastic, when the squeezing forces are removed, the volume of chamber 4 will increase again and an optionally occurring sucking effect can cause the liquid and the gas to flow back again from chamber 4' to chamber 4. Upon an increase of the volume of chamber 4, the volume of the chamber 4' will decrease again. It is also possible to alternately squeeze together chamber 4 10 and chamber 4', so that the fluid moves to-and-fro between these chamber and foam formation occurs as a result of the liquid and the gas mixing. Due to the diameter of the constriction of channel 5 with respect to the size of the chambers 4 and 4', the fluid, comprising both the liquid and the gas, cannot flow freely from chamber 4 to chamber 4' and back. The fluid is urged to flow 15 via channel 5. The constriction the fluid flow encounters when flowing from chamber 4 in the direction of chamber 4' and vice versa, and the widening the fluid flow experiences when the fluid flow flows from channel 5 into either chamber 4' or chamber 4, cause a disturbance of the fluid flow. As a result, the gas and the liquid are mixed with each other and foam formation occurs.

20 In Fig. 2, in chamber 4, a spring 11 is included. In the example as shown in Fig. 2, the raised walls 8 of chamber 4 are manufactured from a flexible material. The upper wall 9 and lower wall 10 can be manufactured from a relatively rigid material. It is possible that with this variant, only the chamber with the spring 11 needs to be alternately pressed and relaxed for 25 obtaining a fluid flow which moves via channel 5 between the chambers 4, 4'.

In Fig. 3, an embodiment is shown in which the means designed for manually varying, at least as to shape, a package space for the liquid and the gas, comprise a bellows. The bellows can also comprise a spring 11. In this case, preferably, the walls 18 of the chamber 4 are designed to be relatively

rigid. Preferably, the wall 12 of the bellows is manufactured from a flexible material 7.

The means as shown in Figs. 2 and 3 can be operated as follows. The volume of the chamber 4 can be reduced against the spring force. As a result 5 thereof, the liquid and gas present in chamber 4 will be urged to flow via channel 5 to chamber 4'. Upon elimination of the applied force, i.e. when the spring 11 is relaxed, the volume of chamber 4 will increase again. It is possible that then, a sucking effect occurs such that at least a part of the liquid and gas present in chamber 4' flows back again into the chamber 4 of a package 1. As 10 explained in the description of Fig. 1, as a result of the flow through channel 5, foam formation can occur because channel 5 acts as a fluid flow disturber promoting to a large extent the mixing of the liquid and gas.

As shown in Fig. 4, the means designed for manually varying, at least as to shape, a package space for the liquid and the gas, can comprise a 15 piston 12 which is included in a package and which can be operated from an outside of a package 1. The piston 12 links up to the relatively rigid upper wall 9 and lower wall 10 of a package as drawn in Fig. 4. Optionally, in chamber 4, between the piston 12 and the channel 5, also a spring 11 can be included.

The means of the embodiment as shown in Fig. 4 can be operated as 20 follows. The piston 12 is moveable in the direction of the chamber 4'. The piston can be operated by applying a force in the direction of the chamber 4' to a projecting part 14 of the package 1 in which a driving part 19 of the piston is included. A part of the package 1 located, in the position shown in Fig. 4, on a side of the piston remote from the liquid 2, comprises a flexible material 7 so 25 that it can move along with the driving part 19. The driving part 19 is connected, preferably on an inside of the package, to a part of the flexible material 7. Further, the driving part can be provided with a pulling member (not shown) which, optionally, reaches beyond the package and which serves for returning the piston 12. A spring (not shown) can cause the piston, when

released after being pressed in, to move such that the content of the chamber 4 is increased again.

Fig. 5 also comprises a package with two chambers 4, 4'. In this case, the fluid flow disturber comprises a grid 6 included in the package at a 5 position where chamber 4 is connected to chamber 4'. However, it could also be stated that chamber 4 and chamber 4' can be considered to be one whole and that approximately in the middle of this whole a gauze, or grid, is included for disturbing a fluid flow which can occur when a package space 3 is manually varied, at least as to shape. This is possible as in this example, the package is 10 manufactured, at least partly, from a flexible material. When the fluid flows through the gauze or the grid 6, foam formation will also occur as the gas and the liquid will mix due to the liquid being disturbed.

In Fig. 6a, a top plan view of a preferred embodiment of a package according to the invention is shown. In this case, each of the chambers 4, 4' of 15 the package 1 comprises a downwardly directed bulge UB, UB'. In this case, each bulge UB, UB' is manufactured from a flexible material. Therefore, it is possible to press the bulge in, in upward direction, such as for instance in the direction of the arrows S. By alternately pressing in first bulge UB and then bulge UB', the liquid and the gas present in the package will flow from 20 chamber 4 to chamber 4', and from chamber 4' back to chamber 4, respectively. In this case, this fluid flow will also have to take place via channel 5. The above-described effects that occur when the fluid flows through the fluid flow disturber such as channel 5 will, in this case too, lead to foam formation. This package is designed to be symmetrical and can moreover be manufactured in a 25 relatively inexpensive and simple manner. The part of the package shown in Fig. 6b can comprise a plastic top sheet provided with two cup-shaped parts each comprising a bulge UB, UB'. Channel 5 too can be included in the part shown in Fig. 6b. The part of the package shown in Fig. 6a can be provided with an, optionally transparent, plastic top sheet closing off the bulge UB, UB' 30 and the channel 5 on the top side shown in Fig. 6, so that a closed package is

involved. The part, hatched in Fig. 6a, can then serve as a contact surface visible due to the transparent top sheet where the two plastic sheets have been attached to each other.

In Fig. 7a, a top plan view of a similar package as the one shown in Fig. 6a is represented. However, in this case, the channel 5 is also provided with turbulence means for causing turbulence in the fluid flow. In this case, the turbulence means comprise a widening of the channel 5 included in the channel 5. It is also possible that the turbulence means comprise obstacles in channel 5.

In the embodiments shown in Figs. 1a, 2, 3, 4 and 5, a level of liquid VS is indicated. Preferably it holds, that in the positions of the embodiments shown, this level of liquid VS is such that the level of liquid extends through the fluid flow disturber. As a result, when the liquid is displaced, in virtually all cases, an amount of gas is taken along into the fluid flow disturber so that mixing of the gas and the liquid can take place and can lead to foam formation.

For each embodiment it holds that it is possible to therewith carry out a method, also according to the invention. This method is directed to obtaining foam in a package including a gas and an at least partly foamable liquid. The method comprises displacing the liquid and the gas in the package. The method also comprises varying, at least as to shape, a package space of the liquid and the gas. It is possible that the variation as to shape also entails a variation as to volume.

Such a package according to the invention and method can be used in a method, also according to the invention, for preparing coffee directly suitable for consumption which is provided with a foam layer. Such a method also comprises separating the at least partly foamed liquid from the package and adding a drinkable liquid such as, for instance, water and/or milk to the at least partly foamed liquid. With this, it is possible to prepare from an extract a cup of coffee with a foam layer, for which there is a need nowadays.

The invention is not limited in any manner to the exemplary embodiments shown. For instance, it is possible that the means are provided with at least two separate parts, each comprising at least one chamber 4, 4' and being connectable to each other. Then, it can hold that at least one of the 5 at least two chambers is at least partly filled with the gas, and at least another of the at least two chambers is at least partly filled with the liquid. For instance, a chamber with gas can be supplied or sold once, and, each time, be connectable again to a new chamber including a liquid. As stated, the package is preferably designed to be transparent.

10 The liquid in the package can comprise an extract. Preferably, a coffee extract is involved here, in which, optionally, a coffee milk extract is included. For instance, a cappuccino extract can be involved. If desired, such an extract can be aromatized. However, other extracts are possible too. Here, 15 cocoa extract, fruit juice extract and soup extract can be considered. However, the liquid can also comprise a concentrate or other instant products which can be foamed.

20 The package can also comprise a provision for opening the package so that the at least partly foamed liquid and the package can be separated from each other. The chambers 4, 4' can be designed such that, upon reduction of the chamber volume, each of them already urges the liquid and the gas in the direction of the fluid flow disturber.




Such variants are all understood to fall within the framework of the invention.

Claims

1. A package including a gas and an at least partly foamable liquid by means of which a refreshment can be prepared, characterized in that the package is provided with manually operable means with which a displacement of the gas and the liquid in the package can be effected such that foam formation occurs in the package.
2. A package according to claim 1, characterized in that the means are designed for manually varying, at least as to shape, a package space for the liquid and the gas.
3. A package according to claim 1 or 2, characterized in that the means comprise a material designed so as to be flexible from which at least a part of the package has been manufactured.
4. A package according to claim 3, characterized in that the flexible material is also elastic.
5. A package according to any one of claims 1 – 4, characterized in that the means comprise a bellows.
6. A package according to any one of claims 1 – 4, characterized in that the means comprise a piston which is included in the package and which can be operated from an outside of the package.
7. A package according to any one of the preceding claims, characterized in that the means comprise at least two mutually connected chambers between which the liquid and/or the gas are displaceable.
8. A package according to any one of claims 1 – 6, characterized in that the means are provided with at least two separate parts which each comprise at least one chamber and which are connectable to each other.
- 25 9. A package according to claim 7 or 8, characterized in that the means also comprise a fluid flow disturber.

10. A package according to claim 9, characterized in that the fluid flow disturber comprises at least one channel, constriction or grid located between the at least two chambers.
11. A package according to claim 9 or 10, characterized in that the fluid flow disturber comprises turbulence means for causing turbulence in the fluid flow.
12. A package according to claim 7 or 8, characterized in that at least one of the at least two chambers is at least partly filled with the gas.
13. A package according to claim 12, characterized in that at least one of the at least two chambers is at least partly filled with the liquid.
14. A package according to any one of the preceding claims, characterized in that at least a part of the package is designed to be transparent.
15. A package according to any one of the preceding claims, characterized in that at least a part of the package is manufactured from a plastic sheet.
16. A package according to claim 15, characterized in that the plastic sheet is provided with at least one cup-shaped part.
17. A package according to claim 16, characterized in that the cup-shaped part can be pressed in for displacing the gas and the liquid in the package.
18. A package according to any one of the preceding claims, characterized in that the liquid comprises an extract or concentrate.
19. A package according to any one of the preceding claims, characterized in that the extract comprises a coffee extract.
20. A package according to any one of the preceding claims, characterized in that the package comprises a provision for opening the package so that the at least partly foamed liquid and the package can be separated from each other.

21. A method for obtaining foam in a package including a gas and an at least partly foamable liquid, by means of which foam a refreshment can be prepared, while the method comprises displacing the liquid and the gas in the package, characterized in that the method also comprises varying, at least as 5 to shape, a package space for the fluid and the gas.
22. A method for preparing coffee directly suitable for consumption and which is provided with a foam layer, wherein the method comprises using a method according to claim 21; separating the at least partly foamed liquid from the package; and adding a drinkable liquid such as, for instance, water to 10 the at least partly foamed liquid.

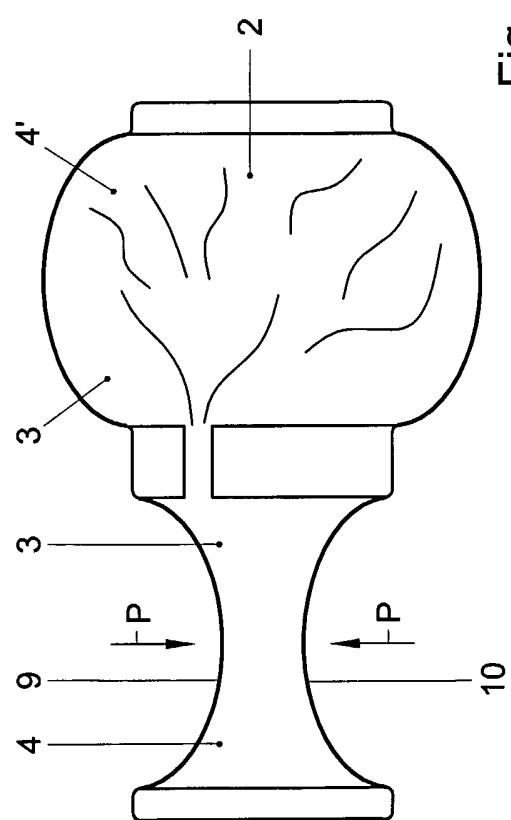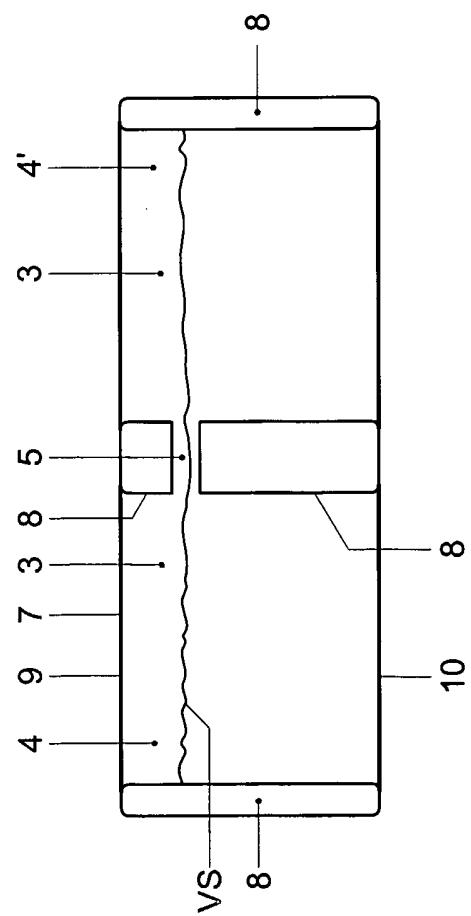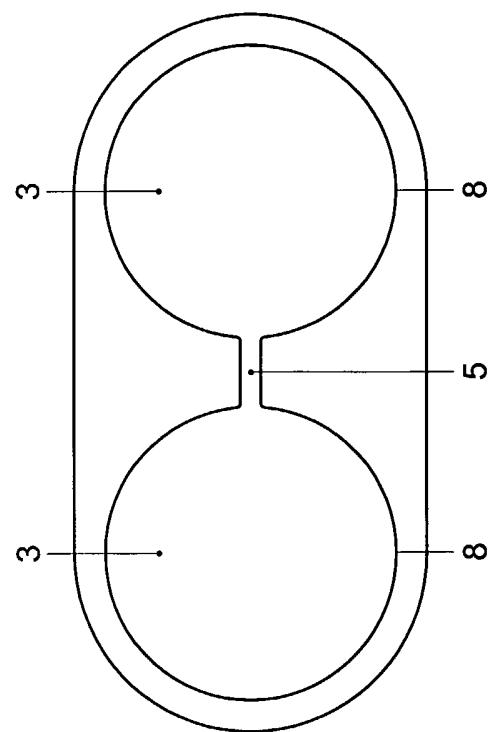

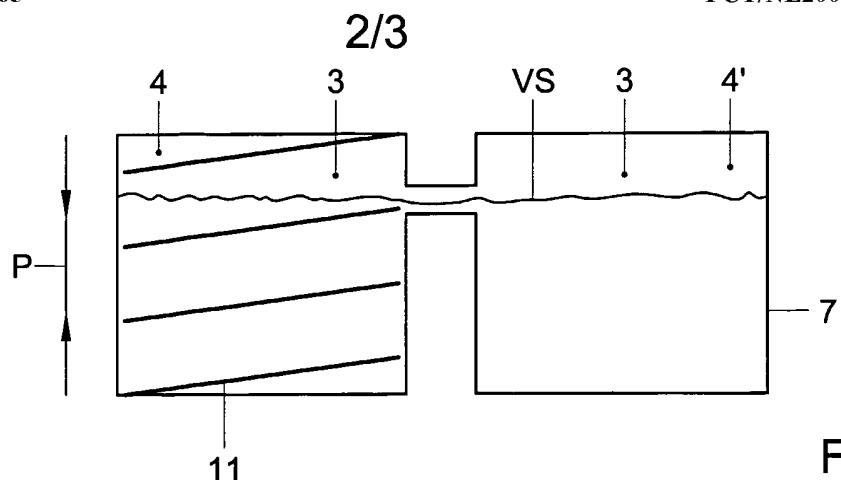


Fig. 2

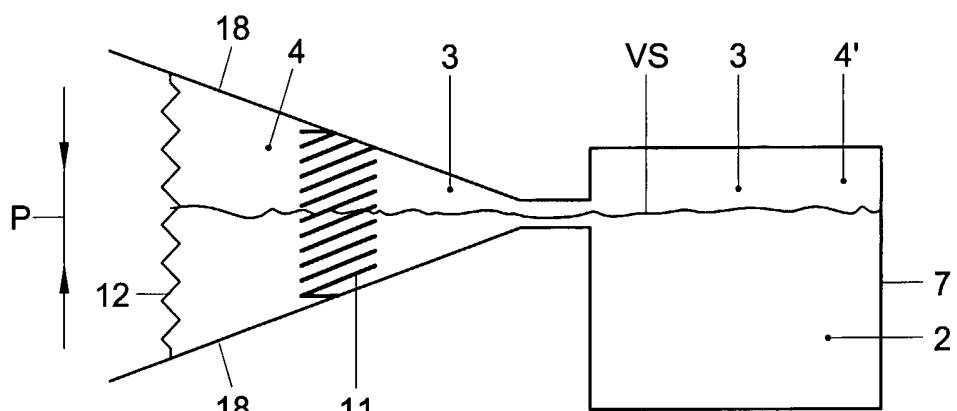


Fig. 3

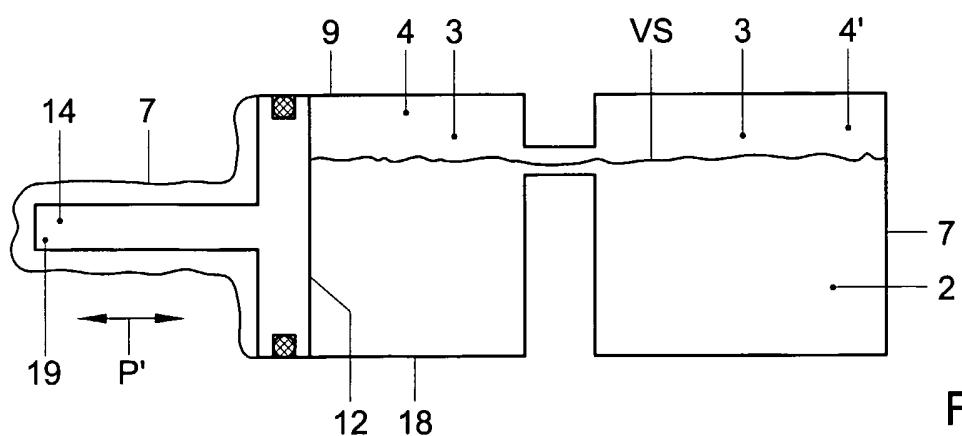


Fig. 4

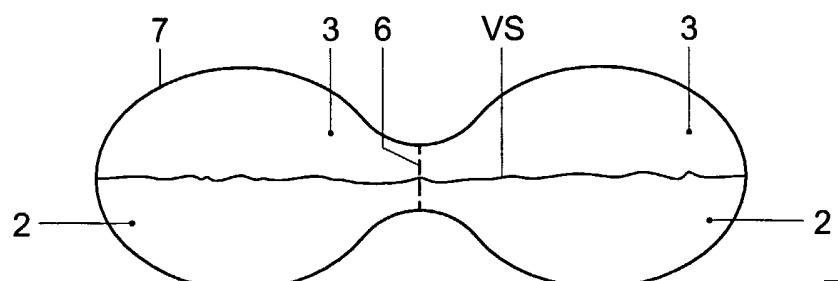


Fig. 5

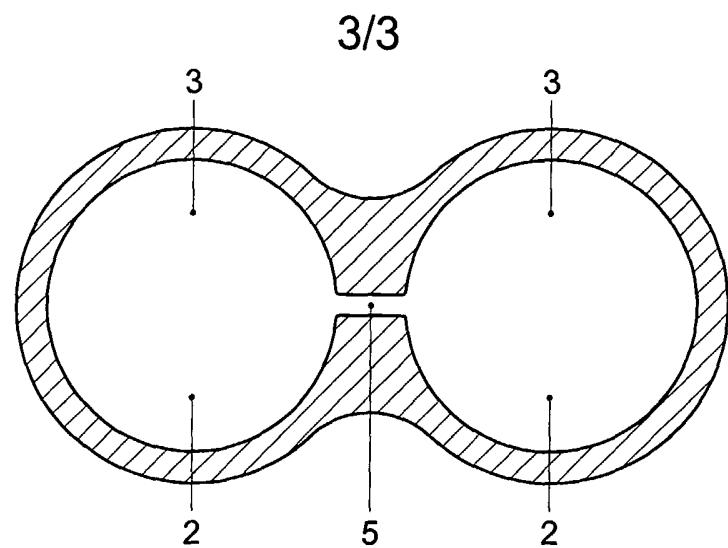


Fig. 6a

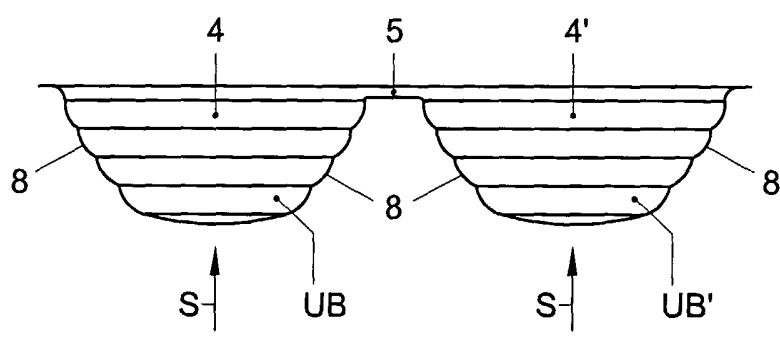


Fig. 6b

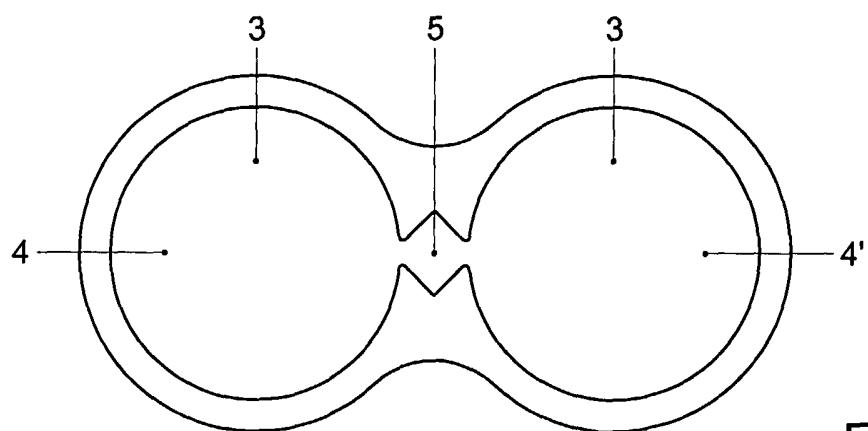


Fig. 7a

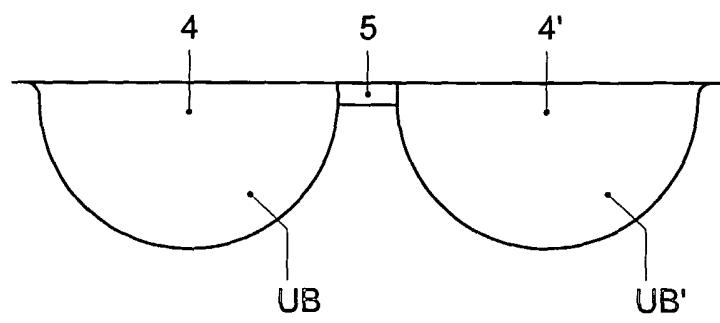


Fig. 7b

INTERNATIONAL SEARCH REPORT

International Application No

PCT/NL2004/000525

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 B65D79/00 A47J43/27 B01F3/04 B01F5/06 B01F11/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 B65D A47J B01F A23C A23P

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category [°]	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 939 122 A (BRADY FRANK A) 17 August 1999 (1999-08-17) abstract; figures 1,2 -----	1,6,14, 18-20
X	US 1 982 884 A (EINAR SCHRODER ET AL) 4 December 1934 (1934-12-04) page 1, line 1 - line 4; figure 1 -----	1,18
A	JP 55 092130 A (MORIYAMA MASA0) 12 July 1980 (1980-07-12) abstract -----	2-4, 7-10,12, 13,20-22
A	DE 38 38 530 A (HILTI AG) 17 May 1990 (1990-05-17) abstract; figure 4 ----- -/-	2-4, 7-11,15, 18

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

[°] Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

29 November 2004

Date of mailing of the international search report

09/12/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Mans-Kamerbeek, M

INTERNATIONAL SEARCH REPORT

International Application No
PCT/NL2004/000525

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 62 298433 A (TDK CORP) 25 December 1987 (1987-12-25) abstract -----	2-4
A	DE 43 32 387 A (POCCINO ESPRESSO GMBH) 30 March 1995 (1995-03-30) cited in the application the whole document -----	1,18-20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/NL2004/000525

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 5939122	A	17-08-1999	US	5780087 A		14-07-1998
US 1982884	A	04-12-1934	NONE			
JP 55092130	A	12-07-1980	NONE			
DE 3838530	A	17-05-1990	DE	3838530 A1		17-05-1990
JP 62298433	A	25-12-1987	NONE			
DE 4332387	A	30-03-1995	DE	4332387 A1		30-03-1995