




(86) Date de dépôt PCT/PCT Filing Date: 2001/08/15
 (87) Date publication PCT/PCT Publication Date: 2002/02/28
 (85) Entrée phase nationale/National Entry: 2003/02/05
 (86) N° demande PCT/PCT Application No.: GB 2001/003636
 (87) N° publication PCT/PCT Publication No.: 2002/016014
 (30) Priorité/Priority: 2000/08/17 (0020287.9) GB

(51) Cl.Int.⁷/Int.Cl.⁷ B01D 53/94, B01J 19/08, F01N 3/08,
F01N 3/035
 (71) Demandeur/Applicant:
ACCENTUS PLC, GB
 (72) Inventeurs/Inventors:
GILLESPIE, ROBERT FREW, GB;
RAYBONE, DAVID, GB;
SHAWCROSS, JAMES TIMOTHY, GB
 (74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : PROCEDE ET APPAREIL PERMETTANT D'ELIMINER LES NOX DES GAZ DE MOTEUR
 (54) Title: PROCESS AND APPARATUS FOR REMOVING NOX FROM ENGINE EXHAUST GASES

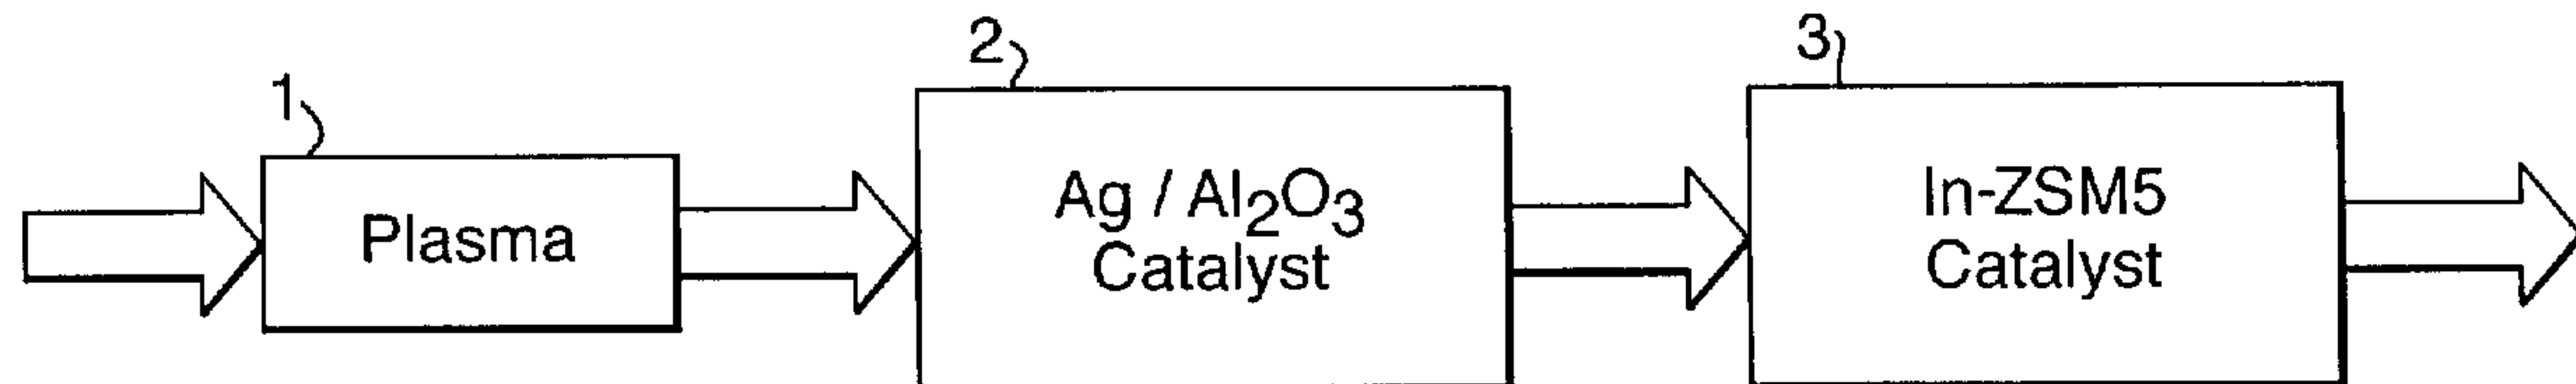

(57) **Abrégé/Abstract:**

A method and apparatus for removing nitrogen oxides from internal combustion engine exhaust emissions consisting of the operations of contacting the exhaust emissions with a non-thermal plasma (1) and a silver doped alumina catalyst (2) and then an indium-doped zeolite catalyst (3).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 February 2002 (28.02.2002)

PCT

(10) International Publication Number
WO 02/16014 A1

(51) International Patent Classification⁷: **B01D 53/94**,
F01N 3/08, 3/035, B01J 19/08

HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK,
LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,
MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL,
TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(21) International Application Number: PCT/GB01/03636

(22) International Filing Date: 15 August 2001 (15.08.2001)

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD,
TG).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0020287.9 17 August 2000 (17.08.2000) GB

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)*

— *of inventorship (Rule 4.17(iv)) for US only*

(71) Applicant (*for all designated States except US*): ACCENTUS PLC [GB/GB]; 329 Harwell, Didcot, Oxfordshire OX11 0QJ (GB).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): GILLESPIE, Robert, Frew [GB/GB]; 3 Standford Drive, Abingdon, Oxfordshire OX14 1EW (GB). RAYBONE, David [GB/GB]; 1 Talbot Cottages, Stow-on-the-Wold, Gloucester GL54 1DW (GB). SHAWCROSS, James, Timothy [GB/GB]; 27 Ticknell Piece Road, Chalbury, Oxfordshire OX7 3TN (GB).

(74) Agents: LOFTING, Marcus, John et al.; Accentus plc, Patents Dept, 329 Harwell, Didcot, Oxfordshire OX11 0QJ (GB).


Published:

— *with international search report*

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PROCESS AND APPARATUS FOR REMOVING NOX FROM ENGINE EXHAUST GASES

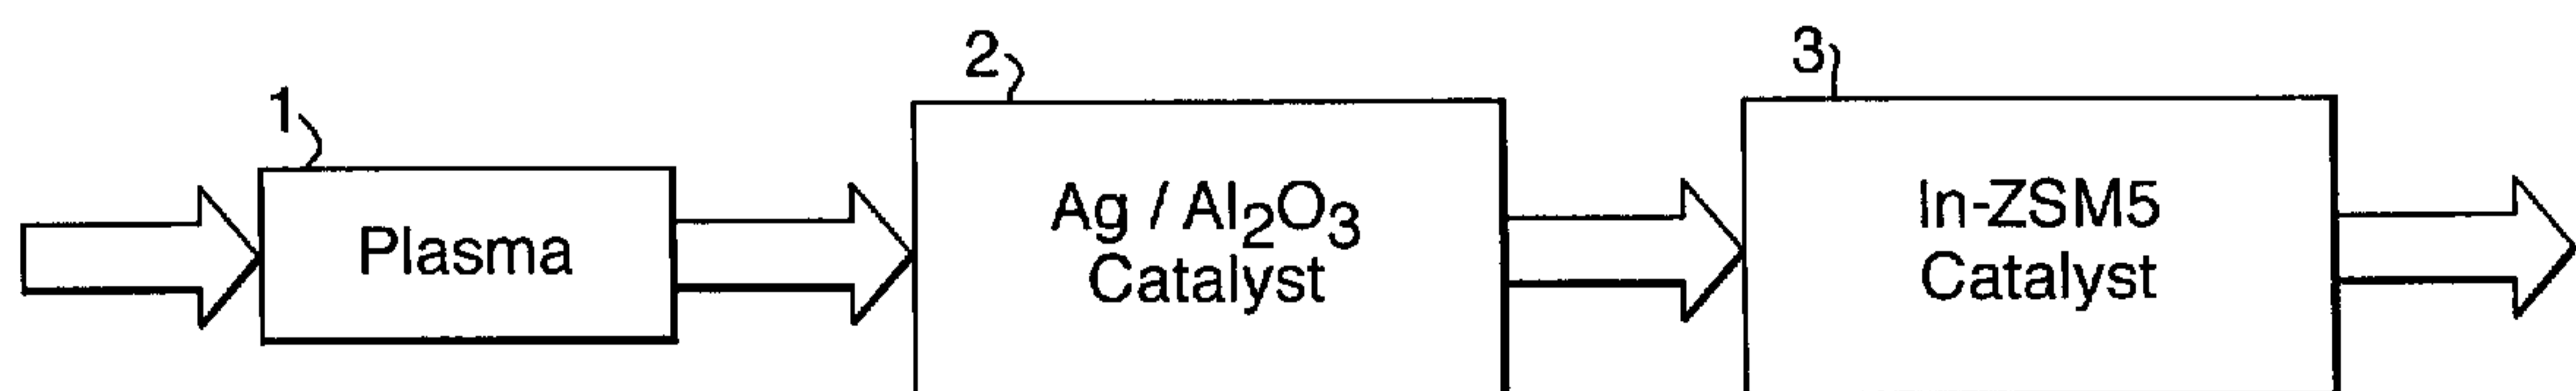

(57) Abstract: A method and apparatus for removing nitrogen oxides from internal combustion engine exhaust emissions consisting of the operations of contacting the exhaust emissions with a non-thermal plasma (1) and a silver doped alumina catalyst (2) and then an indium-doped zeolite catalyst (3).



WO 02/16014 A1

PROCESS AND APPARATUS FOR REMOVING NOX FROM ENGINE EXHAUST GASES

The present invention relates to the removal of nitrogen oxides from gaseous effluent and more particularly to the treatment of the exhaust gases from internal combustion engines to reduce the emissions of nitrogen oxides. The invention relates, but is not limited to automotive applications such as diesel engines and lean burn gasoline as well as gas turbines and effluent off-gas treatment.

One of the major problems associated with the development and use of internal combustion engines is the noxious exhaust emissions from such engines. Two of the most deleterious materials, particularly in the case of diesel engines, are particulate matter (primarily carbon) and oxides of nitrogen such as nitric oxide (NO) and nitrogen dioxide (NO₂) often collectively referred to as (NO_x). Excessive levels of NO_x are also produced by spark-ignition engines operating in what is known as 'lean burn' mode in which the air: fuel ratio is higher than that required for stoichiometric combustion. It is also appreciated that alternative fuels and hybrid type combustion engines, as an example which may burn diesel fuel and/or natural gas, may also pose a similar problem.

Increasingly severe emissions control regulations are forcing internal combustion engine and vehicle manufacturers to find more efficient ways of removing these materials in particular from internal combustion engine exhaust emissions.

One of the ways in which emissions are being reduced is by modifying the combustion process in the engine. Modifications include altering injection timing, engine

- 2 -

design, common rail systems and exhaust gas recirculation (EGR) but all have certain limits for practical engine operation. Unfortunately, in practice, it is found that combustion techniques which improve the situation in relation to one of the above components of internal combustion engine exhaust emissions tend to worsen the situation in relation to the other.

There are however numerous aftertreatment techniques being developed to remove NO_x emissions from exhaust gases from internal combustion engine exhaust as well as other waste gas sources. In general, practical NO_x reduction systems for internal combustion engines are reliant on passing the exhaust gases across a catalyst. There are generally two types of catalytic reduction methods used, non-selective and selective catalytic reduction (SCR). This invention is concerned primarily with SCR systems and requires a suitable reductant or reducing agent to be present or added to the exhaust gas. Typical reductants for this purpose are urea or ammonia, but these are not the most practical for mobile vehicle applications. This is because this needs additional space for the reductant tank on the vehicle and a supply infrastructure to allow the reductant to be replenished. SCR catalysts can however perform very effectively using hydrocarbons, normally found in the combustion engine exhaust, as the reductant for a certain range of temperatures. One of the key issues with this approach is whether the exhaust gas has the required concentration of hydrocarbon reductant present to promote the required selective catalytic reactions to reduce NO_x to nitrogen. The concentration of hydrocarbons may be altered, if there is insufficient in the exhaust, by for example, adding a post-injection of fuel into the combustion chamber or by injecting fuel into the exhaust. One recently developed

- 3 -

method is to use non-thermal plasma to activate the hydrocarbon, which may be in the form of additional fuel, to promote the catalytic NO_x reduction to nitrogen as disclosed in WO99/12638.

5

Considerable effort has been dedicated to the development of catalysts for the reduction of NO_x from diesel exhausts. The paper 'Selective Catalytic Reduction of NO_x with N-Free Reductants' by M. Shelef published in Chem. Rev. 1995 pages 209-225 is a comprehensive review in particular of the use of zeolites for the reduction of the NO_x content of internal combustion engine exhaust gases. Other catalysts are mentioned but not dealt with comprehensively. The more recent review by Parvalescu et al 'Catalytic Removal of NO' published in Catalysis Today, volume 46 (1998) pp 233 - 316 is a comprehensive document on the range of materials that have been evaluated for the selective catalytic reduction of NO_x. The catalysts include zeolites, both proton-exchanged and metal-exchanged zeolites, oxides such as simple oxides, for example Al₂O₃, V₂O₅, complex oxides such as perovskites and precious metal supported oxides, in the presence of reducing agents such as hydrocarbons or ammonia. Mixed oxides have also been used in the presence of hydrocarbons for example a mixed manganese/zirconium oxide as described in US 6,103,207.

Despite extensive worldwide efforts it has been difficult to find an effective catalyst for selective catalytic reduction of NO_x because candidate materials can be deactivated in use for example by water vapour at typical diesel exhaust temperatures. Selectivity of the

- 4 -

catalyst is difficult to control as the optimum operating temperature of the catalyst does not always coincide with the exhaust gas temperature. In practice, the catalyst may not be wholly selective to NO_x for example it may oxidise hydrocarbon at the expense of selective catalytic reduction of NO_x to N_2 . There are also concerns that lean NO_x catalysts which are aimed at reducing NO_2 have demonstrated poor selectivity to nitrogen production with the majority of the NO_2 being converted to N_2O or back-converted to NO .

Silver-based catalysts have been described for the reduction of NO_x in vehicle emissions and these catalysts, particularly silver on alumina, have been prepared by a variety of wet chemical techniques including sol-gel processing. For example impregnation methods including incipient wetness have been described in EP 0 658 368 A (Chemcat), A Martinez-Arias et al in Applied Catalysis B: Environmental, volume 28, pages 29-41 (2000) has used microemulsions, K I Shimuzu et al in Applied Catalysis B: Environmental, volume 25, pages 239-247, (2000) used coprecipitation from non-aqueous solutions, Eranen et al in SAE 2000-01-2813 used impregnation methods and Bethke and Kung in Journal of Catalysis, volume 172, pages 93-102 (1997) used incipient wetness on a sol-gel derived gamma alumina powder. In EP 0 658 368 A (Chemcat) the alumina substrate had a well-defined pore size corresponding to a bulk density greater than 0.60 g cm^{-3} , a surface area of $120 \text{ m}^2 \text{ g}^{-1}$ and a skeleton density less than 1.80 g cm^{-3} but the silver on alumina catalyst was not used in conjunction with any other catalyst material. Silver-based catalysts can be treated by a hydrothermal treatment before measurement of

- 5 -

their catalytic activity as described in PCT/GB 01/01571 and the pending application GB 01 09734.4 filed on 20 April 2001.

5 In the papers by Miyadera "Alumina-supported silver catalysts for the selective reduction of nitric oxide with propene and oxygen-containing organic compounds" published in Applied Catalysis B: Environmental, volume 2, (1993) pages 199-205, and Miyadera and Yoshida
10 "Alumina-supported silver catalysts for the selective reduction of nitric oxide with propene" published in Chemistry Letters, (1993), page 1483 a 2% Ag-alumina catalyst showed promising hydrothermal stability for NO_x reduction. Added propene and partially oxygenated
15 hydrocarbons, such as 2-propanol, were effective reductants. Masuda et al in the article "Silver promoted catalyst for removal of nitrogen oxides from emissions of diesel engines" in Applied Catalysis B: Environmental, volume 8, (1996), pages 33-40 showed that 3% Ag-mordenite
20 was a promising lean NO_x catalyst compared to Ag-ZSM-5 and Ag-alumina with CH₃COCH₃ as reductant. Bethke and Kung in the paper "Supported Ag catalysts for the lean reduction of NO with C₃H₆" published in Journal of Catalysis, volume 172, (1997), page 93 showed that the
25 oxidation state of silver affects its catalytic activity for the reduction of NO_x. Another silver containing compound, silver aluminate, AgAl₂O₄, doped with 0.1 weight % WO₃ was shown to be a promising catalyst for the reduction of NO_x by Nakatsuji et al in the paper
30 "Catalytic reduction system of NO_x in exhaust gases from diesel engines with secondary fuel injection" published in Applied Catalysis B: Environmental, volume 17, (1998), pages 333-345. Keshavaraja et al in an article

- 6 -

'Selective catalytic reduction of NO with methane over Ag-alumina catalysts' published in Applied Catalysis B: Environmental, volume 27, pages L1-L9, 2000 used CH₄ for the selective reduction of NO over silver-alumina catalysts at temperatures between 723-923 K with Ag loadings of 1-7 weight percent.

Meunier et al have discussed the role of silver-alumina catalysts on the selective catalytic reduction of NO by propene in an article 'Mechanistic aspects of the selective reduction of NO by propene over γ -alumina and silver-alumina catalysts' published in Journal of Catalysis, volume 187, pages 493-505, 1999. High silver loadings, 10 percent by weight produced N₂O while a low loading, 1-2 percent by weight, was effective for the selective catalytic reduction of NO to N₂. Adsorbed organo-nitrogen compounds such as organo-nitrites were intermediate species in the reaction.

Masters and Chadwick showed that oxygenated hydrocarbons, methanol and dimethyl ether can reduce NO to N₂ under lean conditions by selective catalytic reduction over γ -alumina. This work, 'Selective reduction of nitric oxide by methanol and dimethyl ether over promoted alumina catalysts in excess oxygen', published in Applied Catalysis B: Environmental, volume 23, pages 235-246, 1999 showed that molybdena (MoO₃) additions improved the catalytic activity at temperatures lower than those required in the case of γ -Al₂O₃ alone. Surface formyl species were an intermediate product in the reaction.

- 7 -

Combinations of catalysts for reduction of NO_x in which one is indium based have also been described. For example Iwamoto et al in 'Oxidation of NO to NO₂ on a Pt-MFI zeolite and subsequent reduction of NO_x by C₂H₄ on an In-MFI zeolite: a novel de-NO_x strategy in excess oxygen' published in Chemical Communications, pages 37-38 (1997) have described a combination of a platinum on zeolite catalyst for oxidation of NO to NO₂ followed by an indium on zeolite catalyst to reduce NO₂ to nitrogen in the presence of C₂H₄ in excess oxygen. A combination of a silver-alumina catalyst and an indium-containing ZSM-5 zeolite has been described in JP 9103649 for the reduction of NO_x when methanol was used as the reducing agent. The use of a mixed manganese/zirconium oxide catalyst combined with platinum deposited on gamma alumina that is described in US 6,103,207 is an example of a NO_x reduction catalyst containing more than two active catalyst materials.

There have also been increasing levels of research and development into the combination of a non-thermal plasma and a catalyst to promote the reduction from NO_x from combustion exhaust gas e.g. Hoard et al SAE-2000-01-2895, Tonkyn et al SAE-2000-01-2896, Lampert SAE-2000-01-2962 and Fisher et al SAE-2000-01-2965.

The non-thermal plasma can help the catalyst overcome some of its inherent temperature and selectivity limitations by creating activated species not normally formed thermally. Two main routes can be identified in the effect of plasma on catalyst NO_x reduction systems in for example automotive exhaust gas aftertreatment. The

majority NO_x species in combustion exhaust gas is nitric oxide NO although NO₂ can form as the gas cools along the exhaust pipework and when it enters the atmosphere.

5 A first route is to use a 2-stage system relying upon the plasma oxidation of hydrocarbons (by O, OH radicals) to promote NO to NO₂ conversion as a precursor to NO₂ reduction over a suitable catalyst. The presence of the hydrocarbons also suppresses further oxidation of
10 the NO₂ to acidic species.


This 2-stage process (A) can then be summarised as:




followed by



20 In the second route plasma activation of hydrocarbon in the exhaust promotes NO_x reduction over an NO selective catalyst. This process (B) can be summarised as follows:

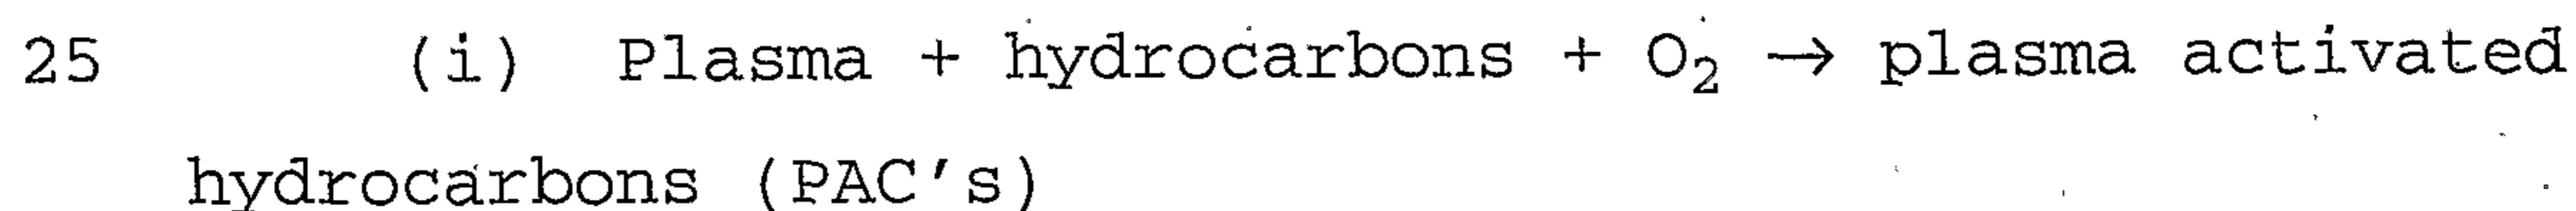

followed by

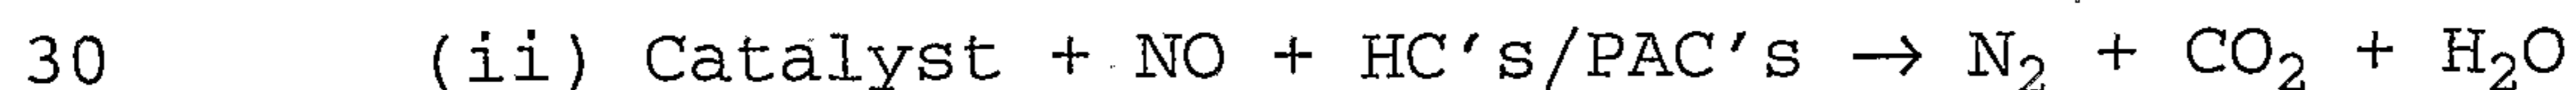

- 9 -

This process can occur in a 2 stage or single stage plasma catalyst system. The main effect of the plasma in process B is to activate the hydrocarbon in the exhaust gas that then promotes the reduction of NO over the catalyst as disclosed in WO99/12638. The plasma can activate hydrocarbon that is in the exhaust gas or activate it in a separate stage that serves to inject the activated hydrocarbon into the exhaust gas containing NO before passing over the catalyst combination. This minimises any plasma enhanced NO to NO₂ conversion and promotes process B. Process B is especially useful for simultaneous NO_x and particulate removal (Thomas et al SAE 2000-01-1926). For example, when simultaneous removal of NO_x and particulates is required a suitably designed plasma reactor, containing a packing material designed to filter and retain particulate matter, can promote oxidation of the particulates in diesel exhausts at low temperatures. It is suggested that the trapped particulates compete with the hydrocarbons for O and possibly OH radicals. We have recognised that this is an important consideration in plasma catalyst systems employing an NO₂ selective catalyst, as the particulate oxidation may deplete the key radicals necessary for NO to NO₂ conversion. Thus for simultaneous NO_x and particulate removal, there is advantage in selecting a catalyst formulation which is NO selective (process B).

The present invention is based upon an appreciation of the advantages which flow from the effects of a non thermal plasma when combined in a particular way with a combination or mixture of an NO selective reduction catalyst such as silver alumina and an NO₂ selective reduction catalyst such as Indium coated ZSM5 zeolite.

- 10 -

It is an object of the present invention to provide an improved method and reactor system using two or more catalytic materials which respectively provide selective catalytic reduction of NO and NO₂ in the emissions of internal combustion engines.

According to the invention there is provided a method for removing oxides of nitrogen from the exhaust emissions from an internal combustion engine comprising the operations of contacting exhaust emissions from an internal combustion engine with a body of silver-containing activated alumina in the presence of a gaseous hydrocarbon material and subsequently contacting the exhaust emissions with a body of indium-containing zeolite material, characterised in that the body of silver-containing alumina is exposed to activated hydrocarbons produced in a non-thermal plasma generated in conditions in which hydrocarbons are activated by the plasma without significant simultaneous production of NO₂ by the plasma.

In this way NO reduction over the silver doped alumina catalyst is enhanced and the indium doped zeolite catalyst reduces any NO₂ in the exhaust gas or NO₂ converted from NO over the first stage silver doped alumina catalyst.

The non-thermal plasma can be arranged to act directly on the exhaust emissions from an internal combustion engine to activate hydrocarbons which are in the exhaust either from unburnt fuel or which have been added to the exhaust. This can be arranged so that the plasma acts upon the exhaust emissions before passing over the catalyst combination, or, alternatively, the catalyst materials can also be exposed to the non-thermal

- 11 -

plasma. For either of these approaches, it is important that the conditions are such that the plasma energy is taken up principally for activation of hydrocarbons and not in the production of NO_2 . This is achieved where
5 other species in the exhaust subjected to the plasma combine thermodynamically more readily with oxygen than NO , as is the case, for example, where the exhaust contains carbonaceous particulates. In this way significant simultaneous production of NO_2 by the plasma
10 is avoided.

Alternatively, significant simultaneous production of NO_2 by the plasma is avoided by applying the plasma to hydrocarbons separately from the exhaust emissions and
15 injecting plasma activated hydrocarbons into the exhaust emissions.

Types of non-thermal plasma reactor appropriate for this invention include but are not limited to, a
20 dielectric barrier or silent discharge type, a pulsed corona reactor, packed bed reactor such as a ferroelectric bed reactor and a surface discharge reactor.

25 The concentration of silver in the alumina should be below a percent weight concentration above which N_2O is produced in the catalytic reaction with the effluent stream. This may be achieved by adopting a silver concentration in the range 0.1 to 5 per cent by weight.
30 A 2% by weight silver content is a particularly suitable concentration to use. The indium content is in the range 1 to 10 weight percent and a preferred content is approximately 5 weight percent. More than two catalyst combinations can be used to optimise the catalytic NO_x

- 12 -

reduction, including exhaust gas containing NO and NO₂ over the temperature range required.

Also there may be included the operation of removing
5 carbonaceous combustion products from the exhaust emissions prior to contact with the selective reduction catalysts. This may be done by establishing the non-thermal plasma in the exhaust gas emissions and/or by contacting the exhaust gas emissions with an oxidation
10 catalyst, acting as a carbon combustion catalyst, such as alkali-metal salts including lithium nitrate described in GB 2 232 613 B, cerium oxide, alkali-metal doped lanthanum oxide-vanadium oxide, such as lanthanum-caesium-vanadium pentoxide, alkali metal vanadates and
15 perovskites described in the pending application GB 00 15952.5 filed on the 30th June 2000 or perovskites described in WO 99/38603 or combinations of these materials. In either case attention is required, as explained above, to ensure that the exhaust gas emissions
20 passing over the selective reduction catalysts contain hydrocarbons which have been activated by non-thermal plasma without significant simultaneous production of NO₂ by the plasma.

25 According to the invention in a second aspect there is provided a reactor system for removing nitrogen oxides from exhaust emissions from an internal combustion engine comprising at least one reactor chamber, means for contacting the exhaust emissions with a silver-containing
30 activated alumina material and an indium-containing zeolite material, characterised in that means are provided for exposing the silver-containing alumina to activated hydrocarbons produced in a non-thermal plasma generated in conditions in which hydrocarbons are

- 13 -

activated by the plasma without significant simultaneous production of NO_2 by the plasma.

The catalytic materials may both or individually be positioned within a plasma region or outside a plasma region and be as mixed coating on a suitable substrate or as separate catalyst sections. A number of permutations may be employed. The catalytic material, can be in the form of spheres, pellets, extrudates, fibres, sheets, wafers, frits, meshes, coils, foams, membrane, ceramic honeycomb monolith or granules or as a coating on any of the above shapes or contained within a dielectric, polymeric or metallic material in any of the above shapes or as a combination of more than one packing. The catalysts may also be coated onto suitable substrate materials such as FeCr alloy steel and contained within micro-channel reactors. The amounts of catalysts may be optimised according to the application for example as different percentage volumes, space velocities, metal loadings as required.

Preferably there is included means for measuring the temperature of the exhaust emissions prior to contacting them with the silver-containing alumina, and means for stopping the generation of the non-thermal plasma if the temperature is above a pre-determined value, for example 600 Kelvin.

In one arrangement in accordance with the invention, the silver-containing alumina is in the form of a gas permeable body contained between two electrodes through which the exhaust emissions are constrained to pass, and means is provided for applying to the electrodes across the body of silver-containing alumina a potential sufficient to excite a plasma in the exhaust emissions.

- 14 -

within the interstices in the body of silver-containing alumina.

In an alternative arrangement, the non-thermal
5 plasma is generated in a plasma generating reactor situated upstream of a reactor chamber containing the silver-containing alumina.

The invention will now be described by way of
10 example, with reference to the accompanying drawings, in which

Figure 1 is a flow diagram of a first embodiment of
the invention;
15

Figure 2(i) is a series of curves showing the variation with temperature of the concentrations of different nitrogen oxides in the effluent passed over an upstream 80% silver alumina, followed by a 20% indium
20 ZSM5 (by volume) catalyst combination, in which the effluent stream has an initial composition of 500 ppm NO in 10% O₂/90% N₂ and a C1: NO_x ratio of 6 based on propene (C₃H₆). Note that on contacting NO with the O₂/N₂ mixture, some NO₂ is formed, as indicated by the position of the
25 curves at the 273K temperature axis. (For all plots the values plotted at '273K' represent the input species concentrations and not an effect of the catalysts at this temperature).

30 Figure 2(ii) is a series of curves showing the variation with temperature of the concentrations of NO in the effluent from a reactor system embodying the invention of using the plasma and the combination of silver alumina and indium ZSM5 as an 80:20 by volume
35 ratio, in which the effluent stream has an initial

- 15 -

composition of 500 ppm NO in 10% O₂/90% N₂ and a C1: NO_x ratio of 6 based on propene (C₃H₆).

Figure 3 is a series of curves illustrating the effect of differing ratios of hydrocarbon to NO_x in simulated internal combustion engines exhaust gases on the effectiveness of a silver/alumina catalyst as an agent for removing NO from the simulated exhaust emissions with the same initial composition as shown in Figure 2;

Figure 4 is a series of curves corresponding to those of Figure 3 but relating to the effectiveness of indium doped ZSM5 zeolite as an agent for reducing NO₂ in the effluent from the silver/alumina catalytic reactor;

Figure 5 is a flow diagram of a second embodiment of the invention;

Figure 6 is a flow diagram of a third embodiment of the invention;

Figure 7 is a flow diagram of a fourth embodiment of the invention;

Figure 8 shows schematically an exhaust system embodying the invention;

Figure 9 is a longitudinal section of a plasma generator (of a form described in WO 00/71866) suitable for use in carrying out the invention;

Figure 10 illustrates the gas flow path through the reactor of Figure 9.

- 16 -

Referring to Figures 1 to 4 of the drawings, a method for the removal of NO_x from the exhaust emissions from an internal combustion engine (not shown in the drawing), consists of the operations passing the exhaust gases through a plasma reactor chamber 1 and subsequently flowing these plasma processed exhaust gases through a reactor chamber 2 containing a body of silver-containing activated alumina ($\text{Ag}/\text{Al}_2\text{O}_3$) and passing the effluent from reactor chamber 2 through a reactor chamber 3 containing a body of indium-containing zeolite material ($\text{In}/\text{ZSM5}$). The arrows indicate the direction of exhaust gas flow constrained to flow through an appropriate exhaust gas pipe typical of that found, by way of an example, for combustion engines. The catalysts can be contained, as shown, in two separate chambers 2 and 3 or be combined into one chamber. They may be intimately mixed or in separate sections of the single chamber so as to act sequentially.

20

Providing sufficient hydrocarbons are present in the exhaust gases from the internal combustion engine, such as is the case usually with diesel engines or spark-ignition engines operating in what is known in the art as lean burn conditions, and the temperature of the exhaust gases is in the region of 675° Kelvin, both of which conditions are satisfied in the vicinity of the exhaust manifold of an internal combustion engine, the $\text{Ag}-\text{Al}_2\text{O}_3$ acts to achieve high NO removal from the exhaust gases. Should the temperature of the exhaust gases be greater than approximately 723° Kelvin, however, then some conversion of NO to NO_2 may occur.

30

- 17 -

The In/ZSM5 in the second reactor chamber 3 acts on NO₂ in the effluent from the reactor chamber 2 to reduce the NO₂ to N₂. The In/ZSM5 is effective over a wide range of temperatures, lower than those required by the Ag/Al₂O₃ catalyst, about 425° Kelvin being suitable. At higher temperatures there is evidence of back conversion of NO₂ to NO. The In/ZSM5 is however more selective at lower NO₂ concentrations which results in the NO₂ to NO back conversion contribution being very small for the exhaust gas streams where NO is typically the majority NO_x species. This is demonstrated in figure 2(i). Also, the reaction of NO₂ over the In/ZSM5 catalyst is less dependent on the concentration of hydrocarbons in the gases exposed to it. It is suitable, therefore, for mounting in an exhaust system downstream of the Ag/Al₂O₃ catalyst.

Figure 2(i) presents the temperature-related performance of the silver doped alumina and indium doped zeolite combination of catalysts for removal of NO, NO₂ and total NO_x emissions with an initial hydrocarbon:nitrogen oxide ratio in the exhaust gases of 6:1. The catalyst combination demonstrates effective removal of NO, NO₂ and total NO_x emissions. What is especially notable is that the presence of the indium catalyst has reduced the NO₂ emissions very effectively across a broad temperature range much more effectively than the silver catalyst on its own.

Figure 2 (ii) presents both the temperature-related performance of the catalyst combination on its own and the effect when, in accordance with the invention, the

- 18 -

exhaust gas is subjected to activation by a non-thermal plasma before passing over the silver and indium combination of catalysts. The curves show respective removal of NO_x emissions with an initial hydrocarbon: nitrogen oxide ratio in the exhaust gases of 6:1. The plasma-catalyst combination configuration demonstrates significantly enhanced removal of NO_x emissions over the catalyst only approach.

10 Figures 3 and 4 present curves showing similar parameters for the Ag/Al₂O₃ and In/ZSM5 catalysts separately with initial hydrocarbon to NO_x mole ratios of 0, 1:1 and 6:1 based upon a C₁ hydrocarbon (number of carbon atoms in hydrocarbon). Note that in the Figures
15 this ratio can refer to hydrocarbon: NO_x, hydrocarbon: NO or hydrocarbon: NO₂ ratios. In practice a C₃ hydrocarbon, propene, was used. To a first approximation propene is equivalent to a three C₁ hydrocarbon.

20 The concentration of silver in the silver/alumina catalyst material may be in the range 0.1 to 5% by weight and the concentration of indium in the indium zeolite catalyst material may be in the range 0.5 to 10% by weight. Preferred values are 2% and 5% respectively.
25 Indium can be deposited onto the zeolite by ion-exchange.

In practice, during the initial start-up of an internal combustion engine or similar for low load/low engine speed conditions, the temperature of the exhaust
30 gases can be typically 425 - 525 Kelvin and as can be seen from Figure 3 in particular, at these temperatures the silver/alumina catalyst is relatively inefficient for the reduction of NO, the predominant NO_x component

- 19 -

although the In-zeolite is efficient at low temperature for conversion of NO_2 to N_2 . A way of alleviating this problem is to establish a non-thermal plasma in the exhaust gases either before they are exposed to the silver/alumina catalyst, or simultaneously therewith as demonstrated in figure 2(ii). Also, it may be necessary to inject additional hydrocarbons into the catalyst reactors and /or plasma, either in the form of the fuel supplied to the engine, or from a separate source to promote the catalytic reduction of NO_x . The hydrocarbon, including additional hydrocarbon injected into the plasma, is converted by the plasma into activated hydrocarbon species, as described in WO99/12638. Activated hydrocarbons can include oxygenated hydrocarbons. Such activated hydrocarbons react with nitrogen oxides over catalytic materials such as silver-containing alumina at lower temperatures than hydrocarbons which have not been plasma activated. In this way activated hydrocarbons can extend the temperature range of catalyst activity to lower temperature. For additional hydrocarbon injection a reservoir may be provided for the hydrocarbon additive (derived from the fuel supplied to the engine or from a separate source) and injection of hydrocarbon additive controlled in dependence upon information as to NO concentration in the exhaust. This NO concentration information may be derived from the engine management system and engine map or from an NO sensor appropriately positioned in the exhaust. The plasma can thus introduce beneficial effects, such as enhancing (through the generation of activated hydrocarbons) the action of the silver-indium catalyst combination in reducing NO_x to N_2 .

Figure 5 illustrates such a process in which the temperature of the exhaust gases is measured by a sensor

- 20 -

501, which actuates a power source 502 for a plasma generator 503 when the temperature of the exhaust gases is for example below ~600 Kelvin. It will be appreciated that the appropriate temperature for this control of the plasma may vary according to the exhaust composition and the operating condition of the engine. The plasma is configured in such a way as to activate hydrocarbon in the exhaust gas to promote reduction over the catalysts in reactor chambers 2 and 3.

10

A more sophisticated process for the treatment of internal combustion engine exhaust emissions may include provision for removing particulate carbonaceous combustion products from the exhaust emissions by passing the exhaust emissions through a soot trap 601 containing, for example, a cordierite wall flow monolith or a silicon carbide filter which may be catalytically coated or a plasma oxidation stage before catalyst reactor chambers 2 and 3. Figure 6 illustrates such an exhaust emission treatment process. The initial temperature measurement and plasma power supply stages are omitted from the drawing. As an example if soot trap 601 is a plasma oxidation stage it can be operated in such a way as to oxidise the particulate emissions from, for example internal combustion engine exhaust and also activate hydrocarbons in the exhaust gas. These hydrocarbons may be those in the exhaust gas or added to it by systems such as described subsequently in figures 7 and 8. The source of hydrocarbon can also be the soluble organic fraction (SOF) of the particulate. Additional hydrocarbon can also be generated by a controlled post-injection of fuel into the engine. This combined particulate and NO_x removal system can use similar control parameters such as temperature as described with reference to Figure 5.

35

- 21 -

Figure 7 shows schematically a more sophisticated system in which there is incorporated a means for injecting activated hydrocarbons into the exhaust gas further enabling the plasma enhanced catalytic reduction of NO_x to be achieved. Reactor chambers 2 and 3 are as described previously. A sensor 701 which may monitor for example temperature and/or hydrocarbon concentration provides a signal to a controller 704 which processes the signal and controls the operation of a power source 702 that operates plasma reactor 703. The controller 704 also controls the addition of hydrocarbon from a source 705, which may be stored as a gas, liquid, or solid fuel. This hydrocarbon is injected into the plasma reactor 703, which activates it before injecting it into the main exhaust flow via injection port 706. The exhaust gases containing the plasma-activated hydrocarbons then pass over the catalysts contained in chambers 2 and 3 promoting enhanced NO_x reduction. This approach uses the plasma to activate hydrocarbon via a hydrocarbon injection stage where the plasma does not have the full exhaust flow passing through it. The plasma-activated hydrocarbon is then injected into the main exhaust flow.

Figure 8 shows schematically another system in which there is incorporated a means for injecting hydrocarbons into the exhaust gas further enabling the plasma enhanced catalytic reduction of NO_x to be achieved. Reactor chambers 2 and 3 are as described previously. Referring to Figure 8 the temperature of the exhaust gases is measured by a sensor 801, which actuates a power source 802 for a plasma generator 803 positioned upstream of the catalyst chambers 2 and 3, when the temperature of the exhaust gases is for example below ~600 Kelvin. A probe 804 connected to hydrocarbon sensor 805 is also mounted

- 22 -

in the exhaust system. The hydrocarbon sensor 805 is connected to a source of hydrocarbon 806. The hydrocarbon source 806 is connected to an injector valve 807 again mounted in the exhaust system upstream of the plasma reactor 803. This hydrocarbon injection stage can then inject additional hydrocarbon to the exhaust gas if it falls below a critical level to sustain NO_x reduction. This stage may be additionally controlled in conjunction with the plasma stage (not shown in figure 8) to match the concentration of additional hydrocarbon added to the appropriate energy density of the plasma to activate sufficient hydrocarbons to promote enhanced NO_x reduction over the catalysts contained in chambers 2 and 3. By way of summary the approach illustrated by Figure 8 uses a separate hydrocarbon injection stage into the main exhaust flow which then passes through the plasma reactor 803.

It will be appreciated that the arrangements of Figure 7 and Figure 8 are readily adapted to respond to measurements from a sensor (not shown) of NO and/or NO₂ in the exhaust gases emerging from the final reactor chamber 3.

A suitable plasma generator for use as the plasma generator reactor 801 is shown in Figures 9 and 10.

Referring to Figure 9, the plasma generator reactor 901 consists of a reactor chamber 901 which has inlet and outlet stubs 902, 903 respectively, by means of which it can be incorporated into the exhaust system of an internal combustion engine.

Inside the reactor chamber 901 there is an inner electrode 904 which is supported within a dielectric tube

- 23 -

905, made for example out of α -alumina which has its upstream end closed by a spherical dome 906 to facilitate the flow of exhaust gases through the reactor 901. The inner surface of the dielectric tube 905 can be

5 metallised with a metal coating in order to increase the physical contact between the inner electrode 904 and the dielectric tube 905. In this example, the inner electrode 904 is conveniently provided by a deposited electrically conducting layer of silver on the inner

10 surface of the dielectric tube 905. High voltage connection via an high voltage input terminal 907 is made through a spring loaded telescopic tube assembly 908 and spring contacts 909. Load from the sprung telescopic tube assembly 908 is received by a load spreader plate

15 910, which is connected to the conducting layer of silver forming the inner electrode 904. The materials, including the spring are required to operate at elevated temperatures, and the spring must have low creep at such temperatures. A preferred material for the spring is an

20 Inconel alloy such as that known as X750. An alumina end flange 911 is shaped to receive and locate the end of the dielectric tube 905 and is itself located by a sprung metal clip 912.

25 A convenient potential for the excitation of the plasma is of the order of kilovolts to tens of kilovolts and repetition frequencies in the range 50 to 5000 Hz, although higher frequencies of the order of tens of kilohertz can be used. Pulsed direct current is

30 convenient for automotive use, but alternating potentials for example triangular or sine waves of the same or similar characteristics can be used. The potential is, when required, applied to the inner electrode 904 through the high voltage input terminal 907. Concentric with the

35 inner electrode 904 and dielectric tube 905 is a grounded outer electrode 913 made for example of stainless steel.

- 24 -

At the inlet end of the plasma generator reactor 801 the spherical dome of the dielectric tube 905 is in contact with a compliant heat resistant material 914 that rests in the curved part of the outer electrode 913 and is held in place by a metallic ring 915 with a series of screws (not shown).

As shown in Figure 10, the outer electrode 913 has a series of baffles 1001 and slots 1002. The baffles 1001 extend from the outer electrode 913 to the inner surface of the wall of the reactor chamber 801 and act as grounding connections as well as causing the exhaust gases to follow a convoluted path which has both axial and circumferential components and being at least partially helical. There is also a radial component of flow, initially inwardly as the gas transfers from the outside of the outer electrode 913 to the space between the electrodes 904 and 913 and then outwardly as the gas returns, to leave the reactor from outside the outer electrode 913. Thus there is also a spiral component in the gas flow pattern.

Where the reactor is to be used for a configuration in which the plasma is generated within the interstices of a porous body of the silver doped alumina catalyst, the latter is disposed in the space between the electrodes 904 and 913.

It will be appreciated by those skilled in the art that other configurations including axial flow such as a parallel plate configurations can be adopted if desired as can other forms of non-thermal plasma generator such as pulsed corona discharge reactors, surface discharge reactor, dielectric and/or ferroelectric pellet bed reactor. The invention may also be incorporated into other aftertreatment systems, engine modifications or

- 25 -

emissions control technologies such as EGR, cooled EGR, soot traps, continuously regenerating traps.

- 26 -

Claims

1. A method for removing oxides of nitrogen from the exhaust emissions from an internal combustion engine, comprising the operations of contacting exhaust emissions from an internal combustion engine with a body of silver-containing activated alumina in the presence of a gaseous hydrocarbon material and subsequently contacting the exhaust emissions with a body of indium-containing zeolite material, characterised in that the body of silver-containing alumina is exposed to activated hydrocarbons produced in a non-thermal plasma generated in conditions in which hydrocarbons are activated by the plasma without significant simultaneous production of NO₂ by the plasma.

2. A method according to claim 1, further characterised in that significant simultaneous production of NO₂ by the plasma is avoided by applying the plasma to the exhaust gases under conditions in which carbonaceous combustion products are present.

3. A method according to claim 1, further characterised in that significant simultaneous production of NO₂ by the plasma is avoided by applying the plasma to hydrocarbons separately from the exhaust emissions and injecting plasma activated hydrocarbons into the exhaust emissions.

4. A method according to any of the preceding claims, further characterised in that there is included the operations of measuring the temperature of the exhaust emissions prior to contacting them with the silver-containing alumina and stopping the generation of non-thermal plasma when the temperature of the exhaust emissions is above a predetermined value.

- 27 -

5. A method according to claim 4, further characterised in that generation of non-thermal plasma is stopped when the temperature of the exhaust emissions is above 600° Kelvin.
- 5
6. A method according to any of the preceding claims, further characterised in that there is included the operations of determining the initial concentration of hydrocarbons in the exhaust emissions and controlling
10 addition of hydrocarbons to promote reduction of nitric oxide over the silver-containing alumina and reduction of nitrogen dioxide over the indium-containing zeolite material.
- 15 7. A method according to any preceding claim, further characterised in that there is included the operation of removing carbonaceous combustion products from the exhaust emissions prior to contacting them with the silver-containing alumina material.
- 20
8. A method according to claim 7, further characterised in that removal of carbonaceous combustion products is facilitated by passing the exhaust emissions over an oxidation catalyst acting as a carbon combustion
25 catalyst.
9. A method according to claim 8, further characterised in that the oxidation catalyst is an alkali metal salt, cerium oxide, an alkali metal vanadate, a perovskite or
30 alkali metal doped lanthanum oxide-vanadium oxide or combinations of these.
10. A method according to any preceding claim, further characterised in that the concentration of silver in the
35 alumina is in the range 0.1 to 5 per cent by weight.

- 28 -

11. A method according to claim 10, further characterised in that the concentration of silver in the alumina is approximately 2 per cent by weight.
- 5 12. A method according to any preceding claim, further characterised in that the concentration of indium in the zeolite material is in the range 1 to 10 per cent by weight.
- 10 13. A method according to claim 12, further characterised in that the concentration of indium in the zeolite material is approximately five per cent by weight.
- 15 14. A method according to claim 13, further characterised in that the zeolite is a ZSM5 with a silica to alumina mole ratio around fifty to one.
- 20 15. A reactor system for removing nitrogen oxides from exhaust emissions from an internal combustion engine comprising at least one reactor chamber (2,3), means (2,3) for contacting the exhaust emissions from an internal combustion engine with a silver-containing activated alumina material and an indium-containing
25 zeolite material, characterised in that means (1) are provided for exposing the silver-containing alumina to activated hydrocarbons produced in a non-thermal plasma generated in conditions in which hydrocarbons are activated by the plasma without significant simultaneous
30 production of NO₂ by the plasma.
16. A reactor system according to claim 15, further characterised in that significant simultaneous production of NO₂ by the plasma is avoided by applying the plasma to

- 29 -

the exhaust gases under conditions in which carbonaceous combustion products are present.

17. A reactor system according to claim 15, further characterised in that significant simultaneous production of NO₂ by the plasma is avoided by applying the plasma (703;803) to hydrocarbons (705;806) separately from the exhaust emissions and injecting (706;807) plasma activated hydrocarbons into the exhaust emissions.

10

18. A reactor system according to any of claims 15 to 17, further characterised in that there is included means (501) for measuring the temperature of the exhaust emissions prior to contacting them with the silver-containing alumina, and means for stopping the generation of non-thermal plasma if the temperature of the exhaust emissions is above a predetermined value.

15

19. A reactor system according to any of claims 14 to 18, further characterised in that said at least one reactor chamber comprises a first reactor chamber (2) containing the silver-containing alumina, and a second reactor chamber (3) containing the indium-containing zeolite material.

25

20. A reactor system according to any of claims 15 to 19, further characterised in that the non-thermal plasma is generated in a plasma generating reactor (1) situated upstream of the said at least one reactor chamber (2,3).

30

21. A reactor system according to claim 19, further characterised in that the silver-containing alumina is in the form of a gas permeable body contained between two electrodes (904,913) through which the exhaust emissions are constrained to pass, and means is provided for

35

- 30 -

applying to the electrodes (904,913) across the body of silver-containing alumina a potential sufficient to excite a plasma in the exhaust emissions within the interstices in the body of silver-containing alumina.

5

22. A reactor system according to claim 20 or 21, further characterised in that there is included a reservoir (705;806) for a hydrocarbon additive, which may be derived from the fuel supplied to the engine or from a separate source, means for providing an indication of NO concentration in the exhaust emissions and means controlled in dependence upon the said indication of NO concentration for extracting hydrocarbon additive from the reservoir (705;806) and injecting it into the exhaust emissions prior to them entering the said at least one reactor chamber (2,3).

23. A reactor system according to claim 22, further characterised in that the said means for extracting and injecting hydrocarbon additive is controlled to provide just sufficient hydrocarbon additive to minimise NO_x concentration in the exhaust emissions.

24. A reactor system according to any of claims 15 to 23, further characterised in that there is included means for removing carbonaceous combustion products from the exhaust emissions prior to contacting them with the silver-containing alumina material.

25. A reactor system according to any of claims 15 to 24, further characterised in that the concentration of silver in the silver-containing alumina is in the range 0.1 to 5 per cent by weight.

- 31 -

26. A reactor system according to claim 25, further characterised in that the concentration of silver in the silver-containing alumina is approximately 2 per cent by weight.

5

27. A reactor system according to any of claims 15 to 26, further characterised in that the concentration of indium in the indium-containing zeolite material is in the range 1 to 10 per cent by weight.

10

28. A reactor system according to claim 27, further characterised in that the concentration of indium in the indium-containing zeolite is approximately 5 per cent by weight.

15

Fig.1.



Fig.5.

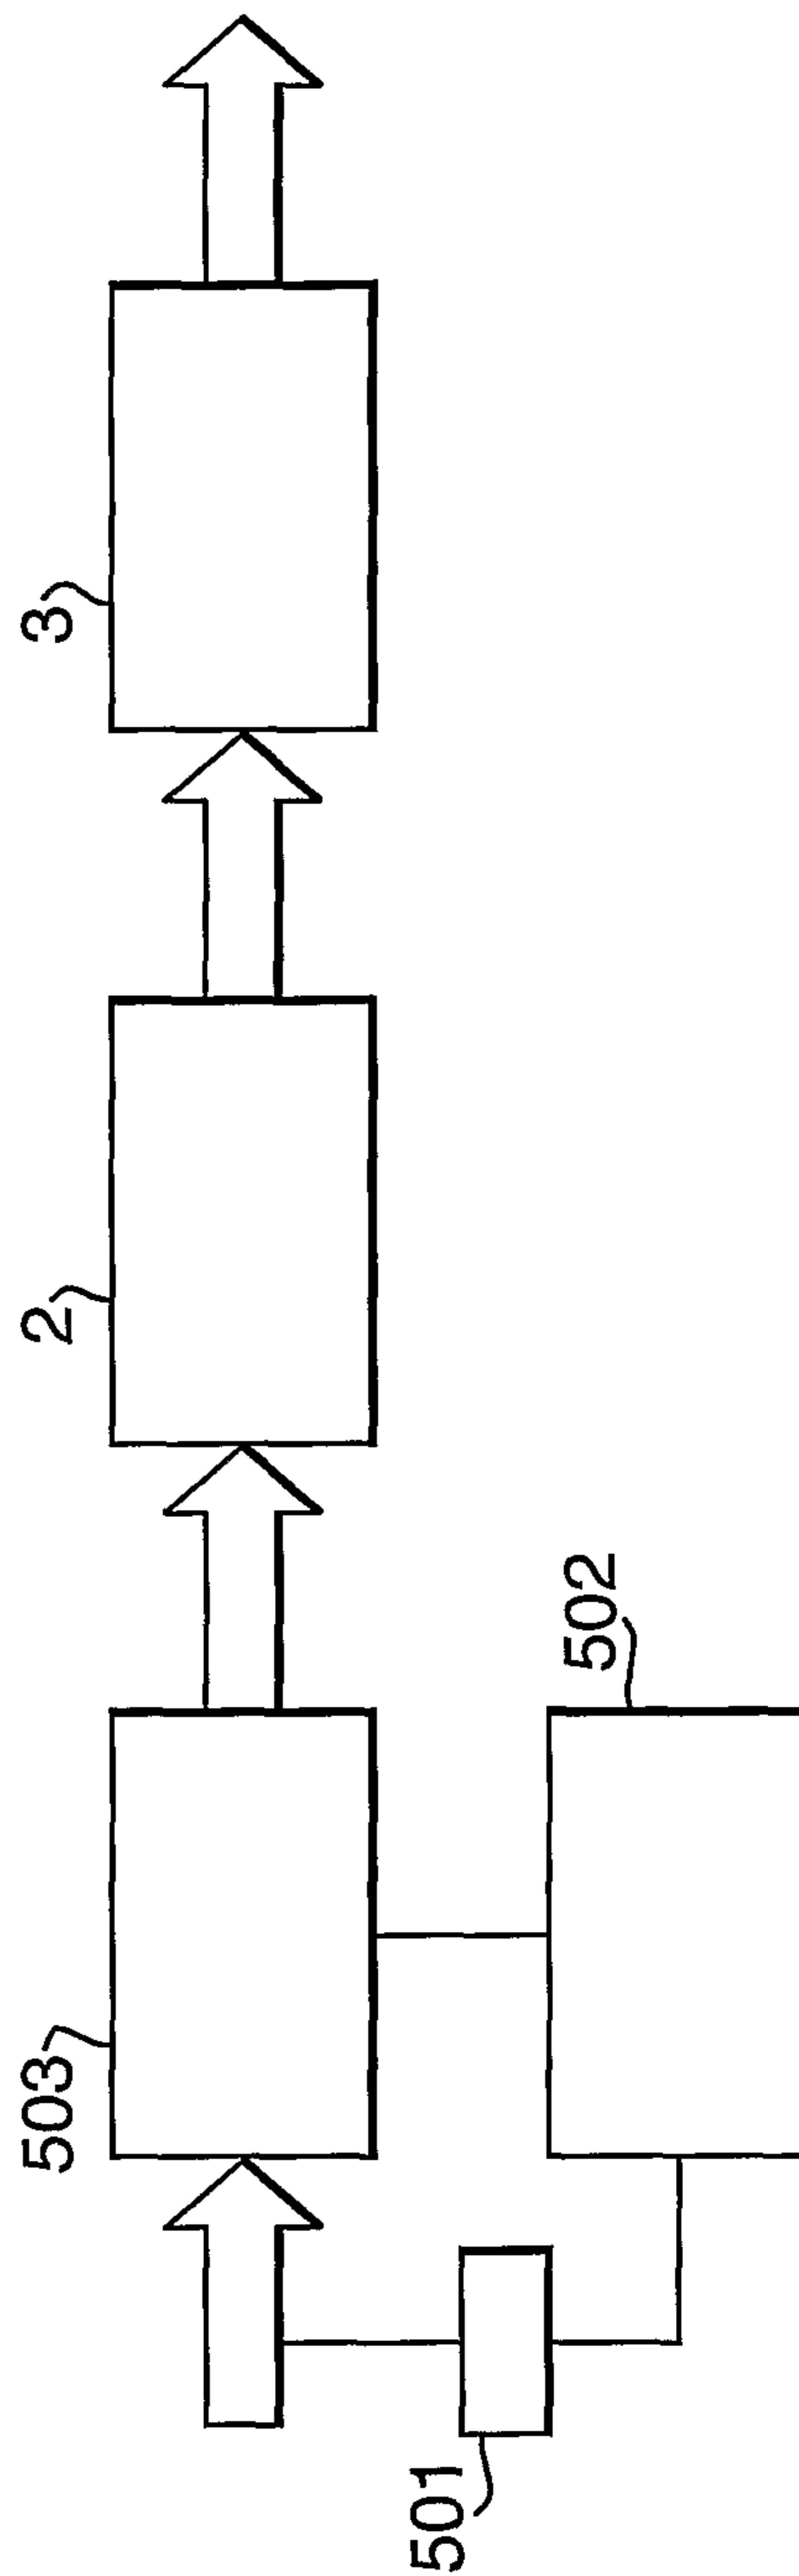


Fig.2 (i).

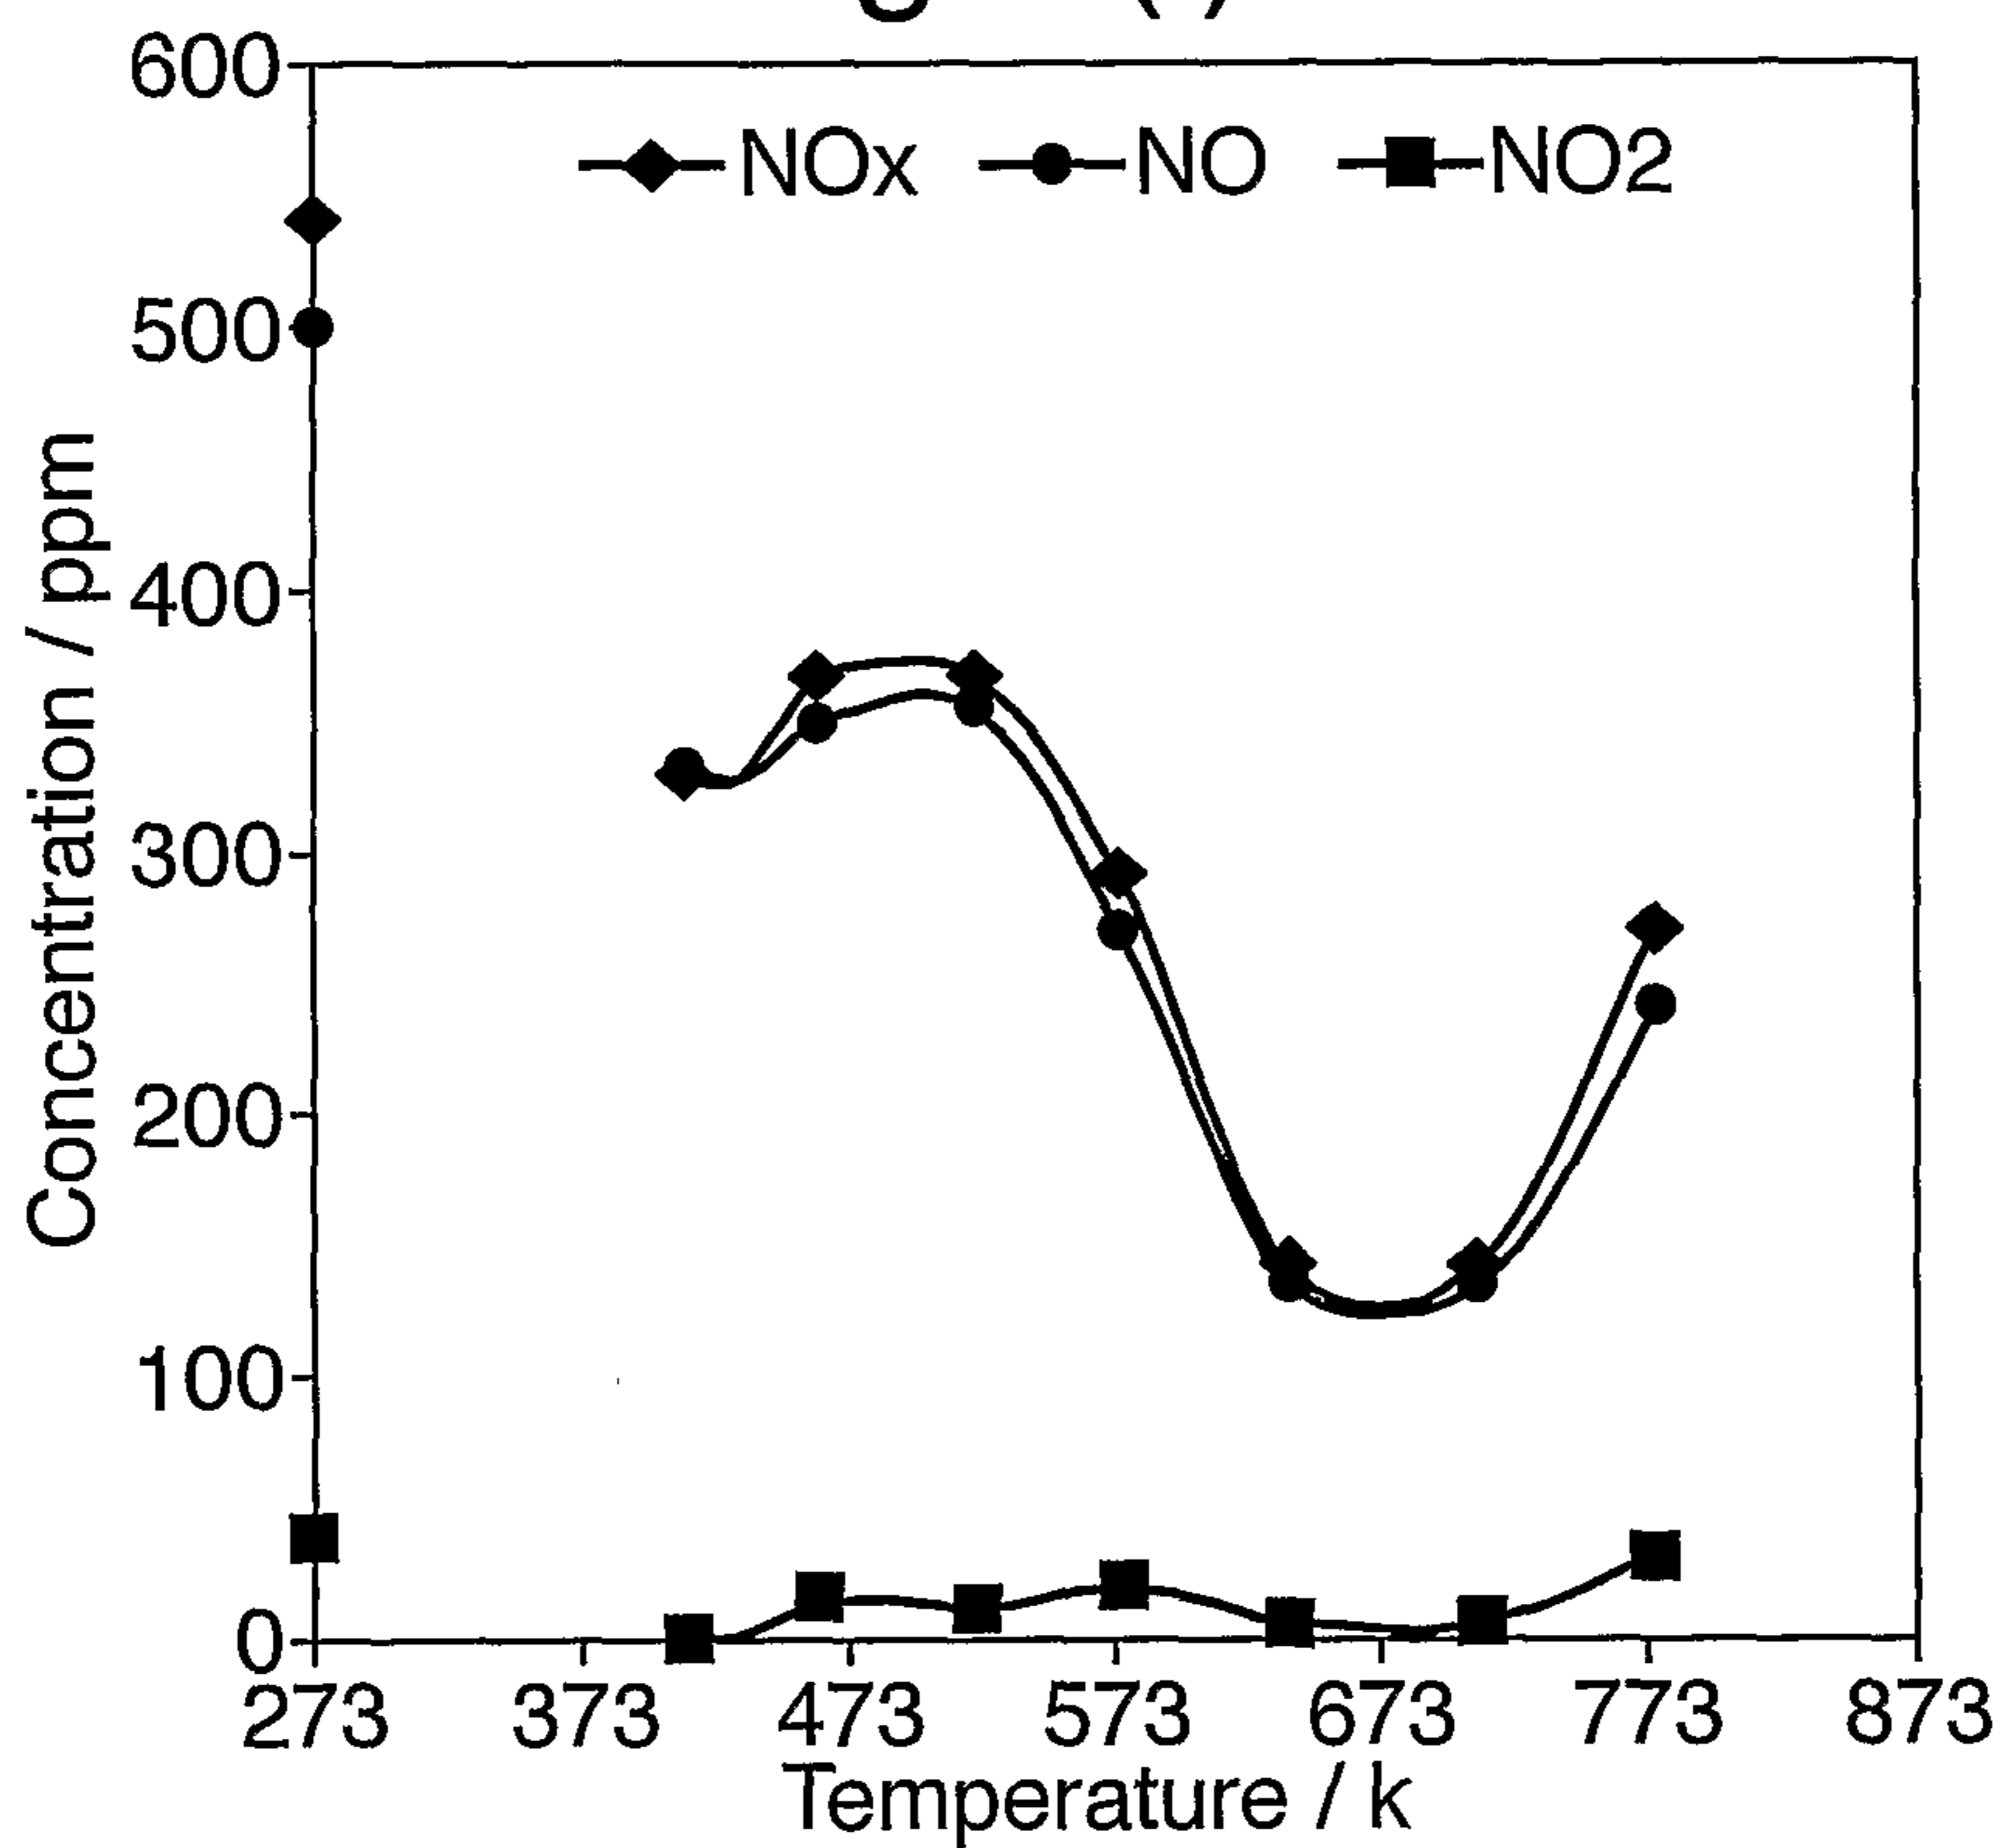


Fig.2 (ii).

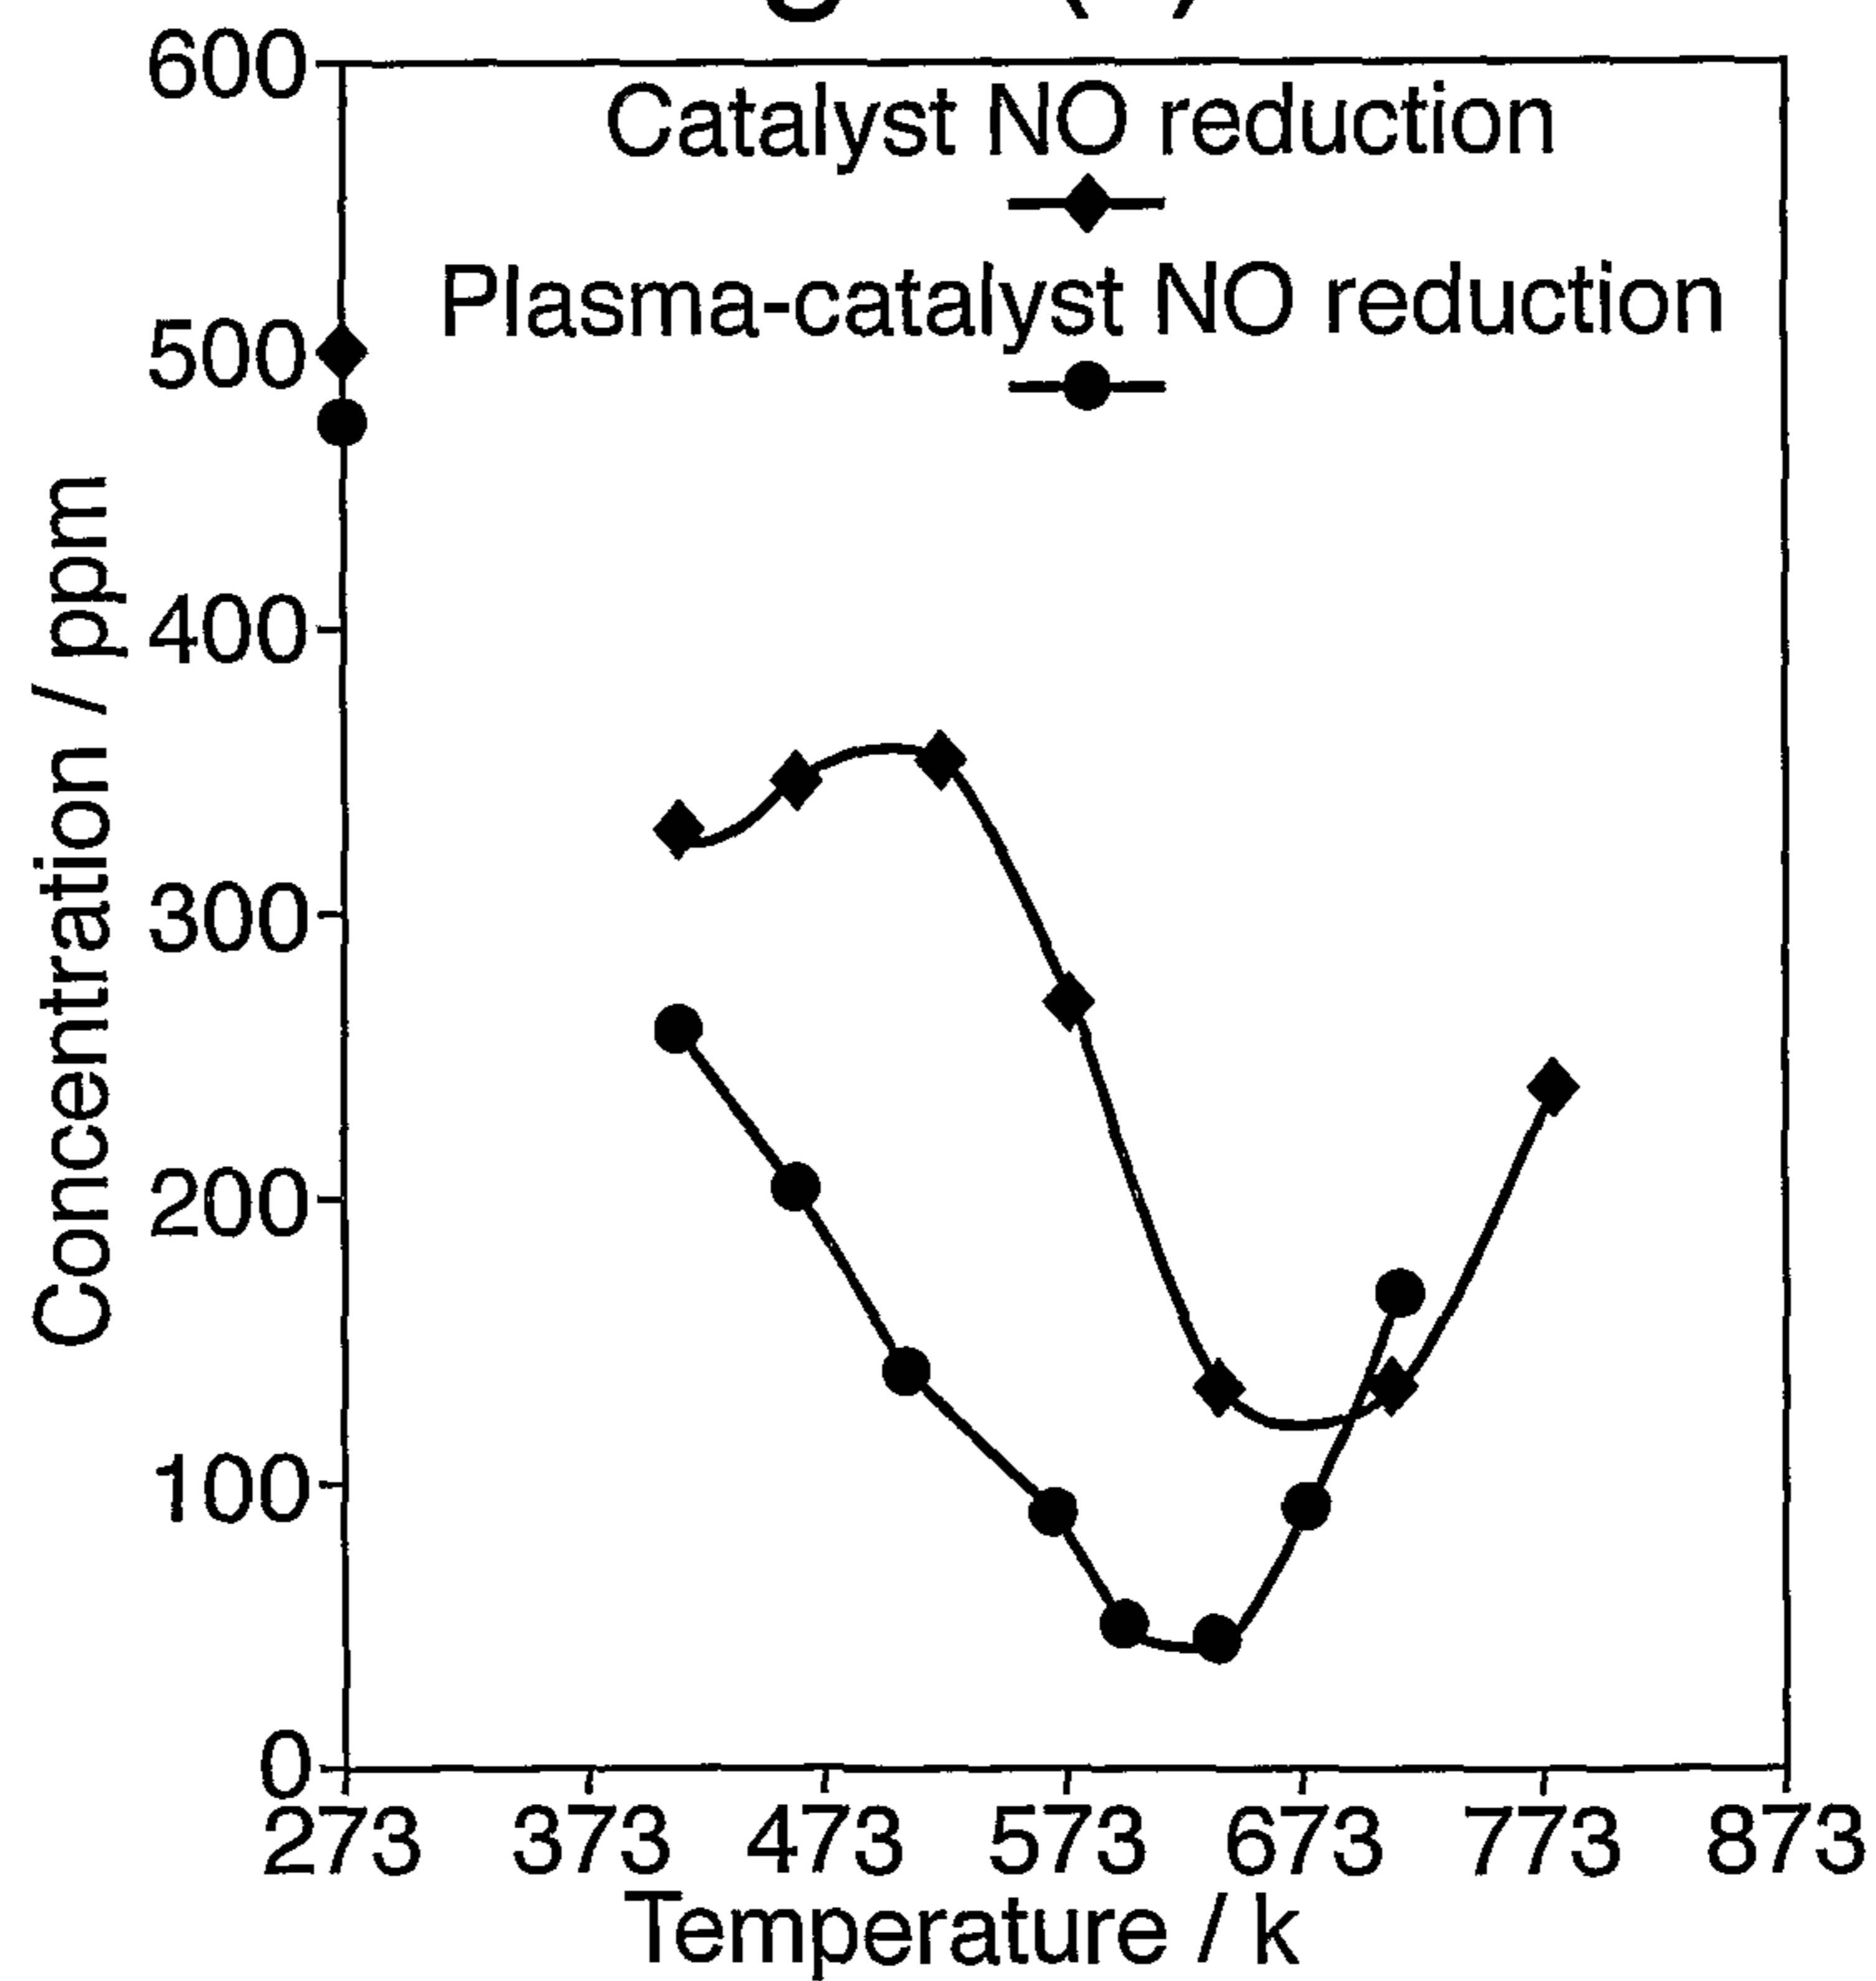


Fig.3.

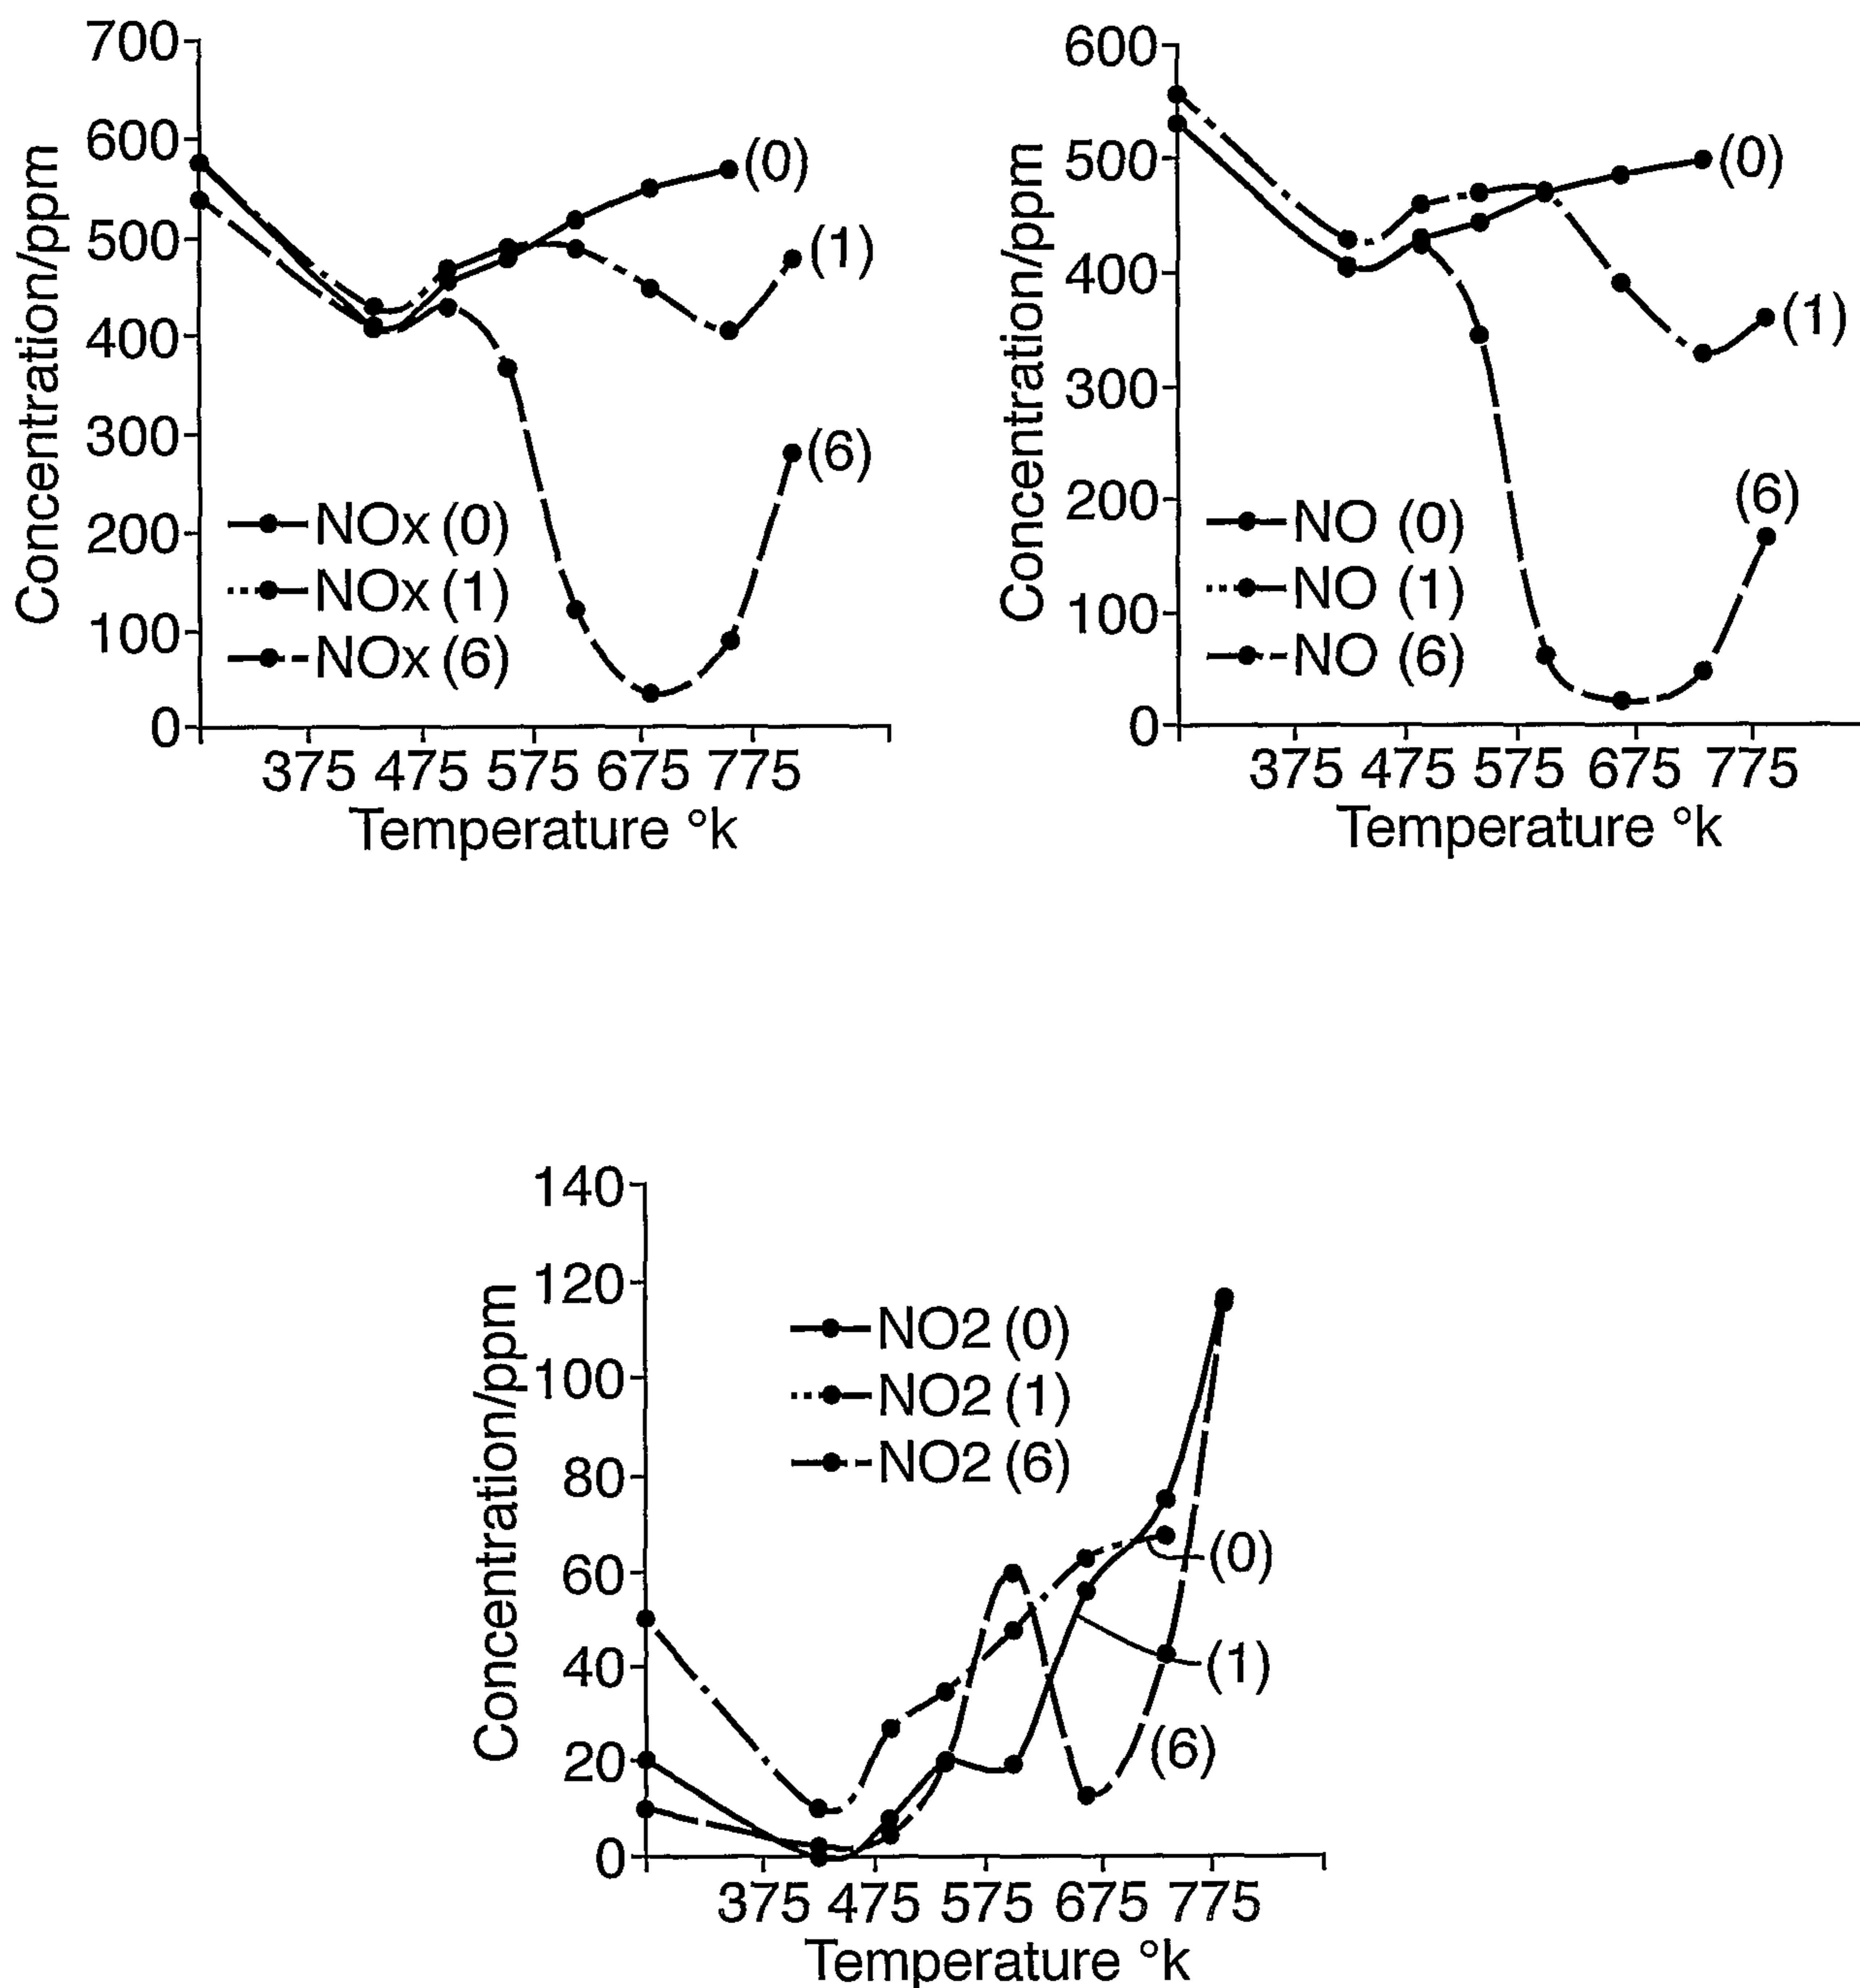


Fig.4.

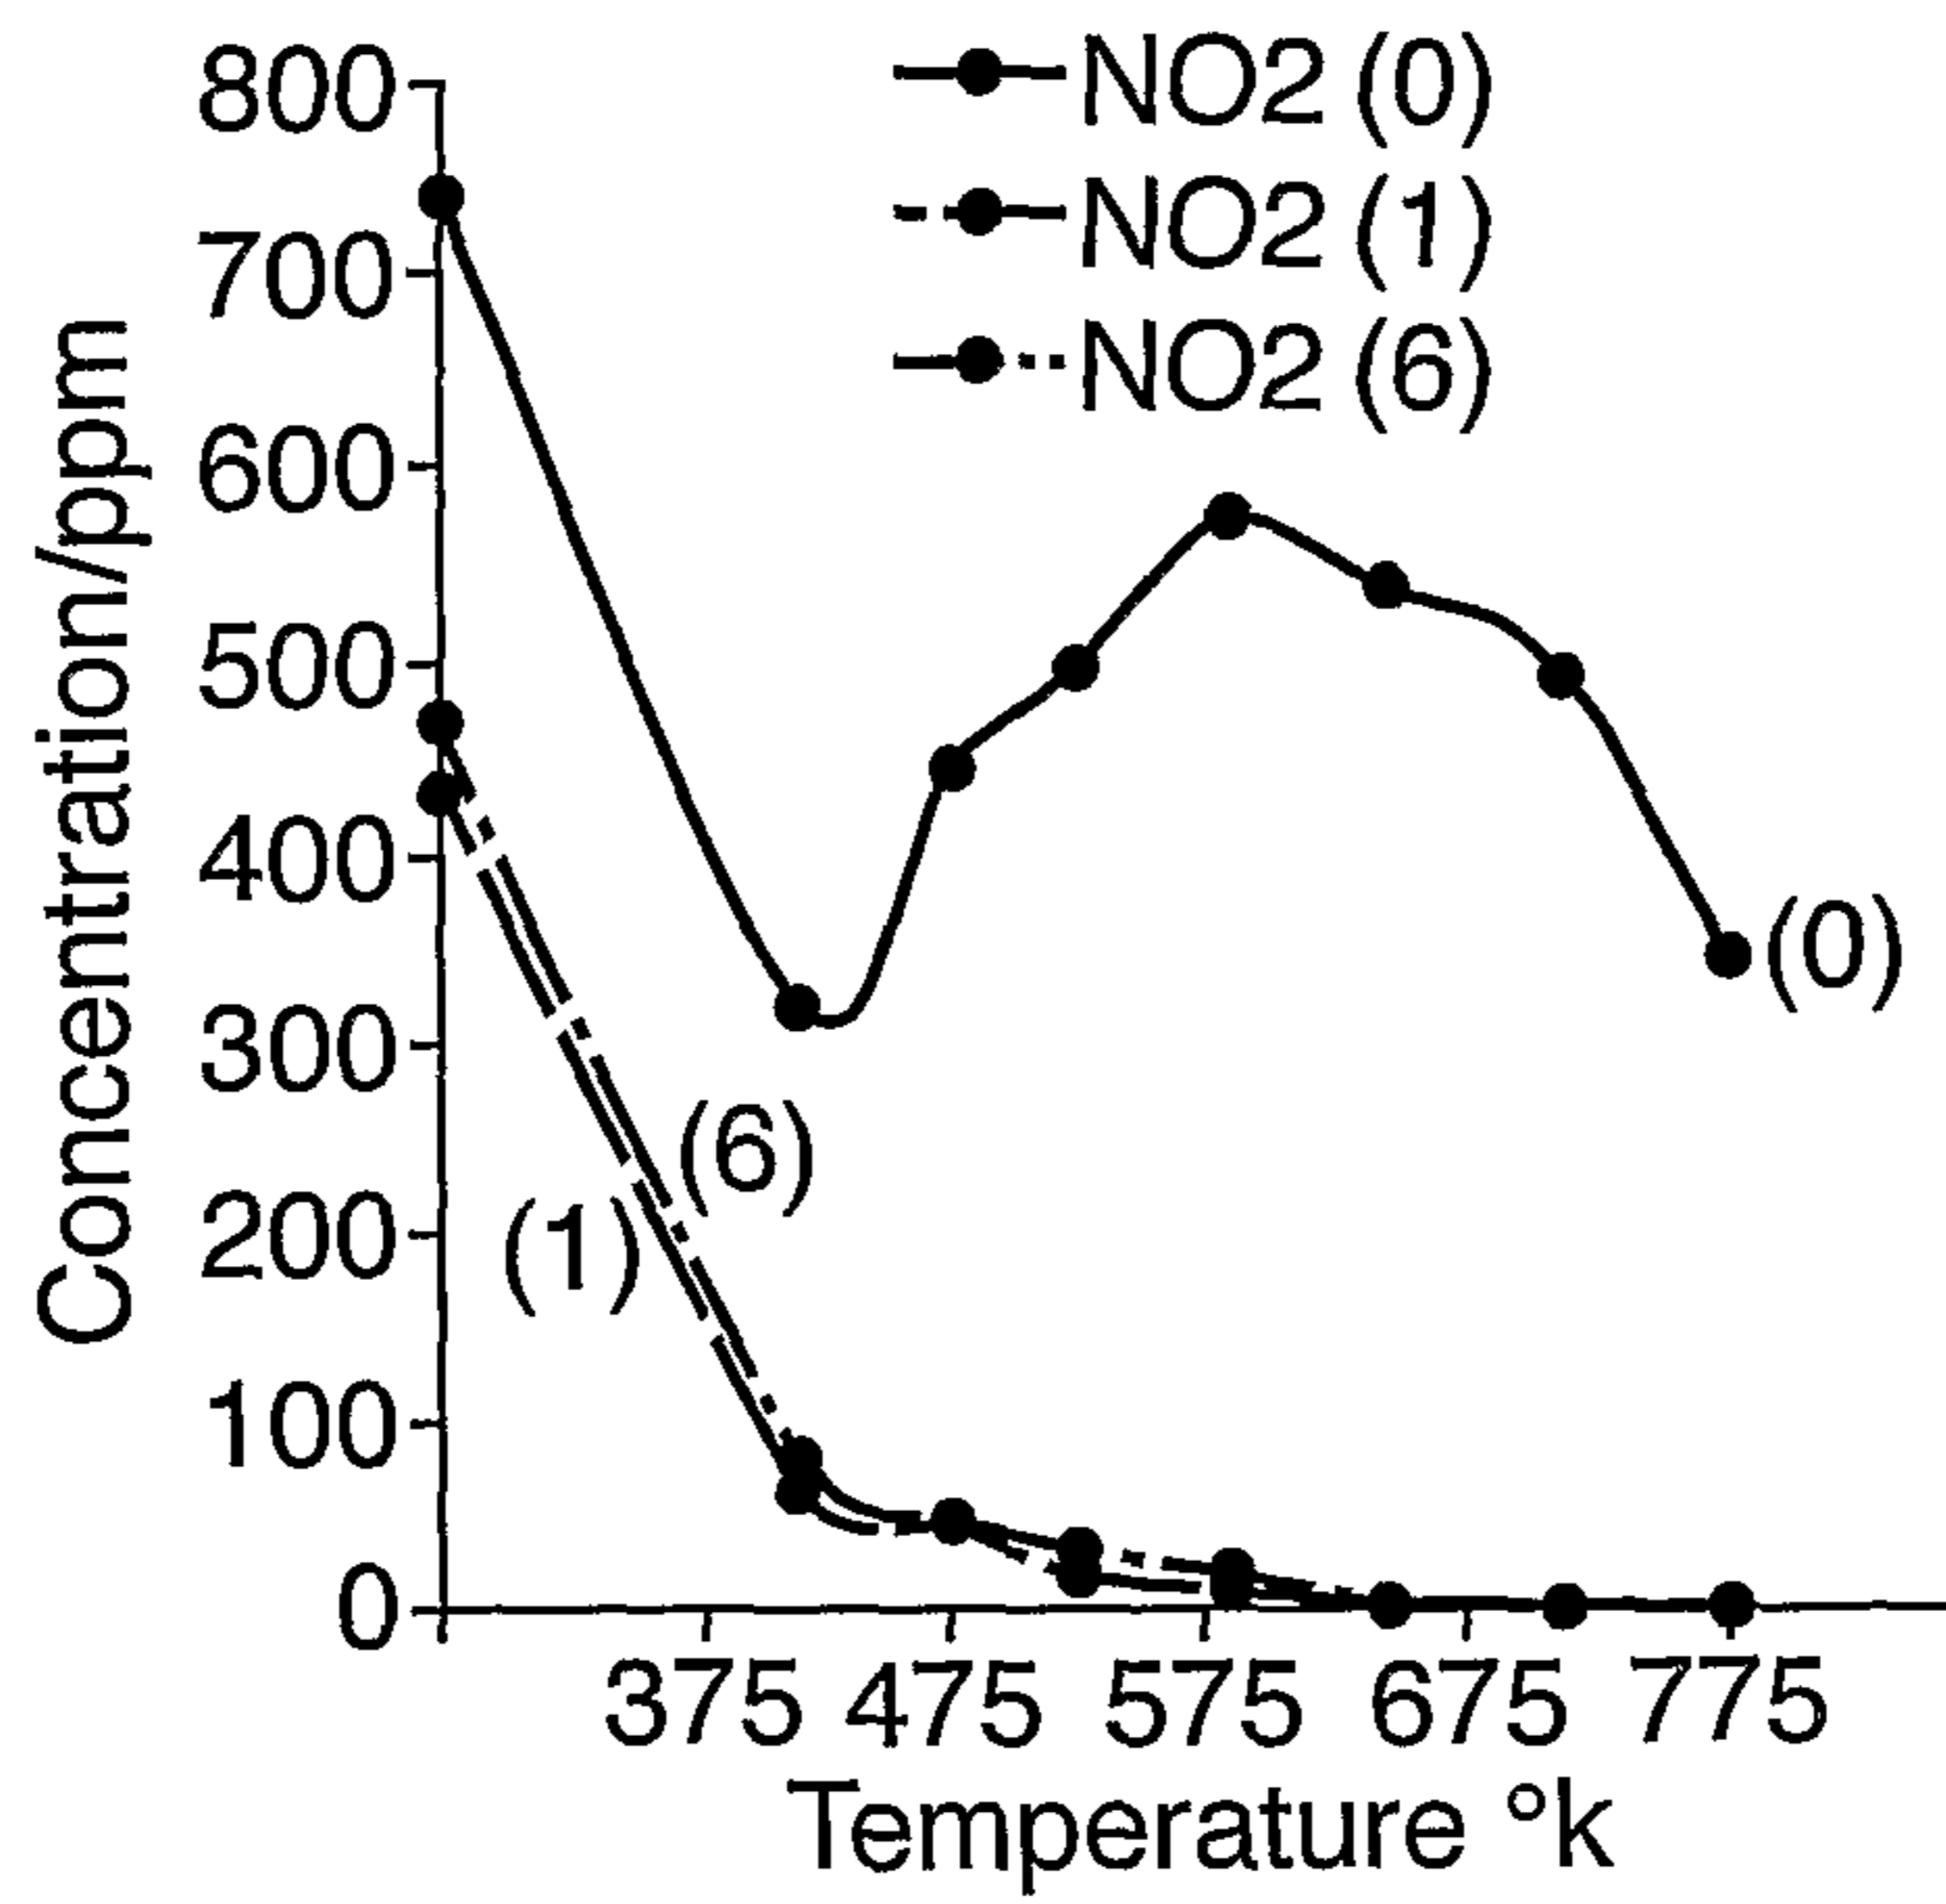
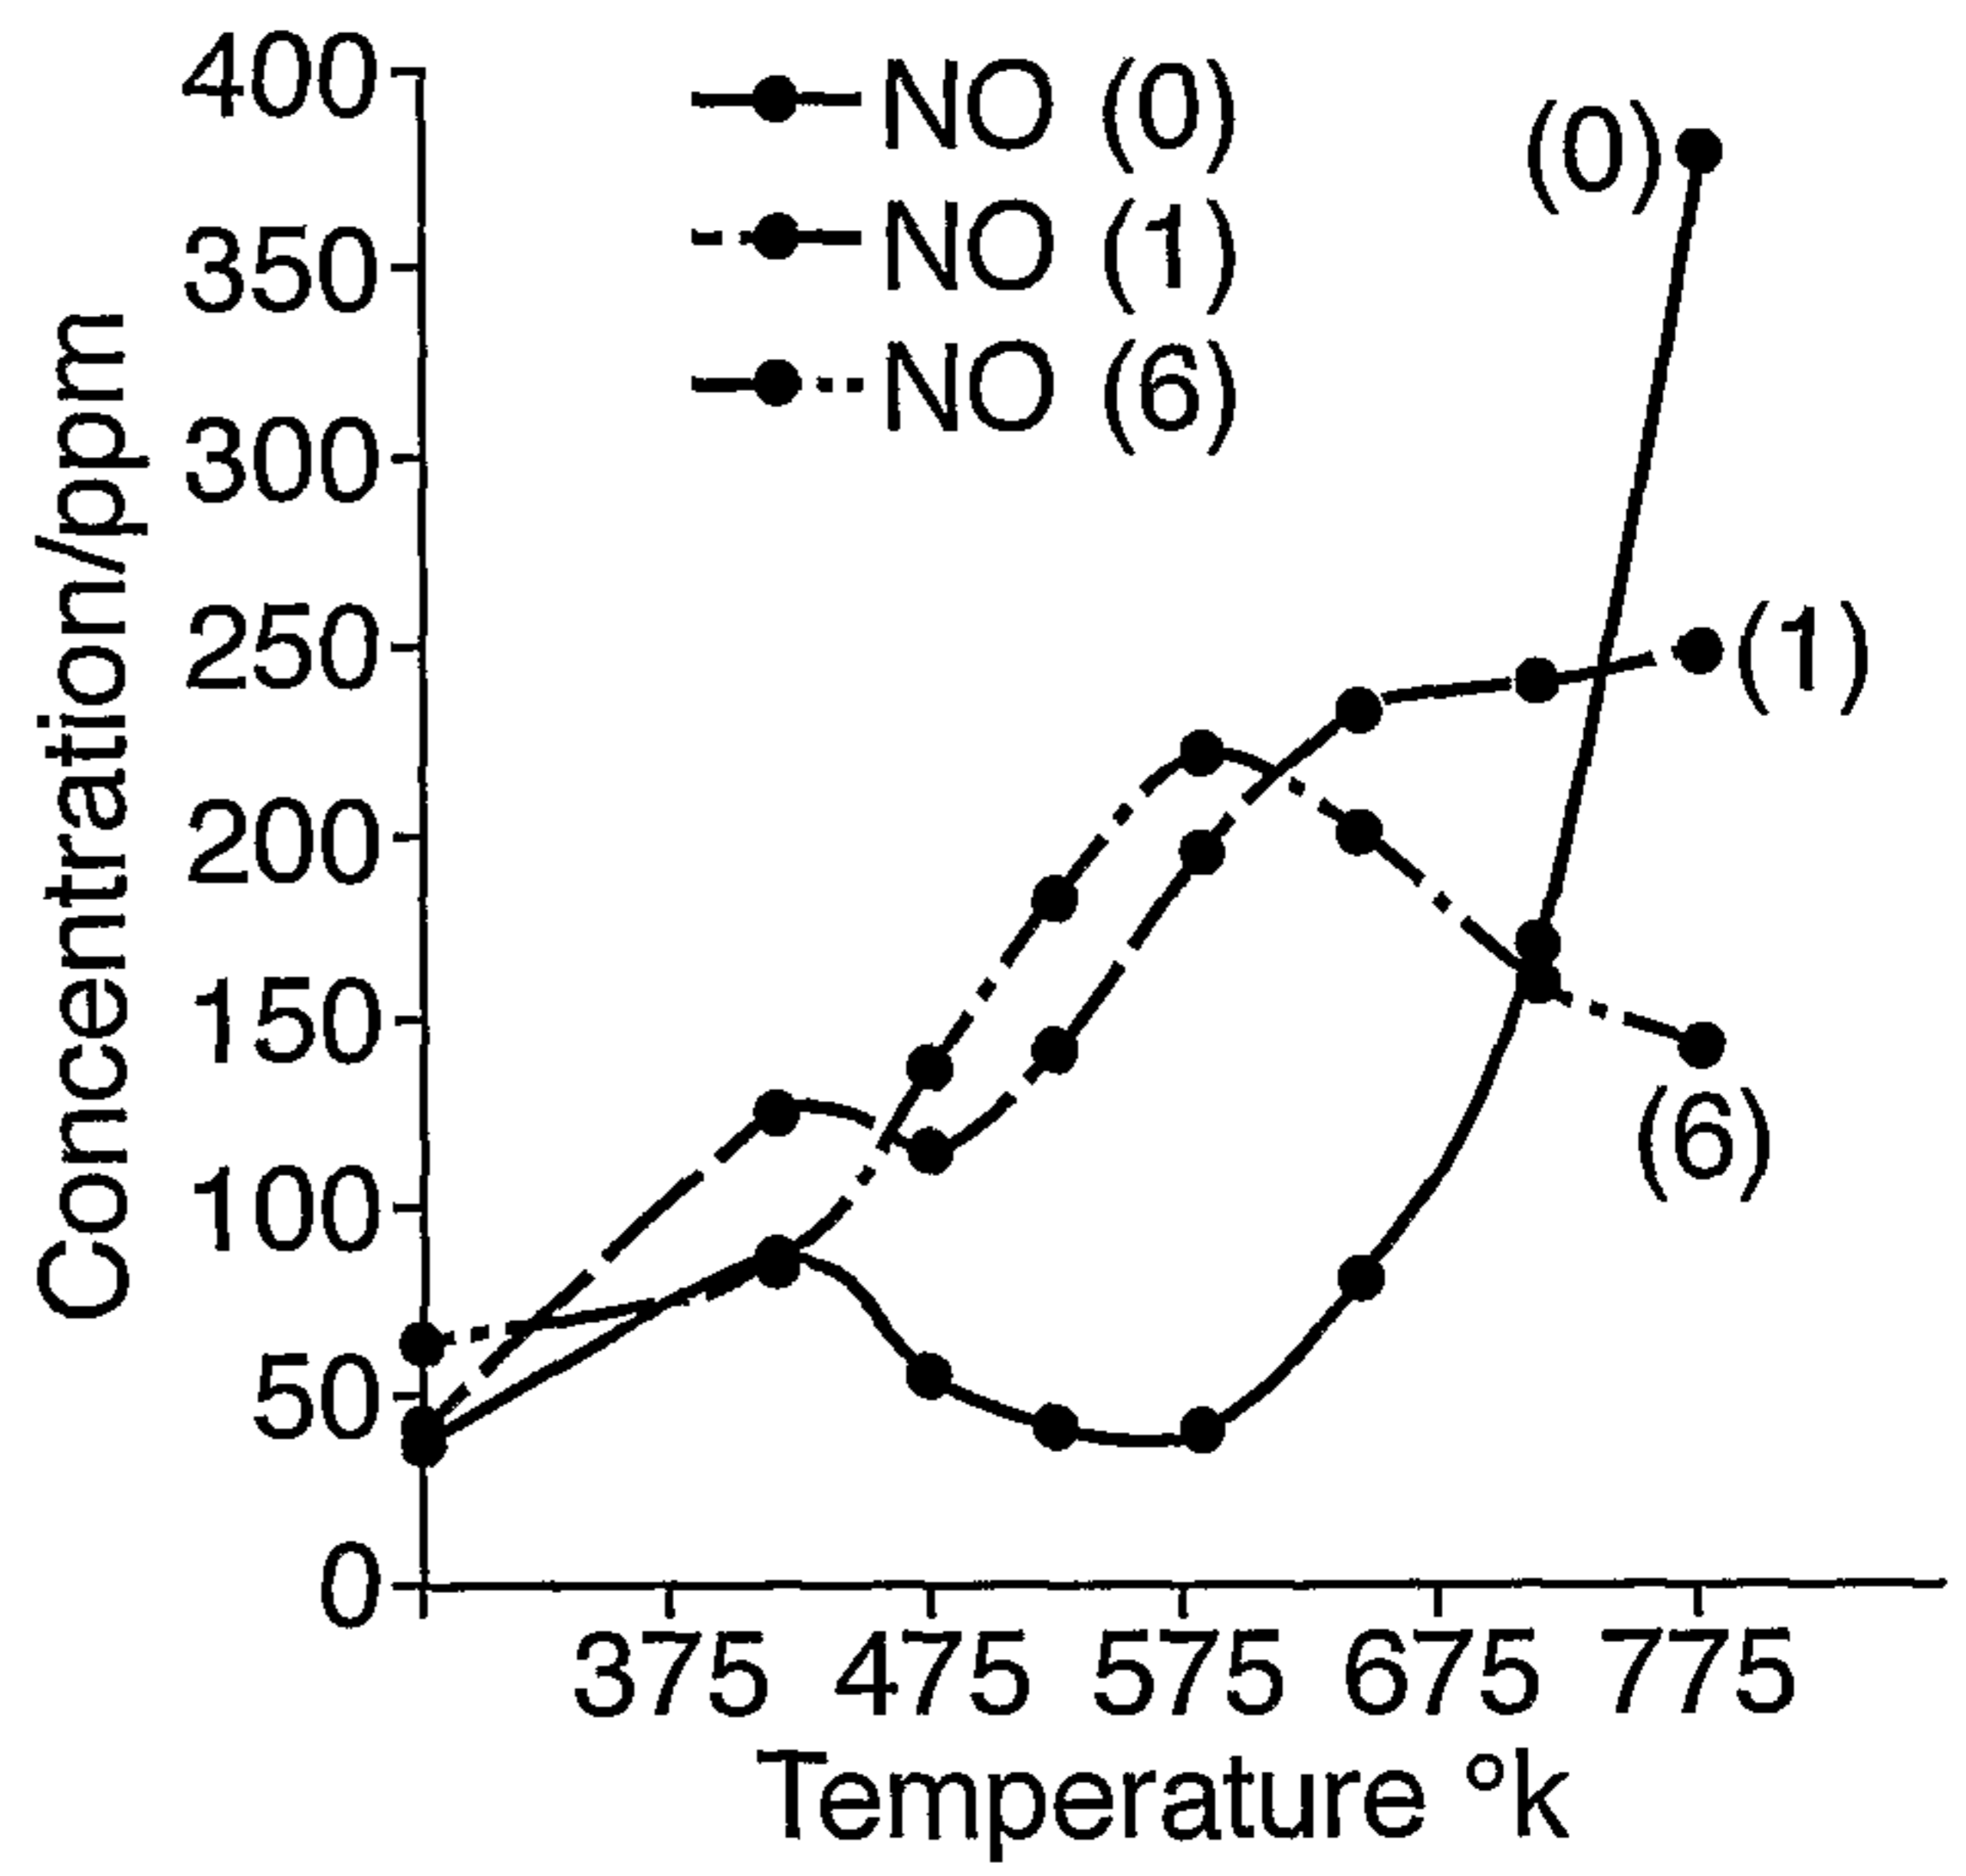
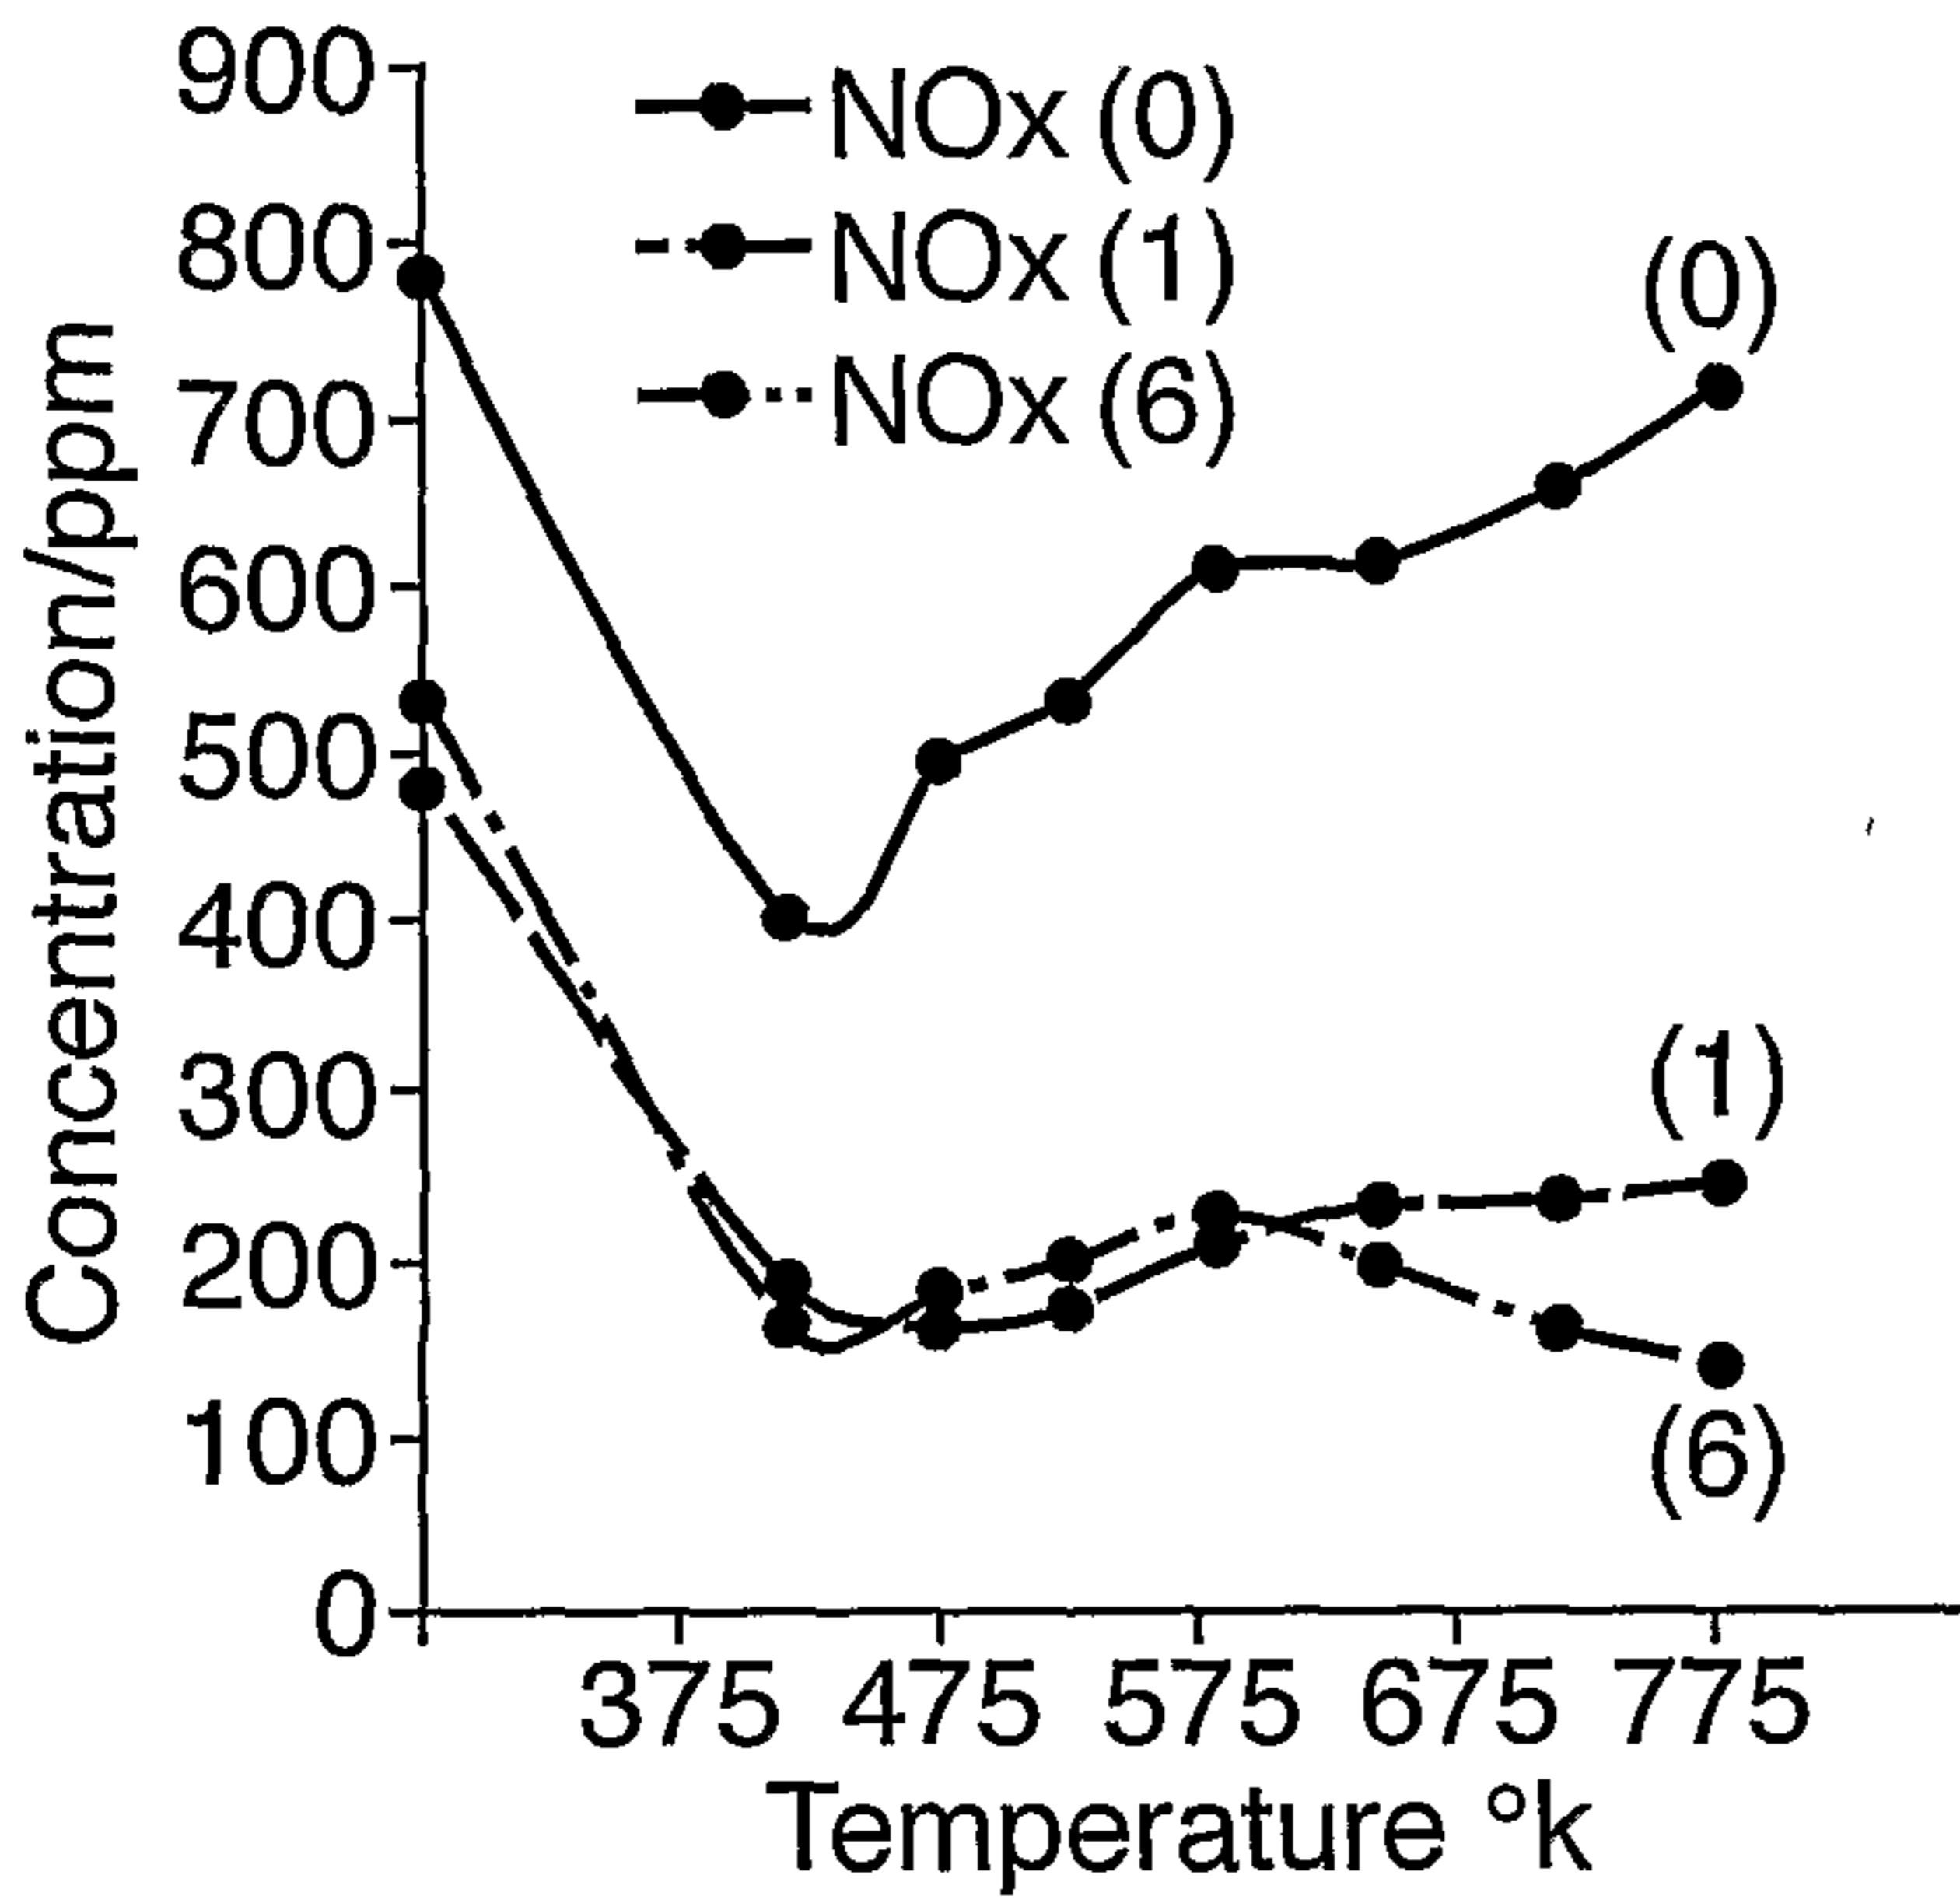


Fig.6.



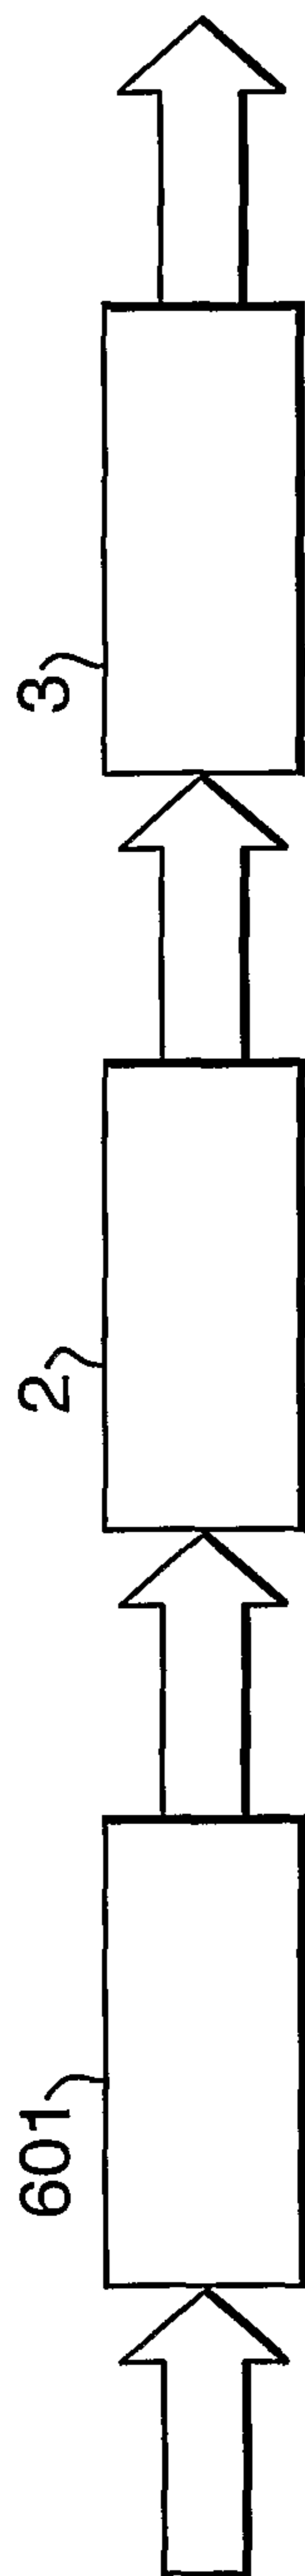


Fig.7.

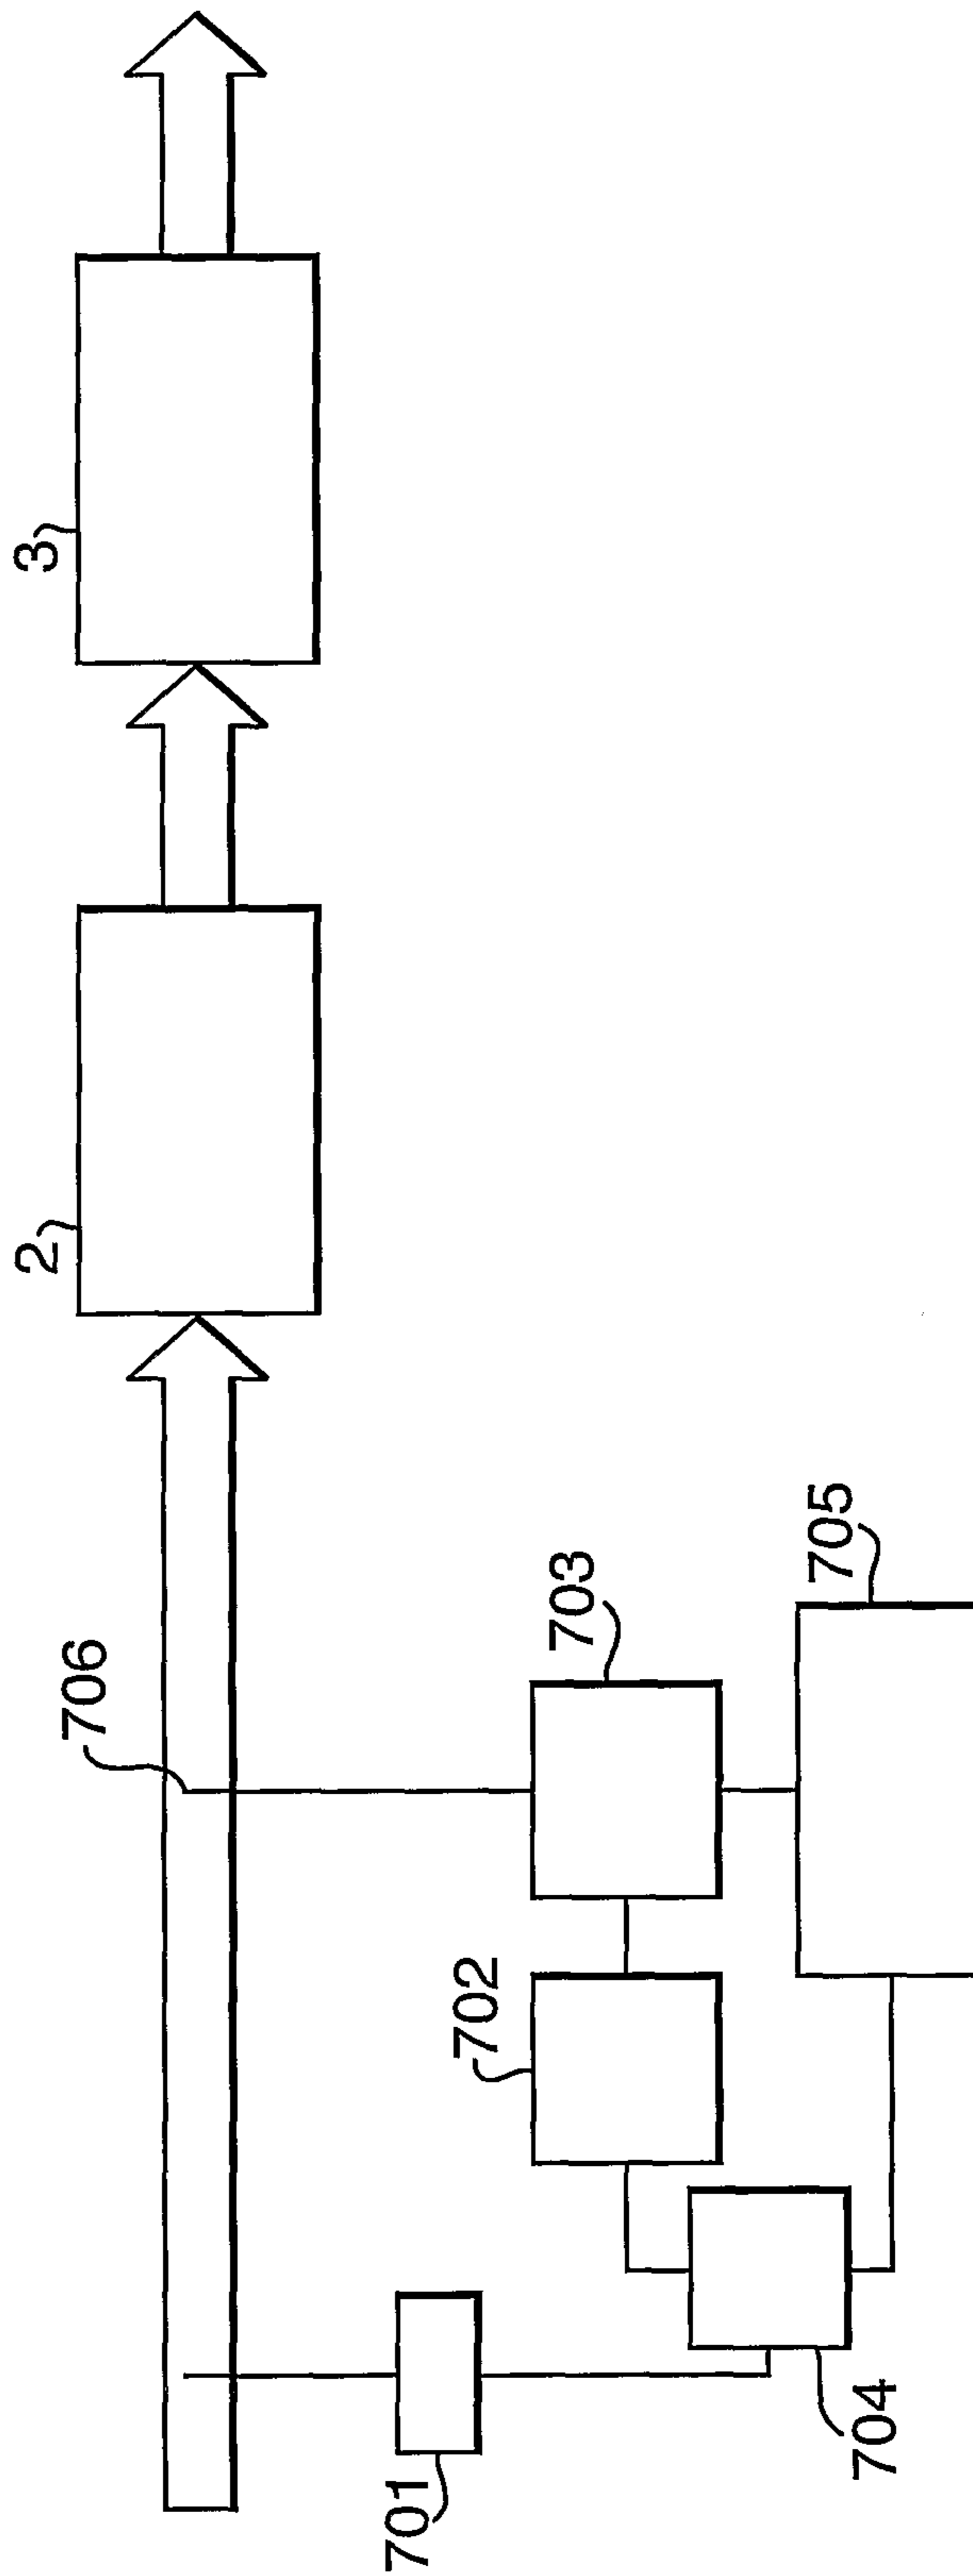

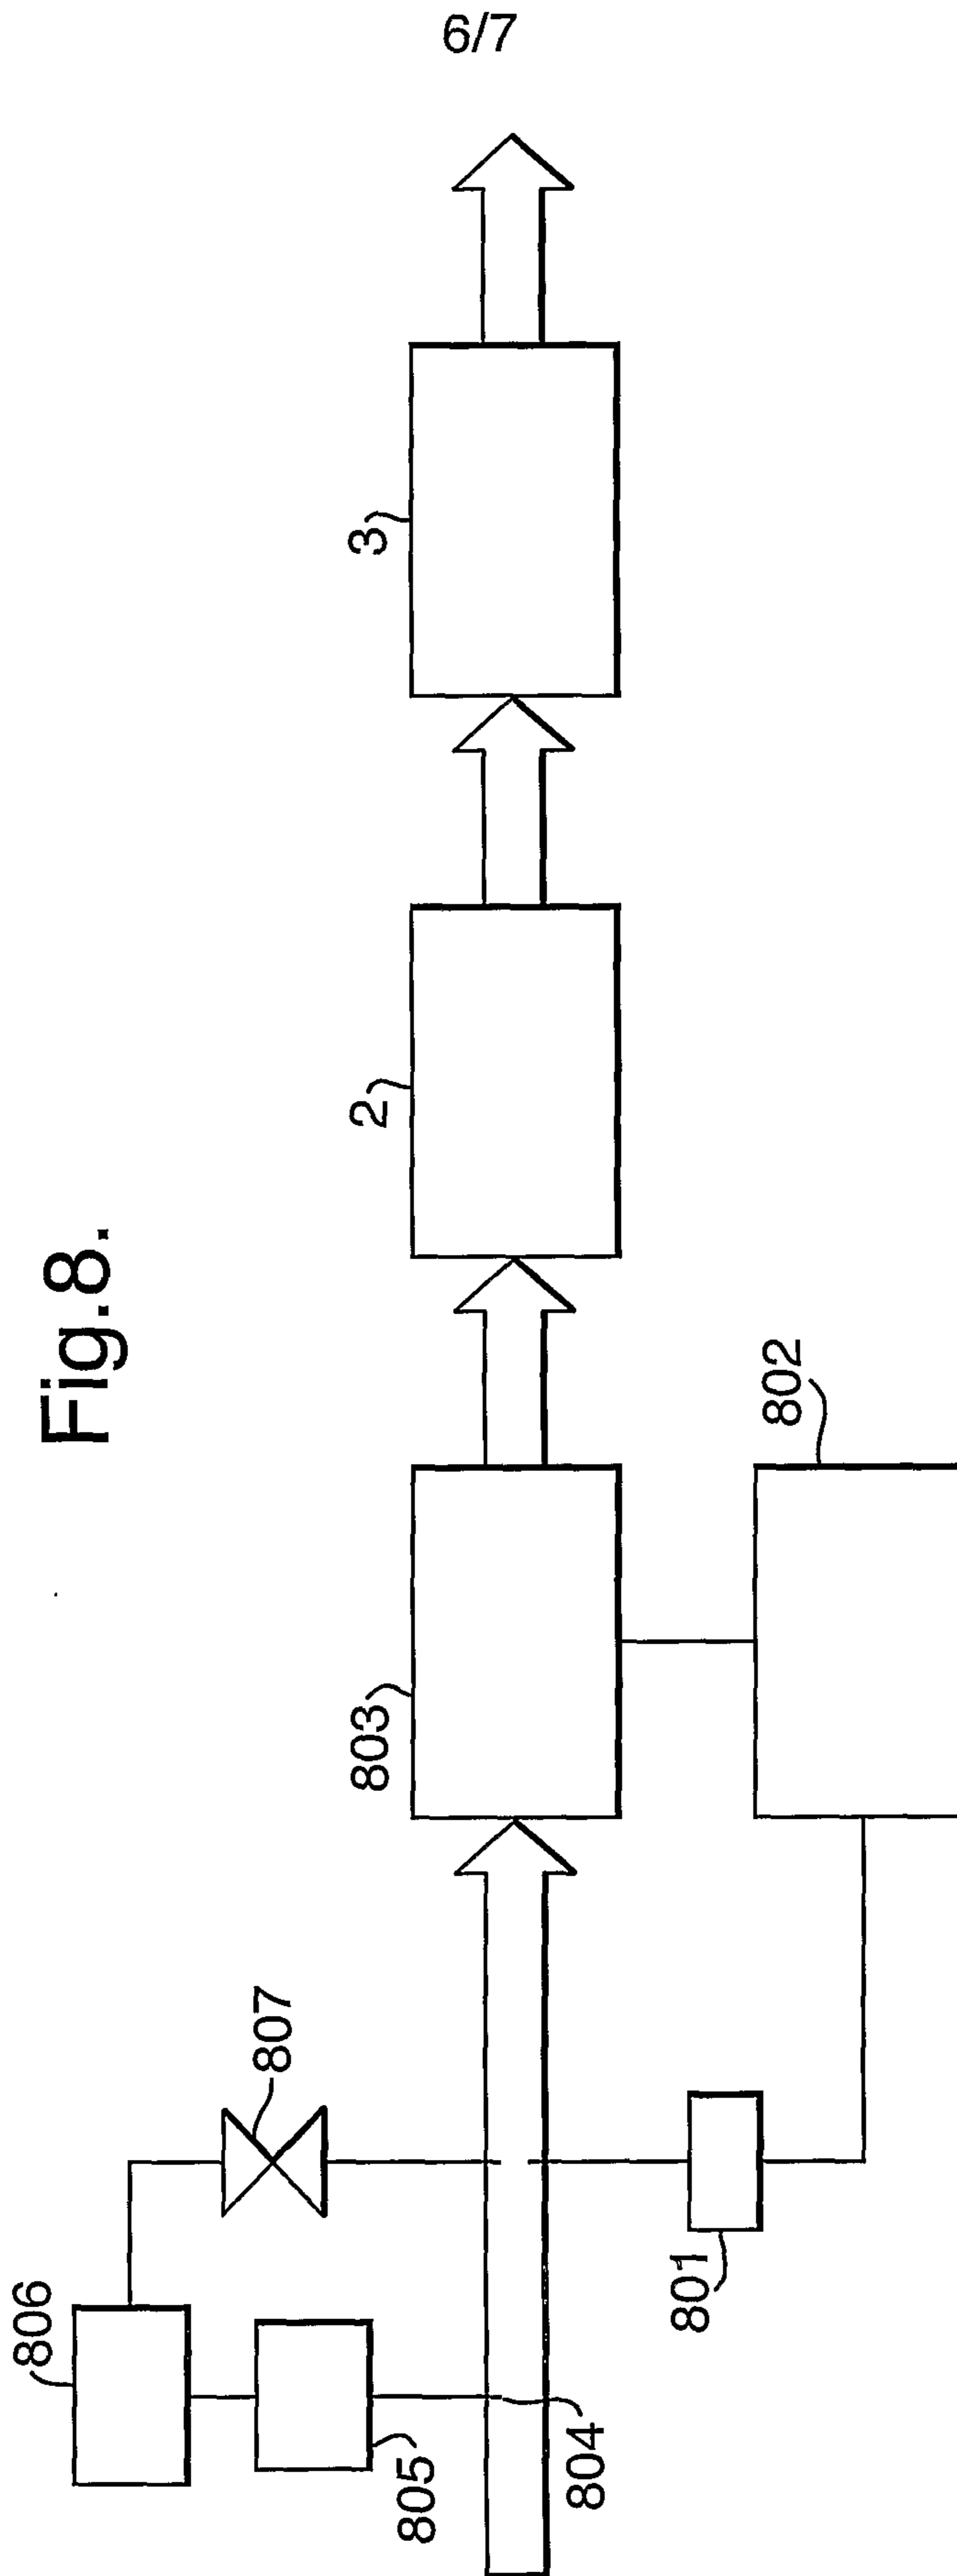

7/7

Fig.9.

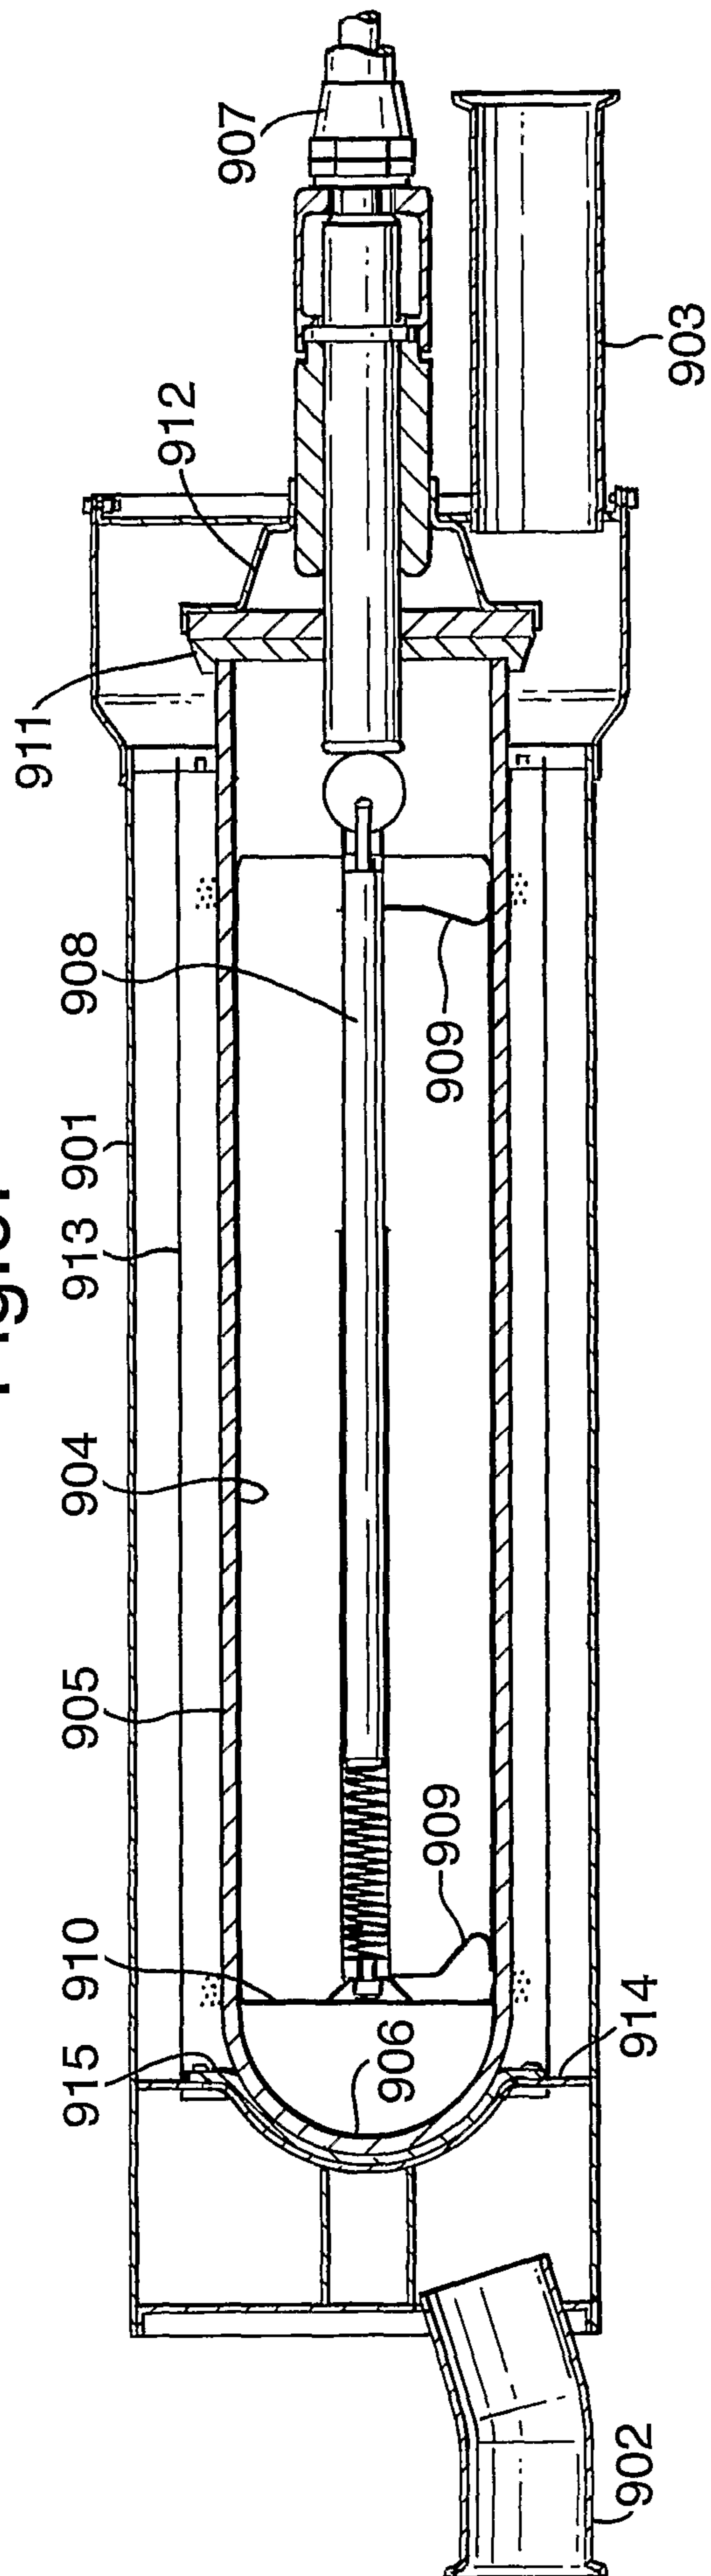


Fig.10.

