



(22) Date de dépôt/Filing Date: 2015/10/20

(41) Mise à la disp. pub./Open to Public Insp.: 2016/06/02

(45) Date de délivrance/Issue Date: 2020/01/14

(30) Priorité/Priority: 2014/12/02 (US14/557,959)

(51) Cl.Int./Int.Cl. *B64D 37/00* (2006.01),
B60K 15/03 (2006.01), *B64D 37/02* (2006.01),
B64D 37/34 (2006.01)


(72) Inventeurs/Inventors:
MORAVEC, BRADFORD A., US;
GRAHAM, RODNEY N., US;
GRIM, ALAN, US;
MULVANEY, PATRICK J., US;
ADKINS II, DAVID A., US;
OLSON, ERIC C., US;
...

(73) Propriétaire/Owner:
THE BOEING COMPANY, US

(74) Agent: SMART & BIGGAR LLP

(54) Titre : DISPOSITIF DE REFROIDISSEMENT D'UN RESERVOIR CENTRAL D'AILE D'UN AERONEF

(54) Title: COOLING SYSTEM FOR A CENTER WING TANK OF AN AIRCRAFT

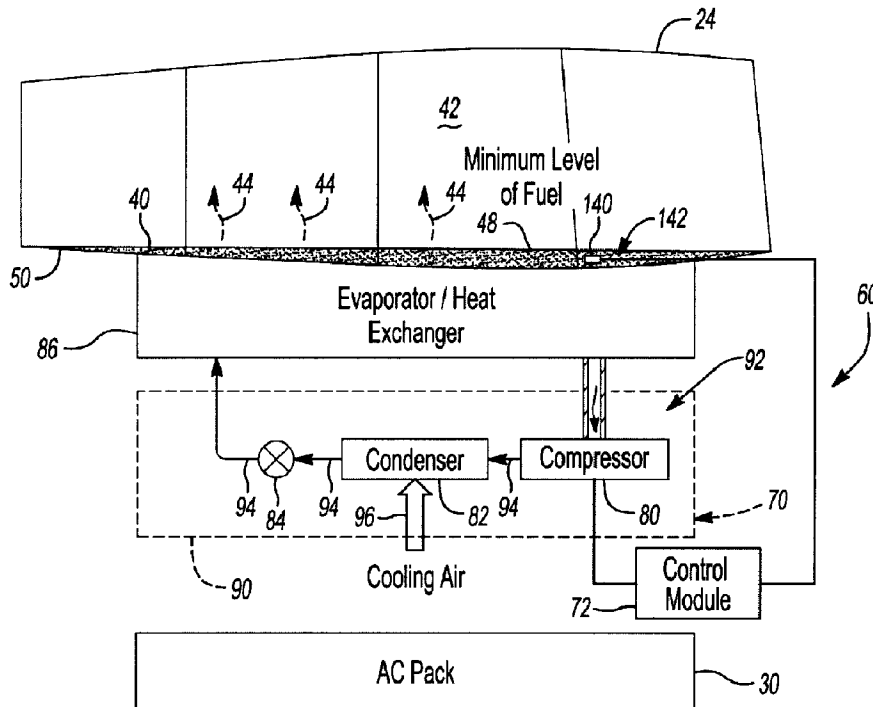

(57) Abrégé/Abstract:

A cooling system for a fuel tank of an aircraft includes a temperature sensor, a cooling system, and a control module. The temperature sensor detects a fuel temperature within the fuel tank. The cooling system maintains the fuel temperature below a

(72) **Inventeurs(suite)/Inventors(continued):** JOJIC, IVANA, US; THORNTON, MARK M., US;
BELIERES, JEAN-PHILIPPE A., US

(57) **Abrégé(suite)/Abstract(continued):**

control temperature. The phase change cooling system includes a heat exchanger. A cooling fluid flows through the heat exchanger and is in thermal communication with a surface of the fuel tank. The control module is in signal communication with the temperature sensor and the cooling system. The control module includes control logic for monitoring the temperature sensor, determining if the fuel temperature is above the control temperature, and generating an activation signal.

ABSTRACT

A cooling system for a fuel tank of an aircraft includes a temperature sensor, a cooling system, and a control module. The temperature sensor detects a fuel temperature within the fuel tank. The cooling system maintains the fuel temperature below a control temperature. The phase change cooling system includes a heat exchanger. A cooling fluid flows through the heat exchanger and is in thermal communication with a surface of the fuel tank. The control module is in signal communication with the temperature sensor and the cooling system. The control module includes control logic for monitoring the temperature sensor, determining if the fuel temperature is above the control temperature, and generating an activation signal.

COOLING SYSTEM FOR A CENTER WING TANK OF AN AIRCRAFT

FIELD

The disclosed system relates to a system for controlling the fuel temperature of an aircraft and, more particularly, to a cooling system for maintaining the temperature of fuel located within a fuel tank of an aircraft below a control
5 temperature and above a lower limit temperature.

BACKGROUND

Fuel tanks may be located within the outboard portion of wings of an aircraft, and are referred to as wing tanks. Some types of aircraft may include multiple main
10 tanks and a reserve tank located within each wing. The aircraft may also include a center wing tank located within a fuselage of the aircraft. The center wing tank may also include an inboard portion of the wings on some aircraft. The center wing tank may also be located proximate to a heat source. One example of a heat source proximate to the center wing tank is an air conditioning (AC) pack,
15 which is part of an environmental control system (ECS) of the aircraft. Although the aircraft consumes liquid fuel, the fuel tanks within the aircraft all contain some amount of air and fuel vapor above the upper surface of the fuel, which is commonly referred to as ullage. During relatively long flights a large quantity of fuel may be consumed, which in turn increases the ullage volume in the fuel
20 tanks of the aircraft. The ullage may contain reactive components such as oxygen and fuel vapors. Additionally, the ullage may also contain other gases or vapors from the atmosphere, or that are generated by the aircraft and routed into the fuel tanks.

The center wing tank's proximity to heat sources, such as the AC packs, may
25 increase the temperature of the fuel as well as the reactive components contained within the center wing tank of the aircraft. Some types of aircraft

currently available may include an inerting system that provides an inerting gas to the center wing tank as well as the other fuel tanks within the aircraft, thereby altering the ullage gas composition. However, there exists a continuing need in the art for other types of simple, cost-effective approaches for managing the reactive components within the ullage of an aircraft.

SUMMARY

In one aspect, a cooling system for a fuel tank of an aircraft includes a temperature sensor, a cooling system, and a control module. The temperature sensor detects a fuel temperature within the fuel tank. The cooling system maintains the fuel temperature below a control temperature. The cooling system includes a heat exchanger. A cooling fluid flows through the heat exchanger and is in thermal communication with a surface of the fuel tank. The control module is in signal communication with the temperature sensor and the cooling system. The control module includes control logic for monitoring the temperature sensor, determining if the fuel temperature is above the control temperature, and generating an activation signal to activate the cooling system if the fuel temperature is above the control temperature.

In another aspect, a method of cooling a center wing tank of an aircraft is disclosed. The method includes detecting a fuel temperature within the center wing tank by a temperature sensor. The method also includes monitoring the temperature sensor by a control module. The control module is in signal communication with the temperature sensor. The method further includes determining if the fuel temperature is above a control temperature by the control module. The method also includes generating an activation signal, by the control module, if the fuel temperature is above the control temperature. The method includes activating a cooling system if the activation signal is generated. Finally, the method includes flowing a cooling fluid through a heat exchanger if the

cooling system is activated. The cooling fluid is in thermal communication with a surface of the center wing tank.

In one embodiment, there is provided a system for cooling a fuel tank of an aircraft. The fuel tank defines a surface. The system includes a temperature
5 sensor for detecting a fuel temperature within the fuel tank. The cooling system maintains the fuel temperature below a control temperature. The system further includes a cooling system including a heat exchanger. The heat exchanger is in thermal communication with a surface of the fuel tank and includes a cooling loop
10 configured to contact the surface of the fuel tank. A cooling fluid flows through the cooling loop and draws heat from the surface of the fuel tank to provide cooling to fuel within the fuel tank. The cooling loop is not in contact with the fuel within the fuel tank. The system further includes a control module in signal communication with the temperature sensor and the cooling system. The control
15 module includes control logic for: monitoring the temperature sensor; determining the fuel temperature is above the control temperature; and generating an activation signal to activate the cooling system in response to determining the fuel temperature is above the control temperature.

The control temperature may be based on a flash point of a fuel and an ullage pressure of the fuel tank.

20 The cooling loop may be embedded within a lowermost surface of the fuel tank.

The cooling loop may be arranged in a serpentine configuration along a lowermost surface of the fuel tank.

The control temperature may be a predetermined margin below a lower flammability limit (LFL) temperature of a fuel.

25 The control temperature may range from about 10°C to about 32°C.

The system may further include a heat shield located directly below the heat exchanger.

The system may further include means for directing cooling air to flow around heat generating components of the cooling system.

- 5 The cooling system may include a condenser, an expansion valve, and a refrigerant.

The cooling fluid may be the refrigerant, and the refrigerant may flow through the heat exchanger to provide cooling to the fuel tank.

- 10 The control module may include control logic for generating a deactivation signal to deactivate the cooling system. The control module may generate the deactivation signal in response to the temperature sensor indicating the fuel temperature is at a lower limit temperature.

The lower limit temperature may range from about 0°C below the control temperature to about 5°C below the control temperature.

- 15 In another embodiment, there is provided a method of cooling a center wing tank of an aircraft. The center wing tank defines a surface. The method involves detecting a fuel temperature within the center wing tank by a temperature sensor and monitoring the temperature sensor by a control module. The control module is in signal communication with the temperature sensor. The method further
20 involves determining the fuel temperature is above a control temperature by the control module and generating an activation signal, by the control module, in response to determining the fuel temperature is above the control temperature. The control module is in signal communication with a cooling system including a heat exchanger. The heat exchanger includes a cooling loop configured to
25 contact the surface of the center wing tank and the cooling loop is not in contact

- with fuel within the center wing tank. The method further involves activating the cooling system in response to generating the activation signal and flowing cooling fluid through the cooling loop in response to activating the cooling system. The cooling fluid draws heat from the surface of the center wing tank to
- 5 provide cooling to the fuel within the center wing tank.

The method may further involve providing a heat shield located directly below the heat exchanger.

The method may further involve providing cooling air around heat generating components of the cooling system.

- 10 The may further involve generating a deactivation signal by the control module in response to the temperature sensor indicating the fuel temperature is at a lower limit temperature. The deactivation signal may deactivate the cooling system.

The cooling loop may be embedded within a lowermost surface of the center wing tank.

- 15 Other objects and advantages of the disclosed method and system will be apparent from the following description, the accompanying drawings and the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an illustration of an aircraft including a center wing tank;

FIG. 2 is a schematic diagram of the center wing tank shown in FIG. 1, an air conditioning (AC) pack, and a center wing tank cooling system;

5 FIG. 3 is a view of a lowermost surface the center wing tank shown in FIG. 2;

FIG. 4 is an alternative embodiment of the center wing tank cooling system shown in FIG. 2 further including a heat shield; and

FIG. 5 is yet another embodiment of the center wing tank cooling system shown in FIG. 4, where cooling air may flow between the heat shield and the AC pack.

10

DETAILED DESCRIPTION

As shown in FIG. 1, the disclosed aircraft **10** may include a fuselage **20** and wings **22**. The aircraft **10** may also include a center wing tank **24** positioned at least partially in the fuselage **20** of the aircraft **10** and adjacent to both the wings **22**. Referring to both FIGS. 1 and 2, the center wing tank **24** may be positioned proximate to one or more air conditioning (AC) packs **30** (shown in FIG. 2). Those skilled in the art will readily appreciate that the AC pack **30** is an apparatus responsible for conditioning air drawn from outside the aircraft **10** and supplied to a cabin **34**. The AC pack **30** may be part of an environmental control system (ECS) **32** of the aircraft **10**. The ECS **32** may be used to control various

15

20

parameters in the cabin **34** located within the fuselage **20** of the aircraft **10** such as, for example, air temperature, pressure, and humidity.

Turning now to FIG. **2**, the center wing tank **24** may be used to contain or hold fuel **40** that is used for eventual consumption by the aircraft **10** (FIG. **1**). The center wing tank **24** may also contain a volume of gases above the fuel surface, which is referred to as ullage **42**. For example, in the embodiment as shown in FIG. **2**, a majority of the fuel **40** contained within the center wing tank **24** has been consumed such that the fuel **40** is at a minimum level **48**. Accordingly, the ullage **42** is at its maximum volume. The center wing tank **24** may be positioned proximate to the AC pack **30** such that the AC pack **30** acts as a heat source that raises the temperature of the fuel **40** contained within the center wing tank **24**. Heated fuel **40** may produce fuel vapors **44** within the center wing tank **24**, which are evaporated into the ullage **42**. In particular, the fuel **40** may settle along a lowermost surface **50** of the center wing tank **24**. The lowermost surface **50** of the center wing tank **24** may be positioned adjacent to one or more of the AC packs **30** such that the AC packs **30** may heat and thereby raise the temperature of the fuel **40** settled along the lowermost surface **50** of the center wing tank **24**. Although an AC pack **30** is illustrated, it is to be understood that the center wing tank **24** may be exposed to other sources of heat within the aircraft **10** (FIG. **1**) instead such as, for example, heat from the cabin **34** (FIG. **1**), other fuel tanks located within the aircraft **10**, or hydraulic heat exchangers.

In order to reduce the temperature of the fuel **40** located within the center wing tank **24**, a center wing tank cooling system **60** may be positioned between the lowermost surface **50** of the center wing tank **24** and the AC pack **30**. Those skilled in the art will readily appreciate that although a center wing tank **24** is described, the disclosed cooling system may be applied to other types of fuel tanks located within the aircraft **10** (FIG. **1**) as well, and that the disclosure should not be limited to only cooling the center wing tank **24**.

The center wing tank cooling system **60** may be used to maintain the temperature of the fuel **40** below a predetermined or control temperature, which is explained in greater detail below. The control temperature may be a predetermined amount below a lower flammability limit (LFL) temperature of the fuel **40**. The control temperature may act as a margin or buffer to ensure that the fuel **40** is maintained below the LFL temperature. The LFL temperature may be a function of the flash point of the fuel **40** and fuel tank ullage pressure. In an embodiment where the center wing tank **24** is an open vented tank, the fuel tank ullage pressure is about atmospheric pressure at altitude. Thus, the control temperature is also based on the flash point of the fuel **40** and fuel tank ullage pressure. For example, if the LFL temperature of one commonly used fuel type is about **38°C (100°F)** at a given pressure, then the control temperature may range from about **10°C (80°F)** to about **32°C (88°F)**. However, it is to be understood that these ranges for the predetermined margin are merely exemplary in nature, and may be modified.

The center wing tank cooling system **60** may include a cooling unit **70** and a control module **72**. In the exemplary embodiment as shown, the cooling unit **70** may include a compressor **80**, a condenser **82**, an expansion valve **84**, and a heat exchanger **86**. Those skilled in the art will appreciate that the compressor **80**, the condenser **82**, the expansion valve **84**, and the heat exchanger **86** create a phase change cooling system **92**. The phase change cooling system **92** utilizes a cooling fluid, such as refrigerant **94**, that undergoes phase transitions from a liquid to a gas and back again to a liquid in order to provide cooling to the center wing tank **24**.

It is to be understood that the center wing tank cooling system **60** should not be limited to only a phase change based cooling system where the refrigerant **94** undergoes phase transitions in order to provide cooling to the center wing tank **24**. Instead, those skilled in the art will readily appreciate that the phase change

cooling system **92** as illustrated in the figures is merely exemplary in nature and that any other type of cooling system may be used as well such as, for example, an air cycle cooling system or a liquid cooling system. For example, in one approach, bleed air extracted from one or more main engines of the aircraft **10** may be used to provide cooling to the center wing tank **24**. Moreover, although refrigerant **94** is described, it is to be understood that any other type of cooling fluid may be used as well to draw heat from the center wing tank **24** depending on the specific type of cooling system. For example, the cooling fluid may be a liquid if the cooling system is a liquid cooling system, or a gas such as air if the cooling system is an air cycle cooling system.

The exemplary phase change cooling system **92** operates by compressing the refrigerant **94** in gaseous form by the compressor **80**, dissipating heat from the gas through the condenser **82** to cause the gas to condense into a fluid, passing the fluid through the expansion valve **84**, and allowing the fluid to flow through the heat exchanger **86**. As seen in FIG. 2, cooling air **96** may flow over the condenser **82**. The cooling air **96** may be used to draw heat from the gas flowing through the condenser **82**. The cooling air **96** may be ram air drawn from outside the aircraft **10** (FIG. 1). Alternatively, in another embodiment, the cooling air **96** may be generated by one or more cooling fans (not illustrated in the figures).

The heat exchanger **86** may be any type of device that allows for cooling fluid to flow through and draw heat from the surrounding environment. For example, in the embodiment as shown in heat exchanger **86** is an evaporator that allows the refrigerant **94** to evaporate from liquid form back to gas form, while drawing heat. In the embodiment as shown in FIG. 2 the refrigerant **94**, which is in gas form, is transported back to the compressor **80**. The heat exchanger **86** may be located along the lowermost surface **50** of the center wing tank **24**. The heat exchanger **86** may be used to provide cooling to the fuel **40** located within the center wing tank **24**.

Turning now to FIG. 3, the lowermost surface **50** of the center wing tank **24** and the heat exchanger **86** are illustrated. The heat exchanger **86** may include a cooling loop **74**, an inlet **110** and an outlet **112**. The refrigerant **94** exiting the expansion valve **84** (FIG. 2) enters the heat exchanger **86** through the inlet **110**
5 of the cooling loop **74**. As seen in FIG. 3, the cooling loop **74** is disposed along the lowermost surface **50** of the center wing tank **24**. The refrigerant **94** flows through the cooling loop **74** in liquid form and draws heat from the lowermost surface **50** of the center wing tank **24**, thereby providing cooling to the fuel **40** of the center wing tank **24** (FIG. 2). In other words, the refrigerant **94** is in thermal
10 communication with the lowermost surface **50** of the center wing tank **24** and is used to lower and control the temperature of the fuel **40** (FIG. 2) contained within the center wing tank **24**. As explained above, although refrigerant **94** is discussed, those skilled in the art will readily appreciate that any other type of cooling fluid may be used as well to draw heat from the lowermost surface **50** of
15 the center wing tank **24**.

Those skilled in the art will also appreciate that while the cooling loop **74** is disposed along the lowermost surface **50** of the center wing tank **24**, the cooling loop **74** may be disposed along any other surface of the center wing tank **24** as well. However, placing the cooling loop **74** of the heat exchanger **86** along the
20 lowermost surface **50** may provide the most effective cooling available, since the AC packs **30** (FIG. 1) radiate heat directly below the center wing tank **24**.

In the exemplary embodiment as shown in FIG. 3, the cooling loop **74** of the heat exchanger **86** is arranged in a serpentine configuration along substantially the entire lowermost surface **50** of the center wing tank **24**. However, it is to be
25 understood that the cooling loop **74** may be arranged in other configurations along the lowermost surface **50** of the center wing tank **24** as well. For example, in another embodiment, the cooling loop **74** may be arranged in a coil configuration along the lowermost surface **50** of the center wing tank **24**.

Moreover, although FIG. 3 illustrates the cooling loop 74 covering substantially the entire lowermost surface 50 of the center wing tank 24, those skilled in the art will appreciate that the cooling loop 74 may only cover a portion of the lowermost surface 50 of the center wing tank 24 as well. Finally, in the embodiment as
5 illustrated in the figures, the cooling loop 74 contacts the lowermost surface 50 of the center wing tank 24. However, it is to be understood that in an alternative embodiment, the cooling loop 74 may be embedded or contained within the lowermost surface 50 of the center wing tank 24 as well.

Turning back to FIG. 2, the control module 72 may be in signal communication
10 with both the phase change cooling system 92 and a temperature sensor 140. Additionally, the control module 72 may also be in communication with aircraft signals, switches, or sensors that indicate aircraft altitude, pressure, or fuel quantity within the center wing tank 24. For example, the control module 72 may monitor aircraft altitude using a dedicated pressure sensor, or by communication
15 with an existing airplane altitude signal. The temperature sensor 140 detects the temperature of the fuel 40 within the center wing tank 24. The temperature sensor 140 may be located along a lowermost portion 142 of the center wing tank 24. Specifically, it should be appreciated that the temperature sensor 140 may be positioned along the lowermost portion 142 within the center wing tank
20 24 in order to detect the temperature of the fuel 40 located closest to the AC packs 30. In other words, the temperature sensor 140 may be positioned within the center wing tank 24 (or another type of fuel tank, if applicable) in order to monitor the hottest portion of the fuel 40 located within the center wing tank 24. Those skilled in the art will readily appreciate that the temperature sensor 140
25 may be a pre-existing sensor that is already part of the center wing tank 24. In other words, the center wing tank cooling system 60 does not require a specialized sensor in order to determine fuel temperature, which in turn reduces the overall cost and complexity of the center wing tank cooling system 60.

The control module **72** may refer to, or be part of, an application specific integrated circuit (ASIC), an electronic circuit, a combinational logic circuit, a field programmable gate array (FPGA), a processor (shared, dedicated, or group) that executes code, or a combination of some or all of the above, such as in a system-on-chip. The control module **72** includes control logic for monitoring the temperature sensor **140**. In addition to receiving the temperature of the fuel **40** from the temperature sensor **140**, the control module **72** may also receive as input aircraft altitude.

The control module **72** also includes control logic for selectively activating the phase change cooling system **92** based on a fuel temperature and the aircraft altitude. Specifically, the control module **72** monitors the temperature sensor **140** to determine if the fuel temperature is above or below the control temperature. The control module **72** also includes control logic for monitoring the aircraft altitude to determine the appropriate control temperature for the fuel **40**. As explained above, the LFL temperature of the fuel **40** is based on the fuel tank ullage pressure, and the aircraft altitude is indicative of the fuel tank ullage pressure. In the exemplary embodiment as shown in FIG. 2, the control module **72** is in signal communication with the compressor **80**, and activates the phase change cooling system **92** by engaging the compressor **80** based on the fuel temperature and the aircraft altitude. However, those skilled in the art will readily appreciate that if the cooling system is a liquid cooling system or an air cycle cooling system, then the control module **72** may be in communication with other components of the center wing tank cooling system **60** that control the flow of cooling fluid.

In the event the fuel temperature is above the control temperature, then the control module **72** includes control logic for sending an activation signal for activating the phase change cooling system **92**. Specifically, in the embodiment as shown in FIG. 2, the compressor **80** is engageable by the activation signal.

Once the compressor **80** is engaged, the center wing tank cooling system **60** is operable to provide cooling to the lowermost surface **50** of the center wing tank **24**. Specifically, if the phase change cooling system **92** is activated and the compressor **80** is engaged, the refrigerant **94** may undergo phase transitions in order to provide cooling to the lowermost surface **50** of the center wing tank **24**.

The control module **72** continues to keep the phase change cooling system **92** activated (i.e., the compressor **80** remains engaged) until the fuel **40** located within the center wing tank **24** has been cooled to a lower limit temperature. The lower limit temperature may be a predetermined amount below the control temperature of the fuel. For example, in one embodiment, the lower limit temperature may range from about **0°C** below the control temperature to about **5°C** below the control temperature, however it is to be understood that these ranges are merely exemplary in nature and may be modified depending on system constraints. In one approach, the lower limit temperature of the fuel **40** may be set or determined such that any liquid water located within the center wing tank **24** may not freeze.

The lower limit temperature may be used to ensure that the center wing tank cooling system **60** does not continue to provide cooling to the center wing tank **24** if the lowermost surface **50** has already been cooled sufficiently. Thus, once the temperature sensor **140** indicates that the fuel **40** is at or below the lower limit temperature, the control module **72** may send a deactivation signal to deactivate the phase change cooling system **92**. Specifically, in the non-limiting embodiment as shown in FIG. **2**, the deactivation signal may be used to disengage the compressor **80**. Once the phase change cooling system **92** is deactivated, the center wing tank cooling system **60** is no longer operable to provide cooling to the lowermost surface **50** of the center wing tank **24**.

In one exemplary embodiment, the control module **72** may further include forward thinking logic that determines a specific turn-on time as well as a turn-off

time of the center wing tank cooling system **60**. Specifically, the control module **72** may monitor the heating rate or thermal inertia of the fuel **40** by continuously monitoring the temperature sensor **140** over a specified period of time. The control module **72** may also monitor a fuel level of the fuel **40** within the center wing tank **24** as well by monitoring a liquid level sensor (not illustrated). The control module **72** may then determine the specific turn-on time of the center wing tank cooling system **60** based on the thermal inertia as well as the fuel level of the fuel **40**. Additionally, the control module **72** may also determine the specific turn-off time of the center wing tank cooling system **60** based on the thermal inertia as well as the fuel level of the fuel **40**. Those skilled in the art will readily appreciate that the forward thinking logic of the control module **72** may set the turn-on and the turn-off times of the compressor **80** based on real time trends in the fuel level as well as the heating or cooling rate of the fuel **40**, and may ultimately provide a more efficient approach for maintaining the temperature of the fuel **40** below the control temperature.

FIG. **4** is an alternative embodiment of the center wing tank cooling system **60**. In particular, a heat shield **150** may be placed directly below the heat exchanger **86**. The heat shield **150** may be used to deflect heat radiated by heat generating components of the center wing tank cooling system **60** such as, for example, the compressor **80** (shown in FIG. **2**). Thus, the heat shield **150** may reduce temperature of the fuel **40** located within the center wing tank **24**. As a result, the center wing tank cooling system **60** may be activated less often or for a shorter period of time. Moreover, the center wing tank cooling system **60** may also be smaller and more compact when compared to a cooling system where the heat shield **150** is not included.

FIG. **5** is yet another embodiment of the center wing tank cooling system **60** including the heat shield **150**. In the embodiment as shown in FIG. **5**, cooling air **160** may be introduced around the heat generating components of the center

wing tank cooling system **60** (i.e., the compressor **80** shown in FIG. **2**) as well as the AC pack **30**. The cooling air **160** may be used to dissipate heat radiated by the heat generating components of the center wing tank cooling system **60** as well as the AC pack **30**. The cooling air **160** may either be ram air drawn from outside the aircraft **10** (FIG. **1**), or air generated by a cooling fan (not illustrated in the figures). In the event the cooling air **160** is ram air, it is to be understood that the heat shield **150** may be omitted. The cooling air **160** may further reduce temperature of the fuel **40** located within the center wing tank **24**. Thus, the center wing tank cooling system **60** may be activated less often or for a short period of time. Moreover, the center wing tank cooling system **60** may also be smaller and more compact when compared to a cooling system where the cooling air **160** is not used.

Referring generally to the figures, the disclosed center wing tank cooling system may provide a relatively simple approach for maintaining the temperature of fuel located within the center wing tank of the aircraft. Those skilled in the art will readily understand the importance of maintaining the temperature of the fuel within the center wing tank substantially below the LFL temperature. The disclosed center wing tank cooling system provides an automated, cost-effective approach for maintaining the temperature of the fuel within the center wing tank at or below the control temperature to ensure the fuel temperature is within a specific range.

While the forms of apparatus and methods herein described constitute preferred aspects of this disclosure, it is to be understood that the disclosure is not limited to these precise forms of apparatus and methods, and the changes may be made therein without departing from the scope of the disclosure.

EMBODIMENTS IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

- 1.** A system for cooling a fuel tank of an aircraft, wherein the fuel tank defines a surface, the system comprising:

5 a temperature sensor for detecting a fuel temperature within the fuel tank, wherein the cooling system maintains the fuel temperature below a control temperature;

10 a cooling system including a heat exchanger, wherein the heat exchanger is in thermal communication with a surface of the fuel tank and comprises a cooling loop configured to contact the surface of the fuel tank, wherein a cooling fluid flows through the cooling loop and draws heat from the surface of the fuel tank to provide cooling to fuel within the fuel tank, and wherein the cooling loop is not in contact with the fuel within the fuel tank; and

15 a control module in signal communication with the temperature sensor and the cooling system, the control module including control logic for:

20 monitoring the temperature sensor;

 determining the fuel temperature is above the control temperature; and



 generating an activation signal to activate the cooling system in response to determining the fuel temperature is above the control temperature.

- 25 **2.** The system as recited in claim **1**, wherein the control temperature is based on a flash point of a fuel and an ullage pressure of the fuel tank.

3. The system as recited in claim 1, wherein the cooling loop is embedded within a lowermost surface of the fuel tank.
4. The system as recited in claim 1, wherein the cooling loop is arranged in a serpentine configuration along a lowermost surface of the fuel tank.
- 5 5. The system as recited in claim 1, wherein the control temperature is a predetermined margin below a lower flammability limit (LFL) temperature of a fuel.
6. The system as recited in claim 1, wherein the control temperature ranges from about 10°C to about 32°C.
- 10 7. The system as recited in claim 1, further comprising a heat shield located directly below the heat exchanger.
8. The system as recited in any one of claims 1 to 6, further comprising means for directing cooling air to flow around heat generating components of the cooling system.
- 15 9. The system as recited in claim 1, wherein the cooling system comprises a condenser, an expansion valve, and a refrigerant.
10. The system as recited in claim 9, wherein the cooling fluid is the refrigerant, and wherein the refrigerant flows through the heat exchanger to provide cooling to the fuel tank.
- 20 11. The system as recited in claim 1, wherein the control module includes control logic for generating a deactivation signal to deactivate the cooling system, wherein the control module generates the deactivation signal in response to the temperature sensor indicating the fuel temperature is at a lower limit temperature.

12. The system as recited in claim 11, wherein the lower limit temperature ranges from about 0°C below the control temperature to about 5°C below the control temperature.
13. A method of cooling a center wing tank of an aircraft, wherein the center wing tank defines a surface, comprising:
- 5 detecting a fuel temperature within the center wing tank by a temperature sensor;
- 10 monitoring the temperature sensor by a control module, wherein the control module is in signal communication with the temperature sensor;
- determining the fuel temperature is above a control temperature by the control module;
- 15 generating an activation signal, by the control module, in response to determining the fuel temperature is above the control temperature, wherein the control module is in signal communication with a cooling system including a heat exchanger, and wherein the heat exchanger comprises a cooling loop configured to contact the surface of the center wing tank and the cooling loop is not in contact with fuel within the center wing tank;
- 20 activating the cooling system in response to generating the activation signal; and
- 25 flowing cooling fluid through the cooling loop in response to activating the cooling system, wherein the cooling fluid draws heat from the surface of the center wing tank to provide cooling to the fuel within the center wing tank.

- 14. The method of claim 13, comprising providing a heat shield located directly below the heat exchanger.
- 15. The method of claim 14, comprising providing cooling air around heat generating components of the cooling system.
- 5 16. The method of claim 13, comprising generating a deactivation signal by the control module in response to the temperature sensor indicating the fuel temperature is at a lower limit temperature, wherein the deactivation signal deactivates the cooling system.
- 10 17. The method of claim 13, wherein the cooling loop is embedded within a lowermost surface of the center wing tank.

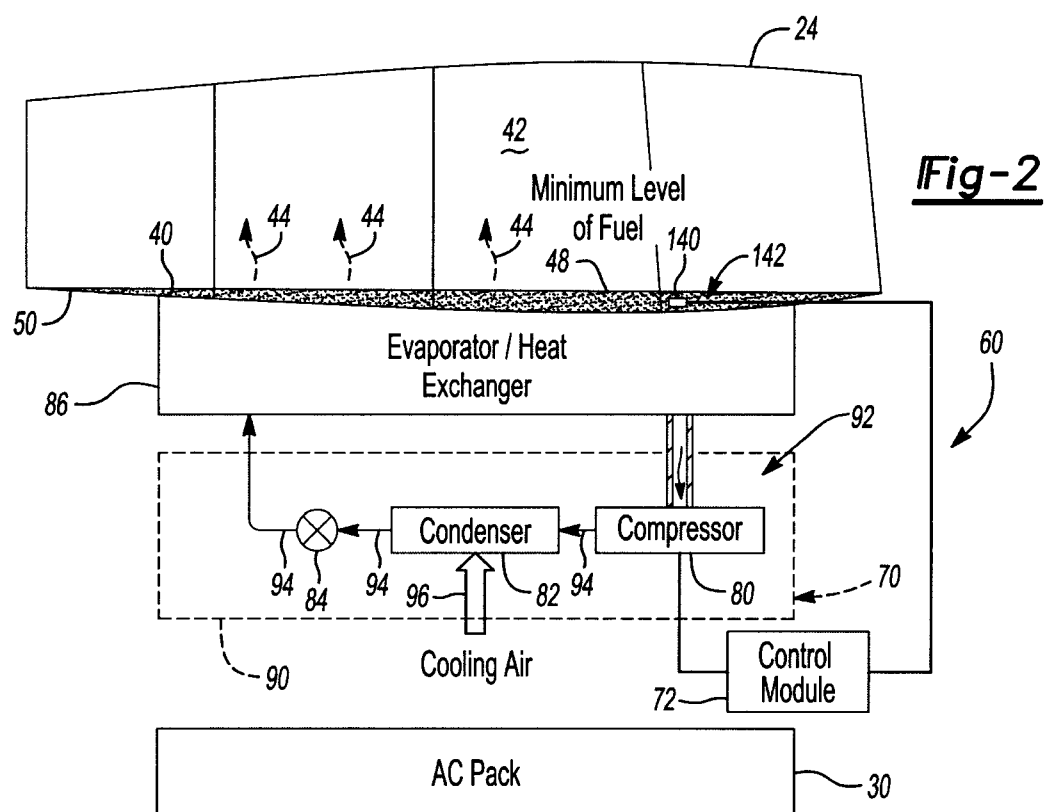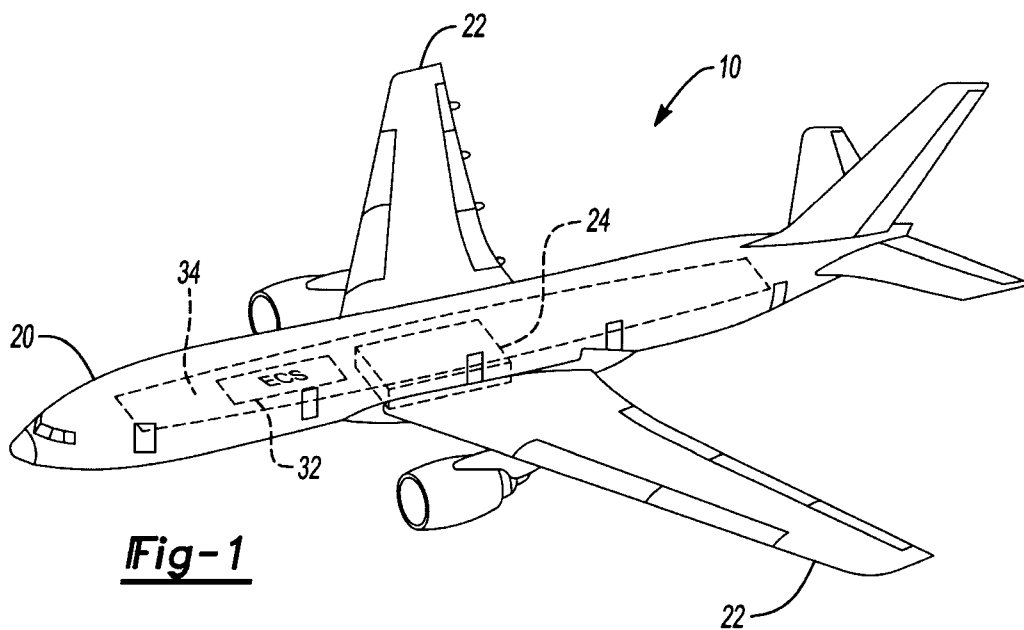


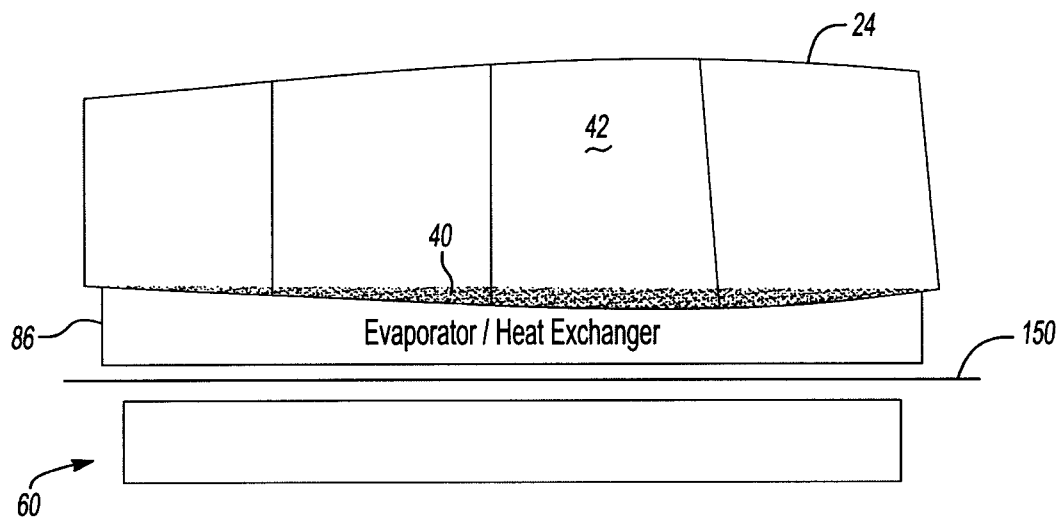
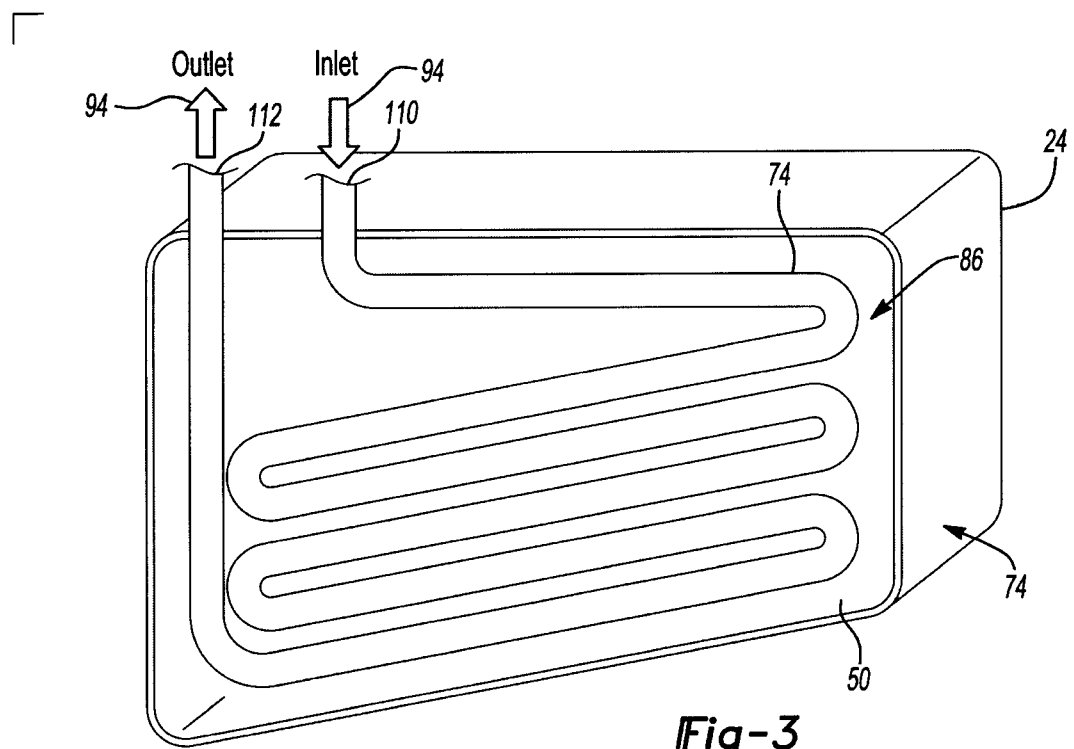


Fig-4

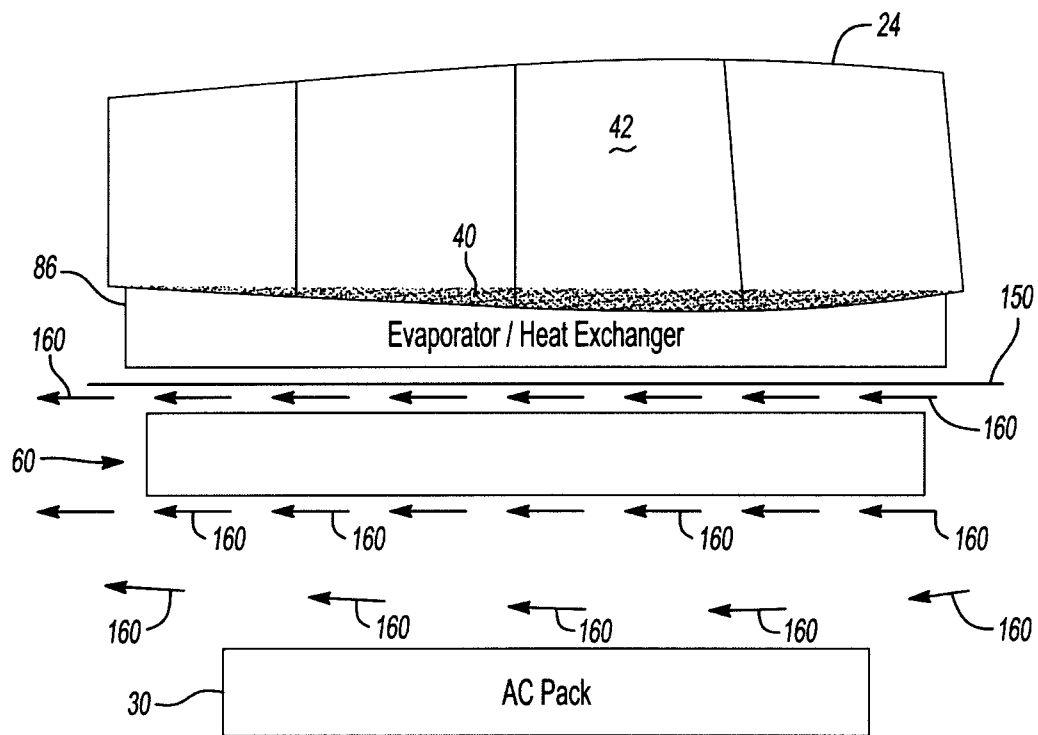


Fig-5

