

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 August 2011 (25.08.2011)

(10) International Publication Number
WO 2011/101347 A1

- (51) International Patent Classification:
H04W 24/10 (2009.01)
- (21) International Application Number:
PCT/EP2011/052220
- (22) International Filing Date:
15 February 2011 (15.02.2011)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/304,963 16 February 2010 (16.02.2010) US
- (71) Applicant (for all designated States except US): TELEFONAKTIEBOLAGET L M ERICSSON (PUBL) [SE/SE]; S-164 83 Stockholm (SE).
- (72) Inventors; and
(75) Inventors/Applicants (for US only): PERSSON, Håkan [SE/SE]; Huvudstagatan 13, S-171 58 Solna (SE). ENBUSKE, Henrik [SE/SE]; Norrbackagatan 4, 3 tr, S-113 41 Stockholm (SE). PEISA, Janne [FI/FI]; Koivunlehväkuja 3, FI-02130 Espoo (FI).
- (74) Agents: DAHNÉR, Christer et al.; Kransell & Wennborg KB, P.O. Box 27834, S-115 93 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: ENABLING REPORTING OF NON-REAL-TIME MDT MEASUREMENTS

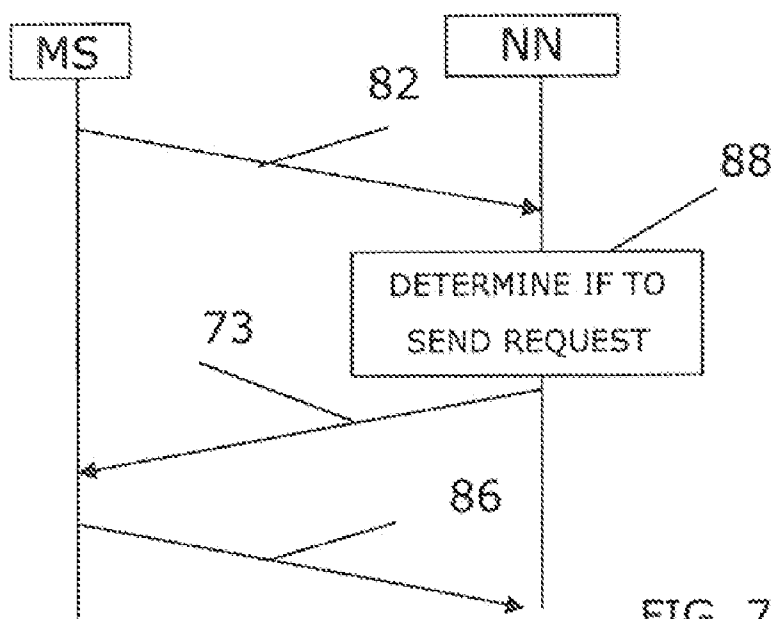


FIG. 7

(57) Abstract: The invention relates to informing a network node of a wireless communication network (10) of the presence of logged measurements. A first mobile station performs (78) measurements concerning one or more connectivity aspects for the first mobile station in relation to the wireless communication network and stores the measurements in an internal log, where the measurements are performed according to a reporting configuration for the first mobile station. The first mobile station then sends (82) a notification to the first network node regarding the presence of logged measurements in order to enable the first network node to respond to the notification with a request for a logged measurement report.

WO 2011/101347 A1

ENABLING REPORTING OF NON-REAL-TIME MDT MEASUREMENTS

TECHNICAL FIELD

5 The invention generally relates to the provision of measurement reports to a network from a mobile station. More particularly, the invention relates to a method and computer program product for informing a first network node of a wireless communication network of the
10 presence of logged measurements from a first mobile station, such a mobile station, a method and a computer program product for enabling a mobile station to inform a first network node of the wireless communication network of the presence of logged measurements and a
15 network node for enabling the mobile station to inform of the presence of logged measurements.

BACKGROUND

20 Mobile stations, often denoted user equipment, have a need to measure various network parameters. Such measurements may be stored in measurement logs and then reported to the network.

25 The Third Generation Partnership Project (3GPP) is in the process of defining solutions for Minimizing Drive Tests (MDT). The intention of the work is documented in 3GPP Technical Report (TR) 36.805, where mobile stations or user equipment (UE) measurement logging
30 functions are described.

A network (NW) can request the mobile station to perform some logging of measurements. The mobile station executes the logging as requested by the network with certain constraints, e.g. location information availability. Reporting of mobile station measurement log can be separately configured. This means that the period of logging and that for reporting can be different.

10 The most important use case for MDT is coverage optimization. For coverage optimization, the following mobile station measurements (or similar functionality) are considered:

- periodic downlink pilot measurements
- 15 • Serving Cell becomes worse than threshold
- transmit power headroom becomes less than threshold
- Paging Channel failure, such as Paging Control Channel (PCCH) Decode Error
- 20 • Broadcast Channel failure

The details of the reporting criteria have not been considered, but real-time reporting and/or non-real-time reporting (also known as logged or deferred reporting) can be required.

Possible triggers for non-real-time measurements include:

periodical downlink pilot measurements: radio environment measurements, such as Common Pilot Channel (CPICH) Received Signal Code Power (RSCP), Common Pilot Channel Energy per chip to Noise ratio (CPICH Ec/No),

or Time Division Duplexing (TDD) Primary Common Control Physical Channel (P-CCPCH) Received Signal Code Power (RSCP) and Interference Signal Code Power (ISCP), Reference Signal Received Power (RSRP) and Reference
5 Signal Received Quality (RSRQ) (connected mode only) are logged periodically;

Serving Cell becomes worse than threshold: radio environment measurements, such as CPICH RSCP, CPICH Ec/No, or TDD P-CCPCH RSCP and ISCP, RSRP and RSRQ
10 (connected mode only), are logged when the serving cell metric becomes worse than the configured threshold. A measurement logging window (i.e. "sliding window" in which collected logs are kept in the UE) is used in order to be able to collect information during a
15 certain period before and after the occurrence of event;

transmit power headroom becomes less than threshold: transmit power headroom and radio environment measurements, such as CPICH RSCP, CPICH
20 Ec/No, or TDD P-CCPCH RSCP and ISCP, RSRP and RSRQ (connected mode only) are logged when UE transmit power headroom becomes less than the configured threshold;

random access failure: details on the random access and radio environment measurements, such as
25 CPICH RSCP, CPICH Ec/No, or TDD P-CCPCH RSCP and ISCP, RSRP, and RSRQ (connected mode only) are logged when a random access failure occurs.

An example of real-time reporting is radio resource
30 management (RRM) reporting specified in 3GPP Technical Specification (TS) 25.331 and 3GPP TS 36.331. The details of non-real-time reporting (deferred reporting)

are not specified, making it impossible for the network to control the reporting.

One particular issue is the support of the non-real-time reporting in the network. Not all network nodes may be upgraded to support reception of the non-real-time reports, potentially leading to the network discarding the received logged measurement report. Currently the mobile station has no way to know if the network is prepared to receive the logged measurement report.

SUMMARY

The invention is therefore directed towards providing measures that raise the reliability of providing logged measurement reports to a network from a mobile station.

Among other things, this invention enables a mechanism to control the reporting of the non-real-time reporting.

In one aspect of the invention, a mobile station indicates availability of a logged measurement report to a network and delivers the actual logged measurement report, for example after the network has indicated it is prepared to receive the measurement report.

In another aspect of the invention, a mobile station includes a memory arranged for storing reporting data such as MDT data and a processor that controls the collection of data and controls the delivery to the

network of MDT data according to information, such as requirements, received from the network.

One object of the present invention is to make a mobile station ensure that logged measurement reports are sent from the mobile station to a network node in a reliable way.

This object is according to a first aspect of the invention achieved through a method of informing a first network node of a wireless communication network of the presence of logged measurements from a first mobile station, the method comprising:
performing measurements concerning one or more connectivity aspects for the first mobile station in relation to the wireless communication network, where the measurements are being performed according to a reporting configuration for the first mobile station, storing the measurements in an internal log, and sending a notification to the first network node regarding the presence of logged measurements in order to enable the first network node to respond to the notification with a request for a logged measurement report.

25

This object is according to a second aspect of the invention achieved through a first mobile station for informing a first network node of a wireless communication network about the presence of logged measurements. The mobile station comprises:
a measurement performing unit for performing measurements concerning one or more connectivity

30

aspects for the first mobile station in relation to the wireless communication network, said measurements being performed according to a reporting configuration for the first mobile station, and

5 a control unit that

orders the measurements to be performed,
stores the measurements in an internal log, and
orders a transmitter to send a notification to the first network node regarding the presence of

10 logged measurements in order to enable the first network node to respond to the notification with a request for a logged measurement report.

The object is according to a third aspect of the
15 invention achieved through a computer program product for informing a first network node of a wireless communication network about the presence of logged measurements. The computer program product comprises computer readable storage medium comprising a set of
20 instructions causing a control unit in a mobile station to

order measurements concerning one or more connectivity aspects to be performed in and for the first mobile station in relation to the wireless communication

25 network, said measurements being performed according to a reporting configuration for the first mobile station, store the measurements in an internal log, and order a transmitter to send a notification to the first network node regarding the presence of logged
30 measurements in order to enable the first network node to respond to the notification with a request for a logged measurement report.

The invention has many advantages. Through sending an indication, the reliability in the reporting is increased. The risk of losing a measurement report is
5 lowered. It also enables the network to only request reports when these are available. The network does not have to keep track of the presence of logged measurements and can therefore use its processing capability for other activities.

10

According to a variation of the invention a notification is repeatedly being sent if no request is received.

15 According to a further variation of the invention logged measurements are retained in the internal log if no request is received.

According to yet another variation of the invention the
20 collection of measurements is performed in idle mode.

According to a further variation of the invention, the notification comprises an indication of type of access technology used by the first mobile station when
25 gathering data for said report.

According to another variation of the invention, the notification is sent as a radio resource control message, which may be a modified message relating to
30 the connection of a mobile station to the network. The message may especially be a radio resource control connection setup complete message.

According to one variation of the first aspect of the invention, the method further comprises the step of determining a point in time when to send the
5 notification based on at least one notification timing criterion.

The notification timing criterion may be based on one or more of the following properties: mobile station
10 memory consumption, battery level, availability of measurements and load in network.

According to one variation of the first aspect of the invention, the method further comprises receiving the
15 reporting configuration from a network node.

According to one variation of the second aspect, the control unit of the mobile station is further arranged to receive the reporting configuration from a network
20 node.

This network node providing the reporting configuration may be the first network node. As an alternative it may be a further network node, where the first and further
25 network nodes use different types of access technology.

Another object of the invention is to enable, by a wireless communication network, a mobile station to provide logged measurement reports to a network node in
30 a reliable way.

This object is according to a fourth aspect of the invention achieved through a method of enabling a mobile station to inform a first network node of the wireless communication network of the presence of
5 logged measurements, the method comprising providing, from a network node, a first mobile station with a reporting configuration for sending logged measurement reports in order to enable the mobile station to send a notification to the first network node regarding the
10 presence of logged measurements.

This object is according to a fifth aspect of the invention achieved through a network node of a wireless communication network for enabling a first mobile
15 station to inform a first network node of the wireless communication network of the presence of logged measurements, the network node comprising a control processor arranged to provide the first mobile station with a reporting configuration for enabling the mobile
20 station to send a notification to the first network node regarding the presence of logged measurements.

This object is according to a sixth aspect of the invention furthermore achieved through a computer
25 program product for enabling a mobile station to inform a first network node of the wireless communication network of the presence of logged measurements, the computer program product comprising a computer readable storage medium comprising a set of instructions causing
30 a network node in the network to:
provide a first mobile station with a reporting configuration for enabling the mobile station to send a

notification to the first network node regarding the presence of logged measurements.

The reporting configuration may here specify that the first mobile station shall perform measurements when in idle mode.

It should be emphasized that the term "comprises/comprising" when used in this specification is taken to specify the presence of stated features, integers, steps or components, but does not preclude the presence or addition of one or more other features, integers, steps, components or groups thereof.

15 BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be described in more detail in relation to the enclosed drawings, in which:

20 fig. 1 schematically shows an architecture of a wireless communication network comprising radio network controllers, base stations and mobile stations, fig. 2 shows a block diagram of an arrangement in a mobile station that can implement some of the 25 functionality according to the invention, fig. 3 shows a a block diagram of a portion of a base station that can communicate with mobile stations and implement some of the functionality according to the invention, 30 fig. 4 schematically shows signals exchanged between a mobile station and network in a first basic variation of the invention,

fig. 5 shows a flow chart of a number of method steps being performed in a network node of the system according to a first embodiment of the invention,
fig. 6 shows a flow chart of a number of method steps 5 being performed in a mobile station according to the first embodiment of the invention,
fig. 7 schematically shows signals exchanged between mobile station and network node in a variation of the first embodiment,
10 fig. 8 shows a flow chart of a number of method steps being performed in a network node of the system according to a second embodiment of the invention,
fig. 9 shows a flow chart of a number of method steps being performed in a mobile station according to the
15 second embodiment of the invention,
fig. 10 schematically shows signals exchanged between mobile station and network in a variation of the second embodiment,
fig. 11 shows a flow chart of a number of method steps
20 being performed in a network node of the system according to a third embodiment of the invention,
fig. 12 shows a flow chart of a number of method steps being performed in a mobile station according to the third embodiment of the invention, and
25 fig. 13 schematically shows a computer program product according to the invention comprising a computer readable storage medium in the form of a CD ROM disc.

DETAILED DESCRIPTION

30

In the following description, for purposes of explanation and not limitation, specific details are

set forth such as particular architectures, interfaces, techniques, etc. in order to provide a thorough understanding of the invention. However, it will be apparent to those skilled in the art that the invention
5 may be practiced in other embodiments that depart from these specific details. In other instances, detailed descriptions of well-known devices, circuits, and methods are omitted so as not to obscure the description of the invention with unnecessary detail.

10

The Third Generation Partnership Project (3GPP) Long Term Evolution (LTE) standard for wireless communication systems has recently been finalized, supporting bandwidths up to 20 megahertz (MHz). LTE and
15 High-Speed Packet Access (HSPA) are sometimes called "third generation" (3G) communication systems and are currently being standardized by the 3GPP. The LTE specifications can be seen as an evolution of the current wideband code division multiple access (WCDMA)
20 specifications.

An LTE system uses orthogonal frequency division multiplex (OFDM) as a multiple access technique (called OFDMA) in the downlink (DL) from system nodes to user
25 equipments (UEs). UE is the term used for mobile stations in LTE and WCDMA. An LTE system has channel bandwidths ranging from about 1.4 MHz to 20 MHz, and supports throughputs of more than 100 megabits per second (Mb/s) on the largest-bandwidth channels. One
30 type of physical channel defined for the LTE downlink is the physical downlink shared channel (PDSCH), which conveys information from higher layers in the LTE

protocol stack and to which one or more specific transport channels are mapped. Control information is conveyed by a physical uplink control channel (PUCCH) and by a physical downlink control channel (PDCCH). LTE channels are described in 3GPP Technical Specification (TS) 36.211 V9.1.0, Physical Channels and Modulation, among other specifications, which are here incorporated by reference.

10 An IMT-Advanced communication system uses an internet protocol (IP) multimedia subsystem (IMS) of an LTE, HSPA, or other communication system for IMS multimedia telephony (IMT). In the IMT advanced system (which may be called a "fourth generation" (4G) mobile communication system), bandwidths of 100 MHz and larger are being considered. The 3GPP promulgates the LTE, HSPA, WCDMA, and IMT specifications, and specifications that standardize other kinds of cellular wireless communication systems.

20

In an OFDMA communication system, the data stream to be transmitted is portioned among a number of narrowband subcarriers that are transmitted in parallel. In general, a resource block devoted to a particular UE is a particular number of particular subcarriers used for a particular period of time. Different groups of subcarriers can be used at different times for different users. Because each subcarrier is narrowband, each carrier experiences mainly flat fading, which makes it easier for a UE to demodulate each subcarrier. OFDMA communication systems are described in the

literature, for example US 2008/0031368, which is herein incorporated by reference.

FIG. 1 depicts the architecture of a WCDMA system 10, which is a typical cellular communication system. Radio network controllers (RNCs) 12, 14 control various radio network functions, including for example radio access bearer setup, diversity handover, etc. In general, each RNC directs calls to and from a UE, such as a mobile station (MS), mobile phone, or other remote terminal, via appropriate base station(s) (BSs), which communicate with each other through downlink (DL, or forward) and uplink (UL, or reverse) channels. In FIG. 1, RNC 12 is shown coupled to BSs 16, 18, 20, and RNC 14 is shown coupled to BSs 22, 24, 26. The architecture of an LTE system differs from that of a WCDMA system in that the RNC is lacking as a separate node. Instead, the BS, or eNodeB as is the name of the LTE radio base station, has some of the functions of the RNC integrated, and has an interface for communication with other eNodeBs.

Each BS, or eNodeB in an LTE system, serves a geographical area that is divided into one or more cell(s). In FIG. 1, BS 26 is shown as having five antenna sectors S1-S5, which can be said to make up the cell of the BS 26, although a sector or other area served by signals from a BS can also be called a cell. In addition, a BS may use more than one antenna to transmit signals to a UE. The BSs are typically coupled to their corresponding RNCs by dedicated telephone lines, optical fiber links, microwave links, etc. The

RNCs 12, 14 are connected with external networks such as the public switched telephone network (PSTN), the internet, etc. through one or more core network nodes, such as a mobile switching center (not shown) and/or a
5 packet radio service node (not shown).

It will be understood that the arrangement of functionalities depicted in FIG. 1 can be modified in 3G LTE and other communication systems. For example,
10 the functionality of the RNCs 12, 14 can be moved to the eNodeBs 22, 24, 26, and other functionalities can be moved to other nodes in the network. It will also be understood that a base station can use multiple transmit antennas to transmit information into a
15 cell/sector/area, and those different transmit antennas can send respective, different pilot signals.

Figure 2 is a block diagram of a structure 31 of an eNodeB or eNB, i.e. of a base station BS. This
20 structure 31 which is typical of the BSs 16, 18, 20, 22, 24, 26 and other such transmitting nodes in the network 10 may be used for communicating with mobile stations by implementing the methods to be described below. It will also be appreciated that the functional
25 blocks depicted in Figure 2 can be combined and re-arranged in a variety of equivalent ways, and that many of the functions can be performed by one or more suitably programmed digital signal processors and other known electronic circuits.

30

The eNB structure 31 is operated by a control processor 32, which typically and advantageously is a suitably

programmed digital signal processor. The control processor 32 typically provides and receives control and other signals from various devices in the structure 31. For simplicity in Figure 2, the control processor 5 32 is as shown exchanging information with a scheduler and selector 33, which receives digital words to be transmitted to respective mobile stations or to be broadcast from a suitable data generator 34. The scheduler and selector 33 implements resource block and 10 resource element (RB/RE) scheduling and selection in an LTE system, for example, and implements code allocation in a WCDMA/HSPA system, for example.

The control processor 32 is configured to monitor the 15 load on the base station, which can be determined for example simply by counting the RBs and REs to be transmitted in a sub-frame, frame, or group of them. A processor such as the control processor 32 can also be configured as a traffic analyzer that determines the 20 load on a BS by monitoring the BS buffer status, e.g., how much data is waiting for available bandwidth to be transmitted to all connected mobile stations in relation to the number of RBs and REs being and recently transmitted. As discussed above, the load on 25 a BS can also be determined based on the number of its connected mobile stations, or in a WCDMA, HSPA, or equivalent system, based on the number of allocated channelization codes. Based on the determined load, the processor 32 implements other steps of the methods to 30 be described below.

Information from the scheduler and selector 33 is provided to a modulator 35 that uses the information to generate a modulation signal suitable for the particular communication system. For example, the
5 modulator 35 in an LTE system is an OFDM modulator. The modulation signal generated by the modulator 35 is provided to a suitable radio circuit 37 that generates a wireless signal that is transmitted through at least one transmit antenna 38. Wireless signals transmitted
10 by mobile stations are captured by at least one receive antenna 39 that provides those signals to the radio circuit 37 and a demodulator 36. The artisan will understand that the same antenna can be used for transmission and reception, as is often done in a UE.

15

It will be understood that the control processor 32 can be configured such that it includes one or more other devices depicted in Figure 2, which can be implemented by dedicated programmed processors or other suitable
20 logic configured to perform their functions. The combination of the data generator 34, scheduler and selector 33, and modulator 35 produces DL frames or sub-frames to be transmitted. The modulator 35 converts the information into modulation symbols that
25 are provided to the radio circuit 37, which impresses the modulation symbols on one or more suitable carrier signals. In an LTE system for example, the radio circuit 37 impresses the modulation symbols on a number of OFDM subcarriers. The modulated subcarrier signals
30 are transmitted through the antenna 38.

Figure 3 is a block diagram of an arrangement 40 in a mobile station that can implement methods of various embodiments of the invention to be described below. It will be appreciated that the functional blocks depicted 5 in Figure 3 can be combined and re-arranged in a variety of equivalent ways, and that many of the functions can be performed by one or more suitably programmed digital signal processors. Moreover, connections among and information provided or exchanged 10 by the functional blocks depicted in Figure 3 can be altered in various ways to enable a mobile station to implement other methods involved in the operation of the mobile station.

15 As depicted in Figure 3, a mobile station receives a DL radio signal through an antenna 41 and typically down-converts the received radio signal to an analog baseband signal in a front end receiver (Fe RX) 42. The baseband signal is spectrally shaped by an analog 20 filter 44 that has a bandwidth BW_0 , and the shaped baseband signal generated by the filter 44 is converted from analog to digital form by an analog-to-digital converter (ADC) 46.

25 The digitized baseband signal is further spectrally shaped by a digital filter 48 that has a bandwidth BW_{sync} , which corresponds to the bandwidth of synchronization signals or symbols included in the DL signal. The shaped signal generated by the filter 48 is 30 provided to a cell search unit 50 that carries out one or more methods of searching for cells as specified for the particular communication system, e.g., 3G LTE.

Typically, such methods involve detecting predetermined primary and/or secondary synchronization channel (P/S-SCH) signals in the received signal.

5 The digitized baseband signal is also provided by the ADC 46 to a digital filter 52 that has the bandwidth BW_0 , and the filtered digital baseband signal is provided to a processor 54 that implements a fast Fourier transform (FFT) or other suitable algorithm
10 that generates a frequency-domain (spectral) representation of the baseband signal. A channel estimation unit 56 receives signals from the processor 54 and generates a channel estimate $H_{i,j}$ for each of several subcarriers i and cells j based on control and
15 timing signals provided by a control unit 58, which also provides such control and timing information to the processor 54.

The estimator 56 provides the channel estimates H_i to a
20 decoder 60 and a signal power estimation unit 62. The decoder 60, which also receives signals from the processor 54, is suitably configured to extract information from radio resource control (RRC) messages or other messages as described below and typically
25 generates signals subject to further processing in the mobile station (not shown). The estimator 62 generates received signal power measurements (e.g., estimates of reference signal received power (RSRP), received subcarrier power S_i , signal to interference ratio
30 (SIR), etc.). The estimator 62 can generate estimates of RSRP, reference signal received quality (RSRQ), received signal strength indicator (RSSI), received

subcarrier power S_i , SIR, and other relevant measurements, in various ways in response to control signals provided by the control unit 58. Power estimates generated by the estimator 62 are typically
5 used in further signal processing in the mobile station. The estimator 62 and channel estimation unit 56 may both be measurement providing units of the invention.

10 The estimator 62 (or the searcher 50, for that matter) is configured to include a suitable signal correlator.

In the arrangement depicted in Figure 3, the control unit 58 keeps track of substantially everything needed
15 to configure the searcher 50, processor 54, estimation unit 56, and estimator 62. For the estimation unit 56, this includes both method and cell identity (for reference signal extraction and cell-specific scrambling of reference signals). Communication between
20 the searcher 50 and the control unit 58 includes cell identity and, for example, cyclic prefix configuration.

The control unit 58 can determine which of several possible estimation methods is used by the estimator 56
25 and/or by the estimator 62 for measurements on the detected cell(s). In addition, the control unit 58, which typically can include a correlator or implement a correlator function, can receive information signaled by the network and can control the on/off times of the
30 Fe RX 42.

The control unit 58 provides appropriate information to an encoder 64, which generates modulation symbols or similar information that is provided to a transmitter front-end (FE TX) 66, which generates a transmission
5 signal appropriate to the communication system. As depicted in Figure 3, the transmission signal is provided to the antenna 41. The control unit 58 with the encoder 64 is suitably configured to generate RRC and other messages sent by the mobile station to the
10 network as described below. Finally there is a memory 67 connected to the control unit 58 in order to store measurement logs.

The control unit 58 and other blocks of the mobile
15 station can be implemented by one or more suitably programmed electronic processors, collections of logic gates, etc. that processes information stored in one or more memories. As noted above, the mobile station includes the memory 67. As an alternative it may
20 include some other type of information storage functionality. The memory 67 or other type of information storage functionality is suitable for carrying out the methods and receiving and generating the signals to be described below in cooperation with
25 the control unit 58 and software executed by the control unit. For example, the memory can be used to collect data for Minimizing of Drive Tests (MDT) under the control of the control unit 58 and possibly other electronic processor(s) in the mobile station and to
30 deliver the data to the network according to software executed by the control unit(s) and information and/or requests received from the network. The stored

information can include program instructions and data that enable the control unit 58 to implement the methods to be described below. It will be appreciated that the control unit typically includes timers, etc. 5 that facilitate its operations.

Now a first basic variation of the invention will be described with reference also being made to fig. 4, which shows signals exchanged between a first mobile 10 station MS and a first network node NN, where the first network node may be a base station or a radio network controller.

As mentioned earlier the invention is provided for 15 controlling the reporting, here non-real time reporting, of measurements from a mobile station to a network node.

At a minimum, control of non-real-time reporting may 20 comprise configuration of measurements to be logged, triggering of logging events, and reporting of logs. Fig. 4 shows a schematic picture of a non-real-time measurement procedure. Note that the network node NN or network node entity may be either a base station such 25 as an eNB or a radio network controller (RNC), depending on access technology. In both cases the node will typically use the structure 31 depicted in fig. 2.

Initially the first network node (for instance either 30 eNB or RNC) configures the non-real-time measurements. The first network node thus sends a configuration of non-real time measurements to the first mobile station,

step 68. The measurements can apply for a mobile station being either connected using radio resource control (RRC) or being in RRC idle mode. The configuration of the mobile station may be done or
5 carried out using dedicated signaling when the mobile station is in connected mode even though the actual measurements may be performed in RRC idle mode, or may be done or carried out with broadcast of system information, in which case it is expected that the
10 mobile station, when in idle mode reads the system information directly. The configuration can be sent in a dedicated RRC message, logged measurement configuration. The configuration typically sets out measurements to be made by the mobile station
15 concerning one or more connectivity aspects in and for the first mobile station in relation to the first communication network, which connectivity aspects may include one or more of the following: measurement object (e.g. frequency and/or Radio Access Technology
20 (RAT) that the mobile station is supposed to measure), reporting quantity (e.g. Reference Signal Received Power (RSRP) or Reference Signal Received Quality (RSRQ), measurement type (e.g. periodical or event triggered). The control processor 32 may here provide
25 configuration data to the scheduler and selector 33, which in turn treats the data through performing resource block and resource element scheduling and selection or code allocation depending on type of network. The configuration may also include a timer or
30 timer value indicating for how long the configuration is valid. The configuration may thus only be in force a limited time. The treated data is then modulated by the

modulator 35 onto a suitable carrier, which is then transmitted as a wireless signal by the radio circuit 37 via the antenna 38. In this way it can be seen that the control processor is arranged to provide the first 5 mobile station with the reporting configuration.

The configuration is then received by the control unit 58 of the mobile station, for instance mobile station 28. The configuration may here be received via the 10 antenna 41, front-end receiver 42, analog filter 44, ADC 46, digital filter 52, processor 54 and decoder 60.

When the mobile station MS has received the configuration it performs measurements according to 15 the received measurement configuration and stores the measurement results in the mobile station internal log. It thus collects measurements according to the configuration, step 69. The measurements may be collected or gathered through the control unit 58 20 ordering a measurement performing unit, such as estimator 62, to perform measurements according to the configuration. The measurement performing unit then performs measurements and sends these to the control unit 58. When receiving measurements, the control unit 25 58 then stores these in an internal log in the memory 67.

After having been collected p, the logged measurements are delivered to the network node entity. The mobile 30 station thus performs reporting of the non-real-time measurements, step 70. Two alternative ways of reporting logged measurements will be described later.

Typically reporting is made through the control unit 58 providing data to the encoder 64 for modulation and thereafter to the transmitter front-end 66 for transmission via the antenna 41. It can thus be seen
5 that the control unit 58 orders the transmitter front-end to send the report.

It should here be realized that the reporting of non-real-time measurements may not necessarily correspond
10 to the same network node as the configuration of the measurements. For example, the measurements may be configured using an eNB, but the reporting may be made to RNC, i.e. a mobile station can use a different RAT to report the logged measurements than the one it
15 received the configuration from.

As a further variation of this general concept it is possible that a mobile station is pre-configured, i.e. it is provided with the configuration beforehand and
20 would therefore not need to receive it from the network.

Now a first embodiment of the invention will be described in more detail with reference also being made
25 to fig. 5, which shows a flow chart of a number of method steps being performed in a network node in the form of a base station or radio network controller and to fig. 6, which shows a flow chart of a number of corresponding method steps being performed in a mobile
30 station.

In this first embodiment the first network node, for instance the base station 16, provides a reporting configuration to a mobile station MS, for instance the first mobile station 28, step 71. This reporting configuration is provided to the first mobile station in order to enable the network to send a request for a logged measurement report to the first mobile station and receive such a report as a response. The configuration may set out what parameters are to be measured, when measurements are to be made and how reporting is to be made. The reporting configuration may also specify that the mobile station is to perform measurements when in idle mode. This reporting configuration is thus sent to the mobile station 28. It may more particularly be performed in the same way as was described above in relation to the first basic variation of the invention in an RRC message named logged measurement configuration.

The mobile station thus receives such a reporting configuration from the network node, step 76, and then performs measurements according to this reporting configuration, step 78. The measurements may with advantage be performed in idle mode. As measurements are performed they are then being stored in an internal measurement log, step 80. This measurement log may be provided through the memory 67 connected to the control unit 58 of the mobile station. In this way data is gathered in the log. At a suitable time, which time may be set by the reporting configuration or the selection of which may be set by the reporting configuration, a notification is then sent to the first network node

from the first mobile station, step 82. The notification is a notification of the presence of logged measurements and perhaps also of the presence of a logged measurement report and is sent in order to
5 enable the first network node to respond to the notification with a request for a logged measurement report. The notification may be sent in an RRC message and therefore the control unit 58 may provide such a message to the encoder 64 for modulation and thereafter
10 transmission by the transmitter front-end 66 via the antenna 41. In the first embodiment the first mobile station may first send an RRC Connection Request message to the first network node, which responds with an RRC Connection Setup message. Thereafter the first
15 mobile station may send an RRC Connection Setup Complete message. It is this latter message that may include a bit position, logged measurements available, that has been set.

20 The control processor 32 of the network node then receives the notification via the antenna 39, radio circuit 37 and demodulator 36. As the network node receives the notification from the mobile station, step 72, it thereafter sends a request for a logged
25 measurement report as a response to the notification, step 73. It is here possible that such a request is only sent as a response to a notification. It is thus according to the first embodiment possible that a request for measurement is only sent if there is a
30 prior notification. It may thus only be sent based on the reception of a notification from the first mobile station. In this first embodiment it is furthermore the

same network node that provides the configuration and sends the request for a measurement report. The request may be sent in the form of an RRC message provided to the scheduler and selector 33 from the control processor 32 for being treated, for instance code allocation in WCDMA. Thereafter the treated data is modulated by the modulator 35 and transmitted to the mobile station via the antenna 38. In this way it can be seen that the control processor 32 is arranged to cause the sending of the request. The request is in the first embodiment sent in a RRC UE Information Request message. Here it is possible to use a bit position or variable in this message named LogMeasReportRequest.

The mobile station then receives the request as a response to the notification, step 84. The request is received in the control unit 58 via antenna 41, front-end receiver 42, analog filter 44, ADC 46, digital filter 52, processor 54 and decoder 60. The control unit 58 then sends the report as a response to the request, step 86. It is here possible that such a report is only sent as a response to a request. It is thus according to the first embodiment possible that a report is only sent if there is a prior request for measurements. In this first embodiment the report is then sent as soon as it is possible. The report is sent using the encoder 64, transmitter front-end 66 and antenna 41. The reporting is in the first embodiment sent in an RRC UE information response message in a section named LogMeasReport.

The network node then receives the logged measurement report as a response to the request, step 74, which report may be received in the same way as the notification. The control processor is thus arranged
5 to receive the logged measurement report as a response to the request. The node can then perform a suitable activity such as change its coverage based on one or more such reports received from various mobile stations.

10

Here it is also possible that measurements are made and also that reporting is made before a complete configuration has been received. The mobile station may for instance start the previously mentioned timer and
15 then perform collection of measurements in idle mode, periodically or event-triggered. Then as soon as it enters connected state, it may notify the network of available logged measurements. These may be reported upon receiving a request from the network. If the
20 mobile station then again enters idle mode, it may again continue to perform measurements according to the configuration. The performing of measurements may then end when the timer value expires and a final measurement report being notified and possibly also
25 being sent the next time the mobile stations gets connected. It is here further possible to later receive a new configuration.

Fig. 7 shows some signals sent between mobile station
30 and network node in one variation of this first embodiment.

In this variation, the mobile station indicates the availability of logged measurements to the network, through sending a notification to the network node, step 82.

5

If the mobile station has performed the measurements in idle mode, the indication can be done as a part of an RRC connection setup procedure. It may be a modified RRC message relating to the connection of a mobile
10 station to the network. As such it may be an RRC Connection Request or RRC Connection Setup Complete message. As an alternative it is possible to use a special RRC message. This means that the indication may be provided in an RRC Connection Request message, an
15 RRC Connection Setup Complete message, an RRC Connection Reconfiguration Complete message or an RRC Connection Reestablishment Complete message, for instance through an additional bit position provided for this purpose in these messages. This may be a bit
20 position or variable named logMeasAvailable. It is also possible to create a new type of RRC message that is dedicated to notification. Other types of possible messages are Cell Update, URA Update, Handover To UTRAN Complete and UTRAN Mobility Information Confirm
25 Measurement Report. As an alternative it is possible to provide the indication in an UE Information Response message. If the mobile station has performed measurements in RRC Connected Mode, a special RRC message (e.g. UE Information Indication) or an
30 extension of a current RRC message (e.g. Measurement Report, UECapabilityInformation) may be used. In the first embodiment the message RRC Connection Setup

Complete is used. If the network node does not support reception of non-real-time measurements, it will simply ignore the indication from the mobile station. Note that the timing of the indication can be determined by
5 the mobile station based on at least one notification timing criterion. This criterion may be a criterion based on one of mobile station memory consumption, battery level or some other factor. Note also that the indication from the mobile station may include an
10 indication on which technology or RAT (e.g. HSPA, LTE, cdma2000, etc.) the measurements were collected via. The indication may include an indication of type of access technology used by the first mobile station when gathering data for the report. The first network node
15 may use this information to determine if it can receive the particular measurements (e.g. is capable of decoding the Abstract Syntax Notation One (ASN.1) format used for measurement report).

20 The first network node then determines if it should request logged measurements, i.e. it determines if it should send a request for measurements based on at least one reporting timing criterion, step 88. If the network node supports reception of the non-real-time
25 measurements, which it would normally do when configuring the mobile station, it can use the current load in the cell, current load in the system, connection to the centralized data base to store reports and various other factors to determine a
30 suitable time instance to request the mobile station to transmit a measurement log. The reporting timing criterion may thus be based on one or more of the

properties load in the cell, load in the system and connection to the centralized data base. The request is then sent, step 73. The request to the mobile station can be sent using a special RRC message, or by using an
5 existing RRC message. The request may be sent in a radio resource control message concerning the capabilities of the mobile station, such as ueCapabilityEnquiry or ueInformationRequest. In the first embodiment the message ueInformationRequest is
10 used.

Finally the mobile station, upon receiving the request to transmit non-real-time measurement data, will transmit the logged measurements to the network node
15 entity, step 86. The transmission can be done using a special RRC message, or by using an existing RRC message (e.g. ueCapabilityResponse, MeasurementReport). In the first embodiment the message ueInformationResponse is used, which is a response to
20 the radio resource control message comprising the request.

If the mobile station has data available and has reporting the data as available for transmission, but
25 has not received a request to transmit logged measurements, it may repeat sending the indication either periodically, or after it has moved to a difference cell. This also means that logged measurements and a logged report may be retained in the
30 internal log, and thus no report sent, if no request is received.

As a further variation of the first embodiment it is possible that in order to avoid congesting signaling radio bearers (SRBs) with large measurement logs, a special SRB for non-real-time measurement reports can
5 be used. This means that the report may be transmitted on a signaling radio bearer dedicated to transmissions of logged measurement reports.

As yet another variation of the first embodiment it is
10 also possible to omit the indication from the mobile station completely. In such a solution, the network and more particularly the network node may simply ask different mobile stations to provide logged
15 measurements based on information available in the network. For example, if the mobile station capabilities (e.g. if the mobile station is in RRC Connected mode and has indicated that it supports non-real-time measurements) are known in the network, for instance by the first network node, the network may
20 simply ask the mobile station to provide any logged measurements (including measurements logged earlier in Idle mode).

After the network and here the first network node has
25 received an indication that the mobile station has logged measurements available, or has otherwise determined that the mobile station might have logged measurements available, the network selects a suitable occasion to request the logged measurements from the
30 mobile station. If the network entity doing this, here the first network node, does not support reception of

the non-real-time measurements, it will never request the logged measurements from the mobile station.

It is possible to omit notifications in other
5 scenarios. It is for instance possible to use broadcasting by the network instead. This is done in a second embodiment of the invention. The second embodiment of the invention will now be described with reference being made to fig. 8, which shows a flow
10 chart of a number of method steps being performed in a network node in the form of a base station or radio network controller and to fig. 9, which shows a flow chart of a number of corresponding method steps being performed in a mobile station.

15

In this second embodiment one network node, for instance the base station 16, provides a reporting configuration for a mobile station MS, for instance the first mobile station 28, step 90, through transmitting
20 the configuration to the mobile station. The mobile station then receives the reporting configuration from the network node, step 96, and thereafter performs measurements according to this reporting configuration, step 98. The measurements may also here with advantage
25 be performed in idle mode. As measurements are performed they are then being stored in a measurement log, step 100. So far the second and first embodiments operate in the same way.

30 However, now in the second embodiment there is no notification. Instead the first network node broadcasts a request for measurement reports to a group of mobile

stations in its vicinity, which group includes the first mobile station, step 92. It thus sends a request for measurement reports in a broadcast, which may be seen as a request being sent to all mobile stations in
5 its vicinity. This may be done through the control processor 32 ordering the data generator 34 to include the request in a broadcast being made. The data generator 34 may then include the request in the data to be broadcast, forward this data to the scheduler and
10 selector 33 for treatment, followed by modulation of the treated data in the modulator 35 and transmission of the modulated and treated data by the radio circuit 37 via the antenna 38.

15 As a mobile station, like the first mobile station receives such a request in a broadcast, step 102, it then sends a report as a response to the broadcast. It is here possible that reports are only sent as such responses. This means that unless a broadcast with a
20 request is received, no reports will be sent by the mobile station. The network node then receives the report as a response to the broadcast, step 94, and may then perform a suitable activity based on one or more such reports. The report is here typically received by
25 the control processor 32 via the antenna 39, radio circuit 37 and demodulator 36.

The signals exchanged between a network node and a mobile station in a variation of this second embodiment
30 are schematically shown in fig. 10.

Here the network, in the form of a base station, broadcasts the request, step 92. This may be done through the node broadcasts a cell level indication that the mobile station may transmit non-real-time measurement reports in a current cell. Note that the network entity may use the current load in the cell, current load in the system, connection to a centralized data base to store reports and various other factors to determine a suitable time instance to broadcast an indication for mobile stations to transmit measurement logs. The broadcast indication can be done using any existing System Information Message (MIB/SIB1) or System Information Block (SIB2 - 13) or using a new SIB or a new RRC message, i.e. a RRC message designed and dedicated to this purpose.

Upon receiving the broadcasted indication, step 102, the mobile station may determine a suitable time to report logged measurements, based on at least one report timing criterion, which criterion may be based on one or more of the properties mobile station memory consumption, battery level, availability of measurements, or by various other factors. It is also possible that the network, and here the first network node, may ask the mobile station to report the logged measurements immediately.

When the mobile station has determined a suitable time to transmit logged measurements, i.e. has determined when to send a report, step 106, (or if being ordered to report logged measurements immediately), the mobile station will transmit the logged measurements to the

network entity, here the first network node. It will thus send the report to the network node as a response to the broadcast, step 104. The transmission can be done using a special RRC message, or by using an
5 existing RRC message (e.g. ueCapabilityResponse, MeasurementReport)

It is also here possible to use a special SRB for non-real-time measurement reports in order to avoid
10 congesting SRBs with large measurement logs.

A third embodiment of the invention is also directed towards avoiding the use of indications. The third embodiment of the invention will now be described with
15 reference being made to fig. 11, which shows a flow chart of a number of method steps being performed in a network node in the form of a base station or radio network controller and to fig. 12, which shows a flow chart of a number of corresponding method steps being
20 performed in a mobile station.

In this third embodiment the mobile station performs measurements according to a reporting configuration that it has, step 110, which reporting configuration
25 may have been received in the same way as described in the first and second embodiment or which may be provided in the mobile station beforehand. The measurements may also here with advantage be performed in idle mode. As measurements are performed they are
30 then being stored in a measurement log, step 112.

In the third embodiment, the network controls the transmission of the non-real-time measurements by indicating Reporting ON/OFF. For example, the network may use an existing RRC message (e.g. in
5 ueCapabilityEnquiry or SystemInformationBlock), a new dedicated RRC message, or a new broadcast message.

The first network node may thus provide a reporting on indication to a mobile station, step 107, through
10 sending such a message.

Through receiving such a message, the mobile station thus receives a reporting on indication from the network node, step 114. Once the mobile station has
15 received the Reporting ON indication, it may then send the report at corresponding cell at a suitable point of time, e.g. when the mobile station has no more memory available, periodically, when the mobile station leaves logging campaign. In this way the mobile station may
20 send the report as a response to the reporting on indication.

This may later be followed by the network sending a reporting OFF indication, which may typically be done
25 in the same way as a modification of any of the previously described messages. This will disable the reporting and therefore no reports will be sent in this case.

30 The present invention has a number of advantages. It enables the network to control the reporting of the logged measurements. Loss of logged measurements can be

avoided if the network does not support the reception of non-real-time measurements. This further allows the network to perform a number of further activities such as changing of cell coverage. Furthermore, if the
5 measurements are collected in idle mode, the communication over the wireless interface between base station and mobile station is not disturbed. Furthermore, through sending an indication, the reliability in the reporting is increased. The risk of
10 losing a measurement report is lowered. It also enables the network to only request reports when these are available. The network does not have to keep track of the presence of reports and can therefore use its processing capability for other activities.

15

In some embodiments of the invention RRC messages were used. Such messages are described in more detail in 3GPP Technical Specifications 36.331 and 25.331, both of which are herein incorporated by reference.

20

There are many variations that can be made to the invention apart from those already mentioned. It is possible that different network nodes are used for performing configuration and receiving reports. A
25 first network node may for instance send the request and a further network node may provide the configuration. In this case the first and further network nodes may use different types of access technology, i.e. different RATs. Then the configuration
30 and request may be received by the first mobile station using these different types of access technology. It is here also possible that different access networks are

used, where one network node in a first access network is used for configuration and another node in a second access network is used for receiving reports, where both access networks may be subnetworks of the same communication network. It is also possible that the nodes involved in providing configurations and/or receiving reports are nodes at higher hierarchical levels of the communication network. Such a node can for instance be a node in the core network, like a server in a core network. One example is a Mobility Management Entity (MME) server or an Operations and Maintenance (O&M) server. The invention was above described in relation to MDT and logged measurement reporting. However, it should be realized that the invention is not limited to this specific area. The sending of notifications and reporting may for example also be performed in relation to Automatic Neighbor Relations (ANR).

Furthermore in the description given earlier the control processor performing the network activities of the invention was in essence a base station. If the node is another node in the network, this node would also be provided with a control processor, for instance a master control processor, communicating with the control processor of the base station, a slave control processor. Such communication may be performed using a suitable network communication interface such as the S1 communication interface in LTE. The slave control processor would then perform the above-described functionality under the control of the master control processor.

It will be appreciated that the methods and devices described above can be combined and re-arranged in a variety of equivalent ways, and that the methods can be
5 performed by one or more suitably programmed or configured digital signal processors and other known electronic circuits (e.g., discrete logic gates interconnected to perform a specialized function, or application-specific integrated circuits). Many aspects
10 of this invention are described in terms of sequences of actions that can be performed by, for example, elements of a programmable computer system. UEs embodying this invention include, for example, mobile telephones, pagers, headsets, laptop computers and
15 other mobile terminals, and the like. Moreover, this invention can additionally be considered to be embodied entirely within any form of computer-readable storage medium having stored therein an appropriate set of instructions for use by or in connection with an
20 instruction-execution system, apparatus, or device, such as a computer-based system, processor-containing system, or other system that can fetch instructions from a medium and execute the instructions.

25 The control of the mobile station and/or the control processor of the base station radio network controller may thus with advantage be provided in the form of a processor with associated program memory including computer program code for performing the functionality
30 of the control unit or control processor. It should be realized that this control unit or control processor may also be provided in the form of hardware, like for

instance in the form of an Application Specific Integrated Circuit (ASIC). The computer program code may also be provided on a computer-readable means, for instance in the form of a data carrier, like a CD ROM disc or a memory stick, which will implement the function of the above-described control unit or control processor when being loaded into the above-mentioned program memory and run by the processor. One such computer program product in the form of a CD ROM disc 118 with such a computer program code 120 is schematically shown in fig. 13.

While the invention has been described in connection with what is presently considered to be most practical and preferred embodiments, it is to be understood that the invention is not to be limited to the disclosed embodiments, but on the contrary, is intended to cover various modifications and equivalent arrangements. Therefore the invention is only to be limited by the following claims.

CLAIMS

1. A method of informing a first network node (16) of a wireless communication network (10) of the presence of logged measurements from a first mobile station (28), the method comprising the steps of:
5 performing (78; 98; 110) measurements concerning one or more connectivity aspects for the first mobile station in relation to the wireless communication network, said measurements being performed according to a reporting configuration for the first mobile station,
10 storing (80; 100; 112) the measurements in an internal log, and
15 sending (82) a notification to the first network node regarding the presence of logged measurements in order to enable the first network node to respond to the notification with a request for a logged measurement report.
20
2. The method according to claim 1, further comprising repeating sending a notification if no request is received.
- 25 3. The method according to any previous claim, wherein measurements are retained in the internal log if no request is received.
- 30 4. The method according to any previous claim, wherein the step of performing measurements is performed in idle mode.

5. The method according to any previous claim, wherein the notification comprises an indication of type of access technology used by the first mobile station when gathering data for said report.
- 5
6. The method according to any previous claim, wherein the notification is sent as a radio resource control message.
- 10 7. The method according to claim 6, wherein the radio resource control message is a modified message relating to the connection of a mobile station to the network.
- 15 8. The method according to claim 7, wherein the message is a radio resource control connection setup complete message.
9. The method according to any previous claim, further
- 20 comprising the step of determining a point in time when to send said notification based on at least one notification timing criterion.
10. The method according to claim 9, wherein the
- 25 notification timing criterion is based on one or more of the following properties: mobile station memory consumption, battery level, availability of measurements and load in network.
- 30 11. The method according to any previous claim, further comprising the step of receiving (76; 96) the reporting configuration from a network node.

12. The method according to claim 11, wherein the network node is the first network node.
- 5 13. The method according to claim 12, wherein the network node is a further network node, where the first and further network nodes use different types of access technology.
- 10 14. A first mobile station (28) for informing a first network node (16) of a wireless communication network (10) about the presence of logged measurements, the mobile station comprising:
a measurement performing unit (62) for performing
15 measurements concerning one or more connectivity aspects for the first mobile station in relation to the wireless communication network, said measurements being performed according to a reporting configuration for the first mobile
20 station,
a control unit (58) arranged to
order the measurements to be performed,
store the measurements in an internal log, and
order a transmitter (66) to send a notification to
25 the first network node regarding the presence of logged measurements in order to enable the first network node to respond to the notification with a request for a logged measurement report.
- 30 15. A computer program product for informing a first network node (16) of a wireless communication network (10) about the presence of logged

measurements, the computer program product comprising computer readable storage medium (118) comprising a set of instructions (120) causing a control unit (58) in a mobile station (28) to
5 order measurements concerning one or more connectivity aspects to be performed in and for the first mobile station in relation to the wireless communication network, said measurements being performed according to a reporting configuration for
10 the first mobile station, store the measurements in an internal log, and order a transmitter (66) to send a notification to the first network node regarding the presence of a logged measurements in order to enable the first
15 network node to respond to the notification with a request for a logged measurement report.

16. A method of enabling a mobile station to inform a first network node (16) of the wireless
20 communication network (10) of the presence of logged measurements, the method comprising the step of providing (68), from a network node, a first mobile station (28) with a reporting configuration for sending logged measurement reports in order to
25 enable the mobile station to send a notification to the first network node regarding the presence of logged measurements.

17. The method according to claim 16, wherein the
30 reporting configuration specifies that the first mobile station shall perform measurements when in idle mode.

18. A network node (16) of a wireless communication network (10) for enabling a first mobile station to inform a first network node (16) of the wireless
5 communication network (10) of the presence of logged measurements, the network node comprising a control processor (32) arranged to provide the first mobile station (28) with a reporting configuration for enabling the mobile station to send a notification
10 to the first network node regarding the presence of logged measurements.

19. A computer program product for enabling a mobile station to inform a first network node (16) of the
15 wireless communication network (10) of the presence of logged measurements, the computer program product comprising a computer readable storage medium (118) comprising a set of instructions (120) causing a network node (16) in the network to:
20 provide a first mobile station (28) with a reporting configuration for enabling the mobile station to send a notification to the first network node regarding the presence of logged measurements.

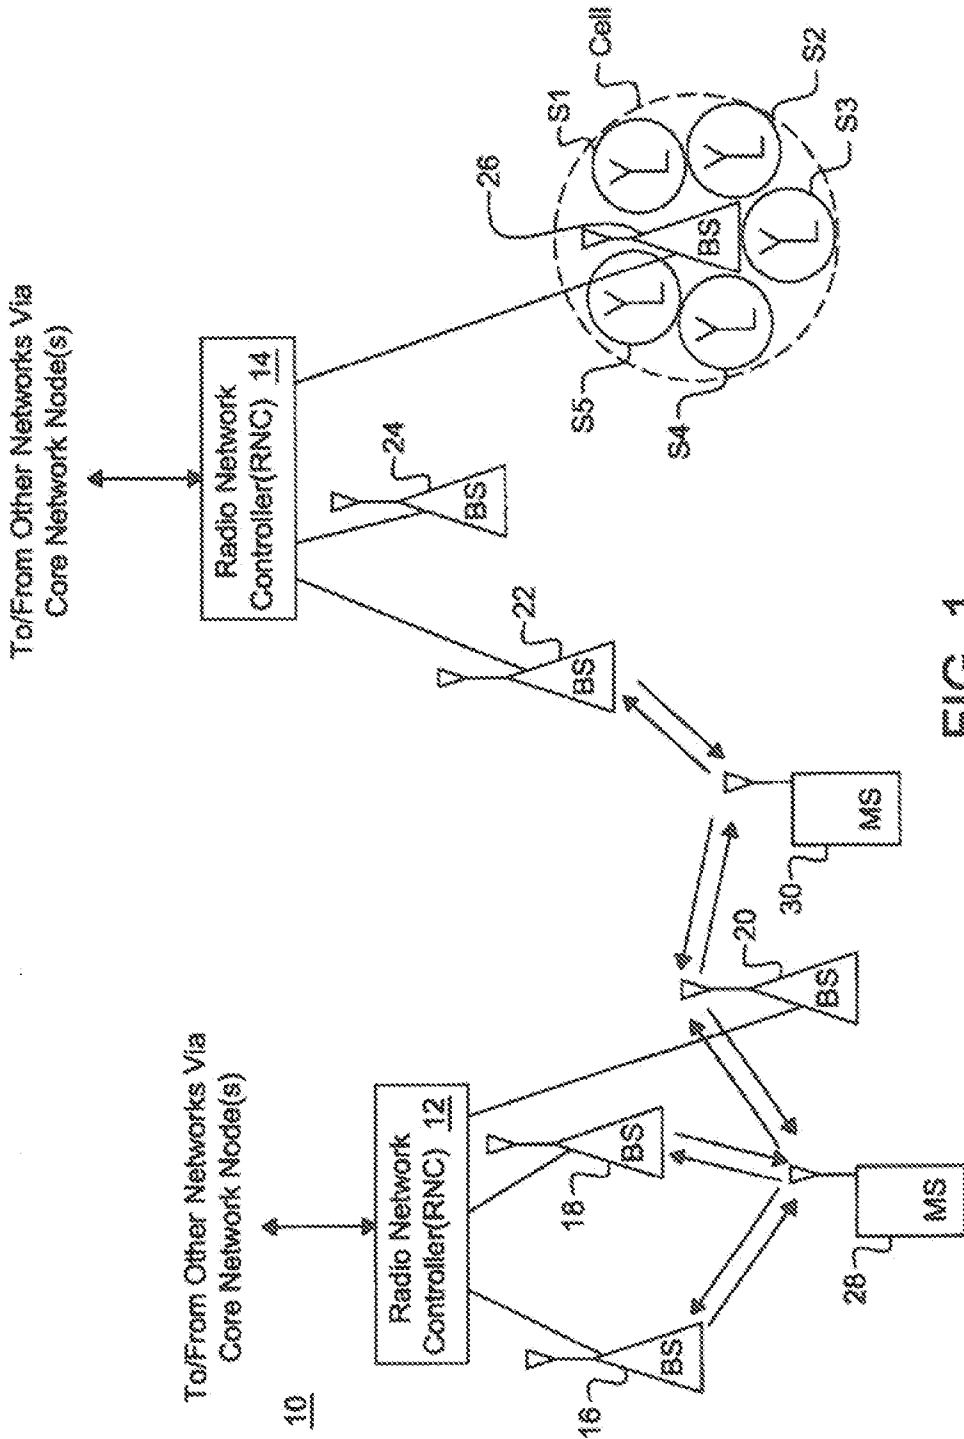


FIG. 1

2/7

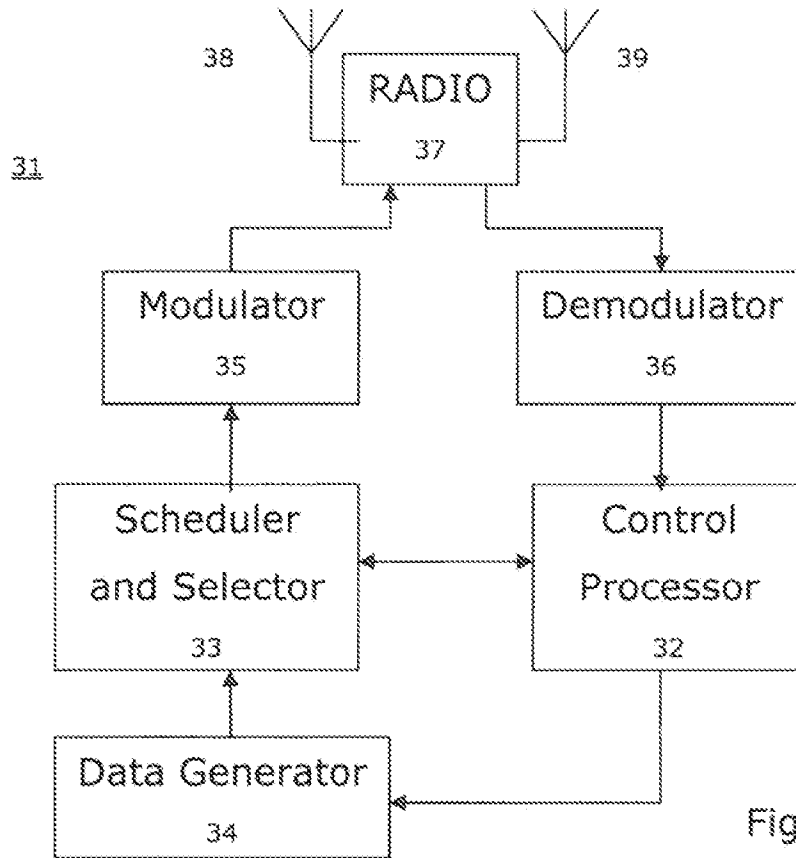


Figure 2

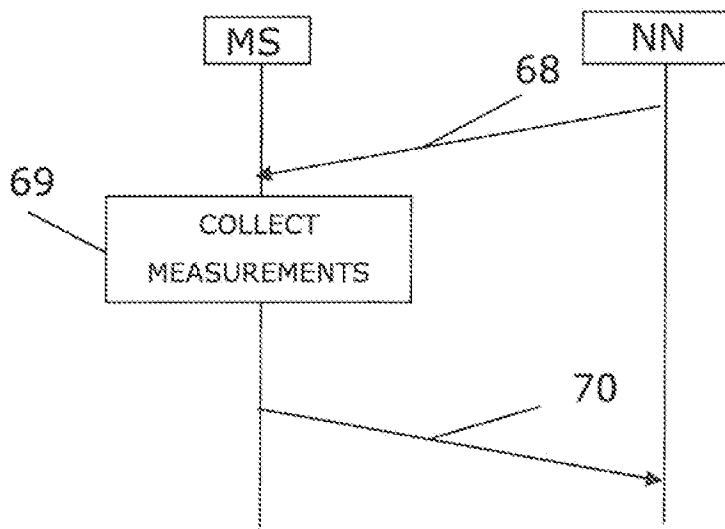


FIG. 4

3/7

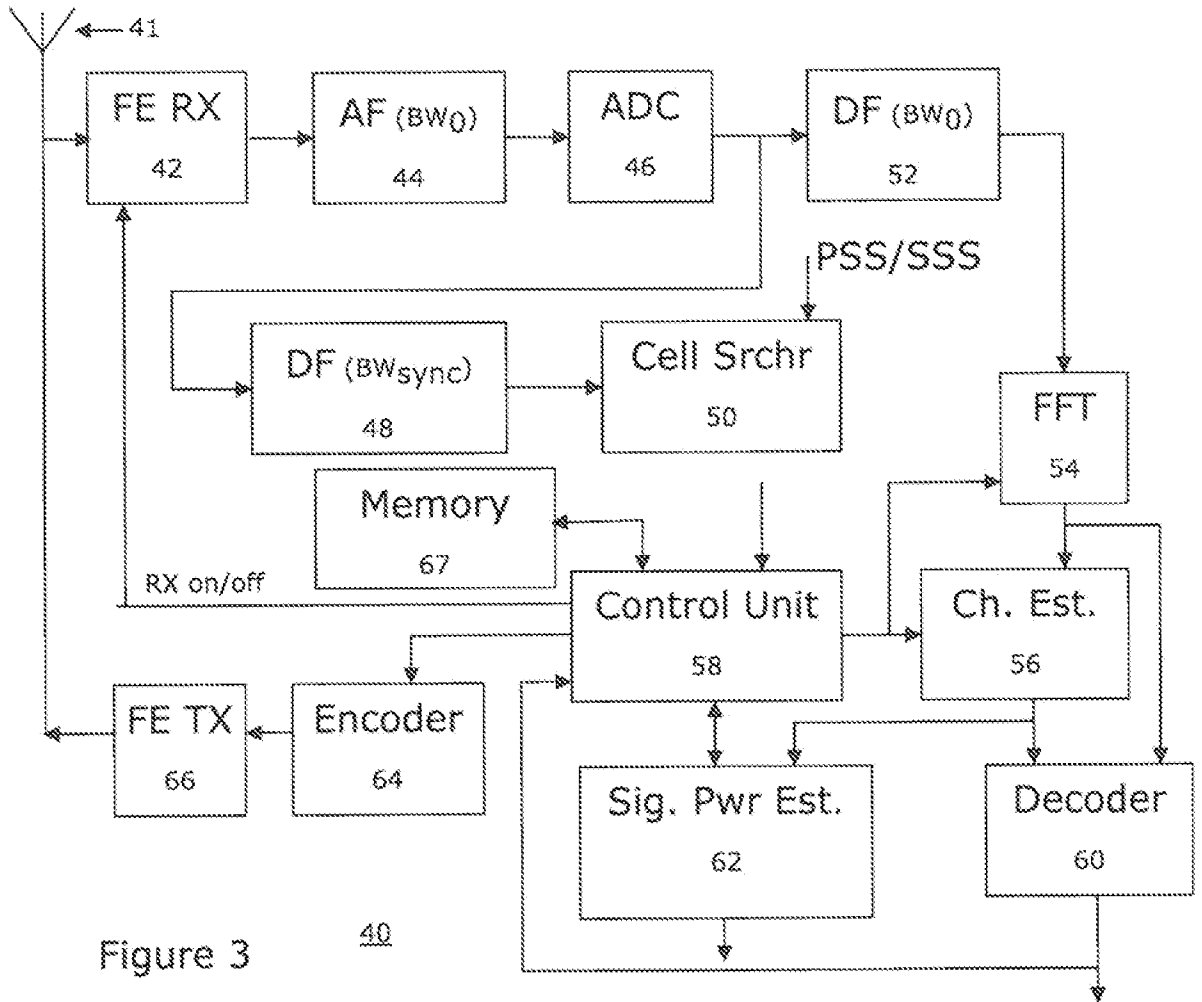


Figure 3

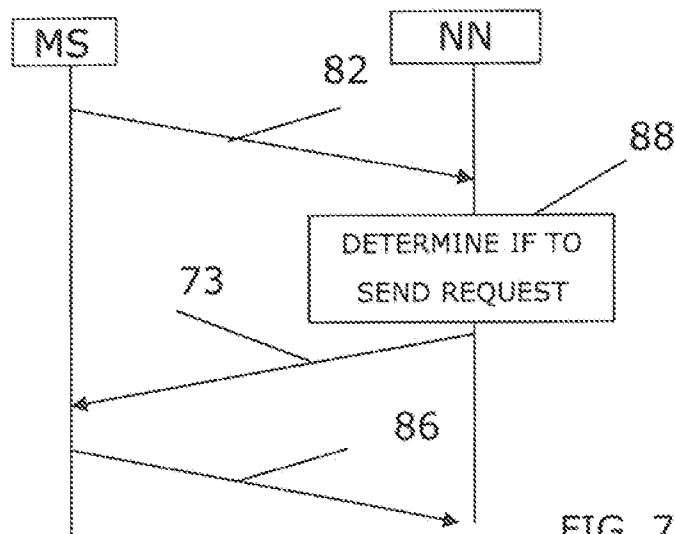


FIG. 7

4/7

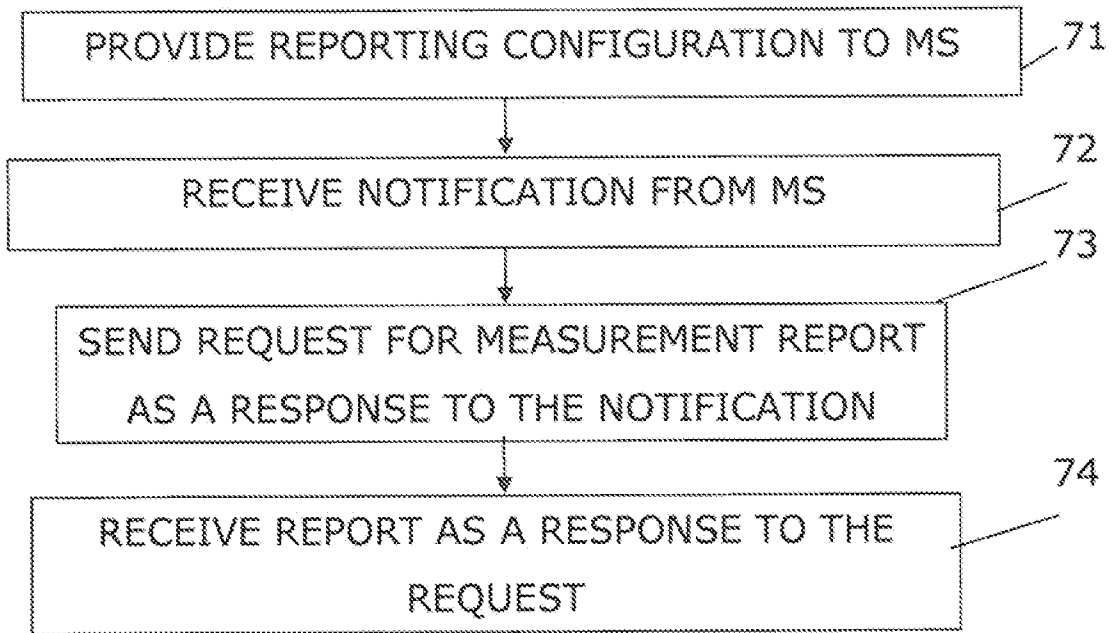


FIG. 5

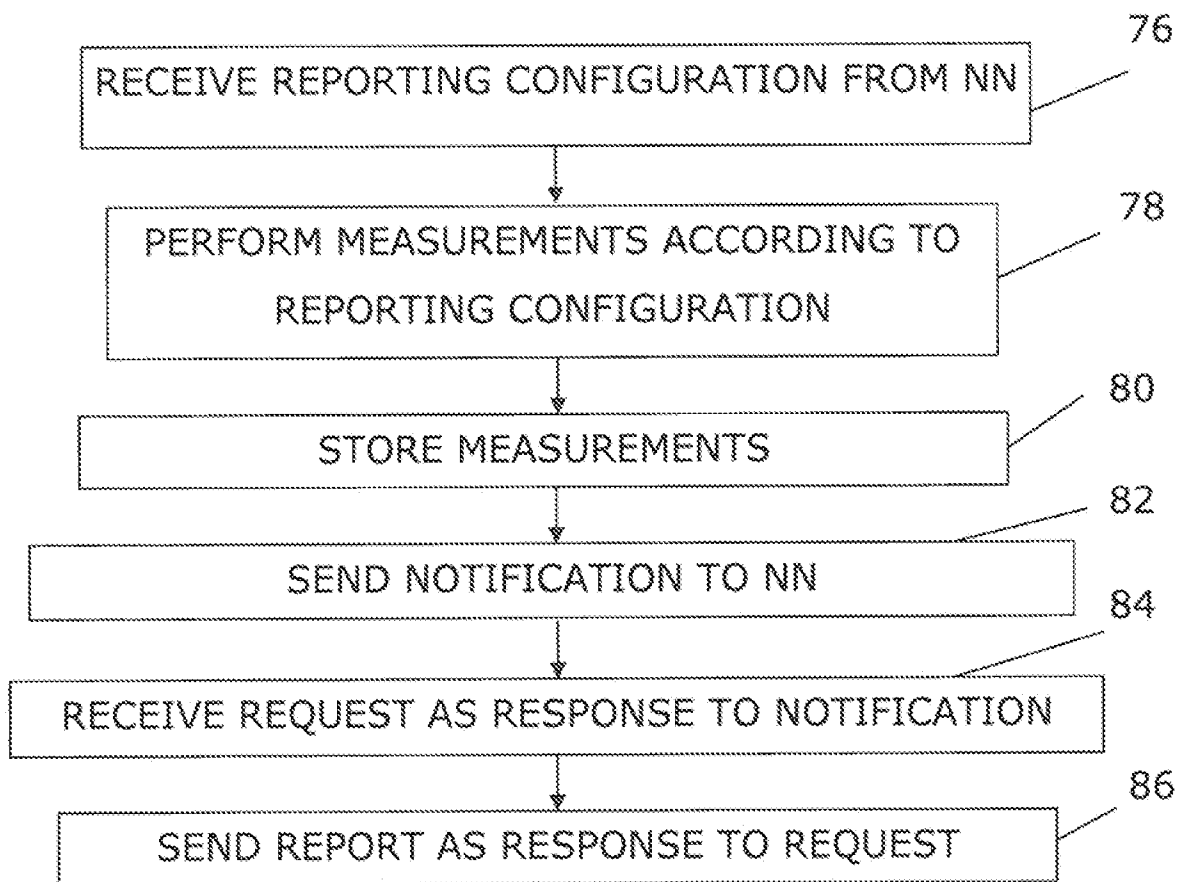


FIG. 6

5/7

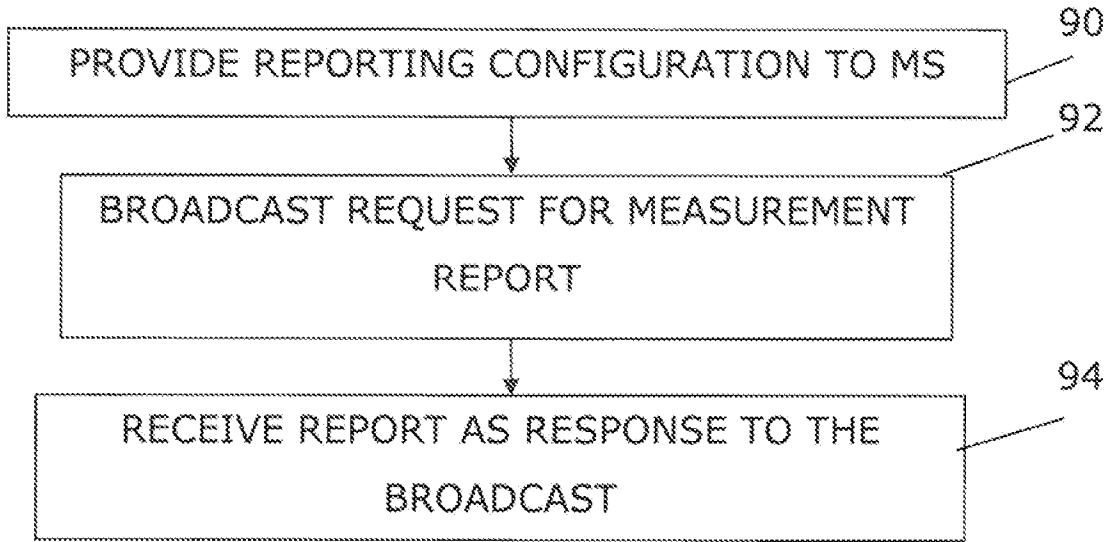


FIG. 8

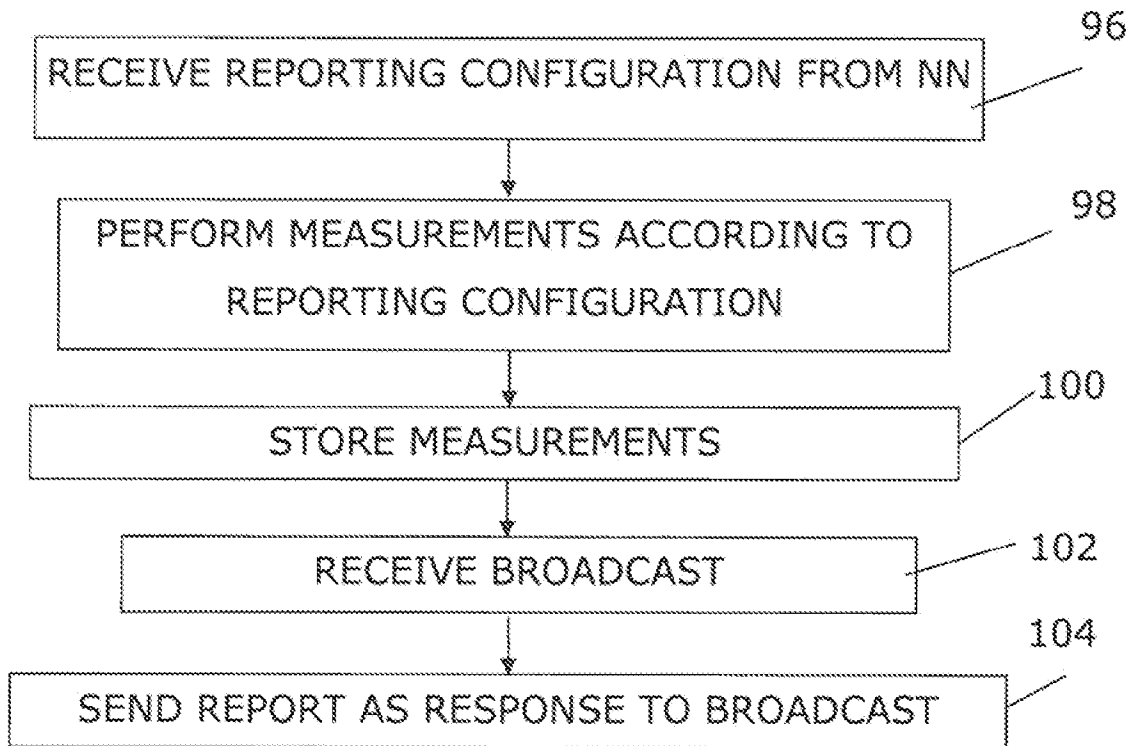


FIG. 9

6/7

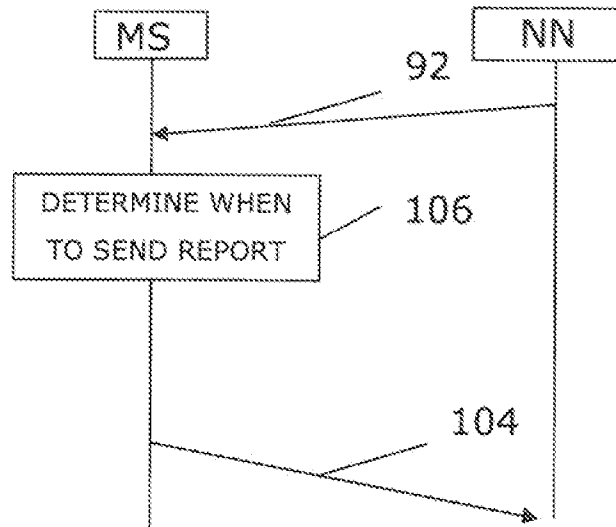


FIG. 10

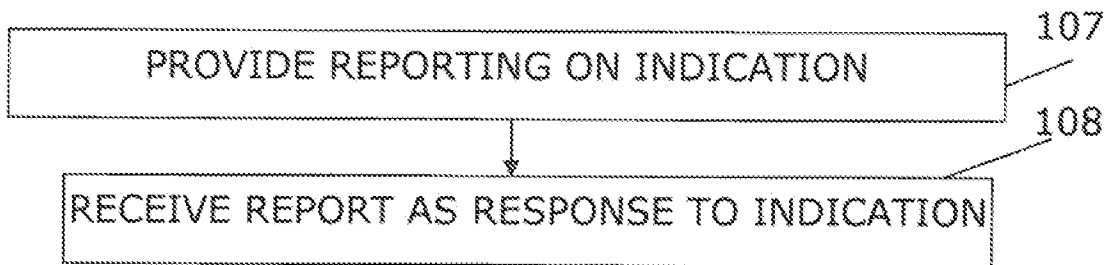


FIG. 11

7/7

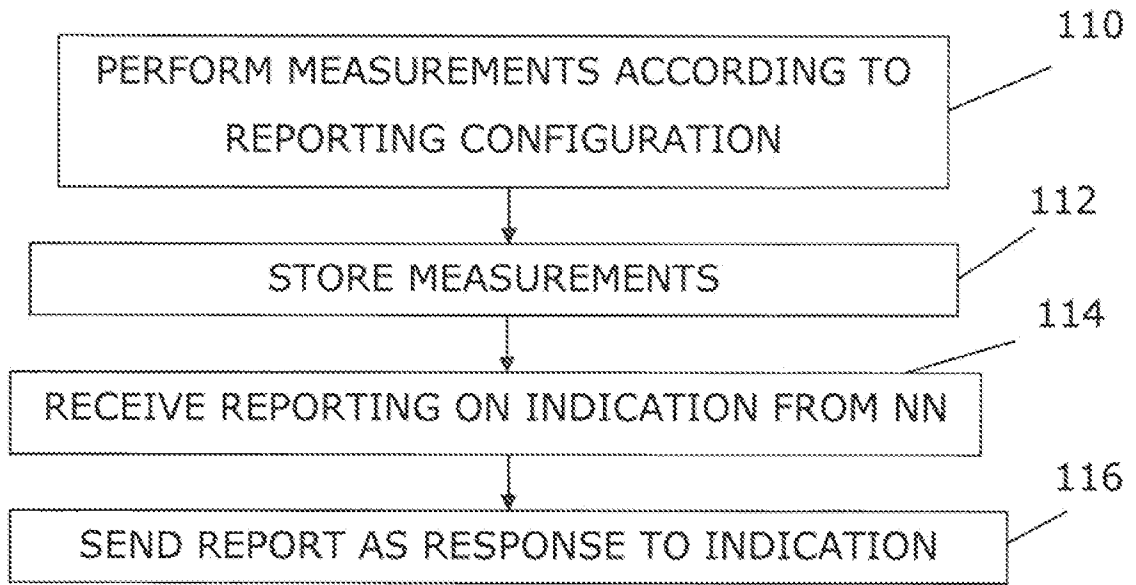


FIG. 12

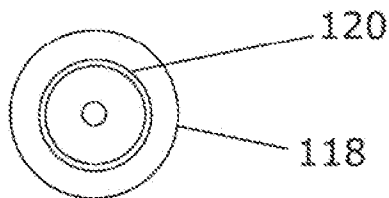


FIG. 13

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2011/052220

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04W24/10
ADD.
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
H04W
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2006/063309 A2 (MOTOROLA INC [US]; DILLON MATTHEW J [US]; HARRIS JOHN M [US]; VOGEDS) 15 June 2006 (2006-06-15)	16-19
Y	abstract page 15, line 15 - page 25, line 3 figures 5,6	1-15
X	ORANGE ET AL: "MDT Measurement Model R2-100239", 3GPP TSG RAN WG2 MEETING 68BIS VALENCIA, SPAIN, 18 January 2010 (2010-01-18), XP002629990,	16-19
Y	the whole document	1-15
	----- -/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search 28 July 2011	Date of mailing of the international search report 04/08/2011
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Hodgins, Will

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2011/052220

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	MOTOROLA: "Triggering of Reporting of MDT Measurements", 3GPP TSG RAN WG2 MEETING 68-BIS, 18 January 2010 (2010-01-18), XP002633874, Valencia, Spain the whole document	1-15
X	----- QUALCOMM EUROPE: "Framework for UE SON Reports", 3GPP TSG RAN WG3& SA WG5,, no. S5-090017, 12 January 2008 (2008-01-12), pages 1-5, XP002588155, the whole document	16-19
A	----- WO 00/70897 A1 (ERICSSON TELEFON AB L M [SE]) 23 November 2000 (2000-11-23) abstract	1-15
A	page 10, line 18 - page 14, line 4 figures 2-5	1-15
X,P	----- ERICSSON: "Triggers for logged MDT measurement reporting R2-101426", 3GPP TSG RAN WG2 MEETING 69 SAN FRANCISCO, USA, 22 February 2010 (2010-02-22), XP002629991, the whole document	1-19
X,P	----- WO 2010/087625 A2 (LG ELECTRONICS INC [KR]; JUNG SUNG-HOON [KR]; CHUN SUNG-DUCK [KR]; YI) 5 August 2010 (2010-08-05) abstract paragraph [0084] - paragraph [0086]; figure 13	1,14-19

INTERNATIONAL SEARCH REPORT

International application No.
PCT/EP2011/052220

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.

2. As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.

3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/EP2011/052220

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2006063309	A2	15-06-2006 US 2006128371 A1	15-06-2006

WO 0070897	A1	23-11-2000 AT 406771 T	15-09-2008
		AU 774570 B2	01-07-2004
		AU 4963500 A	05-12-2000
		BR 0010645 A	19-02-2002
		CN 1371579 A	25-09-2002
		EP 1179273 A1	13-02-2002
		ES 2312342 T3	01-03-2009
		JP 4567210 B2	20-10-2010
		JP 2003500909 A	07-01-2003
		TW 502547 B	11-09-2002
		US 6445917 B1	03-09-2002
		ZA 200109230 A	29-01-2003

WO 2010087625	A2	05-08-2010 US 2010190488 A1	29-07-2010

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 16-19

Method, network node, computer program where the network node sends a reporting configuration notification to a mobile unit for logged measurement reports.

2. claims: 1-15

Method, mobile unit, computer program where the mobile unit sends a notification to a network node that logged measurements are available.
