

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 199717100 B2
(10) Patent No. 719712

(54) Title
Tissue separation cannula with dissection probe and method

(51)⁷ International Patent Classification(s)
A61B 017/32

(21) Application No: **199717100** (22) Application Date: **1997.01.24**

(87) WIPO No: **WO97/26831**

(30) Priority Data

(31) Number **08/593533** (32) Date **1996.01.24** (33) Country **US**

(43) Publication Date : **1997.08.20**
(43) Publication Journal Date : **1997.10.09**
(44) Accepted Journal Date : **2000.05.18**

(71) Applicant(s)
Origin Medsystems, Inc.

(72) Inventor(s)
Albert K. Chin

(74) Agent/Attorney
BALDWIN SHELSTON WATERS, Level 21, 60 Margaret Street, SYDNEY NSW 2000

(56) Related Art
US 4784133
US 5197971




INTER

(51) International Patent Classification 6 :	A1	(11) International Publication Number: WO 97/26831
A61B 17/00		(43) International Publication Date: 31 July 1997 (31.07.97)

(21) International Application Number: PCT/US97/01198	(81) Designated States: AU, BR, CA, JP, KR, MX, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
(22) International Filing Date: 24 January 1997 (24.01.97)	
(30) Priority Data: 08/593,533 24 January 1996 (24.01.96) US	Published <i>With international search report.</i> <i>With amended claims.</i>
(71) Applicant: ORIGIN MEDSYSTEMS, INC. [US/US]; 135 Constitution Drive, Menlo Park, CA 94025 (US).	
(72) Inventor: CHIN, Albert, K.; 2021 Newell Road, Palo Alto, CA 94303 (US).	
(74) Agents: SMITH, Albert, C. et al.; Fenwick & West L.L.P., Suite 700, Two Palo Alto Square, Palo Alto, CA 94306 (US).	

(54) Title: TISSUE SEPARATION CANNULA WITH DISSECTION PROBE AND METHOD

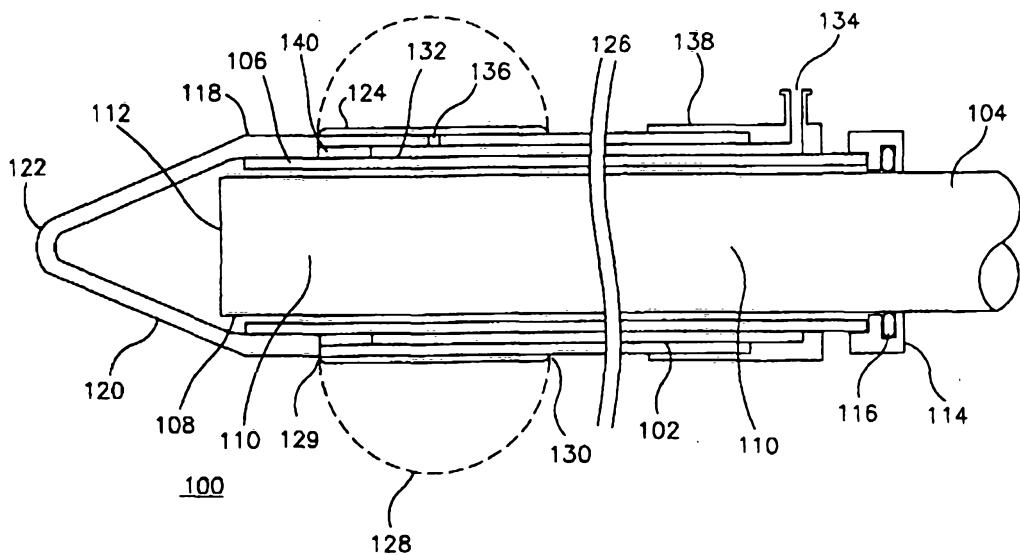

(57) Abstract

A cannula (100) includes a tubular body (102) having a proximal end (104) and distal blunt end (106), at least one lumen (108) extending the length of the body (102), an endoscope (110) having a lighted, viewing end (112) disposed in the lumen (109) near the distal end (106) of the body (102), and a transparent, tissue separating tip (122) substantially covering the distal end of the body. The tissue separating tip (122) is slightly blunted to inhibit avulsion of tissue and lateral vessels along the dissected cavity formed thereby. Endoscopic viewing through the tip is enhanced by tapering the inner walls thereof to a cusp (120) adjacent the blunt tip in order to reduce visual distortion. Alternatively, a cannula includes a dissection probe (907) and endoscope (110) to facilitate viewing and the dissection of connective tissue and lateral vessels along the dissectible cavity.

**TISSUE SEPARATION CANNULA WITH
DISSECTION PROBE AND METHOD
BACKGROUND OF THE INVENTION**

1. Field of the Invention

5 The present invention relates generally to a tissue separation cannula used for forming an elongated cavity in tissue planes particularly along the course of a small blood vessel, and more specifically relates to a cannula having an endoscope for continuously visualizing the blunt dissection site through a tissue separating member which is transparent and has a tapered shape and is selectively removable from the 10 cannula to facilitate dissection of tissue adjacent a blood vessel.

2. Description of Background Art

Present methods for the formation of an elongated cavity involve the use of blunt probes that are pushed through body tissue to accomplish the tissue dissection. The force exerted by the passage of mechanical probes may lead to blood vessel avulsion and 15 trauma to tissue and internal organs.

The problem becomes acute when dissecting and harvesting blood vessels having a small diameter of about 3 to 8 mm. The techniques which are used for dissection of larger blood vessels such as the aorta are not applicable since the aorta is located in the retroperitoneum, bounded by the peritoneum on one side and the psoas muscle on the 20 other side. An evertting balloon placed in the infrarenal space located just below the kidney will track easily down the length of the aorta along a natural cleavage plane when inflated.

An evertting type of balloon encounters difficulties when dissecting tissue adjacent a smaller-diameter vessel. This is due to the presence of less distinct planes that exist 25 between small diameter blood vessels and the tissue that surrounds these vessels, as compared with the aorta and the tissue that surrounds the aorta. For example, if an evertting balloon is placed adjacent to the saphenous vein in the leg, it usually skews dissection upon inflation rather than track along the vein. This is due to



the amorphous nature of the fat and connective tissue that surrounds the saphenous vein.

Everting balloon catheters are known which are used for arterial dilation. (See, for example, U.S. Patent No. 4,479,497 (Fogarty et al., 10/30/84) and U.S. Patent No. 5 4,863,440 (Chin, 9/5/89)).

Double lumen everting balloon catheters, such as those disclosed in the Fogarty et al. '497 and the Chin '440 patents, have a through-lumen that slidably receives an endoscope. However, an endoscope used in conjunction with those disclosed catheters is unable to monitor the dissection process, since the endoscope lies within the central lumen proximal to the everting balloon. As the balloon everts from the catheter, the internal inflation pressure squeezes the walls of the balloon and closes off the distal viewing channel. Also, the area that requires monitoring during balloon dissection is located at the advancing front of the everting balloon. This area corresponds to the balloon/tissue interface that is subject to forces which cause tissue separation. Thus, an endoscope in the central lumen of existing double-lumen, everting balloon catheters is unable to view the area of tissue separation, since a double layer of balloon membrane lies between the endoscope and the tissue and blocks the endoscopic line of sight. This double layer obscures and distorts the viewing area of tissue separation.

Endoscopes have been disclosed for use in optical trocars such as in U.S. Patent No. 5,385,572 (Nobles et al., 1/31/95) and EP 0 642 764 A1 (Sauer et al., published 3/15/95) and in harvesting blood vessels such as in U.S. Patent No. 5,373,840 (Knighton, 12/20/94). The Nobles et al. '572 patent and the Sauer et al. '764 application disclose the use of sharp-tipped, metal cutting elements which extend outwardly from an endoscope positioned in the trocar. Control of the dissection is difficult because visualization of the vessel is obscured by the collapse of the tissue planes into the area between the cutting element and the endoscope. Furthermore, the risk of side vessel avulsion or trauma to the vessel is greatly increased by the orientation of the outwardly extending cutting elements.

The endoscope disclosed in Knighton '840 has a lateral dimension of a size sufficient to accommodate the blood vessel being harvested and at least one tool for use in harvesting the blood harvested. However, the failure of the endoscope to enlarge a cavity adjacent the blood vessel obscures viewing of the dissection area and manipulation of the vessel therein. The position of the viewing image relative to the tissue dissection area could obscure the identification of side vessels leading to an increased risk of vessel avulsion. Since the vessel is retrieved through the center of the endoscope, all side vessels must be severed for the endoscope to advance and the length of the vessel thus retrieved is limited substantially by the length of the body of the endoscope.

An instrument for penetrating body tissue, as disclosed in U.S. Patent No. 5,271,380 (Riek, et al.), is equipped with a tapered tip of transparent material for viewing tissue penetrated by the tip using an optical unit which is positioned behind the tip. An instrument of this type may include a separate illumination channel that ends at the tip
5 for illuminating tissue being penetrated.

SUMMARY OF THE INVENTION

The present invention provides a cannula for bluntly dissecting an elongated cavity in tissue particularly along the course of a vessel in a human or animal body. The cannula includes a tubular body having proximal closed end and distal blunt end and at
10 least one lumen extending the length of the body. The cannula also includes an endoscope having a lighted, viewing end disposed in the lumen near the distal end of the body, and includes a transparent, tissue separating member, or blunt tip, substantially covering the distal end of the body and preferably selectively removable therefrom. The tissue separating member or blunt tip disposed on the distal end of the body includes
15 internal walls that taper to a cusp to reduce visual distortion through the endoscope that is optically aligned with the tip.

A method is also disclosed for bluntly dissecting an elongated cavity particularly along the course of a vessel using a cannula. The method includes the steps of: bluntly dissecting an initial cavity; separating the tissue by advancing the cannula along the
20 cavity with continuous, visual observation; repeating the prior step of separating the tissue at least until the cavity is sufficiently elongated to advance a balloon therein; and successively inflating and deflating a balloon within the cavity to enlarge the cavity along the course of the vessel. Following dissection of the cavity along the vessel, a counterincision is made at the far end of the cavity, for example, to place a second blunt
25 tip balloon trocar and to allow introduction of dissection instruments. The tip of the cannula is advanced out of the body through the counterincision, and the tapered tip is detached leaving the cannula body in the dissected cavity. The endoscope resides inside the cannula body, and the endoscope and cannula body are selectively positioned as a single unit inside the dissected cavity to facilitate isolating and harvesting the vessel.
30 The method further may include removing the cannula, then maintaining the elongated cavity using insufflated gas through a balloon cannula that seals the incisions against gas



leakage, or using a structural balloon, or a mechanical structural support within the dissected cavity.

In another embodiment of the present invention, the method includes the steps of bluntly dissecting an initial cavity; sealing and inflating the cavity; and separating the tissue along the cavity assisted by continuous, visual observation while under inflation until the cavity is sufficiently elongated.

S
S
S
S

S
S
S

S
S
S



The isolated vessel, such as the saphenous vein, may be harvested and removed for use as a coronary artery or peripheral vascular bypass graft, or may be left in place as an in-situ femoropopliteal or femoral-distal graft. The side branches of the vein are ligated, clipped, or occluded in both applications. In the case of an *in-situ* graft, the valves in the 5 vein are disrupted by means of a valvulotome.

According to a first aspect of the invention there is provided a cannula for dissecting an elongated cavity in tissue particularly along a course of a vessel, the cannula comprising:

- 10 a tubular body having a proximal end and a distal end;
- an endoscope having a lighted, viewing end disposed within the lumen near the distal end of the body;
- 15 a transparent tissue separating member substantially covering the distal end of the body and having a conically tapered outer surface converging toward a blunt tip disposed forward of the distal end of the body for directly contacting tissue, the member having substantially rigid and non-collapsible walls and having an internal surface that converges to a sharp point at a location substantially aligned with the viewing end of the endoscope for visualization thereby with reduced distortion through the walls of the member; and
- 20 a balloon attached to an exterior wall of the tubular body of the cannula near the distal end of the tubular body at a location thereon that is remote from the outer surface of the member for selective inflation and deflation of the balloon in response to fluid pressurization thereof through a lumen extending within the tubular body without obstructing visualization through the member via the endoscope by the inflated or 25 deflated balloon.

According to a second aspect of the invention there is provided a cannula for dissecting an elongated cavity in tissue particularly along a course of a vessel, the cannula comprising:

- 1 a tubular body having a proximal end and a distal end;
- 2 at least one lumen extending within the length of the body;



an endoscope having a lighted, viewing end disposed within the lumen near the distal end of the body;

a transparent tissue separating member substantially covering the distal end of the body and having a conically tapered outer surface converging toward a blunt tip disposed forward of the distal end of the body for directly contacting tissue, the member having substantially rigid and non-collapsible walls and having an internal surface that converges to a sharp point at a location substantially aligned with the viewing end of the endoscope for visualization thereby with reduced distortion through the walls of the member being selectively displaceable from the distal end of the body.

10 According to a third aspect of the invention there is provided a cannula for dissecting an elongated cavity in tissue particularly along a course of a vessel, the cannula comprising:

a tubular body having a proximal end and a distal end and a portion that is laterally deflectable, and including a port near the distal end of the body;

15 at least one lumen extending within the length of the body;

an endoscope having a lighted, viewing end disposed within the lumen near the distal end of the body, the endoscope being slidably disposed within the lumen within the body for selectively emerging from the port in response to lateral deflection of the body;

20 a transparent tissue separating member substantially covering the distal end of the body and having a conically tapered outer surface converging toward a blunt tip disposed forward of the distal end of the body, the member being substantially rigid and non-collapsible and having an internal surface that converges to a sharp point at a location substantially aligned with the viewing end of the endoscope.

25 According to a fourth aspect of the invention there is provided a cannula for dissecting an elongated cavity in tissue particularly along a course of a vessel, the cannula comprising:

a tubular body having a proximal end and a distal end and including a port near the distal end of the body;

at least one lumen extending within the length of the body;



an endoscope slidably disposed within the lumen and having a lighted, viewing end disposed within the lumen near the distal end of the body for selectively emerging from the port in response to lateral deflection of the body;

5 a transparent tissue separating member substantially covering the distal end of the body and having tapered outer surfaces converging toward a blunt tip disposed forward of the distal end of the body, the member being substantially rigid and non-collapsible and having an internal surface that converges to a sharp point at a location substantially aligned with the viewing end of the endoscope for visualization thereby through the member with reduced distortion, and the member being selectively displaceable from the 10 viewing end of the endoscope near the distal end of the body in response to lateral deflection of the body.

According to a fifth aspect of the invention there is provided a cannula for dissecting an elongated cavity in tissue, particularly along the course of a vessel, comprising (a) a tubular body having a proximal end and a distal end; (b) at least one 15 lumen extending along the length of the body for receiving therein an endoscope having a viewing end disposed within the lumen adjacent the distal end of the body; and (c) a transparent member substantially covering the distal end of the body and having a tapered outer surface converging toward a blunt tip of the member disposed forward of the distal end of the body, and an opposite internal surface that converges to a point at a 20 location substantially directly behind said blunt tip and in alignment with the viewing end of an endoscope when disposed within the lumen.

Unless the context clearly requires otherwise, throughout the description and the claims, the words 'comprise', 'comprising', and the like are to be construed in an inclusive sense as opposed to an exclusive or exhaustive sense; that is to say, in the sense 25 of "including, but not limited to".



BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 is a partial, longitudinal cross-sectional view of a cannula of the present invention illustrating the profile of a tissue separating member affixed thereto;

FIGURE 2 is an isolated, cross-sectional view of another embodiment of the tissue

5 separating member having a blunt spherical tip with a straight tapered section suitable for use with the cannula of the present invention;

FIGURE 3 is an isolated, cross-sectional view of another embodiment of the tissue separating member having a blunt tip with a curved tapered section suitable for use with the cannula of the present invention;

10 FIGURE 4 is an isolated, cross-sectional view of another embodiment of the tissue separating member having a hemispherical shape suitable for use with the cannula of the present invention;

FIGURE 5 is a flowchart of one embodiment of the method of separating tissue using the cannula of the present invention;

15 FIGURE 6 is a flowchart of another embodiment of the method of the separating tissue;

FIGURE 7 is a partial side view of a patient's leg with the advancement of a flexible cannula of the present invention through an incision;

20 FIGURES 8A AND 8B are partial side sectional views showing alternative embodiments of detachable blunt tips positioned at the distal end of the cannula;

FIGURES 9A AND 9B are pictorial side views showing, respectively, assembled and dissembled configurations of another alternative embodiment of the present invention;

FIGURE 10 is a cross sectional view of cannula of FIGURES 9A and 9B;

25 FIGURES 11A, 11B and 11C are, respectively, side and sectional views of an alternate dissection probe that may be used with the cannula shown in FIGURES 9A and 9B;

FIGURES 11D and 11E are end views of the dissection probe in orbital positions about the cannula body;

30 FIGURES 12A, 12B and 12C are, respectively, simplified anatomical side sectional and front sectional views of the human body;

FIGURES 13A and 13B are side views illustrating, respectively, retracted and extended configurations of another embodiment of the tissue separating cannula of the present invention;

FIGURE 14 is a partial pictorial view of a viewing, multiple-clip applier for use in the method of the present invention;

FIGURE 15 is a flow chart of an artery isolating procedure according to the present invention;

5 FIGURE 16 is a flow chart illustrating the procedures involved with the cannula of FIGURES 9A and 9B; and

FIGURE 17 is a flow chart illustrating the procedures involved with the cannula of FIGURES 13A and 13B.

DESCRIPTION OF THE PREFERRED EMBODIMENT

10 In accordance with one embodiment of the present invention, a cannula includes a tubular body having proximal closed end and distal blunt end, at least one lumen extending the length of the body, an endoscope having a lighted, viewing end disposed in the lumen near the distal end of the body, and a transparent, tissue separating member substantially covering the distal end of the body and selectively removable from the 15 distal end. The present invention also includes methods for using such a cannula for separating tissue to form an elongated cavity along the course of a small blood vessel and subsequently harvesting the blood vessel, or using the blood vessel as an in-situ graft.

FIGURE 1 shows an embodiment of the cannula 100 of the present invention. The 20 cannula 100 includes a tubular body 102 having a proximal end 104 and a distal end 106. At least one lumen 108 extends the length of the body 102. Disposed in the lumen 108 is an endoscope 110 having a lighted, viewing end 112 near the distal end 106 of the body. The other end of the cannula 100 has a proximal end cap 114 and an elastomeric washer 116 that provides a pressure-sealed, sliding fit with the endoscope 110.

25 The cannula 100 also includes a transparent, tissue separating member or blunt tip 118 substantially covering the distal end 106 of the body. The tissue separating member 118 has a tapered section 120 which angles toward a blunt, tissue-separating tip 122 distal to the distal end 106 of the tubular body. The shape of the tissue separating member 118 allowsatraumatic dissection of a cavity with sufficient control and 30 manoeuvrability to prevent tearing or puncturing of the nearby vessel. Typically, the tip 122 has an outer radius of curvature of about .030" (0.76 mm) to about .100" (2.54 mm),

and preferably of about .045 (1.14 mm). The length of the tapered section 120 of the tip is approximately .500" (12.70 mm) in length. The tapered shape and blunt tip of the tissue separating member 118 thus allows deflection of branch vessels to the side of the cannula 100 without their avulsion, upon forward advancement of the cannula 100 with 5 reduced requirement of applied axial force to advance the cannula and tip through tissue being dissected.

In tapers of uniform wall thickness with a rounded inner surface near the apex, it has been found that a small circular spot of distortion exists in the center of the visual field of the endoscope, equivalent to the diameter of the rounded taper tip. This 10 distortion may be substantially eliminated by forming the transparent taper with an inner profile that ends in a sharp point, or apex, while maintaining the outer profile as a rounded tip with approximately a .045" (1.14 mm) radius. Undistorted visual imaging through such tip thus allows the surgeon to track down the vessel, identify side branches, and guide the device past the side branches. An optimal taper length of approximately 15 0.5" (12.70 mm) facilitates cannula manipulation around side branches, and the preferred configuration of the tapered tip is illustrated in FIGURES 8A and 8B.

Alternative embodiments of the present invention include other shapes for the tissue separating member 118 which provide the necessary control and atraumatic dissection. FIGURE 2 illustrates another embodiment of a tissue separating member 218 20 which substantially covers the distal end 106 of the cannula and provides a transparent shield for the endoscope 110. The tissue separating member 218 includes a tapered section 220 integrally formed with a more blunt, spherical section 224 at the distal tip 222 of the tissue separating member.

FIGURE 3 illustrates another embodiment of a tissue separating member 318 25 which substantially covers the distal end 106 of the cannula and provides a transparent shield for the endoscope 110. The tissue separating member 318 includes a curved tapered section 320 integrally formed with a blunt section 324 at the distal tip 322 to form a duck-bill shape. The curved tapered section 320 can have convex or concave shape.

30 FIGURE 4 illustrates another embodiment of a tissue separating member 418 which substantially covers the distal end 106 of the cannula and provides a transparent



shield for the endoscope 110. The tissue separating member 418 has a hemispherical shape 424 covering the distal end 106.

Preferably, the tissue separating members 118, 218 have an overall length of about 0.5 inches (12.70 mm) and a uniform wall thickness of about 0.06 inches (1.52 mm)

5 along the entire surface to allow visualization by the endoscope without distortion of the image that would result if a section of the wall is thickened or otherwise forms a lens. The wall thickness of the tissue separating member may be contoured to form a lens for special applications that require a magnified or otherwise distorted image, e.g. asymmetric, fish-eyed image, or the like, transmitted by the endoscope. Suitable

10 materials for making the tissue separating member or blunt tip include polycarbonate and any material which is sufficiently strong to separate tissue and sufficiently transparent to allow visualization by the endoscope. As illustrated in FIGURES 8A, 8B, 9A and 9B, the tissue separating member or blunt tip may be attached by threads or bayonet-type twist lock to the cannula for selective removal during procedures later described herein.

15 Referring again to FIGURE 1, the cannula 100 preferably includes a balloon 124 located at the distal end 106 on the exterior wall 126 of the cannula. The balloon 124 may be elastic or inelastic, although an elastomeric balloon is preferred because it achieves a smaller, smoother outer profile. Fully inflated (as shown in phantom 128 in FIGURES 1, 8A and 8B), the diameter of the balloon 124 is about 3 cm. Preferably, a

20 sleeve type of balloon 124 has both the distal end 129 and proximal end 130 of the balloon secured to the exterior wall 126 of the cannula.

The balloon 124 is selectively inflated by supplying thereto via another lumen 132 a pressurized fluid, such as a gas or liquid, from an inflation port 134 to a hole 136 in the exterior wall 126 of the cannula between the proximal and distal ends 129, 130 of the balloon to communicate with the interior thereof. A plunger device, such as a manually-operated syringe, is suitable for connecting at the inflation port 134 to control the inflation of the balloon 124. The lumen 132 is formed as another tubular body 138 in a concentric arrangement with the body 102 to form a space 140 between the two bodies. Another embodiment suitable of the present invention may include two lumens 108, 132 in a side-by-side arrangement. Additional lumens can be added in similar manner to provide other functions such as irrigation and aspiration in known manner.

The present invention is illustrated using a sleeve type of balloon with the cannula 100. Other balloon types are suitable for use with the present invention such as, and not limited to, using an invertable balloon positioned in a separate lumen in the cannula to assist in separating the tissue when inflated.

5 The cannula 100 may be manufactured from a variety of bionert, substantially inelastic materials, such as stainless steel, polyethylene, polyurethane, polyvinyl chloride, polyimide plastic, and the like that preferably have a tensile strength of at least 10,000 psi (7×10^6 kg/sq metre). Preferably, each lumen of the cannula 100 has a wall thickness of between about 0.005 inch (0.13 mm) and 0.010 inch (0.25 mm).

10 The endoscope 110 has an outer diameter of approximately 5.0 mm and an endoscope may be permanently built into the cannula 100, or may be a separate device that is advanced through the endoscope lumen 108, for example, through a sliding gas-tight seal 805 configured as shown in FIGURE 8A in conventional manner. The endoscope 110 is positioned within the lumen 108 with the tip in correct position to 15 allow unimpeded visualization through the transparent blunt tip of the surrounding tissue and vessel outside of the cannula 100. A preferred endoscope 110 having a



tubular diameter of about 5.0 mm is commercially available from Solos Endoscopy, Inc., at Norcross, Georgia, although other commercially-available endoscopes 110 as small as 1.00 to 1.75 mm in diameter may also be used.

Methods for bluntly dissecting an elongated cavity using the cannula of the present invention are shown in the flow diagrams of FIGURES 5 and 6. Although the blunt dissection of an elongated cavity along the course of a vessel is specifically described, the present invention is generally suitable for separating any tissue. For example, the cannula may be used to track along the median nerve from an incision at the patient's wrist, forming a cavity for surgical treatment of carpal tunnel syndrome. The cannula allows visualization and tracking of the median nerve, preventing the injury to the nerve which may occur if blind advancement of a balloon cannula were used. Alternatively, the cannula of the present invention may also be used to dissect a cavity adjacent the mammary artery in the manner as later described herein.

The method illustrated in the flow diagram of FIGURE 5 includes the steps of incising the skin and bluntly dissecting 501 through the subcutaneous tissue to the level of the selected vessel or nerve. Blunt dissection is performed to separate the vessel from adjacent tissue for a length of approximately 1 to 2 cm. The blunt dissection may be performed with a pair of curved Metzenbaum scissors, using the tips of the scissors to cut and bluntly spread tissue in a plane between the vessel and the adjacent tissue.

Preferably, a blunt tip balloon cannula is introduced into the space between the vessel and the overlying tissue. The balloon is then inflated to form a gastight seal which seals 502 the dissection. A gas such as carbon dioxide is infused under pressure via another lumen in the cannula having an external opening positioned distal to the balloon. The natural perivascular plane around the vessel is expanded by the injected gas, forming a tract along the course of the vessel. For a superficial vessel such as the saphenous vein, the expanded tract is visible on the surface of the skin. The interior of the expanded tract is not cleanly open but rather, includes gossamer-like strands of connective tissue and fat, preventing unobstructed visualization and making hazardous the passage of an endoscope along the tract adjacent to the vessel. If a conventional endoscope is pushed into this connective tissue in an attempt to form a cavity adjacent to the vessel, the view through the conventional endoscope is blurred by the tissue that contacts the viewing end of the conventional endoscope. A blurred view through the conventional endoscope increases the potential for side branch avulsion during blunt dissection of the perivascular tunnel.

The cannula 100 is inserted 503 into this dissected space. With the fiberoptic endoscope 110 continuously visualizing down the course of the vessel, the cannula 100 separates the tissue by advancing forward 504, probing between the vessel and the adjacent gossamer perivascular tissue in the plane initiated by blunt dissection. The

transparent, tissue separating member 118 allows the endoscope 110 to clearly visualize a segment of the vessel at least equivalent to the length of the tapered section 120.

If the blunt dissection along the course of the vessel is not sufficient to advance the balloon 124 therein, the method returns 505 to the step of advancing the cannula 504 forward to continue the separation of tissue along the course of the vessel. When a cavity of sufficient length has been formed by the cannula 100, the balloon 124 is successively inflated and deflated 506 to enlarge the cavity to about 3 cm in diameter.

The method returns 507 to the step of separating the tissue by advancing the cannula 504 and the step of selectively inflating and deflating 506 the balloon 124, as described above. Successive application of these steps forms a cavity along the entire length of the vessel. Once the elongated cavity is complete, the cannula 100 is completely retracted 508 from the elongated cavity.

The elongated cavity site is then maintained 509 in expanded form in accordance with the method of the present invention. Following use of the cannula 100 to form an elongated cavity along the course of a vessel, the cavity must be supported to allow procedures to be performed on the vessel, such as vessel dissection, grafting of the vessel, or vessel harvesting. A blunt tip trocar may be used to seal the entrance incision and allow gas insufflation to maintain the cavity in expanded form. One blunt-tip balloon trocar suitable for use herein is presently marketed by Origin Medsystems, Inc. of Menlo Park, CA.

Another method of maintaining the cavity in expanded form includes making an incision at the distal extent of the dissected cavity, and inserting a double rod system through the cavity. The double rods are suspended via a laparoscopic mechanical lifting device to maintain the cavity. This system allows instruments to be advanced into the cavity via simple incisions, without the requirement for trocars with gas sealing valves, as is the case with gas insufflation.

Alternatively, an inflatable structural balloon or mechanical structure may be used to support the dissected cavity. For example, the cavity may be maintained by mechanical retraction or by a mechanical finger-like retractor attached to a powered lifting arm plus a separate flat balloon retractor used to displace the side wall of the cavity. The endoscope 110 may be introduced behind the legs of the finger-like retractor that connect to the mechanical lifting arm.

The vessel is completely dissected within the formed cavity, using laparoscopic instruments such as graspers, scissors, hooks, and blunt probes. Side branches to the vessel may be ligated using suture ties, clipped using titanium vessel clips, cauterized using electrocautery, or a combination of these procedures. The dissected vessel is

removed from the cavity for possible use as a conduit for an arterial bypass procedure, or the vessel may be left in place to be used as an in-situ bypass graft.

In an alternate embodiment, the method of the present invention forms a small diameter cavity, about 7 mm, along the entire length of the vessel before the cavity is 5 then enlarged. As illustrated in FIGURE 5, the steps of making a blunt dissection 501, sealing and inflating the dissection 502, inserting 503 the dissection cannula 100 and successively separating the tissue by advancing 504 the cannula 100 are performed as described above. The alternate method, however, continues advancing 504 the dissection cannula until the entire length of the elongated cavity is bluntly dissected to 10 the small diameter of about 7 mm.

Only after the entire length of the elongated cavity has been bluntly dissected does the alternate method include the step of inflating and deflating 506 the balloon 124 of the cannula to increase the diameter of the distal end of the elongated cavity to about 15 3 cm. The dissection cannula 100 is then retracted 508 partially by about the length of the balloon 124. The alternate method then returns 510 to the steps of inflating and deflating 506 the balloon 124. The cannula 100 is again retracted 508 partially and the method returns 510 to repeating the above steps until the entire length of the elongated cavity has been enlarged to the diameter of the inflated balloon 124 which is typically about 3 cm.

20 An alternate method involves making an incision down to the vessel. Blunt dissection of the vessel from the adjacent tissue is performed for a 3-4 cm length. A blunt tip trocar is placed in the incision, and gas insufflation is initiated.

The cannula 100 is inserted through the blunt tip trocar, and blunt dissection using the balloon 124 is performed under the presence of gas insufflation in the cavity. 25 This technique provides a larger cavity for visualization during separation of the tissue, since gas insufflation is used from the onset of blunt dissection. However, a gas sealing blunt tip trocar is required. If vessel dissection without gas insufflation is conducted, and a double rod system is used to maintain the cavity, then the use of a blunt tip trocar may be avoided.

30 Another method of the present invention forms a small diameter cavity along the entire length of the vessel. The cavity is enlarged only by the initial inflation at the blunt dissection site. As illustrated in FIGURE 6, the steps of making a blunt dissection 601, sealing and inflating the dissection 602, inserting 603 the cannula 100, and successively separating the tissue by advancing 604 the cannula 100 are performed as 35 described above. The cannula advances 604 until the entire length of the elongated cavity is bluntly dissected and expanded only by the inflating gas of the prior step 602.

The cannula 100 is then retracted 605 entirely from the elongated cavity. The dissection site is maintained 606 in expanded form as described above.

The present invention includes methods particularly useful for harvesting vein. In one method, an incision is made near the ankle, and the cannula is passed along the 5 saphenous vein up to the knee, or near the knee. Following balloon inflation to enlarge this segment, an incision is made into the dilated cavity near its endpoint at the knee. The incision at the knee is the approximate mid-point of the saphenous vein between the ankle and the groin. The vein is isolated and the side branches ligated in this segment between the ankle and the knee to harvest and remove this segment.

10 The segment from the knee to the groin is then harvested. The cannula may be passed from the same knee incision used for harvesting the vein from the lower leg, or a separate incision down to the vein may be made slightly above the knee. Use of a separate incision may be useful if the vein is overly curved or tortuous as it passes around the knee. The cannula is advanced toward the groin, the balloon is inflated to 15 dilate the cavity, an incision is made into the dilated cavity at its groin end, and the portion of the saphenous vein residing in the thigh is harvested.

As an alternate method for saphenous vein harvesting, the initial incision may be made at the knee. The cannula is passed successively in both directions, toward the 20 ankle and toward the groin, from the same incision. Then additional incisions are made at the ankle and at the groin to allow harvesting of the entire length of the saphenous vein. The vein may be removed as a single strand, or it may be cut at the knee and removed as two strands.

In some anatomic regions, it may be difficult to advance a rigid, straight tissue separation device along the course of a vessel. For example and referring to FIGURE 7, if 25 the saphenous vein 700 is harvested by passing the cannula 702 from an incision 712 just above the ankle, the presence of the medial malleolus 704 and the foot 706 may prevent an otherwise rigid cannula from being angled upwards or sideways to follow the vein 700.

For such obstructed situations, the cannula 702 may be formed with a body 30 which is flexible or otherwise malleable, or is rigid with a pre-determined gradual arc, as shown in FIGURE 7. The endoscope 708 that is inserted into the cannula 702 up to the tissue separating member 710 must also be flexible to facilitate shaping the flexible body within the curved cannula. Such conventional flexible fiberoptic endoscopes are commercially available for use in gastrointestinal endoscopy.

35 In other embodiments of the method, and of the apparatus illustrated in FIGURES 8A and 8B, the tapered and transparent tip 803 of the cannula 800 may be removably attached to the body of the cannula. At the cannula insertion site, a blunt tip balloon

trocar (for example, as commercially available from Origin Medsystems, Inc.) is placed to seal an incision and allow insufflation into the space to be dissected by the cannula 800 which is advanced through the blunt tip trocar along the course of the vessel. The balloon on the cannula is selectively inflated to dissect a perivascular cavity. Following 5 dissection of the cavity along the vessel, a counterincision is made at the far end of the cavity to place a second blunt tip balloon trocar and allow introduction of dissection instruments. The tip of the cannula is advanced out of the body through the counterincision and the tapered tip 803 is detached, leaving the cannula body in the dissected cavity. The endoscope resides inside the cannula body, and the 10 endoscope/cannula body is advanced as a single unit inside the working cavity to isolate and harvest the vessel.

The detachable tip 803 may be attached to the cannula body 800 using a threaded connection between the tip and the distal end of the cannula body, or a bayonet-type of fitting may be used to lock the tip onto the cannula, with a slot in the tip engaging a pin 15 on the end of the cannula body.

The cannula of this embodiment with a detachable tip 803 has the advantages compared with the embodiment of the cannula described with reference to FIGURE 1 that the 5mm diameter endoscope used with the cannula often does not have sufficient rigidity to allow it to be directed along the dissected working cavity for unobstructed 20 visualization. For example, in the lower leg, the curvature of the calf muscle impedes visualization along the surgical cavity, and the endoscope must deflect muscle tissue to allow it to view down the bore of the cavity. Flexion of the endoscope which is about 45cm long and about 5mm diameter may prevent successful visualization. The cannula which surrounds the endoscope according to the present invention has an 8mm outer 25 diameter, and this larger diameter imparts rigidity to the endoscope/cannula system. The cannula body may be constructed of stainless steel for additional rigidity.

Also, the ability to remove the tapered tip 803 via an incision at the opposite end of the cavity results in a decreased number of passes of the cannula and endoscope up and down the length of the cavity. This adds to the convenience of the procedure, and 30 decreases the potential for vessel injury by decreasing the number of full length passes required through the dissected cavity.

Referring now to FIGURES 9A and 9B, retracted and dissembled configurations of another embodiment of the cannula 900 of the present invention are illustrated. Specifically, the outer body of the cannula 900 includes a sleeve-type balloon 901 35 secured to the body at proximal and distal ends thereof, as illustrated in FIGURES 8A and 8B, for selective inflation via a lumen 1010 within the body that communicates therewith, as illustrated in the sectional view of FIGURE 10.

At the distal end of the body of the cannula 900, a detachable, transparent blunt tip 903 is shown in FIGURE 9A retracted onto the distal end of the cannula body, and is shown in FIGURE 9B mounted on push rod 906 and extended beyond the distal end of the cannula body 900 to expose the viewing end 905 of an endoscope, and a crescent-shaped dissection probe 907. The probe 907 is mounted on shaft 909 to facilitate selective manipulation of the dissection probe 907 within the field of view of the endoscope 905. As shown in FIGURE 10, the push rod 906 may be non-circular within a mating non-circular lumen to retain the blunt tip 83 in axial alignment as it is selectively extended and retracted relative to the distal end of the cannula body 900. Also as shown in FIGURE 10, the shaft 909 for supporting the dissection probe 907 may be circular or cylindrical to facilitate both longitudinal and rotational positioning of the dissection probe 907 via corresponding manipulations of the shaft 909 at the proximal end of the cannula body 900. Alternatively, the shafts 906 and 909 may reside in slots of suitable sectional shapes along the outer surface of the cannula body 900, with an encircling sheath of heat-shrinkable PET plastic, or other biointerfacing plastic, to retain the shafts 906, 909 in captivated orientation along the cannula body 900.

The dissection probe 907 has leading and trailing edges thereof to facilitate selective dissection of strands of connective tissue and lateral branch vessels along the saphenous vein, or other vessel, to be harvested. The blunt tip 903 may thus be selectively extended beyond the cannula body 903 (or the cannula body 900 may be retracted relative to the tip 903) to expose the dissection probe 907 at a selected location along a dissected cavity adjacent a vessel being harvested. Selective translational and rotational manipulations may be achieved via similar manipulations of the shaft 909 at the proximal end thereof to dissect connective tissues and lateral branch vessels along the course of the vessel being harvested. The dissection probe 907 and the blunt tip 903 may then be retracted into axial alignment with the cannula body 900, as shown in the retracted configuration of FIGURE 9A. Surgical procedures involving the cannula 900 of FIGURE 9A are described later herein with reference to the flow chart of FIGURE 16.

Referring to the side and sectional views of FIGURES 11A, 11B, and 11C, the dissection probe may be formed in separate, spiral-like segments 1101, 1103 that are axially spaced along the supporting shaft 909, for example, in the illustrated configuration, to provide greater convenience in selectively bypassing or dissecting connective tissue and lateral branch vessels along the course of a vessel being harvested. Thus, as shown in FIGURES 11D and 11E, the dissection probe 907 (or 1101 and 1103) may be orbited about the axis of shaft 909, and the cannula body 900 may be rotated on its longitudinal axis to facilitate the dissection of the vessel away from connecting tissue, and the traversal of side-branch vessels.

Referring now to FIGURES 12A and 12B, the simplified side and frontal illustrations of the human anatomy disclose another operating environment for the apparatus and method of the present invention, for example, in preparing the internal mammary artery for coronary artery bypass. Specifically, the combined blunt tip cannula and dissection probe of the present invention permits a working cavity to be formed along a vessel, and the vessel to be dissected and isolated, or otherwise manipulated as later described herein, via a single incision. This decreases the number of incisions required to harvest a vessel. The cannula and dissection probe of the present invention facilitate harvesting the internal mammary artery in the chest wall to enable its use as a coronary artery bypass graft. The internal mammary artery may be harvested via a single subxiphoid incision, with the rectus muscle bluntly dissected to expose the superior epigastric artery. The cannula tracks along the superior epigastric artery which leads directly to the internal mammary artery that lies behind the ribs lateral to the sternum. The internal mammary artery is dissected substantially in the manner as previously described up to its origin at the subclavian artery. Its side branches are clipped and transected, and distally, it is transected to yield a free end which is anastomosed to the coronary artery to complete the bypass.

As illustrated in FIGURES 12A, 12B and 12C, the internal mammary artery (also known as the internal thoracic artery) runs internal to the costal cartilages, lateral to the sternum, descending to the interval between the sixth and seventh cartilages where it bifurcates into the superior epigastric artery and the musculophrenic artery. The superior epigastric artery lies within the rectus sheath. In its superior portion, it lies behind the rectus abdominis muscle. The superior epigastric artery eventually anastomoses with the inferior epigastric artery.

Since the superior epigastric artery lies in the abdominal wall within the rectus sheath, it may be easily found, for example, using Doppler ultrasound, and isolated via incision of the skin and blunt spreading of the rectus abdominis muscle overlying the artery. The blunt tip, visual balloon dissection cannula previously described herein may be placed next to the isolated section of superior epigastric artery, and passed superiorly, following the course of the superior epigastric artery to its junction with the internal mammary artery. An endoscopic working cavity may be formed along the length of the internal mammary artery in the manner previously described herein, allowing side branch identification and interruption, and using vessel clips or bipolar electrocautery closure followed by scissor transection. The dissected portion of the internal mammary artery may then be used to revascularize diseased coronary arteries, facilitated by the availability of the endoscopic working cavity thus formed along the internal mammary artery.

This abdominal approach to internal mammary artery dissection is preferable to a supraclavicular approach or an intercostal approach since the supraclavicular approach is impeded by the presence of the subclavian artery and the aortic arch, and dissection risks trauma to these vessels. In contrast, the intercostal approach gives 5 limited exposure, unless rib spreaders are used, and only a small portion of the internal mammary artery is accessible from the side. The abdominal approach described herein thus allows the entire length of the internal mammary artery to be exposed. By initiating the dissection at the level of the superior epigastric artery, no vascular or bony structures are present to impede the passage of the dissection cannula of the present 10 invention, thereby resulting in a safer approach to the internal mammary artery.

Specifically, with reference to the flow chart of FIGURE 15, the method of creating a working space along the superior epigastric artery according to the present invention includes forming an incision 1501 of the skin and blunt dissection 1503 and spreading of the rectus abdominus muscle overlying the artery. The balloon cannula as illustrated in 15 figures 1, or 8A, 8B, or 9A, 9B, 13A, 13B is inserted in the bluntly dissected cavity next to the isolated section of the superior epigastric artery. The cannula is advanced 1505 along the course of the superior epigastric artery and the internal mammary artery by the iterative sequence of advancing the cannula, visualizing dissection of tissue through the transparent tip until resistance to tissue penetration is felt. The balloon is inflated to 20 expand the cavity around the cannula adjacent the artery, and then deflated, and the cannula is again advanced, and retracted and diverted and advanced as required to properly track the course of the vessel substantially to its junction with the subclavian artery. The tunnel or cavity thus formed along the artery facilitates side branch identifications for subsequent operative procedures, and in one embodiment of the 25 process invention the cannula may be completely removed 1507 from the working cavity thus formed by successively inflating and deflating the balloon to establish an adequate working cavity as the cannula is completely withdrawn therefrom.

Next, the artery may be dissected from the cavity wall by placing 1509 a blunt tip trocar in the working cavity at the abdominal incision, and the associated balloon is 30 then inflated. The cannula of the present invention including the dissection probe and an endoscope positioned 1511 within a lumen of the cannula is positioned in the working cavity through a gas tight port of the trocar, with the dissection probe positioned about the artery. The dissection probe is now translated and rotated 1513, as illustrated in Figures 11D and 11E to free the artery from connective tissue. The axial 35 opening 908 in the perimeter of the dissection probe facilitates passing over lateral branch vessels encountered along the course of the artery being isolated. When the artery and side branches are completely free of connecting tissue, the cannula with endoscope and dissection probe is removed 1515 from the working cavity.

Thereafter, a viewing, multiple-clip applier, as illustrated in FIGURE 14, including a clip applier 1401 and an endoscope 1403, and having a circular cross section may be inserted 1517 through the trocar port for placing two surgical clips on each side branch of the isolated artery 1519, spaced sufficiently to divide the branch vessel therebetween.

5 After all side-branch vessels are clipped in this manner, the viewing, multiple-clip applier is completely removed 1521. Alternatively, a two-port, trocar gas seal may be attached to the blunt tip trocar and an endoscope may be inserted through one port with a clip applier or electrocauterizer inserted through the other port for clipping or otherwise occluding the side-branch vessels. The two-port seal for the blunt tip trocar

10 facilitates removal of only the clip applier and replacement thereof by scissor blades that can be manipulated proximally to cut and divide 1523 each of the side branch vessels between the clips that were previously placed or through electrocauterized segment that was prepared while viewing through the endoscope 1403. Thereafter, the scissor blades may be removed, and the internal mammary artery thus isolated may

15 then be used to revascularize diseased coronary arteries 1525, for example, by grafting a transsected free end of the isolated internal mammary artery to the left anterior descending coronary artery downstream of a significant stenotic occlusion.

Referring now to FIGURES 13A and 13B, there are shown side views of retracted and extended configurations of another embodiment of the dissection cannula according to the present invention. This embodiment includes a blunt, tapered tip 1301 which deflects to one side of the endoscope 1303 to allow visualization outside of the cannula 1300 during vessel dissection and isolation. The dissection probe 1305 may reside adjacent to the cannula body 1300, proximal to the tapered tip 1301, and extend forward to dissect around the vessel being harvested and its side branches. The dissection probe shaft 1307 may run through a separate lumen in the cannula body 1300. The cannula body 1300 may contain an intrinsic curvature, and contain a port 1309 on the side of the cannula body near the tip, for exit of the endoscope 1303. The cannula body which has a normally curved configuration, straightens out upon introduction of a rigid, straight endoscope 1303. Partial retraction of the endoscope 1303 allows the cannula to curve, and the endoscope is advanced through the side port 1309 in the cannula body 1300 to view outside of the deflected cannula tip 1301.

A surgical procedure involving the cannula 1300 shown in Figure 13 is illustrated in the flow chart of FIGURE 17. Specifically, an initial incision and blunt dissection is performed 1701 to prepare an initial dissected cavity. The cavity may then be sealed 35 1703 in conventional manner and inflated 1705 to facilitate insertion of the cannula 1300 that is inserted into the cavity 1707 through a conventional gas-tight seal. The cannula is advanced 1709 and a perimeter balloon 128 on the cannula is inflated 1711 to expand the dissected cavity, and is then deflated to facilitate further advancement of the

cannula and reinflation of the balloon. This sequence is repeated 1712, 1713 until the dissected cavity of sufficient size or length is formed along the vessel of interest. The dissected cavity is maintained 1715 by insufflation or mechanical traction or otherwise, as previously described, and the cannula may be retracted 1717 to a selected location in

5 the cavity at which the endoscope 1303 may be retracted 1719 relative to the body of the cannula 1300 in order to permit deflection of the blunt tip 1301 away from the tip of the endoscope, as shown in FIGURE 13B. Thereafter, the endoscope 1303 may be extended 1721 to view past the blunt tip 1301, and the dissection probe 1305 may also be extended 1723 and manipulated within the dissected cavity to dissect the vessel of

10 interest 1725 from remaining connective tissue.

Referring now to the flow chart of FIGURE 16, a surgical procedure involving the cannula 900 shown in FIGURE 9A includes making an initial incision and blunt dissection 1601 to form an initial dissected cavity. The cavity may then be sealed 1603 in conventional manner and inflated 1605 to facilitate insertion 1607 of the cannula 900

15 into the cavity through a conventional gas-tight seal. The cannula 900 is advanced 1609 and a perimeter balloon 901 on the cannula is inflated 1611 to expand the dissected cavity, and is deflated to facilitate further advancement of the cannula, and reinflation of the balloon. This sequence is repeated 1612, 1613 until the dissected cavity of sufficient size or length is formed along the vessel of interest. The dissected cavity is

20 maintained 1615 in a manner as previously described, and the cannula 900 may be retracted 1617 sufficiently within the dissected cavity to facilitate detaching and/or extending 1619 the blunt tip 903 and facilitating extension 1621 of the dissection probe 907. One or more of the steps 1617, 1619, and 1621 may be repeated while dissecting connecting tissue 1623 to harvest the vessel of interest.

25 Therefore, the cannulas and dissection probes and associated surgical procedures facilitate blunt dissection of a working cavity along a vessel of interest, with visualization of the tissue being dissected through a blunt tip of transparent material and selected optical configuration positioned on the forward end of the cannula. Selective remote deployment and remote manipulation of a dissection probe carried on

30 the cannula facilitates dissection of tissue around the vessel of interest and around side branch vessels along the vessel of interest being harvested from within and along the working cavity of dissected tissue.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:-

1. A cannula for dissecting an elongated cavity in tissue particularly along a course of a vessel, the cannula comprising:
 - a tubular body having a proximal end and a distal end;
 - 5 at least one lumen extending within the length of the body;
 - an endoscope having a lighted, viewing end disposed within the lumen near the distal end of the body;
 - a transparent tissue separating member substantially covering the distal end of the body and having a conically tapered outer surface converging toward a blunt tip disposed
 - 10 forward of the distal end of the body for directly contacting tissue, the member having substantially rigid and non-collapsible walls and having an internal surface that converges to a sharp point at a location substantially aligned with the viewing end of the endoscope for visualization thereby with reduced distortion through the walls of the member; and
 - 15 a balloon attached to an exterior wall of the tubular body of the cannula near the distal end of the tubular body at a location thereon that is remote from the outer surface of the member for selective inflation and deflation of the balloon in response to fluid pressurization thereof through a lumen extending within the tubular body without obstructing visualization through the member via the endoscope by the inflated or
 - 20 deflated balloon.
2. A cannula according to claim 1 in which the outer surface of the tissue separating member forms a tapered outer surface converging toward a blunt tip having a radius of curvature substantially in the range of from approximately .030 inches (0.76 mm) to approximately .100 inches (2.54 mm).
- 25 3. A cannula according to claim 2 in which the outer surface of the tissue separating member forms a blunt tip having a radius of curvature of approximately .045 inches (1.14 mm).
4. A cannula for dissecting an elongated cavity in tissue particularly along a course of a vessel, the cannula comprising:
 - a tubular body having a proximal end and a distal end;
 - at least one lumen extending within the length of the body;



an endoscope having a lighted, viewing end disposed within the lumen near the distal end of the body;

a transparent tissue separating member substantially covering the distal end of the body and having a conically tapered outer surface converging toward a blunt tip disposed forward of the distal end of the body for directly contacting tissue, the member having substantially rigid and non-collapsible walls and having an internal surface that converges to a sharp point at a location substantially aligned with the viewing end of the endoscope for visualization thereby with reduced distortion through the walls of the member and the member being selectively displaceable from the distal end of the body.

5. 5. A cannula according to claim 4 in which the tissue separating member rotatably attaches to the distal end of the body for selective rotational detachment of the member from the body.

6. 6. A cannula according to claim 4 in which the member is supported on a shaft mounted in the body for selective movement thereof relative to the body for selectively 15 positioning the member remote from the distal end of the body.

7. 7. A cannula according to claim 6 in which the member is supported on the shaft for translational movement thereof relative to the distal end of the body in response to manipulation of the shaft near the proximal end of the body.

8. 8. A cannula according to claim 4 including a dissection probe mounted for 20 movement relative to the body and being disposed therein to emerge from the port distal of the endoscope in response to lateral deflation of the body.

9. 9. A cannula according to claim 6 including a dissection probe mounted within the body for selective movement relative thereto and for exposure upon movement of the member relative to the distal end of the body.

25 10. A cannula according to claim 9 including the dissection probe and the member mounted on shafts oriented along the length of the body to the proximal end thereof to facilitate manual manipulation thereof for selectively moving the probe and member relative to the distal end of the body.

11. A cannula according to claim 1 including a dissection probe mounted on a shaft 30 disposed in the body for movement of the probe near the distal end thereof in response to manual manipulation of the shaft near the proximal end of the body.



12. A cannula according to claim 11 in which the dissection probe includes a crescent shaped member disposed on the shaft in substantially concentric orientation with the body for selective movement relative to the distal end of the body for severing tissue thereabout.

5 13. A cannula according to claim 11 in which the dissection probe includes at least one partially circular element disposed on the shaft in substantially concentric orientation with the body for selective movement relative to the distal end of the body for severing tissue thereabout.

14. A cannula according to claim 4 comprising:

10 a balloon attached to an exterior wall of the tubular body of the cannula near the distal end of the tubular body at a location thereon that is remote from the outer surface of the member for selective inflation and deflation of the balloon in response to fluid pressurization thereof through a lumen extending within the tubular body without obstructing visualization through the member via the endoscope by the inflated or deflated balloon.

15 15. A cannula for dissecting an elongated cavity in tissue particularly along a course of a vessel, the cannula comprising:

16 a tubular body having a proximal end and a distal end and a portion that is laterally deflectable, and including a port near the distal end of the body;

20 at least one lumen extending within the length of the body;

17 an endoscope having a lighted, viewing end disposed within the lumen near the distal end of the body, the endoscope being slidably disposed within the lumen within the body for selectively emerging from the port in response to lateral deflection of the body;

25 a transparent tissue separating member substantially covering the distal end of the body and having a conically tapered outer surface converging toward a blunt tip disposed forward of the distal end of the body, the member being substantially rigid and non-collapsible and having an internal surface that converges to a sharp point at a location substantially aligned with the viewing end of the endoscope.

18 16. A cannula for dissecting an elongated cavity in tissue particularly along a course of a vessel, the cannula comprising:



a tubular body having a proximal end and a distal end and including a port near the distal end of the body;

at least one lumen extending within the length of the body;


5 an endoscope slidably disposed within the lumen and having a lighted, viewing end disposed within the lumen near the distal end of the body for selectively emerging from the port in response to lateral deflection of the body;

10 a transparent tissue separating member substantially covering the distal end of the body and having tapered outer surfaces converging toward a blunt tip disposed forward of the distal end of the body, the member being substantially rigid and non-collapsible and having an internal surface that converges to a sharp point at a location substantially aligned with the viewing end of the endoscope for visualization thereby through the member with reduced distortion, and the member being selectively displaceable from the viewing end of the endoscope near the distal end of the body in response to lateral deflection of the body.

15 17. A cannula according to claim 1 in which the conically tapered outer surface to the blunt tip is about 0.5 inches (12.70 mm) in length.

18. A cannula according to claim 1 in which the dimension of the member at the distal end of the tubular body is about 8 millimeters.

19. A cannula for dissecting an elongated cavity in tissue, particularly along the course 20 of a vessel, comprising (a) a tubular body having a proximal end and a distal end; (b) at least one lumen extending along the length of the body for receiving therein an endoscope having a viewing end disposed within the lumen adjacent the distal end of the body; and (c) a transparent member substantially covering the distal end of the body and having a tapered outer surface converging toward a blunt tip of the member disposed 25 forward of the distal end of the body, and an opposite internal surface that converges to a point at a location substantially directly behind said blunt tip and in alignment with the viewing end of an endoscope when disposed within the lumen.



20. A cannula for dissecting an elongated cavity in tissue, substantially as herein described with reference to the accompanying drawings.

DATED this 15th day of March 2000

ORIGIN MEDSYSTEMS INC

5

Attorney: IVAN A. RAJKOVIC
Fellow Institute of Patent Attorneys of Australia
of BALDWIN SHELSTON WATERS

B
E
N
D
A
M
P
R
E
S
T



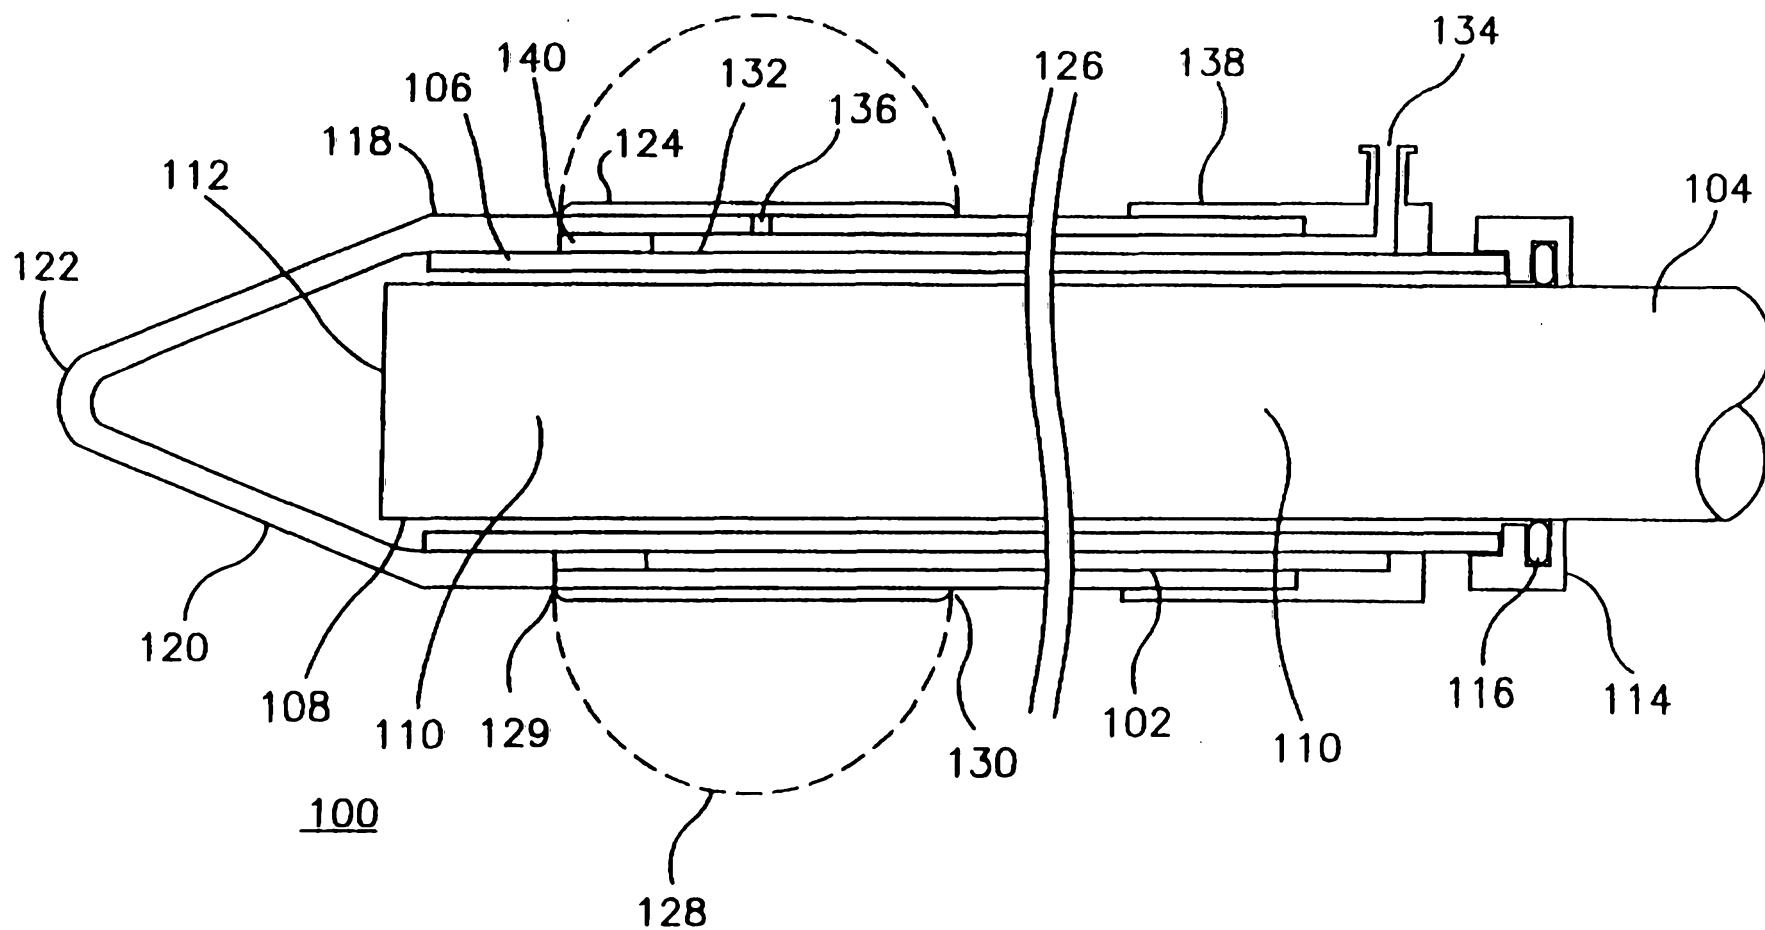


FIGURE 1

2/14

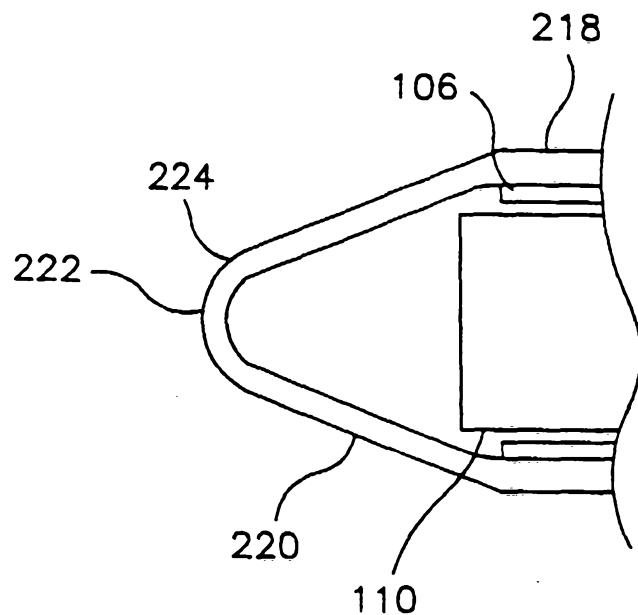


FIGURE 2

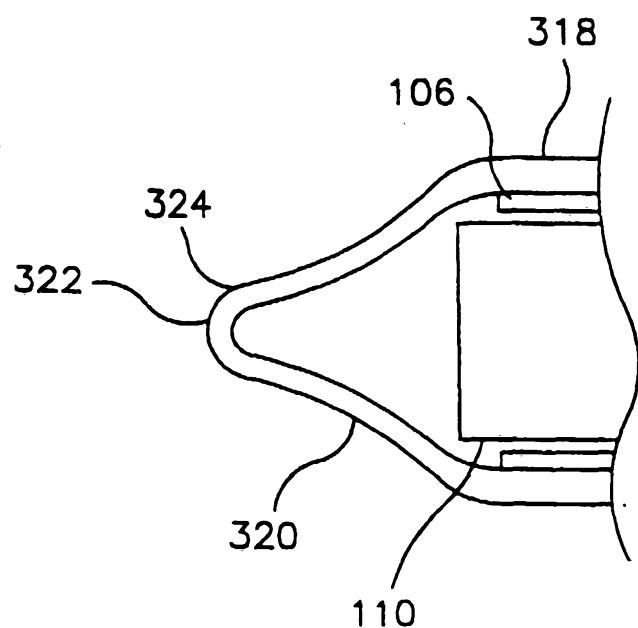


FIGURE 3

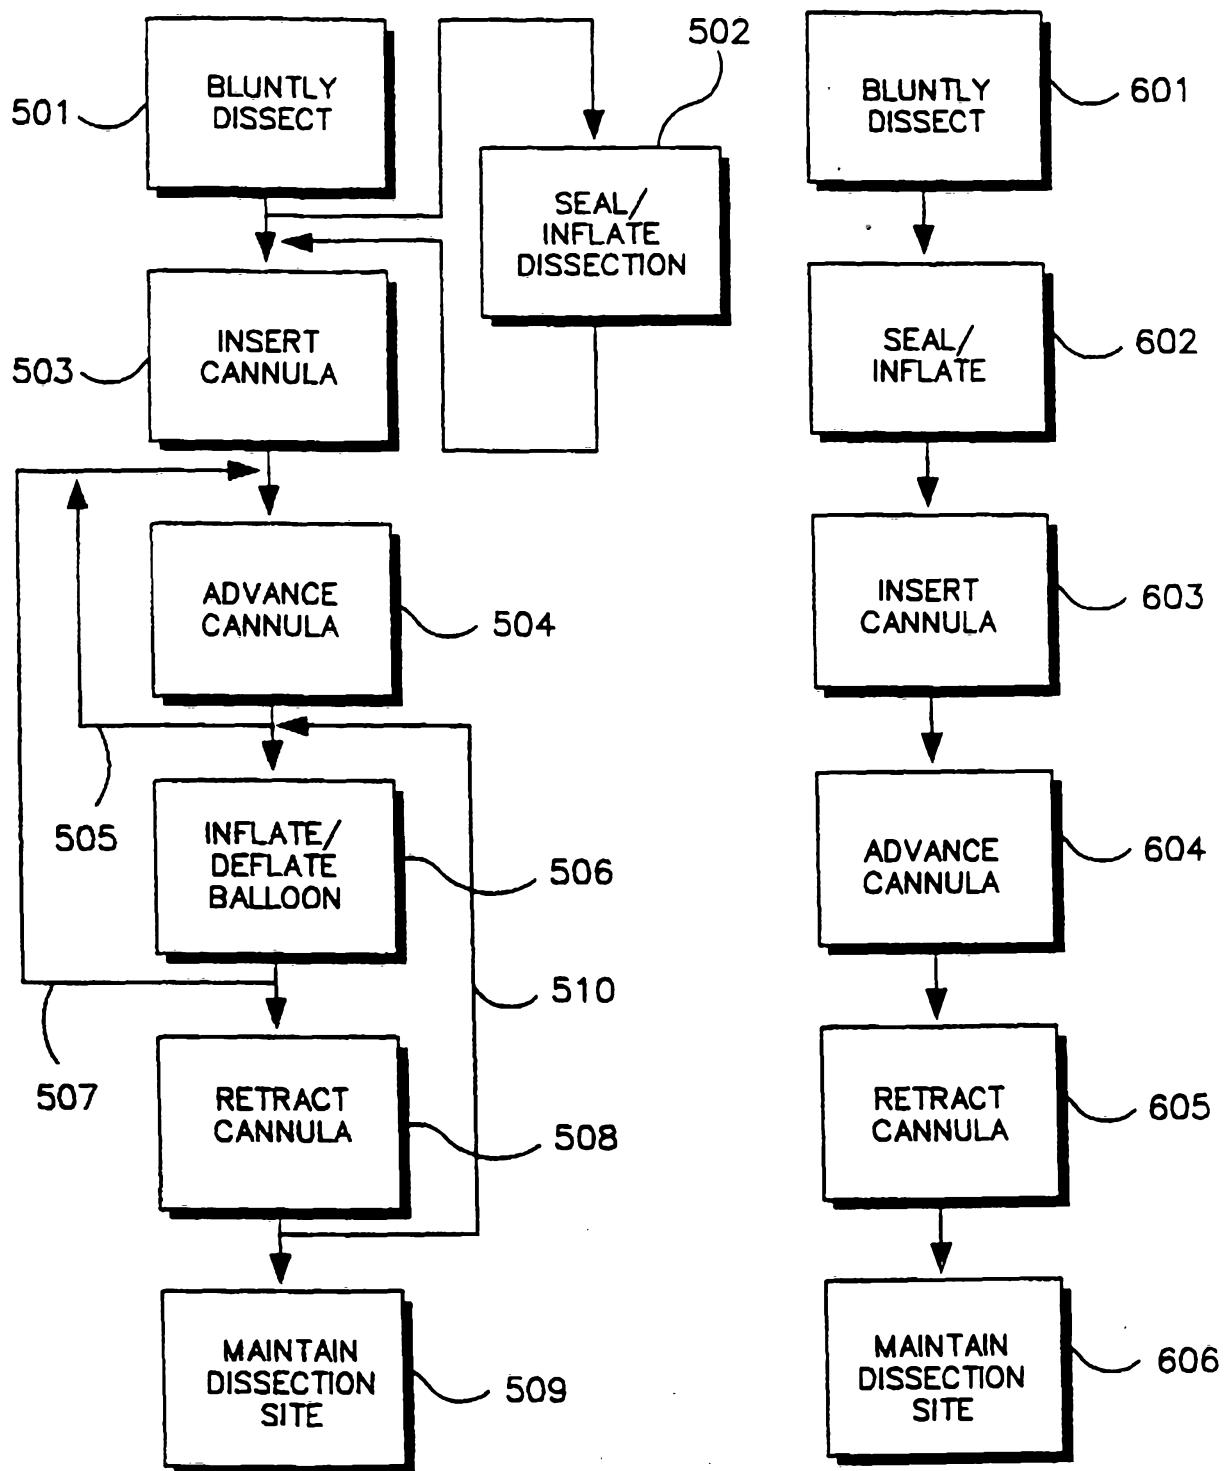


FIGURE 5

FIGURE 6

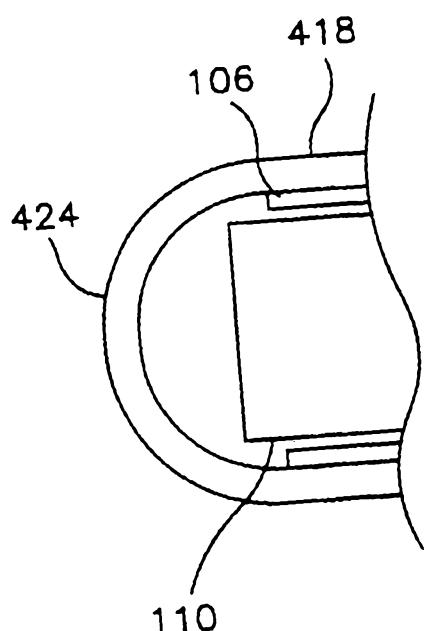


FIGURE 4

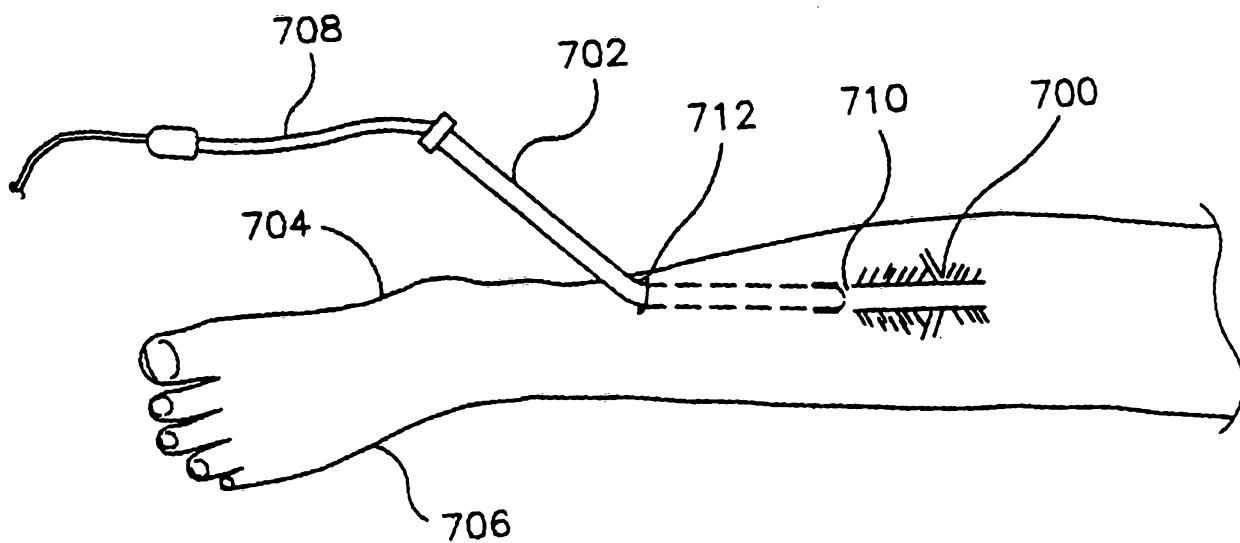


FIGURE 7

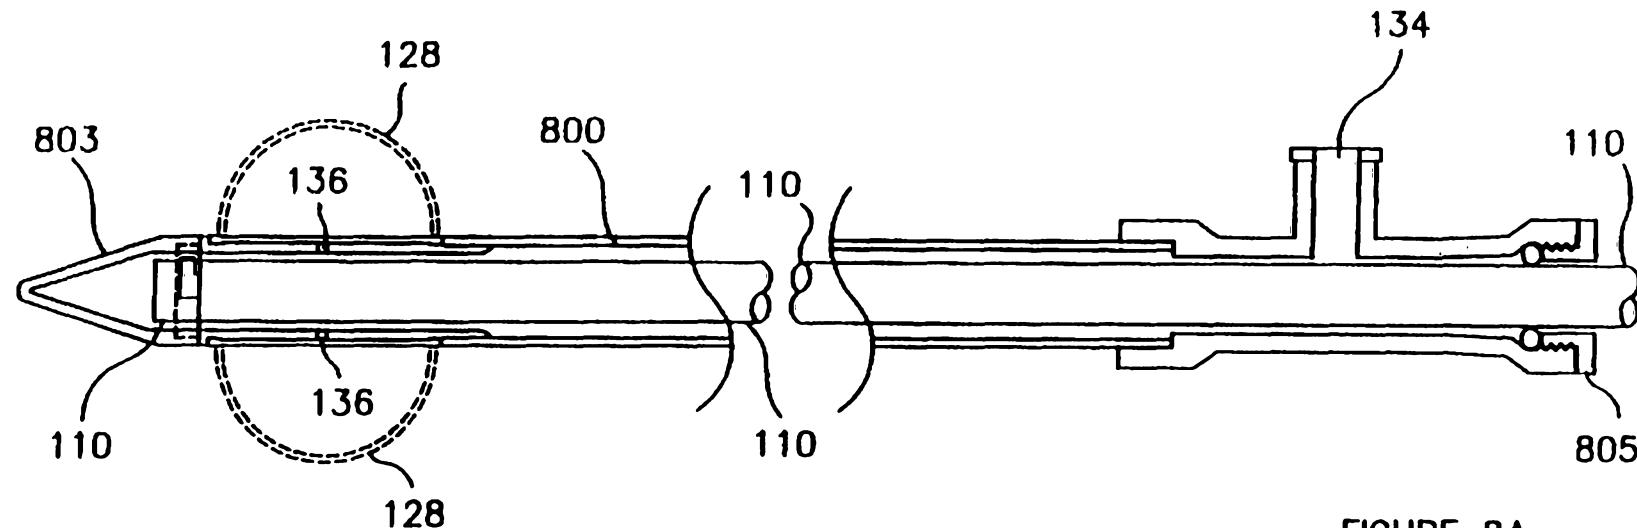


FIGURE 8A

5/14

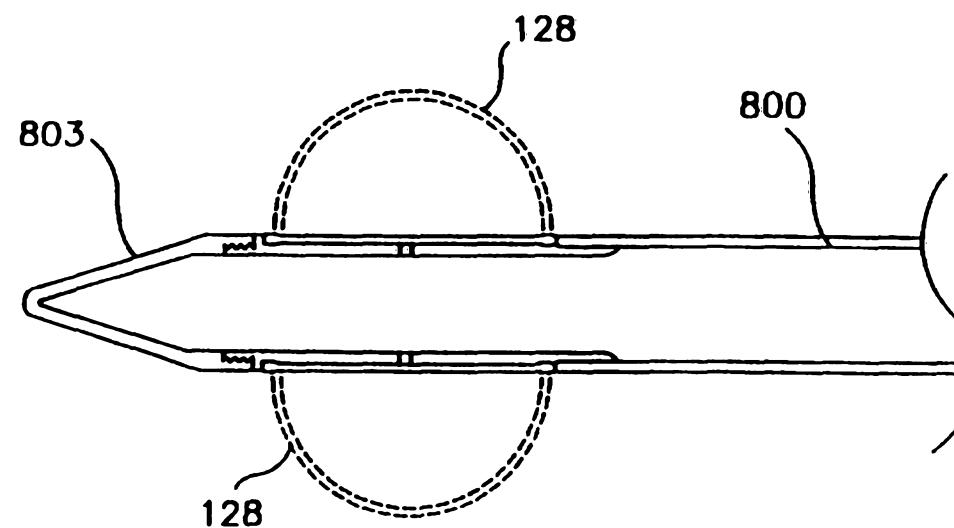


FIGURE 8B

6/14

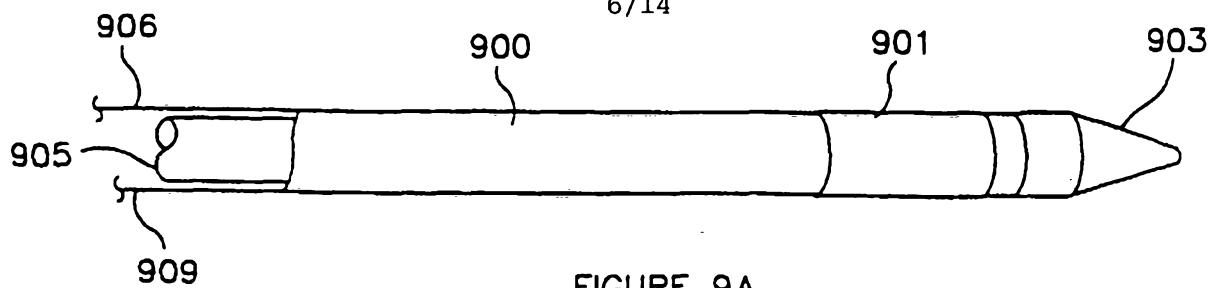


FIGURE 9A

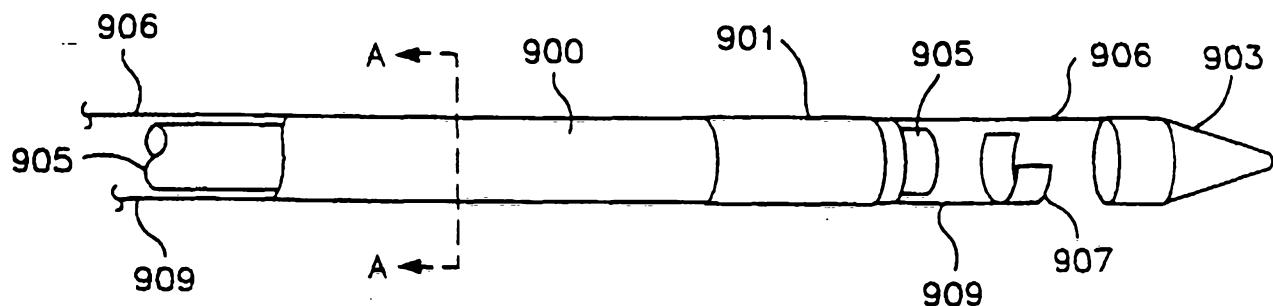


FIGURE 9B


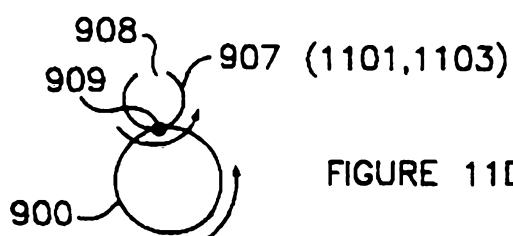


FIGURE 11D

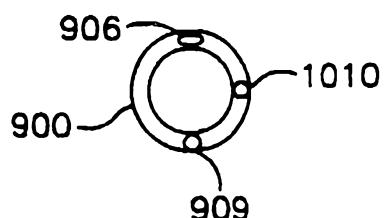

SECTION A-A

FIGURE 10

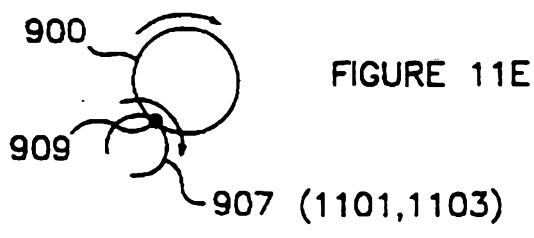


FIGURE 11E

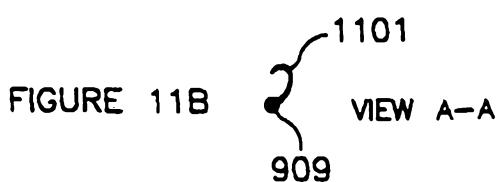


FIGURE 11B





FIGURE 11A

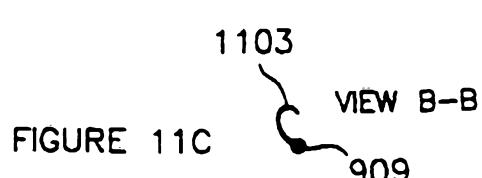


FIGURE 11C

7/14

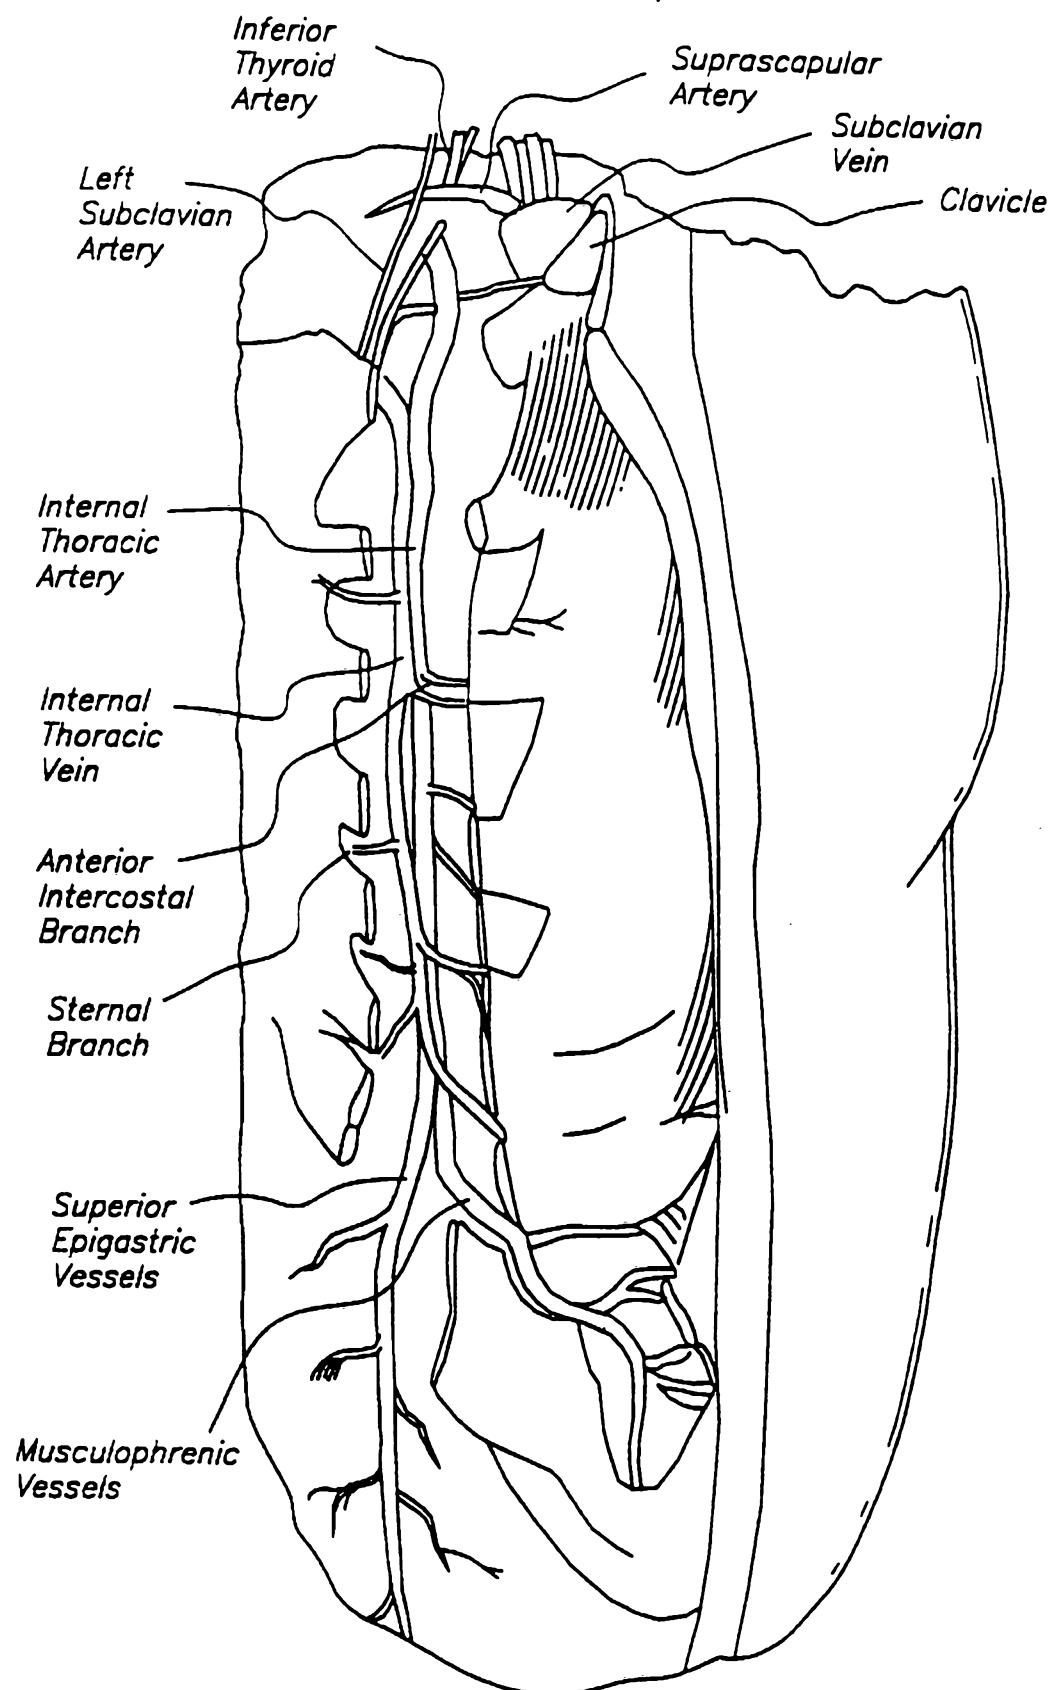


FIG. 12A

8/14

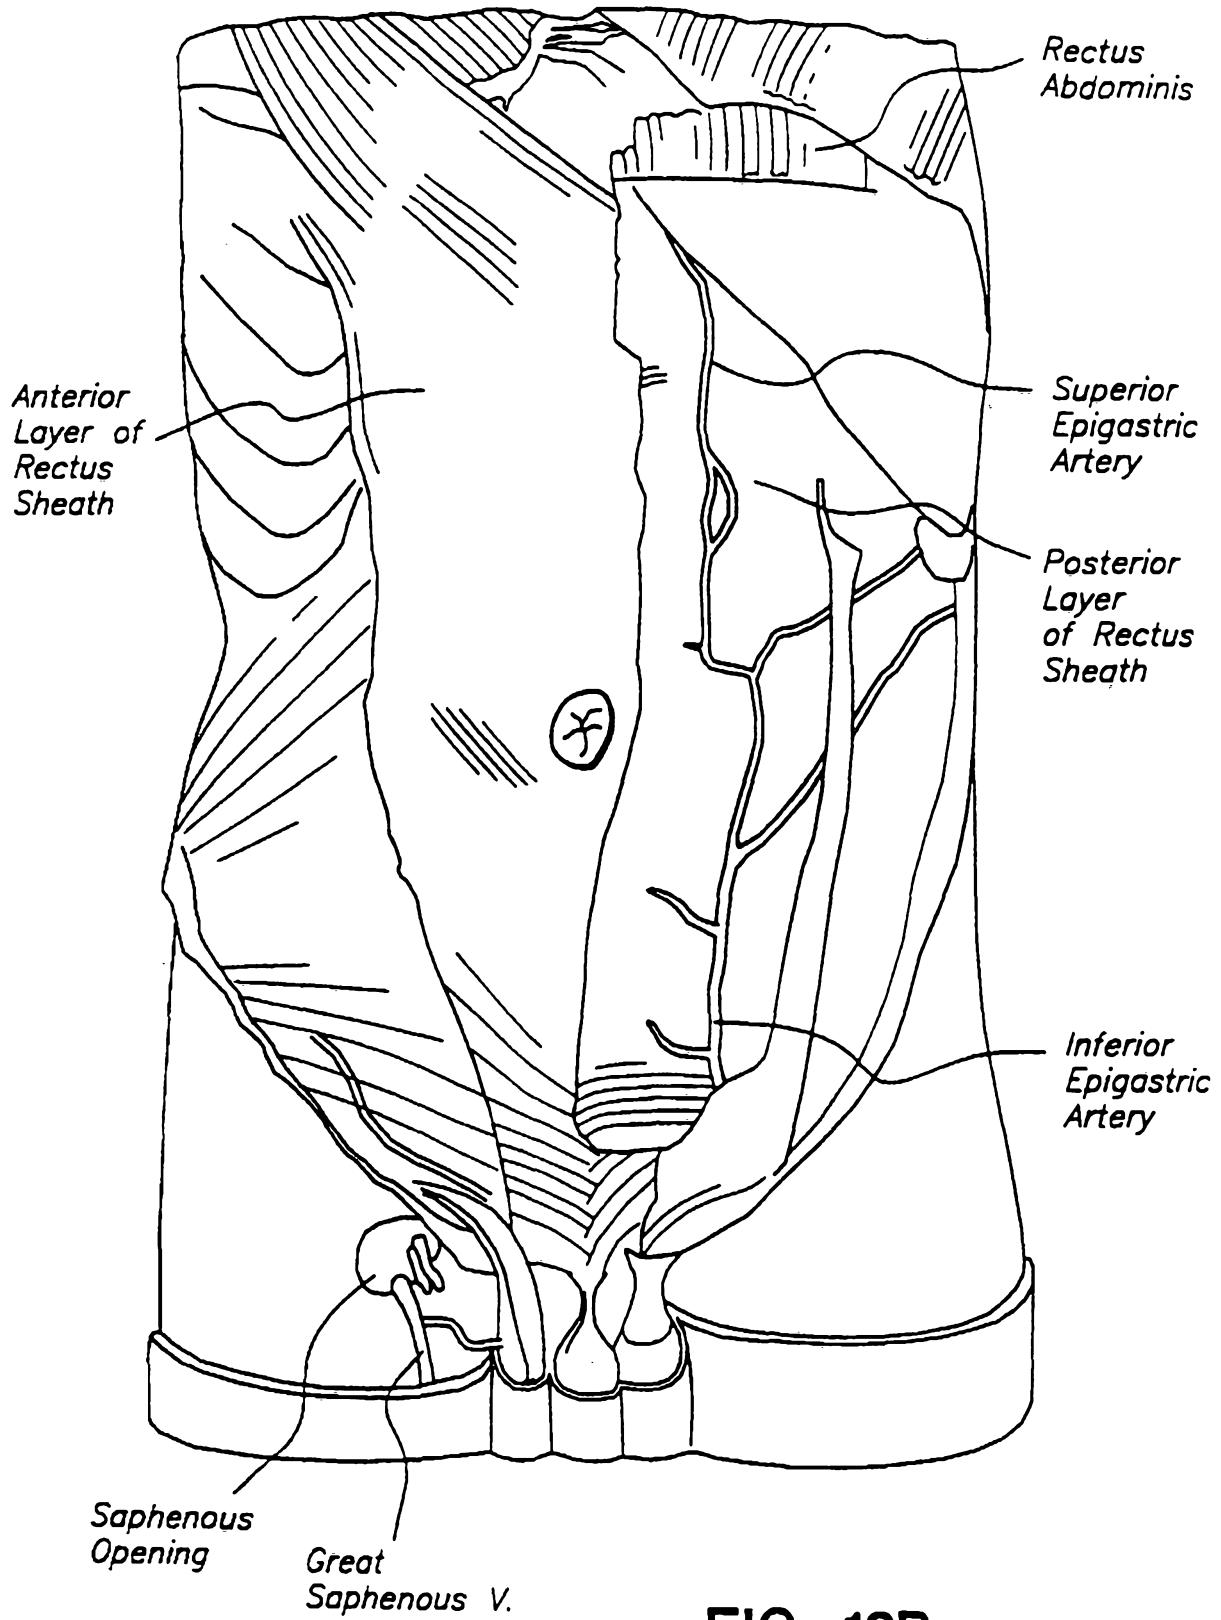


FIG. 12B

9/14



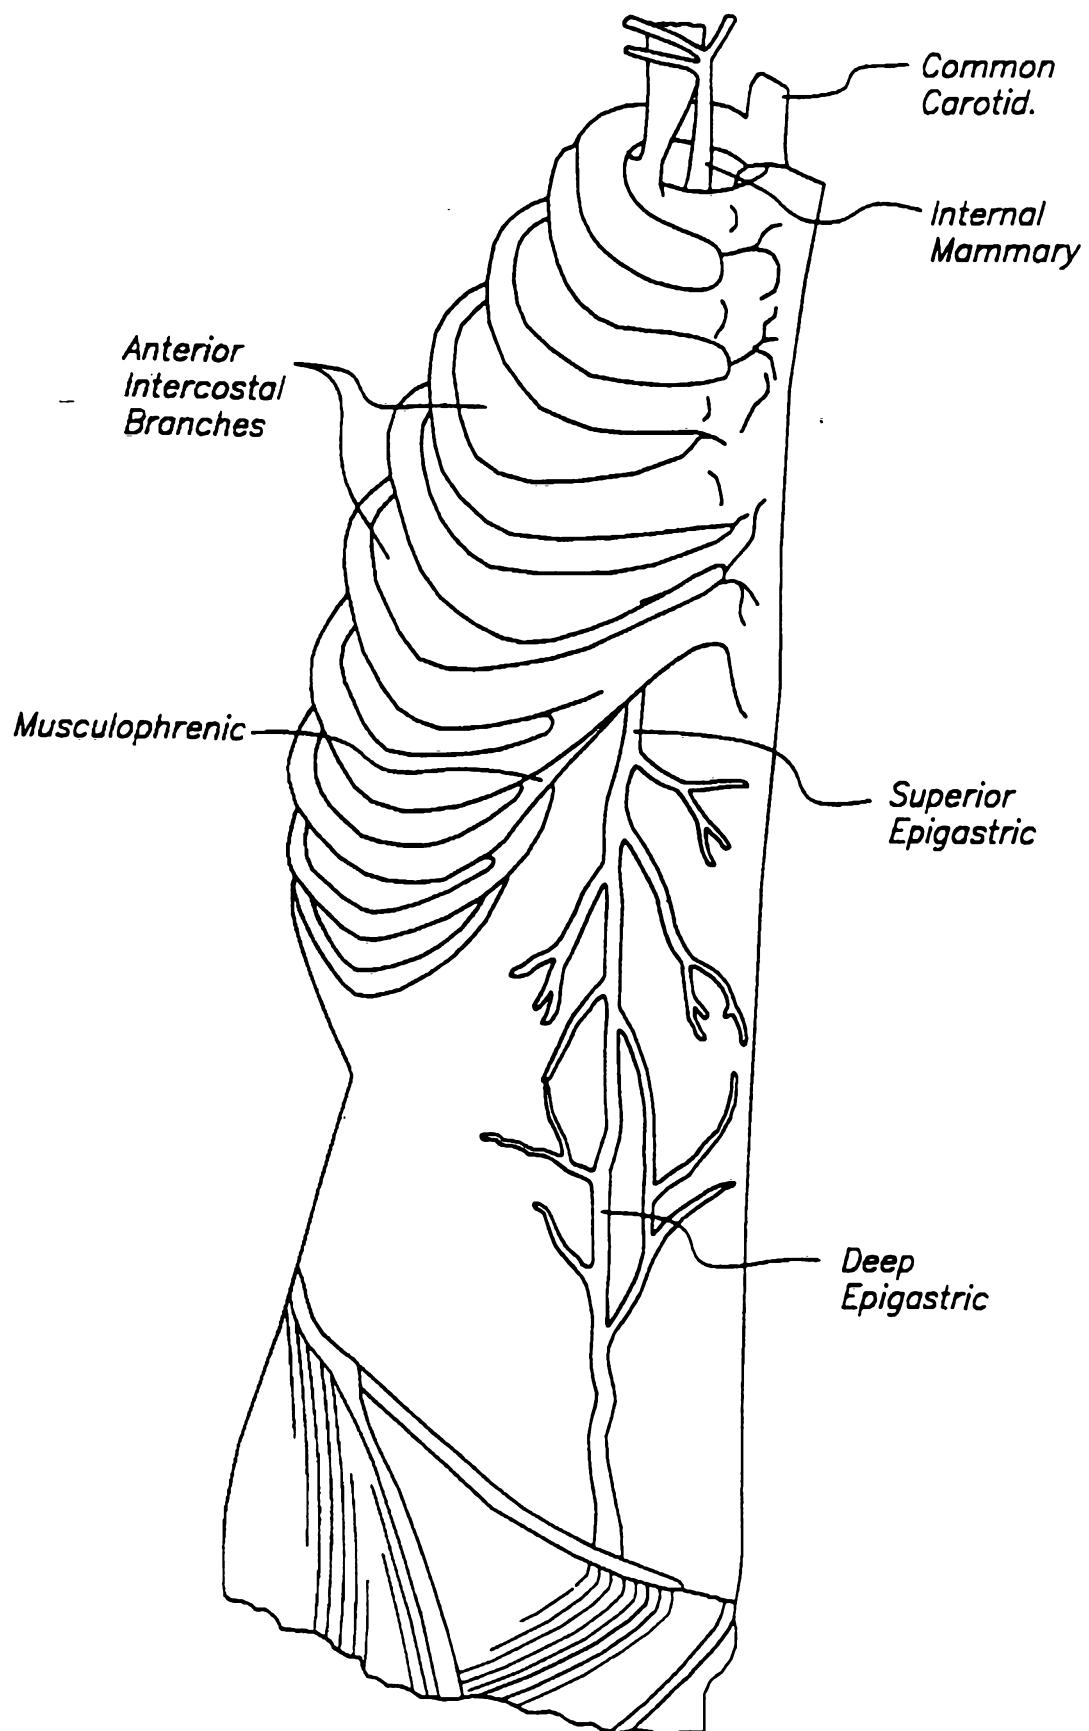


FIG. 12C

10/14

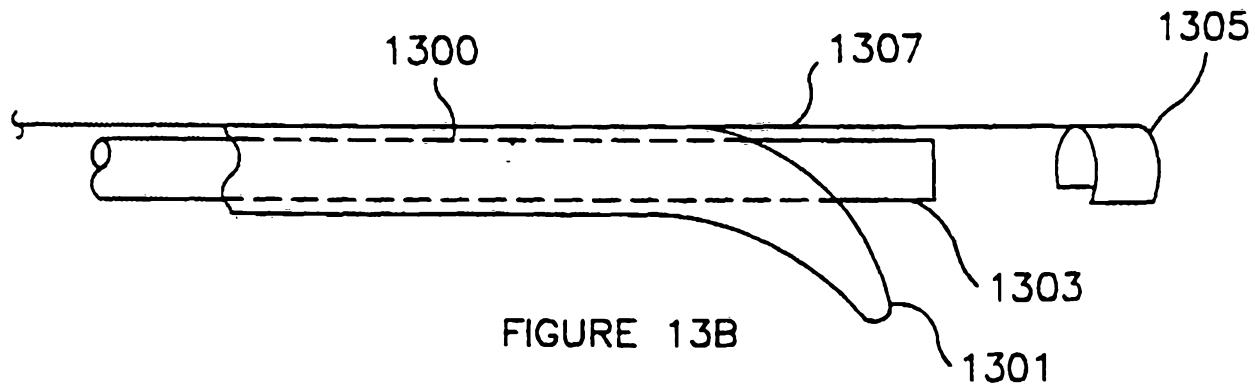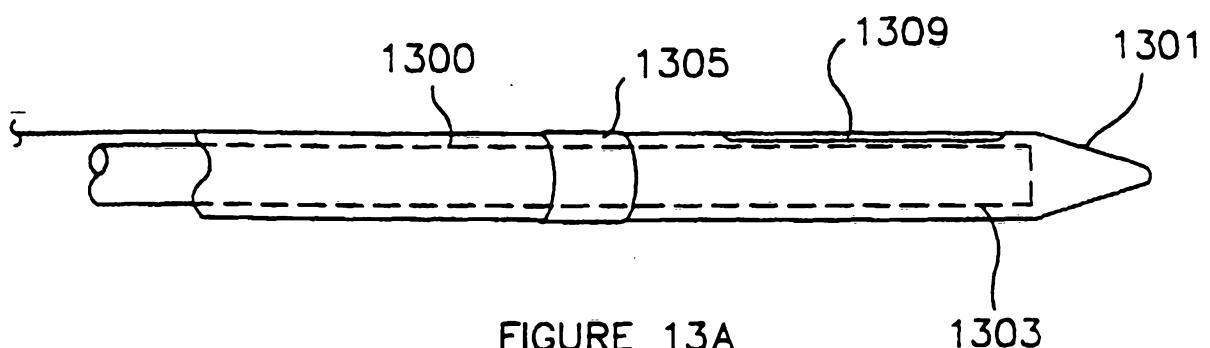

11/14

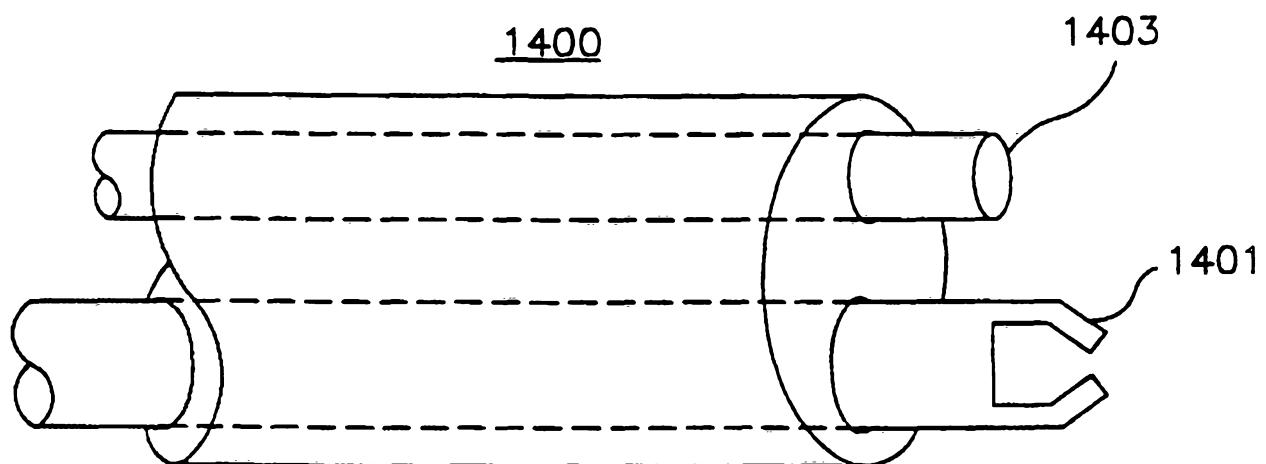


FIGURE 14

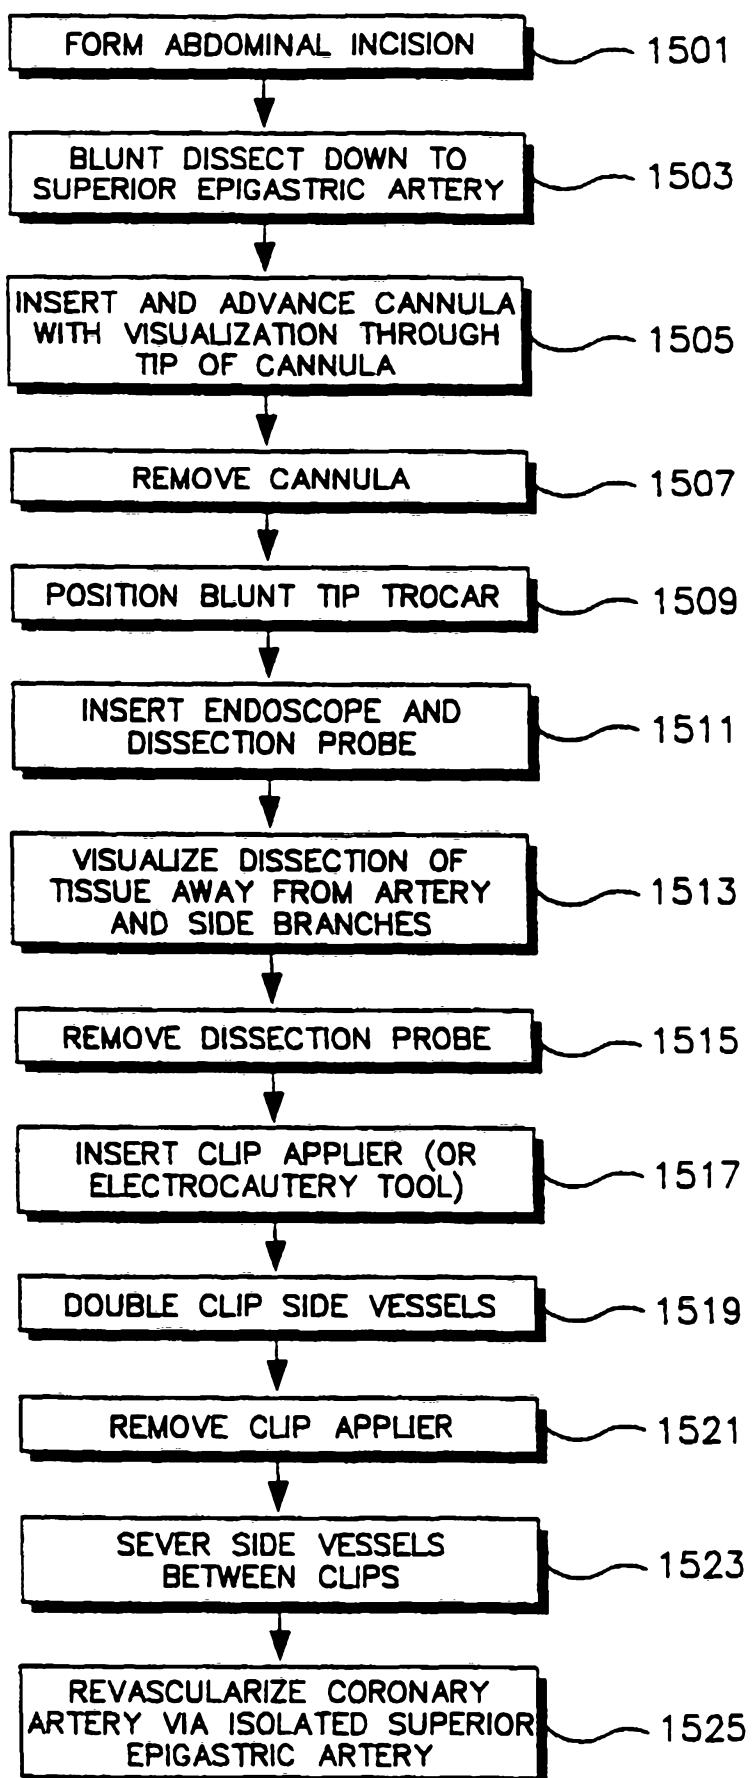


FIGURE 15

13/14

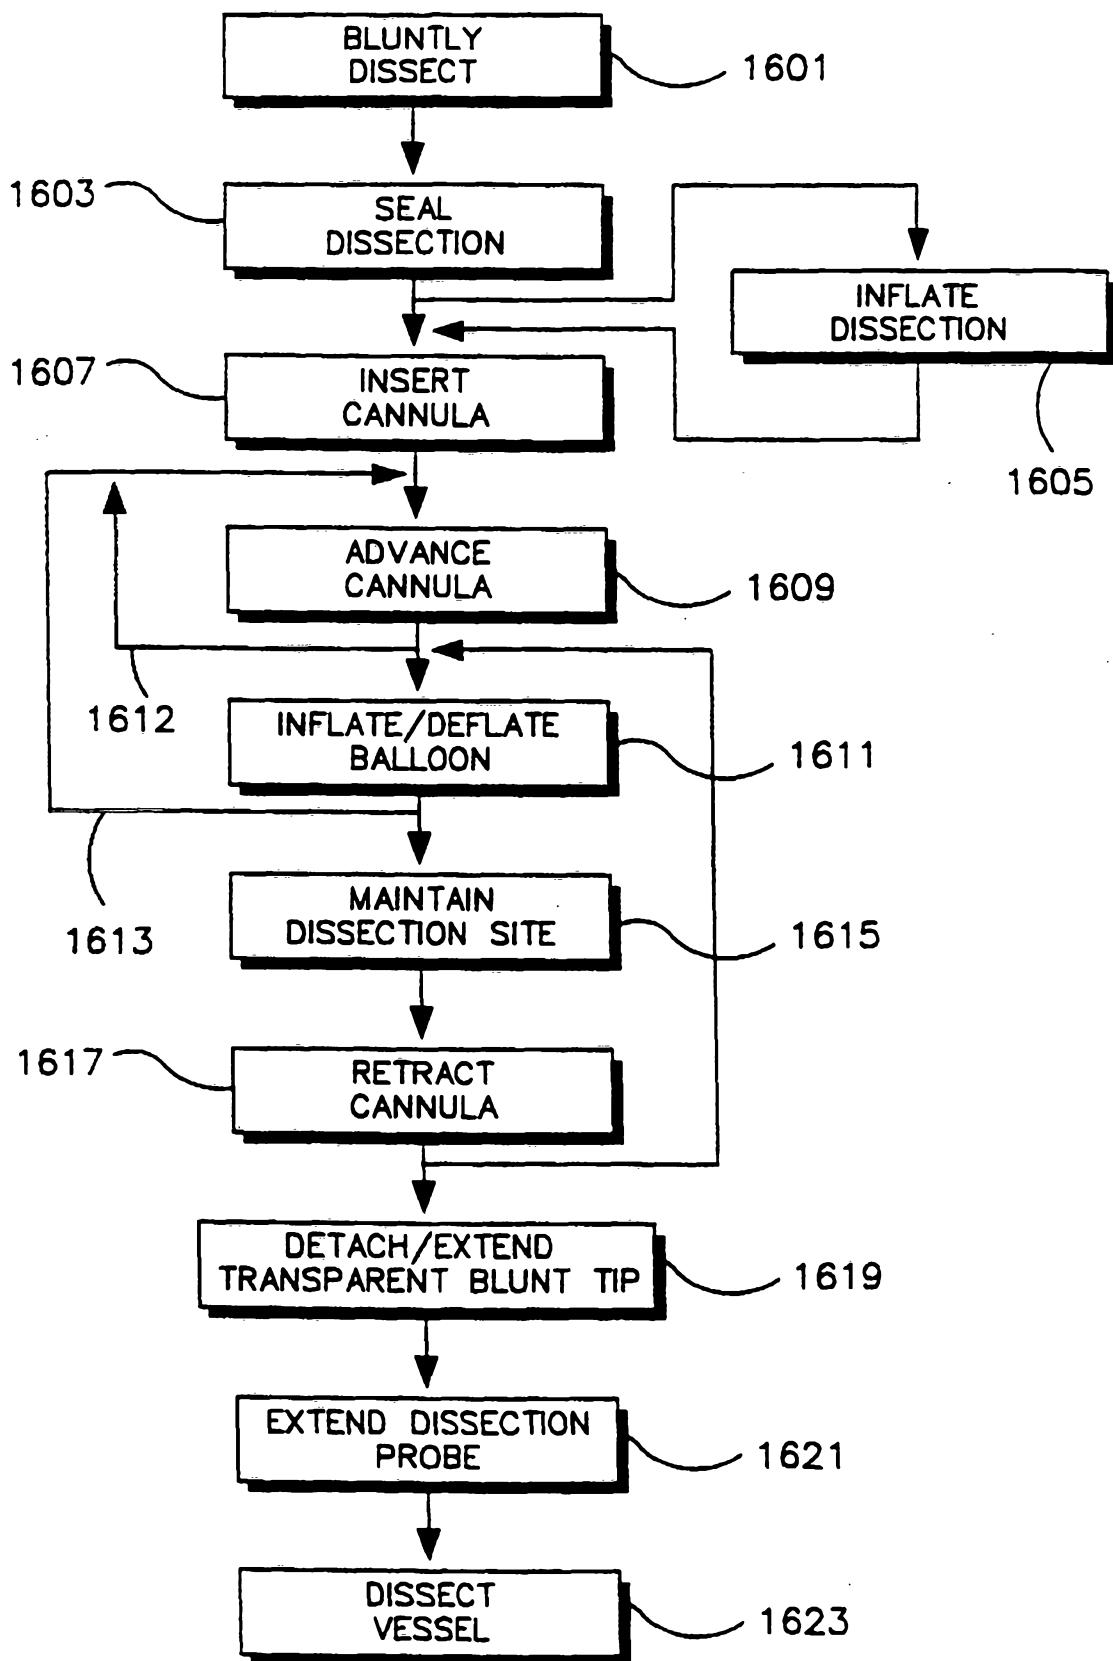


FIGURE 16

14/14

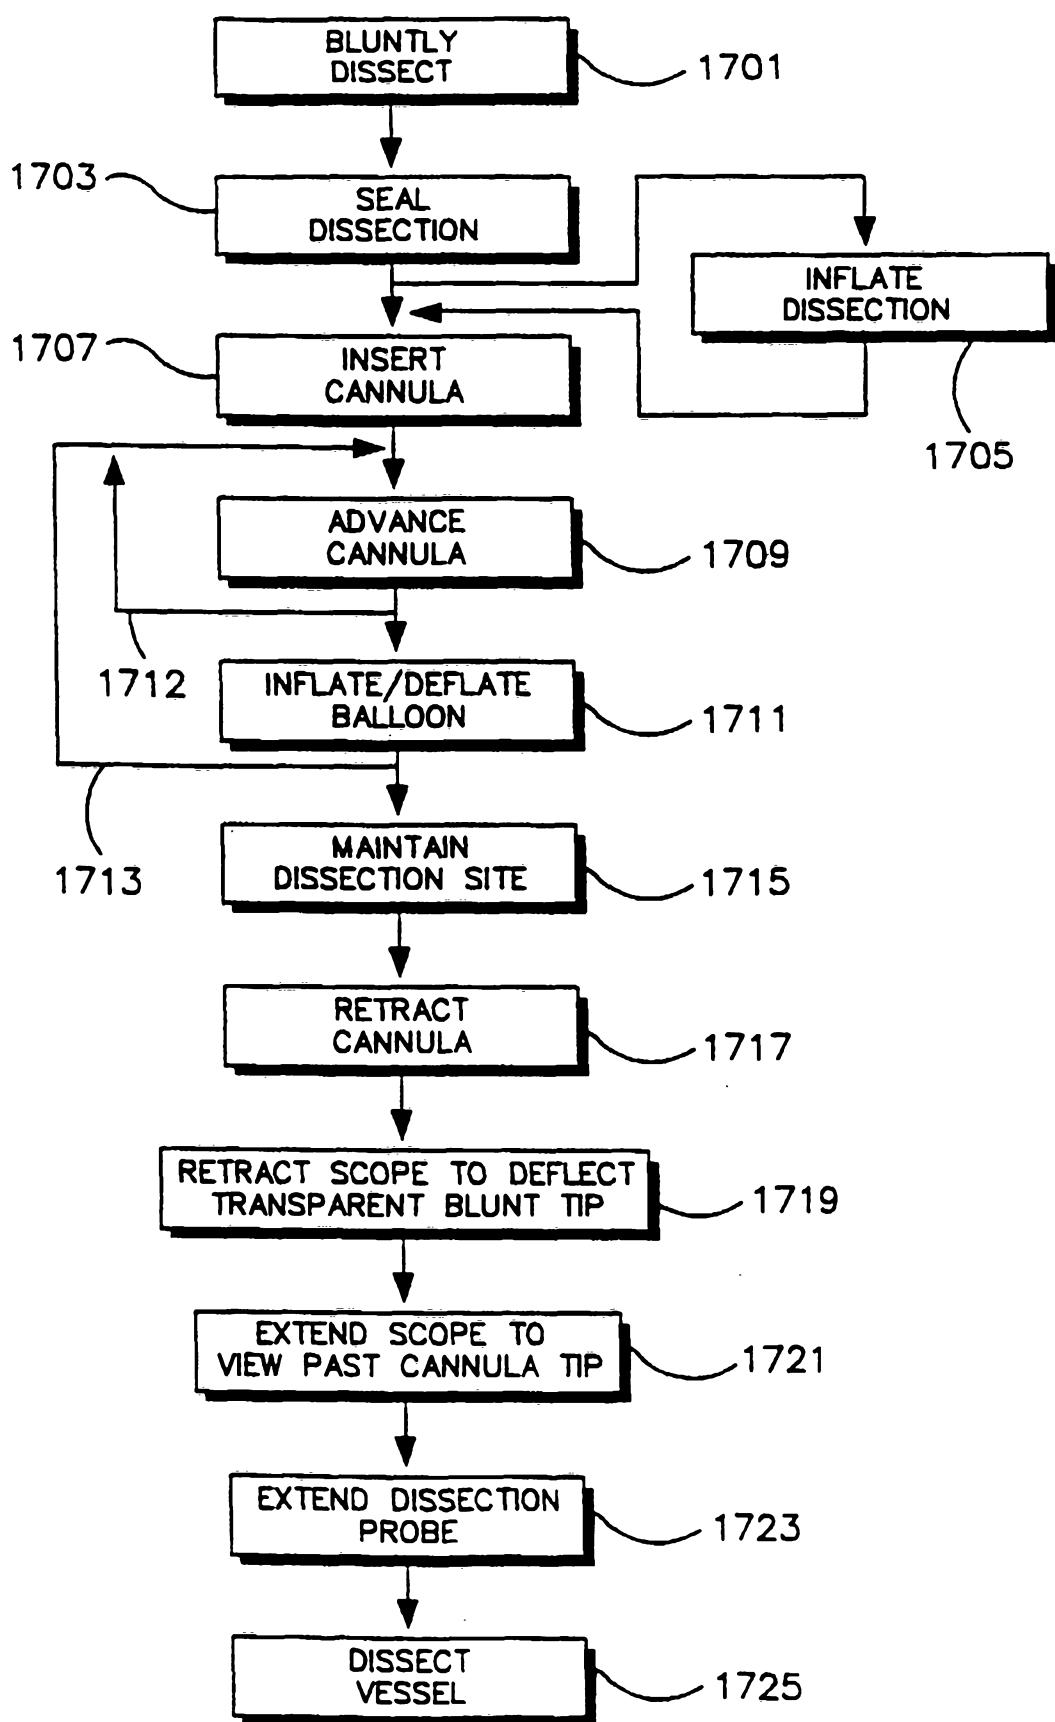


FIGURE 17