



(12) UK Patent (19) GB (11) 2 116 629 B

(54) Title of invention

Method of and apparatus for automatically
attaching top stops to a gapped slide fastener
chain with sliders mounted thereon

(51) INT CL⁴; A44B 19/60

(21) Application No
8305997

(22) Date of filing
4 Mar 1983

(30) Priority data

(31) 57/042209

(32) 17 Mar 1982

(33) Japan (JP)

(43) Application published
28 Sep 1983

(45) Patent published
16 Oct 1985

(73) Proprietors
Yoshida Kogyo K K
(Japan)
No 1 Kanda Izumi-cho
Chiyoda-ku
Tokyo
Japan

(72) Inventor
Toyoo Morita

(74) Agent and/or
Address for Service
Marks & Clerk,
57-60 Lincoln's Inn Fields,
London WC2A 3LS

(52) Domestic classification
E2S 102 DA

(56) Documents cited
GB A 2088469

(58) Field of search
E2S

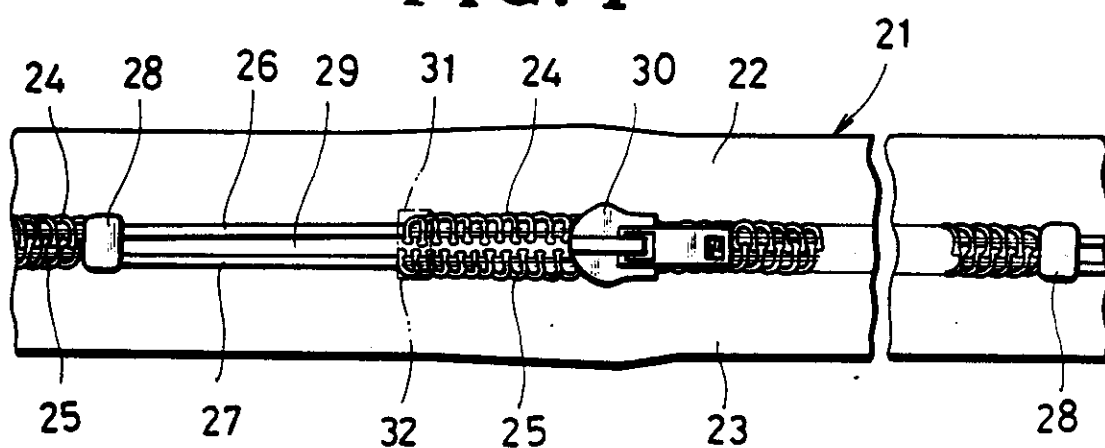
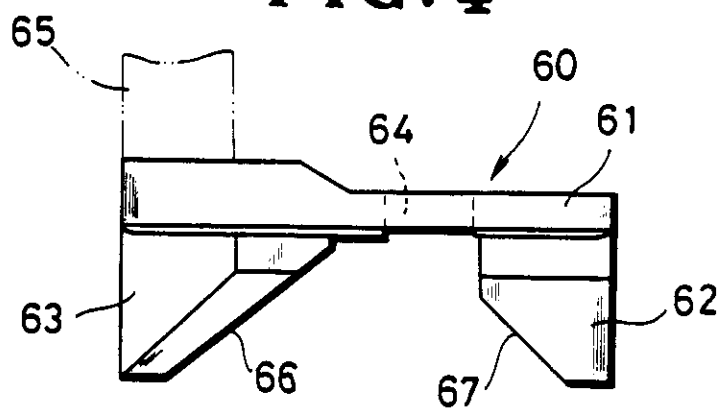
FIG. 1**FIG. 4**

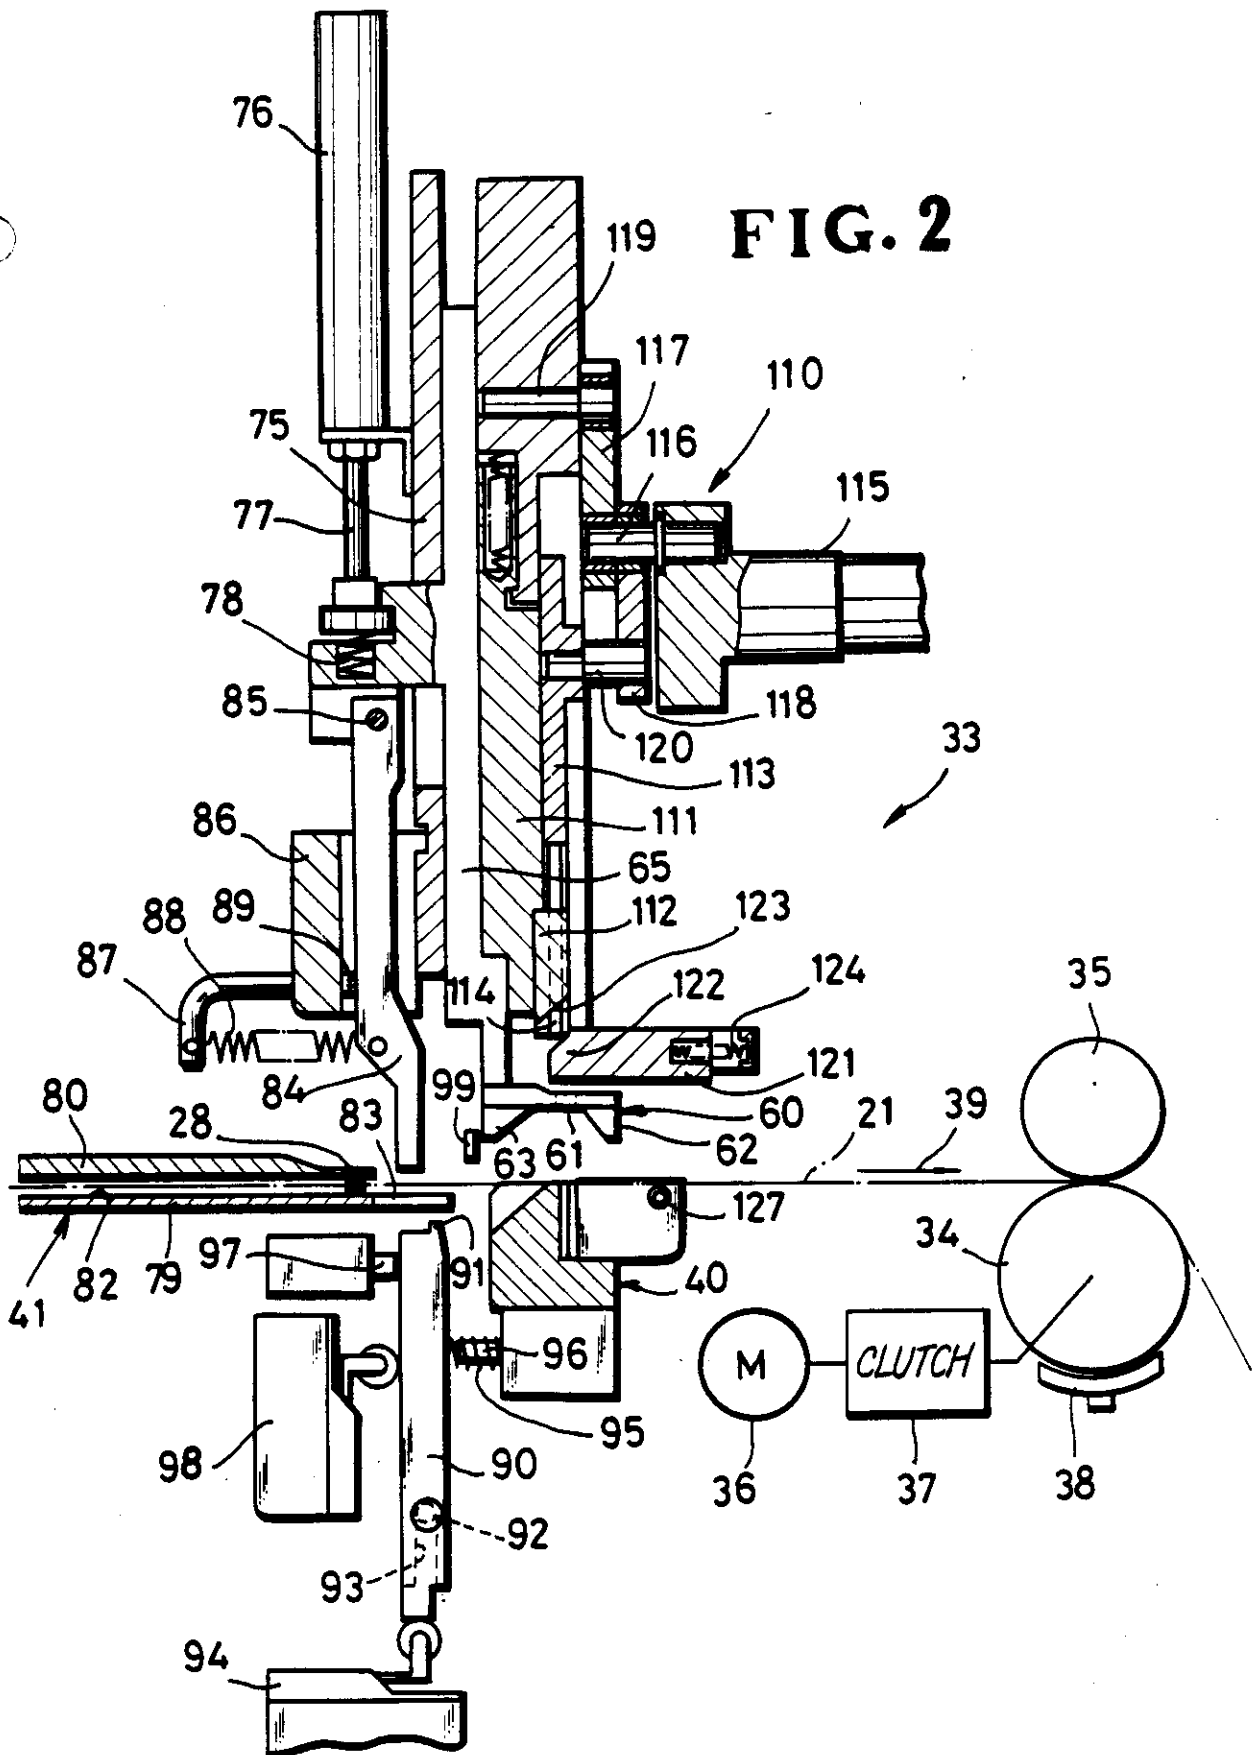
FIG. 2

FIG. 3

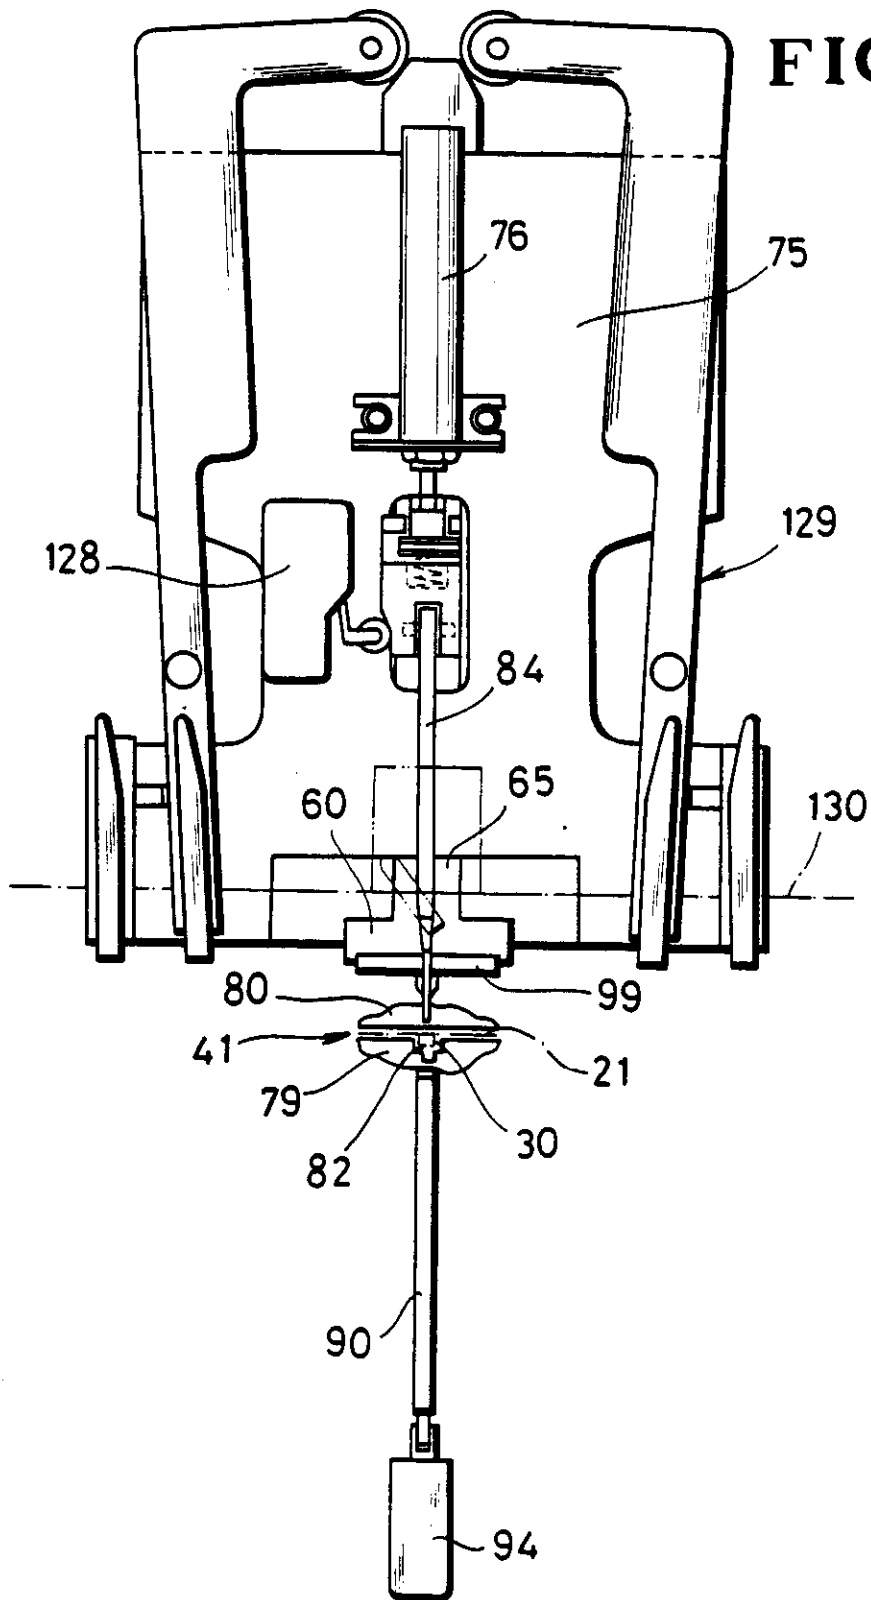


FIG. 5

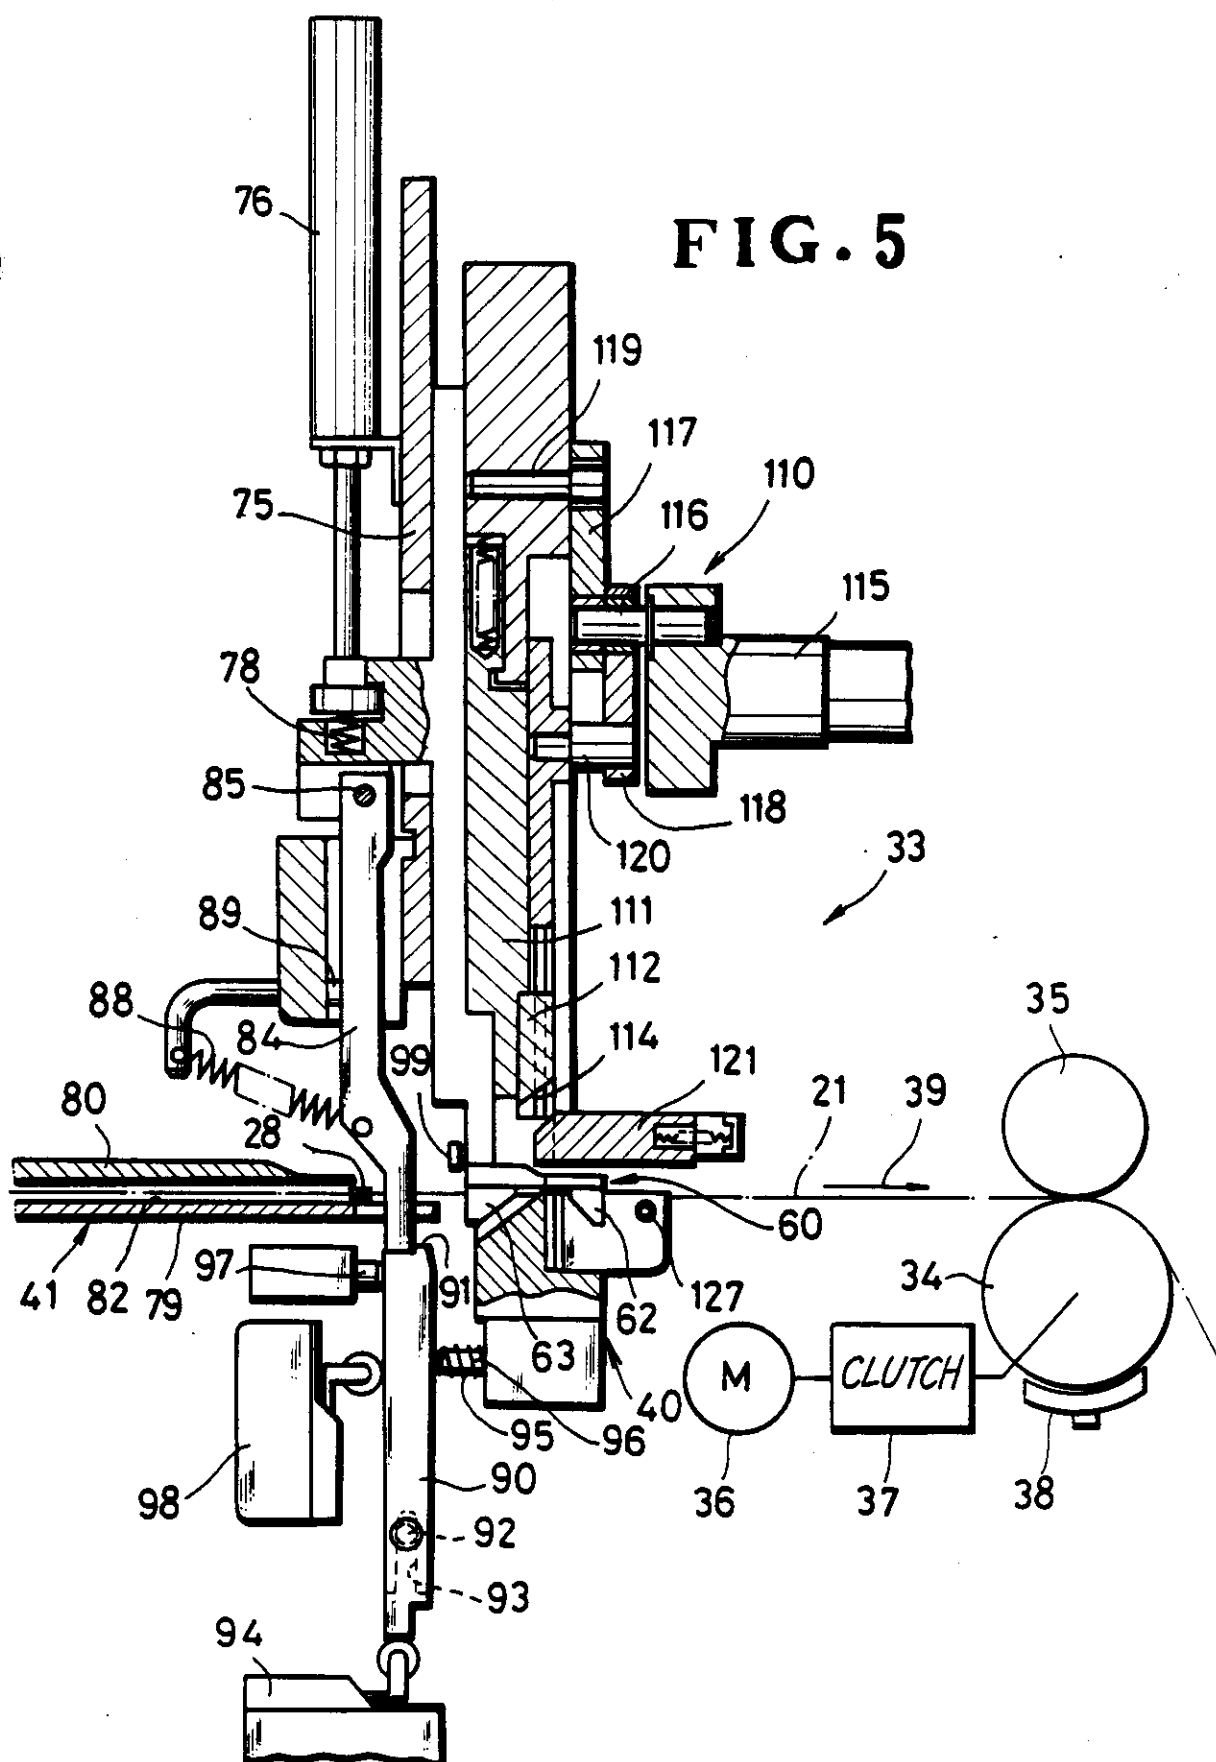
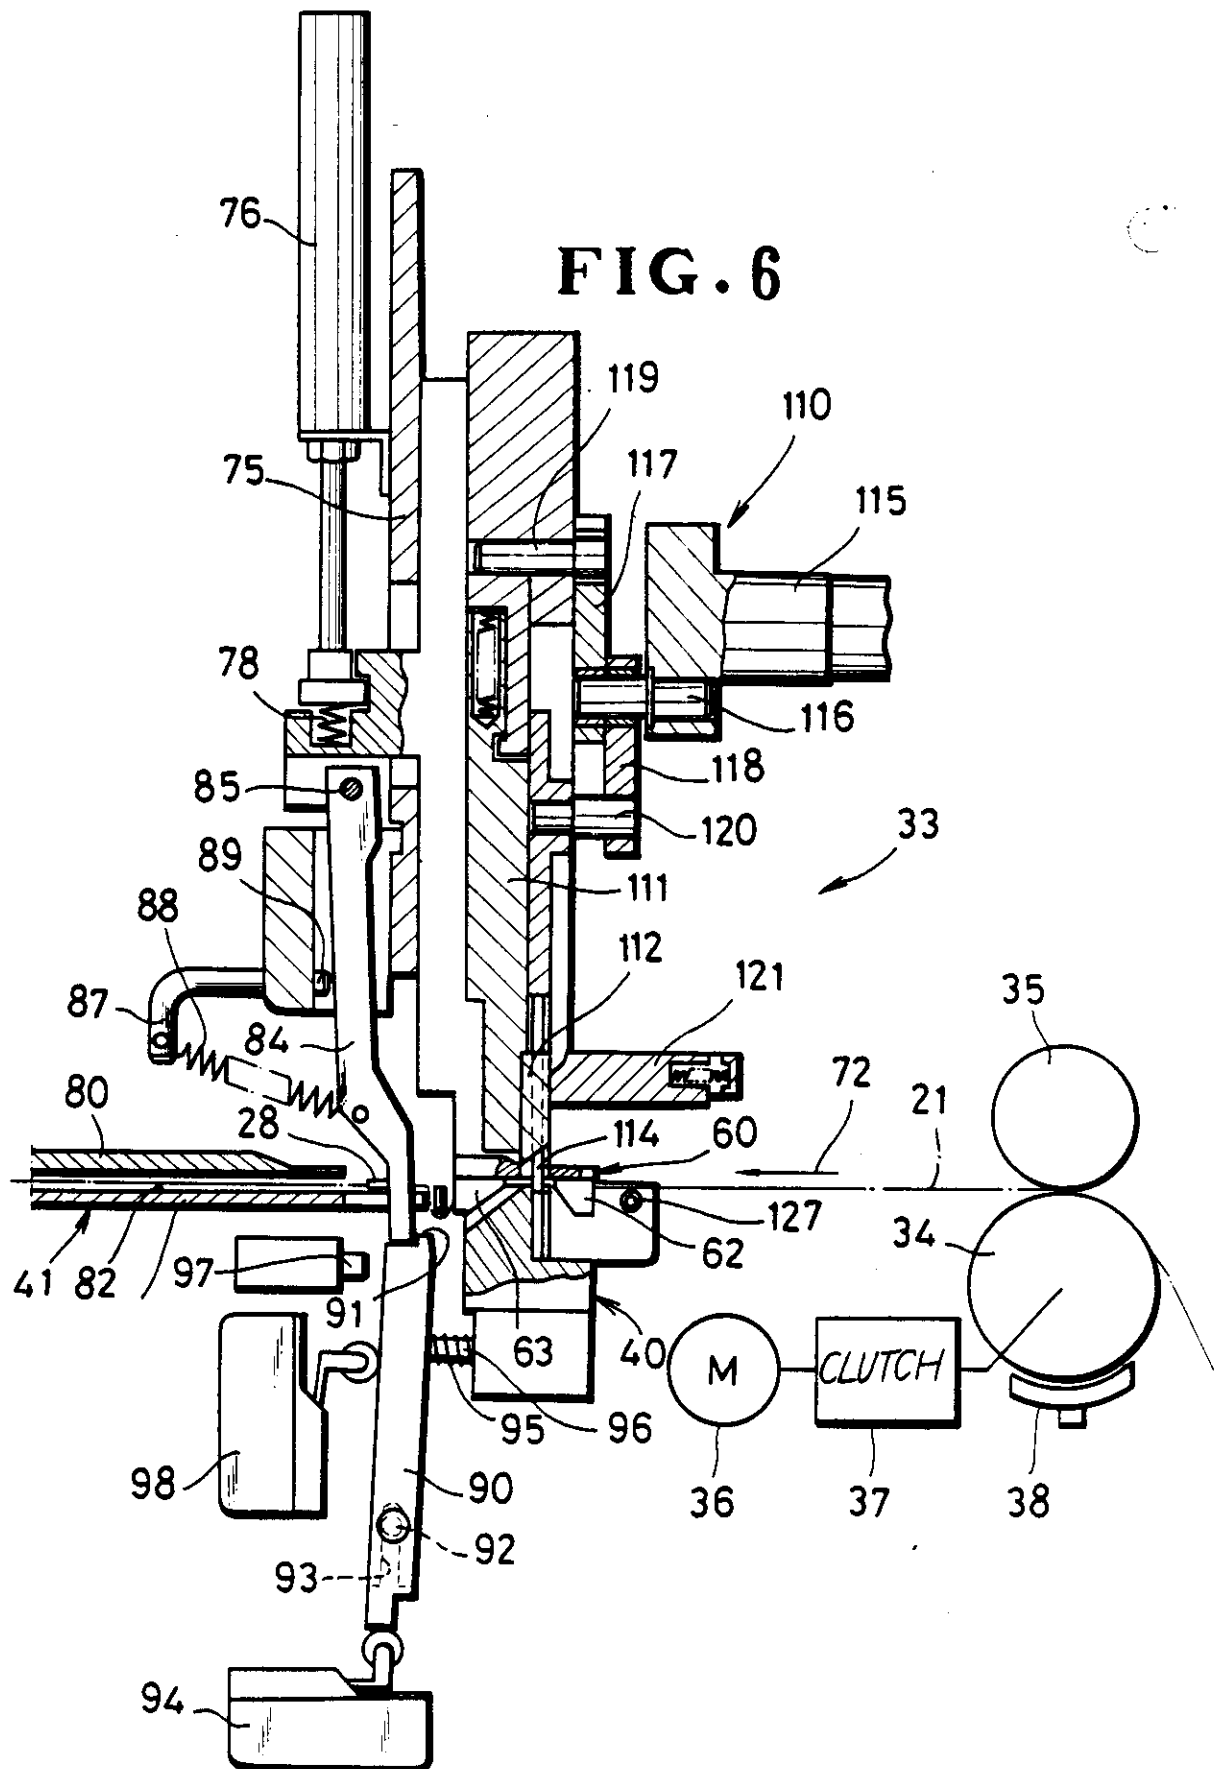


FIG. 6



6/14

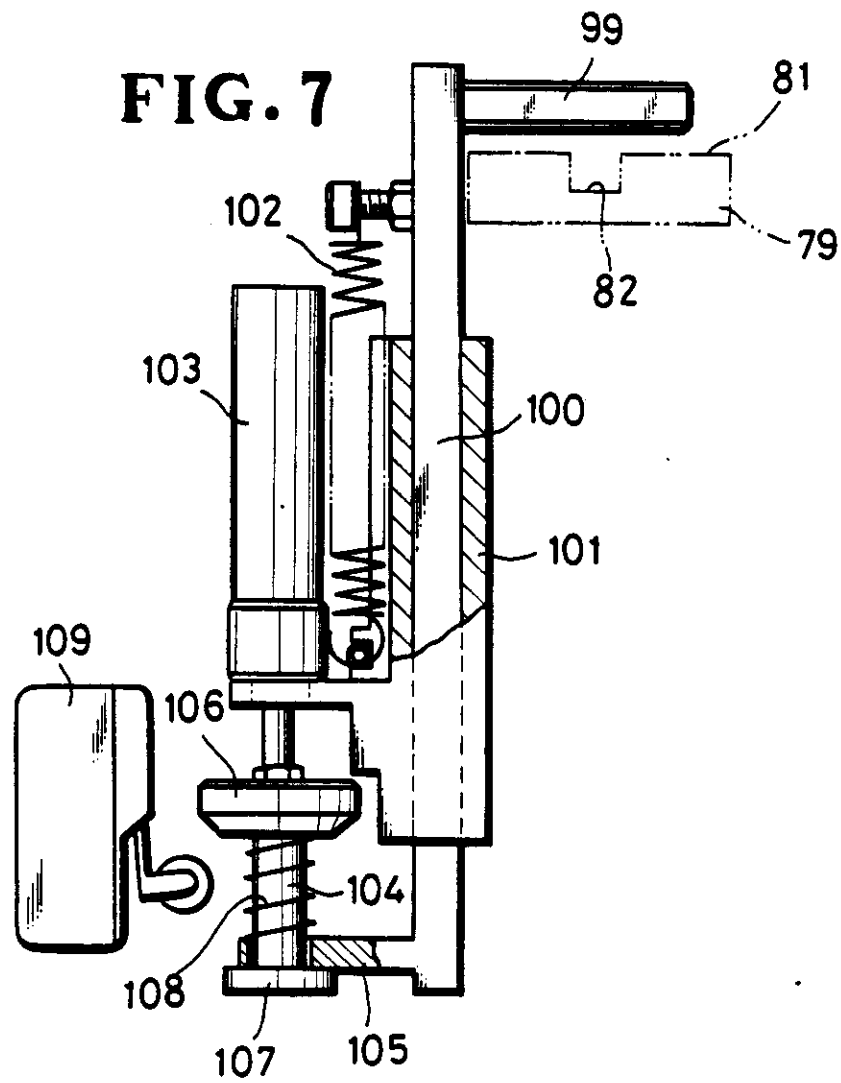
FIG. 7

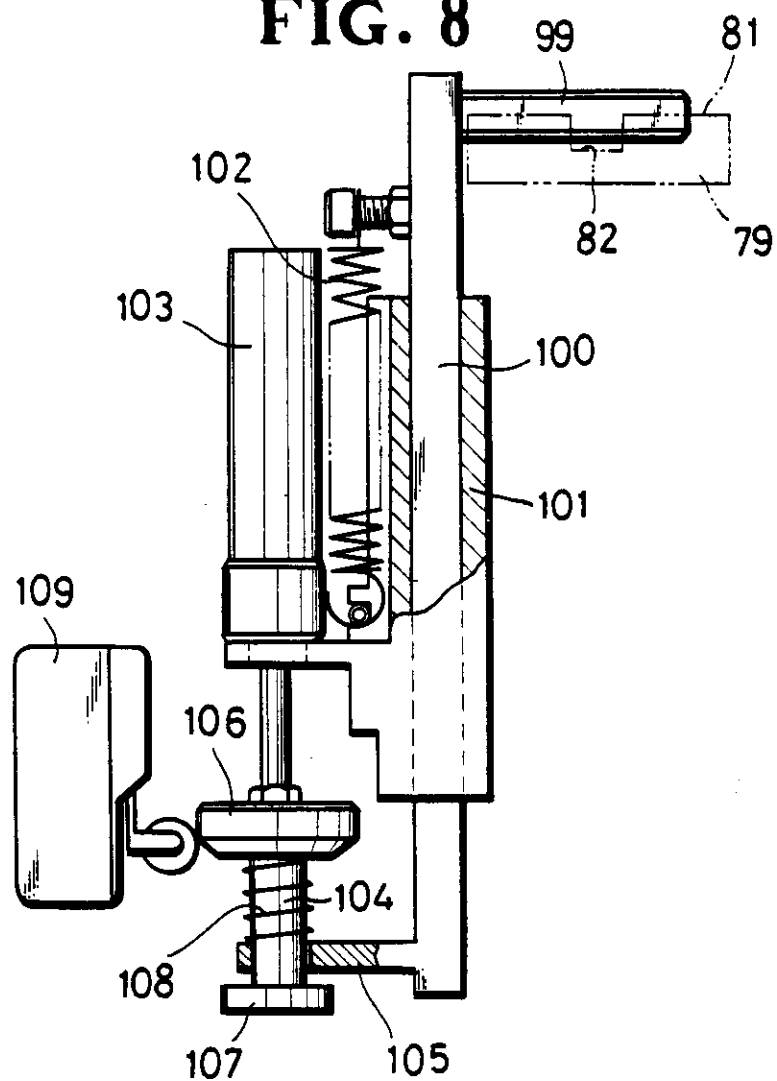
FIG. 8

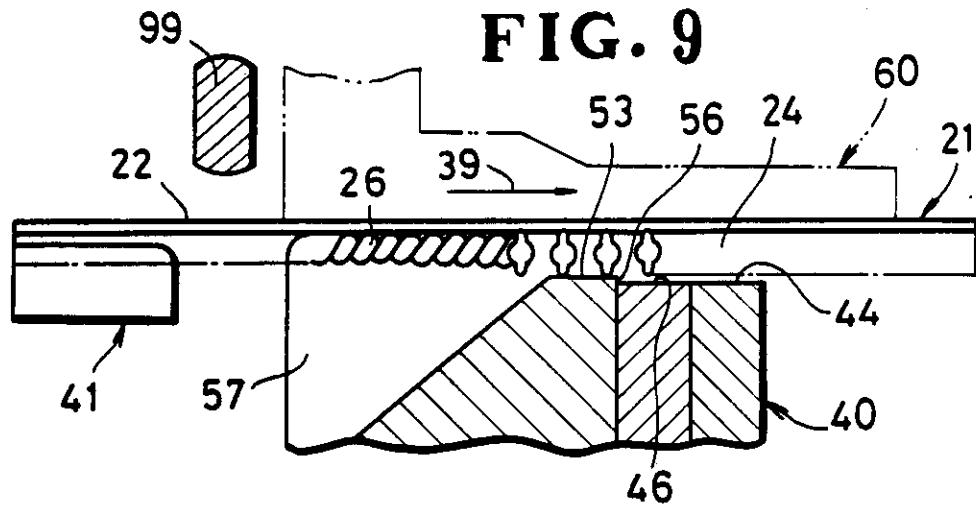
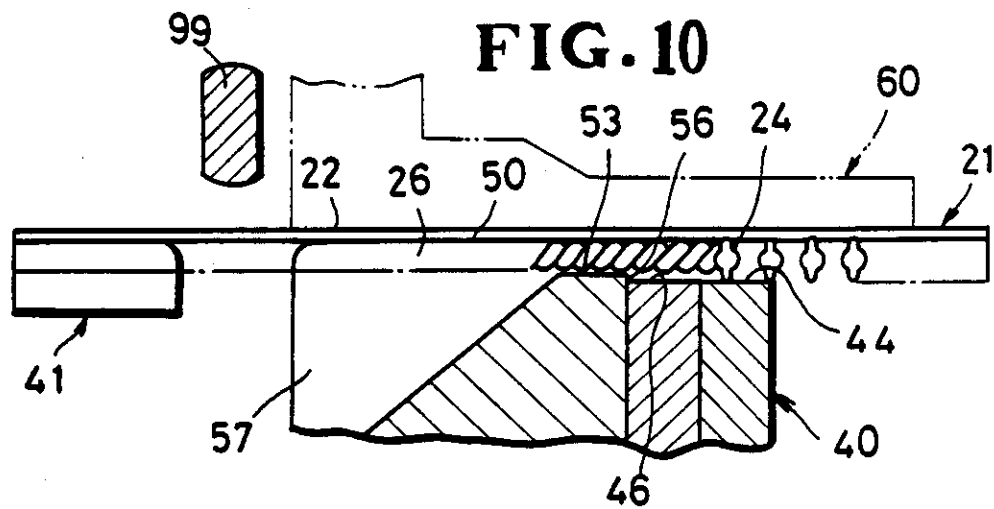
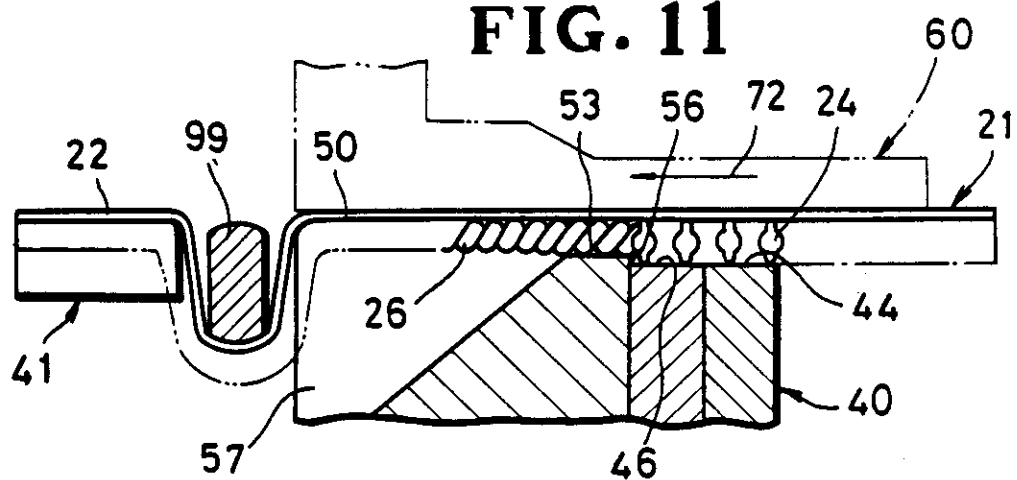
FIG. 9**FIG. 10****FIG. 11**

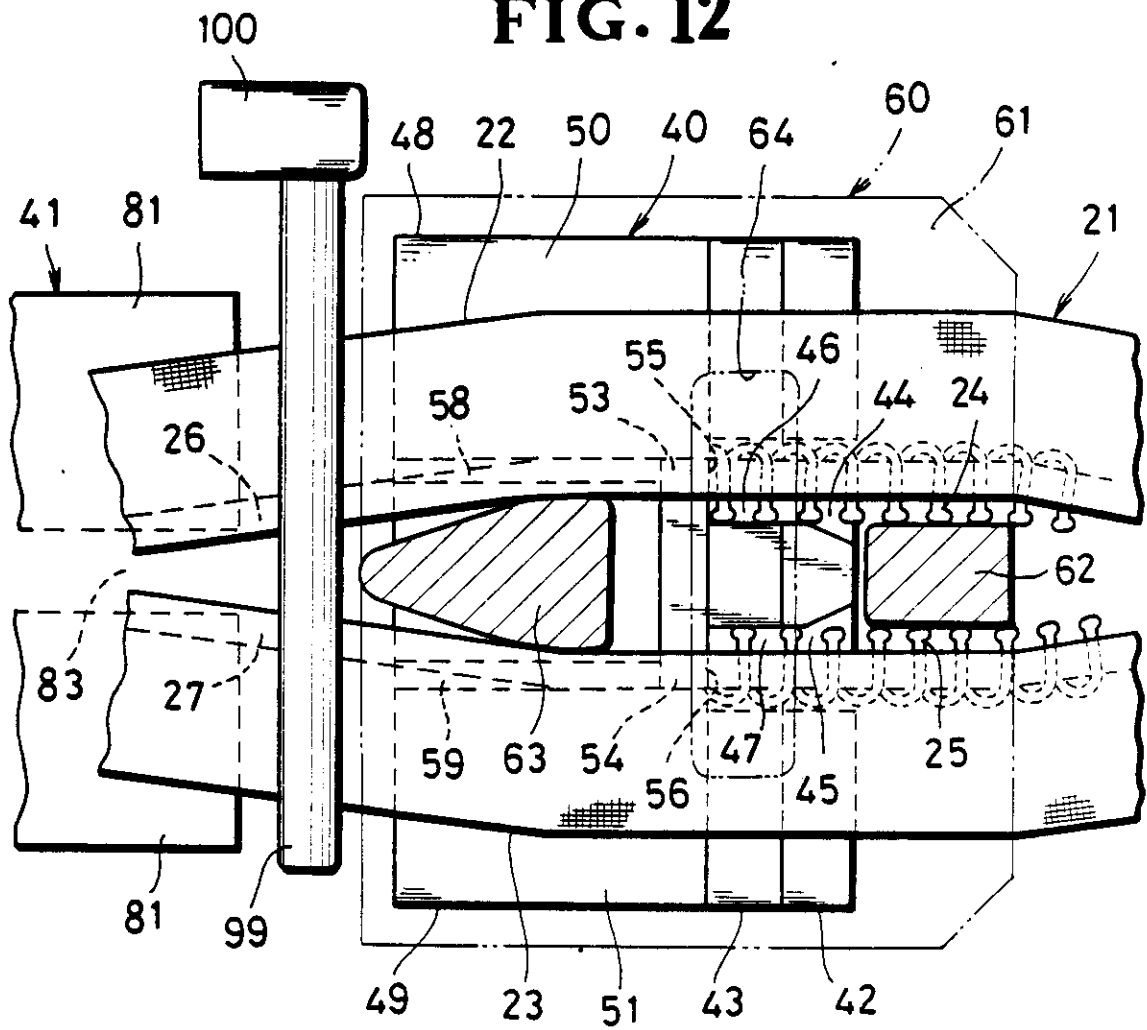
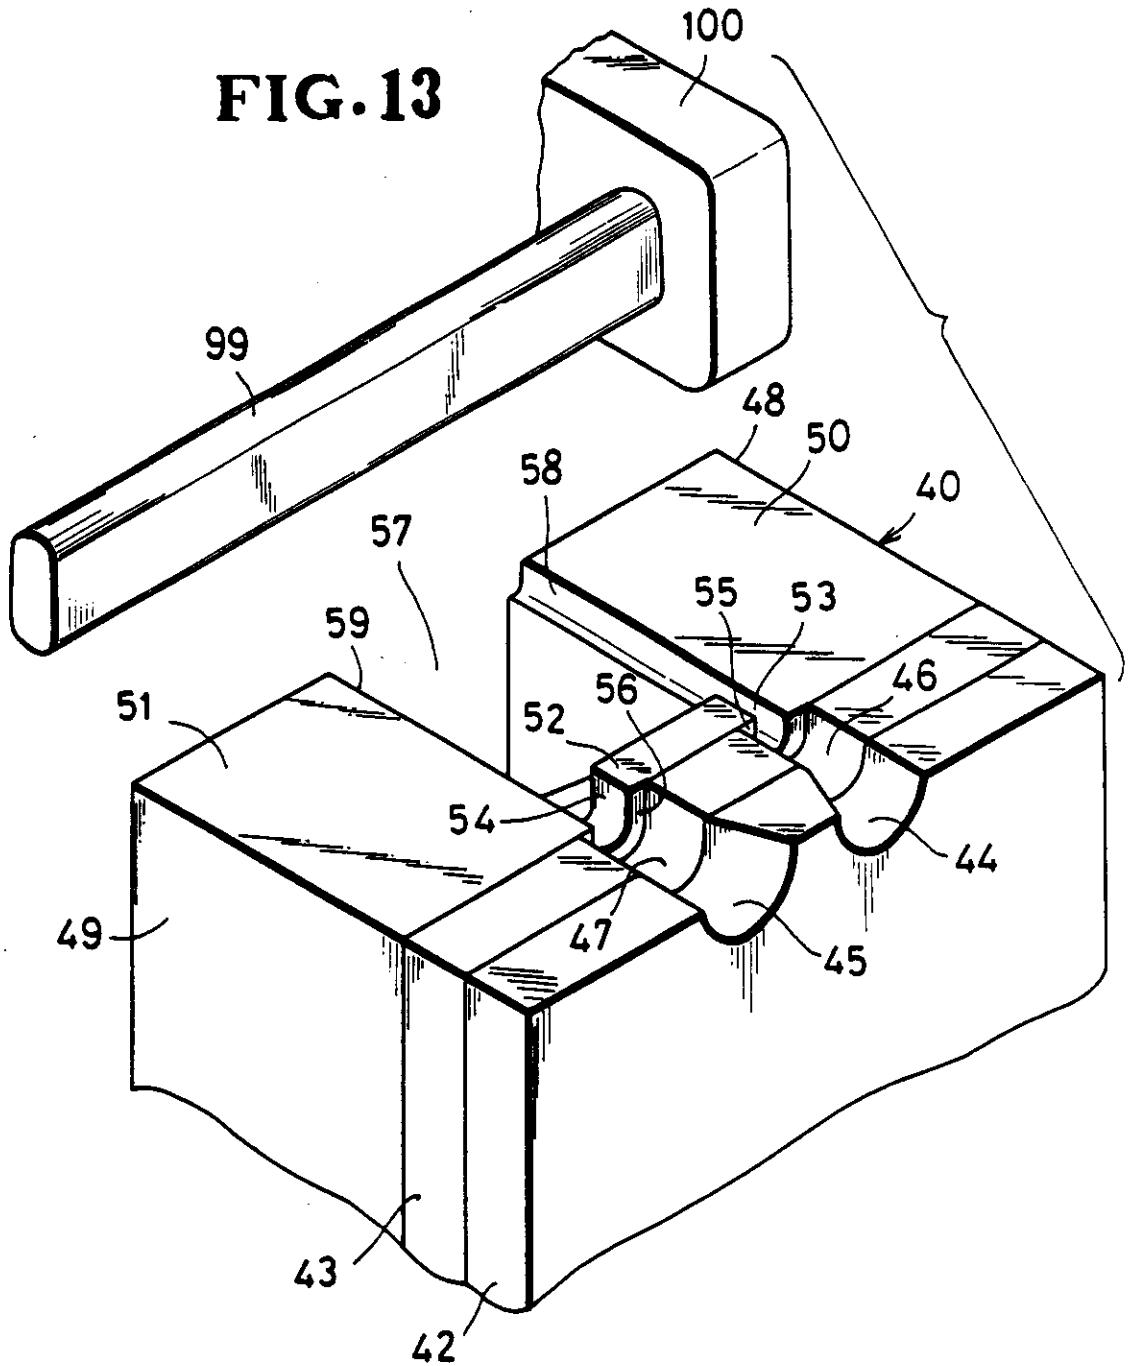
FIG. 12

FIG. 13

12/14

FIG. 16

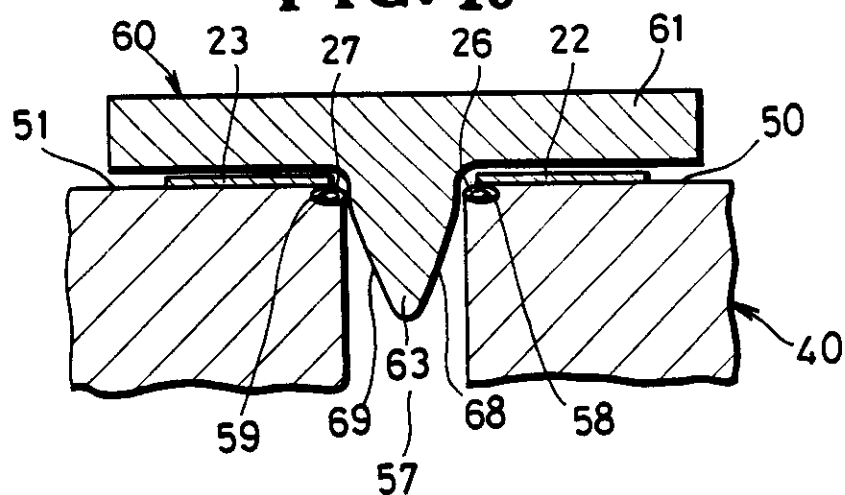


FIG. 17

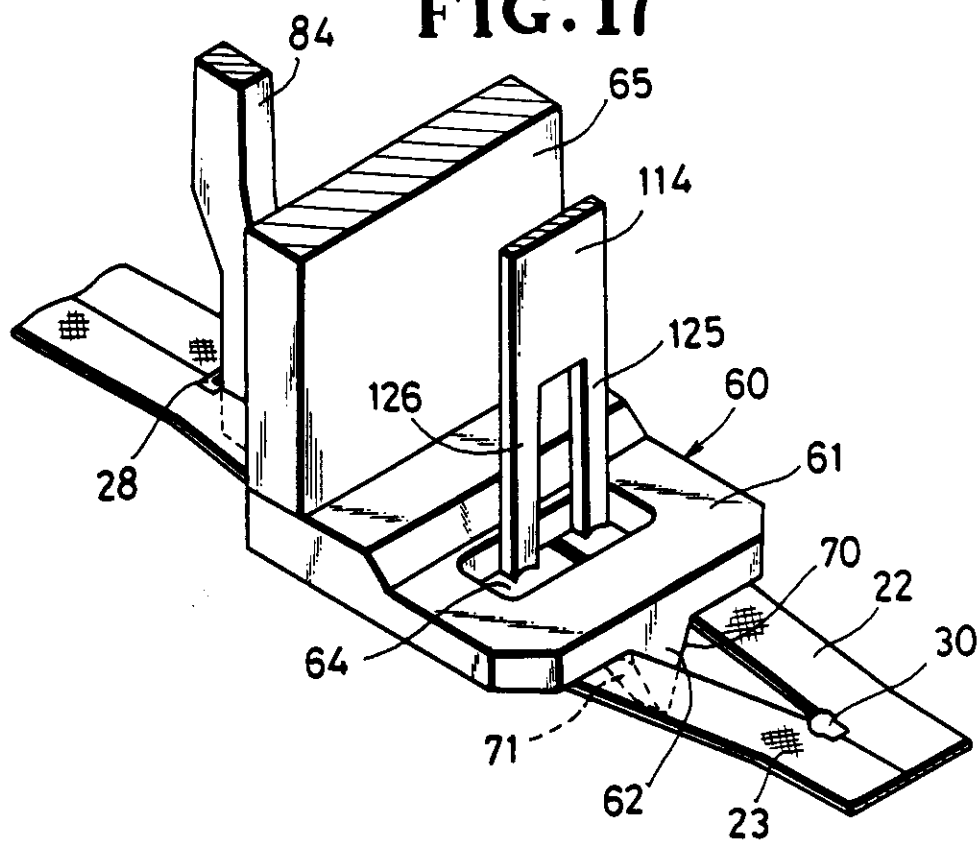


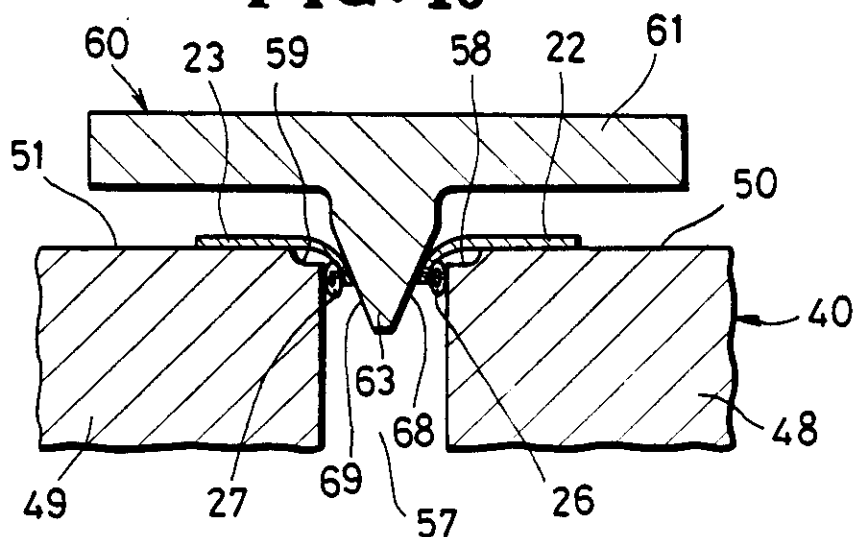
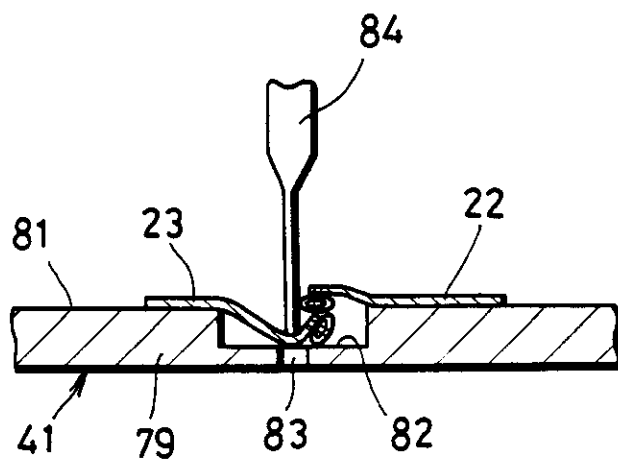
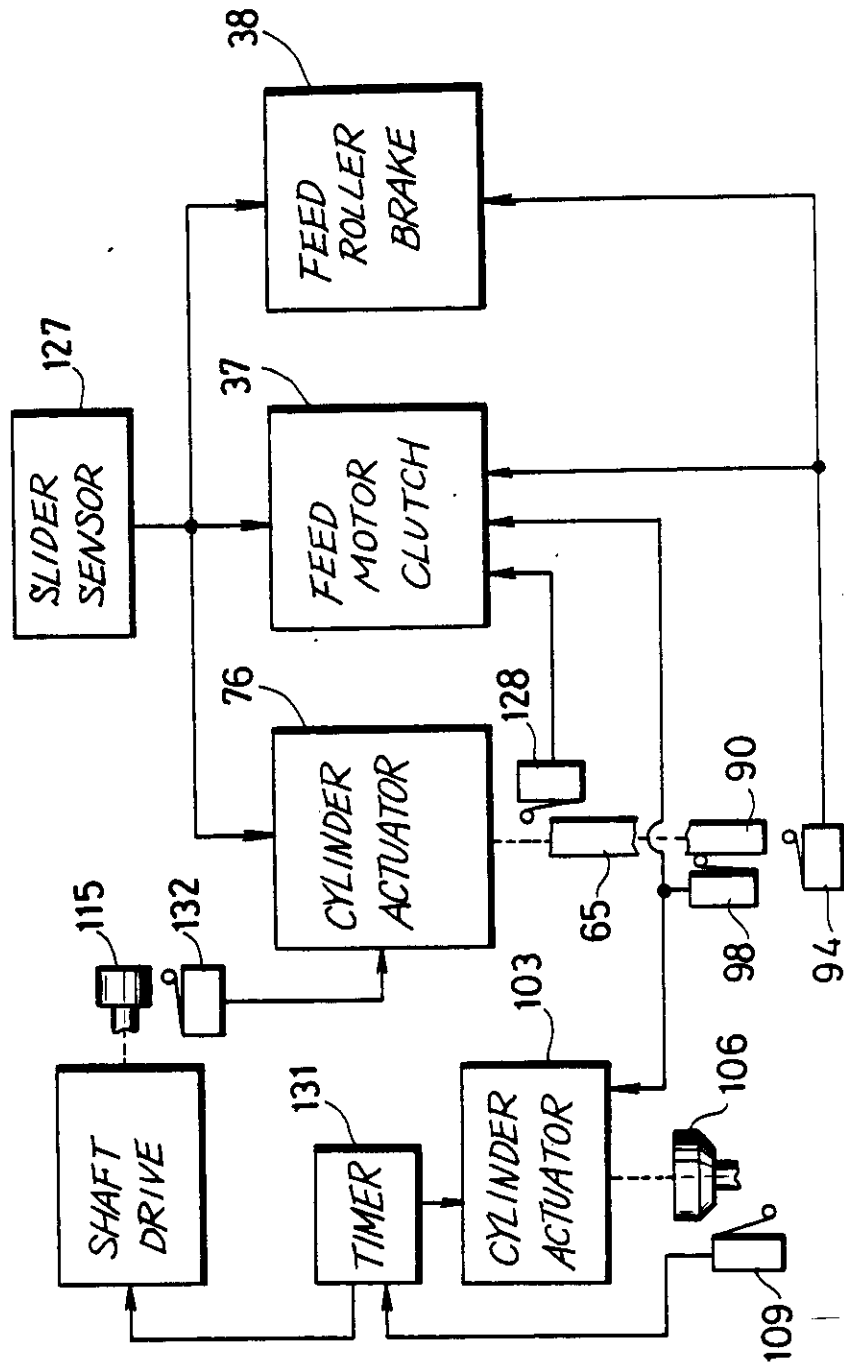
FIG. 18**FIG. 19**

FIG. 20



- 1 -

METHOD OF AND APPARATUS FOR AUTOMATICALLY ATTACHING
TOP STOPS TO A GAPPED SLIDE FASTENER CHAIN
WITH SLIDERS MOUNTED THEREON

The present invention relates to a method of and
an apparatus for automatically attaching top stops to a
longitudinally gapped, continuous slide fastener chain
respectively at ends of longitudinally spaced rows of
5 coupling elements with sliders slidably mounted thereon,
respectively.

For applying top stops to a continuous slide
fastener chain, it has been customary to move upwardly
a tongue-shaped chain spreader between stringer tapes
10 adacent to ends of rows of coupling elements, and then
attach the top stops to the ends of coupling element
rows on the stringer tapes spaced laterally from each
other. The chain spreader tends to loosen and lift
confronting edges of the tapes as they are spread apart.
15 Since there has been no mechanism for holding the tape
edges stably down against lower dies, the tape edges
has been caused by the chain spreader to buckle up.
In the past, top stops have often been merely applied
to the tape edges without checking them for the way in

which they are supported. The tongue-shaped chain spreader as they spread the chain is held in point-to-point contact with coupling elements, so that the chain spreader fails to guide and support the ends of rows of coupling elements stably along the direction of travel of the slide fastener chain. With the above prior process, therefore, top stops cannot be reliably and accurately applied to the edges of the stringer tapes, and the attaching operation cannot be speeded up.

10 In an effort to eliminate the prior difficulties, the applicant has proposed a method of and an apparatus for automatically attaching top stops to a longitudinally gapped, continuous slide fastener chain with sliders slidably mounted thereon. According to the proposed arrangement, confronting edges of stringer tapes where top stops are to be applied are kept parallel to each other with the tapes being stably placed in position by a tape presser. Top stops can automatically be attached to a slide fastener chain reliably under good condition at an increased rate of attachment. In operation, the feed of the chain is stopped when detecting a slider positioned on a pair of coupling element rows and spaced a distance from the ends of the coupling element rows where top stops are to be attached, in the direction in which the chain travels. Then, a chain stopper inserted in a gap in the chain and held against a bottom stop thereon is actuated to move the chain until the ends of the

15

20

25

coupling element rows are positioned on clinching dies. This positioning method is disadvantageous in that varying lengths of spaces or gaps in the chain result in incorrect positioning of the ends of the coupling element rows. Another problem is that a detector for detecting the chain stopper as pushed by the bottom stop in feeding along the chain a constant interval cannot easily be adjusted in position to meet different space lengths.

It is a believed possibility of the present invention to provide a method of automatically attaching top stops to a longitudinally gapped, continuous slide fastener chain while accommodating spaces or gaps of varying lengths in the slide fastener chain.

Another believed possibility of the present invention is to provide an apparatus for carrying out the above method.

According to a first aspect of the invention, there is provided a method of automatically attaching top stops to a longitudinally gapped, continuous slide fastener chain composed of a pair of stringer tapes, pairs of rows of coupling elements mounted respectively on the stringer tapes and longitudinally spaced with gaps therebetween, bottom stops attached respectively to the pairs of rows of coupling elements at ends thereof, and sliders slidably mounted respectively on the pairs of rows of coupling elements, said method comprising the steps of :

- (a) longitudinally feeding the slide fastener chain along a path in one direction;
- (b) stopping the slide fastener chain in response to sensing the slider on one of the pair of rows of coupling elements;
- (c) spreading the stringer tapes transversely from each other at one of the gaps adjacent to said slider;
- (d) feeding the slide fastener chain in said direction until one of the bottom stops adjacent to said one of the gaps is engaged by a chain stop;
- (e) deflecting the slide fastener chain transversely out of said path at a position downstream of said chain stop with respect to said one direction to move a portion of the slide fastener chain downstream of said position longitudinally in a direction opposite to said one direction until the opposite end of said one of the pair of rows of coupling elements is aligned with said clinching
- (f) applying top stops to said opposite end against said clinching dies; and
- (g) feeding the slide fastener chain again along said path in said direction.

According to a second aspect of the invention, there is provided an apparatus for automatically attaching top stops to a longitudinally gapped, continuous slide fastener chain composed of a pair of stringer tapes, pairs of rows of coupling elements mounted respectively on the stringer tapes and longitudinally spaced with gaps

therebetween, bottom stops attached respectively to the pairs of rows of coupling elements at ends thereof, and sliders slidably mounted respectively on the pairs of rows of coupling elements, said apparatus comprising:

- 5 (a) means for longitudinally feeding the slide fastener chain along a path in one direction;
- (b) a pair of spaced front and rear chain guides disposed in said path for guiding the slide fastener chain to move along the path, said front guides having
10 clinching dies;
- (c) a slider sensor for sensing the slider on one of the pairs of rows of coupling elements;
- (d) a chain opening pad disposed in vertically confronting relation to said front chain guide and movable
15 transversely across said path for spreading the stringer tapes transversely from each other at one of the gaps adjacent to said slider in response to the sensing of the latter by said slider sensor;
- (e) a chain stop lever connected to said chain opening
20 pad and disposed between said front and rear chain guides for stopping the slide fastener chain by engaging the bottom stop adjacent to said one of the gaps;
- (f) a chain deflector disposed between said chain
stop lever and said front chain guide and actuatable, in
25 response to the stopping of the slide fastener chain by said chain stop lever, for deflecting the slide fastener

chain out of said path to bring the opposite end of said one of the pairs of rows of coupling

elements onto said clinching dies; and

(g) a top stop applicator for applying top stops to
5 said opposite end of said one coupling element row pair against said clinching dies.

The invention will be described by way of example with reference to the accompanying drawings, wherein :-

10 Figure 1 is a fragmentary plan view of a



longitudinally gapped, continuous slide fastener chain with sliders mounted on spaced rows of coupling elements;

Figure 2 is a vertical cross-sectional view of an apparatus embodying the present invention, the apparatus being in a position prior to operation for top stop attachment;

Figure 3 is a side elevational view of the apparatus shown in Figure 2;

Figure 4 is a front elevational view of a chain opening pad in the apparatus;

Figures 5 and 6 are vertical cross-sectional views of the apparatus of Figure 2, showing different stages of operation for applying a top stop;

Figures 7 and 8 are side elevational views, partly cut away, of a mechanism for elevating and lowering a chain deflector;

Figures 9 through 11 are enlarged vertical cross-sectional views showing successive steps of positioning ends of rows of coupling elements for registry with top end stops to be attached thereto;

Figure 12 is an enlarged plan view, with parts in cross section, of the parts shown in Figure 11;

Figure 13 is a perspective view of an element row end positioner and the chain deflector;

Figure 14 is an enlarged vertical cross-sectional view illustrating the manner in which top stops are attached to the rows of coupling elements;

Figure 15 is a plan view partly in cross section of a slide fastener chain on the apparatus as operated to the position of Figure 6;

Figure 16 is an enlarged fragmentary cross-sectional view taken along line XVI - XVI of Figure 15;

Figure 17 is a fragmentary perspective view illustrative of the way in which the top stops are attached;

Figures 18 and 19 are enlarged fragmentary cross-sectional views showing conditions in which a chain is misplaced jamming certain operating parts of the apparatus; and

Figure 20 is an electrical diagram of an electric control circuit for operating the apparatus of the invention.

The terms "front", "rear", "upstream", "downstream" and the like will be used herein with reference to the direction in which a slider fastener chain is normally fed along through an apparatus according to the present invention.

As shown in Figure 1, a slide fastener chain 21 to which top stops are to be applied comprises a pair of slide fastener tapes 22, 23 having on their inner longitudinal edges longitudinally spaced pairs of rows of coupling elements 24, 25 mounted on a pair of reinforcing core cords 26, 27, respectively, on the longitudinal tape edges. Each pair of rows of coupling

elements 24, 25 has a bottom stop 28 secured to one end thereof. The pairs of rows of coupling elements 24, 25 are longitudinally separated by spaces or gaps 29 which are free of any coupling elements. A slider 30 is slidably mounted on each pair of rows of coupling elements 24, 25 for taking the rows of coupling elements 24, 25 into and out of intermeshing engagement. The slider 30 is shown as being displaced from ends of the rows of coupling elements 24, 25 which are remote from the opposite end where the bottom stop 28 is mounted, thus leaving some of the coupling elements disengaged. A pair of top stops 31, 32, shown by the imaginary lines, will be applied to the ends of the disengaged rows of coupling elements according to the present invention.

In Figure 2, an apparatus 33 for automatically applying top stops to the slide fastener chain 21 has a chain feeder including a feed roller 34 and a presser roller 35 for sandwiching the slide fastener chain 21 therebetween. The feed roller 34 is operatively coupled with a motor 36 through an electromagnetic clutch 37. The feed roller 34 can be stopped by an electromagnetic brake 38. When the feed roller 34 is driven by the motor 36, the slide fastener chain 21 is fed along in the direction of the arrow 39 through the apparatus 33.

The apparatus 33 includes front and rear guides 40, 41 disposed upstream of the chain feeder with respect to the direction of travel of the slide

fastener chain 21 for slidably supporting the stringer
tapes 22, 23. The front guide 40 comprises, as shown
in Figure 13, a pair of vertical plates 42, 43 attached
to each other. The plate 42 has in its upper edge a
5 pair of element guide slots 44, 45 spaced laterally
from each other and having inner faces slightly flaring
in the downstream direction. The plate 43 has in its
upper edge a pair of clinching dies 46, 47 substantially
in registry with the element guide slots 44, 45. The
10 outer faces of element guide slots 44, 45 are aligned
with the outer faces of the clinching dies 46, 47 in
the direction of feed of the slide fastener chain 21.
The plates 42, 43 are followed by a pair of trans-
versely spaced blocks 48, 49 having upper surfaces 50,
15 51, respectively, for supporting the stringer tapes 22,
23, respectively. The blocks 48, 49 are interconnected
by an element stopper 52 positioned adjacent to the
plate 43 and having a pair of recesses 53, 54 and a
pair of element stopping edges 55, 56 extending around
20 the recesses 53, 54, respectively, and facing the
clinching dies 46, 47, respectively. The blocks 48,
49 are separated by a space 57 therebetween and have
a pair of core cord guide steps 58, 59, respectively,
facing the space 57 and extending into the recesses
25 53, 54, respectively, substantially in alignment with
the element guide slots 44, 45 and the clinching dies
46, 47.

The slide fastener chain 21 can be opened by a

chain opening pad 60 (Figures 2 and 4) to spread the stringer tapes 22, 23 laterally apart in parallel relationship at the gap 29 and adjacent coupling elements 24, 25. The chain opening pad 60 has a
5 presser plate 61 and a pair of front and rear legs 62, 63 depending therefrom and spaced longitudinally from each other. The presser plate 61 has a rectangular opening 64 (Figure 17) positioned between the front and rear legs 62, 63 and held in vertical alignment
10 with the clinching dies 46, 47 (Figure 14). The presser plate 61 is supported at its rear end on a lower end of a pad holder 65 which is vertically movable. As illustrated in Figure 12, the front leg 62 has a proximal end of a lateral dimension or thick-
15 ness smaller than that of the proximal end of the rear leg 63 by two times the lateral projection of each coupling element beyond the core cord 26, 27. The front and rear legs 62, 63 have confronting edges 66, 67 inclined away from each other in the downward
20 direction, as shown in Figure 4. In Figures 16 and 18, the rear leg 63 has a downward taper defined by a pair of side faces 68, 69. In Figure 17, the front leg 62 also has a downward taper defined by a pair of side faces 70, 71. When the chain opening pad 60 is fully
25 lowered by the pad holder 65, as shown in Figure 14, the front leg 62 is disposed in front of the front guide 40 and the rear leg 63 is located in the space 57 in the front guide 40, spreading the stringer

tapes 22, 23 widely apart laterally with the inclined side faces 68, 69 and 70, 71.

As shown in Figure 2, the pad holder 65 is vertically slidably supported by a machine frame 75. A fluid cylinder 76 is secured to the machine frame 75 and has a piston rod 77 connected by a compression spring 78 to the pad holder 65. Since the pad holder 65 is resiliently coupled to the fluid cylinder 76, the presser plate 61 of the chain opening pad 60 when lowered can resiliently press the slide fastener chain 21 down against the chain guide 40.

The rear guide 41 comprises a slide base 79 and a tape presser 80 spaced upwardly from the slide base 79. The slide base 79 has an upper surface 81 (Figures 12 and 19) having a longitudinal groove 82 for guiding the sliders 30 on the slide fastener chain 21. The slide base 79 also has a slot 83 in its front end for passage therethrough of a chain stop lever 84, the slot 83 being aligned and communicating with the groove 82. The chain stop lever 84 is generally positioned above the rear guide 41 and pivotably mounted by a pin 85 (Figure 2) on the pad holder 65 for angular movement in the direction of feed of the slide fastener chain 21. A restrictor 86 is secured to the machine frame 75 and supports an L-shaped rod 87. A tension spring 88 is connected between the rod 87 and the chain stop lever 84 for normally urging the latter to swing clockwise against a stopper 89 disposed

in the restrictor 86.

A detector lever 90 is pivotably disposed below the chain stop lever 84 in substantial vertical alignment therewith. The detector lever 90 has an engagement projection 91 on its upper end and a lateral pin 92 near the lower end. The lateral pin 92 rides in a vertical guide slot 93 defined in the machine frame 75. The lower end of the detector lever 90 is positioned immediately above a limit switch 94. The detector lever 90 is normally urged by a spring (not shown) in an upward direction to keep the lower end out of contact with the limit switch 94. The detector lever 90 is also normally urged by a compression spring 95 disposed around a stop 96 to turn counter-clockwise about the pin 92 against a receiver pin 97. At this time, a limit switch 98 is closed by the detector lever 90.

A chain deflector 99 is vertically movably disposed between the front and rear guides 40, 41 for movement into and out of the path of the slide fastener chain 21. The chain deflector 99 extends transversely of the direction of feed of the slide fastener chain 21. As shown in Figures 7 and 8, the chain deflector 99 is supported at one end on an upper end of a holder bar 100 vertically slidably mounted in a guide frame 101 integral with the machine frame 75. The holder bar 100 is normally urged to move downwardly under the force of a tension spring 102 acting between the

holder bar 100 and the guide frame 101. A fluid cylinder 103 is mounted on the guide frame 101 and has a piston rod 104 which extends through a hole defined in a lateral plate 105 projecting from a lower end of the holder bar 100. The piston rod 104 supports thereon a disc 106 and a flange 107 mounted on a distal end of the piston rod 104 and spaced axially from the disc 106. A compression spring 108 is coiled around the piston rod 104 between the disc 106 and the flange 107 for resiliently holding the lateral plate 105 against the flange 107. A limit switch 109 is positioned so that it will be closed by the disc 106 when the fluid cylinder 103 is actuated to extend the piston rod 104 for thereby lowering the chain deflector 99.

A top stop applicator mechanism 110 (Figure 2) has a cutter holder 111 mounting a cutter 112 on its lower end, and a punch holder 113 supporting a curling punch 114 held in vertical alignment with the opening 64 in the chain opening pad 60. The cutter holder 111 and the punch holder 113 are mutually slidably held against each other and mounted on the machine frame 75 for upward and downward movement. A horizontal main shaft 115 is rotatably supported on the machine frame 75 and supports an eccentric pin 116 to which the cutter holder 111 is operatively coupled through a link 117 and a pin 119, and the punch holder 113 is operatively coupled through a link 118 and a pin 120.

The links 117, 118 are attached such that they extend upwardly and downwardly, respectively, from the eccentric pin 116 when the latter is in an uppermost position. When the main shaft 115 makes one revolution, the cutter 112 and the curling punch 114 move downwardly at different speeds. More specifically, the cutter 112 is lowered at a higher speed during a former half of one revolution of the main shaft 115, while the curling punch 114 is lowered at a higher speed during a latter half of one revolution of the main shaft 115. Although not shown, the main shaft 115 has a rear end connected through a clutch to a V-belt pulley rotatable at all times by a motor through a V-belt speed reducer and transmission mechanism. The clutch is automatically disconnected each time the main shaft 115 makes one revolution.

A stopper 121 is horizontally slidably supported on the machine frame 75 for slidable movement in the direction of feed of the slide fastener chain 21. The stopper 121 has a pair of laterally spaced benders 122 (only one shown in Figure 2) engageable with a slanted surface 123 on the lower end of the cutter 112. The stopper 121 is normally urged by a compression spring 124 to move into the path of the cutter 112 and the curling punch 114.

As illustrated in Figure 17, the curling punch 114 includes a pair of laterally spaced punch legs 125, 126 movable into and out of the rectangular

opening 64 in the chain opening pad 60.

In Figure 2, a slider sensor 127 is located in front of the front guide 40 for sensing a slider on the chain 21 as it is fed along over the front guide 40.

5 As shown in Figure 3, a limit switch 128 is mounted on the machine frame 75 and actuatable by the pad holder 65 when the latter is moved upwardly. A wire feeder mechanism 129 shown in Figure 3 serves to feed a flat wire bar 130 intermittently each time a
10 pair of top stop blanks are cut off from the flat wire bar 130 by the cutter 112 as described below.

Operation of the apparatus 33 thus constructed is as follows: Figure 20 shows an electric control circuit for controlling the apparatus 33 for auto-
15 matically applying top stops to the slide fastener chain 21. The slide fastener chain 21 is fed along in the direction of the arrow 39 (Figure 2) by the presser roller 35 and the feed roller 34 which is driven by the motor 36 through the feed motor clutch 37. While
20 the slide fastener chain 21 is being fed along, the slider 30 is guided in and along the slider guide groove 82 in the rear guide 41, and the stringer tapes 22, 23 are guided over the upper surface 81. The slider 30 slides over the rear guide 41 and then the
25 front guide 40, and is detected by the slider sensor 127, which then produces a signal to disconnect the feed motor clutch 37 and actuate the feed roller brake 38 for thereby stopping the slide fastener chain 21.

The signal from the slider sensor 127 is also employed to actuate the fluid cylinder 76 for lowering the chain opening pad 60 and the chain stop lever 84. The front and rear legs 62, 63 of the chain opening pad 60 are forced between the stringer tapes 22, 23 spreading them apart at the gap 29 and adjacent coupling elements 24, 25 as shown in Figures 12 and 15. The stringer tapes 22, 23 are sandwiched resiliently between the presser plate 61 of the chain opening pad 60 and the slide surfaces 50, 51 of the front guide 40 as illustrated in Figure 16. The chain stop lever 84 is inserted downwardly between the stringer tapes 22, 23 through the slot 83 to displace the detector lever 90 downwardly until it actuates the limit switch 94 as shown in Figure 5. The limit switch 94 now issues a signal to the feed motor clutch 37 to connect the same and also to the feed roller brake 38 to release the same. The feed roller 34 is again rotated to feed the slide fastener chain 21.

In case the inner edges of the stringer tapes 22, 23 get jammed between the sides faces 68, 69 of the rear leg 63 and the inner faces of the blocks 48, 49 of the front guide 40 as shown in Figure 18, the chain opening pad 60 is prevented from being lowered further, and hence the limit switch 94 is not actuated.

Similarly, when one of the stringer tapes 23 is placed over the slot 83 as shown in Figure 19, the chain stop lever 84 fails to enter the slot 83, and the limit

switch 94 is not turned on. Therefore, should these malfunctions occur, the slide fastener chain 21 would not start being fed again. An alarm device may be provided for giving an alarm when the slide fastener chain is not fed again a preset period of time after the slide fastener chain has been stopped in response to detection of the slider 30. This enables the operator to check any chain feed failures which would otherwise cause improper attachment of top stops 31, 32.

10 When the slide fastener chain 21 is fed along again in the direction of the arrow 39 (Figure 5), a bottom stop 28 attached to the bottom end of a following pair of rows of coupling elements 24, 25 is brought into engagement with the chain stop lever 84.

15 Since the slide fastener chain 21 is forcibly pulled by the feed roller 34, the chain stop lever 84 is slightly moved counterclockwise about the pin 85 against the resiliency of the spring 88. Then, the lower end of the chain stop lever 84 which engages

20 the projection 91 of the detector lever 90 causes the latter to be turned clockwise about the pin 92 against the biasing force of the spring 95 until the detector lever 84 is held against the stopper 96. The limit switch 98 is now turned off to disengage the

25 feed motor clutch 37, whereupon the slide fastener chain 21 comes to a stop in its free state without being braked by the roller brake 38. The ends of the rows of coupling elements 24, 25 where top stops are

to be applied are positioned downstream of the clinching dies 46, 47 on the front guide 40.

Simultaneously, the signal from the limit switch 98 is employed to actuate the fluid cylinder 103, which then extends its piston rod 104 to lower the chain deflector 99 through the holder bar 100 as illustrated in Figures 7 and 8. The chain deflector 99 as it descends deflects the chain 21 downwardly as shown in Figures 6 and 14. Since the feed roller 34 is not braked but the feed roller 34 and the presser roller 35 are freely rotatable, and the bottom stop 28 is engaged by the chain stop lever 84 upstream thereof at this time, the slide fastener chain 21 that is positioned downstream of the deflector 99 is moved back in the direction of the arrow 72 (Figure 6) by the lowering deflector 99 while rotating back the feed roller 34 and the presser roller 35. The ends of the rows of coupling elements 24, 25 where top stops are to be attached are now brought up against the element stopping edges 55, 56 and positioned in the clinching dies 46, 47, respectively, as shown in Figure 12. At this time, the confronting edges of the stringer tapes 22, 23 are kept parallel to each other by the front and rear legs 62, 63 of the chain opening pad 60. The core cords 26, 27 at the gap 29 extend through the recesses 53, 54 and ride on the steps 58, 59, respectively, on the front guide 40. When the ends of the coupling element rows abut against the stopper

faces 55, 56, the rearward movement of the slide fastener chain 21 is arrested, and the chain deflector 99 is stopped. The downward stroke of the piston rod 104 of the fluid cylinder 103 is determined such that the piston rod 104 continues to descend after the chain deflector 99 has stopped its lowering movement. Such continued downward movement of the piston rod 104 does not lower the chain deflector 99 as the piston rod 104 is not fixed to the holder bar 100 but merely extends through the hole in the lateral plate 105. The chain deflector 99 is only resiliently urged downwardly under increasing forces from the compression spring 108 when it is compressed by the piston rod 104. Accordingly, the slide fastener chain 21 is prevented from being torn off by the chain deflector 99. The compression spring 108 as it is compressed serves to take up errors and variations in the lengths of the gaps 29 in the chain 21. The magnitude of such errors and variations in gap lengths that can be absorbed can be increased by increasing the stroke of the piston rod 104.

At the stroke end of the piston rod 104, the limit switch 109 is actuated by the disc 106 to actuate the fluid cylinder 103 in an opposite direction, that is, to retract the piston rod 104 upwardly for lifting the chain deflector 99 up to its starting position. At the same time, the limit switch 109 energizes a timer 131 (Figure 20), which upon elapse of a preset

interval of time after the chain deflector 99 has started descending, actuates the clutch in the shaft drive mechanism to rotate the main shaft 115 through one revolution.

5 When the main shaft 115 begins rotating about its own axis, the cutter 112 and the curling punch 114 simultaneously start to be lowered at different speeds. The cutter 112 cuts top stop blanks from the flat wire bar 130 as fed by the wire feeder mechanism 129. The
10 top stop blanks are bent by the benders 122 on the stopper 121 into top stops 31, 32 (Figure 12). The cutter 112 is continuously lowered to cause the lower slanted surface 123 to retract the stopper 121 against the force of the spring 124. The curling punch 114 is
15 now moved downwardly at a higher speed through the cutter 112 and the opening 64 in the chain opening pad 60, as shown in Figure 17. The top stops 31, 32 are pushed downwardly by the curling punch legs 125, 126, respectively, until they pierce the stringer tapes 24,
20 25 across the ends of the coupling element rows disposed in the clinching dies 46, 47, respectively, and clinch the top stops 31, 32 around the coupling elements 24, 25. After the main shaft 115 has rotated through one revolution, that is, after the top stops 31, 32 are
25 secured in place to the slide fastener chain 21, a limit switch 132 is actuated by the main shaft 115 to issue a signal for actuate the fluid cylinder 76 in the opposite direction to retract the chain opening pad 60

and the chain stop lever 84 upwardly to their starting position. The completion of upward movement of the pad holder 65 is sensed by the limit switch 128 which delivers a signal to the feed motor clutch 37 to
5 rotate the feed roller 34 again for another cycle of top stop application.

C L A I M S :

1. A method of automatically attaching top stops to a longitudinally gapped, continuous slide fastener chain composed of a pair of stringer tapes, pairs of rows of coupling elements mounted respectively on the stringer
5 tapes and longitudinally spaced with gaps therebetween, bottom stops attached respectively to the pairs of rows of coupling elements at ends thereof, and sliders slidably mounted respectively on the pairs of rows of coupling elements, said method comprising the steps of:
 - 10 (a) longitudinally feeding the slide fastener chain along a path in one direction;
 - (b) stopping the slide fastener chain in response to sensing the slider on one of the pairs of rows of coupling elements;
 - 15 (c) spreading the stringer tapes transversely from each other at one of the gaps adjacent to said slider;
 - (d) feeding the slide fastener chain in said direction until one of the bottom stops adjacent to said one of the gaps is engaged by a chain stop;
 - 20 (e) deflecting the slide fastener chain transversely out of said path at a position downstream of said chain stop with respect to said one direction to move a portion of the slide fastener chain downstream of said position longitudinally in a direction opposite to said one
25 direction until the opposite end of said one of the pair of rows of coupling elements is aligned with said clinching

dies;

(f) applying top stops to said opposite end against said clinching dies; and

(g) feeding the slide fastener chain again along
5 path in said direction.

2. An apparatus for automatically attaching top stops to a longitudinally gapped, continuous slide fastener chain composed of a pair of stringer tapes, pairs of rows of coupling elements mounted respectively on
10 the stringer tapes and longitudinally spaced with gaps therebetween, bottom stops attached respectively to the pairs of rows of coupling elements at ends thereof, and sliders slidably mounted respectively on the pairs of rows of coupling elements, said apparatus comprising:

15 (a) means for longitudinally feeding the slide fastener chain along a path in one direction;

(b) a pair of spaced front and rear chain guides disposed in said path for guiding the slide fastener chain to move along the path, said front guides having clinching
20 dies;

(c) a slider sensor for sensing the slider on one of the pairs of rows of coupling elements;

(d) a chain opening pad disposed in vertically confronting relation to said front chain guide and movable
25 transversely across said path for spreading the stringer tapes transversely from each other at one of the gaps adjacent to said slider in response to the sensing of the

latter by said slider sensor;

(e) a chain stop lever coupled to said chain opening pad and disposed between said front and rear chain guides for stopping the slide fastener chain by engaging the bottom stop adjacent to said one of the gaps;

(f) a chain deflector disposed between said chain stop lever and said front chain guide and actuatable, in response to the stopping of the slide fastener chain by said chain stop lever, for deflecting the slide fastener chain out of said one of the pairs of rows of coupling elements onto said clinching dies; and

(g) a top stop applicator for applying top stops to said opposite end of said one coupling element row pair against said clinching dies.

15 3. An apparatus according to claim 2, said front chain guide including element stopping edges located adjacent to and upstream of said clinching dies, respectively, for positioning said opposite end of said one of pairs of rows of coupling elements in alignment with

20 said clinching dies.

25 4. An apparatus according to claim 2 or 3, said chain deflector extending transversely across said path, including a holder bar on which said chain deflector is mounted, a fluid cylinder having a piston rod, and a spring disposed around said piston rod and connected between said piston rod and said holder bar, said fluid cylinder being actuatable for moving said chain deflector transversely

toward and across said path to deflect the slide fastener chain out of said path under resiliency from said spring.

5 5. An apparatus according to claim 2, 3 or 4, said chain opening pad comprising a presser plate for pressing the stringer tapes against said chain guide and a pair of longitudinally spaced legs mounted on said presser plate and tapered away from the latter for insertion between the stringer tapes to spread them apart, said presser plate having an opening positioned in substantial alignment with
10 said clinching dies.

6. An apparatus according to claim 5, said top stop applicator including a curling punch movable through said opening toward and away from said clinching dies.

15 7. An apparatus according to any one of claims 3 to 6, said slider sensor being disposed in said path downstream of said front chain guide.

8. A method of attaching top stops to a slide fastener chain substantially as described with reference to and as illustrated in the accompanying drawings.

20 9. An apparatus for attaching top stops to a slide fastener chain substantially as described with reference to and as illustrated in the accompanying drawings.

Publication No.
2116629 A dated 28 September 1983

Patent Granted:

WITH EFFECT FROM
SECTION 2(1)

116 OCT 1983

Application No.
8305997 filed on 4 March 1983

Priority claimed:
17 March 1982 in Japan doc: 57/042209

Title:
Method of and apparatus for automatically attaching top stops to a gapped slide
fastener chain with sliders mounted thereon

App Yom. Kogyo/K K (Japan) No 1 Kanda Izumi-cho Chiyoda-ku Tokyo Japan . /

Inventor:
Toyoo Morita 201-23 Kinoshitashin Uozu-Shi Toyama-Ken Japan

Classified to:
E2S

Examination requested: 29 OCT 1983

Address for Service:
Marks and Clerk 57-60 Lincoln's Inn Fields London WC2A 3LS