



(51) International Patent Classification:

G11B 27/031 (2006.01)

(21) International Application Number:

PCT/US2021/047327

(22) International Filing Date:

24 August 2021 (24.08.2021)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/706,537 24 August 2020 (24.08.2020) US

(71) Applicant: **FD IP & LICENSING LLC** [US/US]; 1888 Century Park East, Suite 900, Los Angeles, California 90067 (US).

(72) Inventors: **FAYETTE, Brandon**; 3620 Bagley Ave., Unit 11, Los Angeles, California 90034 (US). **REDDICK, Gene**; 200 Brannan ST, #440, San Francisco, California 94107 (US).

(74) Agent: **RYAN, William E.** et al.; Vorys, Sater, Seymour and Pease LLP, 52 East Gay Street, Columbus, Ohio 43215 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) Title: PREVISUALIZATION DEVICES AND SYSTEMS FOR THE FILM INDUSTRY

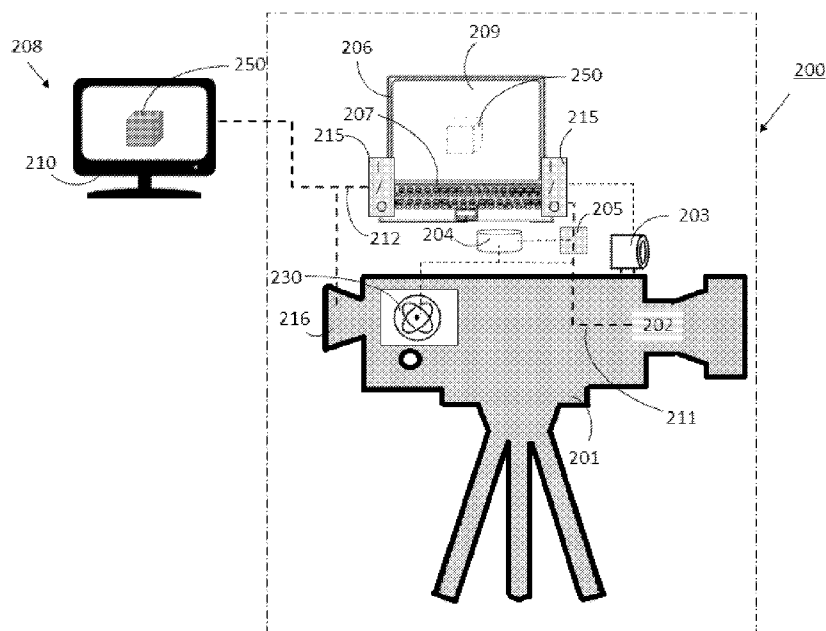


FIG. 2

(57) Abstract: The present disclosure relates to systems that capture a combination of image data and environmental data of the environment. The system uses the environmental data to create a detailed virtual scan of the environment. Computer generated models and images ("assets") are inserted into the detailed virtual environment from the scan. These assets are scaled and placed within the virtual environment at specific locations and having a specific orientation. The scaled and positioned asset is then composited with the real-time video signal allowing a user to view the asset in real-time on a display.

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

PREVISUALIZATION DEVICES AND SYSTEMS FOR THE FILM INDUSTRY

[0001] This application claims priority benefit of U.S. Provisional Patent Application Ser. No. 62/706,537 filed August 24, 2020, entitled “PREVISUALIZATION DEVICES AND SYSTEMS FOR THE FILM INDUSTRY,” the complete disclosure of which, in its entirety is herein incorporated by reference.

BACKGROUND

[0002] In film making, previsualization is the visualizing of complex scenes before they are recorded for a movie or show. Previsualization includes a variety of techniques for the planning and conceptualization of movie scenes that allows a director, cinematographer or video effects supervisor to experiment with different staging and art direction options – such as lighting, camera placement and movement, stage direction and editing, all without having to incur the costs of actual production.

[0003] TV shows and films mix a combination of live actors and real environments with computer-generated imagery (CGI). CGI elements include scenery, props, as well as moving graphics (vehicles, space ships and characters/creatures). Currently, in preparing for and filming these CGI enhanced scenes, a green screen technician is physically present within the set, holding a tall boom with a ball on the end to simulate the height of a particular CGI Asset that will later be added to the final film product using computer animation. Other environmental areas on set may be physically marked with tape to represent where a CGI Asset will be placed or travel. This makes preparation and filming difficult in that a significant amount of time is spent planning and positioning actors in desired locations in relation to hard to visualize CGI Assets.

SUMMARY OF DISCLOSURE

[0004] Various details of the present disclosure are hereinafter summarized to provide a basic understanding. This summary is not an extensive overview of the disclosure and is neither intended to identify certain elements of the disclosure, nor to delineate the scope thereof. Rather, the primary purpose of this summary is to

present some concepts of the disclosure in a simplified form prior to the more detailed description that is presented hereinafter.

[0005] The present disclosure generally relates to a previsualization system that virtually maps a real film set environment and allows insertion of a scaled 3-dimensional CGI asset, e.g., digital vehicles, creatures, etc. in a previsualization video feed so that filmmakers can view all elements of a particular screen before filming. The previsualization system combines a real-time video signal with at least one CGI Asset and presents an augmented video signal to a video display component. Crew members of a filming project including directors, location scouts and actors are able to see the display and coordinate acting directions, body movements and the like considering the augmented video signal, making the filming process more efficient.

[0006] Embodiments disclosed herein include a method for generating a previsualization video signal for digital filming. The method includes with a video module, generating a raw video signal with an image sensor and with an environmental module, generating a 3D model of an environment from environmental data collected by an environmental sensor. The method further includes with an asset module, placing a CGI asset at a specific location within the 3D model of the environment and with a camera tracking module, tracking a position and an orientation of the image sensor based on data received from a motion sensor associated with the image sensor. The method also includes generating an augmented video signal, comprising the raw video signal with the placed CGI asset and displaying on at least one display, the augmented video signal. In a further embodiment, the environmental module is configured to receive a first set of environmental data from a first previsualization device, and a second set of environmental data from a second previsualization device, wherein each of the first previsualization device and second previsualization device are capturing environmental data at different perspectives of the environment. In another further embodiment, the method further includes with a depth occlusion module, occluding features of the raw video signal based on a determined depth of the features. In another further embodiment, the method further includes with a puppeteer module, receiving real-time motion capture data from a motion capture system for

simultaneously animating the CGI asset in the augmented video signal. In another further embodiment the method includes transmitting the augmented video signal to at least one display. In another further embodiment the method includes recording the raw video signal to a storage device. In another further embodiment, the image sensor is a first image sensor of a first previsualization device generating a first raw video signal and a second image sensor of a second previsualization device generating a second raw video signal, wherein each of the first raw video signal and second raw video signal are augmented with the CGI asset based on generated environmental data and a calculated perspective of each associated device. In another further embodiment, the method includes storing the generated 3D model on a server.

[0007] Embodiments disclosed herein may further include a previsualization camera system that includes an image sensor configured to generate a raw video signal and a first environmental sensor configured to take environmental measurements of an environment and generate a 3D model of the environment. The system also includes a motion sensor configured to generate camera tracking data associated with movements of the previsualization camera system and a camera viewfinder configured to display a video signal to at least a camera operator. The system further includes a compositor configured to generate an augmented video signal comprising the raw video signal with a placed CGI asset positioned within the generated 3D model and position of the previsualization camera system wherein the augmented video signal is received by the camera viewfinder and displayed to the camera operator. In a further embodiment, the system includes a data storage medium configured to record the raw video signal. In another further embodiment, the data storage stores camera tracking data. In another further embodiment, the system includes a camera system interface configured to receive supplemental environmental measurements from a second previsualization device comprising a second environmental sensor in communication with the camera system interface, wherein the supplemental environmental measurements are used to increase a fidelity of the 3d model. In another further embodiment, the first environmental sensor is of a first type and the second environmental sensor is of a different second type, wherein the types of

environmental sensors are selected from the group comprising an infrared system, light detection and ranging (LIDAR) systems, thermal imaging systems, ultrasound systems, stereoscopic systems, and optical systems.

[0008] Embodiments also disclosed herein may further include a previsualization system including a camera system including a digital processor, a camera image sensor in communication with the digital processor configured to generate a camera raw video signal, a camera environmental sensor in communication with the digital processor and configured to generate a first set of environmental measurements of an environment as well as a camera display in communication with the digital processor and configured to display a first augmented video signal. The previsualization system also includes a digital previsualization device in communication with the camera system and including a device environmental sensor configured to generate a second set of environmental measurements of the environment. The digital processor generates a 3D model of the environment based on the first and second set of environmental measurements and places a CGI Asset at a position and orientation within the 3D model. The camera display is configured to display a camera augmented video signal comprising the camera raw video signal and the placed CGI Asset. In a further embodiment, the system further includes a storage device configured to record the camera raw video signal. In another further embodiment, the system further includes a motion capture system configured to generate animation data, wherein the processor of the previsualization system animates the placed CGI Asset based on the generated animation data in real-time. In another further embodiment, the system further includes a remote monitor configured to display the camera augmented video signal. In another further embodiment, the previsualization device further includes a device processor, a device image sensor in communication with the processor and configured to generate a device raw video signal and, a device display configured to display a device augmented video signal, wherein the device processor generates a device 3D model of the environment based on the first and second set of environmental measurements and places a CGI Asset at a position and orientation within the 3D model and wherein the device display displays a device augmented video signal comprising

the device raw video signal and the placed CGI Asset. In another further embodiment, the camera environmental sensor is of a first type and the device environmental sensor is of a different second type, wherein the types of environmental sensors are selected from the group comprising an infrared system, light detection and ranging (LIDAR) systems, thermal imaging systems, ultrasound systems, stereoscopic systems, RGB cameras, and optical systems. In another further embodiment, the system includes a server in communication with the camera system and previsualization device and is configured to receive the first and second set of environmental measurements and deliver each set of environmental measurements to each connected previsualization and camera system.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] The following figures are included to illustrate certain aspects of the embodiments, and should not be viewed as exclusive embodiments. The subject matter disclosed is capable of considerable modifications, alterations, combinations, and equivalents in form and function, as will occur to those skilled in the art and having the benefit of this disclosure.

[0010] FIG. 1 illustrates an electronic device for previsualization of CGI assets in accordance with the present disclosure.

[0011] FIG. 2 illustrates an exemplary previsualization camera system in accordance with the present disclosure.

[0012] FIG. 3 illustrates an exemplary previsualization system in accordance with the present disclosure.

[0013] FIG. 4 illustrates an exemplary previsualization system with multiple devices viewing the same environment each having different states of an inserted CGI asset.

DETAILED DESCRIPTION

[0014] A more complete understanding of the components, processes and apparatuses disclosed herein can be obtained by reference to the accompanying drawings. These figures are merely schematic representations based on convenience and the ease of demonstrating the present disclosure, and are therefore not intended to indicate relative size and dimensions of the devices or components thereof and/or to define or limit the scope of the exemplary embodiments.

[0015] Although specific terms are used in the following description for the sake of clarity, these terms are intended to refer only to the particular structure of the embodiments selected for illustration in the drawings and are not intended to define or limit the scope of the disclosure. In the drawings and the following description below, it is to be understood that like numeric designations refer to components of like function.

[0016] The singular forms “a,” “an,” and “the” include plural referents unless the context clearly dictates otherwise.

[0017] As used herein, the terms “generally” and “substantially” are intended to encompass structural or numeral modification which do not significantly affect the purpose of the element or number modified by such term.

[0018] The terms “about” and “approximately” can be used to include any numerical value that can vary without changing the basic function of that value. When used with a range, “about” and “approximately” also disclose the range defined by the absolute values of the two endpoints, e.g. “about 2 to about 4” also discloses the range “from 2 to 4.” Generally, the terms “about” and “approximately” may refer to plus or minus 10% of the indicated number.

[0019] As used herein, the term “CGI Asset” means a digital creation, rendering, or model of an object. CGI Assets include but are not limited to cars, space ships, monsters, creatures, machines, tables, statues, buildings, animals, weapons, and

the like. CGI Assets may be created by a digital artist, graphic designer, and the like.

[0020] As used herein, the term “raw video signal,” means a video signal that is obtained directly from the image sensor of a camera, e.g., capturing the on set environment and the actors working on the scene. As used here, the term “augmented video signal” means a video signal that includes a combination of the raw video signal and at least one CGI asset placed into the environment, e.g., a video signal including the environment, actors, and CGI assets.

[0021] Exemplary embodiments of the present disclosure relate to systems that capture a combination of image data from a video signal along with depth/environmental data of the film set environment. A system uses the depth/environmental data of the immediate film set environment and creates a detailed virtual scan of the same environment (“Virtual Environment”). Computer generated models and images, CGI Assets, are inserted into the detailed Virtual Environment. These CGI Assets are scaled and placed within the Virtual Environment at specific locations while having a specific orientation, and in some cases predetermined animations/movements. The scaled and positioned CGI Asset is then composited with the raw video signal, in real-time, allowing a user of the system to view the CGI Asset within the environment in real-time on a display. As the user moves in the real environment, the CGI Asset may appear to be stationary relative to the real environment or, in situations where the CGI asset is configured with predetermined animations, the CGI Asset may appear to move relative to the real environment, animating inside of that volume. The system can accommodate multiple image and depth capture devices, and combine all of the collected data to increase the fidelity of the virtual environment. Each image and depth/environmental capture device may view the same real world environment from different reference frames and see the CGI Asset from its particular viewpoint.

[0022] Referring now to FIG. 1, there is shown an exemplary embodiment of a previsualization system **10** including a digital previsualization device **100a** configured for use in an environmental mapping and CGI Asset insertion visualization system. It will be appreciated that the various components depicted

in FIG. 1 are for purposes of illustrating aspects of the exemplary embodiments and that other similar components, implemented via hardware, software, or a combination thereof, are capable of being substituted therein without departing from the scope of this disclosure.

[0023] The diagram of FIG. 1, illustrates an example digital previsualization device **100a** including at least one image sensor **102** for capturing visual data, an environmental sensor **103** for capturing environmental data, at least one motion sensor **104** configured to detect an orientation of the digital previsualization device **100a**, a processor **106**, and a storage medium/memory **108**.

[0024] The digital processor **106** is configured to control the operations and components of the digital previsualization device **100a** and may execute applications, apps, and instructions that are stored in the device memory **108** and/or accessible via a communication device **110**. The digital processor **106** can be variously embodied, such as by a single core processor, a dual core processor (or more generally by a multiple core processor), a digital processor and cooperating math coprocessor, a digital controller, a graphics processing unit (GPU) and the like. In some embodiments, the digital processor **104** and memory **108** may be combined within a single chip.

[0025] The at least one image sensor **102** may be, for example and without limitation, a charge-coupled device sensor (CCD) or complementary metal-oxide semiconductor sensor (CMOS) configured to capture visual data and generate a video feed (e.g., a series of images). In other words, the image sensor **102** may be a camera, either analog, digital, or a combination thereof. The image sensor **102** detects and conveys information used to make an image or video that may be stored in memory **108** or sent to another storage medium or device via an onboard communication device **110**. For example, the image sensor **102** may generate a video signal that is sent to another device **100n** via Wi-Fi.

[0026] The digital previsualization **100a** also includes an environmental sensor **103**. This sensor is configured to scan the immediate environment and determine the geometry and spatial configuration of the same. The environmental sensor

103 may operate by capturing depth points used by the system **10** for building the Virtual Environment, including a scaled virtual 3-dimensional model of the Environment. The environmental sensor **103** may be variously embodied as infrared systems, light detection and ranging (LIDAR) systems, thermal imaging systems, ultrasound systems, stereoscopic systems, RGB camera, optical systems or any device/sensor system currently known in the art, and combinations thereof, that are able to measure/capture depth and distance data of objects in an environment. For example and without limitation, the environmental sensor **103** may be an infrared emitter and sensor. Typical infrared emitters project a known pattern of infrared dots into the immediate environment. These infrared dots are not within the visible spectrum of the human eye and generally do not interfere with capturing a raw video signal. The infrared dots are then photographed by either an infrared sensor or image sensor **102** for analysis in determining the geometry and spatial configuration of the immediate environment. In other embodiments, the environmental sensor **103** may be a LIDAR based system. In LIDAR type systems, a pulsed laser is projected into the immediate environment, and the time it takes for the laser signal to return is used to generate a 3-dimensional model of the environment with great accuracy.

[0027] It is to be appreciated that any sensor system or combinations of sensor systems may be utilized as the environmental sensor **103** as each may have advantages based on the physical mechanism utilized for capture. For example, infrared systems may have difficulty capturing an outdoor environment in daylight as the immediate environment will be flooded with infrared light, making it difficult for the sensor to accurately capture the emitted pattern and accurately recreate a Virtual Environment of the geometrical and spatial configuration.

[0028] The motion sensor **104** may be a sensor or combination of sensors which are able to detect motions, orientations, accelerations and positioning of the previsualization device **100a**, so that the position and orientation of the device **100a**, relative to the environment (and Virtual Environment) may be determined. The motion sensor **104** may be variously embodied as a gravity sensor, accelerometer, gyroscope, magnetometer, and the like, or combinations thereof. For example and without limitation, the motion sensor **104** may be an inertial

measurement unit (IMU) which is typically commercially available as a sensing unit including an accelerometer, gyroscope, and a magnetometer.

[0029] A gravity sensor is a motion sensor **104** that is configured to measure an orientation of the digital previsualization **100a** with respect to the direction of gravity and create orientation data regarding the same. The gravity sensor enables the digital previsualization device **100a** (via the processor **106**) to recognize the direction of gravity relative to the device **100a** based, for example, on calculated three-dimensional vectors. The gravity sensor may indicate an orientation, such as a degree of rotation with respect to the direction of gravity, of the digital previsualization device **100a**.

[0030] An accelerometer is a motion sensor **104** configured to detect a change in velocity during a time period and senses an acceleration and create orientation data regarding the same. A three-axis accelerometer may include multiple motion sensors positioned in the x, y, and z-axis directions. The processor **106** of the digital previsualization device **100a** receives from the accelerometer, data values measured in the multi-axis directions as vector values. The processor **106** may then determine a direction in which the digital previsualization device **100a** is rotated or tilted based on values obtained with respect to the three axes.

[0031] A gyroscope is a motion sensor **110** configured to calculate an angle to which the device **100a** rotates with respect to an axis and create orientation data regarding the same. This may be represented as a numerical value. A three-axis gyroscope calculates the degree to which the device **100a** rotates with respect to three axes. Thus, at least one motion sensor, is able to generate information (data) about the position and orientation of the device **100n** and create orientation data regarding the same with respect to the environment.

[0032] In some embodiments, the electronic device **100a** is equipped with a communication device **110** configured to communicate with other digital previsualization devices **100n** (equipped similarly to device **100a**), a server **160**, network cloud **170**, storage devices, and the like. The communication device **110** may include wired communication components, wireless communication

components, cellular communication components, near field communication components, Bluetooth® components, Wi-Fi components, and other communication components to provide communication via other modalities. This list of exemplary communication devices is intended to be exemplary and does not preclude the use of one or more of these components alternatively or in combination or preclude the use of still other communication components that perform substantially the same function in substantially the same way. The environmental data, orientation data, and image data may be transmitted to other connected devices via the communication device **110**.

[0033] The digital previsualization device **100a** may also include a user interface **112** configured to receive commands from a user of the device **100a**. The user interface may include without limitation, a touchscreen device, a keyboard, a mouse, motion sensors, buttons, knobs, voice actuation, headset, hand recognition, gaze recognition, and the like. The user interface **112** may present the user with a graphical interface that may be facilitate operation of the device **100a**, and other various components of the system **10**, or components connected thereto.

[0034] The processor **106** is able to access the device memory **108**, a storage **161** on a remote sever **160**, a cloud based storage **170** containing a database of CGI Assets, or other on-board or remote storage device. As briefly described above, CGI Assets are digital creations, renderings, or models of an object and include a predetermined 3-dimensional shape and dimensional scale. CGI Assets may be defined and generated by a visual effects department/graphical designer and uploaded to the database of CGI Assets for use by the digital previsualization device **100a...n**. In some embodiments, a CGI Asset includes “animation data”, i.e., joint position, rotation, translation, scale, movements, key framing, wherein Key framing defines the starting and ending points of any smooth transitions of animation. The animation data may be compiled into an CGI asset file or may be a separate data file associated with a particular CGI asset. CGI Assets may have multiple animation files associated therefore for different movements (movement of an asset in different directions, different speeds, and the like). As way of non-limiting examples, animation data may include, the flight path of a landing space ship, the flailing arm movements of a destructive monster, and the blowing

movement of a tumbleweed. In some embodiments and described in greater detail below, the animation data associated with a CGI Asset may be manipulated/changed via the user interface **112**, e.g., to speed up/slow down movements of the CGI Asset.

[0035] After 3D mapping the immediate environment, stored CGI Assets are able to be selected, positioned, and appropriately scaled within the 3-dimensional Virtual Environment by a user manipulating the user interface **112**. A user viewing the display **114** of the device **100** sees both the real-time image of the immediate environment as captured by the image sensor **102** and the placed CGI Asset, that is scaled accordingly and of a particular orientation. A user of the device **100a** may physically move around in the immediate environment while the environmental sensor **103** and motion sensor **104** continually capture environmental data and the relative motions of the device **100a**, respectively. The digital previsualization **100a** displays the placed CGI Asset within the captured video signal in its original position and orientation relative to the new real-time position of the device **100a**. That is, the display **114** shows the CGI asset as if it were a real piece of the environment captured by the image sensor **102**. As a non-limiting example, a user may capture the immediate environment of a football field while standing on the 10-yard line and placing the asset on the 50-yard line. The user may then move to the thirty yard line, yet still see the CGI Asset on the 50-yard line and also accounting for any lateral movements thereof.

[0036] In some embodiments and as briefly mentioned above, a CGI Asset may have associated animation data. Here, a starting location for an animated CGI Asset may be selected and the animation associated with the asset may be executed by the system **10**. For example and without limitation, a user of the device **100** may select a starting and/or ending location in the Virtual Environment mapped to the immediate environment and the CGI Asset is configured to move from the starting location to an ending location based on predetermined animation data. In some embodiments, at least one device **100** includes an interface **112** configured to modify the animation data on the fly. A user may be able to adjust the entire animation or a portion/section of the animation. That is, a user be able

to select or create a key frame within the animation data and adjust parameters of the animation data (e.g., speed) before or after the selected/created keyframe.

[0037] Additional digital previsualization devices **100n** that may be equipped in a similar manner to the digital previsualization device **100a** may connect to the previsualization device **100a** directly or indirectly via a local server **160** or internet **170**. It is to be appreciated that while one additional device **100n** is illustrated, any number of devices **100a...n** may be connected thereto without departing from the scope of this disclosure. These additional digital previsualization devices **100n** sync with the environmental data collected and processed by the electronic device **100a** and further supplement the environmental data generated by the first device **100a** with additional measurements (data) generated by the additional devices **100n**. The additional measurements by the additional devices **100n** increase the fidelity of the 3-dimensional model of the environment, making the entire system **10** more accurate. The placed and orientated CGI Assets may be viewed on a display of the additional device **100n** relative to the position and viewing angle of that particular additional device **100n**. That is, each additional device **100n** may have a different view of the environment and CGI asset than the digital previsualization device **100a**, yet the CGI is viewed by each as if it were located in the same place in the real environment.

[0038] In accordance with another aspect of the present disclosure, a previsualization camera system is described. The previsualization camera system, like the previsualization system **10** described above has particular applications in the film industry in light of the industry's increased use of computer generated visual effects, including computer generated characters, vehicles, creatures, and environments. The previsualization camera system allows those working on a film project (movie, TV show episode, etc.), e.g., a director, to see not only what is captured by the cameras on set, but to see a CGI Asset integrated into the camera shot, while maintaining a clean video signal for recording purposes. This allows for increased efficiency in filming and directing sequences as a comprehensive visualization of the sequence is able to be viewed in real-time providing immediate opportunities to adjust camera angles, positioning and the like.

[0039] The camera system also allows for a crew member to “location scout.” That is, before filming, the crew member is able to layout a set, scene, action, or sequence virtually in order to previsualize the work to follow when official production starts on the scouted location. The camera system also makes allowances for distance based filmmaking in situations such as a pandemic or overseas filmmaking. Actors can be captured real-time in one location anywhere in the world and have their movements translated to a CGI Asset, like a virtual puppet, that can be driven in the 3D capture volume as seen by the camera in real time and directed by the voice of the director from across the world. The reverse is also possible in which the director could be off-site and the set, location, and actors could be virtually projected to the director while the real set, actors, and so forth are receiving instructions from around the world. Other aspects and advantages will become clear in the description below.

[0040] FIG. 2 illustrates an exemplary previsualization camera system **200** for use in the film industry, although the camera **201** may have applications other than film. Current state of the art systems include a digital movie camera **201** for digital cinematography that captures footage digitally by taking a rapid sequence of photographs on an internal image sensor (e.g., a CMOS sensor described above). This is different from historical movie cameras which shot on film stock. There are a number of digital video cameras on the market designed specifically for high-end digital cinematography use. These cameras typically offer relatively large sensors, selectable frame rates, recording options with low compression ratios or in some cases with no compression, and the ability to use high-quality optics. These are commercially available from vendors including but not limited to Sony, Red, and Canon and include the Sony CineAlta® series, RED ONE®, Panavision’s Genesis® and others.

[0041] The sequence of images (a video) are typically recorded on a hard drive **204** or flash memory as an image and/or video file (e.g., .jpg, .mov, .mpeg, etc.). These files can be easily copied to another storage device, typically to a large Redundant Array of Inexpensive Disks (“RAID”) connected to an editing system. An editing system may include a computer and/or additional equipment such as switchers, capture and playback devices, encoding devices, color correction

devices and the like. Once data is copied from the on-set storage media (hard drive **204**) to the storage array, the on-set storage media (hard-drive **204**) is erased and returned to the set for more shooting.

[0042] Currently, digital cameras generate a raw video signal **211** which is recorded on a storage medium and displayed on both the viewfinder **216** of the camera **201** and to at least one monitor **210** in an on set video village **208**. The viewfinder **216** of the digital camera **201** allows a camera operator to see, in real-time, exactly what the image sensor **202** of the camera **201** is capturing and recording. The raw video signal **211** generated by the image sensor of the camera **201** is also sent (via wired or wireless transmission) to a video village **208**. A video village **208** is an area on a film set where at least one large monitor **210** is set up so that key film crew members can observe the video footage as it is being filmed. These crew members, including the director and director of photography, will watch the raw video signal in real-time and note (and correct) any potential problems.

[0043] As noted above, there are difficulties in filming a sequence/scene involving CGI Assets, as these CGI Assets are not physically present on the set and are added to the scene well after recording. Difficulties relate to directing an actor's line of sight (i.e., where should the actor look in relation to the CGI Asset) and positioning (i.e., where should an actor stand in relation to a CGI asset). The previsualization system **200** described herein addresses these and other issues.

[0044] In general, the previsualization camera system **200** is able to capture a video signal and associated environmental data and composite the raw video signal with a CGI Asset **250** of predetermined scale so that a filmmaker may "see" the CGI Asset within the scene and provide directions, accordingly. It is to be appreciated that in the exemplary embodiment, a CGI Asset **250** is illustrated as a cube. This is merely a simplification for illustration and the CGI Asset **250** may be of any shape and have associated movements and animations as described above. The previsualization camera system **200** includes a digital video camera **201** with at least one image sensor **202** configured to capture a sequence of images. The image sensor **202** of the digital video camera **201** is similar in some respects to image sensor **102**, and best understood with respect thereto. The

image sensor **202** of the digital camera **201** sends the sequence of images as a raw video signal **211** to a computer **206** via input/output interface **215**. In some embodiments, the previsualization camera system **200** includes an image capture device **205** configured to intercept the raw video signal **211** output of the image sensor **202**. The capture device **205** may be variously embodied such as a capture card hardware to get signal for manipulating. The capture device **205** may be internal to the computer system **206** or may be external hardware in communication with an interface **215** of the computer system. In some embodiments, the raw video signal **211** is sent both to the computer **206** via interface **215** and a storage medium **204** for recording and storage. In this way, the raw video signal **211** generated by the image sensor **202** of the camera **201** is recorded and stored for later processing, e.g., by a visual effects department during post production. As defined above, a raw video signal **211** means a video signal produced directly from the image sensor **202** of the camera **201** without the added CGI Assets as described below.

[0045] The computer **206** may be integrated within the digital camera **201** or positioned close to the camera **201**, e.g., by custom mounting hardware, brackets, braces and the like. In this way, potential interference from Wi-Fi and other signals/frequencies commonly found on a film set are reduced. The computer **206** may be variously embodied without departing from the scope of the present disclosure, for example as a personal computer (illustrated), tablet, smartphone or other known device that hosts a software platform, operating system, and/or applications. The computer system **206** may also be configured to interface with any known camera system **201** and perform the compositing of raw video signals, environmental data, and CGI Assets to create an augmented video feed **212**. That is, the computer system **206** may have plug and play capabilities to connect to and receive digital signals from any camera and/or sensors.

[0046] The computer system **206** includes a processor that may be any of various commercially available processors and may be similar in some respects to the processor **106** of FIG. 1, and therefore may be best understood with reference thereto. The computer **206** also includes at least one user interface **207** and/or display **209** configured to present data related captured by the previsualization

camera system **200**, including displaying the CGI Asset **250**, environmental data, and/or the video signal from the image sensor **202**. The user interface **207** also allows a user to input commands into the computer **206** for monitoring and controlling the various components of the previsualization system **200**. In the exemplary embodiment the user interface **207** is a keyboard, however it is to be appreciated that other user interfaces may be substituted herein, e.g., touch screen interfaces, a computer mouse, and the like. The computer **206** may also host an operating system including but not limited to Windows®, Linux®, Apple®, Android® or an in-house created operating system. In some embodiments, the computer includes a graphical processing unit (GPU) configured to process video signals generated by at least the image sensor **202**.

[0047] The previsualization camera system **200** also includes at least one environmental sensor **203** mounted to either the digital camera **201** or ancillary components/mounting brackets, hardware, and the like. The environmental sensor **203** is configured to capture the geometry and spatial configuration of the immediate environment, e.g., creating depth points, and may be similar in some respects to the environmental sensor **103** of FIG. 1, and therefore may be best understood with reference thereto. The environmental data captured by the environmental sensor **203** is sent to the computer **206**, e.g., via interface **215**, for processing. The computer **206** uses the environmental data continuously and/or periodically generated by the environmental sensor **203** to create a 3-dimensional model/mesh of the immediate environment ("Virtual Environment"). As will be explained in greater detail below, the computer **206** is able to access a database of CGI Assets **250** (vehicles, characters, creatures, props, scenery, and the like), wherein each CGI Asset is dimensionally defined, and insert the CGI Asset **250** into the generated virtual environment such that a user of the system viewing a monitor **210** may view the CGI Asset placed in the film since captured by the image sensor **202**.

[0048] The digital camera **201** is generally configured to receive a variety of different and interchangeable optical lenses. In filmmaking, camera lenses have a significant impact on the look of the images and the recording the visual story that a filmmaker is trying to establish. Lenses include but are not limited to wide-angle

lenses, fisheye lenses, and zoom lenses. Two fundamental parameters of an optical lens are the focal length and maximum aperture. The lens' focal length determines the magnification of the image projected onto the image plane, and the aperture the light intensity of that image. For a given photographic system the focal length determines the angle of view, short focal lengths giving a wider field of view than longer focal length lenses. A wider aperture, identified by a smaller f-number, allows using a faster shutter speed for the same exposure. A side effect of using lenses of different focal lengths is the different distances from which subjects can be framed, resulting in a different perspective. Given the different perspectives that relate to different lenses, calibration of the environmental sensor **203** to the particular optical lens in use on the camera **201** may be needed. Calibration to the focal length, aperture, zoom field of view, lens type and/or camera film back are calculated to ensure that the CGI asset is properly scaled and positioned within the augmented video signal. Calibration may include modifying the parallax as the imagery, as changing a lens modifies the parallax, e.g., a wide angle lens may make buildings on the peripheral look curved.

[0049] In some embodiments, a companion application/module is configured to run on the computer system **203** which includes a database of optical lenses and preset calibration values (focal length, zoom, aperture, lens type, camera film back, camera focal plane, camera sensor size). When an optical lens on the camera **201** is changed, a user of the companion application may select the new optical lens which calibrates the camera system **200** such that the data from the environmental sensor **203** and raw video signal **211** from the camera **201** include a substantially similar scale. This allows for proper placement and viewing of an inserted CGI Asset **250** as the captured environmental data will proportionally comport with the captured image data. Also factoring into the calibration calculation is the size of the image sensor **202** of the digital video camera **201**, as different cameras may have differently sized image sensors that may contribute to a larger or smaller field of view.

[0050] The previsualization camera system **200** also includes a motion sensor **230** mounted to the camera **201** such that the position, orientation, and movements of the camera **201** may be monitored, tracked, and stored. In this way, the

previsualization camera system **200**, with reference to an origin, can calculate a position and orientation of the camera **201** in relation to the generated 3-dimensional model of the environment. All camera movements (transforms) are tracked and stored so that the position of the camera with respect to what was filmed (and captured environmentally) is known. This aids the visual effects artists for adding the final high- resolution CGI Assets into the raw video signal to create the film product as there is little to no guessing on how to line up effects, visually. So for example at a specific frame in the video signal, the CGI Asset **250** position and rotation is known as the camera **201** position and rotation is known in relation to the mapped Virtual Environment. As the camera transform positions and rotations are captured and tracked by timestamp, but may not match up exactly to the timestamp of the current camera frame, the exact position of the virtual camera, and thus the relative position of the CGI assets, can be interpolated between the closest recorded camera transform captures. Thus the camera image, the camera position and rotation, the virtual camera displaying the image on the compositor, and all the CGI Assets are synchronized to an accurate position.

[0051] In some embodiments, the previsualization camera system **200** also includes input/output interface **215** configured to send data collected by the camera **201** and various sensors (e.g., sensor **203**) and/or send a video signal augmented with a positioned CGI Asset (Augmented Video Signal **212**). For example, the computer **206** combines the raw video signal **211** from the image sensor **202** of the camera **201** with the 3-dimensional model of the environment constructed from the environmental data to augment a CGI Asset into an Augmented Video Signal **212**. This Augmented Video Signal **212** may be sent to the viewfinder **216** of the camera, such that the camera operator sees the CGI Asset while filming with the camera **201**. Simultaneously, the Augmented Video Signal **212** may be sent to a monitor **210** of the video village **208** for crew members to see, in real-time, the view of the camera **201** including the CGI Asset **250**.

[0052] In some embodiments, the Augmented Video Signal **212** is recorded to a storage medium, such as storage medium **204**. During filming, a raw video signal **211**(without the low resolution CGI asset) and an augmented video signal **212** (with the low resolution CGI asset) of the same sequence/scene is captured. In the

same way that the previsualization system **200** allows the director to best direct the actors in reacting to CGI Assets **250** that are not really there, the augmented video signal **212** provides guidance to the visual effects department that processes the raw video signal **211** and adds the high definition visual effects. That is, sometimes there are difficulties experienced by post production visual effects artists in determining the best positioning of high resolution CGI Assets. Having the augmented video signal **212**, which previously aided the actors in positioning and reacting to the CGI Asset, facilitates the process of placing the final visual effects in the raw video signal to create a final product.

[0053] In accordance with another aspect of the present disclosure and with reference to FIG. 3, an exemplary previsualization system **300** for the film industry is provided. While the present disclosure describes the previsualization system with respect to filming movies and TV shows, it is to be appreciated that the present disclosure is amenable to other like applications. It will be further appreciated that the various components depicted in FIG. 3 are for purposes of illustrating aspects of the exemplary embodiment, and that other similar components, implemented via hardware, software, or a combination thereof, are capable of being substituted therein. The system **300** is configured to combine a raw video signal generated by a digital camera **201** with a CGI asset placed in a 3-dimensional model of the filmed environment.

[0054] As shown in FIG. 3, the system **300** includes a central system represented generally as the computer system **206**, which is capable of implementing the exemplary method described below. As described above, the computer system **206** may be variously embodied without delineating from the scope of the present disclosure. The exemplary computer system **206** includes a processor **306**, which performs the exemplary method by execution of processing instructions **310** that are stored in memory **308** connected to the processor **306**, as well as controlling the overall operation of the computer system **206**. In some embodiments, the processor **306** and memory **308** may be combined in a single chip.

[0055] The various components of the computer system **206** may all be connected by a data/control bus **320**. The processor **306** of the computer system **206** may be in communication with an associated data storage **301**, digital video camera **201**/ image sensor **202**, environmental sensors **203**, motion sensors **230** and other digital previsualization devices **100a...n** via a communications link **342**. The processor may also be in communication with other components including a server **160**, a cloud network **170**, a video village **208**, and a viewfinder display **216** via link **343**. While each component is illustrated as connecting to the computer via one of the two illustrated links **342**, **343**, it is to be appreciated that the number of links **342**, **343** is not limiting and that any component may connect to the processor any communication link. A suitable communications link **342**, **343** may include, for example, a proprietary communications network, infrared, optical, or other suitable wired or wireless data communications.

[0056] The instructions **310** include a video module **330** configured to receive and process a raw video signal (e.g., raw video signal **211**) from the image sensor **202** digital video camera **201**. The raw video signal **211** is an electronic recreation of moving visual images in the form of encoded digital data. The raw video signal may be characterized by the number of pixels supported horizontally, e.g., 1080P, also known as HD, 2K and BT.709. In prior art digital video cameras, the raw video signal **211** is passed directly to the viewfinder **216** allowing the camera operator to see the raw video signal **211**. In some embodiments, the raw video signal **211** from the image sensor **202** is split, wherein the raw video signal is sent both to the computer **206** where it is received and processed by the video module **230**, and to a storage medium, such as storage medium **204** or **301**.

[0057] In some embodiments, the video module **330** is configured to change the video coding format of the raw video signal **211**. That is, the coding format of the raw video signal **211** received from the image sensor **202** of the camera **201** is changed by video module **330**, and the newly formatted raw video signal is sent to the displays of the viewfinder **216** or video village **208**. Examples of video coding format include but are not limited to H.262 (MPEG-2 Part 2), MPEG-4 Part 2, H.264 (MPEG-4 Part 10), HEVC (H.265), Theora, RealVideo RV40, VP9,

and AV1. In other embodiments, the video module **330** is configured to change the video coding of the video signal.

[0058] In yet still other embodiments, the video module **330** is configured to change the compression of the raw video signal **211**. That is, the raw video signal **211** may be compressed to make the video file size smaller than its original format. In embodiments wherein the video module **330** compresses the raw video signal **211**, the processing of the compressed raw video signal by the processor **306** and other devices/modules may be faster compared to the uncompressed raw video signal **211**. The video module **330** may also optimize performance characteristics of the raw video signal **211**, for example and without limitation the number of frames per second (FPS), video quality, and resolution. The optimization allows the raw video signal to be processed in a more efficient and faster manner, making the operation of the system **200** smoother.

[0059] The instructions **310** also include an environmental module **332** configured to receive environmental data from one or more environmental sensors **203** mounted to the camera **201**, or otherwise provided as a reference thereto, as illustrated with respect to FIG. 2. The environmental module **332** uses the environmental data obtained by the environmental sensors **230** and determines the geometry and spatial configuration of the immediate environment by locating geometrical objects and/or points and determining a distance between those objects and/or points. The environmental module **332** uses the environmental data continuously generated by the environmental sensors **203** to create a 3-dimensional model/mesh of the environment (Virtual Environment). In some embodiments, the environmental module/ environmental sensor, periodically (rather than continuously) generates and updates the environmental data and Virtual Environment. In some embodiments, the environmental module **332** uses photogrammetry algorithms to generate the Virtual Environment of the immediate environment using one or a combination of the video signals generated by the camera and environmental data generated by the environmental sensor. For example, multiple photographs from one or both of the image sensor and data sensor may be stitched together to build a 3-dimensional model of the immediate environment. In other embodiments, point data, e.g., a point cloud, generated from

the points observed in the real environment (either object features or infrared point illumination) is converted to a mesh (polygon or triangle mesh) model representing the real immediate environment.

[0060] In some embodiments, the environmental module **330** is configured to change the level of detail (LOD) of the generated 3D model, including but not limited to geometry detail and pixel complexity within the Virtual Environment. Generally, in computer graphics, accounting for the LOD may include decreasing the complexity of the 3D model representation. LOD techniques increase the efficiency of the 3D rendering by decreasing the workload on the graphics processing.

[0061] In some embodiments, the environmental module **332** is configured to receive environmental data from other devices in communication with the previsualization system **300**. For example, the environmental module **332** may receive environmental data from the environmental sensor **203** attached to the camera **201** and from additional digital previsualization devices, such as digital previsualization devices **100a...n**, described in greater detail above with respect to FIG. 1 and each including an environmental sensor **103**. In some embodiments, the environmental module **332** is configured to receive environmental data from a server **160** and/or cloud network **170** provided to the server and cloud by connected devices, **100a...n**, **203**.

[0062] The instructions **310** also include an asset module **334** configured to retrieve CGI Assets (e.g., CGI Assets **250**) and insert selected CGI Assets into the 3-dimensional modeled environment (Virtual Environment) generated by the environmental module **332**. The CGI Assets **250** may be stored in a database on the storage device **301** or accessible to the asset module **334** via cloud storage or removable storage **161** in communication with server **160**. The CGI Assets **250** within the database are defined as having a 3-dimensional shape and dimension. For example and without limitation, a CGI Asset may be CGI dragon model, having a 3-Dimensional body and predetermined dimensional scale, i.e., the dragon may be configured to have a size of about 50 meters in length. In this way, the CGI dragon would appear much larger than a typical human filmed standing next to the

creature. In some embodiments, CGI assets may be uploaded directly or remotely (via the cloud **170** or remote server **160**) as desired and immediately accessible to the asset module **334**. Animation data may also be incorporated into the CGI Asset file and/or a CGI Asset **250** may be associated with one or more animation files, including sequences of movement, keyframes, e.g., animation joint position, rotation, translation, scale. Vertex world position and scale are stored. Texture UV UDIM tile data are stored, timestamp is stored, frame time is stored, animation curve data and keyframes. For example, if a director on set would like to have a new CGI Asset **250** enter the scene, the director could have the visual effects team upload the desired CGI Asset **250** to the system **300** via the cloud **170**. The director then has the ability to immediately place the new CGI Asset within the scene and adjust the filming and direction of the actors accordingly. This also works for sets, environments, and set extensions. In some embodiments, the asset module **334** is configured to change the level of detail (LOD) of the CGI Asset **250**, including but not limited to geometry detail and pixel complexity within the Asset. LOD techniques increase the efficiency of the 3D rendering by decreasing the workload on the graphics processing. In some embodiments, a user may modify the animation data associated with the CGI asset, e.g., to speed up or slow down all of or portions of the predetermined movements.

[0063] The instructions **310** also include a camera tracking module **336** configured to determine the position of the camera **201** with respect to the 3-dimensional model generated by the environmental module **332**. The camera tracking module **336** receives real time spatial tracking data of the camera from the motion sensors **230** positioned on the camera **201** or camera rig. In this way, as the camera operator moves the camera **201** to capture different angles of the environment and scene, the calculated movement of the camera **201** by the camera tracking module **332** is accounted for in the display of the CGI asset in the augmented video signal. In other words, the tracking of the camera **201** ensures that while the environment and perspective of the camera is changing, the placed CGI Asset **250** remains in its selected position, although viewed in respect to the changed camera perspective. In some embodiments, the camera tracking module **336** triangulates the position of each device, camera **201** and previsualization

devices **100a-n** based on visual matching to the real time 3-dimensional scan from all devices (camera **201**, previsualization devices **100a-n**).

[0064] In some embodiments, a lighthouse device **360** is configured to track the position of the camera **201** and each previsualization device **100a-n**. The lighthouse device **360** may be variously embodied. In some embodiments the lighthouse device **360** includes at least one camera or environmental sensor that detects the presence and position of a user or device within the set. The at least one camera (image sensor) or environmental sensor may be similar to the image sensor **201** and environmental sensor **203** and best described with reference thereto. The lighthouse device **360** may be positioned off set such that the camera crew and/or their devices **100** may be within the view of a camera on the lighthouse device **360**. The lighthouse device **360** sends the positioning data related to each user and/or device captured to the camera tracking module **336** for processing the position of each device. In some embodiments, the lighthouse device **360** includes a unique marker, such as a QR code, physical prop or object (“spatial anchor”) that each device (camera **201** and previsualization devices **100a-n**) is able to view with its respective image sensor. In these embodiments, the camera tracking module **336** triangulates the position of each device, camera **201** and previsualization devices **100a-n** based on video signals from multiple devices in real time using a spatial anchor. In some embodiments, the spatial anchor may be a virtual anchor. Without a lighthouse device **360** or similar system, each device **100a-n** would have its own view of where CGI Assets are placed, and any change or positioning made on one device would not necessarily be reflected in the same way on any other devices **100a-n**. A lighthouse device **360** provides a shared view of the position and rotation of the objects that in some embodiments, underpins the entire system.

[0065] In some embodiments, the camera movements calculated by the camera tracking module **336** are recorded in a storage medium, such as the storage medium **161**. After the raw video signal of a scene is recorded, the raw video signal and camera movements may be given to the special effects department for finalizing the scene, e.g., adding hi-resolution CGI assets to the raw video signal. Having the coordinates of the camera **201** as it is filming the sequence is generally helpful to the visual effects team in finalizing the shot in

terms of knowing perspectives, angles, etc. of things in captured in the scene. The positioning data may be recorded as an FBX file or 3-dimensional asset file as described above.

[0066] The instructions **310** also include a depth occlusion module **338** that is able to determine whether objects on set should be placed in front of or behind a CGI Asset. Conventional Augmented Reality systems have trouble deciphering depth of objects in relation to CGI Assets. For example, if an actor walks into the area of the set being filmed, the actor is typically placed over the CGI Asset **250** in the composite image as a default. This makes directing the actors and filming more difficult as the composite image does not show the desired depth of the actor/CGI Asset relationship. Conventional methods to solve depth occlusion issues involve the use of a body recognition module. These modules are provided information of an actor and a CGI graphic. It can calculate where a person is, and where the CGI asset is and place the person or CGI asset accordingly. While this approach works for a single device, this does not function well with multiple devices. In the present situation, a compositor **340** generates the augmented video signal based on the data provided from each module. That is, the compositor receives the raw video signal from the camera feed and CGI Assets and does the occlusion here. While each device may have native occlusion function in relation to its own camera feed or system, the ability to process the data in real time is extremely processor intensive and involves a lot of data. While this may be sufficient for a single device, the data processing for a system without a native occlusion function, e.g., a compositor or computer, becomes difficult.

[0067] In some embodiments, the depth occlusion module **338** is configured to calculate a depth for pixels in the raw video signal **211** and remove those pixels that are calculated as being behind the positioned CGI Asset **250**. This enables the CGI asset to be fully interactive having the ability to occlude and/or be occluded by objects and actors in the real scene. The image sensor **202** of the digital camera **201** may capture an actor walking at a distance across the field of view of the digital camera **201**. A CGI asset digitally placed in the forefront of virtual environment is able to hide the walking actor as he or she walks “behind” the CGI Asset. If the image sensor **202** of the digital camera **201** captures an actor walking at a distance

that is in front of the placed CGI asset, the walker occludes at least part of the CGI asset during that portion of the walking path. Without the depth occlusion module **338**, the CGI asset will simply overlay the video images and always appear in the forefront.

[0068] In some embodiments, the depth occlusion module **338** is in communication with the environment sensor **203** and/or the digital 3-dimensional model of the environment and receives signals generated therefrom. The depth occlusion module **338** may render the 3-dimensional model as a transparent mask that hides virtual objects. Occlusion is generally difficult because typical Augmented Reality systems do not have the ability to perceive its environment precisely or quickly enough for realistic occlusion. However, in the present previsualization system **300**, depth occlusion is facilitated by having multiple devices providing environmental data to the system **300**, e.g., device **100a** with environmental sensor **103** supplements the environmental data provided by environmental sensor **203** most likely at a different perspective of the same environment.

[0069] In some embodiments, depth occlusion module **338**, is configured to generate a digital avatar of a person (avatar data) in view of a device, e.g., device **100a**. That is, the current position of a person (actor) is tracked and a human avatar is created that tracks the actor's movement at the joint level. The limited avatar data is then able to be propagated to the other devices **100n**, and the compositor **340** for creating the augmented video signal. The avatar data may be associated with an occlusion mesh i.e., instructions for the compositor **340** to cut a hole in the video feed that is the shape of the avatar. That is, an occlusion mesh can clear (remove) any pixels with a depth further from the camera than the object. In other words, a corresponding avatar, created from the avatar data is generated on the compositor **340** with an occlusion mesh. The position of the occlusion avatar matches that of the actual actor, but the occlusion mesh cuts out any CGI Assets that are located behind it. The occlusion avatar thus becomes just another CGI object on the compositor having associated depth and position data, In this way, portions of images in the raw video signal **211** are displayed where avatar data

instructs a hole to be present. In other words, the hole of the avatar data, is filled with the raw video feed signal **211** that is behind the avatar.

[0070] In some embodiments, the immediate environment is scanned and a spatial map of primarily static objects (walls, floors, furniture) is generated. Prior to filming the spatial map is saved as an FBx file and imported to the composition **340**. An occlusion mesh may be applied to objects in the spatial map and any pixels within a depth further from the camera than the object may be removed. Since the occlusion mesh on an object (an avatar being tracked to an actor in the scene, or on a cube representing a wall) removes all pixels behind it, when a device renders something with an occlusion mesh it cuts out all the pixels where the avatar or wall would have been, leaving just empty (black) pixels in the rendered image from that device. When the final image gets composited the compositor effectively cuts out any CGI Assets that would be behind the object in the camera image.

[0071] As a way of further example, an actor being tracked on a first device and the position of that actor may be pushed to an avatar with an occlusion mesh through the Compositor. When the actor is behind a CGI Asset, the Asset will appear in front of the cinema camera image and obscure the actor and the occlusion mesh will do nothing. If the actor is in front of the CGI Asset, the occlusion mesh will cut out the pixels of the CGI Asset and reveal the actor in the cinema camera image as if the person was in front of the asset.

[0072] In some embodiments, the depth occlusion module **338** may have sub-modules to facilitate processing of the depth occlusion feature. Each sub-module may associate with certain properties (field of view, focal point, etc.) that allows it to create an image that would be the same (or similar) to what a physical camera would capture (raw video feed). A first occlusion sub-module may receive the raw video feed from a physical camera and ignore any CGI Asset. A second sub-module would include the CGI objects but not the camera feed. The images of the first and second sub-module are then composited with any effects including but not limited to occlusion, motion blur, color correction, etc.). The final rendered image may be sent to a third sub-module whose output may be sent to a display. In yet some further embodiments, the sub-modules may be embodied as virtual camera

that generate images. In yet even further embodiments, each sub-module is embodied as a hardware component to the system.

[0073] In some embodiments, the system **300** includes a puppeteer module **342** configured to use real-time motion capture having low latency to animate the inserted CGI Asset **250**. That is, a human actor **345** (whom may be offset) is recorded by a motion capture system **344** and the information acquired from recording the human actor is used to animate a digital character model in two or three dimensional computer animation. Generally, the movements of the actor **345** are captured with disregard to the visual appearance of the actor **345**, this actor animation data is mapped and/or transformed to the 3-dimensional CGI Asset model or a skeleton associated with the CGI Asset **250** so that the CGI Asset **250** performs the actions of the actor **345**. For example, if it is desired for the CGI Asset **250** to walk from one point to another on set, the actor **345** whom may or may not be in view of the main recording camera **201** may perform the walking action that is captured by the motion capture system **344**. The puppeteer module **342** uses the walking movement captured from the actor **345** and animates the CGI Asset **250** in the augmented video signal **212**. In some embodiments, the motion capture system **344** is configured to puppet the face of an actor **345** such that the face of the actor portraying a non-human character is modified by the puppeteer module **342** in real-time so that the director on set may appropriately direct the actor **345** and others on set.

[0074] In some embodiments, the puppeteer module **342** may supply the movements of a puppeteer which are distributed to the asset module **334** for animation. That is, the movements of the puppeteer are modeled to a skeleton of an asset which coordinates the movements of the 3D CGI Asset **250**. In turn, the Asset module **334** may modify the LOD of the asset and provide different CGI assets that may be applied to the same skeleton model. For example, in instances where processing power is limited, a lower LOD CGI Asset may be associated with the skeleton model. In instances where processing power of the system is adequate, a higher LOD CGI Asset may be associated with the skeleton model of the puppeteer module **342**, providing a higher quality, more detailed asset within the augmented video signal. In other words, the system may be able to swap out

CGI Assets of varying resolutions based on the processing hardware making the video processing more efficient as processing power decreases or increasing the detail of the video signal as processing power increases.

[0075] The video module **330**, environmental module **332**, asset module **334**, camera tracking module **336**, and depth occlusion module **338** work together to generate a real-time augmented video signal (a previsualization image) **212** that is provided to the viewfinder **216** of the camera and at least one monitor **210** of at least one video village **208**. That is, the augmented video signal **212** includes the raw video signal (or portions thereof, if occlusion is desired) with the CGI Asset **250** with certain objects or the CGI Asset itself occluded based on a calculated depth of objects in the real environment. In this way, the crew members on set see a rough estimate of what the final scene would look like after special effects are added to the recorded raw video footage.

[0076] In some embodiments, the system **300** includes a compositor **340** configured to communicate with each of the modules **330-338** and generate the augmented video signal **212** based on the data provided from each module **330-342**. The compositor **340** may be variously embodied as either a module within the instructions **310** and/or a piece of hardware in communication with the computer system **206**. In some embodiments, the compositor **340** is in communication with multiple camera systems **200** and/or digital previsualization devices **100a...n**.

[0077] The previsualization system **300** allows for the use of multiple devices, e.g., camera system **200**, and digital previsualization devices **100a...n**, each device contributing environmental data (and increasing the fidelity) of the 3-dimensional model of the environment. In some embodiments, each device **200**, **100a-n**, generates its own 3-dimensional model from environmental data captured by the device. In other embodiments, each device **200**, **100a-n**, generates its own 3-dimensional model (Virtual Environment) from environmental data captured by all connected devices. Each of these 3D models may be stored on each associated device or on a local server and sent to other devices connected to system **300** as

desired. In yet still other embodiments, each device of the system **300** may access a shared 3-dimensional model existing on a server **160** or within the cloud **170**.

[0078] For example, each device accesses a 3d model and a placed CGI asset such that a first device, e.g., the camera system **200**, may view the scene and display a first augmented video signal containing a CGI asset from a first perspective and a second device, e.g., a digital previsualization device **100a**, may view the scene and display a second augmented video signal containing the CGI asset from a second perspective. Each device/system may exchange data and share processing with one another directly, or through the use of a computer, e.g., computer system **206**, a server **160**, local area network (LAN), wide area network (WAN) and/or cloud **170**.

[0079] With multiple systems and devices **200** and **100a...n** having its own unique augmented video signal **212**, crew members on set performing different tasks are able to view the scene with their specific goals in mind. For example and without limitation, the camera system **200** may capture the particular scene and send the augmented video signal to both the viewfinder **216** and video village **208**. Simultaneously, a crew member directing crowds within the same scene and located at a different location on the set may use a portable digital previsualization device **100** to view a different view of the scene with an augmented video signal tailored to the perspective of the portable digital previsualization device **100**. In this way, the crew member can direct people around the CGI Asset **250** as if it were visible in front of them so that the crowds can move in a believable fashion.

[0080] Furthermore, the multiple device system **300** allows for any device or subsystem **200**, **100** to change the position and orientation of the CGI Asset within the scene. For example, the camera operator or director using the camera system **200** may first roughly place the CGI Asset **250** to a desired position. Another crew member, e.g., the director of photography, using another device, such as digital previsualization device **100**, may move the CGI asset to a more precise location while viewing the scene and asset from a different viewpoint. The change of the location of the CGI asset within the virtual 3-dimensional environment is then propagated by the system **300** to other devices and subsystems connected to the

system **300**. In some embodiments, an administrator of the system **300** may set certain permissions for devices connected to the system **300**, e.g., allowing some users of devices **100** to modify the CGI Asset and denying other users.

[0081] In other embodiments, each subsystem/device (**200**, **100a...n**, respectively) may choose to receive the augmented video stream of another device. For example, a user of a remote digital previsualization device **100a** may choose to view the augmented video signal **211** as captured by the camera system **200**. This allows the crew member using the device **100a** to access varying perspectives of the scene with the CGI Asset and direct those people in the scene accordingly for filming.

[0082] In some embodiments and with reference to FIG. 4, the instructions **310** include a room module **346**. The room module **346** is configured to display different states of the same CGI asset **450a**, **450b** with respect to the same real environment **460**. That is, each digital previsualization device **110a**, **100n**, is scanning the same real environment **460** and adding environmental data to a 3-dimensional model of that environment (increasing the fidelity of the 3D model). The digital previsualization device **100a** illustrates a first room relating to the environment **460** having a first state of the CGI asset **450a**, in this case a CGI building **450a** is viewed between two trees. The digital previsualization device **100n** illustrates a second room relating to the environment **460** having a second state of the CGI asset **450b**, in this case a CGI building that is partially destroyed **450b** is viewed between two trees. The room module **346** may have particular application for location scouting for filmmakers, although it is to be appreciated that other applications may exist and that the location scouting application is presented without limitation to illustrate the features of the system **300** and room module **346**. For example, a particular environment **460** (location) may be chosen for a set of a film. The plot of the film may have a particular building be present within the environment with an intact version of the building **450a** in the beginning of the film and a destroyed version of the building **450b** later in the film. The system **300** may be set up on a local server **160** to which digital previsualization devices **100a**, **100n**, may connect. Each of the digital previsualization devices **100a,n** simultaneously and continuously scan the local environment **460** and provide data for the creation of a 3D model (Virtual

Environment) by the environmental module **332**. A first crew scouting the location and setup for an earlier scene involving the intact building **450a** may use the digital previsualization device **100a** and analyze the location and potential position of actors in a first virtual room, **room 1**. A second crew may simultaneously scout the same location and setup for a later scene involving the destroyed building **450b** and may use the previsualization device **100b** to analyze the location and potential position of actors in a second virtual room, **room 2**. In other words, the room module **346** allows multiple sets of people to look at different versions of the same space in the real world. This allows the crew members to plan ahead, having multiple teams on set setting marks, and using multiple states of the same asset **450**. In other embodiments, rooms are configured to use different CGI assets, rather than different states of the same CGI asset.

[0083] In some embodiments, the data processing and storage is performed within the cloud **170**. A local application in communication with the cloud **170** may be configured to track the movement of all the devices and subsystems of the previsualization system, such as the exemplary previsualization system **300**. The data collected by the local application may be pushed to server **160** that shares the data to all connected devices in real time. In this way, if a particular device **100a** has permissions to move a CGI Asset **250**, movement of the CGI Asset **250** within that device, propagates the movement of the CGI Asset **250** to all of the devices in connection with device **100a**.

[0084] In some embodiments, a previsualization system, such as the exemplary previsualization system **300**, is configured to hold a Virtual Environment indefinitely. For example, the Virtual Environment, i.e., the 3-dimensional model generated by the combination of devices collecting environmental data, may be held on a server **160** on location, a computer system such as the exemplary computer system **206**, a storage of a previsualization device **100**, or on a server of a cloud **170**. In this way, if one device, e.g., digital previsualization device **100**, were to crash, the generated 3-dimensional model is not lost. Furthermore, once the crashed device **100** is back online and begins scanning the environment, the software hosted on the device **100** is configured to recognize its position in relation to the real and virtual model and reinsert the CGI asset as if the device had never

crashed. The indefinite storage of the 3-dimensional model allows for easy transition between multiple days' work. For example, when with a particular outdoor environment on one day and having an associated 3-dimensional model of the outdoor environment, if it becomes impracticable to continue working on the outdoor environment (e.g., it rains), the environmental data and CGI asset positioning may be held, until it is practical to return to working in the outdoor environment.

[0085] One or more illustrative embodiments incorporating the invention embodiments disclosed herein are presented herein. Not all features of a physical implementation are described or shown in this application for the sake of clarity. It is understood that in the development of a physical embodiment incorporating the embodiments of the present invention, numerous implementation-specific decisions must be made to achieve the developer's goals, such as compliance with system-related, business-related, government-related and other constraints, which vary by implementation and from time to time. While a developer's efforts might be time-consuming, such efforts would be, nevertheless, a routine undertaking for those of ordinary skill the art and having benefit of this disclosure.

[0086] The methods illustrated throughout the specification, may be implemented in a computer program product that may be executed on a computer. The computer program product may comprise a non-transitory computer-readable recording medium on which a control program is recorded, such as a disk, hard drive, or the like. Common forms of non-transitory computer-readable media include, for example, floppy disks, flexible disks, hard disks, magnetic tape, or any other magnetic storage medium, CD-ROM, DVD, or any other optical medium, a RAM, a PROM, an EPROM, a FLASH-EPROM, or other memory chip or cartridge, or any other tangible medium from which a computer can read and use.

[0087] The term "software," as used herein, is intended to encompass any collection or set of instructions executable by a computer or other digital system so as to configure the computer or other digital system to perform the task that is the intent of the software. The term "software" as used herein is intended to encompass such instructions stored in a storage medium such as RAM, a hard

disk, optical disk, or so forth, and is also intended to encompass so-called "firmware" that is software stored on a ROM or so forth. Such software may be organized in various ways, and may include software components organized as libraries, Internet-based programs stored on a remote server or so forth, source code, interpretive code, object code, directly executable code, and so forth. It is contemplated that the software may invoke system-level code or calls to other software residing on a server or other location to perform certain functions.

[0088] To aid the Patent Office and any readers of this application and any resulting patent in interpreting the claims appended hereto, applicants do not intend any of the appended claims or claim elements to invoke 35 U.S.C. 112(f) unless the words "means for" or "step for" are explicitly used in the particular claim.

CLAIMS

The invention claimed is:

1. A method for generating a previsualization video signal for digital filming comprising:
 - with a video module, generating a raw video signal with an image sensor;
 - with an environmental module, generating a 3D model of an environment from environmental data collected by at least one environmental sensor;
 - with an asset module, placing a CGI asset at a specific location within the 3d model of the environment;
 - with a camera tracking module, tracking a position and an orientation of the image sensor based on data received from a motion sensor associated with the image sensor;
 - generating an augmented video signal, comprising the raw video signal with the placed CGI asset; and
 - displaying on at least one display, the augmented video signal.
2. The method according to claim 1, wherein the environmental module is configured to receive a first set of environmental data from a first previsualization device having a first environmental sensor, and a second set of environmental data from a second previsualization device having a second environmental sensor, wherein each of the first previsualization device and second previsualization device are capturing environmental data at different perspectives of the environment.
3. The method according to claim 1, further comprising with a depth occlusion module, occluding features of the raw video signal based on a determined depth of the features.
4. The method according to claim 1, further comprising with a puppeteer module, receiving real-time motion capture data from a motion capture

system and simultaneously animating the CGI asset in the augmented video signal.

5. The method according to claim 1, further comprising transmitting the augmented video signal to at least one display.

6. The method according to claim 1, further comprising recording the raw video signal to a storage device.

7. The method according to claim 1 wherein the image sensor is a first image sensor of a first previsualization device generating a first raw video signal and a second image sensor of a second previsualization device generating a second raw video signal, wherein each of the first raw video signal and second raw video signal are augmented with the CGI asset based on generated environmental data and a calculated perspective of each associated device.

8. The method according to claim 1 further comprising modifying a format of the raw video signal to a compressed format.

9. A previsualization camera system, comprising:
an image sensor configured to generate a raw video signal;
a first environmental sensor configured to take environmental measurements of an environment and generate a 3D model of the environment;
a motion sensor configured to generate camera tracking data associated with movements of the previsualization camera system;
a camera viewfinder configured to display a video signal to at least a camera operator;
a compositor configured to generate an augmented video signal comprising the raw video signal with a placed CGI asset positioned within the generated 3D model and position of the previsualization camera system;
wherein the augmented video signal is received by the camera viewfinder and displayed to the camera operator.

10. The previsualization camera system according to claim 9 further comprising a data storage medium configured to record the raw video signal.

11. The previsualization camera system according to claim 10 wherein the data storage stores camera tracking data.

12. The previsualization camera system according to claim 9 further comprising: a camera system interface configured to receive supplemental environmental measurements from a second previsualization device, the second previsualization device comprising a second environmental sensor wherein the supplemental environmental measurements are used to increase a fidelity of the 3D model.

13. The previsualization camera system according to claim 12, wherein the first environmental sensor is of a first type and the second environmental sensor is of a different second type, wherein the types of environmental sensors are selected from the group comprising an infrared system, light detection and ranging (LIDAR) systems, thermal imaging systems, ultrasound systems, stereoscopic systems, and optical systems.

14. A previsualization system, comprising:
a camera system comprising:
 a digital processor;
 a camera image sensor in communication with the digital processor configured to generate a camera raw video signal;
 a camera environmental sensor in communication with the digital processor and configured to generate a first set of environmental measurements of an environment;
 a camera display in communication with the digital processor and configured to display a first augmented video signal; and
a digital previsualization device in communication with the camera system comprising

a device environmental sensor configured to generate a second set of environmental measurements of the environment;

wherein the digital processor generates a 3D model of the environment based on the first and second set of environmental measurements and places a CGI Asset at a position and orientation within the 3D model,

wherein the camera display displays a camera augmented video signal comprising the camera raw video signal and the placed CGI Asset.

15. The previsualization system according to claim 14 further comprising a storage device configured to record the camera raw video signal.

16. The previsualization system according to claim 14 further comprising a motion capture system configured to generate animation data, wherein the processor of the previsualization system animates the placed CGI Asset based on the generated animation data in real-time.

17. The previsualization system according to claim 14 further comprising a remote monitor configured to display the camera augmented video signal.

18. The previsualization system according to claim 14 wherein the previsualization device further comprises:

a device processor;

a device image sensor in communication with the processor and configured generate a device raw video signal; and,

a device display configured to display a second video signal, wherein the CGI asset is a first CGI asset associated with the camera augmented video signal and a second CGI asset associated with the device augmented video signal,

wherein the device processor generates a device 3D model of the environment based on the first and second set of environmental measurements and places a CGI Asset at a position and orientation within the 3D model,

wherein the device display displays a device augmented video signal comprising the device raw video signal and the placed CGI Asset.

19. The previsualization system according to claim 14 wherein the camera environmental sensor is of a first type and the device environmental sensor is of a different second type, wherein the types of environmental sensors are selected from the group comprising an infrared system, light detection and ranging (LIDAR) systems, thermal imaging systems, ultrasound systems, stereoscopic systems, RGB cameras, and optical systems.

20. The previsualization system according to claim 14 further comprising a server in communication with the camera system and previsualization device and is configured to receive the first and second set of environmental measurements and deliver each set of environmental measures to each connected previsualization and camera system.

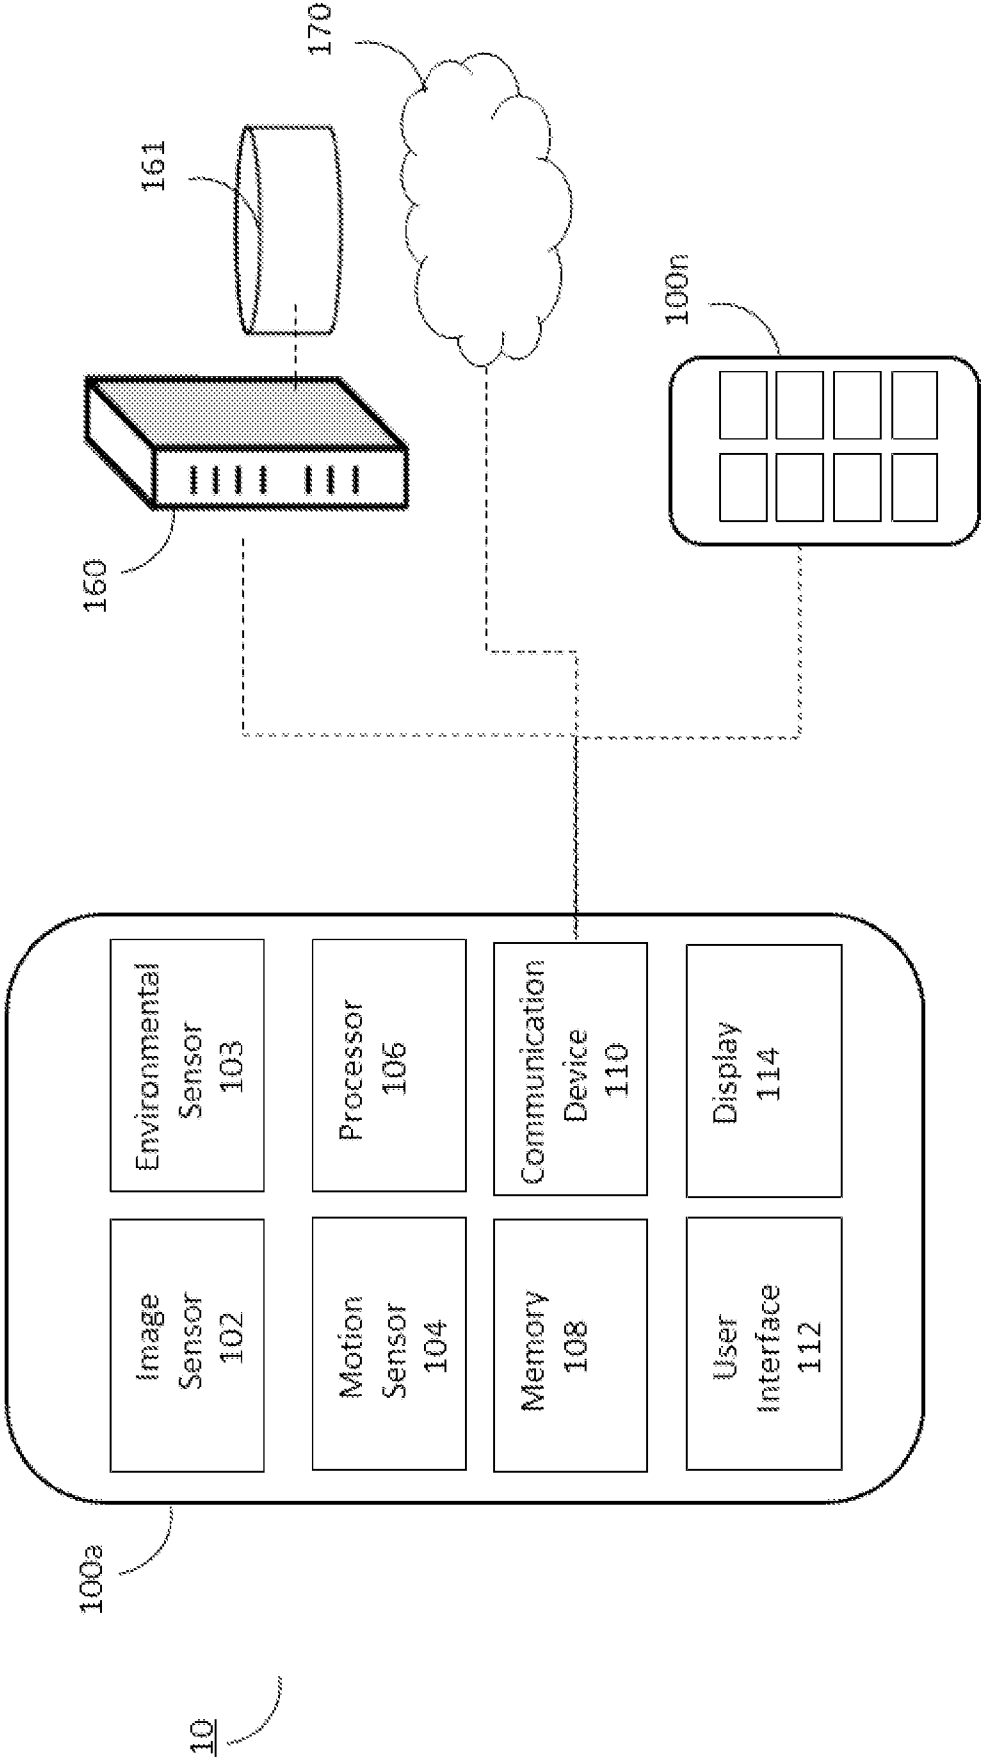


FIG. 1

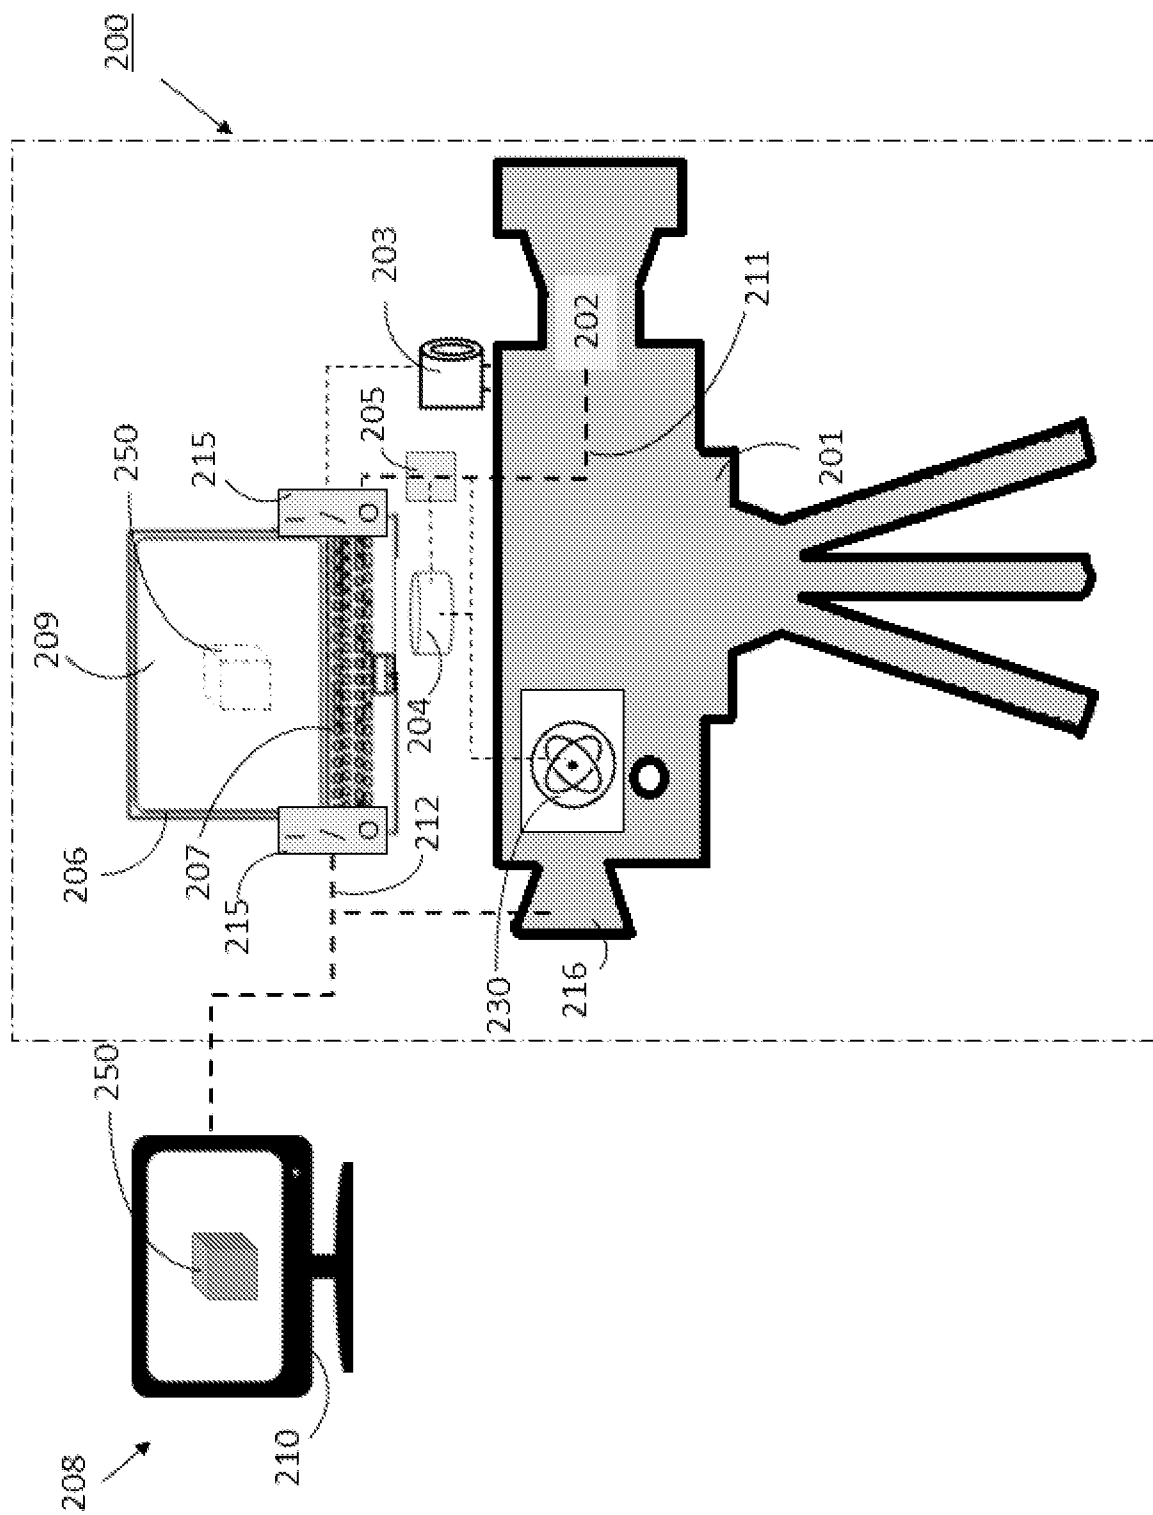


FIG. 2

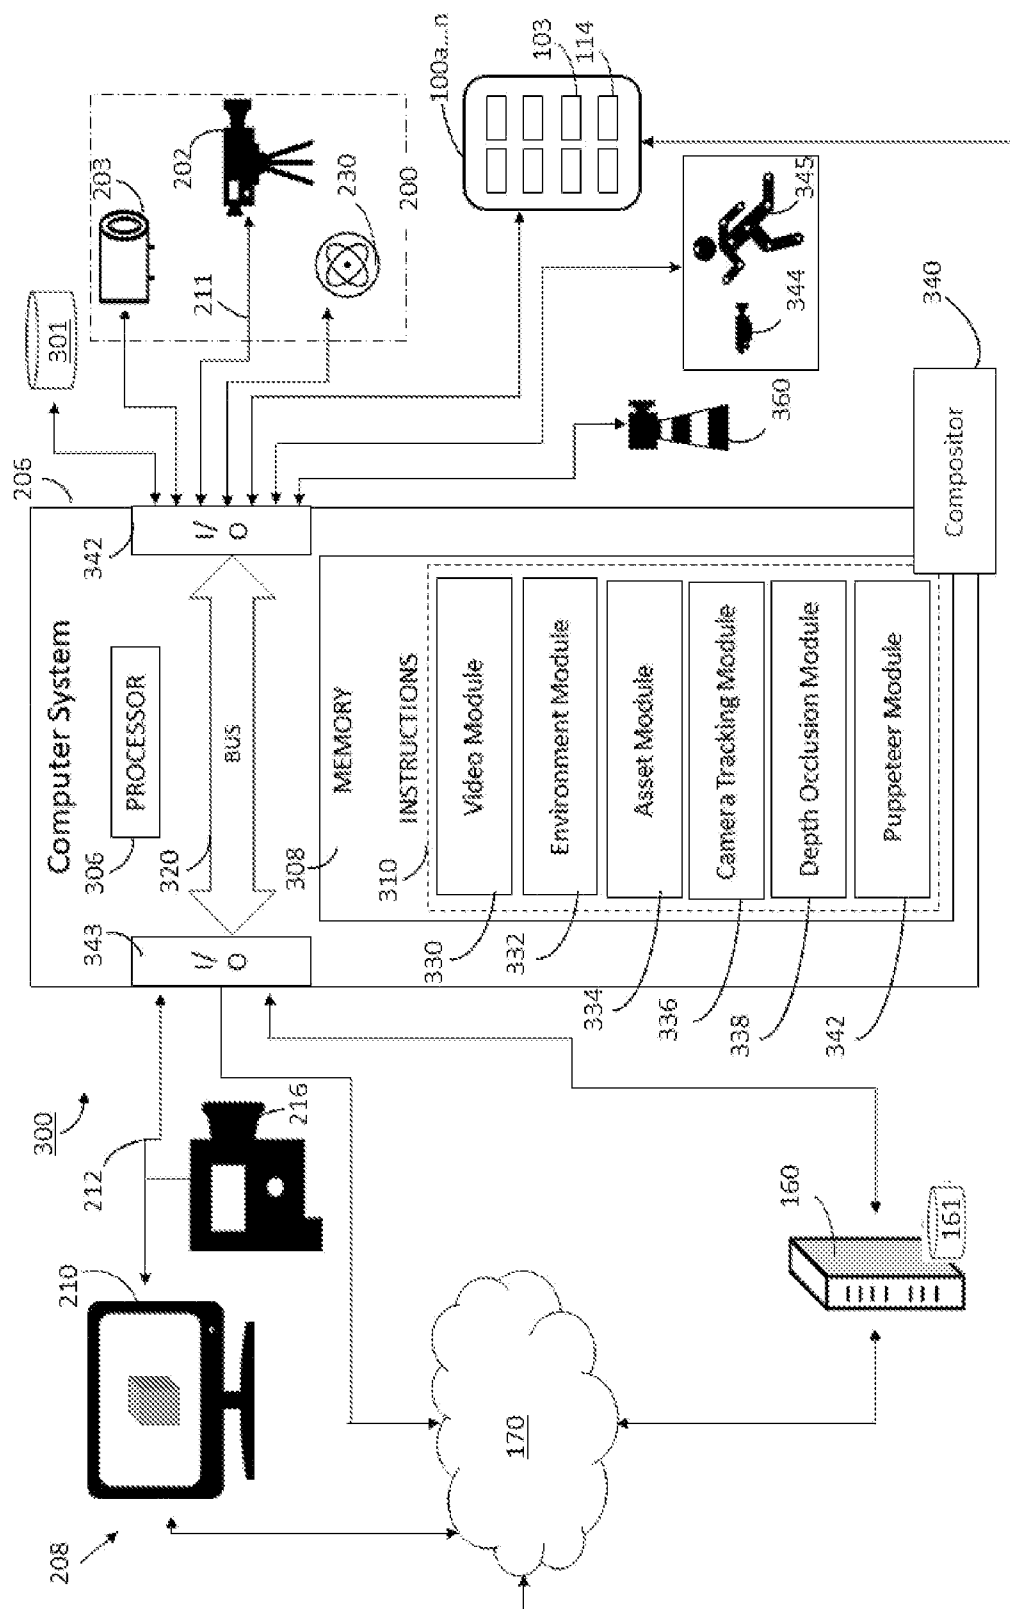


FIG. 3

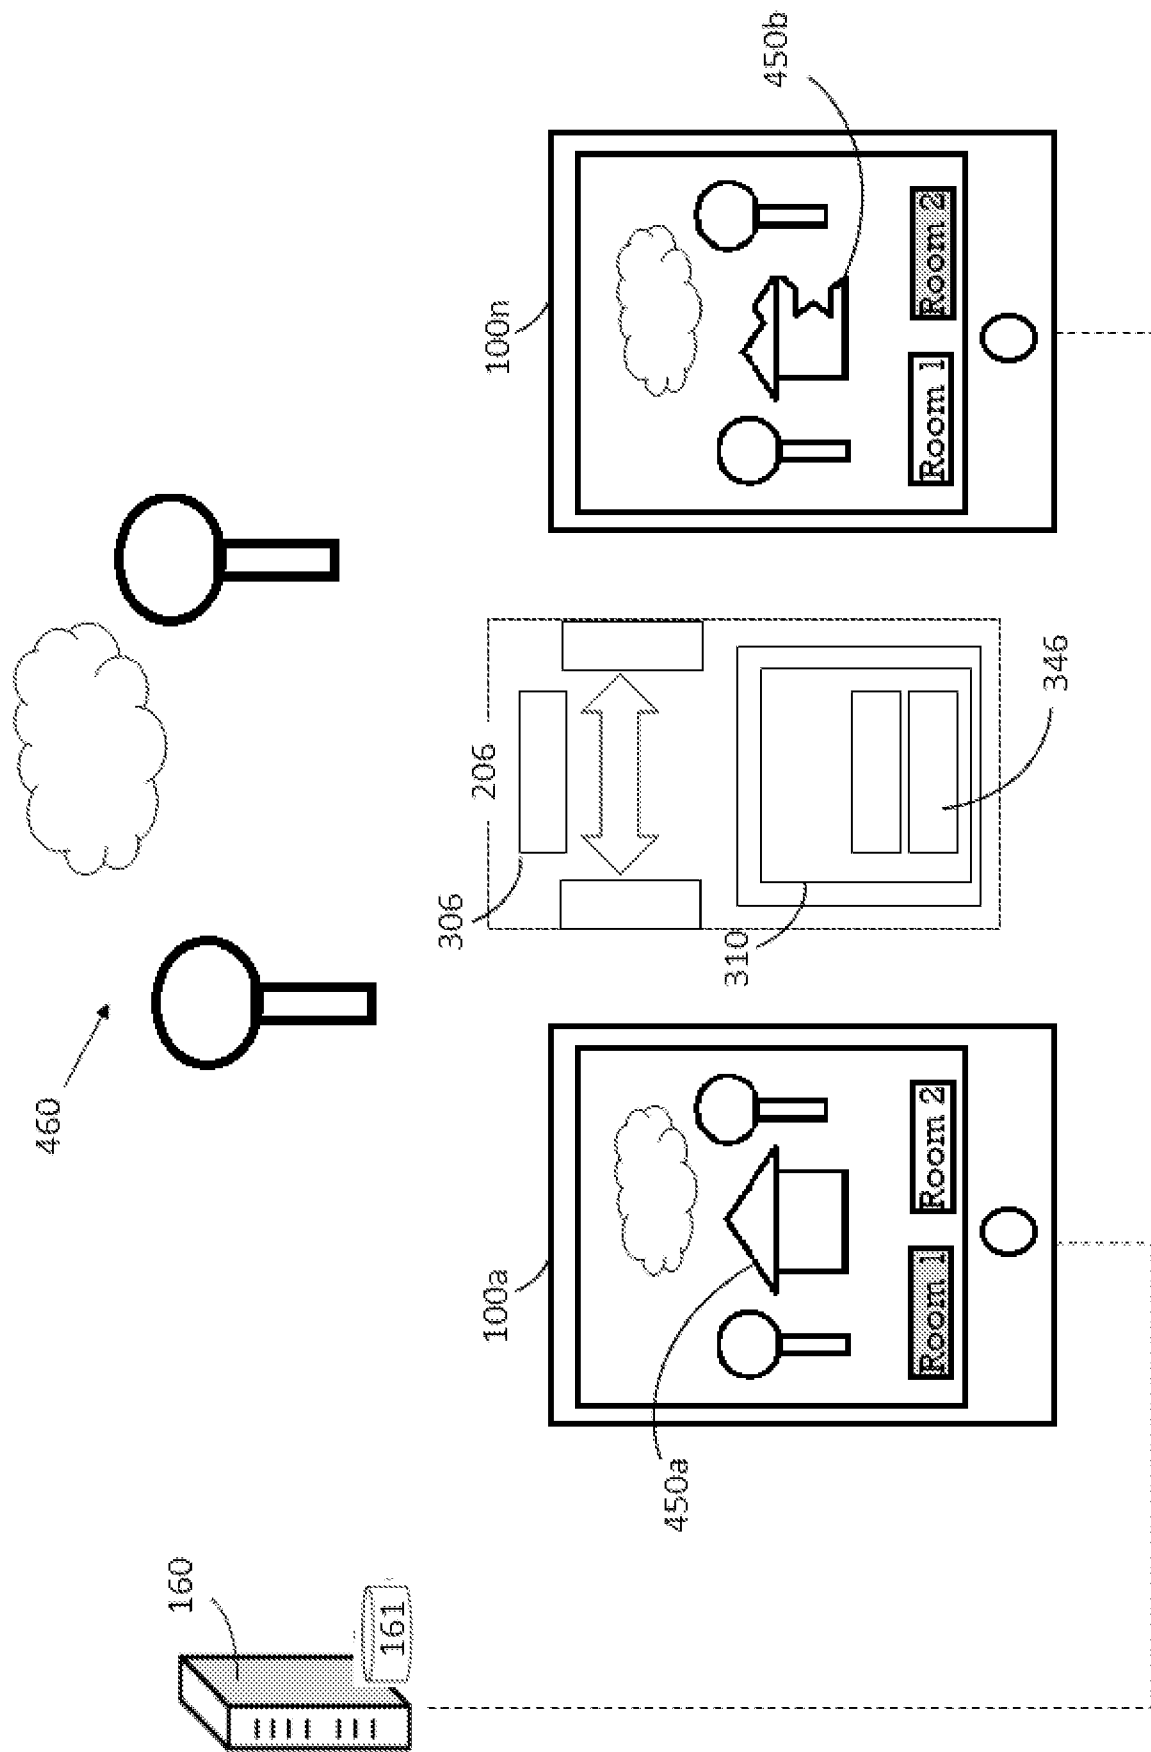


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 21/47327

A. CLASSIFICATION OF SUBJECT MATTER

IPC - G11B 27/031 (2021.01)

CPC - G11B 27/034, H04N 5/262, G11B 2220/415

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

See Search History document

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History document

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X ----	US 10,594,786 B1 (Lucasfilm Entertainment Company Ltd.) 17 March 2020 (17.03.2020) entire document especially col 5, ln 48-60; col 5, ln 63-col 6, ln 27; col 6, ln 63-col 7, ln 4; col 7, ln 19-25; col 8, ln 12-27; col 9, ln 4-20; col 11, ln 8-31; col 12, ln 31-36; col 12, ln 56-col 13, ln 16; col 13, ln 39-41; col 18, ln 26-33; col 20, ln 15-26; col 33, ln 23-54; col 37, ln 14-27; col 37, ln 42-44; col 38, ln 62-67; col 41, ln 36-46; col 43, ln 67-col 44, ln 3; col 44, ln 9-16; col 45, ln 4-14; col 47, ln 53-58	1-7, 9-20 ----- 8
Y	US 2019/0066365 A1 (QUALCOMM Incorporated) 28 February 2019 (28.02.2019) entire document especially para [0024], [0078]	8

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"D" document cited by the applicant in the international application

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

22 October 2021 (22.10.2021)

Date of mailing of the international search report

NOV 30 2021

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Kari Rodriguez

Telephone No. PCT Helpdesk: 571-272-4300