

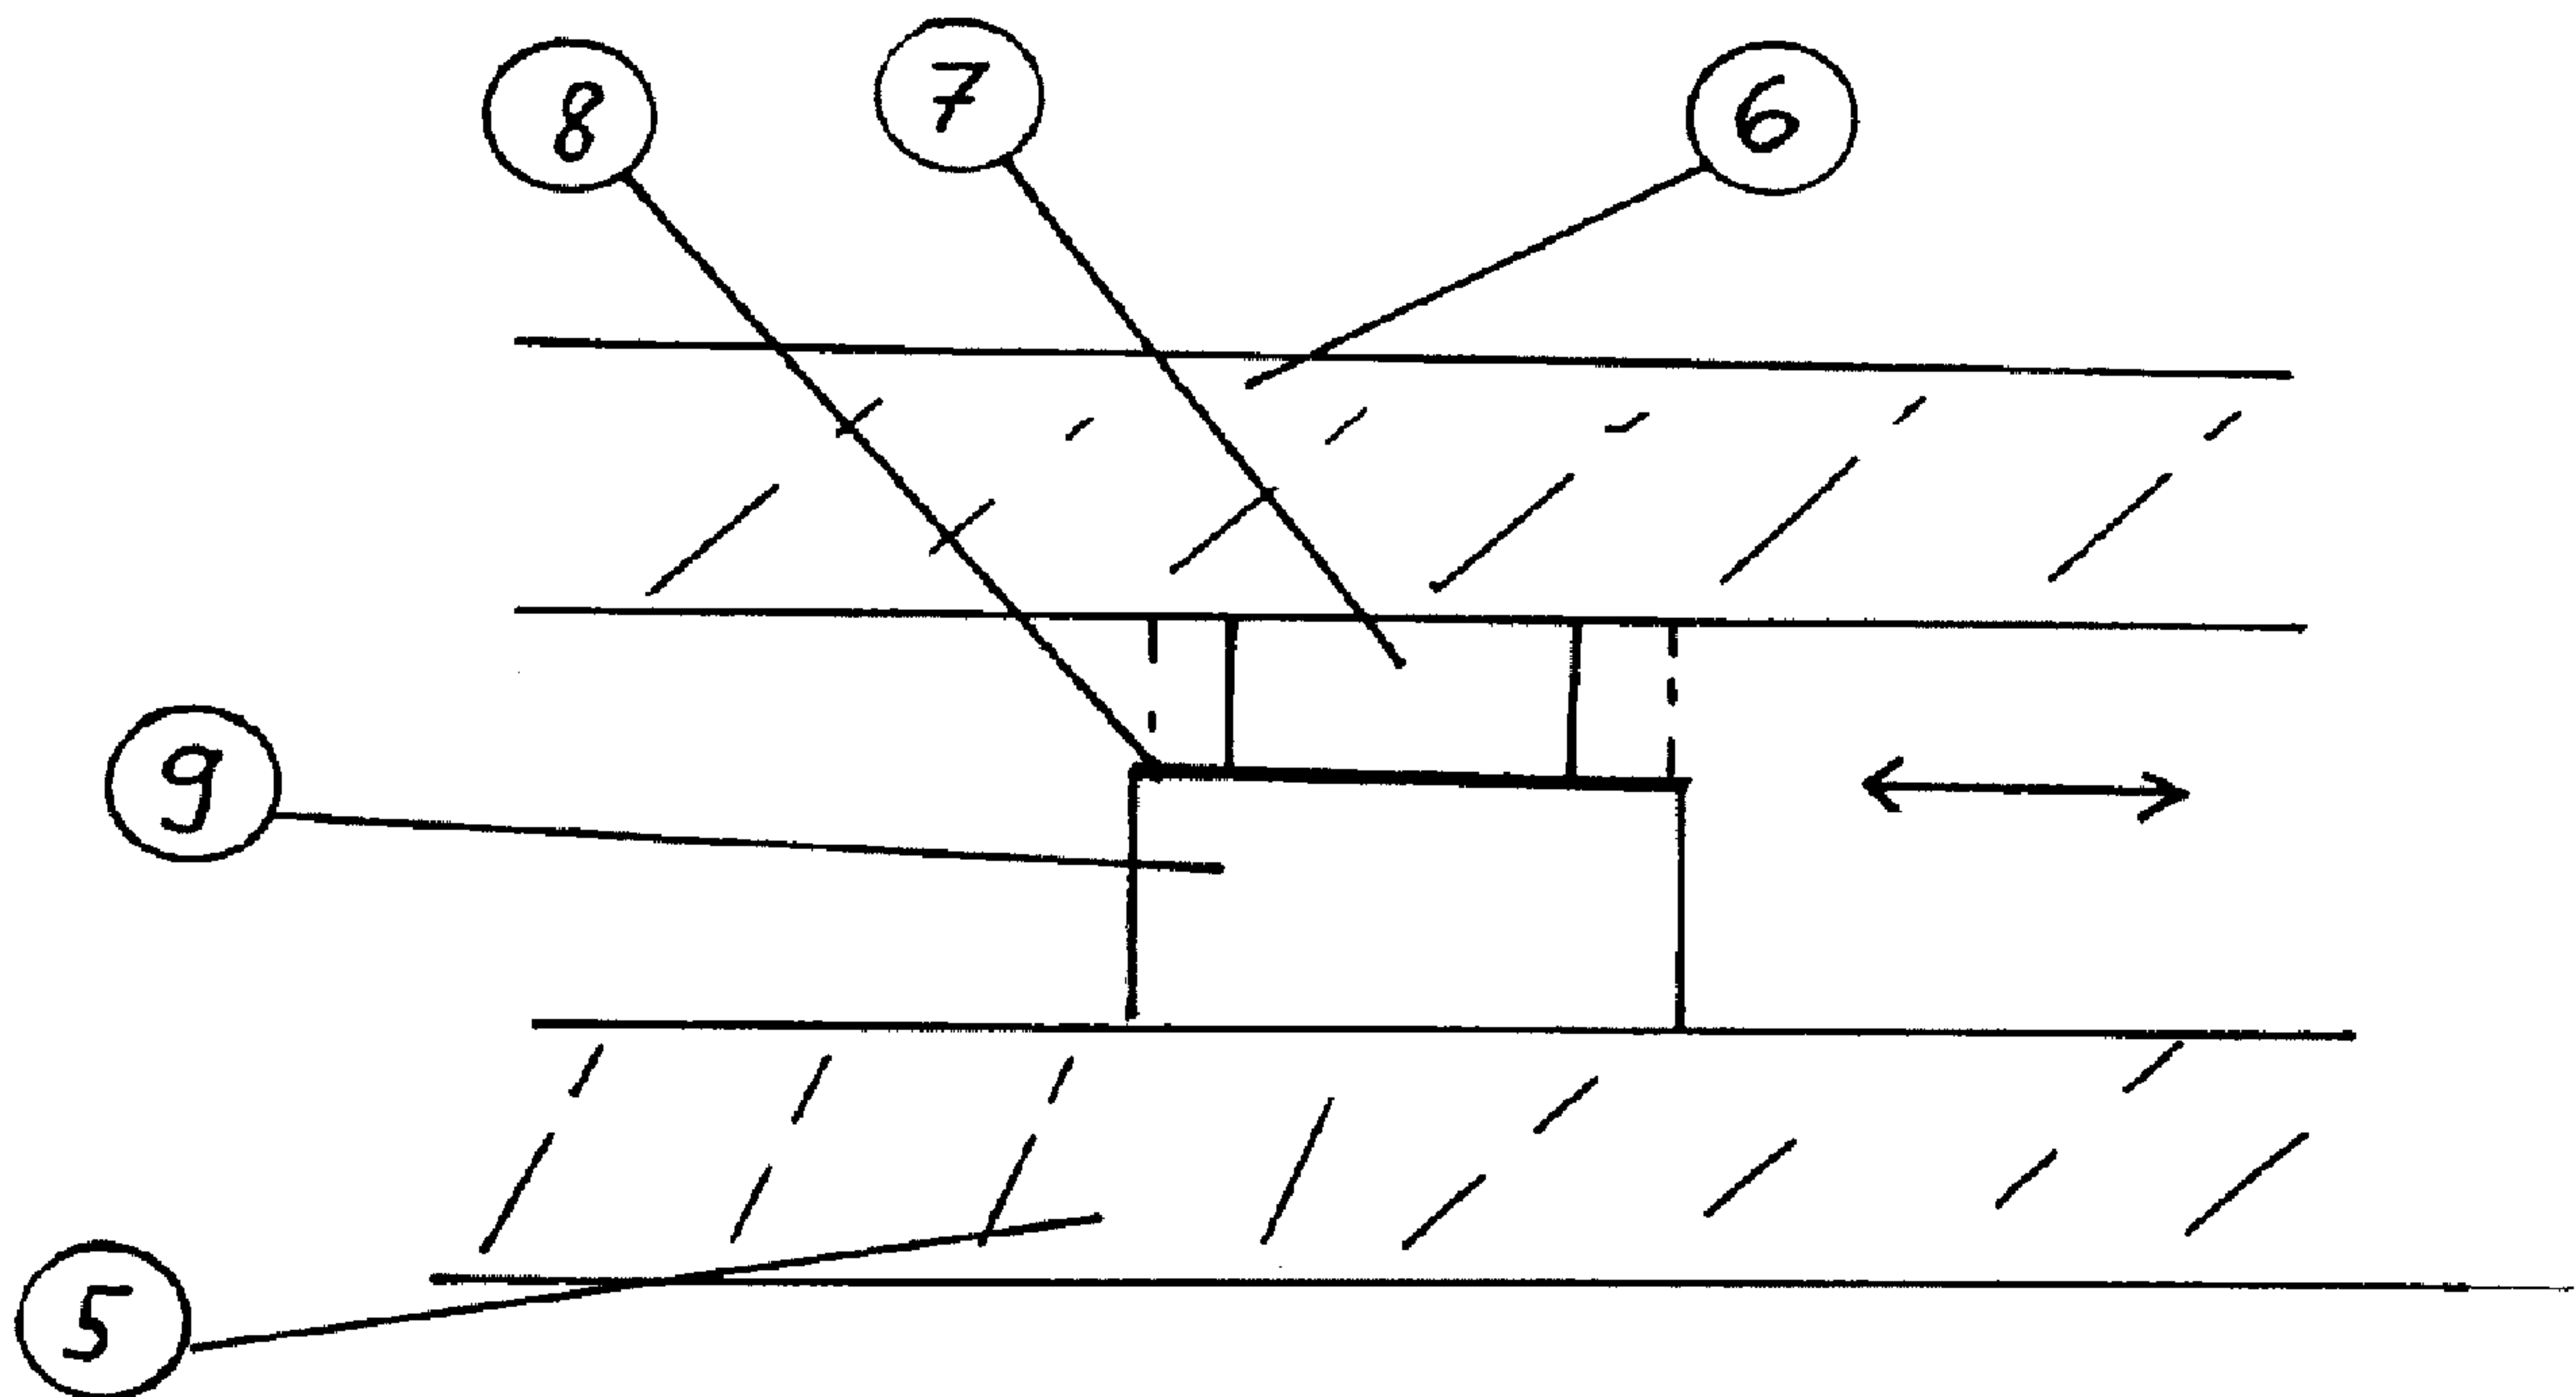


(86) **Date de dépôt PCT/PCT Filing Date:** 2012/05/23
(87) **Date publication PCT/PCT Publication Date:** 2012/12/06
(45) **Date de délivrance/Issue Date:** 2016/09/06
(85) **Entrée phase nationale/National Entry:** 2013/11/25
(86) **N° demande PCT/PCT Application No.:** DE 2012/000549
(87) **N° publication PCT/PCT Publication No.:** 2012/163326
(30) **Priorité/Priority:** 2011/05/30 (DE10 2011 102 843.2)

(51) **Cl.Int./Int.Cl. E06B 3/663** (2006.01),
E06B 3/66 (2006.01)
(72) **Inventeurs/Inventors:**
FRIEDL, WOLFGANG, DE;
LEITENMEIER, STEPHAN, DE;
HERFERT, CHRISTIAN, DE
(73) **Propriétaire/Owner:**
GRENZEBACH MASCHINENBAU GMBH, DE
(74) **Agent:** MOFFAT & CO.

(54) **Titre : VERRE ISOLANT SOUS VIDE A SOLIDITE ACCRUE ET SON PROCEDE DE FABRICATION**

(54) **Title: VACUUM INSULATED GLASS HAVING INCREASED STABILITY AND METHOD FOR THE PRODUCTION THEREOF**



(57) **Abrégé/Abstract:**

The invention relates to a vacuum insulated glass, which comprises two or more glass plates, which can be evacuated, which are oriented in parallel and which are sealed air-tight at the outer edge, with respect to the interior formed by means of spacers, by means of strip-shaped connecting elements attached to the entire perimeter, in particular metal strips connected to each other in a vacuum-tight manner, having the following features: a) the spacers each comprise at least two segments (7, 9) associated with each other, b) the spacers are arranged on closed distribution lines, which are arranged at a distance from each other and extend substantially parallel to the perimeter of the glass plate in question and run out in a defined manner in a curve in the corner regions of the glass plate, c) the segments (7, 9) are made of different materials, and d) the segments (7, 9) have a coating and/or structuring on the surfaces that do not come in contact with the glass plates (5, 6). The invention further relates to a method for producing the vacuum insulated glass.

ABSTRACT

The invention relates to a vacuum insulated glass, which comprises two or more glass plates, which can be evacuated, which are oriented in parallel and which are sealed air-tight at the outer edge, with respect to the interior formed by means of spacers, by means of strip-shaped connecting elements attached to the entire perimeter, in particular metal strips connected to each other in a vacuum-tight manner, having the following features: a) the spacers each comprise at least two segments (7, 9) associated with each other, b) the spacers are arranged on closed distribution lines, which are arranged at a distance from each other and extend substantially parallel to the perimeter of the glass plate in question and run out in a defined manner in a curve in the corner regions of the glass plate, c) the segments (7, 9) are made of different materials, and d) the segments (7, 9) have a coating and/or structuring on the surfaces that do not come in contact with the glass plates (5, 6). The invention further relates to a method for producing the vacuum insulated glass.

WO 2012/163326

PCT/DE2012/000549

Vacuum insulated glass having increased stability and
method for the production thereof

The present invention relates to a device and a method
5 for increasing the stability of vacuum insulated glass,
also abbreviated to VIG.

A problem with these VIG panes is the production of a
bordering bond which is stable over a long period of
10 time and provides a sufficiently tight seal with
respect to a high vacuum. The glass-glass connection by
glass solder previously used in practice in vacuum
insulated glass is not considered here since this
bordering bond is rigid, and, in the case of the
15 previous methods, it is thus not possible to achieve
relatively large geometrical dimensions of the panes
combined with simultaneously good thermal insulating
values.

A glass-metal-glass connection is aimed for since these
20 two materials allow a flexible gas-tight bond which is
suitable for high vacuums. Basic methods for producing
such glass-metal connections are for example ultrasonic
welding, ultrasonic soldering, the various
possibilities of a pressure-diffusion connection or the
25 use of glass and metal solders in conjunction with
coatings on the glass and/or the metal.

Another problem with VIG panes is the evacuation of VIG
panes.

30 Thus, DE 10 2007 030 031 B3 discloses a thermal
insulating glazing element which comprises a glass
plate arrangement having at least two glass plates
which have predetermined mutual spacings, wherein
intermediate spaces which can be evacuated are formed

WO 2012/163326

- 2 -

PCT/DE2012/000549

between the glass plates. This element also comprises a spacer device which is designed to set the spacings of the glass plates and has a border sealing device which is designed to seal the intermediate spaces between the glass plates with respect to the surroundings of the glazing element with a border sealing material. Furthermore, in this case, there is at least one evacuation opening which is designed to produce an internal pressure, which is reduced with respect to the surrounding pressure, and contains an evacuation tube.

To achieve the object of affording an improvement with respect to the disadvantages in the prior art, that document claims a particular evacuation tube in which a metal sealing element is arranged which is designed for the vacuum-tight closure of the evacuation tube. No further information is given with respect to the spacer device.

DE 690 26 264 T2 discloses a method for producing a thermally insulating glass panel which has two glass panes which are arranged at a spacing from one another and which enclose a vacuum space and are connected to one another by a peripheral border of molten solder glass and an arrangement of supports, wherein the method comprises the production of the vacuum space by means of the following steps:

- 1) the provision of an evacuation means for connecting the interior to the exterior of the panel,
- 2) pumping gas from the interior of the panel through the evacuation means, and

WO 2012/163326

- 3 -

PCT/DE2012/000549

- 3) sealing the evacuation means after the vacuum space has been produced in the interior of the panel, with the result that the sealed evacuation means substantially does not project beyond the nominal dimensions of the panel.

With regard to the structural design of the spacers of the glass panes, referred to here as support pillars, this document only reveals that these pillars should be as small as possible and should be arranged as closely as possible to one another. The basic constellation proposed for the grouping of the pillars is a square grouping.

The object on which the invention is based is to specify a vacuum insulated glass and a method for the production thereof which allows a higher stability in view of the thermal stressing of such an insulating unit.

This object is achieved by the device and the method as described herein.

In one aspect the present invention provides a vacuum insulated glass, which comprises two or more glass plates, which can be evacuated, are oriented in parallel and which are sealed in an air-tight manner at the outer edge, with respect to the interior formed by means of spacers, by means of strip-shaped connecting elements mounted on the entire periphery, in particular metal strips connected in a vacuum-tight manner to one another, having the following features:

- a) the spacers (3) each comprise at least two segments (7, 9) associated with one another,

WO 2012/163326

- 3a -

PCT/DE2012/000549

b) the spacers (3, 3a) are arranged on closed distribution lines (2) which are arranged at a distance from one another so as to extend substantially parallel to the periphery of the glass plate in question, and run out in a defined manner in a curve in the corner regions of the glass plate,

c) the segments (7, 9) are made of different materials, and

d) the segments (7, 9) have a coating and/or a structuring on the surfaces which do not come into contact with the glass plates.

In at least one embodiment, the spacers (3a) are part of a hexagonal structure of spacers (3), wherein these structures are provided in the edge region of the insulated glass with a further spacer (3) arranged in the center of this structure, and wherein, however, this further spacer (3) is absent in the central region of the insulated glass.

In at least one embodiment, at least one of the segments (7, 9) has, on the surface coming into contact with a glass plate, a coating and/or structuring for increased thermal insulation.

In at least one embodiment, one of the segments (7, 9) below the sliding layer (8) has a high heat transmitting resistance.

In at least one embodiment, the segments (7, 9) are chosen with respect to their coefficient of friction in such a way that, even under a high contact pressure, they slide in a defined manner on the sliding surface (8) and can then be blocked in their sliding movement.

WO 2012/163326

- 3b -

PCT/DE2012/000549

In at least one embodiment, one or more spacers 3, or parts thereof, bear getter material on the inside and/or outside of their surface, or are completely produced from sintered material having a gettering effect.

In at least one embodiment, one or more spacers (3) comprise more than two segments, wherein these serve to further reduce the thermal conductivity at the relevant location of a spacer 3 and/or to achieve intended optical effects.

In at least one embodiment, one or more spacers (3) comprise more than two segments, wherein, by structuring in the form of a coating or etching, these experience a special treatment of their surfaces which serve for a desired friction behavior and/or favorably influence the stability and/or elasticity of the vacuum insulated glass.

A further aspect of the present invention provides a method for producing insulated glass, which comprises two or more glass plates, which can be evacuated, are oriented in parallel and which are sealed in an air-tight manner at the outer edge, with respect to the interior formed by means of spacers, by means of strip-shaped connecting elements mounted on the entire periphery, in particular metal strips connected in a vacuum-tight manner to one another, having the following method steps in a vacuum chamber:

a) placing the required strip-shaped connecting elements onto the glass surface (5),

b) connecting the strip-shaped connecting plate to the glass surface (5),

WO 2012/163326

- 3c -

PCT/DE2012/000549

c) placing the required spacer supports (9) onto the glass surface (5) and subsequent setting of the corresponding spacer sliders (7) onto the spacer supports (9),

d) placing a further glass surface (6) connected to strip-shaped connecting elements onto the glass surface (5),

e) vacuum-tight connection of the strip-shaped connecting elements of the two glass surfaces (5, 6), and

f) cutting to size and flanging the soldered connecting elements.

In at least one embodiment, the required spacer supports (9) are connected to one another with adhesives prior to the placement, wherein the surfaces lying on the glass surface (5) are likewise provided with adhesives, and wherein the respective adhesive acts only during the production process.

In at least one embodiment, the glass surfaces (5, 6) connected to the strip-shaped connecting elements are cleaned on the respective inner side in the vacuum chamber, and in that the placing of the spacer supports (9) and the setting of the spacer sliders (7), the placing of the glass surface (5) and the soldering of the strip-shaped connecting elements of the two glass surfaces (5, 6) likewise take place in the vacuum chamber.

In at least one embodiment, below the glass surface (5) there is situated a plate with fixing elements whose position is arranged corresponding to the pattern of the spacers (3), wherein the fixing elements fix the spacers (3) on the glass surface (5) by means of a magnetic and/or

WO 2012/163326

- 3d -

PCT/DE2012/000549

electric field as a result of the effect of an attractive or repulsive force.

In at least one embodiment, the spacers (3) are punched out or separated from a strip or wire of the respective material fed in from a roll and are then guided directly by means of prepositioned hoses into the gripping region of a fixing element.

In at least one embodiment, the spacers (3) are separated or cut from a stock of material by means of a laser system, wherein the spacers (3), which are not made of a magnetic or magnetizable material, are provided with an electroplating.

In at least one embodiment, the spacers (3) are discharged as bulk material.

Another aspect of the present invention provides a computer program with a program code for carrying out the method steps as described herein when the program is executed in a computer.

A further aspect of the present invention provides a machine-readable carrier with the program code of a computer program for carrying out the method as described herein when the program is executed in a computer.

This solution substantially comprises avoiding or reducing thermally induced stresses on the vacuum insulated glass by means of design measures.

The device according to the invention is described in more detail below. In the figures, specifically:

WO 2012/163326

- 3e -

PCT/DE2012/000549

figure 1: shows a representation of the
distribution lines according to
the invention of spacers

WO 2012/163326

- 4 -

PCT/DE2012/000549

- figure 1a: shows a particular configuration of these distribution lines
- 5 figure 2: shows a representation of customary types of distribution of spacers
- figure 2a: shows a further distribution according to figure 2
- 10 figure 3: shows a side view of a spacer according to the invention
- figure 3a: shows a further design form of a spacer having three segments
- figure 4: shows various embodiments of spacers according to the invention
- 15 figure 5: shows a further embodiment of spacers

Figure 1 shows a representation of the distribution lines 2 according to the invention of spacers on a glass surface 4. The spacers 3 are distributed on these lines according to the pattern indicated. This pattern corresponds approximately to the stress lines which arise when a rectangular glass plate is heavily loaded centrally or in a punctiform manner in the center and thus has a tendency to bend elastically. The lines 2 represented in figure 1 and their spacing from one another merely represent the approximate structure of these lines since their spacing from one another and from the border of the vacuum insulated glass depends mainly on the outer dimensions of the respective vacuum insulated glass and on the thickness of the glasses which are used. The spacing of the spacers 3 which are arranged on the lines 2 also depends on the outer

WO 2012/163326

- 5 -

PCT/DE2012/000549

dimensions and the thickness of the glasses which are used.

Proposed as a particular configuration of the pattern shown with these structures in the form of lines is the
5 arrangement of the spacers on a spiral closed structure having an elliptical cross section, corresponding to the longitudinal extent of the rectangular glass surface 4 shown, cf. figure 1a in this respect. This pattern arises when the lines extending in parallel
10 according to figure 1 are allowed to merge substantially into one another to a certain extent. This ensures that, by means of the line, which extends in a self-enclosed manner and which can be assigned to the positions of the spacers arranged in this manner,
15 the tangential stresses in the glass surfaces 4 involved can be further reduced.

Figure 2 shows a representation of customary types of distribution of spacers.

20 Thus, in figure 2a, by virtue of the structure, a system of square arrangements of spacers 3a can be seen which serve as fixed points, wherein the diagonals of the respective squares are oriented parallel to the outer edges of the glass plates. In figure 2b, the
25 spacers 3a are arranged with alternating density distribution parallel to the narrow side of the rectangular glass plate. In order to show this system more clearly, this distribution has only been represented up to the center of the figure.

30 In figure 2c, the spacers 3a are distributed over the entire glass plate in regular lines extending parallel to the outer edges.

In figure 2d, substantially the same structure of the arrangement of the spacers 3a, as in figure 2b, can be

seen, but with a greater spacing of the individual spacers from one another.

Figure 2a represents a further customary form of the
5 distribution of spacers which is substantially based on the arrangement in hexagonal structures.

An advantageous arrangement of the spacers according to the invention is revealed from the combination of the
10 distribution lines according to figure 1, or figure 1a, and from the arrangement of the spacers in hexagonal structures, as are shown in principle in figure 2a. To each point of the points shown in figures 1 and 1a there corresponds in this case a hexagonal structure of
15 six spacers which are arranged corresponding to the spiral distribution lines. The size ratios of the hexagonal structures and the respective vacuum insulated glass panes have to be seen in a necessarily distorted manner in these representations. The
20 arrangement of these spacers can be effected here in such a way that no spacer is arranged in the center, or the center has an additional spacer. It is particularly advantageous in this case if arrangements of hexagonally arranged spacers with a central spacer are
25 used at the border of the respective vacuum insulated glass pane, while in the region of the center of such a pane only such hexagonal arrangements are used without a central spacer.

30 Figure 3 shows a side view of a spacer 3 according to the invention. In this case, a distinction is made between the outer glass 5 and the inner glass 6. Because vacuum insulated glass is used in most cases for the glazing in house building, the term inner glass

WO 2012/163326

- 7 -

PCT/DE2012/000549

here refers to the fact that this glass surface faces the living space. It is correspondingly meant that the outer glass 5 is exposed to the requirements of the temperature fluctuations which occur.

- 5 What is essential in the construction of this spacer is that it comprises at least one areally larger spacer support 9 and an areally smaller spacer slider 7. The spacer support 9 here has a sliding surface 8 on which the spacer slider 7 can move in all directions on the
- 10 bearing surface of the spacer support 9. The division into two of this specific spacer 3 not only meets the function that, under thermally induced stresses, the outer glass 5 can move relatively independently of the inner glass 6 insofar as the border seal allows this.
- 15 In addition, this division of the spacer 3 into two allows the possibility that, by the targeted selection of the thermal conductivity of the spacer support 9 and the spacer slider 7, the heat transmission at the location of the spacer 3 can be reduced. In the case of
- 20 figure 3, an optimally low heat transmission coefficient therefore must be selected for the spacer support 9 bearing on the outer glass 5, wherein its larger bearing surface shown can be influenced with respect to the thermal conductivity at this location by
- 25 a corresponding selection of material. In order to avoid damage, it is preferable to choose for both parts of a spacer 3 materials whose hardness is smaller than that of the respectively bearing glass surfaces 4. The sliding surface 8 can be used for example for the
- 30 application of getter material 10. For this purpose, in a particular configuration the spacer support 9 can be chosen such that the sliding surface 8, for the application of getter material 10, is designed to be larger than appears necessary for the expected working

WO 2012/163326

- 8 -

PCT/DE2012/000549

region of the spacer slider 7. Preferably, the spacer support 9 and the spacer slider 7 can also have a comparably identically large base surface since the expected displacements of both glass surfaces 4 involved should not exceed the diameter of such a base surface.

It is of course also possible to produce from the vacuum insulated glass according to the invention elements consisting of a plurality of such VIGs.

10 The division according to the invention of the spacers 3 into a plurality of segments is not restricted to two segments 9, 7. Additional segments can serve, for example, within the scope of the available spacing of the glass surfaces 4, to further reduce the thermal conductivity at the respective location of a spacer 3
15 or to achieve intended optical effects, cf. in this respect figure 3a as a design form with 3 segments.

The contact surfaces, or sliding surfaces 8, between the respective segments can in this case be coated
20 corresponding to the respective intended use. The intended use can be to achieve a certain temperature behavior and/or a certain sliding behavior of the segments situated on one another.

As a particular configuration, the sliding surfaces 8
25 respectively situated on one another can have a specific sliding behavior. This sliding behavior can be realized by a certain different or else identical roughness of the surfaces of the respective segments which slide on one another. In this way, it is not only
30 possible to produce a settable coefficient of friction between the respective segments, but also to have the effect that both segments slide on one another over a certain distance and then mutually latch such that they are fixedly connected on one another. This is achieved

for example in that the roughness depth which is set on both segments and is different in form and target direction allows a sliding friction over a certain distance, but then leads necessarily to a latching of
5 the segments since the roughness parameters which determine the respective roughness depth have been correspondingly chosen.

New ways are used for fixing the spacers 3. While in the case of earlier solutions the spacers 3 were fixed
10 on a pane by an adhesive, such as for example sodium silicate, here it is possible to dispense with the use of adhesive. During the entire production of the VIG pane, the position of the lower glass plate remains fixedly connected to a plate. Let into this plate are
15 fixing elements, exactly corresponding to the pattern in which the spacers 3 are to be set onto the glass plate. These fixing elements may be, for example, bar magnets (for example NdFeB, SmCo, ferrite) or electromagnets, but other elements which produce a
20 homogeneous or inhomogeneous magnetic or electric field, etc., and thus act on the respectively used spacers 3 through the glass plate by the effect of an attractive or repulsive force, are also possible.

The spacers used here in the example are produced from,
25 or with the addition of incorporated, magnetic or magnetizable material (ferromagnets, antiferromagnets, or ferrimagnets); the fixing elements are axially magnetized cylindrical bar magnets.

By suitable design of the generally inhomogeneous
30 magnetic field by means of a defined arrangement of the fixing elements, in addition to the fixing of the spacers 3 there is also a correct alignment and centering in the intended position.

If, for example, a magnetic cylindrical spacer with magnetic anisotropy, caused for example by a sufficiently great length in comparison with the diameter (shape anisotropy), is brought close to an intended position on the glass surface 4 in any desired spatial orientation, vertically or horizontally, this spacer is drawn to the intended position and stands up perpendicularly on the glass plate over the intended position of the fixing element. The fixing element consists of a bar magnet inserted into the plate on the underside of the glass plate. Therefore, only a relatively inaccurate XY positioning device is required, with which the spacers 3 are distributed simultaneously or in quick succession among the corresponding positions. For this purpose, a mechanical, electrostatic, magnetic or pneumatic gripper may be used, or the spacers may slip through a positionable hose or a tube, or the spacers, or portions thereof, are allowed to fall in a distributed manner through a perforated plate. This distribution, described as the only distribution here, can also be optimized to increase the cycle time by group formation. In that case, for example, a complete row or line is always prepared and set together in sequence. However, the spacers may also be applied as bulk material.

In the case of multi-part spacers 3, a plurality of segments are set onto one another in the manner described.

In order to design specific partial effects at different locations of a VIG, it is also possible to use spacers 3 of different compositions.

After completion of the VIG pane, the spacers in the vacuum are firmly clamped and fixed between the two

WO 2012/163326

- 11 -

PCT/DE2012/000549

glass panes of the vacuum element by the external air pressure. Now, the plate with the bar magnets can then be removed without the spacers slipping.

5 The advantage of this method lies not only in the simplicity achieved regarding the possibility of being able to set many spacers in a high cycle time, but also in the further reduction in the visibility of the spacers 3 as a result of the adhesive no longer being needed in this case.

10

New ways have in turn been used for supplying the spacers 3. While the previous solutions individually take previously ready-made spacers 3 as spheres, cylinders, disks, springs or rings of ceramic and/or
15 metal from a stock of material and then feed them into the support setter, here the spacers 3 are produced in step with the cycle time of the automatic setting unit.

In a first variant, the spacers 3 are punched out from
20 a metal strip, fed in from the roll, by a tool, for example a punch. Directly from the punch, the spacers 3, or portions thereof, then fall for example through X/Y-positioned hoses to the setting-up location over the fixing element.

25 In a second variant, the spacers 3, or portions thereof, are cut to length from a wire fed in from the roll, for example by a saw or a cut-off wheel, and then likewise individually positioned further with respect to the setting-up location.

30 There is also provided the alternative of producing the spacers from a stock of material by means of a suitable laser system for separating or cutting materials. This is particularly advantageous when the spacers have complex geometries.

There is also additionally the possibility of providing spacers 3, or portions thereof, which are not made of magnetic or magnetizable material, with an electroplating.

- 5 As a particular embodiment, for example, the surfaces of the spacers 3 which come into contact with a glass surface can be provided with an additional insulating layer. This insulating layer can be applied by a structuring in the form of an embossing or etching.
- 10 Independently of the above-described fixing of the spacers 3, it is possible, for example, for their spacer supports 9 to be fixed with an adhesive and for the associated spacer sliders to be set on. Here, for example, getter material can be applied as a type of
- 15 fixing means.

Figure 4 shows various embodiments of spacers.

- In example a of figure 4, the spacer 3 chosen is in the form of a hollow cylinder slit open on the longitudinal
- 20 side. This design form ensures, in addition to the spacing determined by the selected diameter of the hollow cylinder, also an elasticity function between the glass surfaces 4 within certain limits. This means that suddenly occurring strong impacts or pressure
- 25 peaks on the vacuum insulated glass are as it were cushioned without harming the inner surface of the respectively bearing glass surface 4 and thus providing a cause for a subsequent breakage. It is additionally ensured by means of the rounding of the surface of the
- 30 hollow cylinder considered that both glass surfaces 4 which bound the vacuum insulated glass can be displaced with respect to one another with low friction and thus the glass plates can be adapted more easily to different thermal loads. A further advantage of the

design form of a spacer 3 shown here is that a particularly large amount of getter material 10 can be accommodated particularly easily in its interior.

5 A fluid or a gas can also preferably be situated in the interior of the spacers, wherein the respective filling openings are tightly closed after the filling operation. This measure increases the plastic and elastic behavior of the spacers 3 and thus reduces the mechanical loading. Moreover, such a measure reduces
10 the sound transmission, and the stability, precisely in the case of very large-area vacuum insulated glasses, and the temperature behavior are improved.

In example b of figure 4 a specific design form of the spacer according to figure 3 is represented. It can be
15 seen here that the respective spacer, represented in two cross sections, in the form of two cylinders of different diameters standing on one another, has bores which are filled with getter material and have openings which emerge radially into the space of the vacuum.

20 In example c of figure 4, a variant of the design form according to example a is shown in which the hollow cylinder, which is slit on a longitudinal side, is arranged so as to stand perpendicularly, wherein the entire spacer is also in this case divided into two by
25 the attachment of an additional spacer.

Figure 5 shows a particular variant of spacers 3, comprising 3 components, in which the central connecting element 11 is fitted between the two
30 segments in such a way that, although it is fixedly inserted into the two mounts shown, it can move minimally. This fact is represented by means of the surface jags shown.

WO 2012/163326

- 14 -

PCT/DE2012/000549

The materials which are preferably suitable for the production of spacers 3 according to the invention are amber, alpha-heminitrate and sintered material. The sintering of materials suitable for this purpose is
5 preferably carried out with substances which, after sintering, display a positive effect for the stability, the resonant damping and the temperature behavior.

The proposed measures according to the invention ensure
10 that the thermal stresses on a vacuum insulated glass unit are substantially reduced in each case not only as individual measures but also as a combination of such measures. This leads in any event to an increase in the service life of such a unit.

15

The complex control of the movement sequences described requires a special control program.

List of reference signs

1	Vacuum-tight frame
2	Distribution lines
3	Spacer
3a	Fixed points
4	Glass surface
5	Outer glass
6	Inner glass
7	Spacer slider
8	Sliding surface
9	Spacer support
10	Getter material
11	Connecting element

IN THE CLAIMS:

1. A vacuum insulated glass comprising two or more glass plates oriented in parallel and sealed in an air-tight manner at an outer edge, by means of strip-shaped connecting elements mounted on an entire periphery of the vacuum insulated glass, to define an evacuable interior space comprising spacers, the vacuum insulated glass having the following features:
- a) the spacers each comprise at least two segments associated with one another,
 - b) the spacers are arranged on closed distribution lines which are arranged at a distance from one another so as to extend substantially parallel to each edge of the glass plate, and to define a curve in corner regions of the glass plate,
 - c) the segments are made of different materials, and
 - d) the segments comprise one or more surfaces in contact with one or more of the glass plates and one or more surfaces out of contact with the glass plates, wherein the surfaces out of contact with the glass plates have at least one of a first coating or structuring.
2. The vacuum insulated glass as claimed in claim 1, wherein the strip-shaped connecting elements are metal strips mutually connected in a vacuum-tight manner.

3. The vacuum insulated glass as claimed in claim 1
or 2, wherein the spacers are arranged in
hexagonal structures, wherein first hexagonal
5 structures located in one or more edge regions
of the vacuum insulated glass each further
comprise an additional central spacer arranged
in a center of the first hexagonal structure, and
wherein second hexagonal structures located in a
10 central region of the vacuum insulated glass each
lack the additional central spacer.
4. The vacuum insulated glass as claimed in any one
of claims 1 to 3, wherein at least one of the
15 surfaces in contact with one or more of the glass
plates has at least one of a second coating or
structuring for increased thermal insulation.
5. The vacuum insulated glass as claimed in any one
20 of claims 1 to 4, wherein the glass plates
comprise an outer glass plate and an inner glass
plate, and wherein the segments comprise a spacer
support in contact with the outer glass plate and
a spacer slider in contact with the inner glass
25 plate, wherein at least a portion of the spacer
support has a high heat transmitting resistance.
6. The vacuum insulated glass as claimed in claim
5, wherein the spacer support comprises a first
30 sliding surface in sliding contact with a second
sliding surface of the spacer slider, the first
and second sliding surfaces being adapted to
mutually slide in a defined manner, even under a
high contact pressure.

7. The vacuum insulated glass as claimed in any one of claims 1 to 6, wherein one or more spacers, or parts thereof, comprise getter material or are completely produced from sintered material having a gettering effect.
8. The vacuum insulated glass as claimed in any one of claims 1 to 7, wherein one or more spacers comprise more than two segments, wherein the more than two segments serve to at least one of: reduce thermal conductivity at a location of the spacer; and achieve defined optical effects.
9. The vacuum insulated glass as claimed in any one of claims 1 to 8, wherein one or more of the spacers comprise more than two segments, and wherein the at least one of the first coating or structuring is adapted to provide one or more of a predetermined friction behavior and an improvement in at least one of the stability and elasticity of the vacuum insulated glass.

Fig. 1

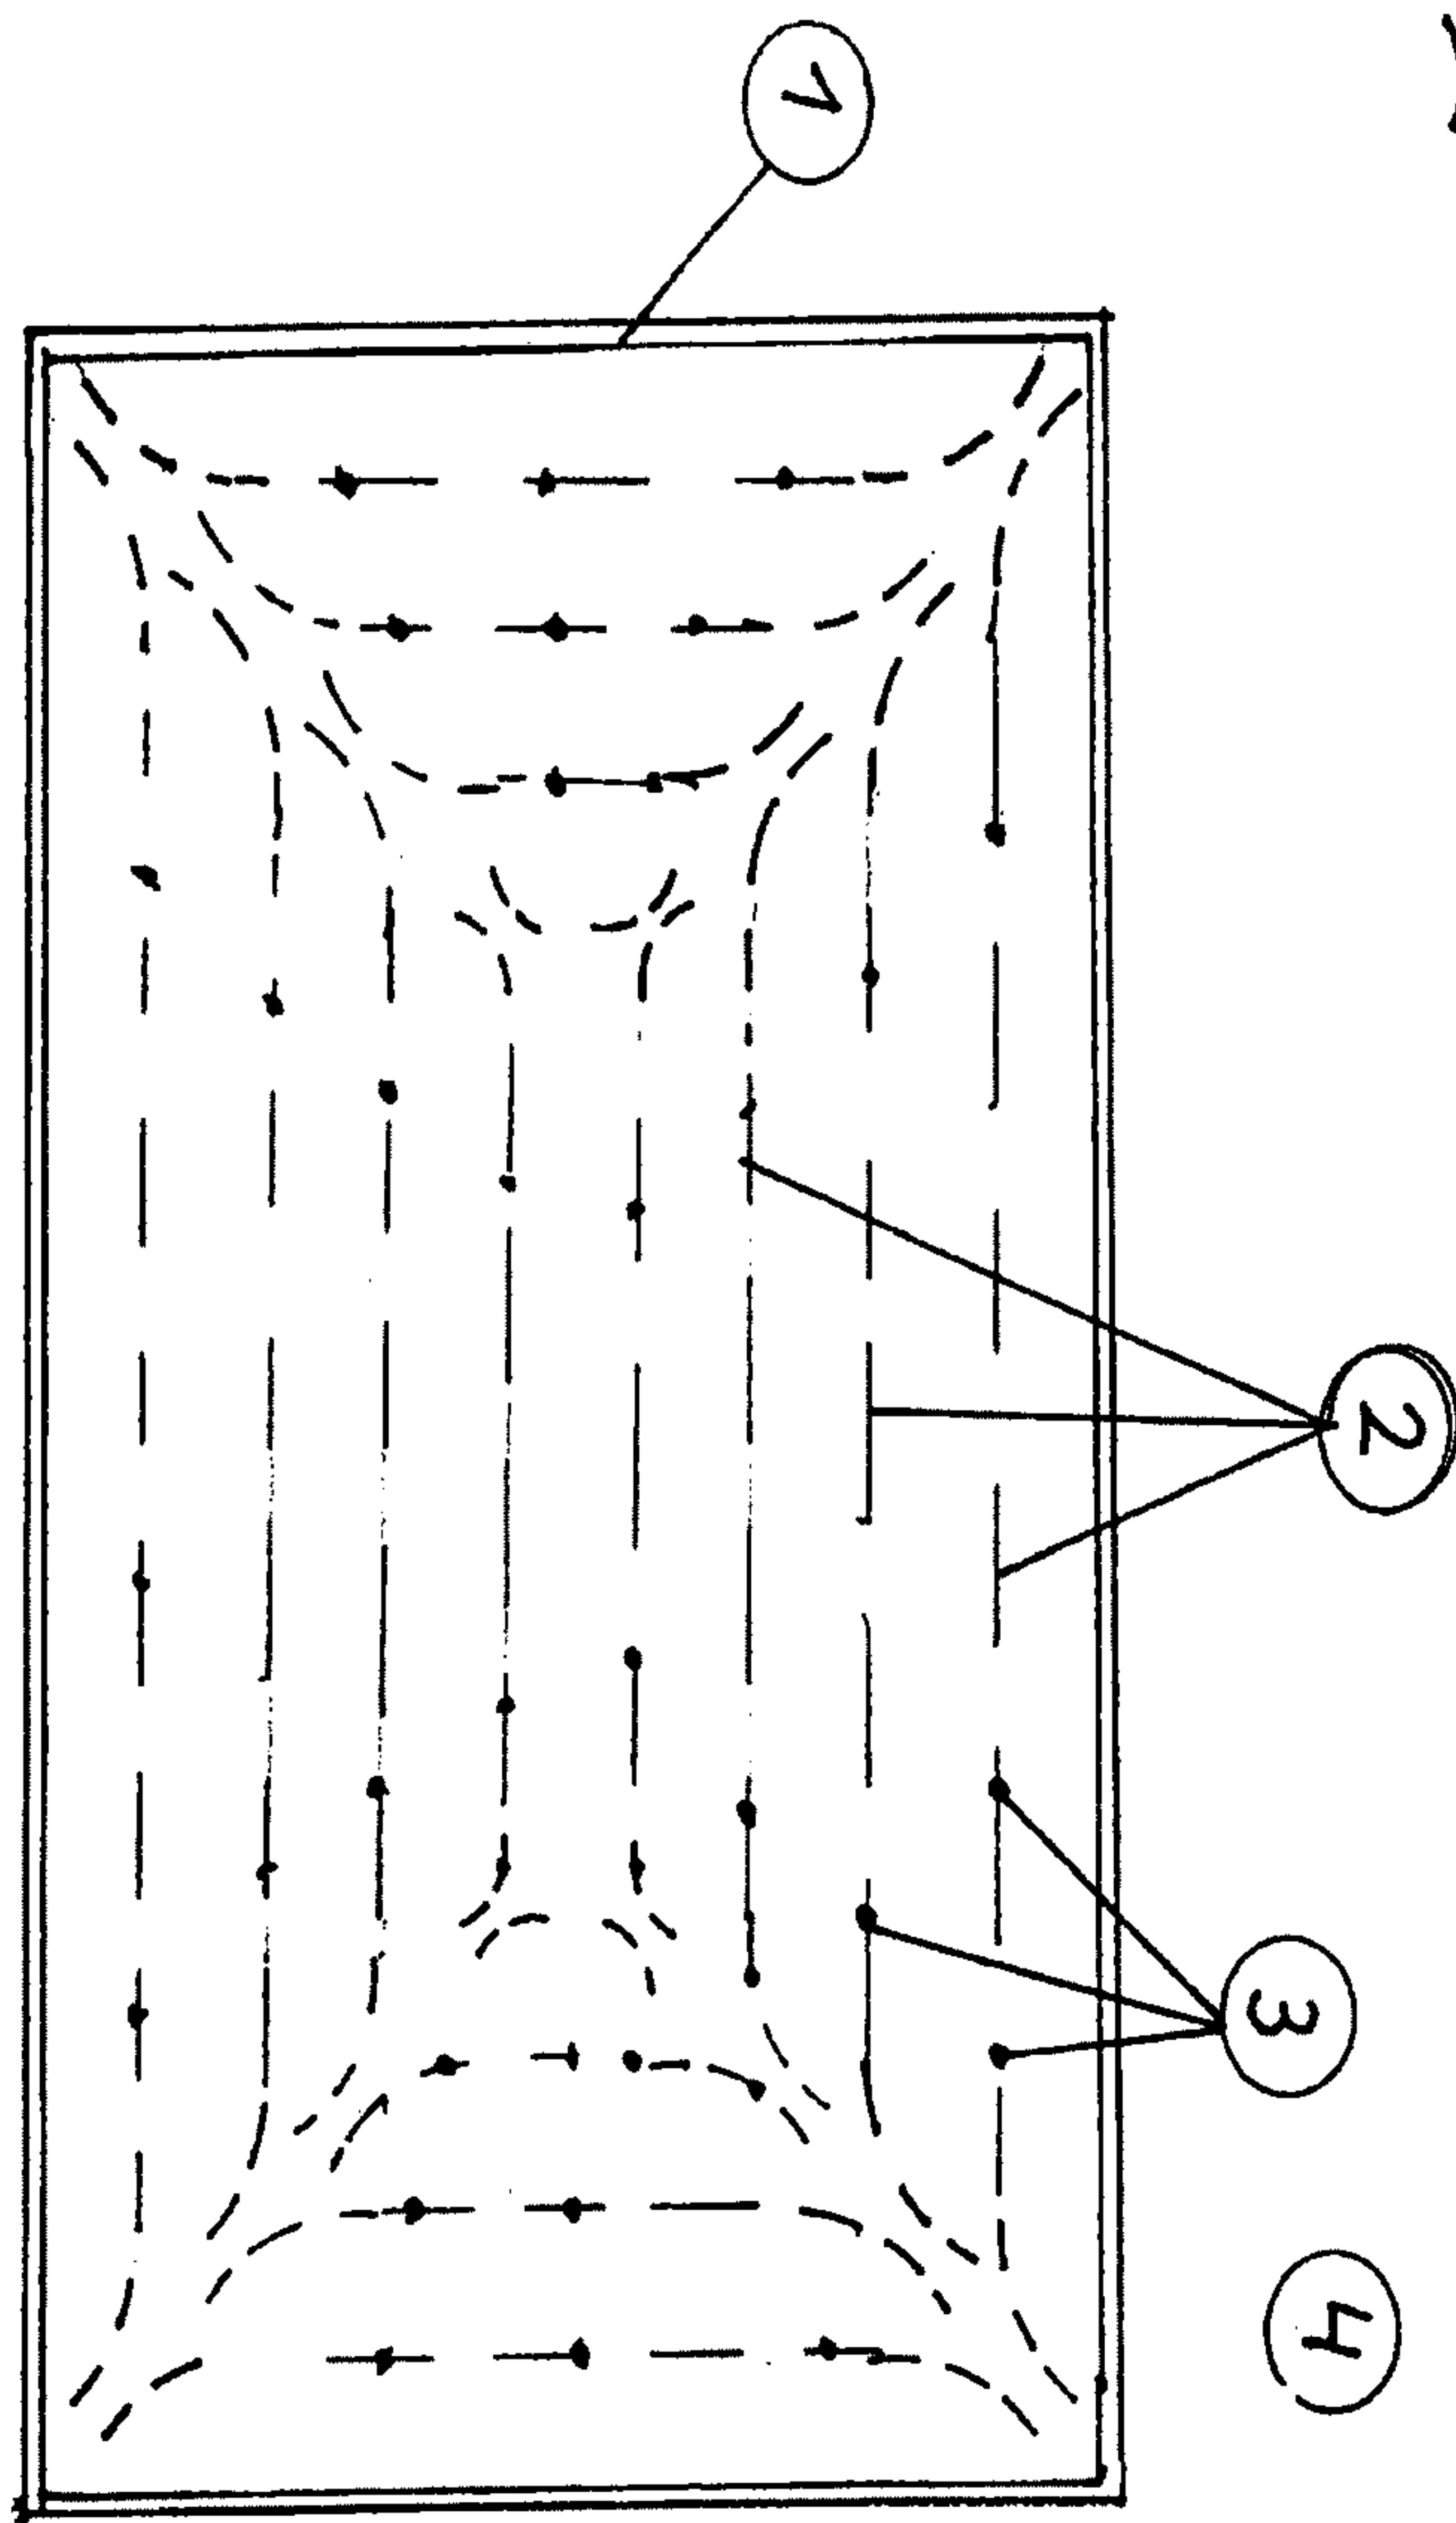
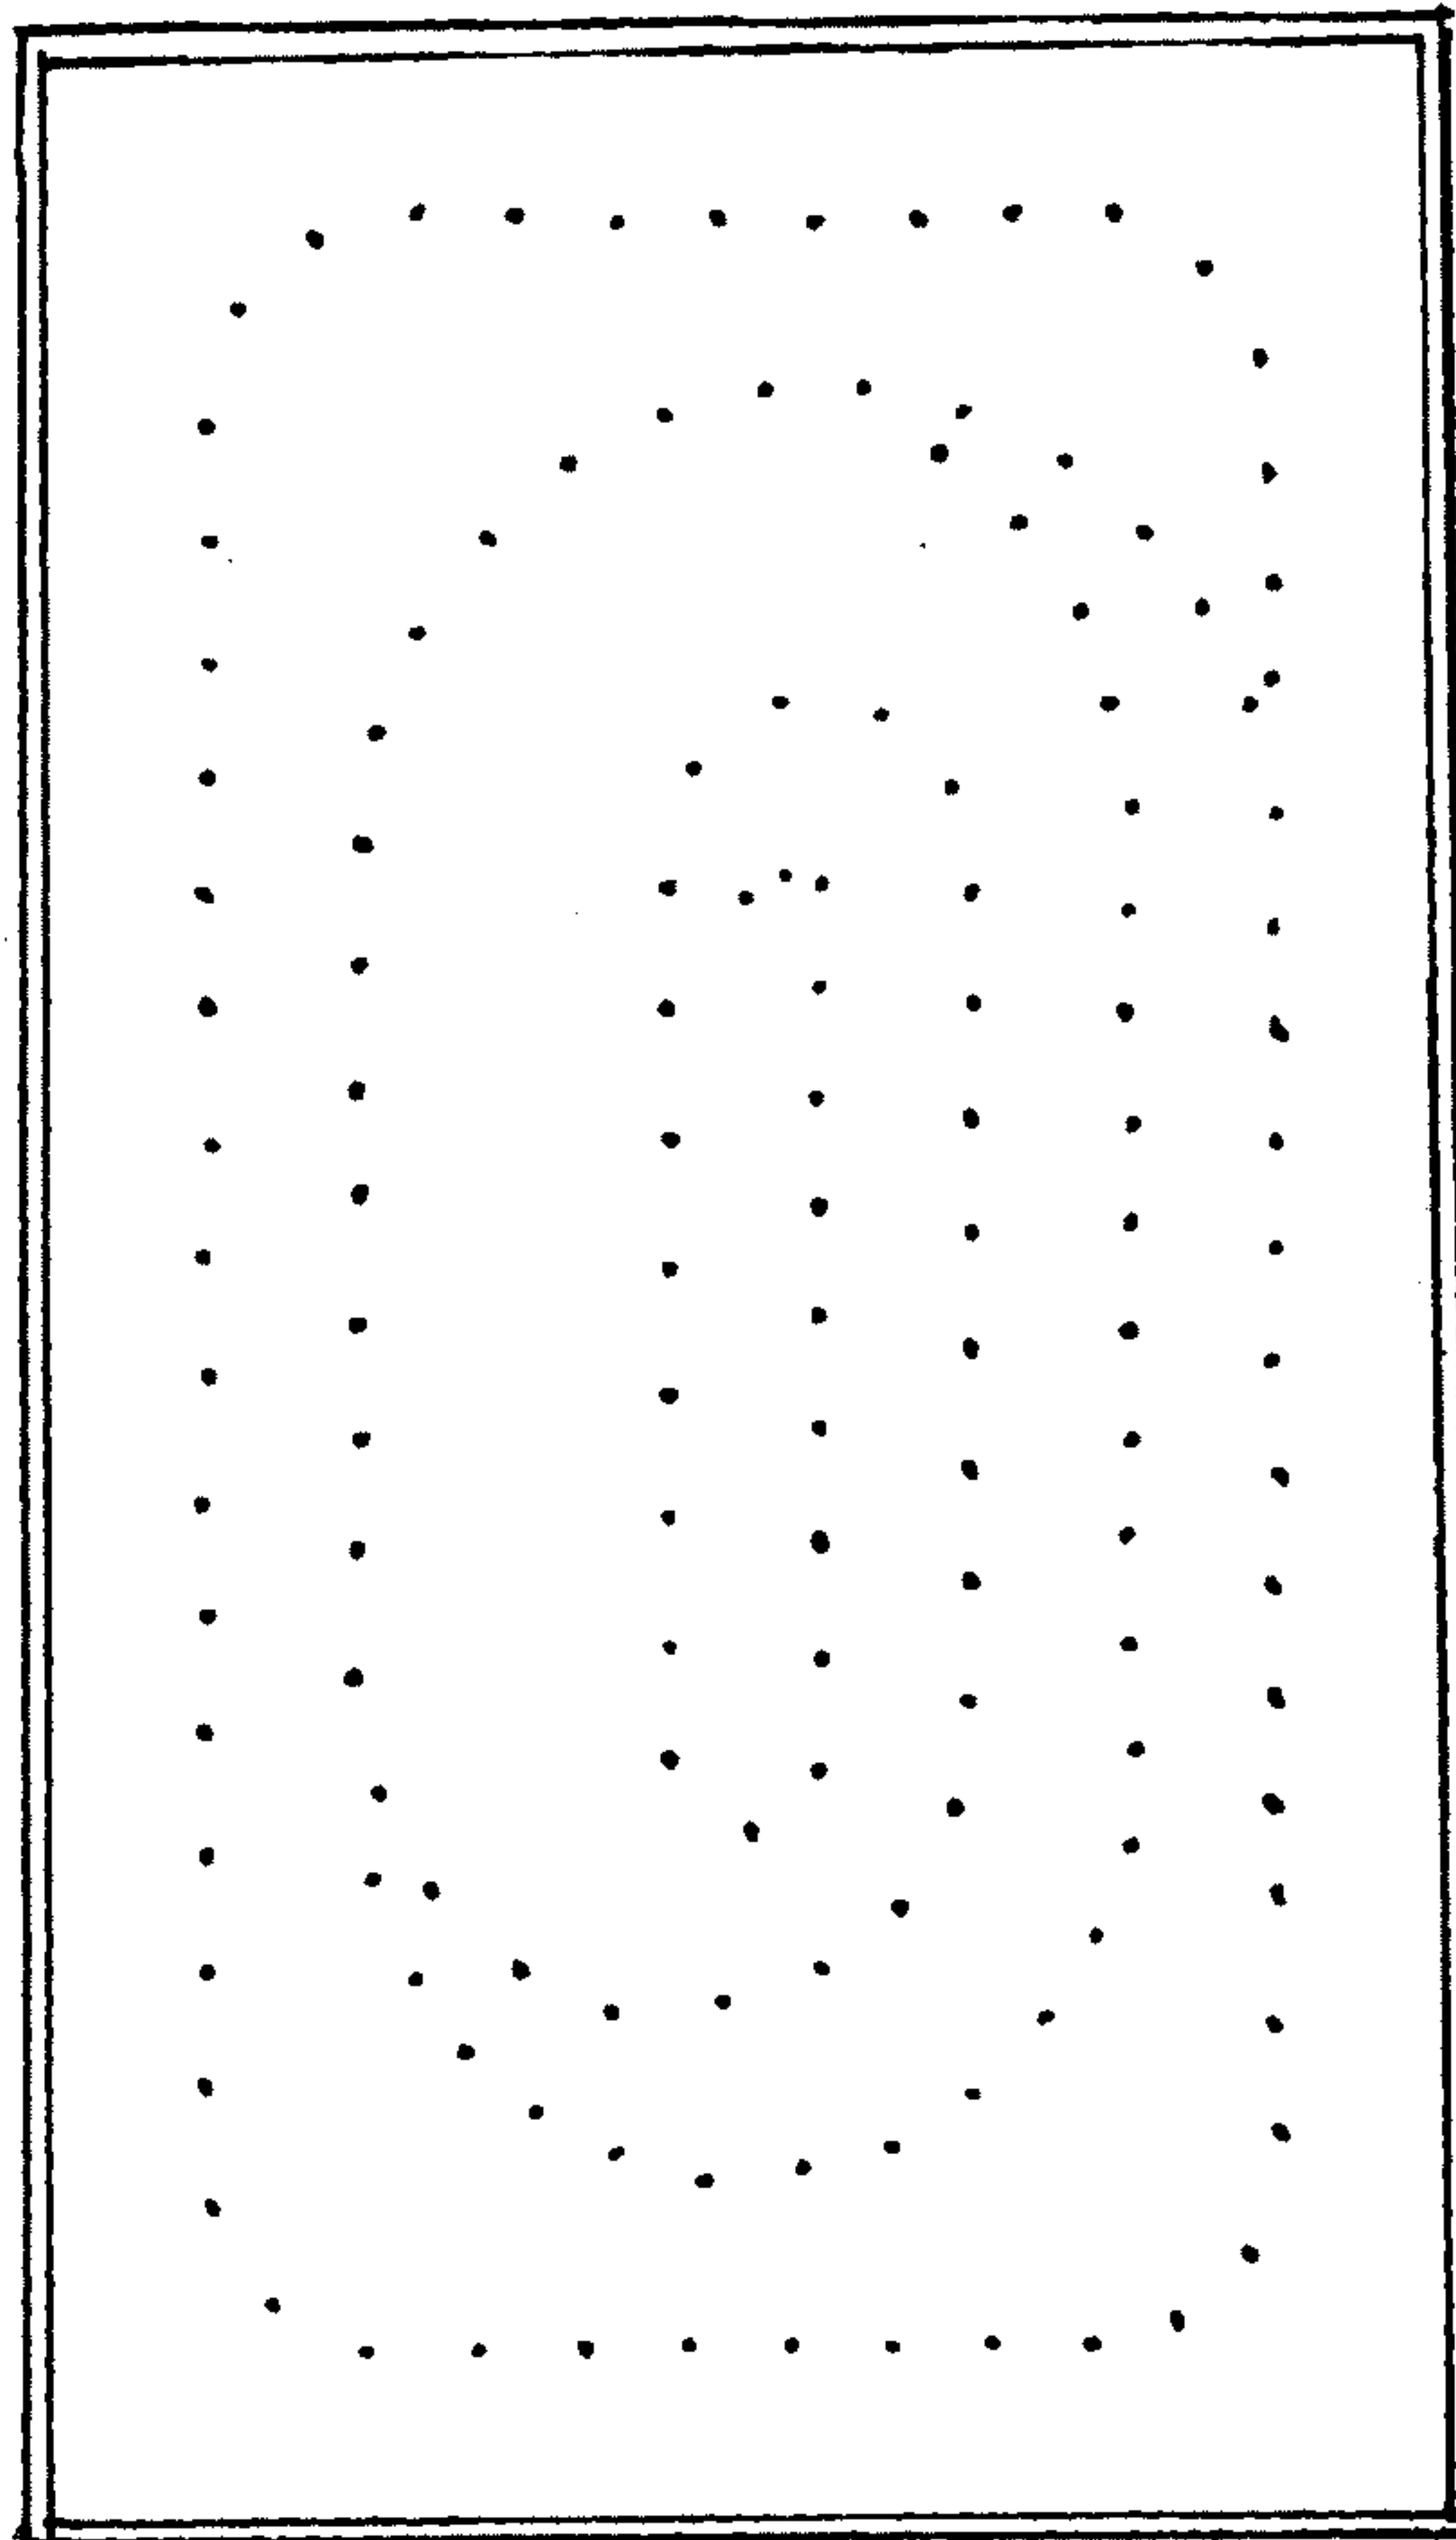
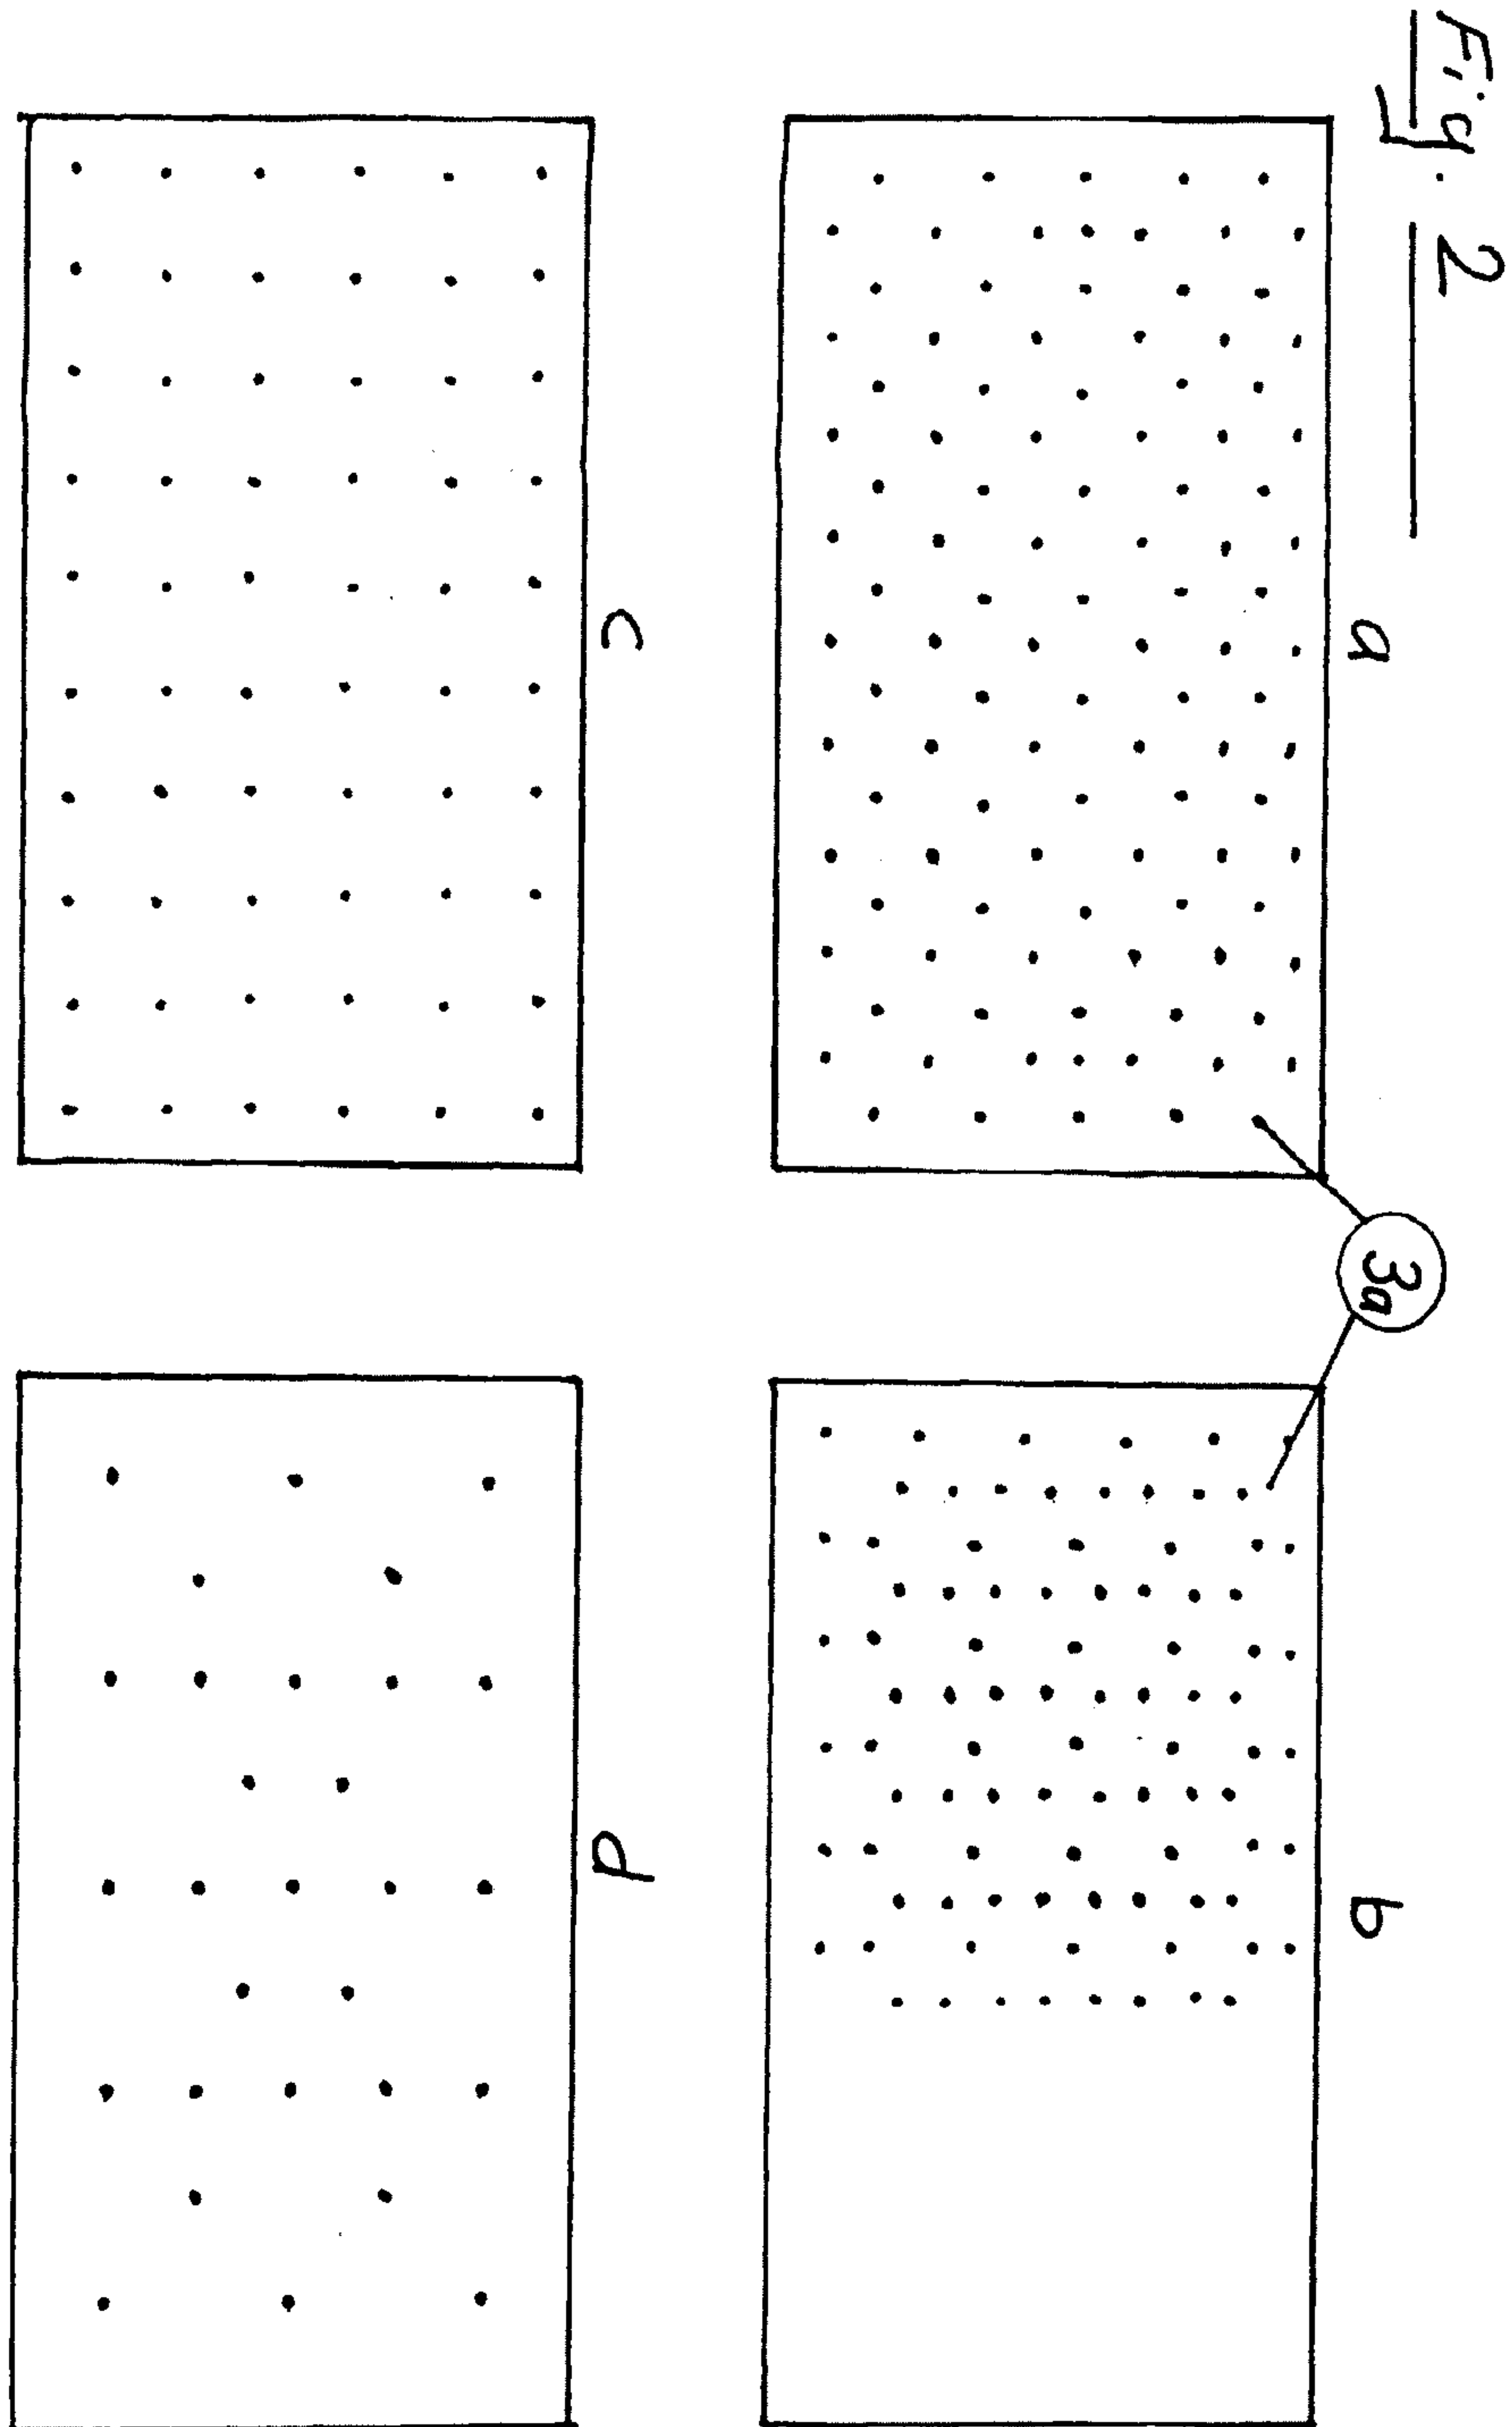


Fig. 1a





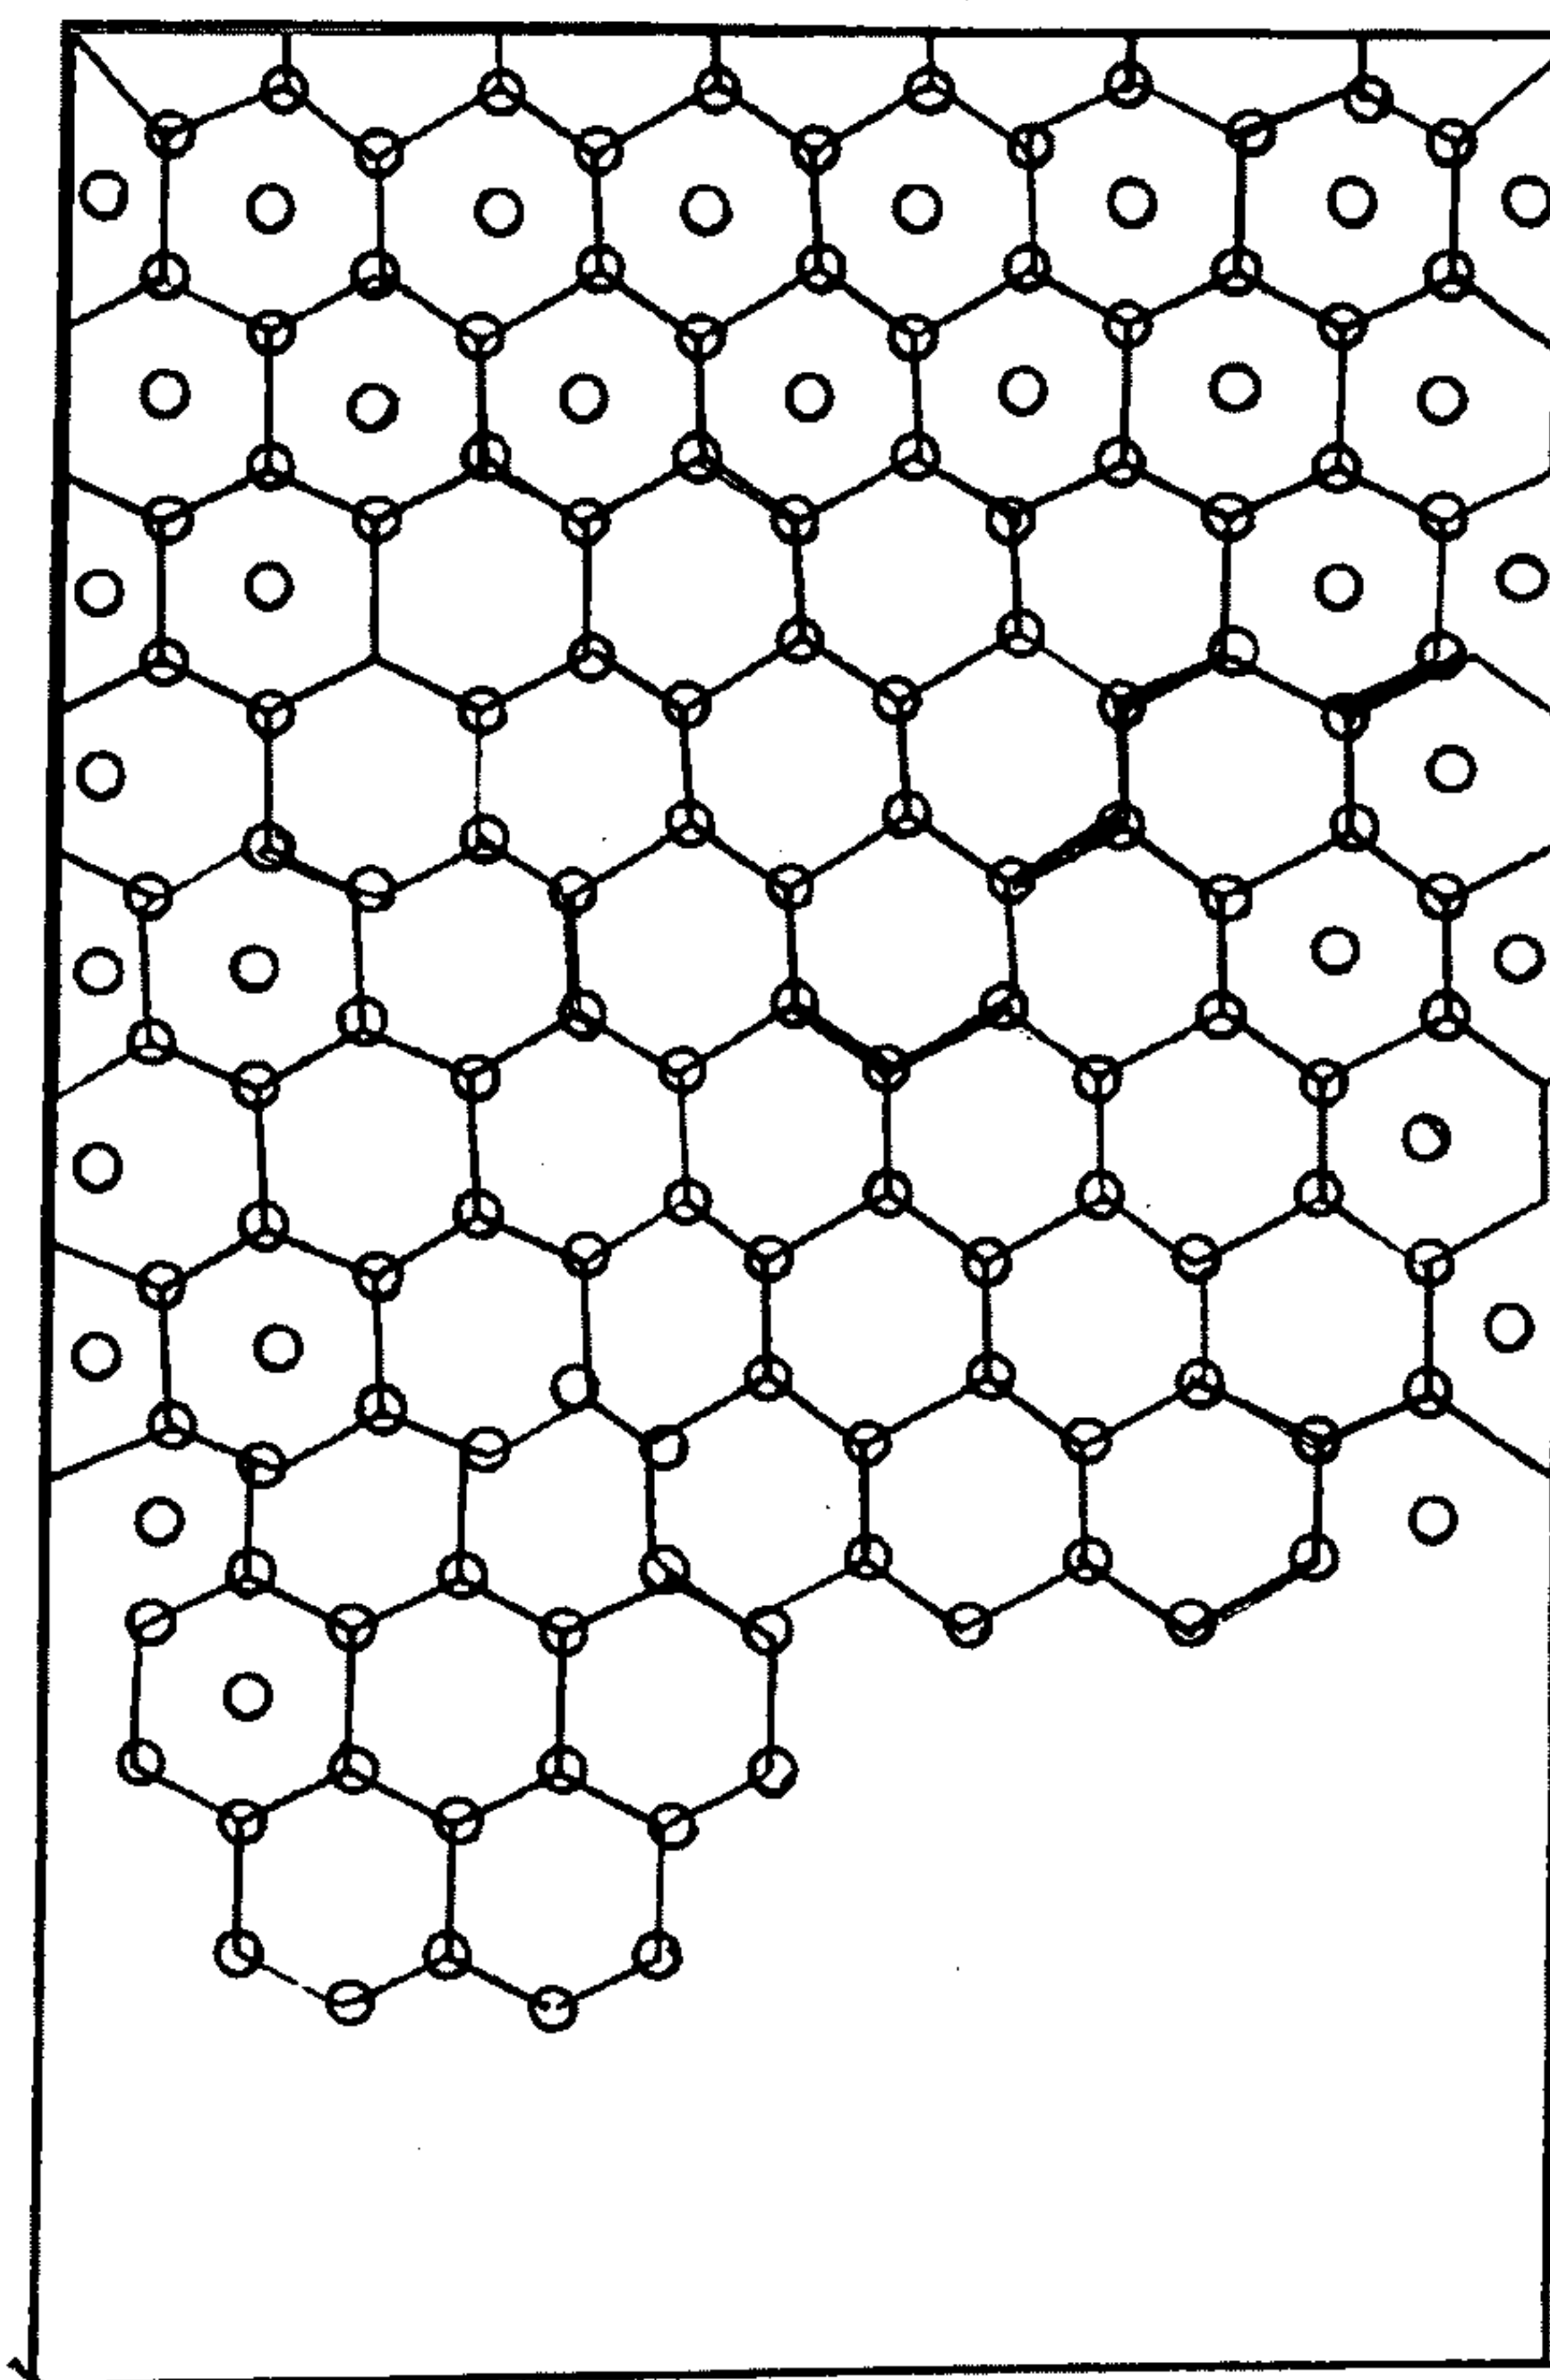


Fig. 2a

Fig. 3

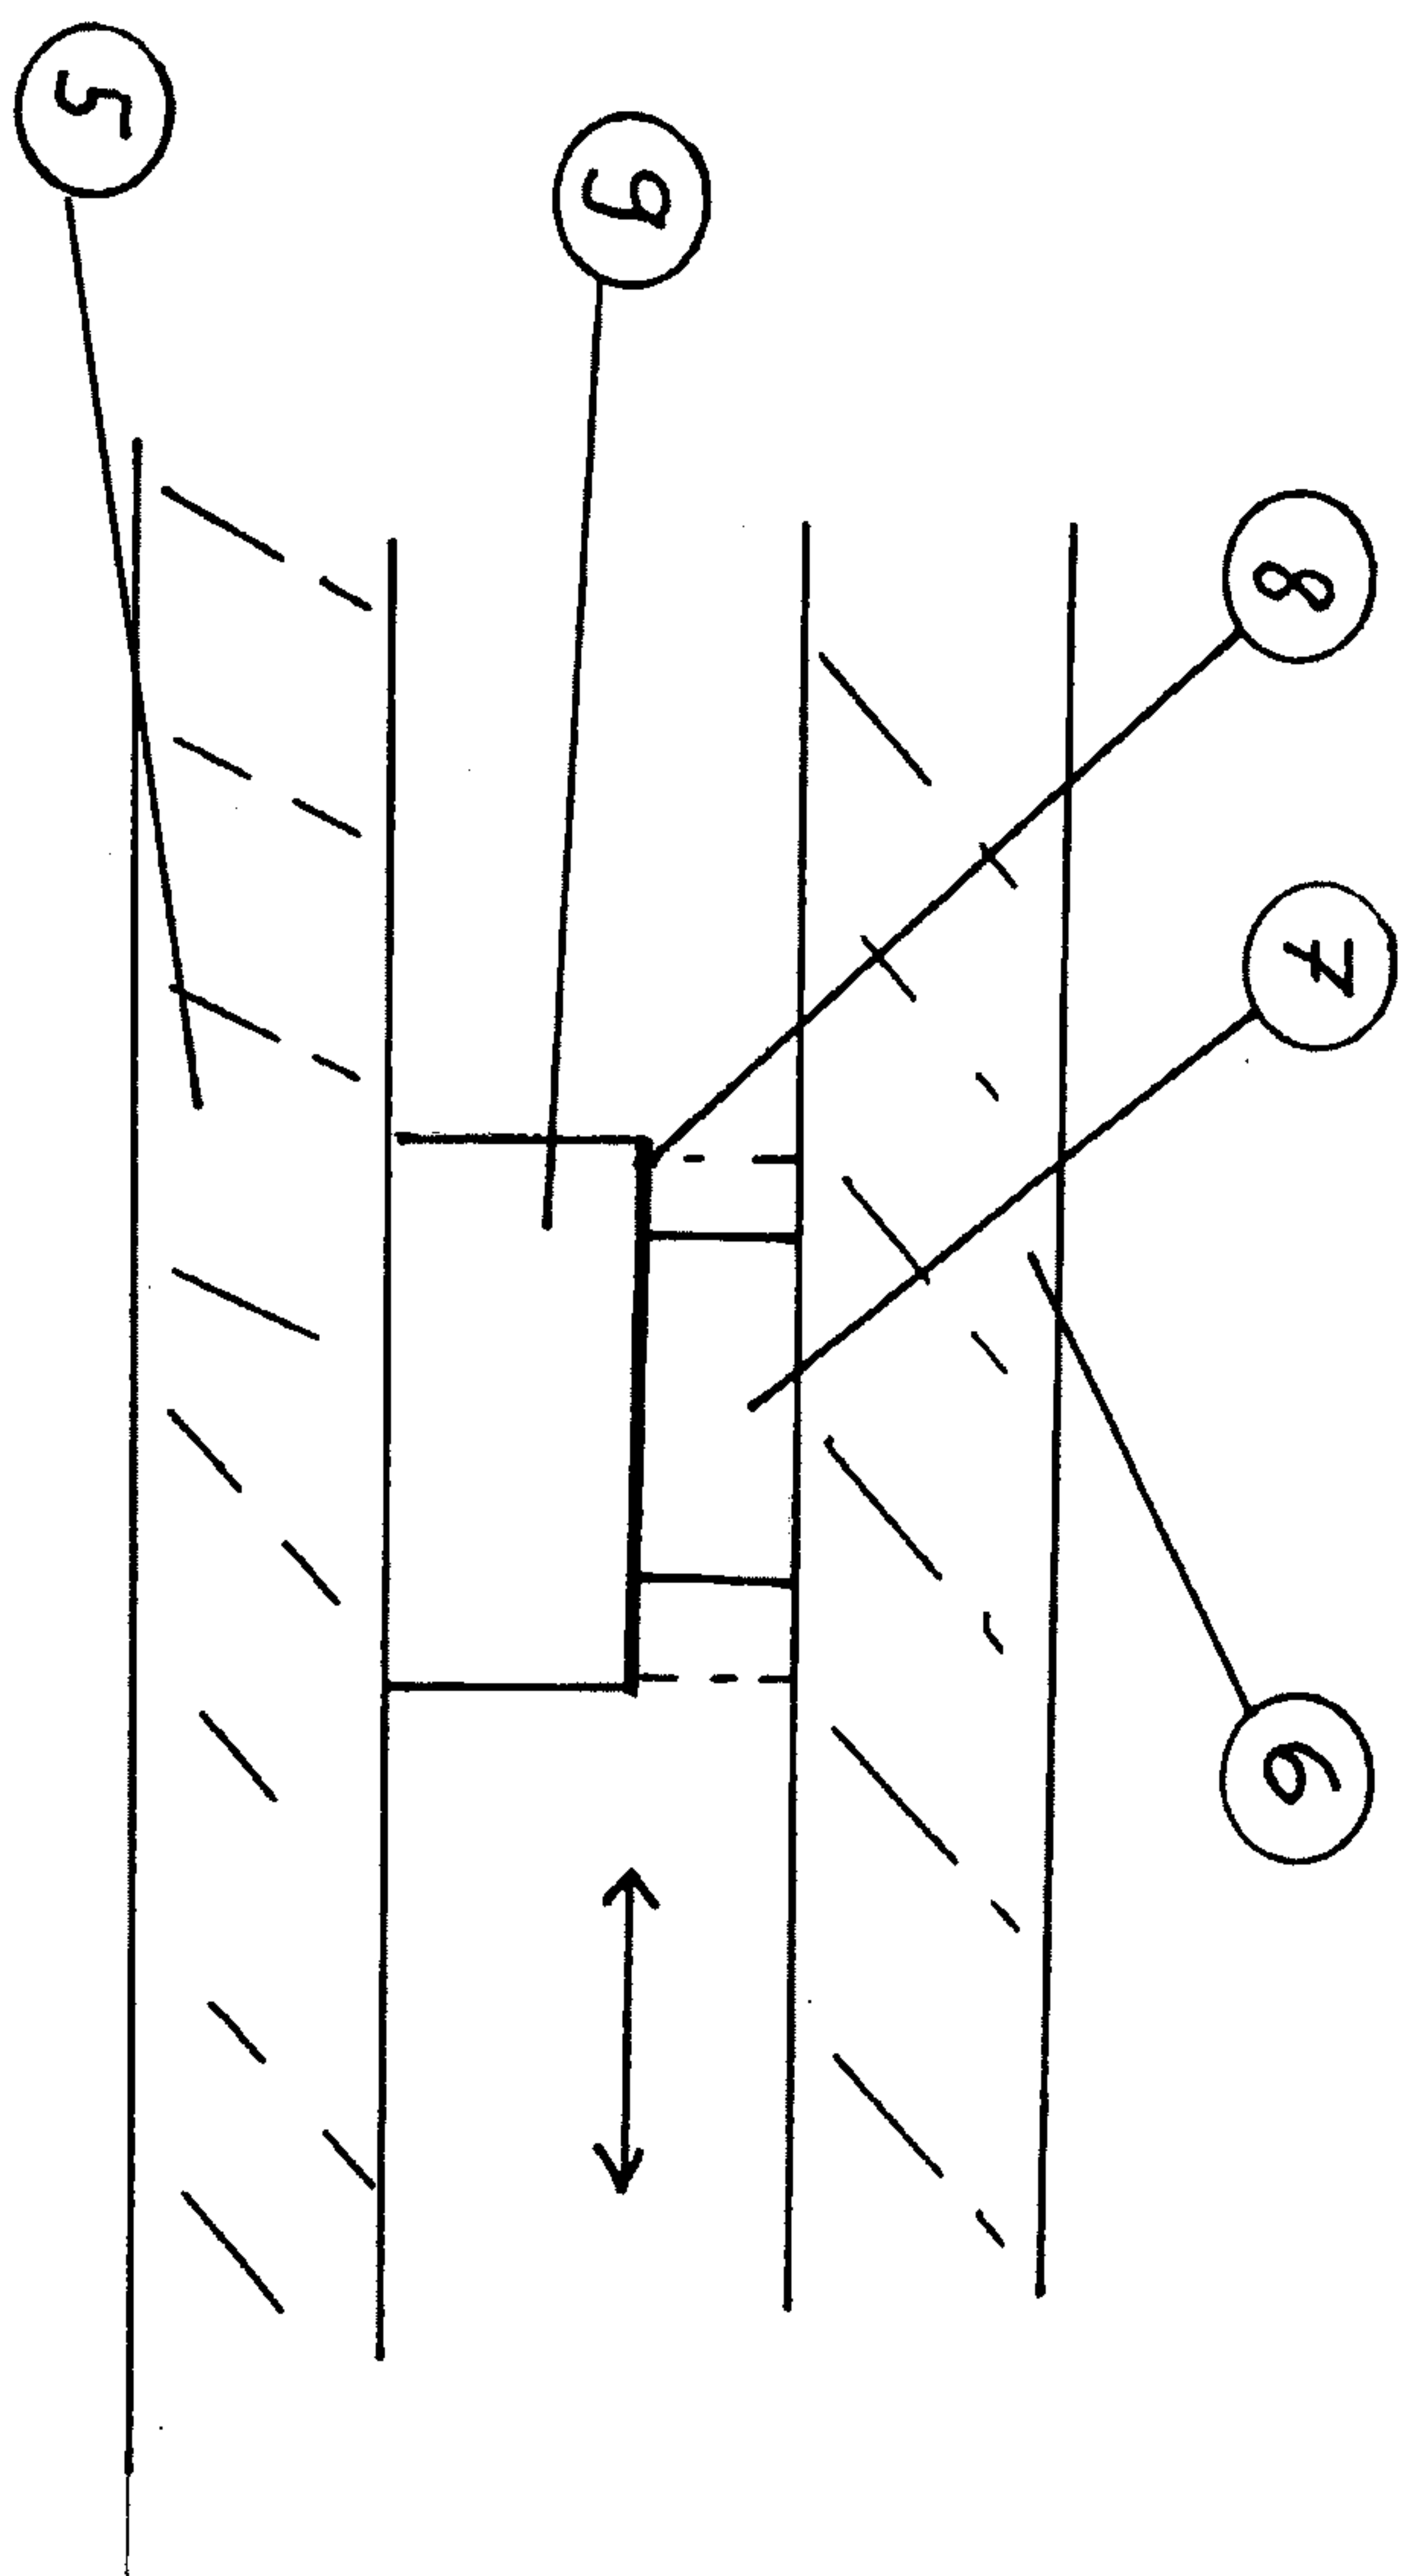


Fig. 3a

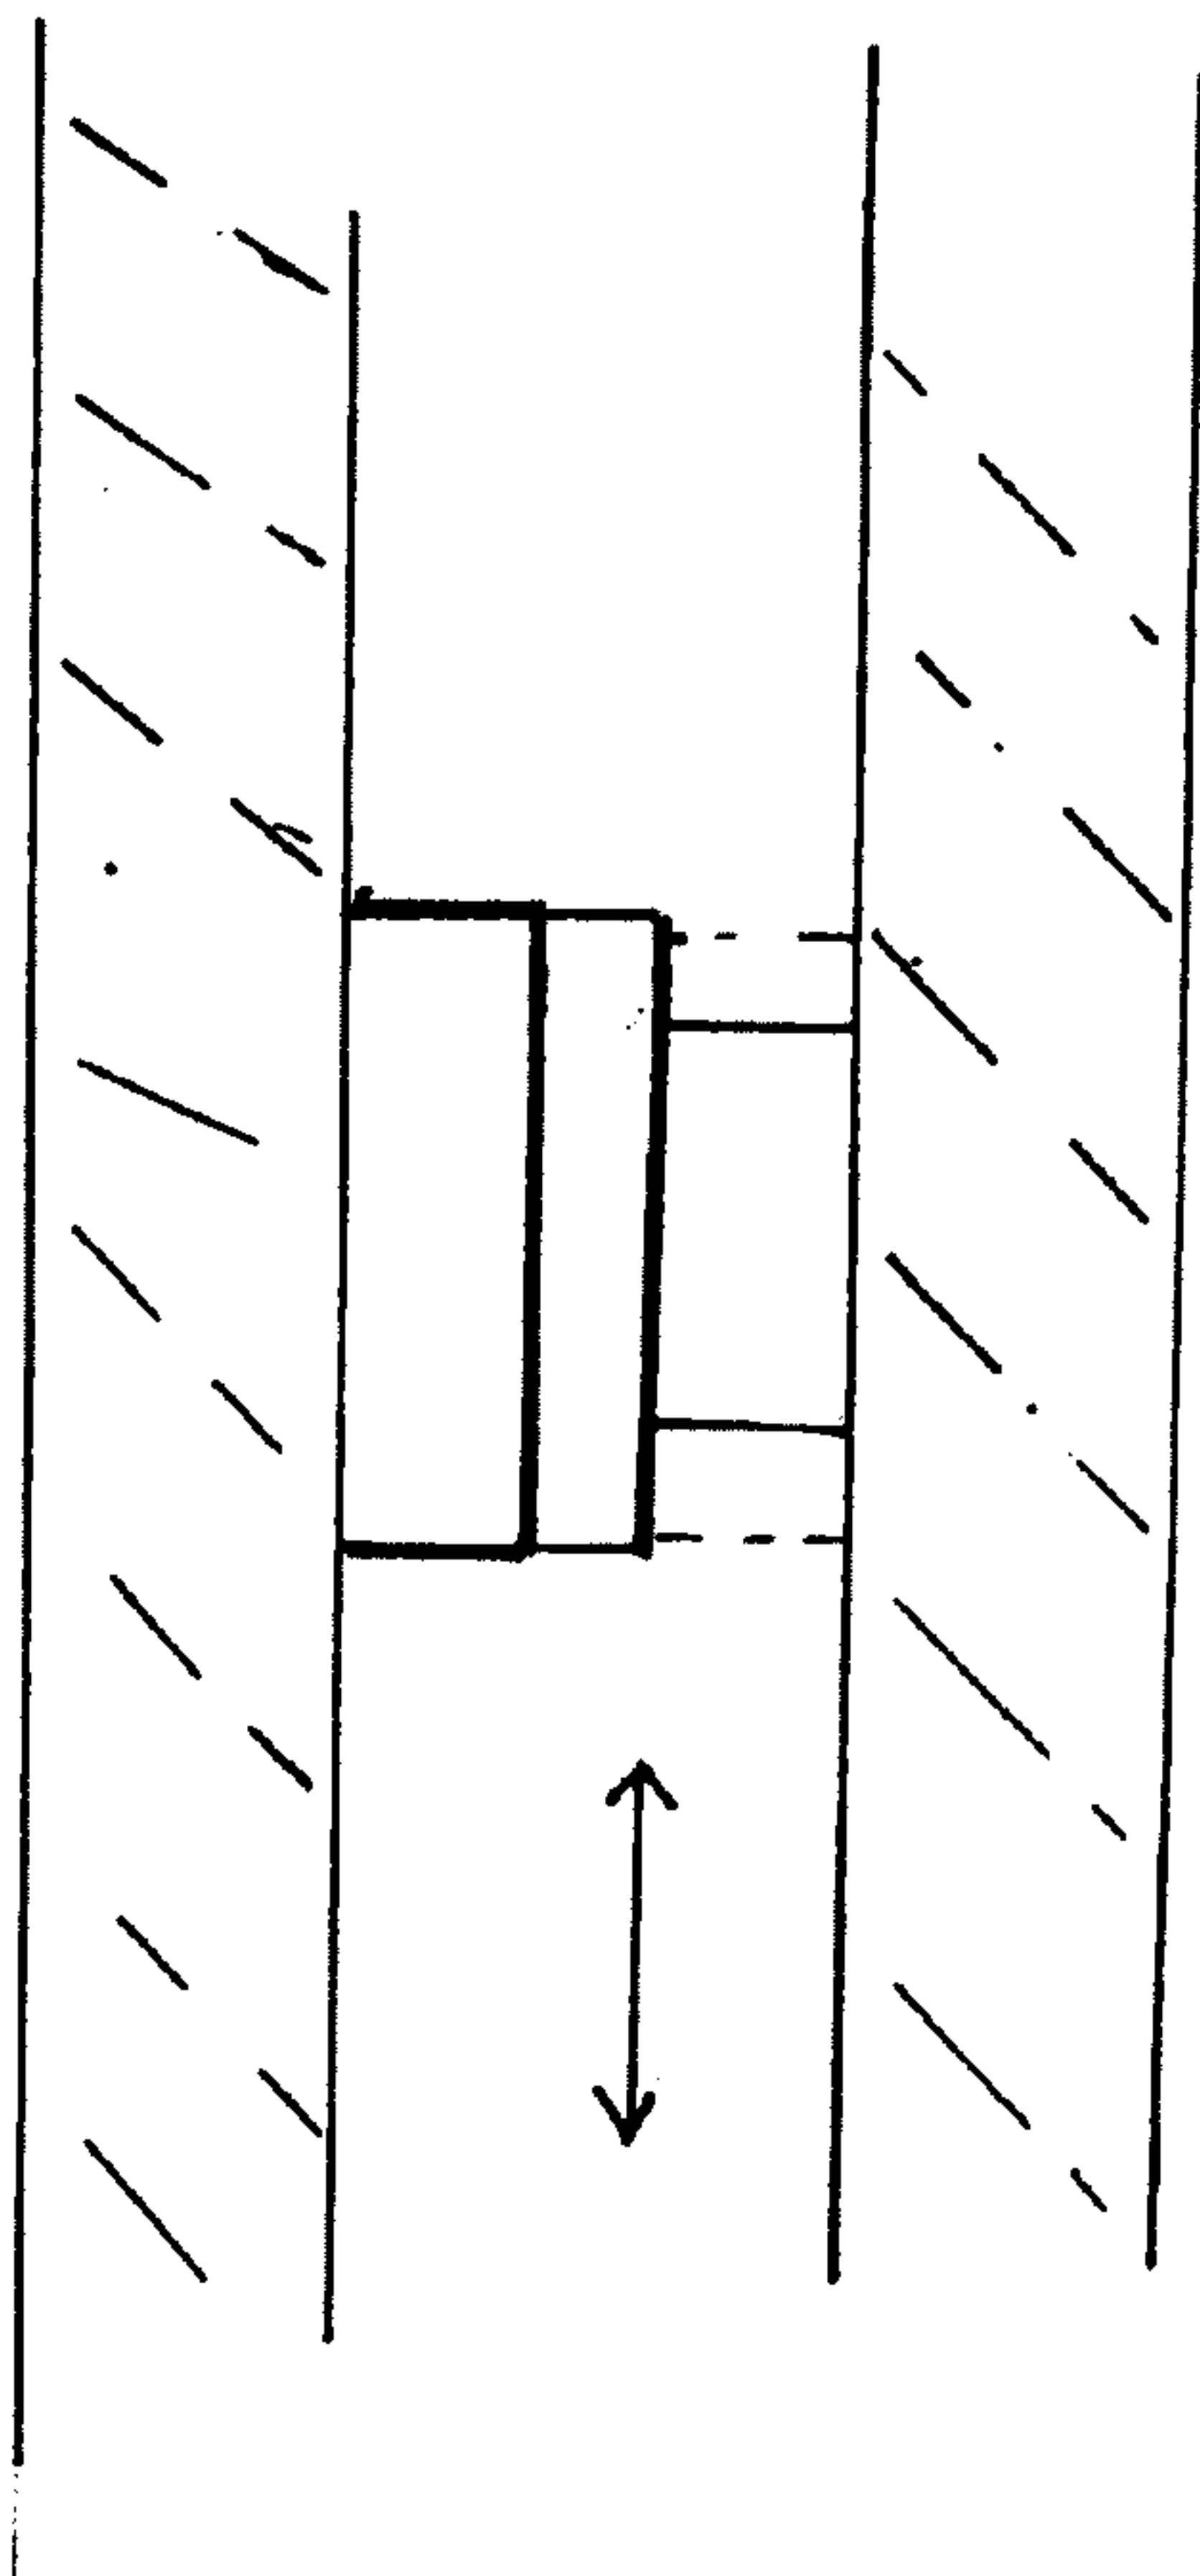


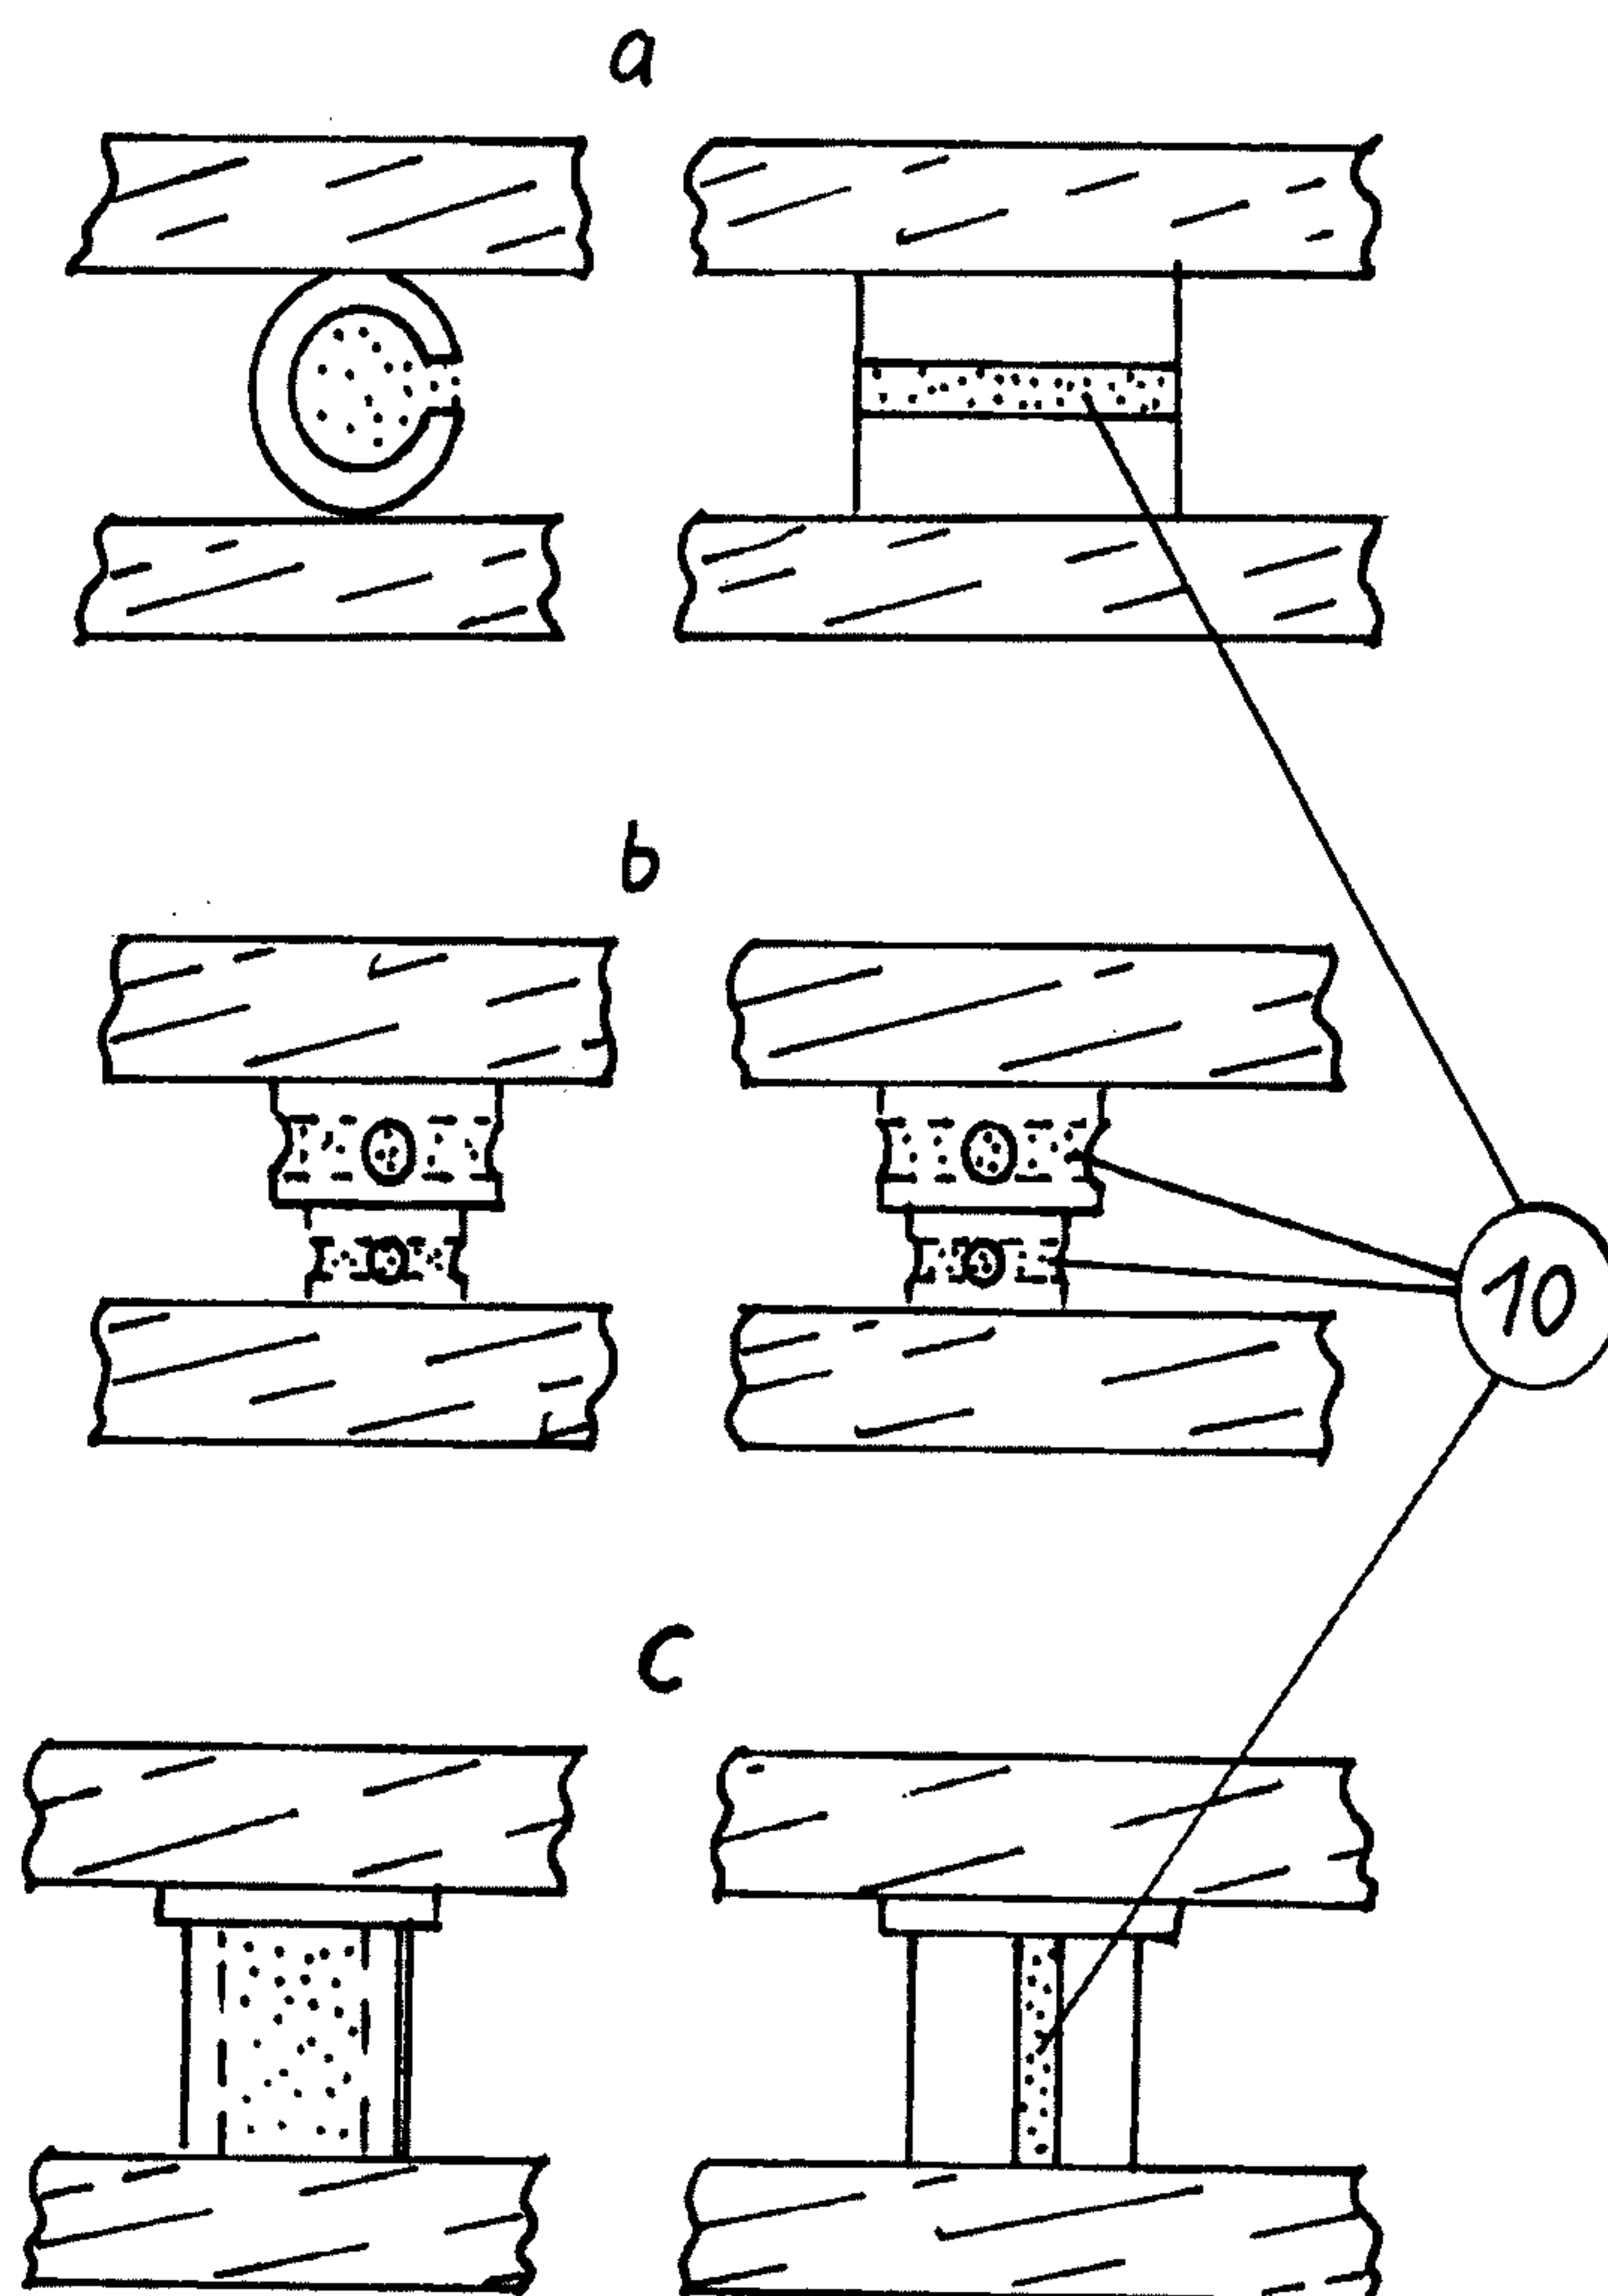
Fig. 4

Fig. 5

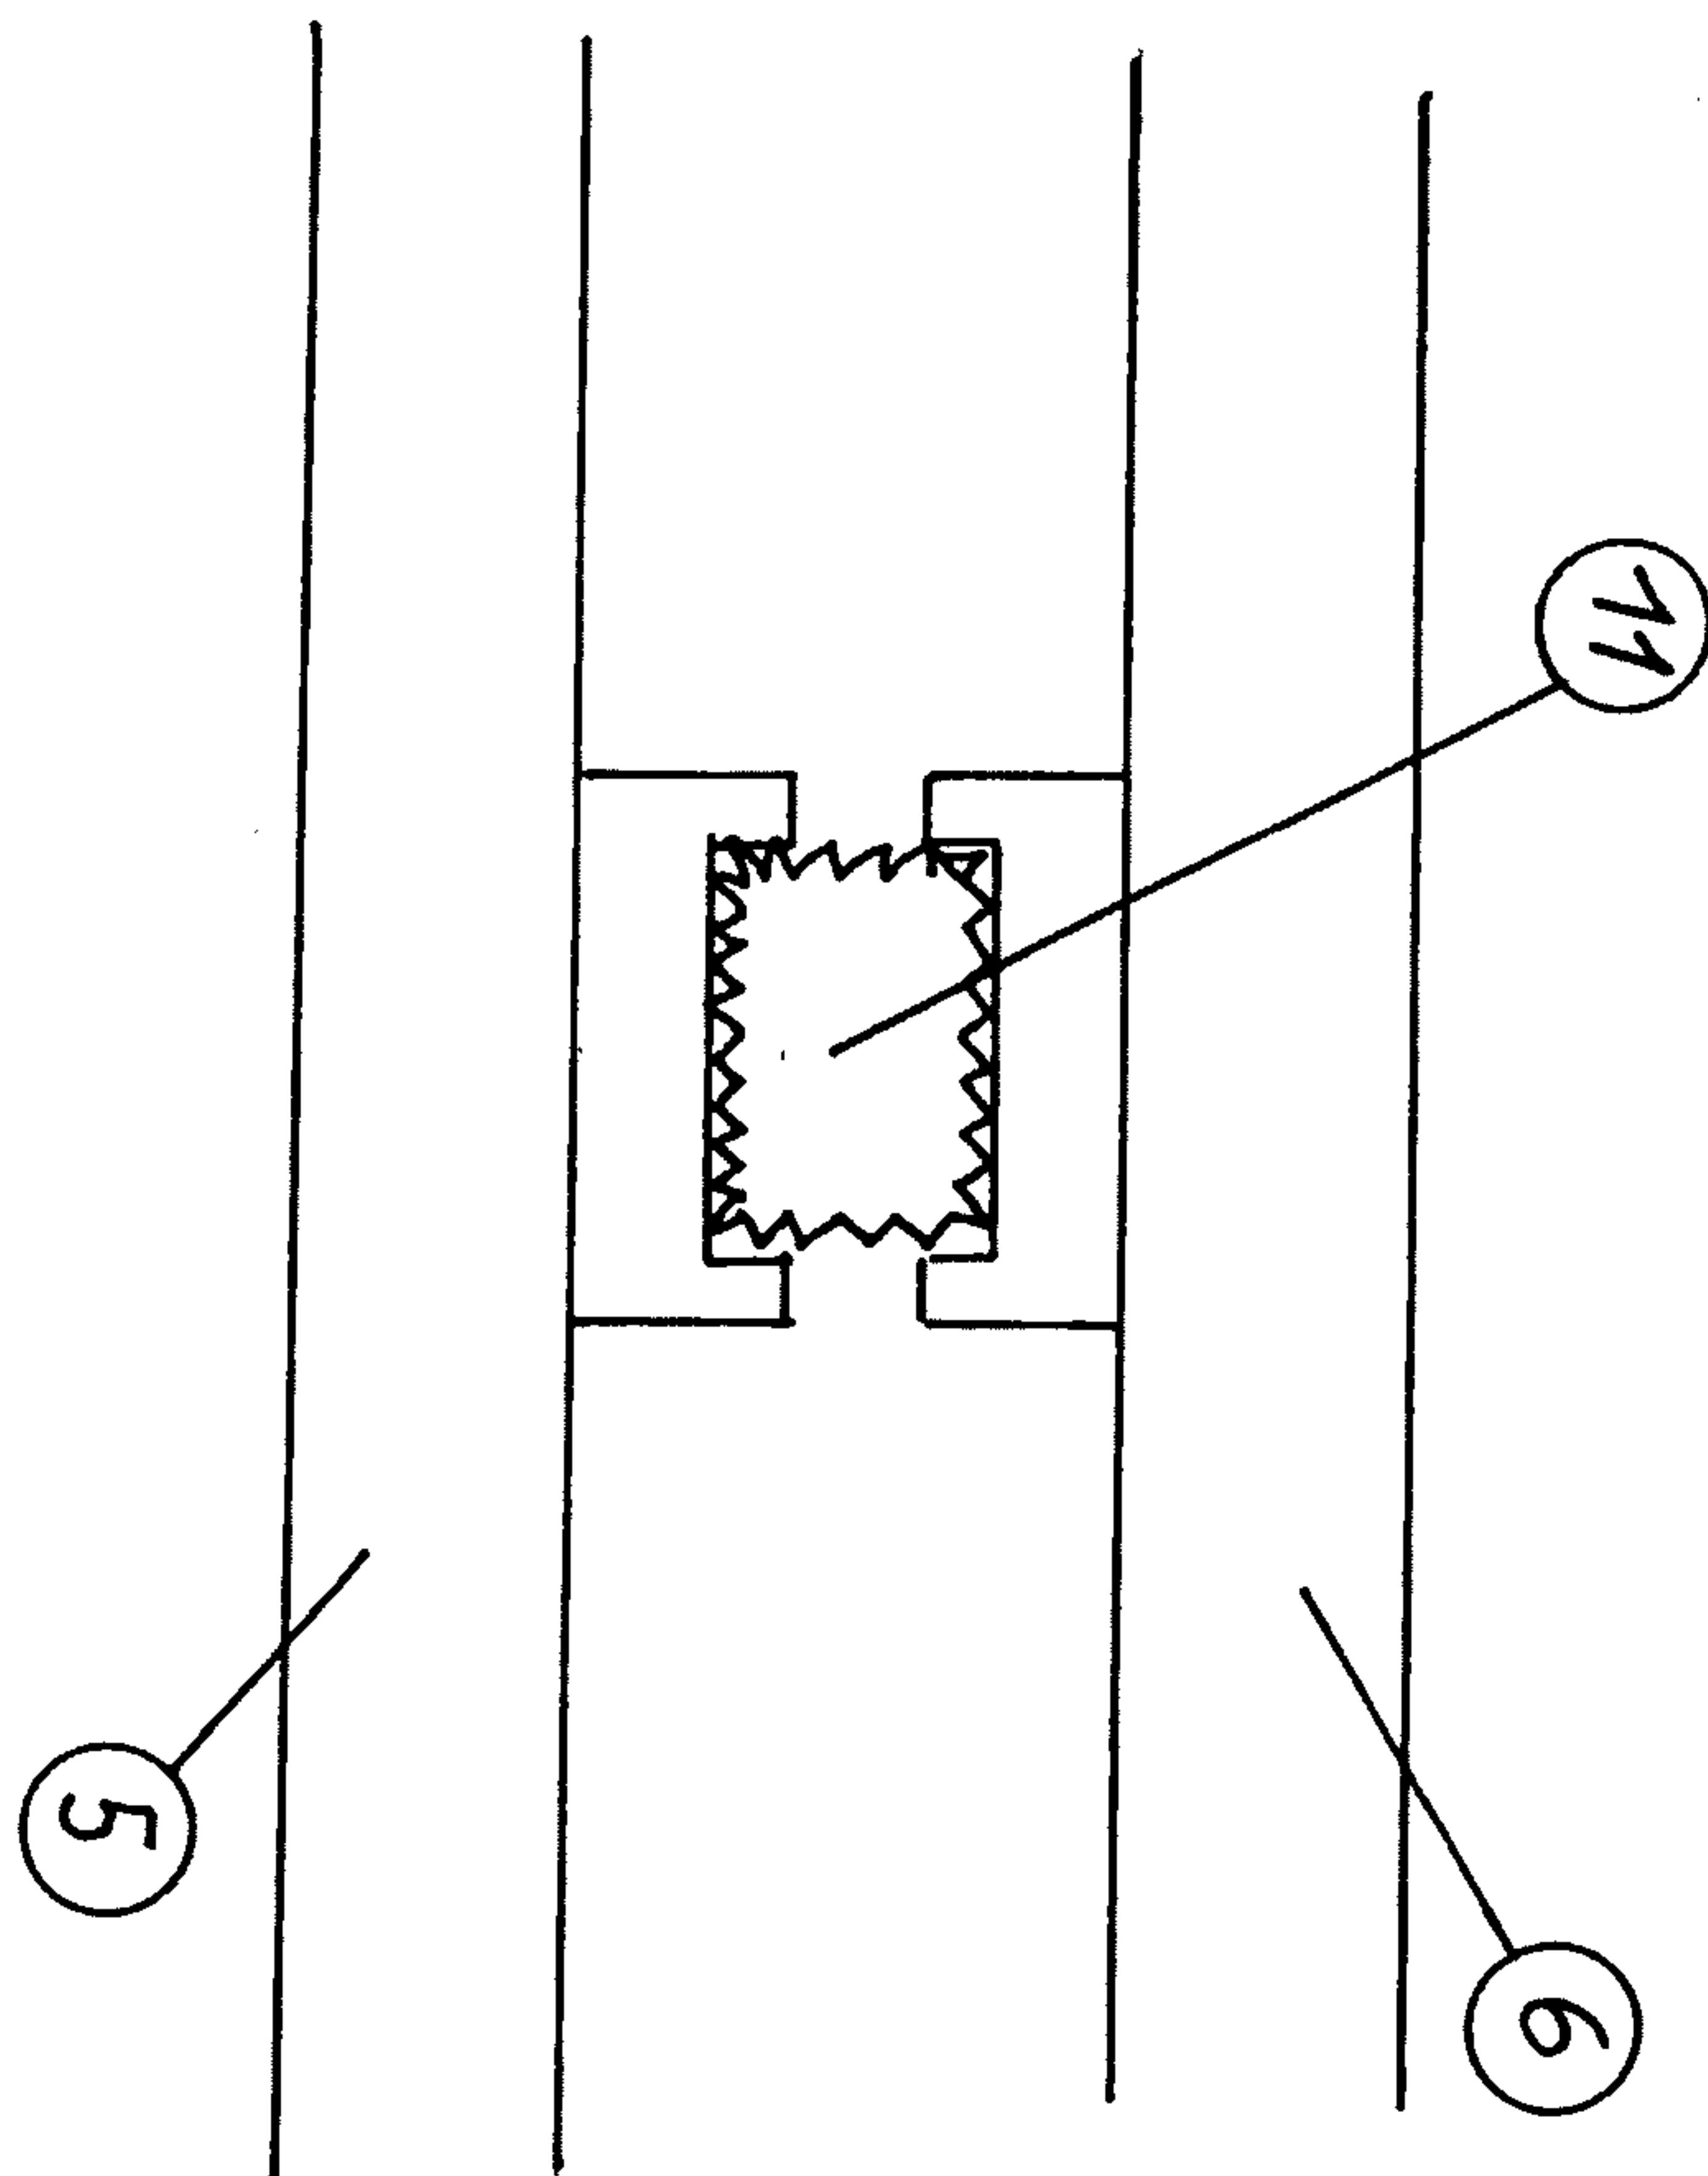


Fig. 3

