




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>B65D 1/16</b>	<b>A1</b>	(11) International Publication Number: <b>WO 99/39981</b> (43) International Publication Date: 12 August 1999 (12.08.99)
<p>(21) International Application Number: PCT/GB99/00195</p> <p>(22) International Filing Date: 20 January 1999 (20.01.99)</p> <p>(30) Priority Data: 9802264.3 4 February 1998 (04.02.98) GB</p> <p>(71) Applicant (for all designated States except LS US): CROWN CORK &amp; SEAL TECHNOLOGIES CORPORATION [US/US]; 11535 S. Central Avenue, Alsip, IL 60803-2599 (US).</p> <p>(71) Applicant (for LS only): CARNAUDMETALBOX PLC [GB/GB]; Downsview Road, Wantage, Oxfordshire OX12 9BP (GB).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): NAYAR, Sudesh, Kumar [GB/GB]; 4 St. Helens View, Okus, Swindon, Wiltshire SN1 4JN (GB). MUNN, Bruce, John [GB/GB]; 17 St. James, Wantage, Oxfordshire OX12 9EY (GB).</p> <p>(74) Agent: RATLIFF, Ismay, Hilary; Carnaudmetalbox plc, Downsview Road, Wantage, Oxfordshire OX12 9BP (GB).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> With international search report.</p>	

(54) Title: EXPANDED CANS

## (57) Abstract

Metal can blanks comprising a cylindrical side wall are expanded by any known method so that the side wall of the resultant can includes a regular pattern (2) of individual pattern elements. In one example, the pattern elements are diamond in outline and are formed over a central region of the can side wall by about 2.25 % expansion. Further expanded margins (3, 4) are provided above and below this pattern. The pattern elements are arranged in rows and columns so that the pattern comprises at least two rows and at least two columns.

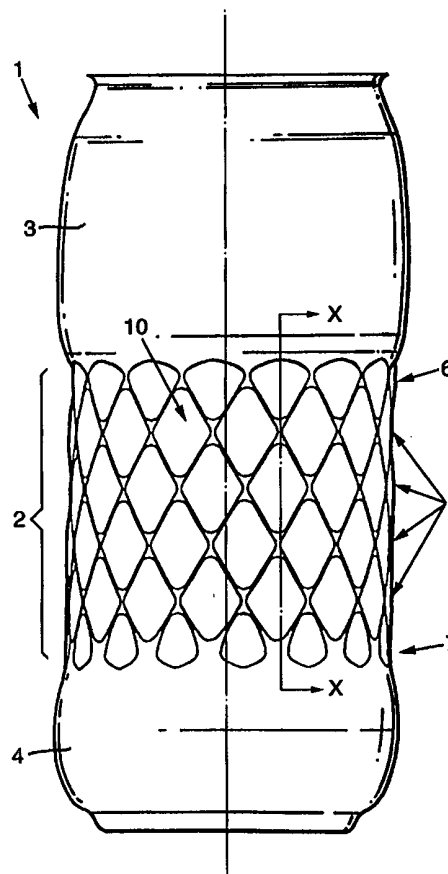

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

EXPANDED CANS

This invention relates to expanded cans. In particular it relates to a can having a cylindrical side wall with a regular pattern of expanded elements. The cylindrical can side wall has either an integral base and a single can end (as in a so-called "two-piece" can) or is closed at both ends (as in a so-called "three-piece" or an aerosol can).

Cans having a patterned side wall have been produced in order to improve resistance against deformation by external pressure. These known cans have pattern elements which are pressed into the side wall of the can blank in order to provide improved axial load or panel performance. Since the elements are only provided for structural reasons, any "pattern" is often covered by a product label. In any case, these cans have only achieved limited shape definition, i.e. a shape which is clearly visible to a consumer, and reduce the capacity of the can of a particular aspect ratio.

According to the present invention, there is provided a metal can formed from a can blank having at least a cylindrical side wall, the side wall of the can comprising a regular pattern of individual pattern elements, in which the pattern elements are arranged in at least two circumferential rows and at least two longitudinal columns, and at least some of the pattern elements are formed by expanding the cylindrical side wall of the can blank so that the can side wall extends beyond its original radius, each such expanded pattern

-2-

element having an externally concave radius around its edge or edges and an externally convex radius adjacent the concave radius, towards the centre of the pattern element; in which the concave radius is substantially  
5 constant around the element; and the size of the convex radius is directly proportional to its distance from the centre of the pattern element.

The Applicant has found that cans according to the present invention have great visual impact without  
10 reducing the can capacity of a particular aspect ratio. Furthermore, by varying the convex radius according to its distance from the centre of the element, splitting of the can side wall, especially at any corners of the pattern element, due to expansion is substantially  
15 avoided whilst maintaining definition of the pattern element shape. In addition, the expansion of any point on an expanded pattern element is preferably inversely proportional to its distance from the centre of the pattern element.

20 In a preferred embodiment, the pattern elements are polygonal. The polygons may each comprise between 3 and 10 sides. Any of the pattern elements may include, in addition to one or more expanded regions, one or more parts which are formed by depressing the cylindrical side  
25 wall of the can blank. The sides of the pattern elements may be at the original can side wall diameter.

Alternatively, the pattern elements may be curved in outline, for example tear drop shaped, circular, etc.

In one embodiment, when the pattern element is viewed in plan, the sides of any of the pattern elements are linear, curved, or comprise a complex curve. The sides of any of the pattern elements may meet at a radius, the maximum size of which is preferably directly proportional to the size of the pattern element.

The individual pattern elements may touch or overlap each other, or may themselves be separated by spaces either longitudinally or circumferentially or both. One or more spaces between columns of pattern elements may be provided for a logo, print or label.

The patterned side wall may be expanded by anything from 2% to 20%, dependent on pattern element size. Where the can blank has an integral base and side wall, as in a so-called two-piece can, the expansion is preferably not greater than 10%. The maximum expansion for a two piece can is limited by the degree of work hardening of the can side wall. The can blank is usually formed from aluminium or steel or alloys of either of these. The can blank side wall may be between 0.075 mm and 0.15 mm in thickness if made of aluminium, typically about 0.1 mm. If the can blank is of steel, the thickness of the side wall may be between 0.06 mm and 0.18 mm, typically about 0.08 mm. The closed and pressurised can may withstand up to 7 bar without pattern reversal. By pattern reversal is meant that radially inwardly extending parts of the pattern are pushed outwardly by pressure inside the can. This at least diminishes pattern definition and at worst, over 7

bar internal pressure, may result in buckling and/or loss of any visual pattern at all.

In one embodiment, the rows of pattern elements are out of phase with each other such that elements of adjacent rows are displaced longitudinally.

The patterned elements may be positioned anywhere on the can side wall and it may be preferred to include a margin at either or both ends of the side wall. This margin may be the same diameter as the original can blank side wall or may be expanded in the same way as the pattern.

Can expansion may be achieved by any of a variety of known methods such as by using an expanding mandrel, fluid jets, a roller device which rolls around and/or up the inner side wall, or by fluid pressure in a closed can. This last is sometimes referred to as blow forming the fluid is air. In some cases, particularly blow forming, the can is expanded to the shape of a mould.

Preferred embodiments of the invention will now be described, by way of example only, with reference to the drawings, in which:

Figure 1 is a side view of a can having a first pattern;

Figure 2 is an enlarged developed view of an element of the pattern of Figure 1;

Figure 3 is a developed side view of a second embodiment of pattern element; and

Figure 4 is a section through the pattern element of figure 3.

Figure 1 shows a can body 1 having a side wall with a regular expanded pattern 2 of diamond-shaped elements in a central region and upper and lower expanded regions 3 and 4. The diamond pattern 2 comprises six circumferential rows, hereafter referred to as "layers". There are four layers 5 having complete diamonds, the extreme layers 6,7 being partial elements which are blended into the side wall above or below the pattern respectively. The pattern extends around the whole circumference of the can body, thereby comprising fifteen complete diamond pattern elements.

In the example shown, the can body blank has a cylindrical side wall of 66 mm diameter. This has been expanded in the centre of the diamonds of the patterned region 2 by 2.25% and in the upper and lower regions 3,4 by 8%. The expansion method of the example was by pressurised fluid such as air. Larger expansion of the pattern elements would be achievable by different expansion methods without splitting the can side wall.

Figure 1a shows the curvature of the pattern elements as a section through X-X of the can side wall, passing through the centre of two pattern elements 10. In this example, it can be seen that the longitudinal central axis L of each diamond is a smooth continuous externally convex, i.e. expanded, curve having a radius  $R_L$  of 56 to 57 mm. This curve is blended into a "flat" F,

-6-

i.e. the original diameter cylindrical side wall, by an externally concave radius  $R_F$  of 1 mm.

A side wall of a diamond pattern element 10 of figure 1 is shown in figure 2. This diamond has straight side walls 11, 8.5 mm in length  $l_s$ , which meet at radii  $r$  of approximately 2 mm, typically 1.96 mm. The size of these radii  $r$  depends on the size of the pattern element, since the elements in this example are small so as to obtain 15 elements around the can circumference, the radii  $r$  must be correspondingly small in order not to lose the definition of the pattern element. If these radii were much larger for this size of element then the element would not appear to be diamond-shaped. The axial length  $l_a$  of each of the complete diamonds is 19.25 mm.

The depth of the diamond pattern element may vary along each side so that there is less deformation of the metal of the can at the "corners" 12 where the sides of the pattern elements meet. This depth variation is achieved by varying the size of the convex radius  $R_L$  in direct proportion to its distance from the centre of the pattern element. Since the corners 12 are further from the centre than are, for example, the centres of the sides, the value of  $R_L$  is greater at the corners and the deformation consequently less severe.

Figures 3 and 4 show one of many alternative embodiments of pattern element which are within the scope of the present invention. This pattern element 20 is hexagonal in shape and may comprise part of a regular



-7-

pattern comprising anything from two such elements around the can circumference up to as many as ten or even more. It will be appreciated that the definition of the shape of the pattern elements will diminish as more are provided around the can side wall since the maximum amount of expansion possible without risk of splitting will decrease as the number of pattern elements increases. The expansion method will also dictate the amount of expansion possible without damage or failure.

In a second example of the present invention, two hexagonal pattern elements 20 as shown in figures 3 and 4 were provided around a 66 mm diameter can body so that effectively two columns of pattern elements were formed. The side wall of the can body was completely covered by the pattern, leaving no margins either end as in the example of figures 1 and 2. This resulted in a regular pattern of two and a half layers of hexagons, one half hexagon being at the can base end in one column and the other half hexagon being at the top of the second column.

These large hexagons were formed with 5% expansion. As in the first example, this expansion was achieved by pressurised fluid but larger amounts of expansion, depending on the expansion method and metal of the can body would be possible.

A side section through the line Y-Y is shown in figure 4. As can be seen from this figure, the pattern elements 20 are expanded to a relatively smooth curved central section which may have comprise a curve having a

-8-

convex radius  $R_h$  which varies from 95.5 mm to 1990 mm and is blended into groove-like areas between pattern elements by a convex radius  $R_b$  of typically about 8 mm, depending on the amount of expansion. A value of 4 mm, for example, would also provide satisfactory pattern definition. The "grooves" themselves comprise an externally concave radius  $R_g$  of typically 2 mm. It is considered likely that a groove radius of less than 2 mm would risk splitting of the can if the can were expanded by air pressure. It should be appreciated that the "base" of the groove constitutes the side of hexagonal pattern element 20 and is at the original can diameter.

The sides 21 of the pattern elements in this example comprise Bezier curves when viewed in plan but other complex curves could be used. The sides 21 meet at a radius which is constantly varying but at the actual corner 22 is about 5 mm. A typical axial length  $L_h$  for the hexagonal pattern elements of this example is 45.25 mm.

It will be appreciated that although two specific examples of pattern have been described, numerous alternatives are possible within the scope of the invention. The degree of expansion of the pattern elements may vary in many respects such as the area of individual elements, the expansion method, the can diameter and wall thickness or the material of the can body. Similarly, the curvature of the side wall after such expansion may be varied, particularly where a mould

is used, so that any type of curvature, simple or complex, or indeed flat, i.e. constant diameter over a length of side wall is possible within the scope of the claims.

CLAIMS:

1. A metal can formed from a can blank having at least a cylindrical side wall, the side wall of the can comprising a regular pattern of individual pattern elements, in which:

the pattern elements are arranged in at least two circumferential rows and at least two longitudinal columns, and

at least some of the pattern elements are formed by expanding the cylindrical side wall of the can blank so that the can side wall extends beyond its original radius, each such expanded pattern element having an externally concave radius around its edge or edges and an externally convex radius adjacent the concave radius, towards the centre of the pattern element;

in which the concave radius is substantially constant around the element; and

the size of the convex radius is directly proportional to its distance from the centre of the pattern element.

2. A can according to claim 1, in which the expansion of any point on an expanded pattern element is inversely proportional to its distance from the centre of the pattern element.

3. A can according to claim 1, in which the pattern elements are polygonal and each polygon comprises between 3 and 10 sides.

4. A can according to any one of claims 1 to 3, in which any of the pattern elements includes one or more parts which are formed by depressing the cylindrical side wall of the can blank.

5. A can according to any one of claims 1 to 4, in which the sides of any of the pattern elements are linear, curved, or comprise a complex curve.

6. A can according to any one of claims 1 to 5, in which the sides of any of the pattern elements meet at a radius.

7. A can according to claim 6, in which the maximum size of the radius is directly proportional to the size of the pattern element.

8. A can according to any one of claims 1 to 7, in which the maximum side wall expansion is from 3% to 20%.

9. A can according to claim 8, in which the can is a two-piece can and the expansion is between 2% and 10%.

-12-

10. A can according to any one of claim 1 to 9, in which the can is made of aluminium or aluminium alloy and the side wall is between 0.075 mm and 0.15 mm in thickness, typically about 0.1 mm.

11. A can according to any one of claim 1 to 9, in which the can is made of steel or a steel alloy and the thickness of the side wall is between 0.06 mm and 0.18 mm, typically about 0.08 mm.

Fig.1.

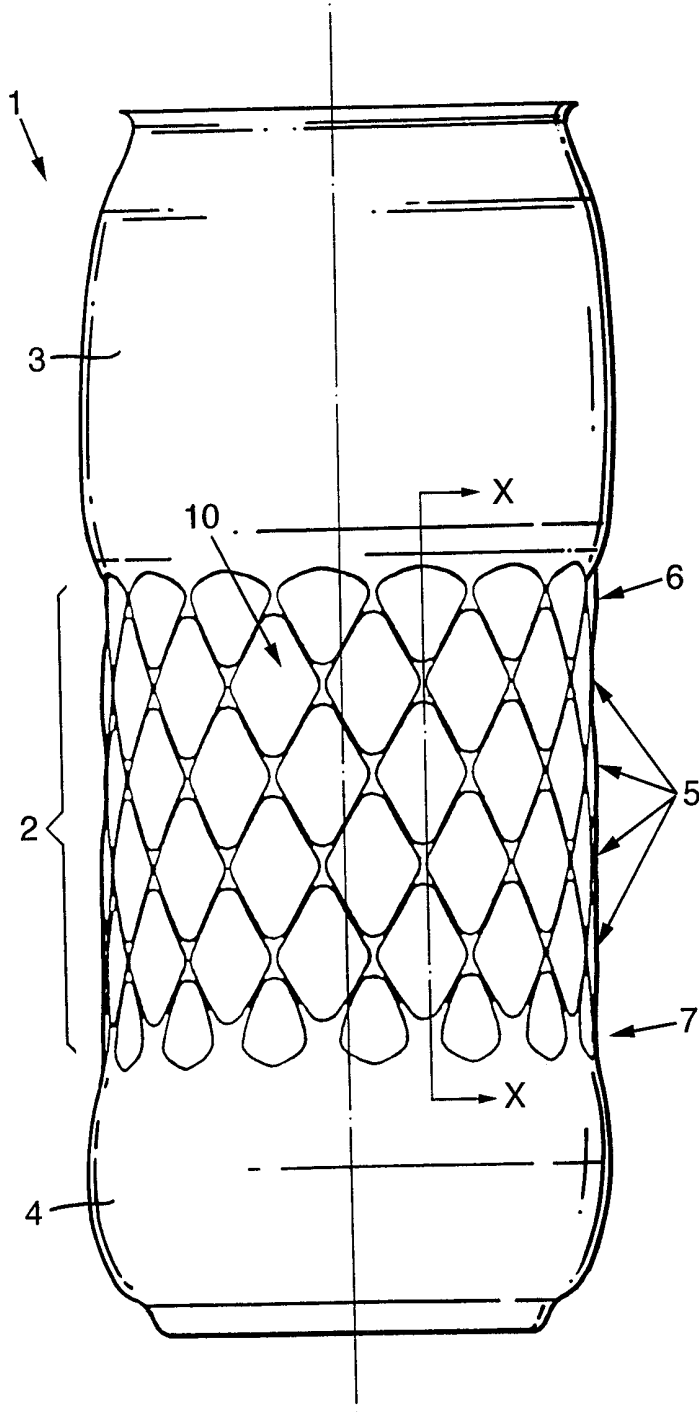
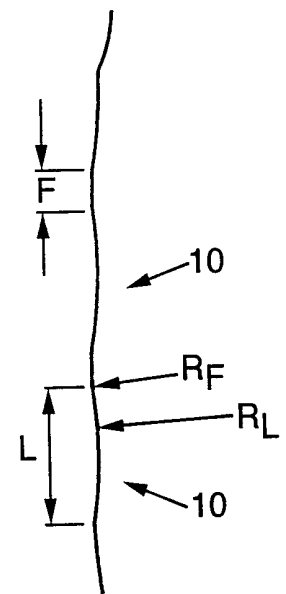


Fig.1a.






Fig. 2.

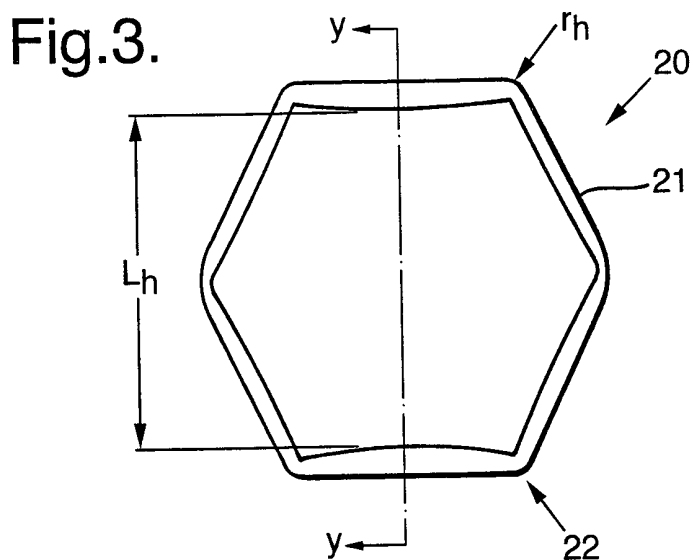


Fig. 3.

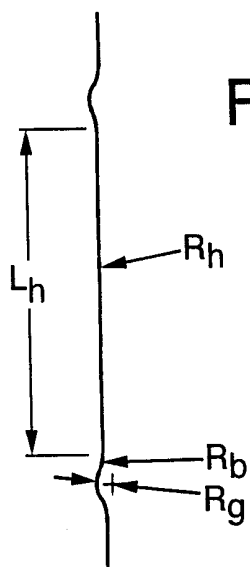


Fig. 4.



# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 99/00195

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 B65D1/16

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 B65D B21D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 335 902 A (JAVORIK) 15 August 1967 see the whole document ---	1,5
A	WO 96 40457 A (AMERICAN NATIONAL CAN) 19 December 1996 see abstract; claim 39; figures see page 17, line 15 - line 24 ---	1,4,5, 8-10
A	EP 0 441 618 A (TOYO SEIKAN KAISHA) 14 August 1991 see the whole document -----	1-7

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

28 April 1999

Date of mailing of the international search report

10/05/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Gino, C

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 99/00195

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3335902    A	15-08-1967	NONE	
WO 9640457    A	19-12-1996	US 5704244 A	06-01-1998
		US 5727414 A	17-03-1998
		AU 6331196 A	30-12-1996
		BR 9606395 A	15-12-1998
		CA 2194779 A	19-12-1996
		EP 0773843 A	21-05-1997
		HU 9700051 A	28-11-1997
		JP 10503715 T	07-04-1998
		NO 970070 A	10-03-1997
		NZ 311903 A	28-01-1999
		PL 318495 A	23-06-1997
EP 441618    A	14-08-1991	DE 69120983 D	29-08-1996
		DE 69120983 T	06-02-1997
		US 5100017 A	31-03-1992