



(22) Date de dépôt/Filing Date: 2004/02/26

(41) Mise à la disp. pub./Open to Public Insp.: 2004/12/25

(45) Date de délivrance/Issue Date: 2011/09/20

(30) Priorité/Priority: 2003/06/25 (US10/603,360)

(51) Cl.Int./Int.Cl. *F21V 29/00* (2006.01),
F21V 15/06 (2006.01), *F21V 19/00* (2006.01),
F21V 7/00 (2006.01), *H01J 65/00* (2006.01)


(72) Inventeurs/Inventors:
MARTIN, ROBERT, CA;
ROULEAU, JEAN F., CA;
MARIAN, DANIEL, US

(73) Propriétaire/Owner:
OSRAM SYLVANIA INC., US

(74) Agent: SMART & BIGGAR

(54) Titre : ENSEMBLE DE MONTAGE POUR LAMPE SANS ELECTRODE DE GRANDE PUISSANCE

(54) Title: MOUNTING ASSEMBLY FOR HIGH OUTPUT ELECTRODELESS LAMP

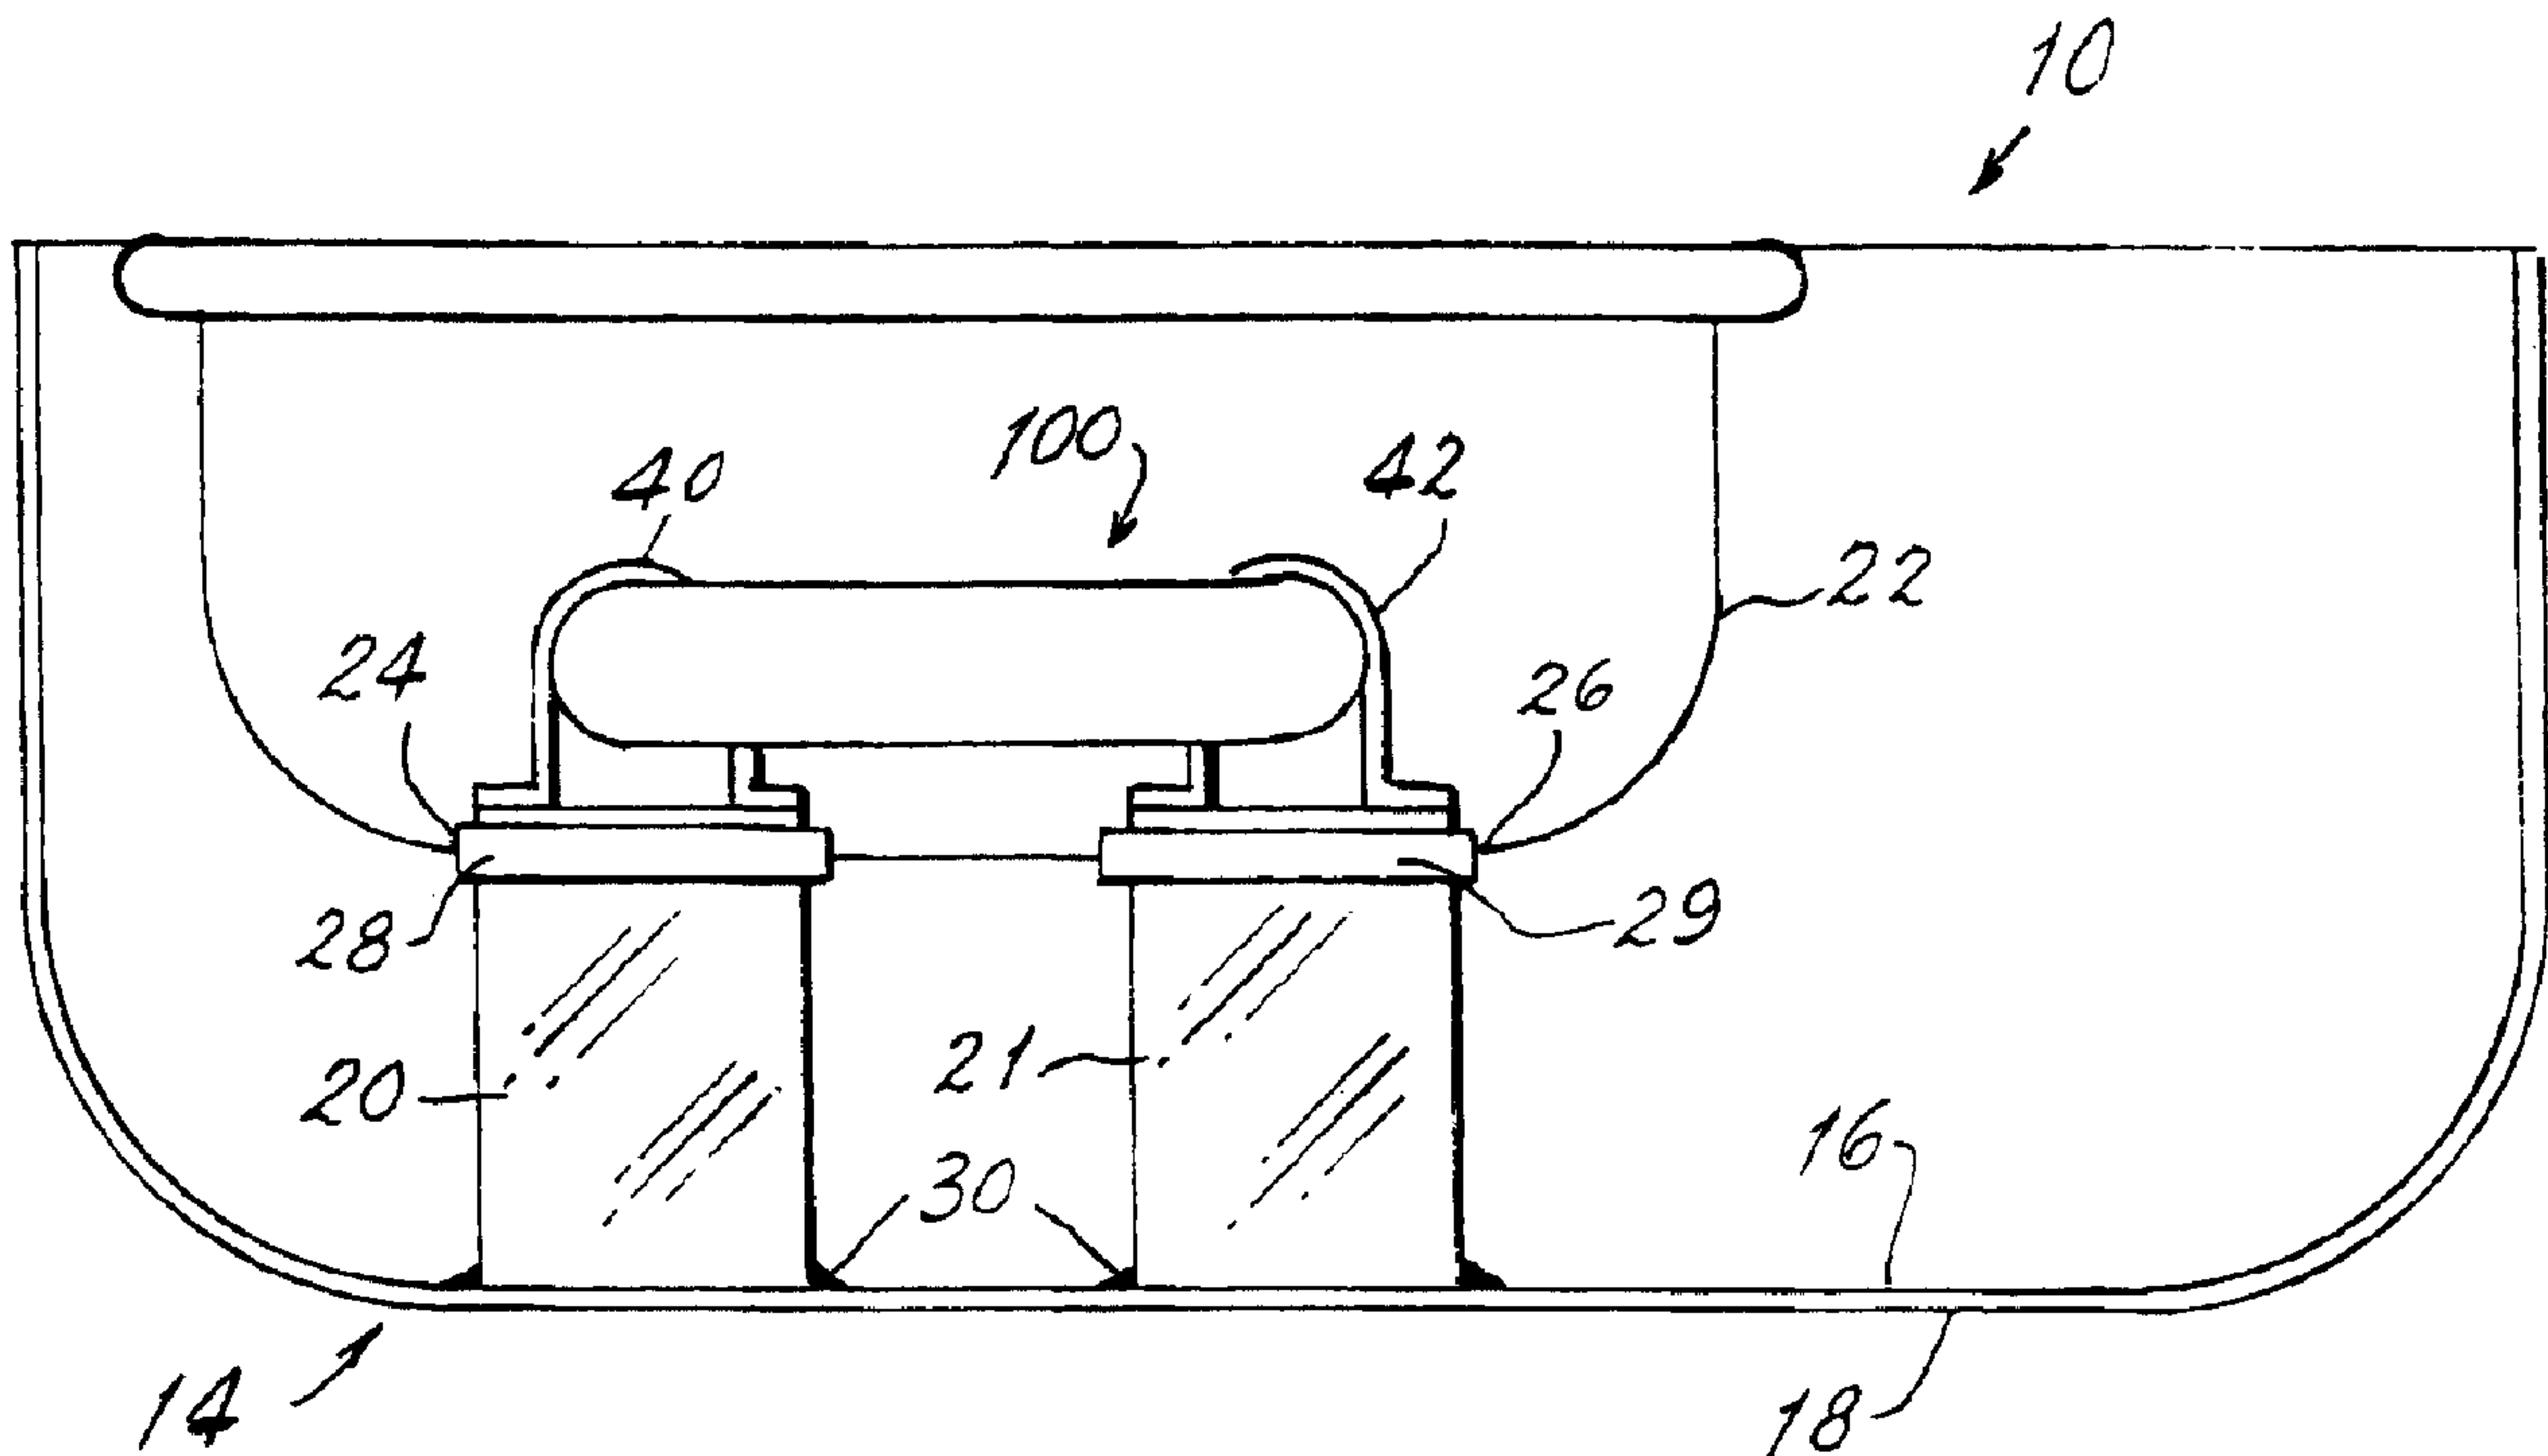

(57) Abrégé/Abstract:

A mounting assembly for an electrodeless lamp. The mounting assembly comprises a fixture housing having an inner surface and an outer surface. The fixture housing is preferably made from aluminum. Spaced-apart heat sinks are affixed to the inner surface of the fixture housing. A reflector, which is preferably concave, as is the fixture housing, is positioned within the fixture housing. The reflector contains two apertures that are aligned with the heat sinks. Thermal insulators are positioned in the apertures and surround the heat sinks, thus thermally isolating the reflector from the heat sinks. The lamp is mounted in the fixture housing by attaching brackets, which surround the ferrite transformer cores of the lamp, directly to the top surfaces of the heat sinks. Mounting is preferably accomplished by having threaded holes formed in the heat sinks and fixing the brackets in place via screws through the legs and screw receiving slots.

ABSTRACT

A mounting assembly for an electrodeless lamp. The mounting assembly comprises a fixture housing having an inner surface and an outer surface. The fixture housing is preferably made from aluminum. Spaced-apart heat sinks are affixed to the inner surface of the fixture housing. A reflector, which is preferably concave, as is the fixture housing, is positioned within the fixture housing. The reflector contains two apertures that are aligned with the heat sinks. Thermal insulators are positioned in the apertures and surround the heat sinks, thus thermally isolating the reflector from the heat sinks. The lamp is mounted in the fixture housing by attaching brackets, which surround the ferrite transformer cores of the lamp, directly to the top surfaces of the heat sinks. Mounting is preferably accomplished by having threaded holes formed in the heat sinks and fixing the brackets in place via screws through the legs and screw receiving slots.

MOUNTING ASSEMBLY FOR HIGH OUTPUT ELECTRODELESS LAMP

001. TECHNICAL FIELD

5 002. This invention relates to lamps and more particularly to high output electrodeless lamps (hereinafter, HOEL). Still more particularly it relates to a mounting assembly for such lamps.

003. BACKGROUND ART

10 004. HOELs are known lamps and are disclosed in, for example, U.S. Patent No. 6,175,197, which is assigned to the assignee of the instant invention. These lamps have specific allowable operating temperatures, which must be met in fixture applications. In many fixtures where the fixture housing and the reflector are separate components, the reflector dish can get too hot too quickly due to radiation from the lamp and to heat transferred from
15 the ferrite cores (necessary for lamp operation) to the reflector through the mounting brackets for the lamp. Because of the high temperature of the reflector, ferrite core heat sinking (which is crucial for proper operation) is reduced, and the lamp glass and the amalgam tip operate hotter due to re-radiation from the reflector. These undesired conditions adversely effect the operation of the lamp.

20

005. Accordingly, it would be an advance in the art to provide a mounting assembly for such lamps that would adequately dissipate heat generated by operation of the lamp, thus improving efficacy and life.

25 **006. SUMMARY OF THE INVENTION**

007. It is, therefore, desirable to obviate the disadvantages of the prior art.

008. It is also desirable to enhance the operation of HOELs.

009. It is also desirable to provide heat dissipation in fixtures for HOELs.

0010. According to one aspect of the invention, there is provided a mounting assembly for a high output electrodeless lamp comprising; a fixture housing having an inner surface and an outer surface; a pair of spaced-apart heat sinks affixed to the inner surface of the fixture housing and extending therefrom; a reflector positioned within the fixture housing, the reflector containing two apertures aligned with the heat sinks; a thermal insulator surrounding each of the heat sinks in the apertures and thermally isolating the reflector from the heat sinks; and an electrodeless lamp mounted to the heat sinks.

0011. This assembly can effectively isolate the lamp from the reflector and can dissipate the heat generated by operation of the lamp directly to the fixture housing.

0012. BRIEF DESCRIPTION OF THE DRAWINGS

0013. Fig. 1 is a side view of a lamp employable with the invention;

0014. Fig. 2 is an elevational view of the lamp of Fig. 1;

0015. Fig. 3 is a diagrammatic side sectional view of a mounting assembly in accordance with an aspect of the invention; and

0016. Fig. 4 is a elevational view of the mounting assembly of Fig. 3 with the lamp removed.

BEST MODE FOR CARRYING OUT THE INVENTION

0017. For a better understanding of the present invention, together with other and further objects, advantages and capabilities thereof, reference is made to the following disclosure and appended claims in conjunction with the above-described drawings.

0018. Referring now to Figs. 1 and 2 there is shown a lamp 100 which has lamp envelope 120 which has a tubular, closed-loop configuration and is electrodeless. The lamp 100 encloses a discharge region 140 containing a buffer gas and mercury vapor. A phosphor coating may be formed on the inside surface of lamp envelope 120. Radio frequency (RF) energy from an RF source (not shown, but see the aforementioned U.S. Patent No. 6,175,197) is inductively coupled to lamp 100 by a first ferrite transformer core 220 and a second ferrite transformer core 240. Each of the transformer cores preferably has a toroidal configuration that surrounds the lamp envelope 120. The RF source is connected to a winding 300 on the first transformer core 220 and is connected to a winding 320 on the second transformer core 240.

0019. Mounting brackets 40 and 42 encompass the transformer cores and have legs 44 provided with appropriate mounting means, such as screw receiving slots 46. Retention springs 48 may also be provided to maintain the brackets in position prior to final assembly of the lamp to a fixture.

0020. Referring now to Figs. 3 and 4, there is shown a mounting assembly 10 for a lamp 100, which mounting assembly comprises a fixture housing 14 having an inner surface 16 and an outer surface 18. The fixture housing is preferably made from aluminum.

0021. Spaced-apart heat sinks 20, 21 are affixed to the inner surface 16 of the fixture housing 14 and in a preferred embodiment are integral with the housing. In an alternate embodiment the heat sinks can be welded, as at 30, to the inner surface. Also, in yet another alternate embodiment, the heat sinks and the fixture housing can
5 be different materials, as may be dictated by the end use of the assembly.

0022. A reflector 22, which is preferably concave, as is the fixture housing, is positioned within the fixture housing 14. The reflector 22 contains two apertures 24, 26 that are aligned with the heat sinks 20, 21. Thermal insulators 28, 29 are positioned in the
10 apertures and surround the heat sinks, thus thermally isolating the reflector from the heat sinks.

0023. The lamp 100 is mounted in the fixture housing by attaching the brackets 40, 42 directly to the top surfaces of the heat sinks 20, 21. Mounting is preferably
15 accomplished by having threaded holes formed in the heat sinks and fixing the brackets in place via screws through the legs 44 and screw receiving slots 46.

0024. This construction insures that the reflector will not be heated by the ferrite transformer cores and thus will be cooler during lamp operation. Therefore, the lamp
20 glass bulb and amalgam tip temperature will be cooler, enhancing the operation of the lamp, increasing efficacy and life.

0025. While there have been shown and described what are at present considered to be the preferred embodiments of the invention, it will be apparent to those skilled in the
25 art that various changes and modification can be made herein without departing from the scope of the invention as defined by the appended claims.

CLAIMS:

5 What is claimed is:

1. A mounting assembly for a high output electrodeless lamp comprising;
a fixture housing having an inner surface and an outer surface;
a pair of spaced-apart heat sinks affixed to said inner surface of said fixture housing
10 and extending therefrom:
a reflector positioned within said fixture housing, said reflector containing two
apertures aligned with said heat sinks;
a thermal insulator surrounding each of said heat sinks in said apertures and thermally
isolating said reflector from said heat sinks; and
15 an electrodeless lamp mounted to said heat sinks.
2. The mounting assembly of Claim 1 wherein said heat sinks are formed integrally with
said fixture housing.
- 20 3. The mounting assembly of Claim 1 wherein said heat sinks are formed distinct from
said fixture housing and are welded thereto.
4. The mounting assembly of Claim 3 wherein said heat sinks are a different material
than said fixture housing.
- 25 5. The mounting assembly of Claim 1 wherein said fixture housing is concave.
6. The mounting assembly of Claim 5 wherein said reflector is concave.

7. The mounting assembly of Claim 1 wherein said thermal insulator is formed from a material selected from ceramic, silicon or rubber.

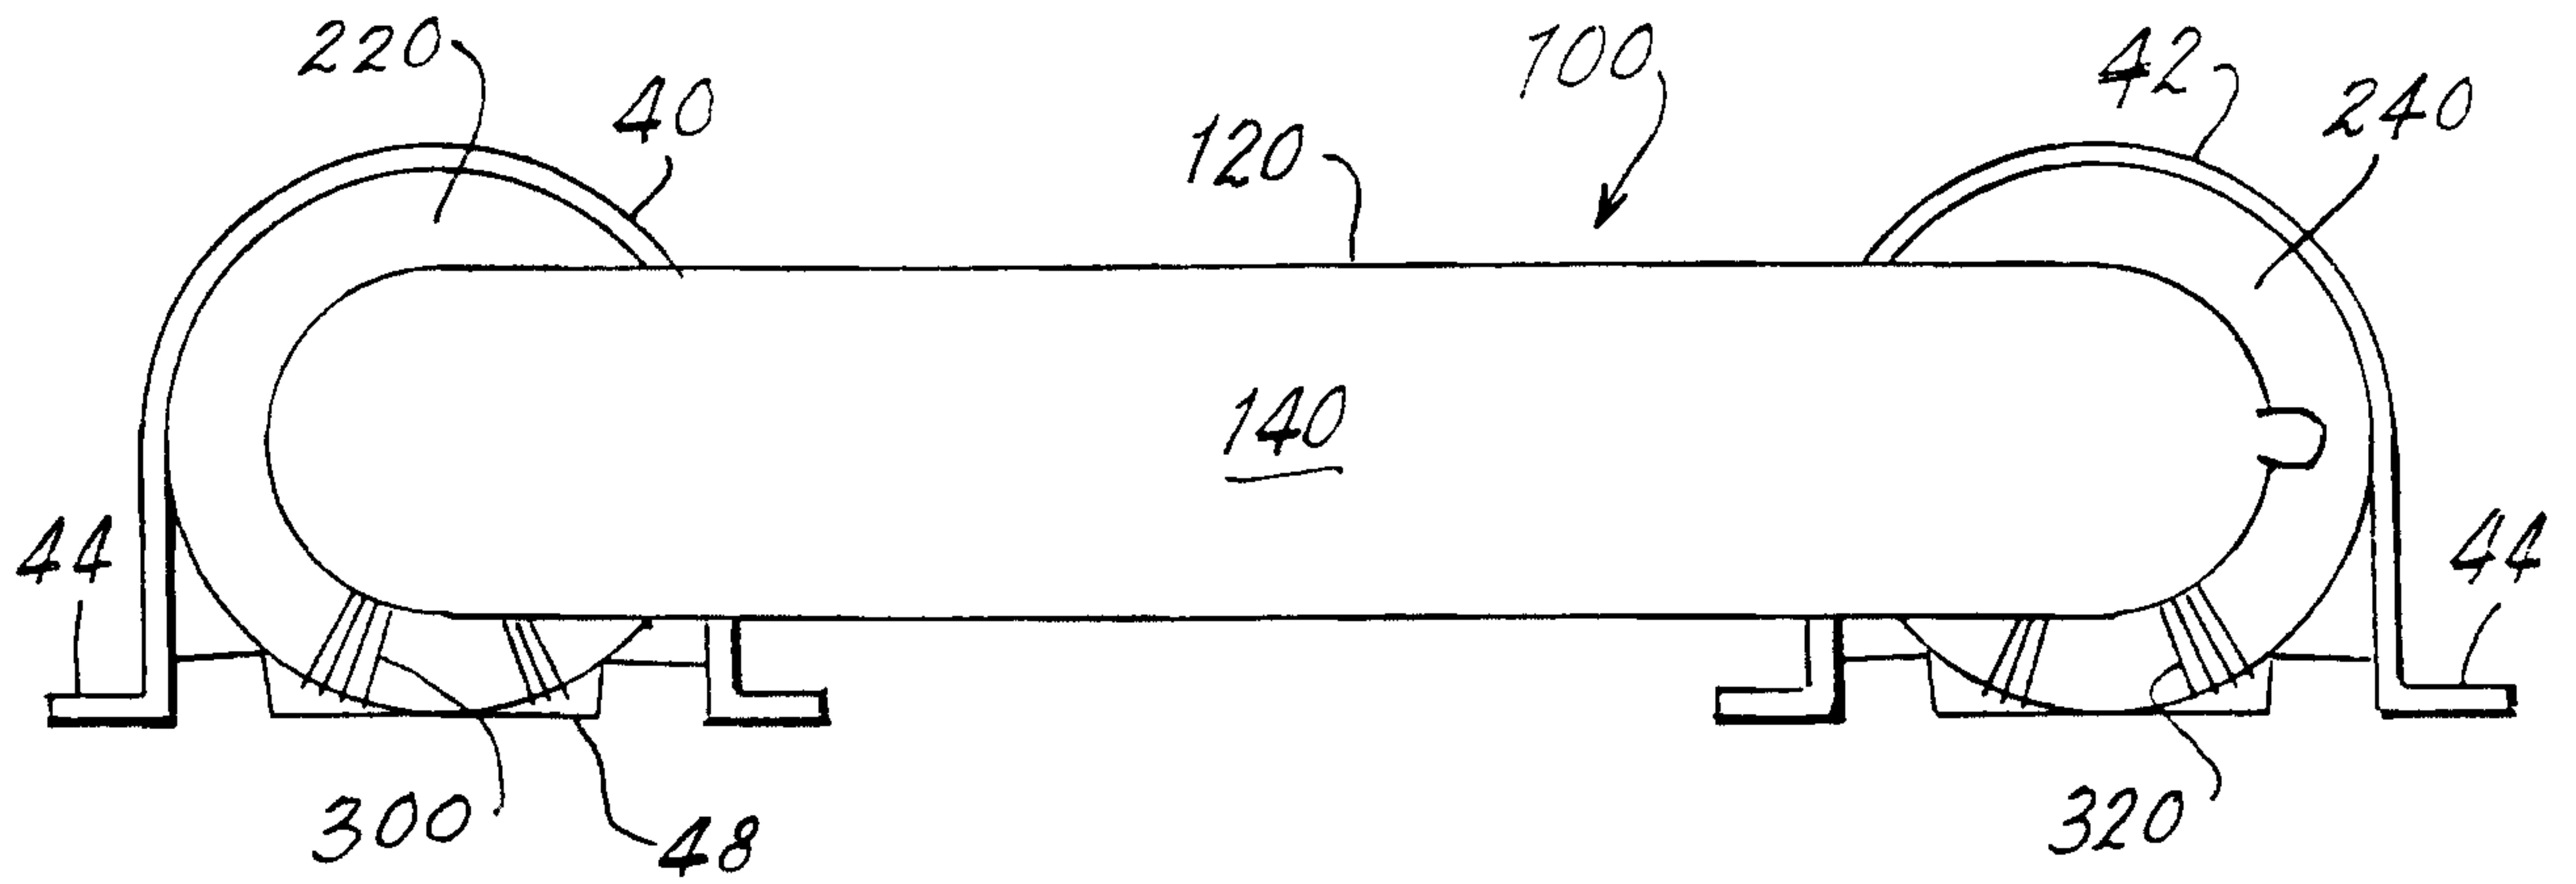


Fig. 1

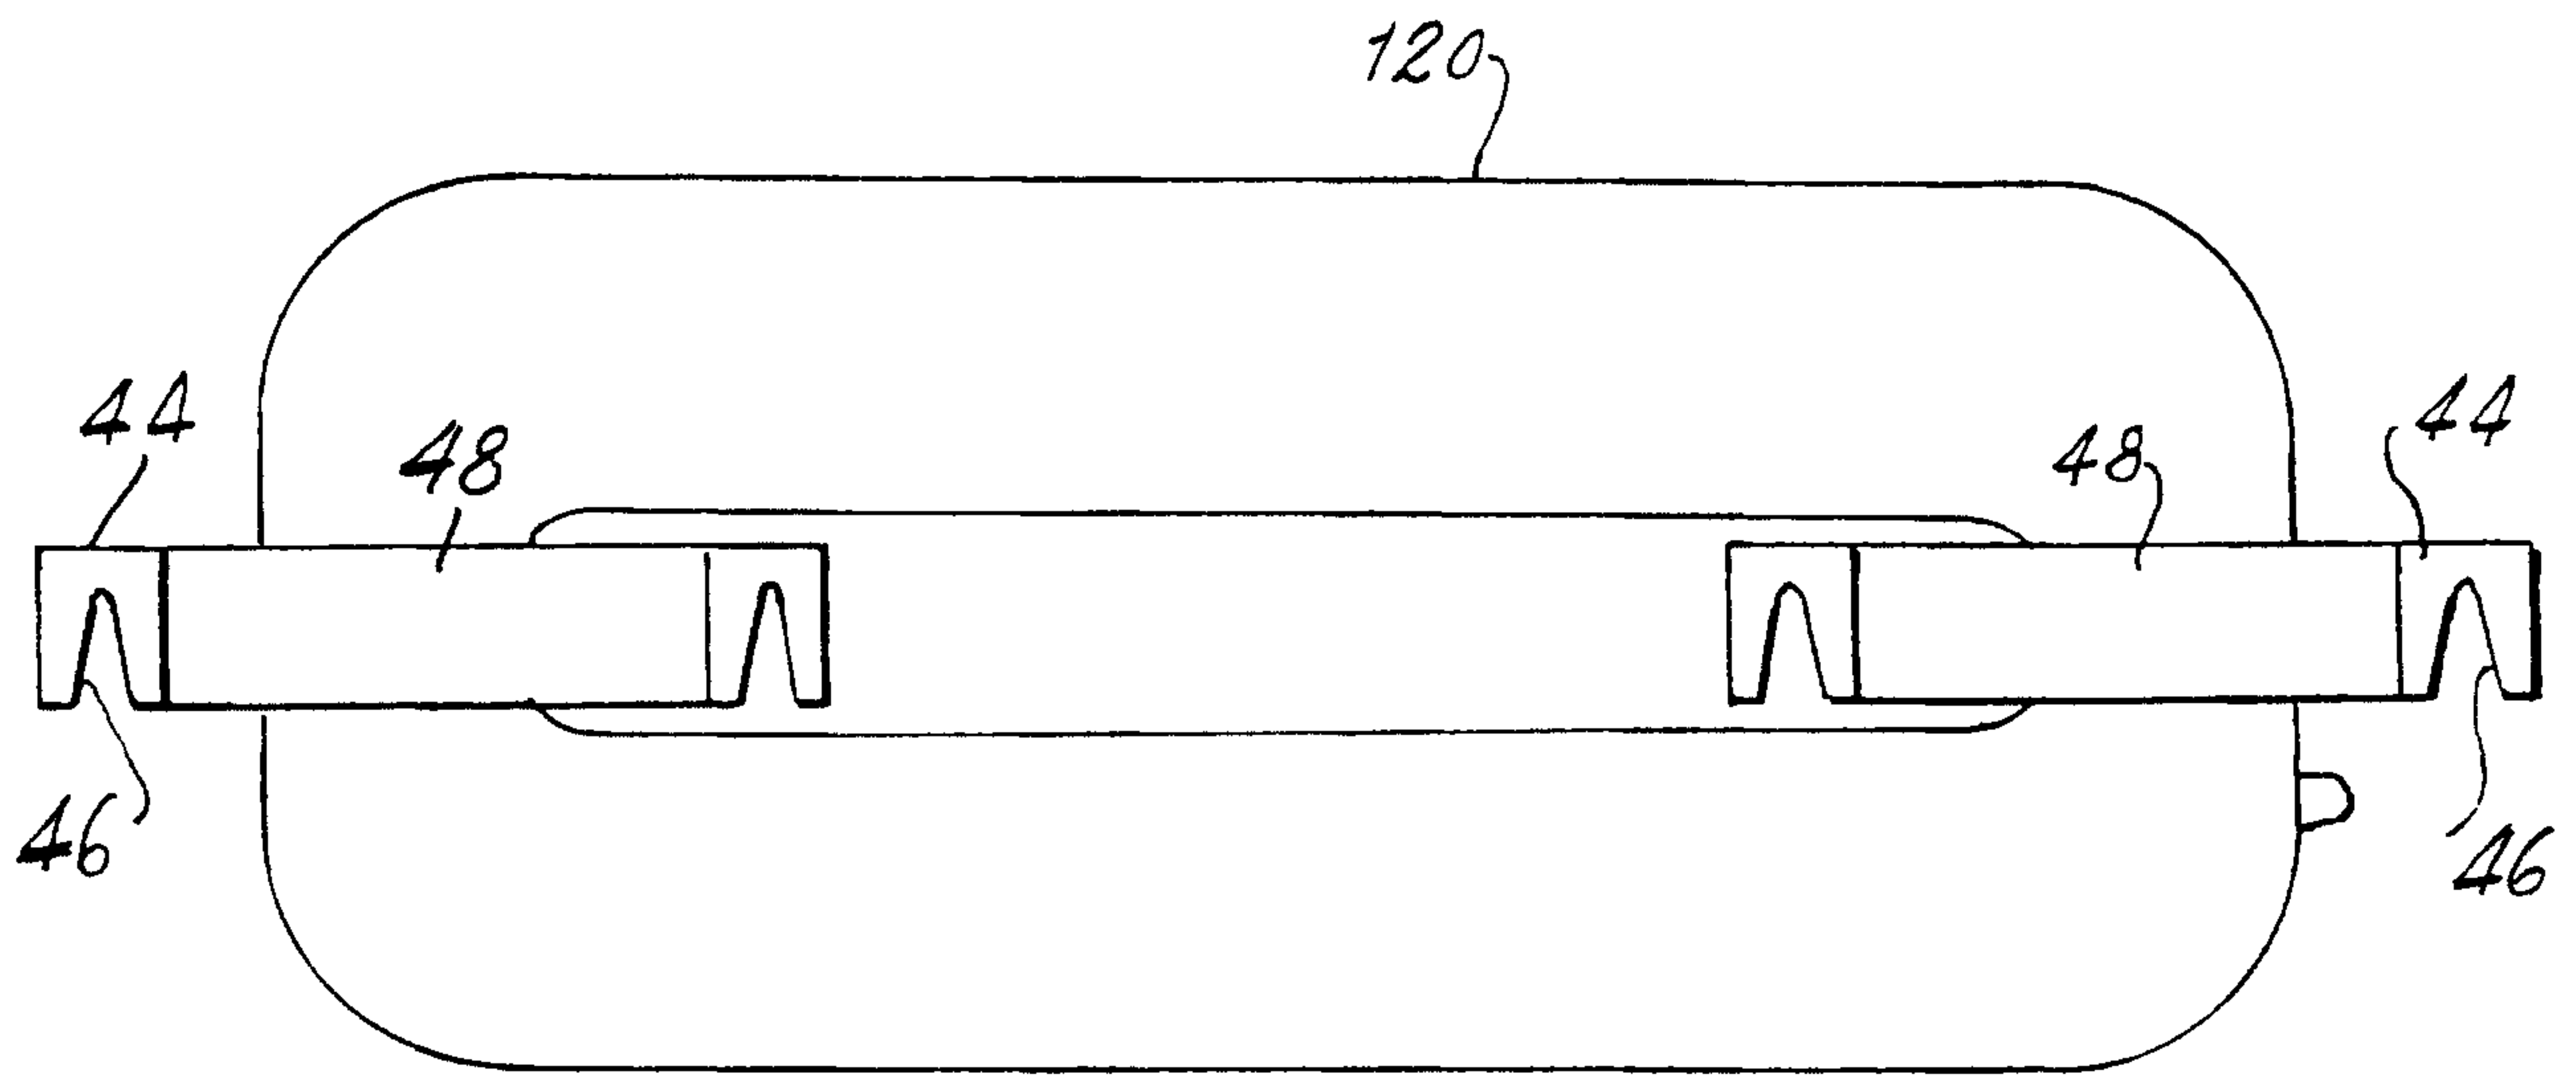


Fig. 2

Patent Agents
Fetherstonhaugh & Co.

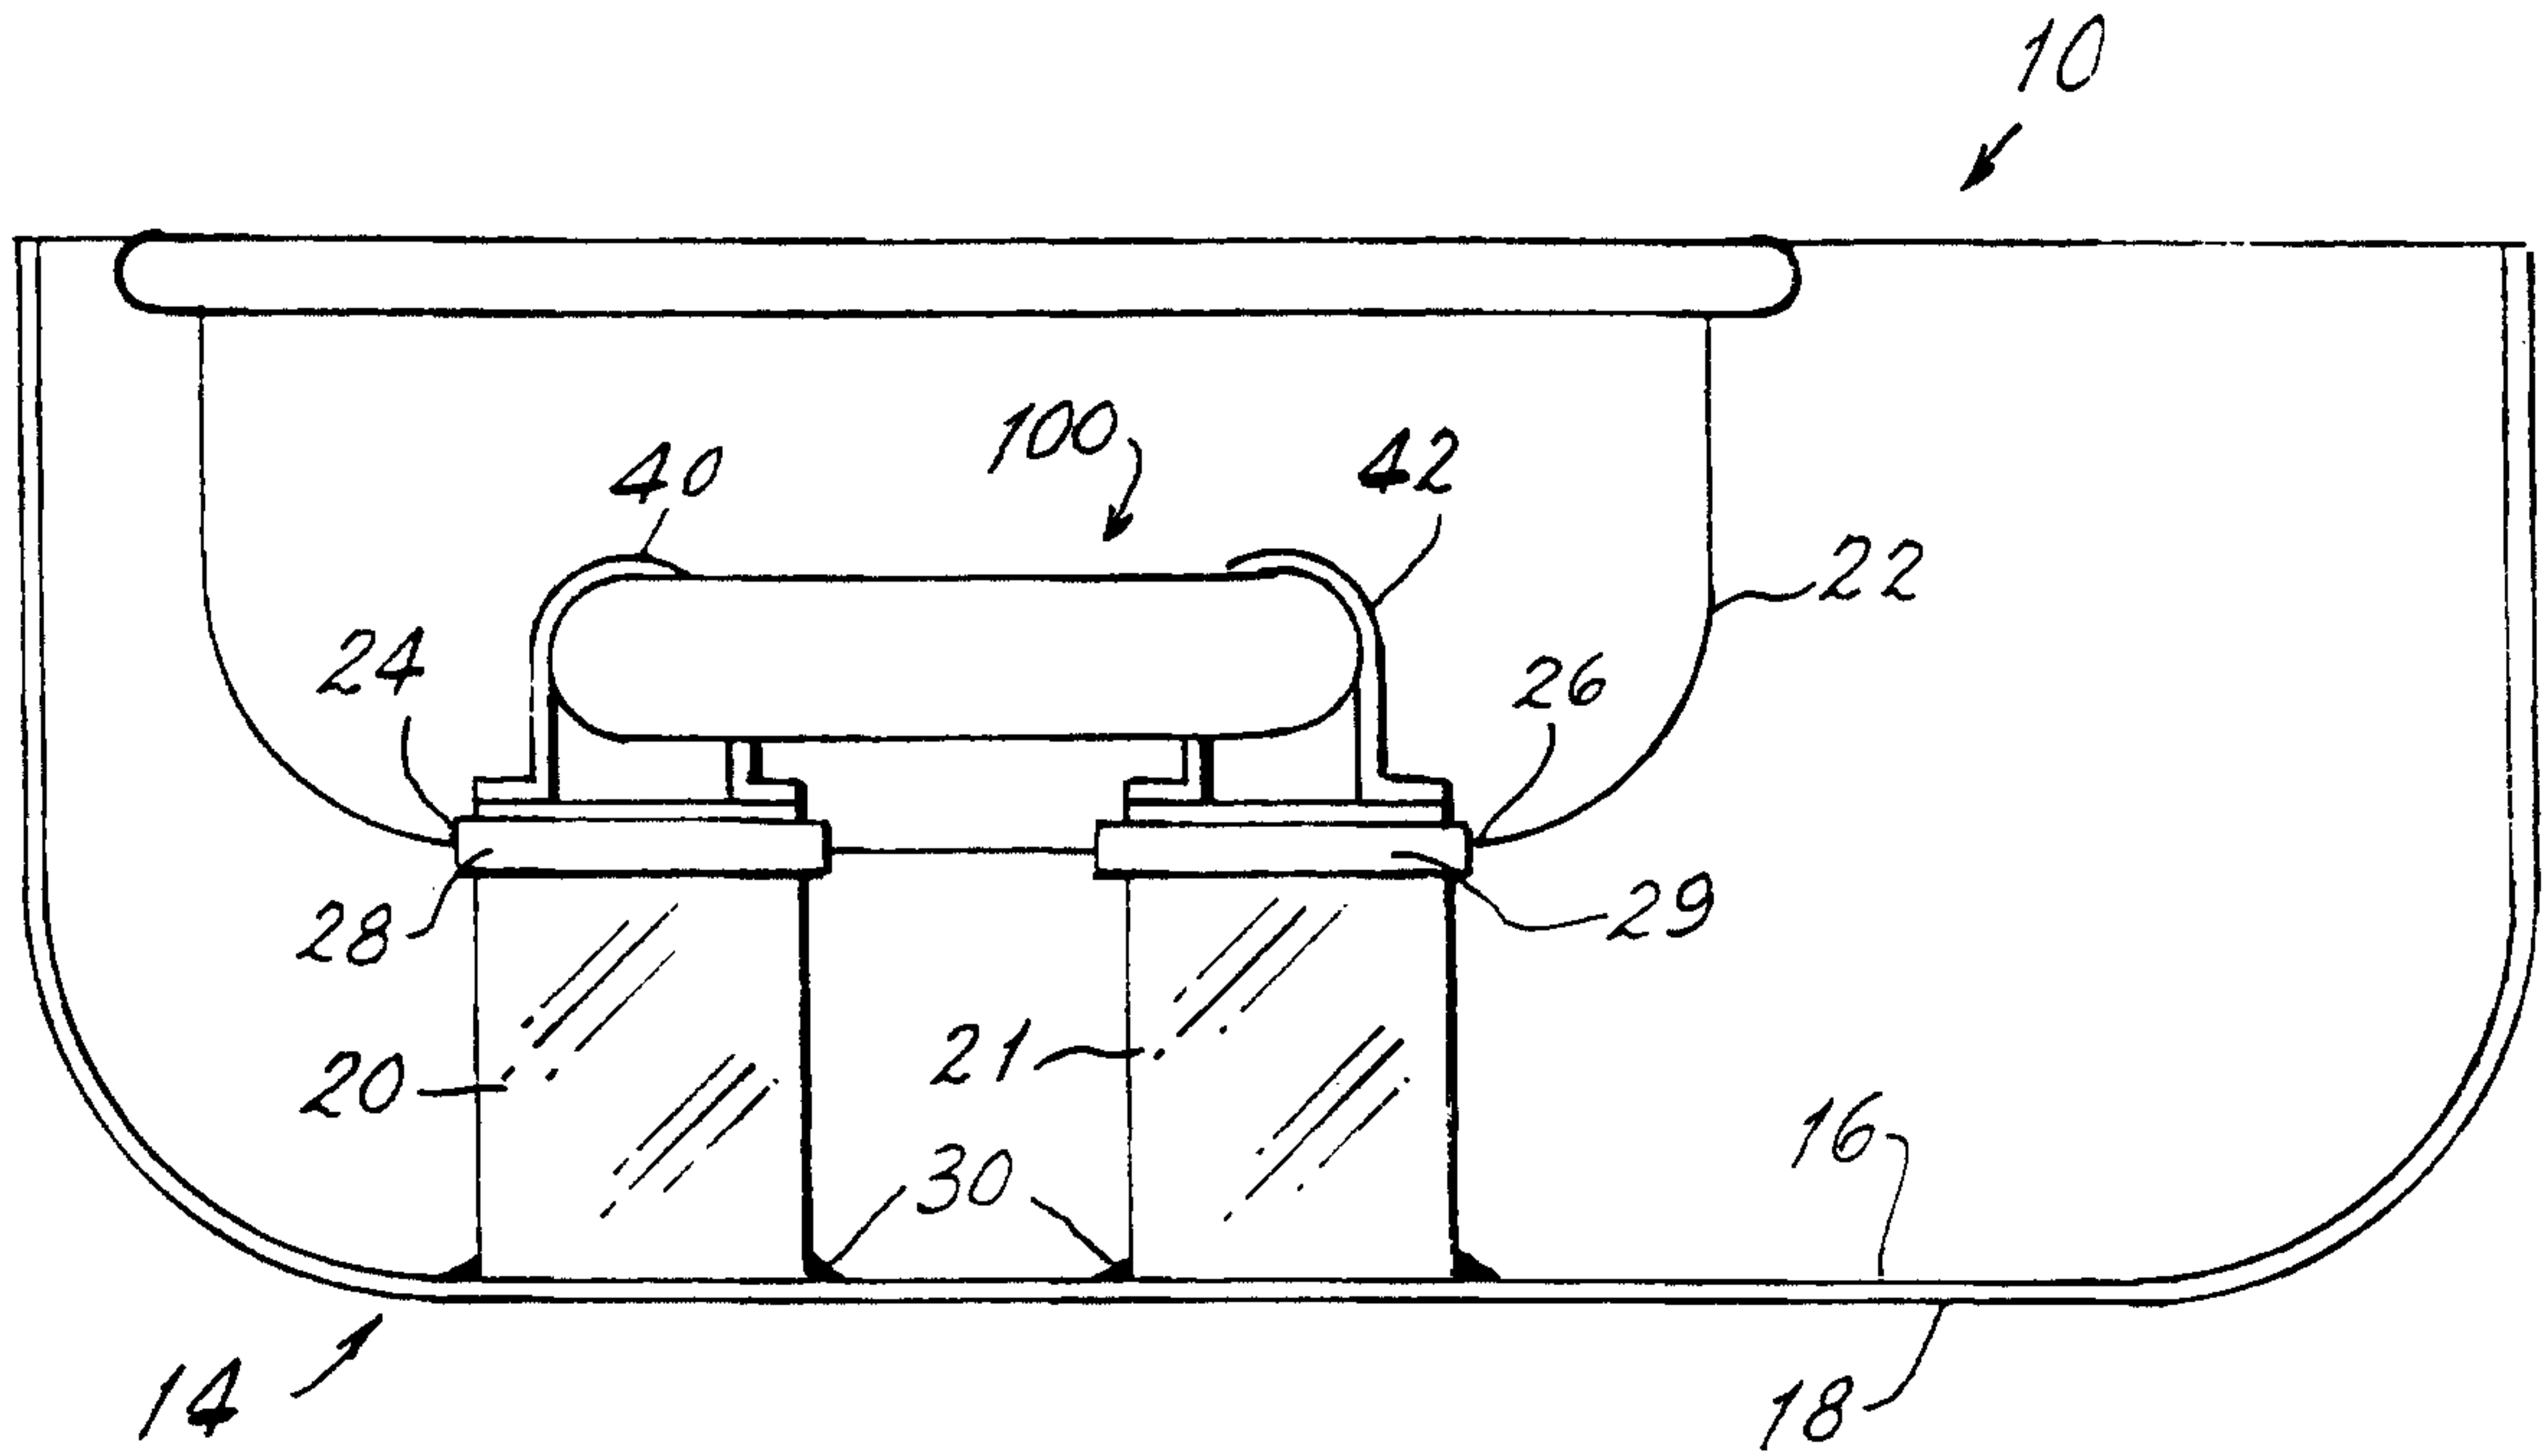


Fig. 3

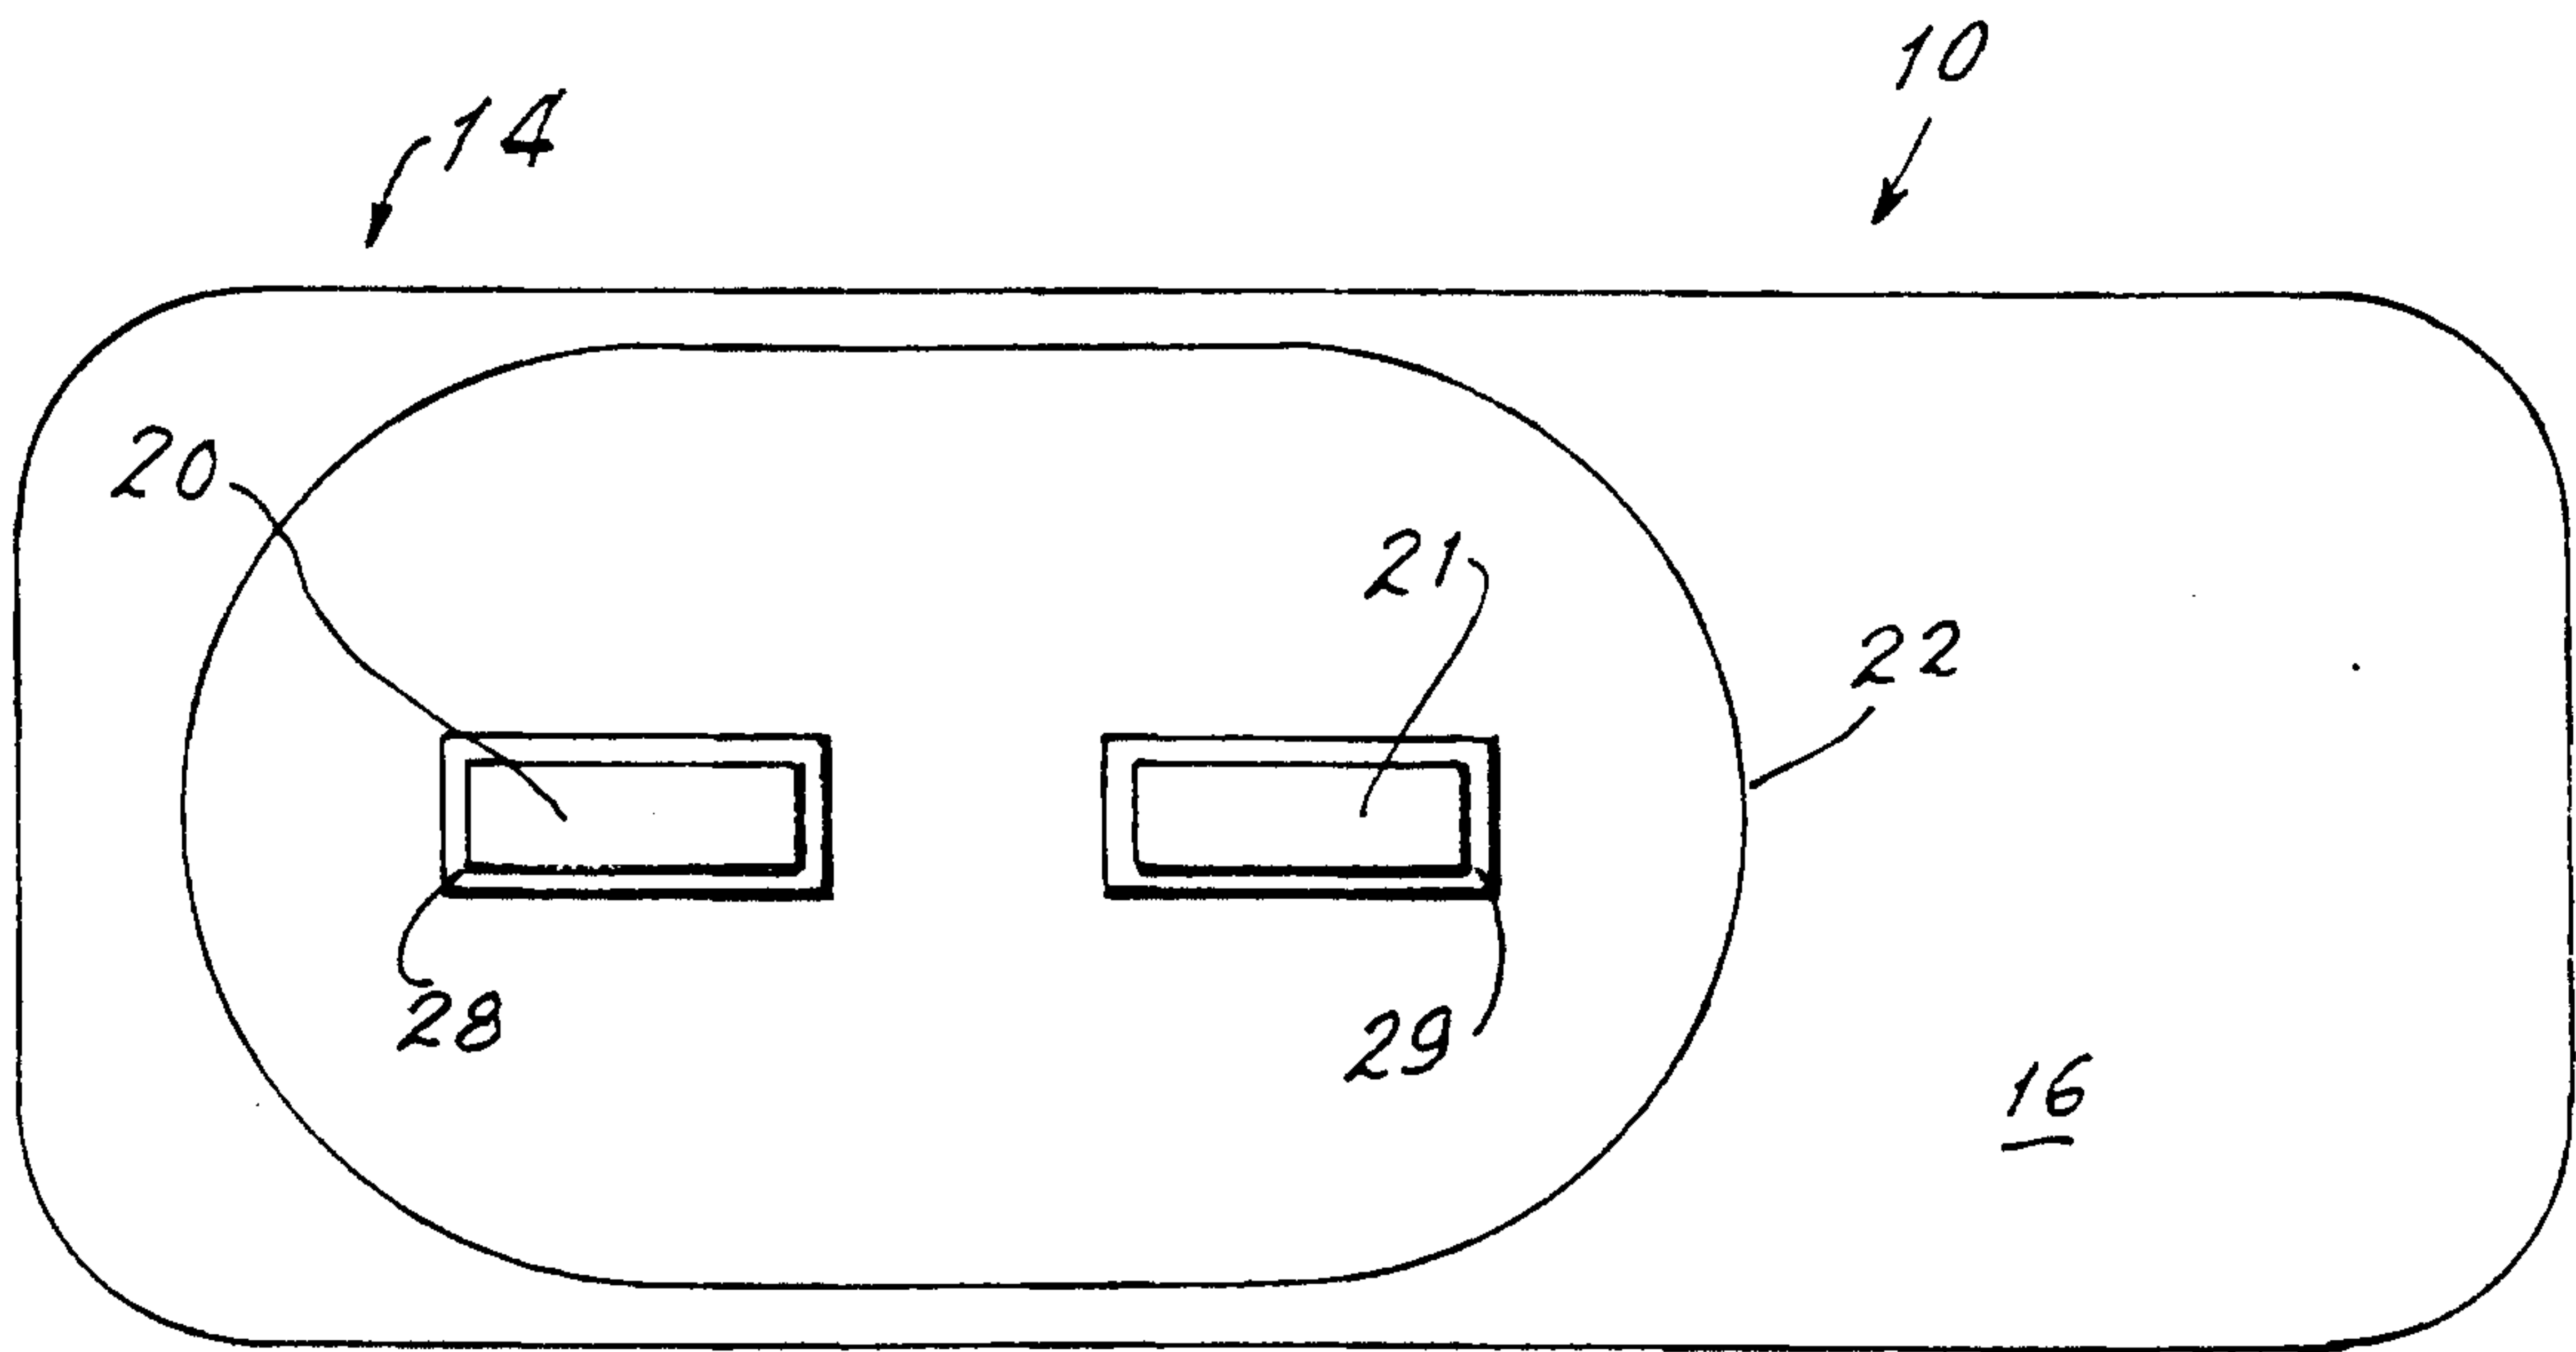


Fig. 4

Patent Agents
Fetherstonhaugh & Co.

