
J. B. KENNY. BASKET.

APPLICATION FILED APR. 30, 1908.

920,480.

Patented May 4, 1909.

TI ____

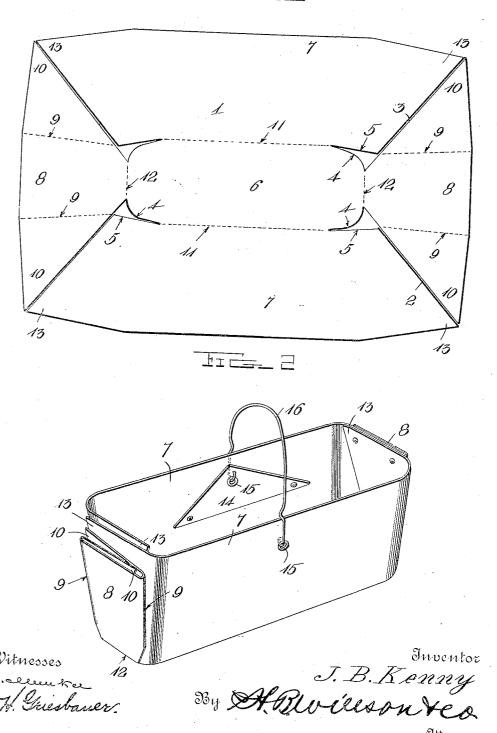

UNITED STATES PATENT OFFICE.

JOHN B. KENNY, OF GENEVA, NEW YORK.

BASKET.

No. 920,480.

Specification of Letters Patent.

Patented May 4, 1909.

Application filed April 30, 1908. Serial No. 430,186.

To all whom it may concern:

Be it known that I, John B. Kenny, a citizen of the United States, residing at Geneva, in the county of Ontario and State of New York, have invented certain new and useful Improvements in Baskets; and I do declare the following to be a full, clear, and exact description of the invention, such as will enable others skilled in the art to which it ap-10 pertains to make and use the same.

My invention relates to baskets, and particularly to that type of basket which is used for the transportation of small fruit, such as

grapes, peaches, pears, etc.

The object of the invention is to provide a device of this character which will be cheap to manufacture and which will be strong and durable, being reinforced at points where the greatest strain is thrown upon the basket in transportation. These baskets have heretofore been shipped in considerable quantities in freight cars, but it was found out that they cannot stand the strain, and that it was necessary to crate them. This, of course, is 25 expensive, necessitating additional labor, time, etc. on the cost of materials used and wasted.

It is the object of my invention to so reinforce the basket that it will withstand the 30 hard treatment received when shipping with-

out being crated.

With these and other objects in view, the invention consists of certain novel features of construction, combination and arrange-35 ment of parts, as will be more fully described and particularly pointed out in the appended

In the accompanying drawings, Figure 1 is a plan view of the blank used, Fig. 2 is a 40 perspective view of the basket with one end completely folded and the opposite end par-

tially folded.

In order to make the basket shown in Fig. 1 of the drawings I take a blank sheet 1, of 45 heavy paper-board and cut it on the lines 2, 3, 4 and 5, in order to form the bottom piece 6, the side pieces 7 and end pieces 8. The end pieces are folded upon the lines 9 to form reinforcing flaps 10, and the side pieces 50 are folded upon the line 11, so as to extend at approximately right angles to the bottom In folding the basket into position the flaps 10 are thrown over so as to lap each other upon the end piece 8, and are folded 55 upon the line 12, so as to extend at right angles to the bottom. The pointed ends of l

the sides 13, are folded over each other and the parts riveted together as shown in Fig. 2. These end pieces 8 and the ends of the sides 13 may be riveted glued or eyeleted together, 60 as may be deemed most desirable, or all three may be employed. In order to reinforce the sides at a point where the eyelet for the handle goes through I preferably secure a V-shaped reinforcing strip 14, which 65 is apertured to receive the eyelet 15, through which the handle 16, passes.

From the foregoing description, taken in connection with the accompanying drawings, the construction and operation of the inven- 70 tion will be readily understood without re-

quiring a more extended explanation.

Various changes in the form, proportion and the minor details of construction may be resorted to without departing from the prin- 75 ciple or sacrificing any of the advantages of this invention as defined in the appended

claims.

Having thus described my invention, what I claim and desire to secure by Letters Pat- 80 ent is:

1. A basket constructed of a single sheet of material and comprising bottom, side and end members, extension pieces on the side members, extension pieces on the end mem- 85 bers adapted to fold over each other, said end members being folded over the extension members on the side pieces so as to reinforce the end, and a V-shaped handle reinforcing strip secured to each side member.

2. A basket constructed of a single sheet of material and comprising bottom, side and end members, extension pieces on the side members adapted to overlap each other, extension pieces on the end members adapt- 95 ed to be doubled back upon themselves, said end members and their extensions being folded over the extension members of said side pieces so as to reinforce the same, means for securing the end members and the exten- 100 sions of the side members together, a reinforcing strip carried by the side members and a hollow rivet passing through the same for the reception of the handle bail.

In testimony whereof I have hereunto set 105 my hand in presence of two subscribing wit-

nesses.

JOHN B. KENNY.

Witnesses:

MARY E. COURTNEY, DORA A. LEAHY.