

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 May 2003 (30.05.2003)

PCT

(10) International Publication Number
WO 03/044125 A2

(51) International Patent Classification⁷: C10G

(21) International Application Number: PCT/US02/36535

(22) International Filing Date:
15 November 2002 (15.11.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/992,445 16 November 2001 (16.11.2001) US
10/083,934 27 February 2002 (27.02.2002) US

(71) Applicant: CHEVRON PHILLIPS CHEMICAL COMPANY LP [US/US]; 10001 Six Pines Drive, The Woodlands, TX 77380 (US).

(72) Inventors: PORTER, Rodney, L.; 2706 W. Oaks Circle E., Pearland, TX 77584 (US). BALINSKY, Anne, M.; 6002 Trinity Isle Court, Kingwood, TX 77345 (US). WEBER, Eric, P.; 5215 Harvest Spring Drive, Kingwood, TX 77345 (US).

(74) Agent: HULETT, Joe, D.; Chevron Phillips Chemical Company LP, 10001 Six Pines Dr., The Woodlands, TX 77380 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



WO 03/044125 A2

(54) Title: A PROCESS TO PRODUCE A DILUTE ETHYLENE STREAM AND A DILUTE PROPYLENE STREAM

(57) Abstract: A process is provided to produce a dilute ethylene stream and a dilute propylene stream to be used as feedstocks for producing olefin-based derivatives. Specifically, the dilute ethylene stream is used as a feedstock to produce ethylbenzene, and the dilute propylene stream is used as a feedstock to produce cumene, acrylic acid, propylene oxide and other propylene based derivatives.

A PROCESS TO PRODUCE A DILUTE ETHYLENE STREAM AND A DILUTE PROPYLENE STREAM

This is a Continuation-In-Part of application serial no 09/922,445, filed on November 16, 2001 from which applicants claim priority under 37 C.F.R.1.78.

5

FIELD OF THE INVENTION

This invention is related to the field of processes wherein a cracked gas stream is separated to produce dilute olefin streams to be used as feedstocks to produce olefin-based derivatives. Specifically, this invention is related to the field of processes wherein a cracked gas stream is separated to produce a dilute ethylene stream and a dilute propylene stream to be used as feedstocks for producing olefin-based derivatives. More specifically, the dilute ethylene stream is used as a feedstock to produce ethylbenzene, and the dilute propylene stream is used as a feedstock to produce cumene, acrylic acid and propylene oxide or other propylene based derivatives.

10

BACKGROUND OF THE INVENTION

15

Feedstock costs in the chemical industry comprise a significant portion of the manufacturing costs. Continuous research is being conducted to lower these costs by utilizing lower cost feed sources. The alkylation of benzene and other aromatics is one area where dilute olefin streams are employed to reduce feed related manufacturing costs. For example, in the production of ethylbenzene, a raw material for the production of styrene, the off-gas from a fluidized catalytic cracking unit (FCC) can be successfully employed as a cost advantaged ethylene source. The FCC quantities of diluents in the FCC off-gas, such as, for example, hydrogen and methane, the alkylation section of the ethylbenzene unit requires that some of the equipment be oversized. Additionally, the hydrogen sulfide content of the FCC off-gas necessitates its removal in a gas pretreatment section and subsequent compression before it can be routed to the alkylation reactor. The requirements of having oversized equipment and gas pre-treatment followed by compression greatly increase the capital costs associated with an

20

25

ethylbenzene unit utilizing FCC off-gas as its feedstock compared to a conventional ethylbenzene unit that utilizes high purity, polymer grade ethylene.

There is a need in the chemical industry to reduce feedstock costs by utilizing dilute olefin streams at olefins-based derivative units rather than polymer grade olefin feedstocks. To fulfill this need, the inventors provide this inventive process. This process reduces the amount of equipment traditionally required for the production of ethylene. An example of some of the equipment that has been eliminated is the ethylene refrigeration compressor, demethanizer, cold box system, and C₂ and C₃ splitters. Additionally, some equipment is smaller than with conventional crackers of comparable scale. The propylene refrigeration system is reduced in size over that of a conventional cracker. This invention also benefits the olefin-based derivative units that produce, for example, ethylbenzene, cumene, acrylic acid, and propylene oxide. One of the benefits is the pretreatment normally required for the olefins-based derivative units is not necessary in this inventive process because treatment has already been accomplished in the process to produce the dilute olefins stream. In others words, this inventive process to produce dilute olefin streams and route these stream to olefins-based derivative units has a reduced capital cost over a traditional FCC off-gas process since all pretreatment and compression is handled by the dilute olefins process.

SUMMARY OF THE INVENTION

An object of this invention is to provide a process to produce a dilute ethylene stream and a dilute propylene stream from a cracked gas stream.

Another object of this invention is to provide a process to produce the dilute ethylene stream and the dilute propylene stream from a cracked gas stream generated by the steam cracking of C₂ and higher hydrocarbons.

Another object of this invention is to provide a process to produce the dilute ethylene stream and dilute propylene stream wherein these streams are utilized to produce olefin-based derivatives.

Another object of this invention is to provide a process to produce a dilute ethylene stream wherein the dilute ethylene stream is used as a feedstock to produce ethylbenzene.

Another object of this invention is to provide a process to produce a dilute ethylene stream wherein the ethylbenzene unit utilizing the dilute ethylene stream does not contain pretreatment and compression zones.

Another object of this invention is to provide a process to produce a dilute propylene stream wherein the dilute propylene stream is used as a feedstock to produce cumene, acrylic acid, propylene oxide and other propylene derivatives.

Yet another object of this invention is to produce cumene, acrylic acid, and propylene oxide and other propylene derivatives without a pretreatment unit.

In accordance with one embodiment of this invention, a process for producing a dilute ethylene stream and a dilute propylene stream from a cracked gas stream is provided, the process comprising (or optionally, "consisting essentially of" or "consisting of") the following steps in the order named:

(1) separating the cracked gas stream in a deethanizer zone to produce a C₂- stream and a C₃+ stream;

(2). hydrogenating the C₂- stream in a hydrogenation zone to remove a portion of the acetylene to produce the dilute ethylene stream;

(3) separating the C₃+ stream in a depropanizer zone to produce a C₃ stream and a C₄+ stream; and

(4) reacting the C₃ stream in a methylacetylene-propadiene hydrogenation (MAPD) reactor zone to convert a portion of methylacetylene and propadiene to propylene and propane to produce the dilute propylene stream.

In accordance with another embodiment of this invention, a process for producing the cracked gas stream is provided, the process comprising (or optionally, "consisting essentially of" or "consisting of"):

(1) heating a hydrocarbon feed in a cracking zone to form a raw cracked gas stream; wherein the raw cracked gas stream comprises hydrogen, methane, C₂ hydrocarbons, C₃ hydrocarbons and heavier constituents;

5 (2) quenching the raw cracked gas stream in a quenching zone to produce a quenched, cracked gas stream;

(3) compressing the quenched, cracked gas stream in a first compression zone to form a pressurized, cracked gas stream;

(4) deacidifying the pressurized, cracked gas stream in a deacidifying zone to remove a portion of the hydrogen sulfide to form a wet cracked gas stream; and

10 (5) drying the wet cracked gas stream in a drying zone to form a cracked gas stream.

In accordance with another embodiment of this invention, a process for producing a dilute ethylene stream and a dilute propylene stream is provided, the process comprising (or optionally, "consisting essentially of" or "consisting of") the following steps in the order named:

15 (1) separating the cracked gas stream in a deethanizer zone to produce a C₂-stream and a C₃+ stream;

(2) compressing the C₂- stream in a compression zone to form a pressurized C₂- stream;

(3) hydrogenating the pressurized C₂- stream in a hydrogenation zone to remove a portion of the acetylene to produce the dilute ethylene stream;

20 (4) separating the C₃+ stream in a depropanizer zone to produce a C₃ stream and a C₄+ stream; and

(5) reacting the C₃ stream in a MAPD reactor zone to convert a portion of methylacetylene and propadiene to propylene and propane to produce the dilute propylene stream.

In accordance with another embodiment of this invention, a process for producing a dilute ethylene stream and a dilute propylene stream is provided, the process comprising (or optionally, "consisting essentially of" or "consisting of") the following steps in the order named:

5 (1) hydrogenating a portion of the acetylene in the cracked gas stream in a hydrogenation zone to produce a reduced acetylene cracked gas stream;

(2) separating the reduced acetylene cracked gas stream in a deethanizer zone to produce the dilute ethylene stream and a C₃+ stream;

(3) separating the C₃+ stream in the depropanizer zone to produce a C₃ stream and a C₄+ stream; and

10 (4) reacting the C₃ stream in a MAPD reactor zone to convert a portion of methylacetylene and propadiene to propylene and propane to produce the dilute propylene stream.

In accordance with another embodiment of this invention, a process for producing a dilute ethylene stream and a dilute propylene stream is provided, the process comprising (or
15 optionally, "consisting essentially of" or "consisting of") the following steps in the order named:

(1) heating a hydrocarbon feed in a cracking zone to form a raw cracked gas stream; wherein the cracked gas stream comprises hydrogen, methane, C₂ hydrocarbons, C₃ hydrocarbons and heavier constituents;

20 (2) quenching the raw cracked gas stream in a quenching zone to produce a quenched, cracked gas stream;

(3) compressing the quenched, cracked gas stream in a first compression zone to form a pressurized cracked gas stream;

(4) deacidifying the pressurized, cracked gas stream in a deacidifying zone to remove a portion of the hydrogen sulfide to form a wet cracked gas stream;

25

- (5) drying the wet cracked gas stream in a drying zone to form a cracked gas stream;
- (6) separating the cracked gas stream in a deethanizer zone to produce a C₂- stream and a C₃+ stream;
- (7) compressing the C₂- stream in a second compression zone to form a pressurized C₂- stream;
- (8) hydrogenating the pressurized C₂- stream in a hydrogenation zone to remove a portion of the acetylene to produce the dilute ethylene stream; and
- (9) separating the C₃+ stream in a depropanizer zone to produce a C₃ stream and a C₄+ stream; and
- (10) reacting the C₃ stream in a MAPD reactor zone to convert a portion of methylacetylene and propadiene to propylene and propane to produce the dilute propylene stream.

In accordance with another embodiment of this invention, a process for producing a dilute ethylene stream and a dilute propylene stream is provided, the process comprising (or optionally, "consisting essentially of" or "consisting of") the following steps in the order named:

- (1) heating a hydrocarbon feed in a cracking zone to form a raw cracked gas stream; wherein the cracked gas stream comprises hydrogen, methane, C₂ hydrocarbons, C₃ hydrocarbons, and heavier constituents;
- (2) quenching the raw cracked gas stream in a quenching zone to produce a quenched, cracked gas stream;
- (3) compressing the quenched, cracked gas stream in a first compression zone to form a pressurized, cracked gas stream;
- (4) deacidifying the pressurized, cracked gas stream in a deacidifying zone to remove a portion of the hydrogen sulfide to form a wet cracked gas stream;

(5) drying the wet cracked gas stream in a drying zone to form a cracked gas stream;

(6) separating the cracked gas stream in a deethanizer zone to produce a C₂- stream and a C₃+ stream;

(7) hydrogenating the C₂- stream in a hydrogenation zone to remove a portion of the acetylene to produce the dilute ethylene stream; and

(8) separating the C₃+ stream in a depropanizer zone to produce a C₃ and a C₄+ stream;

(9) reacting the C₃ stream in a MAPD reactor zone to convert a portion of methylacetylene and propadiene to propylene and propane to produce the dilute propylene stream.

10 In accordance with another embodiment of this invention, a process for producing a dilute ethylene stream and a dilute propylene stream is provided, the process comprising (or optionally, "consisting essentially of" or "consisting of") the following steps in the order named:

(1) heating a hydrocarbon feed in a cracking zone to form a raw cracked gas stream;

wherein the raw cracked gas stream comprises hydrogen, methane, C₂ hydrocarbons, C₃ hydrocarbons and heavier constituents;

(2) quenching the raw cracked gas stream in a quenching zone to produce a quenched, cracked gas stream;

(3) compressing the quenched, cracked gas stream in a first compression zone to form a pressurized, cracked gas stream;

20 (4) deacidifying the pressurized, cracked gas stream in a deacidifying zone to remove a portion of the hydrogen sulfide to form a wet cracked gas stream; and

(5) drying the wet cracked gas stream in a drying zone to reduce the moisture level to form a cracked gas stream;

25 (6) hydrogenating a portion of the acetylene in the cracked gas stream in a hydrogenation zone to produce a reduced acetylene cracked gas stream;

(7) separating the reduced acetylene cracked gas stream in a deethanizer zone to produce the dilute ethylene stream and a C₃+ stream;

(8) separating the C₃+ stream in the depropanizer zone to produce a C₃ stream and a C₄+ stream; and

5 (9) reacting the C₃ stream in a MAPD reactor zone to convert a portion of methylacetylene and propadiene to propylene and propane to produce the dilute propylene stream.

In accordance with another embodiment of this invention, a process for producing a dilute ethylene stream is provided, the process comprising (or optionally, “consisting essentially
10 of” or “consisting of”) the following steps in the order named:

(1) separating the cracked gas stream in a deethanizer zone to produce a C₂-stream and a C₃+ stream;

(2) hydrogenating the C₂- stream in a hydrogenation zone to remove a portion of the acetylene to produce the dilute ethylene stream;

15 (3) routing the C₃+ stream to storage or other process unit.

In accordance with another embodiment of this invention, a process for producing a dilute ethylene stream is provided, the process comprising (or optionally, “consisting essentially
of” or “consisting of”) the following steps in the order named:

(1) separating the cracked gas stream in a deethanizer zone to produce a C₂-stream and a
20 C₃+ stream;

(2) compressing the C₂- stream in a compression zone to form a pressurized C₂- stream;

(3) hydrogenating the pressurized C₂- stream in a hydrogenation zone to remove a portion of the acetylene to produce the dilute ethylene stream; and

(4) routing the C₃+ stream to storage or other process unit.

In accordance with another embodiment of this invention, a process for producing a dilute ethylene stream is provided, the process comprising (or optionally, “consisting essentially of” or “consisting of”) the following steps in the order named:

5 (1) hydrogenating a portion of the acetylene in the cracked gas stream in a hydrogenation zone to produce a reduced acetylene cracked gas stream;

(2) separating the reduced acetylene cracked gas stream in a deethanizer zone to produce the dilute ethylene stream and a C₃+ stream; and

(3) routing the C₃+ stream to storage or other process unit.

10 In accordance with another embodiment of this invention, a process for producing a dilute ethylene stream is provided, the process comprising (or optionally, “consisting essentially of” or “consisting of”) the following steps in the order named:

(1) heating a hydrocarbon feed in a cracking zone to form a raw cracked gas stream; wherein the cracked gas stream comprises hydrogen, methane, C₂ hydrocarbons, C₃
15 hydrocarbons and heavier constituents;

(2) quenching the raw cracked gas stream in a quenching zone to produce a quenched, cracked gas stream;

(3) compressing the quenched, cracked gas stream in a first compression zone to form a pressurized cracked gas stream;

20 (4) deacidifying the pressurized, cracked gas stream in a deacidifying zone to remove a portion of the hydrogen sulfide to form a wet cracked gas stream;

(5) drying the wet cracked gas stream in a drying zone to produce a cracked gas stream;

(6) separating the cracked gas stream in a deethanizer zone to produce a C₂- stream and a C₃+ stream;

(7) compressing the C₂- stream in a second compression zone to form a pressurized C₂-stream;

(8) hydrogenating the pressurized C₂- stream in a hydrogenation zone to remove a portion of the acetylene to produce the dilute ethylene stream; and

5 (9) routing the C₃+ stream to storage or other process unit.

In accordance with another embodiment of this invention, a process for producing a dilute ethylene stream is provided, the process comprising (or optionally, “consisting essentially of” or “consisting of”):

10 (1) heating a hydrocarbon feed in a cracking zone to form a cracked gas stream; wherein the cracked gas stream comprises hydrogen, methane, C₂ hydrocarbons, C₃ hydrocarbons, and heavier constituents;

(2) quenching the raw cracked gas stream in a quenching zone to produce a quenched, cracked gas stream;

15 (3) compressing the quenched, cracked gas stream in a first compression zone to form a pressurized cracked gas stream;

(4) deacidifying the pressurized, cracked gas stream in a deacidifying zone to remove a portion of the hydrogen sulfide to form a wet cracked gas stream;

(5) drying the wet cracked gas stream in a drying zone to produce a cracked gas stream;

20 (6) separating the cracked gas stream in a deethanizer zone to produce a C₂- stream and a C₃+ stream;

(7) hydrogenating the pressurized, C₂- stream in the hydrogenation zone to remove a portion of the acetylene to produce the dilute ethylene stream; and

(8) routing the C₃+ stream to storage or other process unit.

In accordance with another embodiment of this invention, a process for producing a dilute ethylene stream and a dilute propylene stream is provided, the process comprising (or optionally, "consisting essentially of" or "consisting of") the following steps in the order named:

5 (1) heating a hydrocarbon feed in a cracking zone to form a raw cracked gas stream; wherein the raw cracked gas stream comprises hydrogen, methane, C₂ hydrocarbons, C₃ hydrocarbons, and heavier constituents;

(2) quenching the raw cracked gas stream in a quenching zone to produce a quenched, cracked gas stream;

10 (3) compressing the quenched, cracked gas stream in a first compression zone to form a pressurized cracked gas stream;

(4) deacidifying the pressurized, cracked gas stream in a deacidifying zone to remove a portion of the hydrogen sulfide to form a wet cracked gas stream; and

(5) drying the cracked gas stream in a drying zone to produce a cracked gas stream.

15 (6) hydrogenating a portion of the acetylene in the cracked gas stream in a hydrogenation zone to produce a reduced acetylene cracked gas stream;

(7) separating the reduced acetylene cracked gas stream in a deethanizer zone to produce the dilute ethylene stream and a C₃+ stream;

(8) routing the C₃+ stream to storage or other process unit.

20 In accordance with another embodiment of this invention, a process for producing a dilute ethylene stream and a dilute propylene stream is provided, the process comprising (or optionally, "consisting essentially of" or "consisting of") the following steps in the order named:

(1) Separating a cracked gas stream in a depropanizer zone to form a C₃- stream and a C₄+ stream

(2) Separating the C₃- stream in a deethanizer zone to form a C₂- stream and a C₃ stream.

(3) hydrogenating a portion of the acetylene in the C₂- stream in a hydrogenation zone to produce a dilute ethylene stream; and

(4) reacting the C₃ stream in a MAPD zone to convert a portion of methylacetylene and propadiene to propylene and propane to produce said dilute propylene stream.

These objects, and other objects, will become more apparent to others with ordinary skill in the art after reading this disclosure.

10

Brief Description of Drawings

FIG 1. A diagram showing an embodiment of the process to produce dilute propylene and dilute ethylene.

FIG 2. A diagram showing the preferred method of producing cracked gas feed.

FIG 3. A diagram showing another embodiment of the process to produce dilute propylene and dilute ethylene with a second compression zone.

15

FIG 4. A diagram showing another embodiment of the process to produce dilute ethylene and dilute propylene with a hydrogenation zone before the deethanizer zone.

FIG 5. A diagram for a process to produce dilute ethylene.

20

FIG 6. A diagram for a process to produce dilute ethylene with a second compression zone.

FIG 7. A diagram for a process to produce dilute ethylene with a hydrogenation zone before the deethanizer zone.

- FIG 8. A diagram for a process to produce dilute ethylene and dilute propylene with a depropanizer zone as the first separation.
- FIG 9. A diagram of a process to produce propylene oxide.
- FIG 10. A diagram of a process to produce acrylic acid.
- 5 FIG 11. A diagram of a process to produce cumene.
- FIG 12. A diagram of a process to produce ethylbenzene.

DETAILED DESCRIPTION OF THE INVENTION

In a first embodiment of this invention, a process for producing a dilute ethylene stream and a dilute propylene stream from a cracked gas stream is provided as shown in Figure 1.

10 Step (1) is separating the cracked gas stream in line 10 in a deethanizer zone 15 to produce a C₂- stream in line 20 and a C₃+ stream in line 45. The deethanizer zone 15 comprises a fractionator sufficient to produce the C₂- stream in line 20 and a C₃+ stream in line 45. The C₂- stream comprises hydrogen, methane, ethane, acetylene and ethylene. The C₃+ stream comprises C₃ hydrocarbons and heavier constituents. The cracked gas stream in line 10 comprises
15 hydrogen, methane, C₂ hydrocarbons, C₃ hydrocarbons, and heavier constituents, and can be produced by any means known in the art.

Step (2) is hydrogenating the C₂- stream in line 20 in a hydrogenation zone 25 to remove a portion of the acetylene to produce the dilute ethylene stream in line 30. Hydrogenation in the hydrogenating zone 25 can be completed by any means known in the art. For example, an
20 acetylene reactor containing catalyst can be utilized to hydrogenate a portion of the acetylene. Typically, Group VIII metal hydrogenation catalysts are utilized. Hydrogenation catalysts are disclosed in U.S. Patent Numbers 3,679,762; 4,571,442; 4,347,392; 4,128,595; 5,059,732; 5,488,024; 5,489,565; 5,520,550; 5,583,274; 5,698,752; 5,585,318; 5,587,348; 6,127,310 and 4,762,956; all of which are herein incorporated by reference. Generally, the amount of acetylene
25 remaining in the dilute ethylene stream in line 30 is in a range of less than about 5 ppm by weight, preferably, in a range of 0.5 ppm to 3 ppm by weight.

The temperature and pressure in the hydrogenation zone 25 is that which is sufficient to substantially hydrogenate the acetylene in the C₂- stream in line 20. Preferably, the hydrogenating occurs at a temperature in a range of about 50°F to about 400°F and at a pressure in a range of about 350 psia to about 600 psia.

5 Generally, the amount of ethylene in the dilute ethylene stream in line 30 is in a range of about 30% to about 60% by weight, preferably, 40% to 60 % by weight. The dilute ethylene stream in line 30 then can be routed to a dilute ethylene derivative unit 35 to produce different chemicals in line 40 including, but not limited to, ethylbenzene. Preferably, the dilute ethylene stream in line 30 is routed to an ethylbenzene unit. The ethylbenzene unit can utilize any process
10 known in the art. For example, a Friedel-Crafts alkylation reaction of benzene by ethylene is used. Optionally, an effluent gas stream in line 41 from the dilute ethylene derivative unit 35 can be recycled to a cracking zone 105, shown in Figure 2, to produce more dilute ethylene. The composition of the effluent gas stream can vary widely depending on the predominant hydrocarbon feed initially fed to the cracking zone 105. Typically, the effluent gas stream
15 comprises hydrogen, methane, and other light hydrocarbons. Hydrogen and methane may need to be removed from the dilute process stream prior to recycle. This removal can be accomplished by separation membranes, separators, or other equipment.

Step (3) is separating the C₃+ stream in line 45 in a depropanizer zone 50 to produce a C₃ stream in line 55 and a C₄+ stream in line 80. The depropanizer zone 50 comprises a fractionator
20 sufficient to produce the C₃ stream in line 55 and a C₄+ stream in line 80. The C₃ stream in line 55 comprises propane, propylene, methylacetylene and propadiene. The amount of propylene in the C₃ stream in line 55 is in a range of about 55% to about 98% by weight, preferably, in a range of 85% to 96% by weight. The C₄+ stream in line 80 comprises C₄ hydrocarbons and heavier hydrocarbon constituents.

25 Step (4) is reacting the C₃ stream in line 55 in a MAPD reactor zone 60 to remove a portion of methylacetylene and propadiene to produce the dilute propylene stream in line 62. The hydrogenation process for the reduction of MAPD occurs in the MAPD reactor zone 60 can be completed by any means known in the art. Generally, the amount of methylacetylene and propadiene remaining in the dilute propylene stream in line 62 is less than 2 ppm by weight.

The dilute propylene stream in line 62 can be routed to an dilute propylene derivative unit 70 to produce different dilute propylene derivatives. For example, the dilute propylene stream in line 62 can be routed to a process to produce cumene, propylene oxide or acrylic acid in line 75. Cumene can be produced by any process known in the art. For example, a Friedel-Crafts
5 alkylation reaction of benzene by propylene is used to produce cumene. Cumene then can be used to produce other products, such as, for example, phenols.

Optionally, the C_4+ stream in line 80 is separated in a debutanizer zone 85 to produce a C_4 stream in line 90 and a C_5+ stream in line 95. The debutanizer zone 85 comprises a fractionator sufficient to produce the C_4 stream in line 90 and a C_5+ stream in line 95. The C_4
10 stream in line 90 comprises C_4 hydrocarbons. The C_5+ stream in line 95 comprises C_5 hydrocarbons and heavier hydrocarbon constituents.

Optionally, the C_5+ stream in line 95 is treated in a hydrotreating zone 98 to produce a C_5 diolefins stream in line 96, a benzene-toluene-xylenes (BTX) stream in line 99, a dicyclopentadiene (DCPD) stream in line 97 and a fuel oil stream in line 94. The treatment of
15 the C_5+ stream in the hydrotreating zone 98 can be accomplished by any means known in the art. For example, U.S patent number 6,258,989 discloses a hydrotreating zone that can be utilized in this invention, herein incorporated by reference. The C_5 diolefins stream in line 96 comprises C_5 hydrocarbons, and the BTX stream in line 99 comprises benzene, toluene, and xylenes. The DCPD stream in line 97 comprises dicyclopentadiene, and the fuel oil stream in line 94
20 comprises C_8+ hydrocarbons.

In a second embodiment of the invention, the cracked gas stream utilized as the feedstock in this process can be produced by any process known in the art. A preferred process for producing the cracked gas stream is provided as shown in Figure 2.

Step (1) is heating a hydrocarbon feed in line 100 in a cracking zone 105 to produce a
25 raw cracked gas stream in line 110. Generally, the hydrocarbon feed in line 100 comprises at least one hydrocarbon selected from the group consisting of ethane, propane, butane, pentane, naphtha, gas condensates, gas oils, and mixtures thereof. Preferably, a majority of the hydrocarbon feed in line 100 consists of C_5 hydrocarbons and higher hydrocarbons.

The cracking zone 105 comprises at least one radiant furnace reactor capable of producing the raw cracked gas stream in line 110. Typically, dilution stream is added to the radiant furnace reactors to reduce coking and to reduce the partial pressure of the hydrocarbon feed, thus increasing ethylene yield. Radiant furnace reactors are disclosed in U.S. Patent
5 Numbers 5,151,158; 4,780,196; 4,499,055; 3,274,978; 3,407,789; and 3,820,955; all of which are herein incorporated by reference.

The raw cracked gas stream in line 110 comprises hydrogen, methane, C₂ hydrocarbons, C₃ hydrocarbons, and heavier constituents. Generally, the raw cracked gas stream in line 110
10 comprises at least about 10% by weight ethylene, preferably, at least about 20% by weight ethylene, and most preferably, at least about 30% by weight ethylene. For example, the raw cracked gas stream in line 110 comprises about 1 to about 5 weight percent hydrogen, about 3 to about 25 weight percent methane, less than about 1 weight percent acetylene, about 25 to about 35 weight percent ethylene, about 3 to about 45 weight percent ethane, and up to about 55 weight percent C₃+ hydrocarbons, depending on the hydrocarbon feed.

15 Step (2) is quenching the raw cracked gas stream in line 110 in a quenching zone 115 to produce a quenched, cracked gas stream in line 120. Typically, the raw cracked gas stream in line 110 is quenched in quenching zone 115 to a temperature below which the cracking reaction substantially stops in order to prevent coking. Generally, the raw cracked gas stream in line 110 is cooled to a temperature below about 1100°F to substantially stop the cracking reaction.
20 Preferably, the raw cracked gas stream in line 110 is cooled to a temperature in a range of about 85 to about 225°F to form the quenched cracked gas stream in line 120. Quenching can be effected by any means known in the art. For example, the raw cracked gas stream in line 110 can be passed to a quench boiler and quench tower where fuel oil and dilution stream can be removed. Method for cooling a raw cracked gas stream are disclosed in U.S. Patents 3,407,798;
25 5,427,655; 3,392,211; 4,3351,275; and 3,403,722, all herein incorporated by reference.

Step (3) is compressing the quenched, cracked gas stream in line 120 in a first compression zone 125 to produce a pressurized, cracked gas stream in line 130. The pressure of the pressurized, cracked gas stream in line 130 is in a range of about 150 psig to about 650 psig. The first compression zone 125 comprises at least one gas compressor. Any gas compressor
30 known in the art can be utilized.

Step (4) is deacidifying the pressurized, cracked gas stream in line 130 in a deacidifying zone 135 to remove a portion of the hydrogen sulfide and carbon dioxide to form a wet cracked gas stream in line 140. Generally, the wet cracked gas stream in line 140 has a hydrogen sulfide concentration less than about 0.1 ppm by weight, preferably, in a range of 25 to 100 ppb by weight. Generally, the wet cracked gas stream has a carbon dioxide concentration of less than about 5 ppm by weight. The hydrogen sulfide can be removed in the deacidifying zone 135 by any means known in the art. For example, diethanolamine or caustic contactors can be used to remove hydrogen sulfide and carbon dioxide.

Step (5) is drying the wet cracked gas stream in line 140 in a drying zone 145 to produce the cracked gas stream in line 150. Generally, the water content of the cracked gas stream in line 150 is sufficiently dry to prevent downstream operational problems. Preferably, the water content of the cracked gas stream in line 150 is less than 10 ppm by weight. Drying in drying zone 145 can be accomplished by any means known in the art. For example, molecular sieve beds can be utilized to remove water from the wet cracked gas stream in line 140.

In a third embodiment of this invention, a process for producing a dilute ethylene stream and dilute propylene stream from a cracked gas stream is provided as shown in Figure 3.

Step (1) is separating the cracked gas stream in line 155 in a deethanizer zone 160 to produce a C_2^- stream in line 165 and a C_3^+ stream in line 200. The deethanizer zone 160 comprises a fractionator sufficient to produce the C_2^- stream in line 165 and a C_3^+ stream in line 200. The C_2^- stream comprises hydrogen, methane, ethane, acetylene and ethylene. The C_3^+ stream comprises C_3 hydrocarbons and heavier constituents.

Step (2) is compressing the C_2^- stream in line 165 in a second compression zone 170 to produce a pressurized, C_2^- stream in line 175. The pressure of the pressurized, C_2^- stream in line 175 is in a range of about 150 to about 650 psig, preferably, in a range of 200 to 650 psig. The second compression zone 170 comprises a gas compressor and related equipment. Any gas compressor known in the art can be utilized.

Step (3) is hydrogenating the pressurized C_2^- stream in line 175 in a hydrogenation zone 180 to remove a portion of the acetylene to produce the dilute ethylene stream in line 185. The hydrogenation zone 180 is the same as previously described in the first embodiment.

Generally, the amount of ethylene in the dilute ethylene stream in line 185 is in a range of about 30% to about 60% by weight, preferably, 40% to 60 % by weight. The dilute ethylene stream in line 185 then can be routed to an dilute ethylene derivative unit 190 to produce different chemicals in line 195 including, but not limited to, ethylbenzene. The dilute ethylene derivative unit 190 is the same as dilute ethylene derivative unit 35 previously described in the first embodiment. Optionally, an effluent gas stream in line 191 from the dilute ethylene derivative unit 190 can be recycled to a cracking zone 105 in Figure 2.

Step (4) is separating the C_3+ stream in line 200 in a depropanizer zone 205 to produce a C_3 stream in line 210 and a C_4+ stream in line 235. The depropanizer zone 205 and the C_3 stream and the C_4+ stream are the same as previously described in the first embodiment.

Step (5) is reacting the C_3 stream in line 210 in a MAPD reactor zone 215 to remove a portion of methylacetylene and propadiene to produce the dilute propylene stream in line 217. The MAPD reactor zone 215 is the same as MAPD reactor zone 60 previously described in the first embodiment. The dilute propylene stream is the same as previously described in the first embodiment.

The dilute propylene stream in line 217 then can be routed to a dilute propylene derivative unit 225 to produce different dilute propylene derivatives in line 230. The dilute propylene derivative unit 225 is the same as dilute propylene derivative unit 70 previously described in the first embodiment.

Optionally, the C_4+ stream in line 235 is separated in a debutanizer zone 240 to produce a C_4 stream in line 245 and a C_5+ stream in line 250. The debutanizer zone 240 comprises a fractionator sufficient to produce the C_4 stream in line 245 and a C_5+ stream in line 250. The debutanizer zone 240 and the C_4 stream in line 245 and the C_5+ stream in line 250 are the same as previously described in the first embodiment.

Optionally, the C_5+ stream in line 250 is treated in a hydrotreating zone 255 to produce a C_5 diolefins stream in line 256, a BTX stream in line 257, a DCPD stream in line 258, and a fuel oil stream in line 254. The hydrotreating zone 255, the C_5 diolefins stream in line 256, the BTX stream in line 257, and the DCPD stream in line 258 and the fuel oil stream in line 254 are the same as previously described in the first embodiment.

In a fourth embodiment of this invention, a process for producing a dilute ethylene and dilute propylene stream from a cracked gas stream is provided as shown in Figure 4.

Step (1) is hydrogenating the cracked gas stream in line 260 in a hydrogenation zone 265 to remove a portion of the acetylene to produce a reduced acetylene cracked gas stream in line 270. The hydrogenation zone 265 is the same as previously described in the first embodiment.

Step (2) is separating the reduced acetylene cracked gas stream in line 270 in a deethanizer zone 275 to produce the dilute ethylene stream in line 280 and a C₃+ stream in line 295. The deethanizer zone 275 comprises a fractionator sufficient to produce the dilute ethylene stream in line 280 and a C₃+ stream in line 295. The deethanizer zone 275, dilute ethylene stream in line 280 and C₃+ stream in line 295 are the same as previously described in the first and third embodiments.

Generally, the amount of ethylene in the dilute ethylene stream in line 280 is in a range of about 30% to about 60% by weight, preferably, 40% to 60 % by weight. The dilute ethylene stream in line 280 then can be routed to an dilute ethylene derivative unit 285 to produce different chemicals in line 290 including, but not limited to, ethylbenzene. The dilute ethylene derivative unit 285 is the same as dilute ethylene derivative unit 35 previously described in the first embodiment. Optionally, an effluent gas stream in line 286 from the dilute ethylene derivative unit 285 can be recycled to a cracking zone 105 in Figure 2.

Step (3) is separating the C₃+ stream in line 295 in a depropanizer zone 300 to produce a C₃ stream in line 305 and a C₄+ stream in line 330. The depropanizer zone 300, the C₃ stream in line 305, and the C₄+ stream in line 330 are the same as previously described in the first embodiment.

Step (4) is reacting the C₃ stream in line 305 in a MAPD reactor zone 310 to remove a portion of methylacetylene and propadiene to produce the dilute propylene stream in line 312. The MAPD reactor zone 310 and the dilute propylene stream in line 312 is the same as previously described in the first embodiment.

The dilute propylene stream in line 312 can be routed to a dilute propylene derivative unit 320 to produce different dilute propylene derivatives line 325. The dilute propylene derivative unit 320 is the same as previously described in the first and third embodiments.

Optionally, the C₄+ stream in line 330 is separated in a debutanizer zone 335 to produce a C₄ stream in line 340 and a C₅+ stream in line 345. The debutanizer zone 335 comprises a fractionator sufficient to produce the C₄ stream in line 340 and a C₅+ stream in line 345. The debutanizer zone 335, the C₄ stream in line 340, and the C₅+ stream in line 345 are the same as previously described in the first and third embodiments.

Optionally, the C₅+ stream in line 345 is treated in a hydrotreating zone 350 to produce a C₅ diolefins stream in line 351, a BTX stream in line 352, a DCPD stream in line 353, and a fuel oil stream in line 354. The hydrotreating zone 350, the C₅ diolefins stream in line 351, the BTX stream in line 352, the DCPD stream in line 353, and the fuel oil stream in line 354 are the same as previously described in the first embodiment.

In a fifth embodiment of this invention, a process for producing a dilute ethylene stream from a cracked gas stream is provided as shown in Figure 5.

Step (1) is separating the cracked gas stream in line 300 in a deethanizer zone 305 to produce a C₂- stream in line 315 and a C₃+ stream in line 310. The deethanizer zone 305 comprises a fractionator sufficient to produce the C₂- stream in line 315 and a C₃+ stream in line 310. The C₂- stream comprises hydrogen, methane, ethane, acetylene and ethylene. The C₃+ stream comprises C₃ hydrocarbons and heavier constituents.

Step (2) is hydrogenating the C₂- stream in line 315 in a hydrogenation zone 320 to remove a portion of the acetylene to produce the dilute ethylene stream in line 325. The hydrogenation zone 320 and the dilute ethylene stream in line 325 are the same as previously described in the first embodiment.

Generally, the amount of ethylene in the dilute ethylene stream in line 325 is in a range of about 30% to about 60% by weight, preferably, 40% to 60 % by weight. The dilute ethylene stream in line 325 then can be routed to an dilute ethylene derivative unit 330 to produce different chemicals in line 335 including, but not limited to, ethylbenzene. The dilute ethylene

derivative unit 330 is the same as dilute ethylene derivative unit 35 previously described in the first embodiment. Optionally, an effluent gas stream in line 331 from the dilute ethylene derivative unit 330 can be recycled to a cracking zone 105 in Figure 2.

Step (3) is routing the C_3+ stream in line 310 to storage or to other process units.

5 In a sixth embodiment of this invention, a process for producing a dilute ethylene stream from a cracked gas stream is provided as shown in Figure 6.

Step (1) is separating the cracked gas stream in line 400 in a deethanizer zone 405 to produce a C_2- stream in line 415 and a C_3+ stream in line 410. The deethanizer zone 405 comprises a fractionator sufficient to produce the C_2- stream in line 415 and a C_3+ stream in line
10 410. The C_2- stream comprises hydrogen, methane, ethane, acetylene and ethylene. The C_3+ stream comprises C_3 hydrocarbons and heavier constituents.

Step (2) is compressing the C_2- stream in line 415 in a second compression zone 420 to produce a pressurized, C_2- stream in line 425. The pressure of the pressurized, C_2- stream in line 425 is in a range of about 150 to about 650 psig, preferably, in a range of 200 to 650 psig. The
15 second compression zone 420 comprises a gas compressor and related equipment. Any gas compressor known in the art can be utilized.

Step (3) is hydrogenating the pressurized C_2- stream in line 425 in a hydrogenation zone 430 to remove a portion of the acetylene to produce the dilute ethylene stream in line 435. The hydrogenation zone 430 is the same as previously described in the first embodiment.

20 Generally, the amount of ethylene in the dilute ethylene stream in line 435 is in a range of about 30% to about 60% by weight, preferably, 40% to 60 % by weight. The dilute ethylene stream in line 435 then can be routed to an dilute ethylene derivative unit 440 to produce different chemicals in line 445 including, but not limited to, ethylbenzene. The dilute ethylene derivative unit 440 is the same as dilute ethylene derivative unit 35 previously described in the
25 first embodiment. Optionally, an effluent gas stream in line 441 from the dilute ethylene derivative unit 440 can be recycled to a cracking zone 105 in Figure 2.

Step (4) is routing the C_3+ stream in line 410 to storage or to other process units.

In a seventh embodiment of this invention, a process for producing a dilute ethylene stream from a cracked gas stream is provided as shown in Figure 7.

Step (1) is hydrogenating the cracked gas stream in line 500 in a hydrogenation zone 505
5 to remove a portion of the acetylene to produce a reduced acetylene cracked gas stream in line 510. The hydrogenation zone 505 is the same as previously described in the first and third embodiment.

Step (2) is separating the reduced acetylene cracked gas stream in line 510 in a
10 deethanizer zone 515 to produce the dilute ethylene stream in line 525 and a C_3+ stream in line 520. The deethanizer zone 515 comprises a fractionator sufficient to produce the dilute ethylene stream in line 525 and a C_3+ stream in line 520. The deethanizer zone 515, dilute ethylene stream in line 525 and C_3+ stream in line 520 are the same as previously described in the first embodiment.

Generally, the amount of ethylene in the dilute ethylene stream in line 525 is in a range of
15 about 30% to about 60% by weight, preferably, 40% to 60 % by weight. The dilute ethylene stream in line 525 then can be routed to an dilute ethylene derivative unit 530 to produce different chemicals in line 535 including, but not limited to, ethylbenzene. Optionally, an effluent gas stream in line 531 can be recycled back to a cracking zone 105 shown in Figure 2 to produce more dilute ethylene. The dilute ethylene derivative unit 530 is the same as dilute
20 ethylene derivative unit 35 previously described in the first embodiment.

Step (3) is routing the C_3+ stream in line 520 to storage or to other process units.

In an eighth embodiment of this invention, a process for producing a dilute ethylene stream and dilute propylene stream is provided as in Figure 8.

Step (1) is separating the cracked gas stream in line 800 in a depropanizer zone 805 to
25 produce a C_3- stream in line 810 and a C_4+ stream in line 845. The depropanizer zone 805 comprises a fractionator sufficient to produce the C_3- stream in line 810 and the C_4+ stream in line 845. The C_3- stream in line 810 comprises hydrogen, methane, ethane, ethylene, acetylene,

propane, propylene, methylacetylene and propadiene. The amount of propylene in the C₃ - stream in line 810 is in a range of about 1 % to about 32% by weight, preferably, in a range of 15% to 30% by weight. The C₄+ stream in line 845 comprises C₄ hydrocarbons and heavier constituents.

5 Step (2) is separating the C₃- stream in line 810 in a deethanizer zone 815 to produce a C₂- stream in line 820 and a C₃ stream in line 890. The deethanizer zone 815 comprises a fractionator sufficient to produce the C₂- stream in line 820 and a C₃ stream in line 890. The C₂- stream comprises hydrogen, methane, ethane, acetylene, and ethylene. The C₃ stream comprises C₃ hydrocarbons.

10 Step (3) is hydrogenating the C₂- stream in line 820 in a hydrogenation zone 825 to remove , a portion of the acetylene to produce the dilute ethylene stream in line 830. The hydrogenating zone 825 is the same as previously described in the first embodiment.

Generally, the amount of ethylene in the dilute ethylene stream in line 830 is in a range of 5 about 30% to about 60% by weight, preferably, 40% to 60 % by weight. The dilute ethylene stream in line 830 then can be routed to an dilute ethylene derivative unit 835 to produce 15 different chemicals in line 840 including, but not limited to, ethylbenzene. The dilute ethylene derivative unit 835 is the same as dilute ethylene derivative unit 35 previously described in the first embodiment. Optionally, an effluent gas stream in line 836 from the dilute ethylene derivative unit 835 can be recycled to a cracking zone 105 as shown in Figure 2 for the 20 production of more dilute ethylene.

Step (4) is reacting the C₃ stream in line 890 in a MAPD reactor zone 895 to remove a portion of methylacetylene and propadiene to produce the dilute propylene stream in line 900. The MAPD reactor zone 895 and the dilute propylene in line 900 are previously described in the first embodiment.

25 The dilute propylene stream in line 900 then can be routed to a dilute propylene derivative unit 905 to produce different dilute propylene derivatives in line 910. The dilute propylene derivative unit 905 is the same as dilute propylene derivative unit 70 previously described in the first embodiment.

Optionally, the C₄+ stream in line 845 is separated in a debutanizer zone 850 to produce a C₄ stream in line 855 and a C₅+ stream in line 860. The debutanizer zone 850 comprises a fractionator sufficient to produce the C₄ stream in line 855 and a C₅+ stream in line 860. The debutanizer zone 850 and the C₄ stream in line 855, and the C₅+ stream in line 860 are the same as previously described in the first embodiment.

Optionally, the C₅+ stream in line 860 is treated in a hydrotreating zone 865 to produce a C₅ diolefins stream in line 870, a BTX stream in line 875, a DCPD stream in line 880, and a fuel oil stream in line 885. The hydrotreating zone 865, the C₅ diolefins stream in line 870, the BTX stream in line 875, the DCPD stream in line 880 and the fuel oil stream in line 885 are the same as previously described in the first embodiment.

In another aspect of this invention, the second embodiment, which provides a preferred process of producing the cracked gas stream, can be combined with either the first, third, fourth, and eight embodiments to yield one continuous process for producing the dilute ethylene stream and dilute propylene stream. Also a second embodiment, can be combined with either the fifth sixth or seventh embodiment to yield one continuous process for producing the dilute ethylene stream.

In another aspect of this invention, the dilute ethylene stream in the eight embodiment previously described is routed to an ethylbenzene process. Processes to produce ethylbenzene are disclosed in U.S patent numbers 5,602,290; 5,880,320; 5,856,607; 6,252,126; all of which are herein incorporated by reference.

An example of utilizing the dilute ethylene stream to produce ethylbenzene is shown in Figure 12.

Step (1) comprises reacting a dilute ethylene stream in line 1300 with a benzene stream in line 1305 in an alkylation reactor zone 1310 to form an ethylbenzene rich stream, line 1315. The ethylbenzene rich stream in line 1315 comprises benzene and ethylbenzene. The reacting can be accomplished by any means known in the art. For example, the selectivity of converting ethylene to ethylbenzene is greater than 99%. The catalysts used are zeolite catalysts such as a ZSM based zeolite system.

Step (2) comprises separating the ethylbenzene rich stream in line 1315 in an ethylbenzene separation zone 1320 to form a separation tailgas stream in line 1325, an ethylbenzene stream in line 1330, a diethylbenzene and polyethylenbenzene stream in line 1335, and a separation benzene recycle stream in line 1340. Separating can be accomplished by any means known in the art. Generally the separating in the ethylbenzene separation zone comprises at least one fractionator.

Step (3) comprises reacting a portion of the separation benzene recycle stream in line 1340 in a transalkylating reactor zone 1345 to produce an ethylbenzene rich stream in line 1315. The reacting can be accomplished by any means known in the art. For example, the selectivity of converting ethylene to ethylbenzene is greater than 99%. The catalysts used are zeolite based catalysts such as the Washington Group TRA-1 or Lummus Y -zeolite based catalyst system.

Step (4) is recycling a portion of the separation benzene recycle stream in line 1340 to be combined with the benzene stream in line 1305.


In another aspect of this invention, the dilute propylene stream produced in the embodiments described is routed to a propylene oxide process. Processes to produce propylene oxide product are disclosed in U.S. Patent 3,849,451, herein incorporated by reference. An example of this process comprises the following steps is shown in Figure 9.

Step (1) comprises reacting a dilute ethylene stream in line 1000 and a benzene stream in line 1005 in an ethylbenzene reactor zone 1010 to form an ethylbenzene stream in line 1015. The ethylbenzene reactor zone 1010 comprises process equipment sufficient to produce the ethylbenzene stream in line 1015. Typically, the ethylbenzene zone 1010 comprises an alkylation reactor, a transalkylation reactor, and a separation zone to produce ethylbenzene and other products.

Step (2) comprises oxidizing the ethylbenzene stream in line 1015 with air in line 1021 in an EB oxidation zone 1020 to form an ethylbenzene hydroperoxide (EBHP) stream in line 1025 comprising $C_6H_5CH(CH_3)OOH$. Oxidation of the ethylbenzene stream in line 1015 can be accomplished by any means known in the art. The temperature and pressure in the EB oxidation zone 1020 is that which is sufficient to substantially oxidize the ethylbenzene in line 1015.

Preferably, the oxidation occurs at a temperature in the range of about 130 °C to about 160 °C and at a pressure in the range of about 40 psia to about 60 psia.

Step (3) comprises reacting the EBHP stream in line 1025 and a dilute propylene stream in line 1023 in a propylene epoxidation zone to form an impure propylene oxide stream in line 1035 comprising C₃H₆O and methylbenzyl alcohol (MBA), C₆H₅CH(CH₃)OH. The reaction that occurs in the propylene epoxidation zone is:




The temperature and pressure in the propylene epoxidation zone 1030 is that which is sufficient to react the EBHP stream with the dilute propylene stream to form an impure propylene oxide stream. Preferably, the reaction occurs at a temperature in a range of about 60 °C to about 120 °C and at a pressure in a range of about 140 psia to about 700 psia. The reaction in the propylene epoxidation zone can be accomplished by any means known in the art. Generally, the reaction of the EBHP stream in line 1025 and the dilute propylene stream in line 1023 is accomplished using a molybdenum catalyst solution.

Step (4) comprises separating the impure propylene oxide stream in line 1035 in a product separator zone 1040 to form a tail gas stream in line 1045, a residue stream in line 1050, a raw propylene oxide stream in line 1080, a MBA/acetophone(ACP) stream in line 1055, and an ethylbenzene recycle stream in line 1046. The product separator zone 1040 comprises equipment sufficient to produce the tail gas stream in line 1045, a residue stream in line 1050, a raw propylene oxide stream in line 1080, and a MBA/ACP stream in line 1055. The ethylbenzene recycle stream in line 1046 is recycled back to be combined with the ethylbenzene stream in line 1015. Generally, the product separation zone comprises at least one fractionator. The MBA/ACP stream in line 1055 comprises C₆H₅CH(CH₃)OH and C₆H₅COCH₃. The tail gas comprises propylene and propane. The residue stream in line 1050 typically comprises benzoic acid, naphthenic acid, and heavier organic compounds.

Step (5) comprises separating the raw propylene oxide stream in a propylene oxide separations zone 1085 to form a propylene oxide stream in line 1095 and an impurities stream in line 1090. The separation of the raw propylene oxide in line 1080 to form an impurities stream in 1090 and a propylene oxide stream in 1095 can be accomplished by any means known in the art.


Step (6) comprises reacting the MBA/ACP stream in line 1055 in a styrene production and separation zone 1060 to form a styrene stream in line 1065, a fuel stream in line 1070, and a wastewater stream in line 1075. The reactions that occur in the styrene production and separation zone 1060 comprise the following:



The styrene production and separation zone 1060 comprises equipment sufficient to produce the styrene stream in line 1065, the fuel stream in line 1070, and the wastewater stream in line 1075.

In another aspect of this invention the acrylic acid is produced. Processes to produce acrylic acid are disclosed in U.S. Patents 6,281,384 and 6,069,271; all of which are herein incorporated by reference. An example of this process comprises the following steps as shown in Figure 10.

Step (1) comprises oxidizing a dilute propylene in line 1105 with air in line 1110 in an oxidation reactor zone 1120 to produce a vent gas stream in line 1115 and an aqueous acrylic acid stream in line 1125. The oxidizing of the dilute propylene comprises the following reactive steps.



The oxidation reactor zone comprises equipment sufficient to produce the vent gas stream in line 1115 and the aqueous acrylic acid stream in 1125. For example, the oxidation reactor zone comprises at least one multi-tubular reactor. For example, reaction step (1) can be accomplished

through the use of a multi-tubular reactor using catalysts comprising molybdenum and at least one element selected from the group bismuth, tellurium, and tungsten at a temperature of about 300 °C to about 460 °C. The reactive step (2) can be accomplished by a multi-tubular reactor using catalysts comprising molybdenum and vanadium oxide at a temperature of about 240°C to
5 about 450°C.

Step (2) is separating the aqueous acrylic acid stream in line 1125 in a recovery and purification zone 1130 to produce an acrylic acid stream in line 1135 and a mixed acid/ester waste stream in line 1140. The mixed acid/ester waste stream in line 1140 comprises water, formic acid, acetic acid, propionic acid, acrylic acid and ethyl acetate. The recovery and
10 purification zone comprises process equipment sufficient to produce the acrylic acid stream in line 1135 and a mixed acid/ester stream in line 1140. Typically, the recovery and purification zone comprises at least one fractionator.

In another aspect of this invention, the dilute propylene stream is utilized as a feedstock to produce cumene. Processes to produce cumene are disclosed in U.S Patent numbers
15 5,081,323 and 5,149,894; all of which are herein incorporated by reference. An example of this process involves the following process steps as shown in Figure 11.

Step (1) comprises reacting a dilute propylene stream in line 1200 with a benzene feed stream in line 1205 in a dilute propylene alkylation zone 1210 to produce a raw cumene stream in line 1215. This step can be accomplished by any means know in the art.

20 Step (2) is separating the raw cumene steam in line 1215 in a cumene separations zone 1220 to produce a heavies stream in line 1240, the cumene stream in line 1250, a dipropylbenzene stream in line 1270, and a benzene stream in line 1280. Separating can be accomplished by any means know in the art. A portion of the benzene stream in line 1280 can be recycled and combined with the benzene feed stream in line 1205.

25 Step (3) is reacting the benzene stream in line 1280 and the dipropylbenzene stream in line 1270 in a transalkylation reactor zone 1290 to form a transalkylated cumene-rich stream in line 1260.

Step (4) is separating the transalkylated cumene rich stream in line 1260 in the cumene separations zone 1220 to produce the cumene stream in line 1250, the heavies stream in line 1240, the propane stream in line 1230, the benzene stream in line 1280, and the dipropylbenzene stream in line 1270. A portion of the benzene stream in line 1280 can be recycled and
5 combined in the benzene feed stream in line 1205.

Optionally, the propane stream in line 1230 can be recycled back to the cracking zone
105 shown in Figure 2.

THAT WHICH IS CLAIMED IS:

1. A process for producing a dilute ethylene stream and a dilute propylene stream from a cracked gas stream, said process comprising the following steps in the order named:
 - 5 (1) separating said cracked gas stream in a deethanizer zone to produce a C₂-stream and a C₃+ stream;
 - (2) hydrogenating said C₂- stream in a hydrogenation zone to remove a portion of the acetylene to produce said dilute ethylene stream;
 - (3) separating said C₃+ stream in a depropanizer zone to produce a C₃ stream and a C₄+ stream; and
 - 10 (4) reacting said C₃ stream in a MAPD reactor zone to convert a portion of methylacetylene and propadiene to propylene and propane to produce said dilute propylene stream.
2. A process according to claim 1 further comprising separating said C₄+ stream in a debutanizer zone to produce a C₄ stream and a C₅+ stream.
- 15 3. A process according to claim 1 further comprising passing said dilute ethylene stream to a dilute ethylene derivative unit;
4. A process according to claim 3 wherein said dilute ethylene derivative unit produces ethylbenzene.
5. A process according to claim 1 further comprising passing said dilute propylene stream to
20 a dilute propylene derivative unit.
6. A process according to claim 5 wherein said dilute propylene derivative unit produces cumene, acrylic acid or propylene oxide.

7. A process according to claim 2 further comprising treating said C₅+ stream in a hydrotreating zone to produce a C₅ diolefins stream, a BTX stream, a DCPD stream and a fuel oil stream.
8. A process according to claim 1 wherein said cracked gas stream is produced by a process
5 comprising:
- (1) heating a hydrocarbon feed in a cracking zone to form a raw cracked gas stream; wherein said raw cracked gas stream comprises hydrogen, methane, C₂ hydrocarbons, C₃ hydrocarbons and heavier constituents;
 - (2) quenching said raw cracked gas stream in a quenching zone to produce a
10 quenched, cracked gas stream;
 - (3) compressing said quenched, cracked gas stream in a first compression zone to form a pressurized, cracked gas stream;
 - (4) deacidifying said pressurized, cracked gas stream in a deacidifying zone to remove a portion of the hydrogen sulfide to form a wet cracked gas stream; and
 - 15 (5) drying said wet cracked gas stream in a drying zone to form a cracked gas stream.
9. A process according to claim 8 wherein said hydrocarbon feed is selected from the group consisting of ethane, propane, butanes, pentanes, naphtha, and mixtures thereof.
10. A process according to claim 8 wherein said hydrocarbon feed consists essentially of C₅ hydrocarbons.
- 20 11. A process for producing a dilute ethylene stream and a dilute propylene stream from a cracked gas stream, said process comprising the following steps in the order named:
- (1) separating said cracked gas stream in a deethanizer zone to produce a C₂- stream and a C₃+ stream;

- (2) compressing said C₂- stream in a second compression zone to form a pressurized C₂ stream;
- (3) hydrogenating said pressurized C₂- stream in a hydrogenation zone to remove a portion of the acetylene to produce said dilute ethylene stream;
- 5 (4) separating said C₃+ stream in a depropanizer zone to produce a C₃ stream and a C₄+ stream; and
- (5) reacting said C₃ stream in a MAPD reactor zone to convert a portion of methylacetylene and propadiene to propylene and propane to produce said dilute propylene stream.
- 10 12 A process according to claim 11 further comprising separating said C₄+ stream in a debutanizer zone to produce a C₄ stream and a C₅+ stream.
13. A process according to claim 11 further comprising passing said dilute ethylene stream to a dilute ethylene derivative unit.
14. A process according to claim 13 wherein said dilute ethylene derivative unit produces
15 ethylbenzene.
15. A process according to claim 11 further comprising passing said dilute propylene stream to a dilute propylene derivative unit.
16. A process according to claim 15 wherein said dilute propylene derivative unit produces cumene, acrylic acid, or propylene oxide.
- 20 17. A process according to claim 12 further comprising treating C₅+ stream in a hydrotreating zone to produce a C₅ diolefins stream, a BTX stream, a DCPD stream, and a fuel oil stream.

18. A process according to claim 11 wherein said cracked gas stream is produced by a process comprising:

- (1) heating a hydrocarbon feed in a cracking zone to form a raw cracked gas stream; wherein said raw cracked gas stream comprises hydrogen, methane, C₂ hydrocarbons, C₃ hydrocarbons, and heavier constituents;
- (2) quenching said raw cracked gas stream in a quenching zone to produce a quenched, cracked gas stream;
- (3) compressing said quenched, cracked gas stream in a first compression zone to form a pressurized cracked gas stream;
- (4) deacidifying said pressurized, cracked gas stream in a deacidifying zone to remove a portion of the hydrogen sulfide to form a wet cracked gas stream; and
- (5) drying said cracked gas stream in a drying zone to produce a cracked gas stream.

19. A process according to claim 18 wherein said hydrocarbon feed is selected from the group consisting of ethane, propane, butanes, pentanes, naphtha, and mixtures thereof.

20. A process according to claim 18 wherein said hydrocarbon feed consists essentially of C₅ hydrocarbons.

21. A process for producing a dilute ethylene stream and a dilute propylene stream from a cracked gas stream, said process comprising the following steps in the order named:

- (1) hydrogenating a portion of the acetylene in said cracked gas stream in a hydrogenation zone to produce a reduced acetylene cracked gas stream;
- (2) separating said reduced acetylene cracked gas stream in a deethanizer zone to produce said dilute ethylene stream and a C₃+ stream;

(3) separating said C₃+ stream in said depropanizer zone to produce a C₃ stream and a C₄+ stream; and

(4) reacting said C₃ stream in a MAPD reactor zone to convert a portion of methylacetylene and propadiene to propylene and propane to produce the dilute propylene stream.

22. A process according to claim 21 further comprising separating said C₄+ stream in a debutanizer zone to produce a C₄ stream and a C₅+ stream.
23. A process according to claim 21 further comprising passing said dilute ethylene stream to a dilute ethylene derivative unit.
- 10 24. A process according to claim 21 wherein said dilute ethylene derivative unit produces ethylbenzene.
25. A process according to claim 21 further comprising passing said dilute propylene stream to a dilute propylene derivative unit.
- 15 26. A process according to claim 25 wherein said dilute propylene derivative unit produces cumene, acrylic acid, or propylene oxide.
27. A process according to claim 22 further comprising treating C₅+ stream in a hydrotreating zone to produce a C₅ diolefins stream, a BTX stream, a DCPD stream, and a fuel oil stream.
28. A process according to claim 21 wherein said cracked gas stream is produced by a process comprising:
- 20

(1) heating a hydrocarbon feed in a cracking zone to form a raw cracked gas stream; wherein said raw cracked gas stream comprises hydrogen, methane, C₂ hydrocarbons, C₃ hydrocarbons, and heavier constituents;

5 (2) quenching said raw cracked gas stream in a quenching zone to produce a quenched, cracked gas stream;

(3) compressing said quenched, cracked gas stream in a first compression zone to form a pressurized, cracked gas stream;

(4) deacidifying said pressurized, cracked gas stream in a deacidifying zone to remove a portion of the hydrogen sulfide to form a wet cracked gas stream; and

10 (5) drying said cracked stream in a drying zone to produce a cracked gas stream.

29. A process according to claim 28 wherein said hydrocarbon feed is selected from the group consisting of ethane, propane, butanes, pentanes, naphtha and mixtures thereof.

30. A process according to claim 28 wherein said hydrocarbon feed consists essentially of C₅ hydrocarbons.

15 31. A process for producing a dilute ethylene stream and a dilute propylene stream, said process comprising the following steps in the order named:

(1) heating a hydrocarbon feed in a cracking zone to form a raw cracked gas stream; wherein said cracked gas stream comprises hydrogen, methane, C₂ hydrocarbons, C₃ hydrocarbons and heavier constituents;

20 (2) quenching said raw cracked gas stream in a quenching zone to produce a quenched, cracked gas stream;

(3) compressing said quenched, cracked gas stream in a first compression zone to form a pressurized cracked gas stream;

- (4) deacidifying said pressurized, cracked gas stream in a deacidifying zone to remove a portion of the hydrogen sulfide to form a wet cracked gas stream;
- (5) drying said wet cracked gas stream in a drying zone to produce a cracked gas stream;
- 5 (6) separating said cracked gas stream in a deethanizer zone to produce a C₂- stream and a C₃+ stream;
- (7) compressing said C₂- stream in a second compression zone to form a pressurized C₂- stream;
- 10 (8) hydrogenating said pressurized C₂- stream in a hydrogenation zone to remove a portion of the acetylene to produce said dilute ethylene stream; and
- (9) separating said C₃+ stream in a depropanizer zone to produce a C₃ stream and a C₄+ stream; and .
- (10) reacting said C₃ stream in a MAPD reactor zone to convert a portion of methylacetylene and propadiene to propylene and propane to produce said dilute propylene stream.
- 15
32. A process according to claim 31 further comprising separating said C₄+ stream in a debutanizer zone to produce a C₄ stream and a C₅+ stream.
33. A process according to claim 32 further comprising treating C₅+ stream in a hydrotreating zone to produce a C₅ diolefins stream, a BTX stream, a DCPD stream, and a fuel
- 20 oil stream.
34. A process according to Claim 31 further comprising passing said dilute ethylene stream to a dilute ethylene derivative unit.

35. A process according to claim 34 wherein said dilute ethylene derivative unit produces ethylbenzene.
36. A process according to claim 31 further comprising passing said dilute propylene stream to a dilute propylene derivative unit.
- 5 37. A process according to claim 36 wherein said dilute propylene derivative unit produces cumene, acrylic acid or propylene oxide.
38. A process according to claim 31 wherein said hydrocarbon feed is selected from the group consisting of ethane, propane, butanes, pentanes, naphtha and mixtures thereof.
39. A process according to claim 31 wherein said hydrocarbon feed consists essentially of C₅
10 hydrocarbons.
40. A process for producing a dilute ethylene stream and a dilute propylene stream, said process comprising the following steps in the order named:
- (1) heating a hydrocarbon feed in a cracking zone to form a cracked gas stream; wherein said cracked gas stream comprises hydrogen, methane, C₂ hydrocarbons, C₃
15 hydrocarbons, and heavier constituents;
 - (2) quenching said raw cracked gas stream in a quenching zone to produce a quenched, cracked gas stream;
 - (3) compressing said quenched, cracked gas stream in a first compression zone to form a pressurized cracked gas stream;
 - 20 (4) deacidifying said pressurized, cracked gas stream in a deacidifying zone to remove a portion of the hydrogen sulfide to form a wet cracked gas stream;
 - (5) drying said wet cracked gas stream in a drying zone to produce a cracked gas stream;

- (6) separating said cracked gas stream in a deethanizer zone to produce a C₂- stream and a C₃+ stream;
- (7) hydrogenating said pressurized, C₂- stream in said hydrogenation zone to remove a portion of the acetylene to produce said dilute ethylene stream; and
- 5 (8) separating said C₃+ stream in a depropanizer zone to produce a C₃+ stream and a C₄+ stream; and
- (9) reacting said C₃ stream in a MAPD zone to convert a portion of methylacetylene and propadiene to propylene and propane to produce said dilute propylene stream.
41. A process according to-claim 40 further comprising separating said C₄+ stream in a
10 debutanizer zone to produce a C₄ stream and a C₅+ stream.
42. A process according to claim 40 further comprising treating C₅+ stream in a hydrotreating zone to produce a C₅ diolefins stream, a BTX stream, a DCPD stream, and a fuel oil stream.
43. A process according to Claim 40 further comprising passing said dilute ethylene stream
15 to a dilute ethylene derivative unit.
44. A process according to Claim 43 wherein said dilute ethylene derivative unit produces ethylbenzene.
45. A process according to Claim 40 further comprising passing said dilute propylene stream to a dilute propylene derivative unit.
- 20 46. A process according to Claim 45 wherein said dilute propylene derivative unit produces cumene, acrylic acid, or propylene oxide.

47. A process according to claim 40 wherein said hydrocarbon feed is selected from the group consisting of ethane, propane, ethane-propane mix, butanes, pentanes and naphtha and mixtures thereof.

48. A process according to claim 40 wherein said hydrocarbon feed consists essentially of C₅ hydrocarbons.

49. A process for producing a dilute ethylene stream and a dilute propylene stream from a cracked gas stream, said process comprising the following steps in the order named:

(1) heating a hydrocarbon feed in a cracking zone to form a raw cracked gas stream; wherein said raw cracked gas stream comprises hydrogen, methane, C₂ hydrocarbons, C₃ hydrocarbons, and heavier constituents;

(2) quenching said raw cracked gas stream in a quenching zone to produce a quenched, cracked gas stream;

(3) compressing said quenched, cracked gas stream in a first compression zone to form a pressurized cracked gas stream;

(4) deacidifying said pressurized, cracked gas stream in a deacidifying zone to remove a portion of the hydrogen sulfide to form a wet cracked gas stream; and

(5) drying said cracked gas stream in a drying zone to produce a cracked gas stream.

(6) hydrogenating a portion of the acetylene in said cracked gas stream in a hydrogenation zone to produce a reduced acetylene cracked gas stream;

(7) separating said reduced acetylene cracked gas stream in a deethanizer zone to produce said dilute ethylene stream and a C₃+ stream;

(8) separating said C₃+ stream in said depropanizer zone to produce a C₃ stream and a C₄+ stream; and

(9) reacting said C₃ stream in a MAPD reactor zone to convert a portion of methylacetylene and propadiene to propylene and propane to produce said dilute propylene stream.

50. A process according to claim 49 further comprising separating said C₄+ stream in a
5 debutanizer zone to produce a C₄ stream and a C₅+ stream.

51. A process according to claim 49 further comprising passing said dilute ethylene stream to a dilute ethylene derivative unit.

52. A process according to claim 51 wherein said dilute ethylene derivative unit produces ethylbenzene.

10 53. A process according to claim 49 further comprising passing said dilute propylene stream to a dilute propylene derivative unit.

54. A process according to claim 53 wherein said dilute propylene derivative unit produces cumene, propylene oxide, or acrylic acid.

15 55. A process according to claim 50 further comprising treating C₅+ stream in a hydrotreating zone to produce a C₅ diolefins stream, a BTX stream, a DCPD stream, and a fuel oil stream.

56. A process according to claim 49 wherein said hydrocarbon feed is selected from the group consisting of ethane, propane, butanes, pentanes, naphtha and mixtures thereof.

20 57. A process according to claim 49 wherein said hydrocarbon feed consists essentially of C₅ hydrocarbons.

58. A process for producing a dilute ethylene stream from a cracked gas stream, said process comprising the following steps in the order named:

(1) separating said cracked gas stream in a deethanizer zone to produce a C₂-stream and a C₃+ stream;

5 (2) hydrogenating said C₂- stream in a hydrogenation zone to remove a portion of the acetylene to produce said dilute ethylene stream; and

(3) routing said C₃+ stream to storage or other process unit.

59. A process according to claim 58 further comprising passing said dilute ethylene stream to a dilute ethylene derivative unit.

10 60 A process according to claim 59 wherein said dilute ethylene derivative unit produces ethylbenzene.

61. A process for producing a dilute ethylene stream from a cracked gas stream, said process comprising the following steps in the order named:

15 (1) separating said cracked gas stream in a deethanizer zone to produce a C₂- stream and a C₃+ stream;

(2) compressing said C₂- stream in a second compression zone to form a pressurized C₂- stream;

(3) hydrogenating said pressurized C₂- stream in a hydrogenation zone to remove a portion of the acetylene to produce said dilute ethylene stream; and

20 (4) routing said C₃+ stream to storage or other process unit.

62. A process according to claim 61 further comprising passing said dilute ethylene stream to a dilute ethylene derivative unit.

63. A process according to claim 62 wherein said dilute ethylene derivative unit produces ethylbenzene.

64. A process for producing a dilute ethylene stream from a cracked gas stream, said process comprising the following steps in the order named:

5 (1) hydrogenating a portion of the acetylene in said cracked gas stream in a hydrogenation zone to produce a reduced acetylene cracked gas stream;

(2) separating said reduced acetylene cracked gas stream in a deethanizer zone to produce said dilute ethylene stream and a C₃+ stream;

(3) routing said C₃+ stream to storage or other process unit.

10 65. A process according to claim 64 further comprising passing said dilute ethylene stream to a dilute ethylene derivative unit.

66. A process according to claim 65 wherein said dilute ethylene derivative unit produces ethylbenzene.

15 67. A process for producing a dilute ethylene stream said process comprising the following steps in the order named:

(1) heating a hydrocarbon feed in a cracking zone to form a raw cracked gas stream; wherein said cracked gas stream comprises hydrogen, methane, C₂ hydrocarbons, C₃ hydrocarbons and heavier constituents;

20 (2) quenching said raw cracked gas stream in a quenching zone to produce a quenched, cracked gas stream;

(3) compressing said quenched, cracked gas stream in a first compression zone to form a pressurized cracked gas stream;

- (4) deacidifying said pressurized, cracked gas stream in a deacidifying zone to remove a portion of the hydrogen sulfide to form a wet cracked gas stream;
- (5) drying said wet cracked gas stream in a drying zone to produce a cracked gas stream.
- 5 (6) separating said cracked gas stream in a deethanizer zone to produce a C₂- stream and a C₃+ stream;
- (7) compressing said C₂- stream in a second compression zone to form a pressurized C₂- stream;
- 10 (8) hydrogenating said pressurized C₂- stream in a hydrogenation zone to remove a portion of the acetylene to produce said dilute ethylene stream; and
- (9) routing said C₃+ stream to storage or other process unit.
68. A process according to claim 67 further comprising passing said dilute ethylene stream to a dilute ethylene derivative unit.
69. A process according to claim 68 wherein said dilute ethylene derivative unit produces ethylbenzene.
- 15
70. A process for producing a dilute ethylene stream, said process comprising the following steps in the order named:
- (1) heating a hydrocarbon feed in a cracking zone to form a cracked gas stream; wherein said cracked gas stream comprises hydrogen, methane, C₂ hydrocarbons, C₃ hydrocarbons, and heavier constituents;
- 20 (2) quenching said raw cracked gas stream in a quenching zone to produce a quenched, cracked gas stream;

(3) compressing said quenched, cracked gas stream in a first compression zone to form a pressurized cracked gas stream;

(4) deacidifying said pressurized, cracked gas stream in a deacidifying zone to remove a portion of the hydrogen sulfide to form a wet cracked gas stream;

5 (5) drying said wet cracked gas stream in a drying zone to produce a cracked gas stream;

(6) separating said cracked gas stream in a deethanizer zone to produce a C₂- stream and a C₃+ stream;

10 (7) hydrogenating said pressurized, C₂- stream in said hydrogenation zone to remove a portion of the acetylene to produce said dilute ethylene stream; and

(8) routing said C₃+ stream to storage or other process unit.

71. A process according to claim 70 further comprising passing said dilute ethylene stream to a dilute ethylene derivative unit.

15 72. A process according to claim 70 wherein said dilute ethylene derivative unit produces ethylbenzene.

73. A process for producing a dilute ethylene stream, said process comprising the following steps in the order named:

20 (1) heating a hydrocarbon feed in a cracking zone to form a raw cracked gas stream; wherein said raw cracked gas stream comprises hydrogen, methane, C₂ hydrocarbons, C₃ hydrocarbons, and heavier constituents;

(2) quenching said raw cracked gas stream in a quenching zone to produce a quenched, cracked gas stream;

- (3) compressing said quenched, cracked gas stream in a first compression zone to form a pressurized cracked gas stream;
- (4) deacidifying said pressurized, cracked gas stream in a deacidifying zone to remove a portion of the hydrogen sulfide to form a wet cracked gas stream; and
- 5 (5) drying said cracked gas stream in a drying zone to produce a cracked gas stream;
- (6) hydrogenating a portion of the acetylene in said cracked gas stream in a hydrogenation zone to produce a reduced acetylene cracked gas stream;
- (7) separating said reduced acetylene cracked gas stream in a deethanizer zone to produce said dilute ethylene stream and a C₃+ stream; and
- 10 (8) routing said C₃+ stream to storage or other process unit.

74. A process according to claim 73 further comprising passing said dilute ethylene stream to a dilute ethylene derivative unit.

75. A process according to claim 73 wherein said dilute ethylene derivative unit produces ethylbenzene.

15 76. A process for producing a dilute ethylene stream and a dilute propylene stream, said process comprising the following steps in the order named:

- (1) separating a cracked gas stream in a depropanizer zone to form a C₃- stream and a C₄+ stream;
- (2) separating said C₃- stream in a deethanizer zone to form a C₂- stream and a C₃
20 stream;
- (3) hydrogenating a portion of the acetylene in said C₂- stream in a hydrogenation zone to produce a dilute ethylene stream; and

(4) reacting said C₃ stream in a MAPD zone to convert a portion of methylacetylene and propadiene to propylene and propane to produce said dilute propylene stream.

77. A process according to claim 76 further comprising separating said C₄⁺ stream in a debutanizer zone to produce a C₄ stream and a C₅⁺ stream.

5 78. A process according to claim 76 further comprising passing said dilute ethylene stream to a dilute ethylene derivative unit.

79. A process according to claim 78 wherein said dilute ethylene derivative unit produces ethylbenzene.

10 80. A process according to claim 76 further comprising passing said dilute propylene stream to a dilute propylene derivative unit.

81. A process according to claim 80 wherein said dilute propylene derivative unit produces cumene, acrylic acid or propylene oxide.

15 82. A process according to claim 77 further comprising treating said C₅⁺ stream in a hydrotreating zone to produce a C₅ diolefins stream, a BTX stream, a DCPD stream and a fuel oil stream.

83. A process according to claims 1, 11, 21, 31, 40, 49, 58, 61, 64, 67, 70, 73, or 76 wherein a propylene oxide stream is produced by a process comprising the following steps:

(1) reacting said dilute ethylene with benzene in an ethylbenzene reactor zone to form and ethylbenzene stream;

20 (2) oxidizing said ethylbenzene stream with air in an EB oxidation zone to form a EBHP stream;

(3) reacting said EBHP stream with a dilute propylene stream in a propylene epoxidation zone to form an impure propylene oxide stream;

(4) separating said impure propylene oxide stream in a product separator zone to form a raw propylene oxide stream, a MBN/ACP stream, a tail gas stream, and a residue stream;
5 and

(5) separating said raw propylene oxide stream in a propylene oxide separations zone to form an impurities stream and said propylene oxide stream; and

(6) reacting said MBN/ACP stream in a styrene production and separation zone to form a styrene stream, a fuel stream, and a wastewater stream.

10 84. A process according to claims 1, 11, 21, 31, 40, 49, or 76 wherein an acrylic acid stream is produced by a process comprising the following steps:

(1) oxidizing said dilute propylene stream in a oxidation reactor zone to form a aqueous acrylic acid stream and a vent gas stream; and

(2) seperating said aqueous acrylic acid stream in a recovery and purification zone to
15 form said acrylic acid stream and a mixed acid/ester waste stream.

85. A process according to claims 1, 11, 21, 31, 40, 49, or 76 wherein a cumene stream is produced by a process comprising the following steps:

(1) reacting a dilute propylene stream and a benzene feed stream in a dilute propylene alkylation zone to produce a raw cumene stream;

20 (2) separating said raw cumene stream in a cumene separations zone to form a benzene stream, a heavies stream, said cumene stream, a dipropyl benzene stream, and a propane stream.

(3) transalkylating said benzene stream and dipropyl benzene stream in a transalkylation zone to form a transalkylated cumene rich stream;

(4) separating said transalkylated cumene-rich stream in said cumene separations zone to produce said cumene stream, said propane stream, said heavies stream and said benzene stream; and

5 (5) optionally, recycling a portion of said benzene stream to said dilute propylene alkylation zone

86. A process according to claims 1, 11, 21, 31, 40, 49, 58, 61, 64, 67, 70, 73, or 76 wherein a ethylbenzene stream is produced by a process comprising the following steps;

(1) reacting a dilute ethylene stream and a benzene stream in an alkylation reactor zone to form an ethylbenzene rich stream

10 (2) separating said ethylbenzene rich stream in a ethylbenzene separation zone to form a separations benzene recycle stream, a separation's tail gas stream, a diethylbenzene and polyethylbenzene stream, and a ethylbenzene stream;

(3) reacting said separations benzene recycle stream in an ethylbenzene transalkylation reactor zone to produce said ethylbenzene rich stream; and

15 (4) optionally, recycling a portion of said separations benzene recycle stream to said dilute propylene alkylation reactor zone.

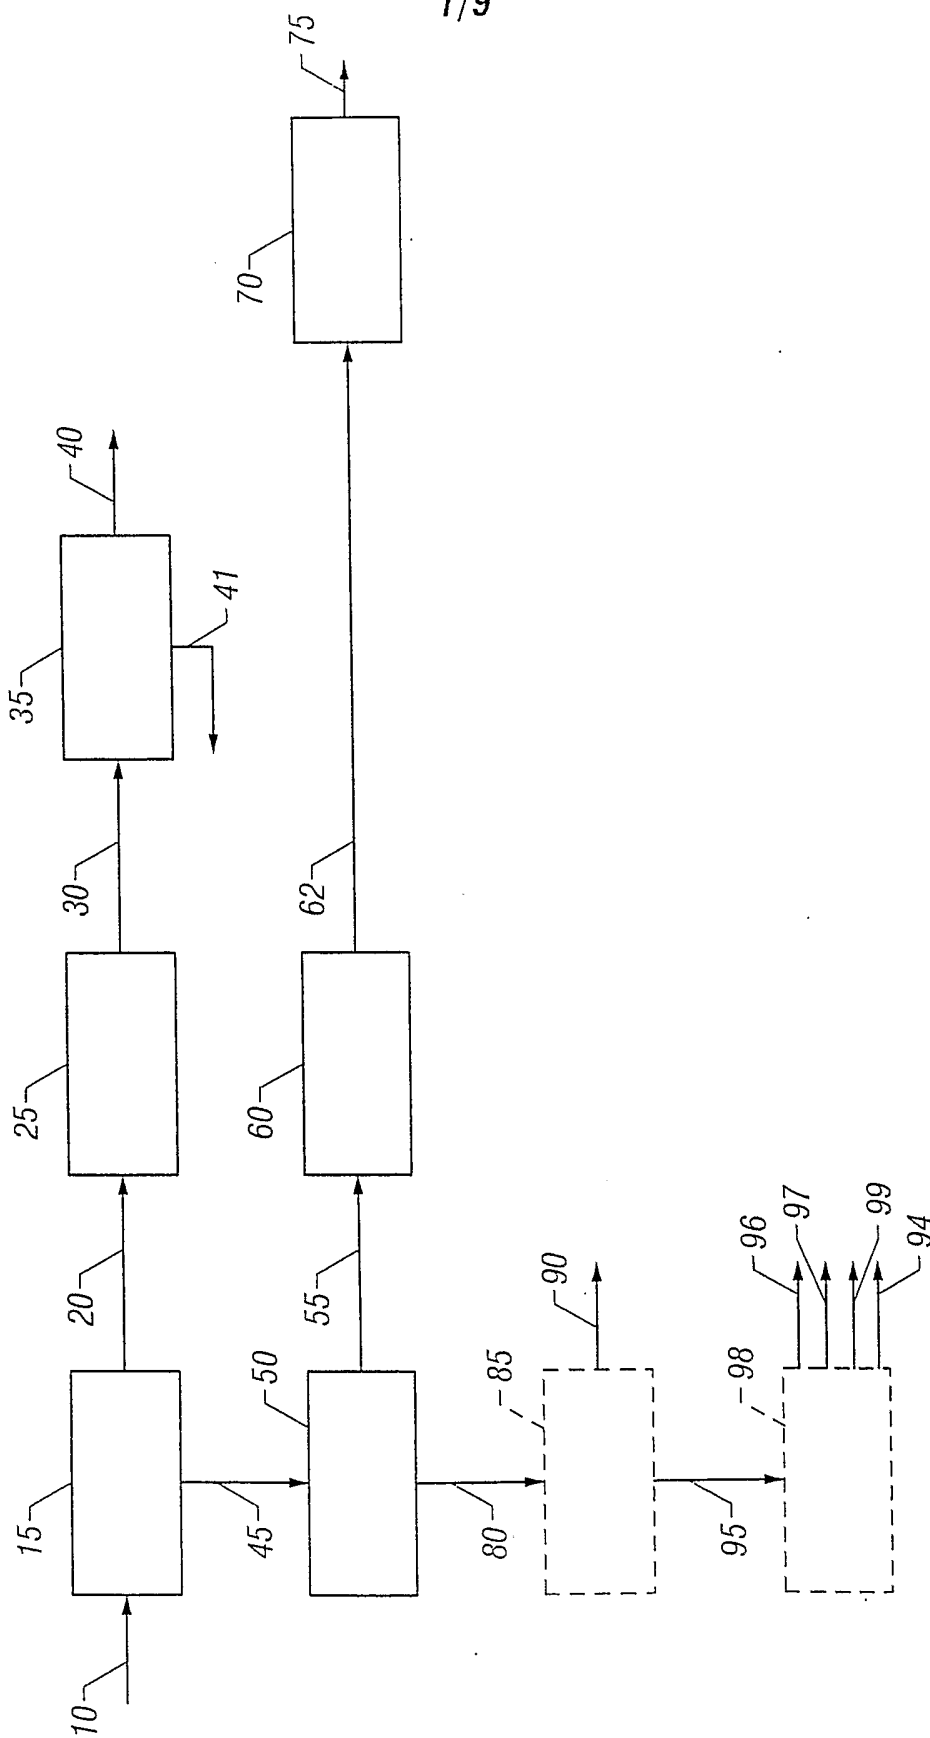


FIG. 1

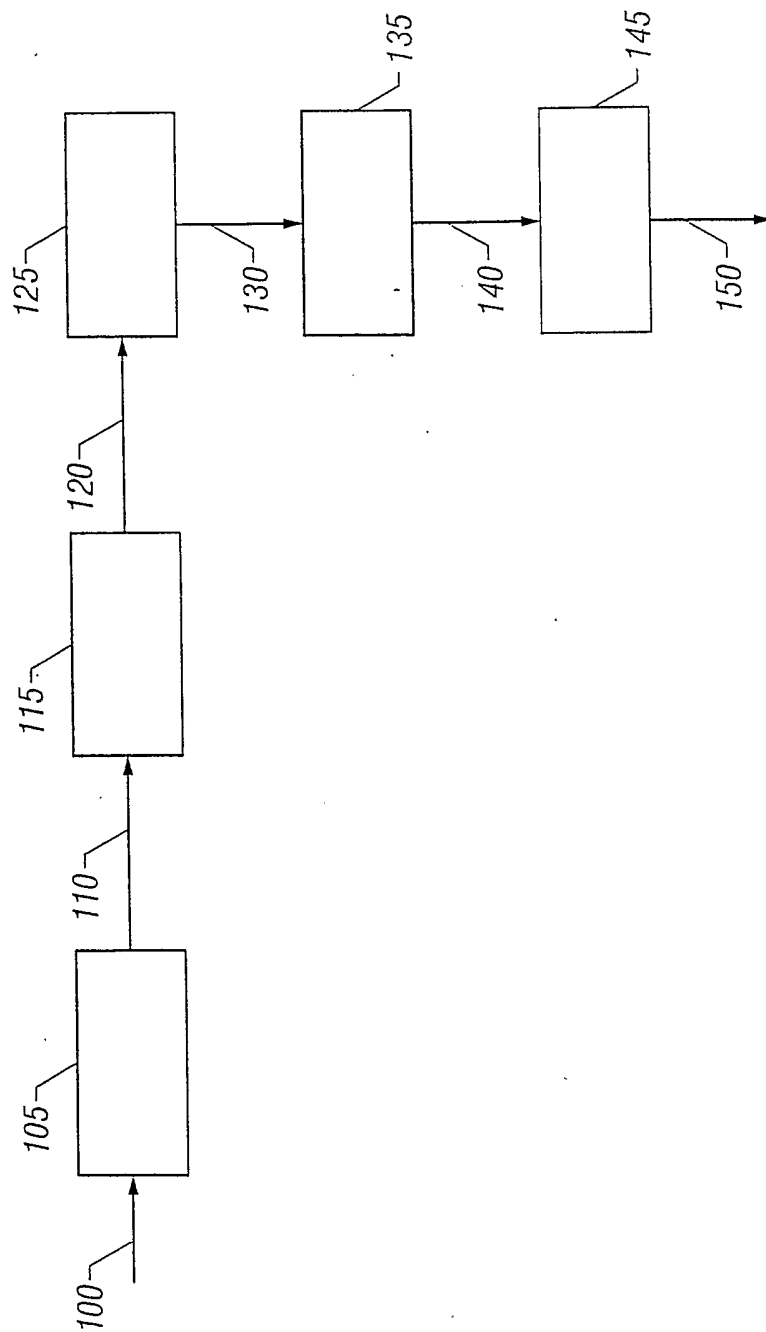


FIG. 2

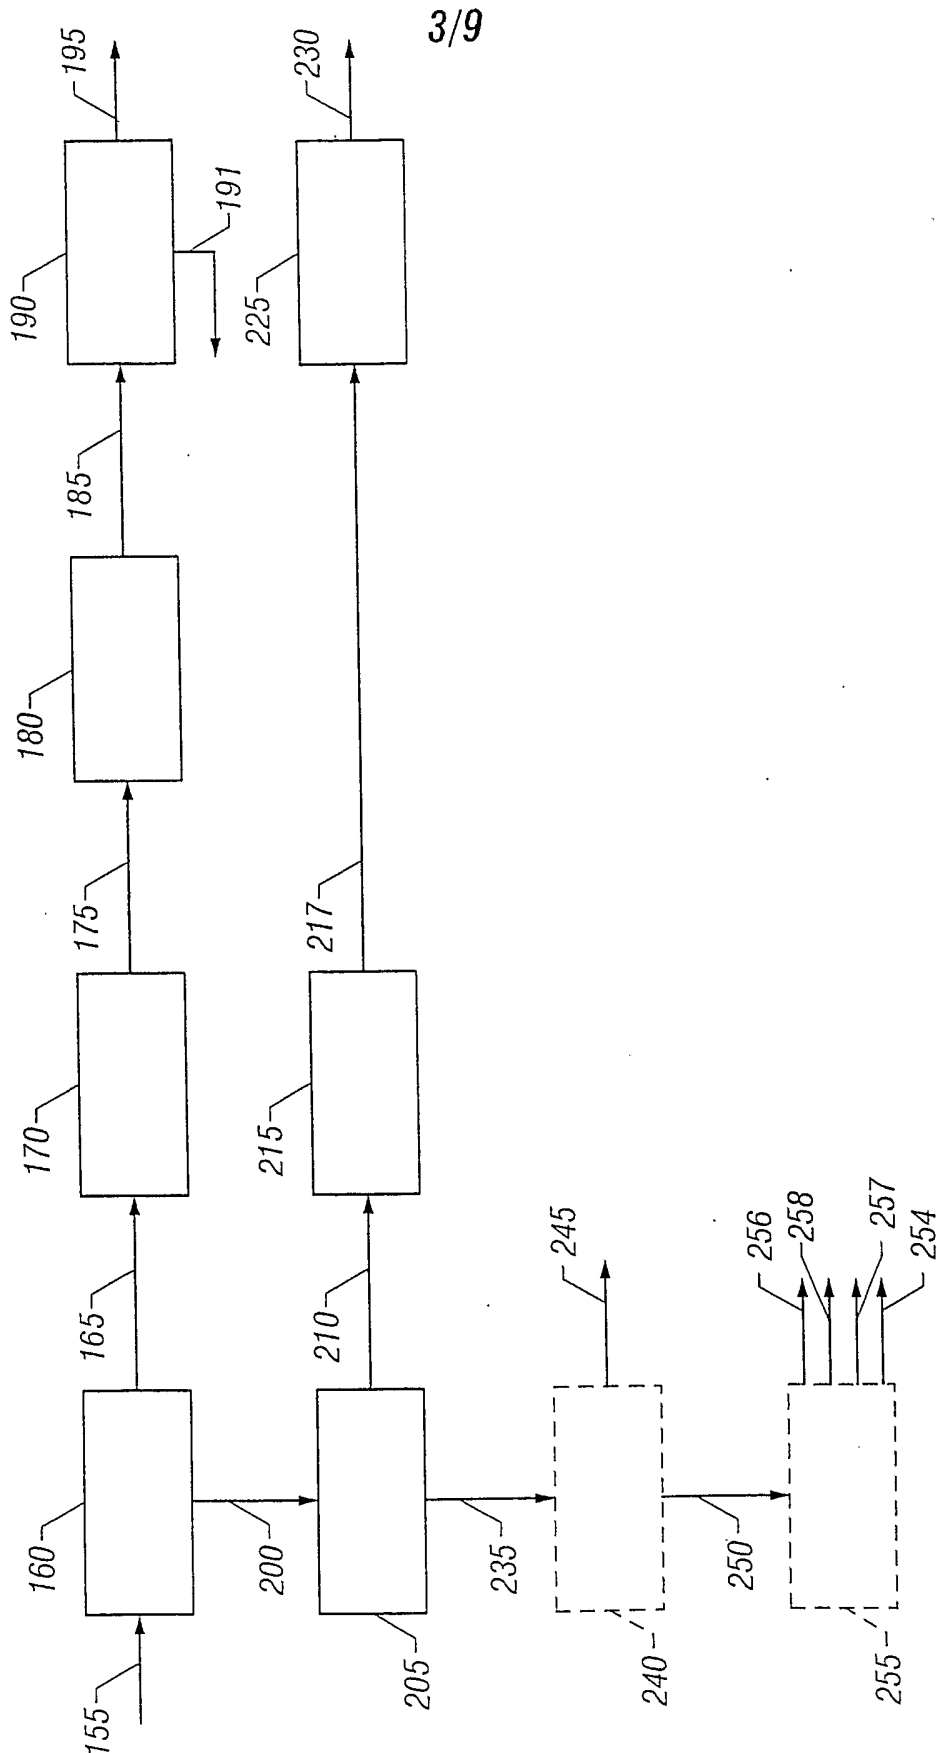


FIG. 3

4/9

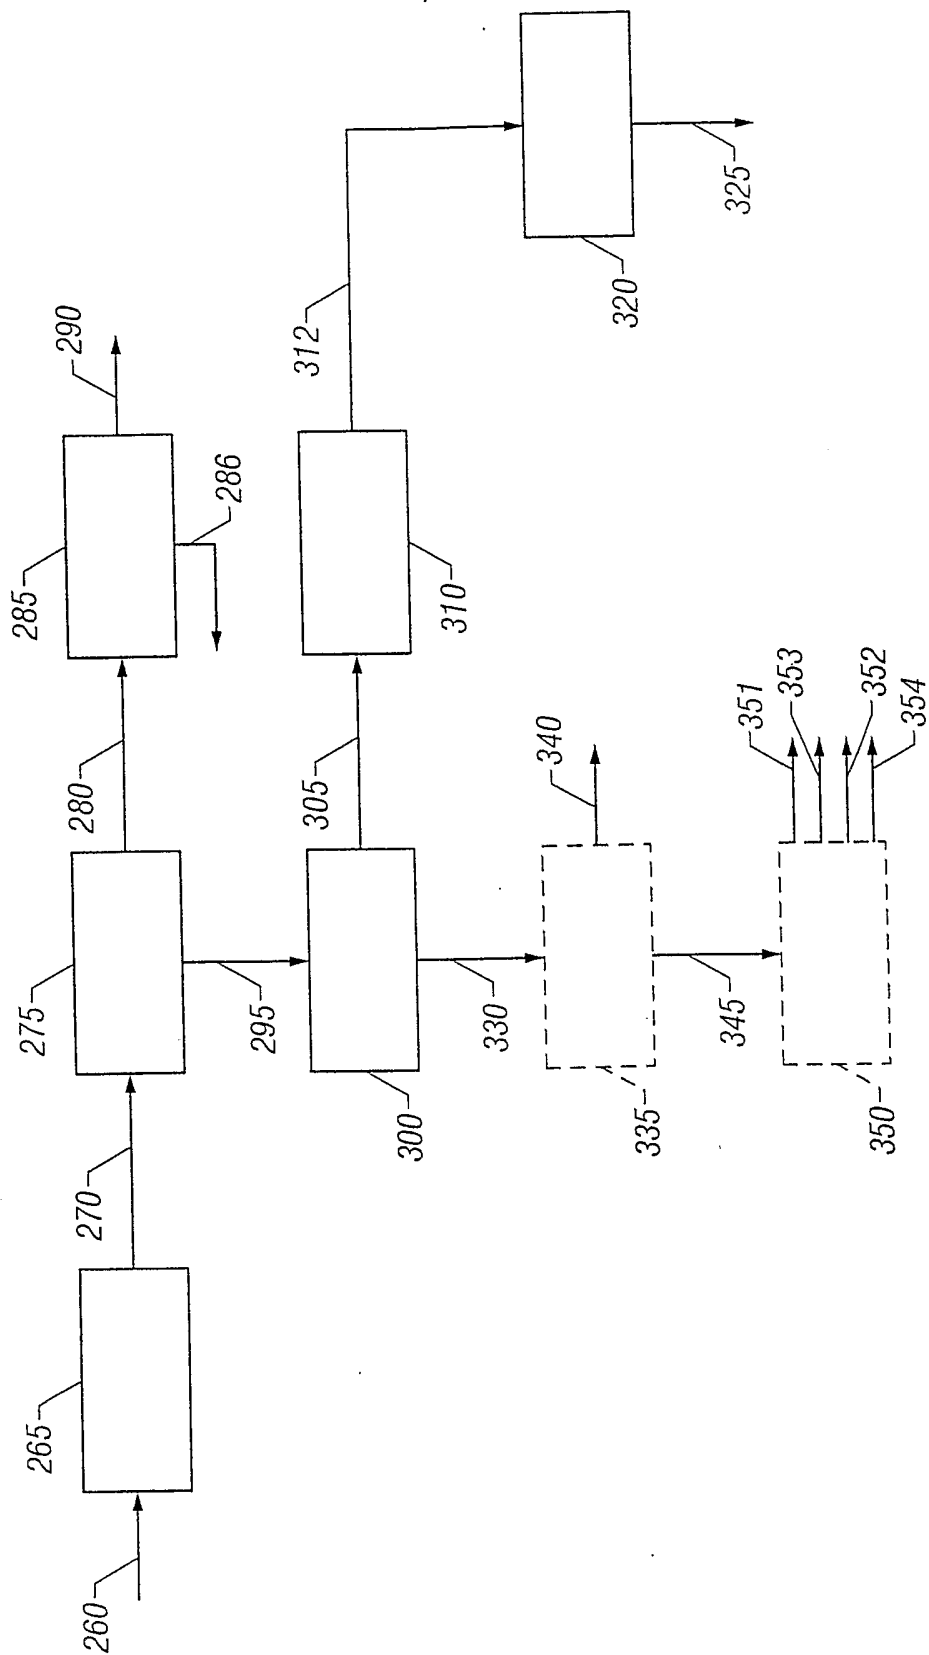


FIG. 4

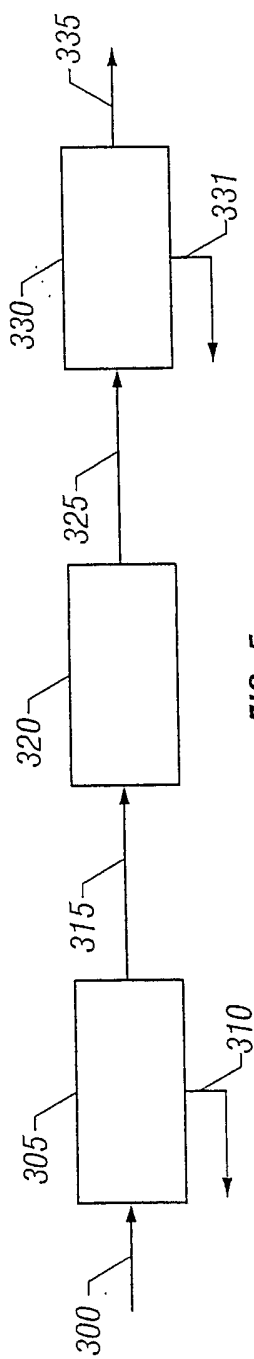


FIG. 5

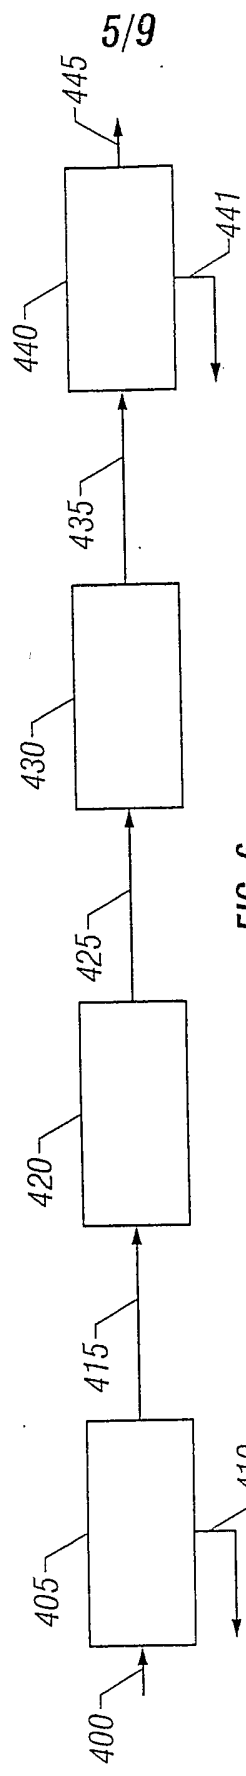


FIG. 6

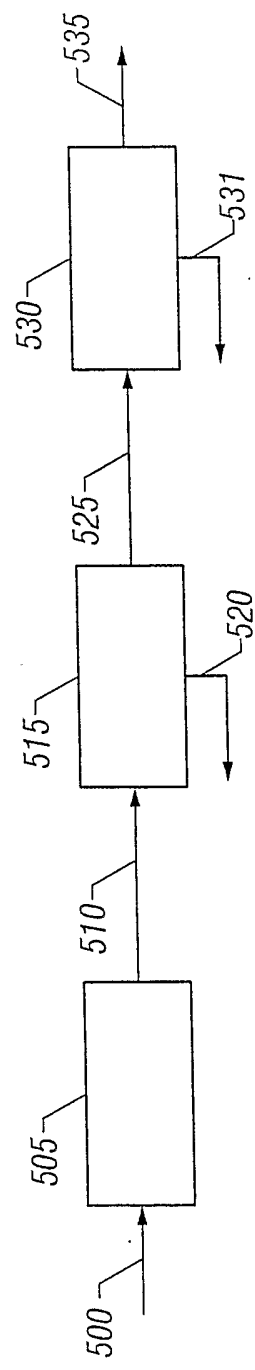


FIG. 7

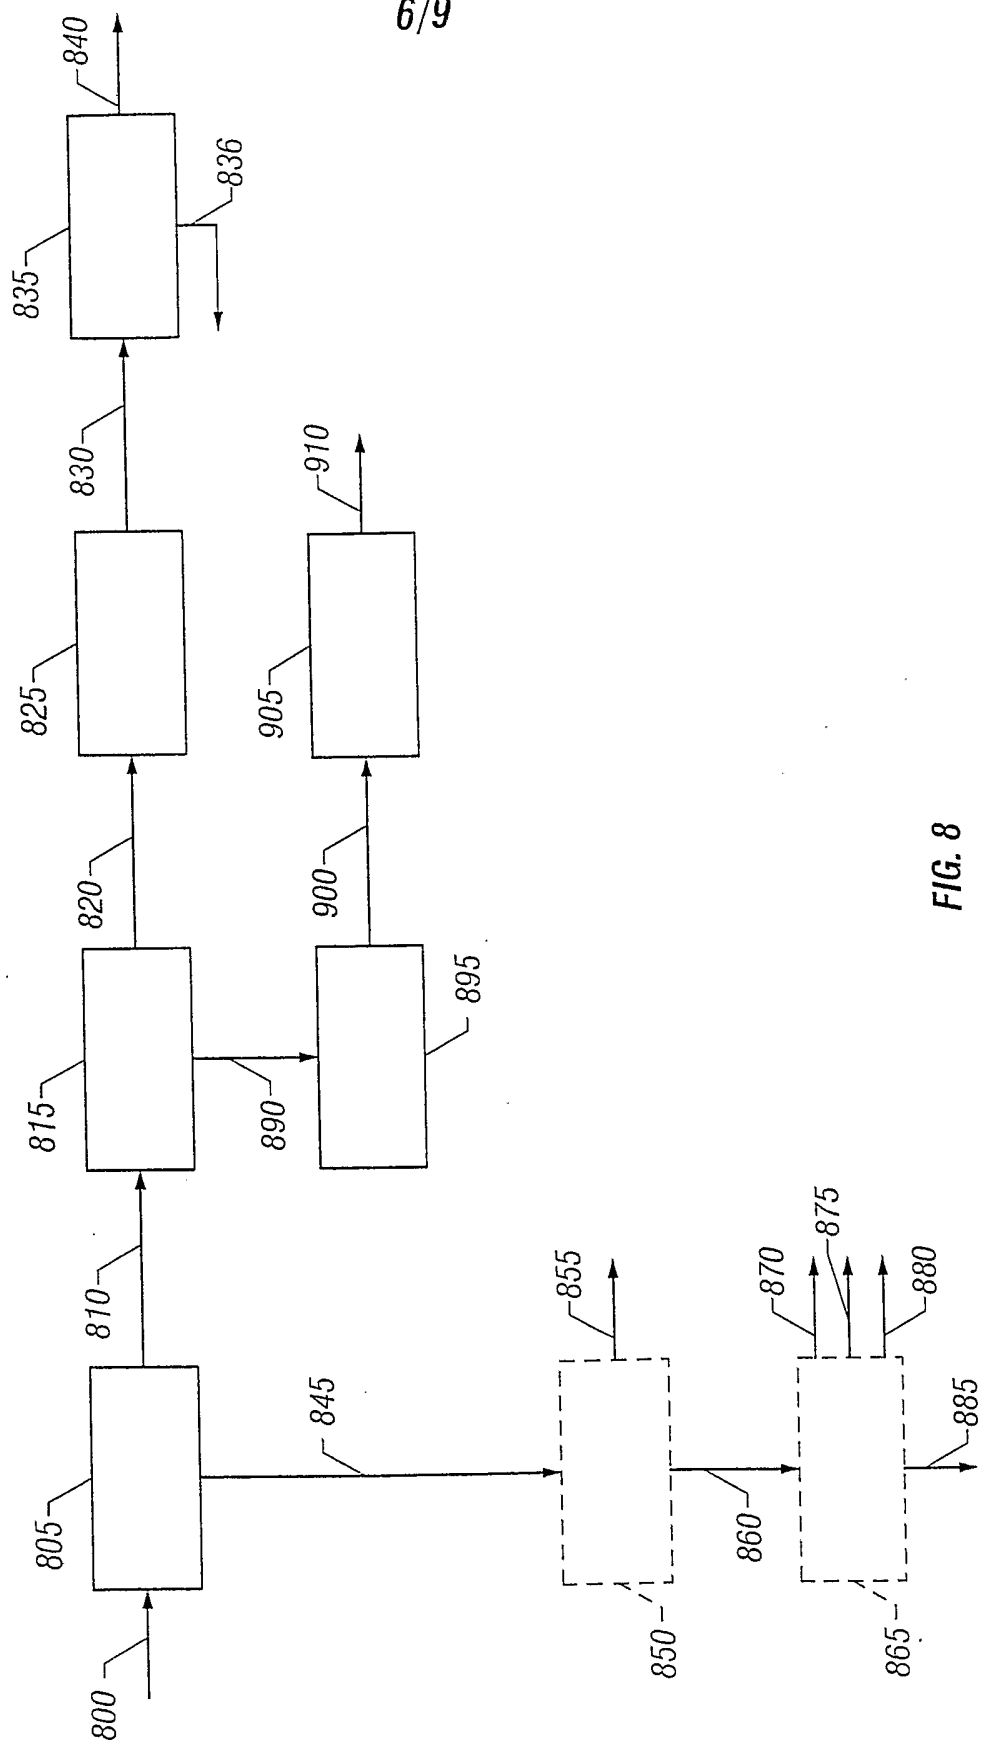


FIG. 8

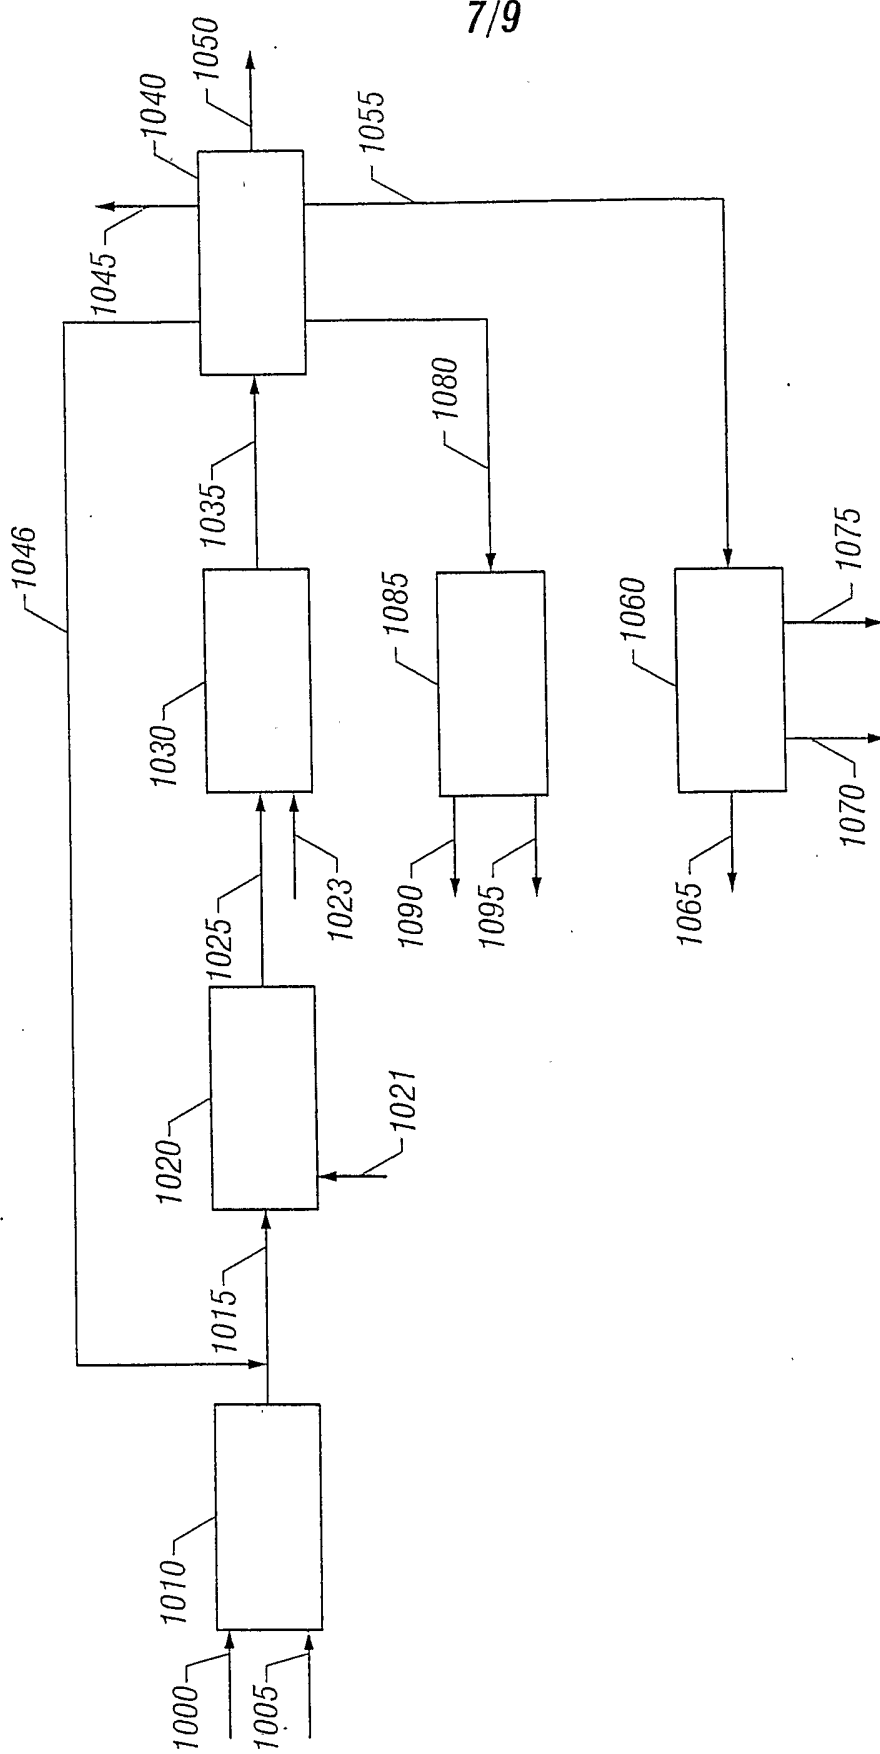


FIG. 9

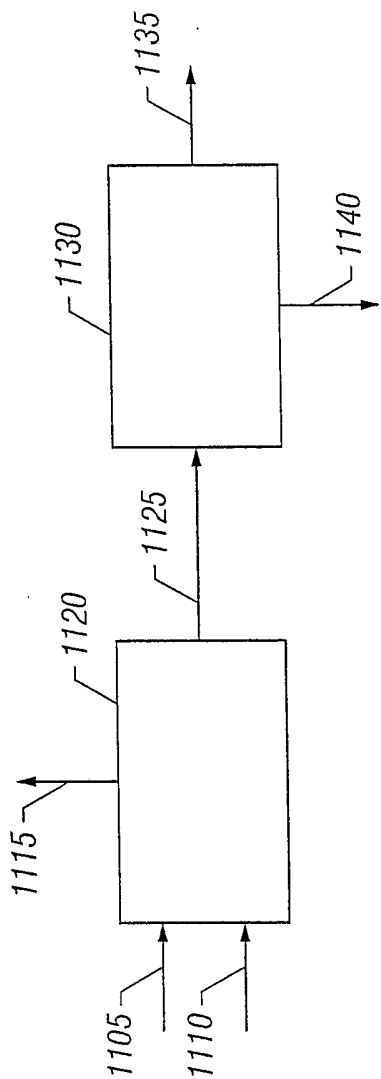


FIG. 10

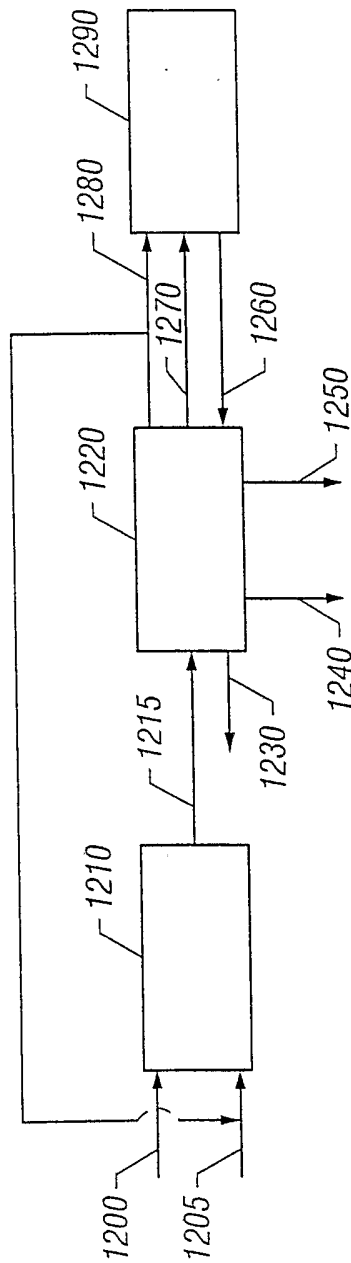


FIG. 11

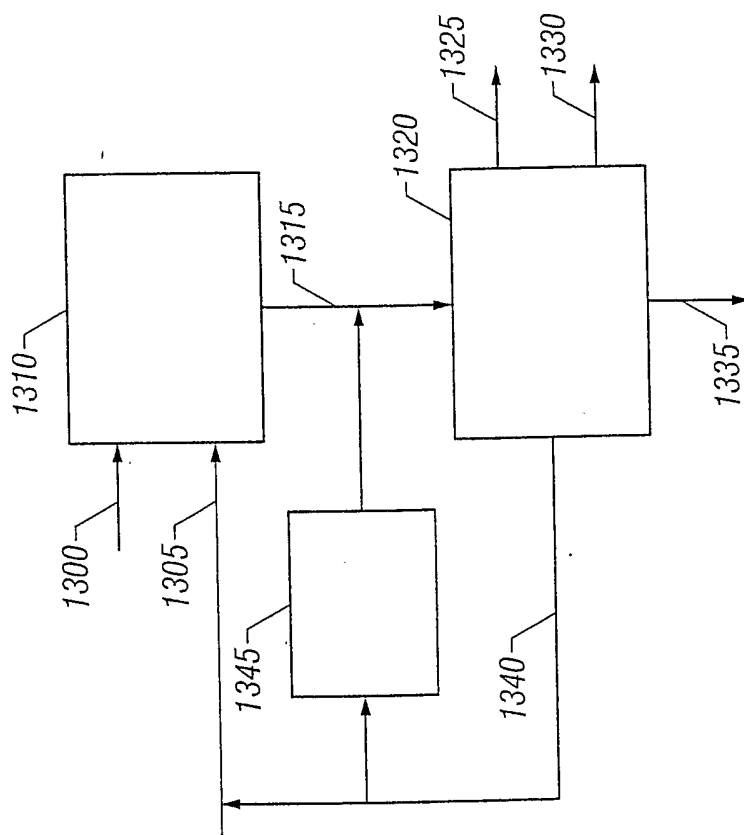


FIG. 12