

(19)



(11)

EP 3 933 097 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

12.04.2023 Bulletin 2023/15

(51) International Patent Classification (IPC):

D06F 58/24 ^(2006.01) *D06F 103/42* ^(2020.01)
D06F 103/58 ^(2020.01) *D06F 105/22* ^(2020.01)
D06F 105/62 ^(2020.01) *D06F 58/20* ^(2006.01)

(21) Application number: **21176426.1**

(52) Cooperative Patent Classification (CPC):

D06F 58/24; D06F 34/14; D06F 58/203;
D06F 58/38; D06F 58/44; D06F 2103/42;
D06F 2103/58; D06F 2105/22; D06F 2105/62

(22) Date of filing: **28.05.2021**

(54) **A LAUNDRY DRYER**

WÄSCHETROCKNER

SÉCHOIR À LINGE

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

- **BEDIR, Ersin**
34445 Istanbul (TR)
- **ERGUN, Muhammed**
34445 Istanbul (TR)
- **GEZE, Emre**
34445 Istanbul (TR)
- **GOK, Salih**
34445 Istanbul (TR)

(30) Priority: **29.06.2020 TR 202010194**

(43) Date of publication of application:

05.01.2022 Bulletin 2022/01

(73) Proprietor: **Arçelik Anonim Sirketi**

34445 Istanbul (TR)

(56) References cited:

EP-A2- 2 520 706 DE-A1- 4 212 965
DE-A1-102011 089 112

(72) Inventors:

- **SIR, Gokhan**
34445 Istanbul (TR)

EP 3 933 097 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a laundry dryer having the feature of spraying water into the drum.

[0002] The laundry dryers may have wrinkle-reduction functions as an additional feature. One of the methods to reduce the wrinkles in the laundry in the drum is to spray water into the drum at certain intervals. The certain amount of water required to be sprayed into the drum during the program must be stored at a region of the laundry dryer. The stored water is delivered into the drum by means of a pump, delivery lines and nozzles. In the state of the art laundry dryers, the water generally condensed from the air circulation duct by means of the heat exchanger is collected in a collection receptacle. By means of the pump, the water collected in the collection receptacle is delivered into the water tank which can be emptied of the water by being manually removed from the body of the laundry dryer by the user. In some of the laundry dryers wherein water is sprayed into the drum, the water in the water tank is delivered to the nozzle. In some of the laundry dryers, there is a reservoir separate from the water tank and the collection receptacle. The water is delivered into the reservoir from the water tank or the collection receptacle. The water in the reservoir is transferred to the nozzle to be sprayed into the drum. The cost of these systems is very high since more than one pump is used.

[0003] In the International Patent Application No. WO2020015914, a laundry dryer is disclosed, wherein the condensate is sprayed into the drum. EP 2 520 706 A2 discloses a laundry dryer with the features of the preamble of claim 1.

[0004] The aim of the present invention is the realization of a laundry dryer wherein the condensate is controlled in an effective and cost-efficient manner and water is sprayed into the drum.

[0005] The laundry dryer of the present invention comprises a body; a drum which is disposed in the body; an air circulation duct which provides the delivery of air into the drum; a heat exchanger which is provided on the air circulation duct and which dehumidifies the drying air delivered onto the laundry; a collection receptacle wherein the water condensed in the air circulation duct is collected; a water tank which can be manually removed from the body and emptied of water by the user; a delivery line which extends between the water tank and the collection receptacle; a nozzle which enables the water to be sprayed into the drum; a spraying line which extends between the collection receptacle and the nozzle such that the water is delivered to the nozzle; a valve which connects the spraying line and the collection receptacle or the delivery line and the collection receptacle to each other; and a pump which is disposed in the collection receptacle.

[0006] The laundry dryer of the present invention further comprises a liquid level sensor which measures the level of the liquid in the collection receptacle, and a con-

trol unit which controls the valve and the pump so as to send the water in the collection receptacle to the water tank when the data received from the liquid level sensor is equal to a threshold value predetermined by the producer or exceeds said first threshold value. Depending on the humidity of the laundry loaded into the drum, the amount of water condensed during the drying process varies. When the amount of water in the collection receptacle reaches a first threshold value predetermined by the producer, the control unit activates the pump and controls the valve such that the collection receptacle is in fluid communication with the water tank. The amount of water above the first threshold value is delivered to the water tank. The pump is operated until the liquid level falls below the first threshold value. Thus, the water in the collection receptacle is prevented from overflowing from the receptacle in a manner to reach the components in the laundry dryer, and the safety of the laundry dryer is improved.

[0007] In an embodiment of the present invention, the laundry dryer comprises a humidity sensor. When the value received from the humidity sensor falls below a predetermined value, the control unit decides that the laundry in the drum is dry, and the drying process is terminated. After the drying process is terminated, the control unit activates the pump, and simultaneously, the valve is controlled such that the collection receptacle is in fluid communication only with the delivery line. The pump is operated until the amount of water in the collection receptacle reaches a third threshold value. Thus, the water in the collection receptacle is prevented from being kept therein in a manner to get dirty. Consequently, the problems of hygiene which may occur as a result of spraying the old water into the drum during the next drying process are prevented.

[0008] In an embodiment of the present invention, the laundry dryer comprises the control unit which controls the valve so as to allow liquid passage between the collection receptacle and the spraying line when the amount of water only in the collection receptacle is equal to the third threshold value or exceeds the third threshold value. The third threshold value can be a constant value.

[0009] In an embodiment of the present invention, the laundry dryer comprises the control unit which activates the pump when the amount of water only in the collection receptacle is equal to the third threshold value or exceeds the third threshold value. Thus, the insufficient amount of water is prevented from being sprayed into the drum when the amount of water collected in the collection receptacle is below the third threshold value.

[0010] By means of the present invention, a laundry dryer is realized, wherein the water condensed in the air circulation duct is enabled to be delivered into the drum or stored in a suitable place in a cost-efficient manner.

[0011] The advantages of the laundry dryer of the present invention will be disclosed with the detailed description of the embodiments with reference to the accompanying figure, where:

Figure 1 - is the schematic view of the laundry dryer in an embodiment of the present invention.

Figure 2 - is the schematic view of the laundry dryer in an embodiment of the present invention.

[0012] The following numerals are referred to in the description of the present invention:

1. Laundry dryer
2. Body
3. Drum
4. Air circulation duct
5. Heat exchanger
6. Collection receptacle
7. Delivery line
8. Water tank
9. Spraying line
10. Nozzle
11. Valve
12. Pump
13. Liquid level sensor
14. Control unit
15. Humidity sensor

[0013] The laundry dryer (1) comprises a body (2); a drum (3) which is disposed in the body (2) and wherein the laundry is loaded; an air circulation duct (4) which provides the delivery of the drying air into the drum (3); a heat exchanger (5) which is provided on the air circulation duct (4) and which condenses the humidity in the air; a collection receptacle (6) wherein the water condensed by the heat exchanger (5) is collected; a water tank (8) which is connected to the collection receptacle (6) in fluid communication by means of a delivery line (7); a spraying line (9) which extends between the collection receptacle (6) and the drum (3); at least one nozzle (10) which is provided at the end of the spraying line (9) and which enables the water to be sprayed into the drum (3); a valve (11) which connects the collection receptacle (6) and the delivery line (7) as well as the collection receptacle (6) and the spraying line (9) to each other; and a pump (12) which provides the delivery of the water in the collection receptacle (6) to the water tank (8) and/or the nozzle (10). The heated drying air is sent onto the humid laundry loaded into the drum (3). The drying air dehumidifies the laundry, thus performing the drying process. When passed over the heat exchanger (5) with a cold surface, the humid drying air condenses and loses some of its humidity. The water condensed in the air circulation duct (4) is collected in a collection receptacle (6). The laundry dryer (1) comprises a water tank (8) which is disposed in the body (2) and which can be emptied of water therein by the user. The water tank (8) is connected to the collection receptacle (6) by means of a delivery line (7). A spraying line (9) extends between the collection receptacle (6) and the drum (3). By means of the nozzle (10) provided at the end of the spraying line (9), the water collected in the collection receptacle (6) is sprayed into

the drum (3) at the times determined according to the selected drying program. In the preferred version of the present invention, the valve (11) is a three-way valve (11). When the pump (12) is activated as the valve (11) closes the connection between the collection receptacle (6) and the spraying line (9) while opening the connection between the collection receptacle (6) and the delivery line (7), the water in the collection receptacle (6) is delivered to the water tank (8). When the pump (12) is activated as the valve (11) closes the connection between the collection receptacle (6) and the delivery line (7) while opening the connection between the collection receptacle (6) and the spraying line (9), the water in the collection receptacle (6) is delivered to the nozzle (10).

[0014] The laundry dryer (1) of the present invention comprises a liquid level sensor (13) which measures the level of the water in the collection receptacle (6), and a control unit (14) which controls the valve (11) and the pump (12) so as to deliver the water in the collection receptacle (6) to the water tank (8) or the nozzle (10) and which controls the valve (11) and the pump (12) so as to deliver the water from the collection receptacle (6) to the water tank (8) when the liquid level in the collection receptacle (6) exceeds a first threshold value predetermined by the producer. The pump (12) and the valve (11) are controlled by the control unit (14). Thus, the water collected in the collection receptacle (6) can be delivered to the water tank (8) and the nozzle (10) by means of a single pump (12) and a single valve (11). In the collection receptacle (6), a liquid level sensor (13) is provided, which measures the liquid level therein. When the liquid level in the collection receptacle (6) exceeds a first threshold value predetermined by the producer, the control unit (14) controls the valve (11) so as to connect the collection receptacle (6) to the delivery line (7) and operates the pump (12). The valve (11) and the pump (12) are controlled such that the water in the collection receptacle (6) is delivered to the water tank (8) until the liquid level in the collection receptacle (6) falls below the first threshold value. The water collected in the collection receptacle (6) is kept in the collection receptacle (6) during the drying process until the liquid level reaches the first threshold value. Thus, it is ensured that the water to be delivered to the nozzle (10) when the water is required to be sprayed into the drum (3) depending on the type of the selected program is kept ready in the collection receptacle (6). The amount of water to be sprayed into the drum (3) varies depending on the fabric type and amount of the laundry loaded into the drum (3). Depending on the fabric type entered via the control panel by the user and the weight of the laundry, the control unit (14) determines the amount of water to be delivered into the drum (3) during the drying process. In a preferred embodiment of the present invention, the first threshold value is equal to or above the highest amount of water possible determined by the control unit (14) depending on the fabric type and the weight. In a version of the present invention, the first threshold value is selected to correspond to a

volume of approximately 300 milliliters.

[0015] In another embodiment of the present invention, the laundry dryer (1) comprises a humidity sensor (15) which is provided in the body (2), and the control unit (14) which terminates the drying process when the humidity value received from the humidity sensor (15) falls below a predetermined value, which, after the termination of the drying process, processes the data received from the liquid level sensor (13) and operates the pump (12) until the amount of water in the collection receptacle (6) falls below a predetermined second threshold value and which closes the valve (11) between the collection receptacle (6) and the spraying line (9) and controls the valve (11) such that the collection receptacle (6) is in fluid communication with the delivery line (7). The humidity sensor (15) is positioned so as to face the inner volume of the drum (3) and to contact the laundry. By using the data received from the humidity sensor (15), the humidity of the laundry is determined. When the humidity of the laundry falls below a certain level, the control unit (14) terminates the drying process. After the termination of the drying process, the control unit (14) controls the valve (11) so as to close the connection between the collection receptacle (6) and the spraying line (9) while allowing liquid passage between the collection receptacle (6) and the delivery line (7), and operates the pump (12). The pump (12) is operated until the water level in the collection receptacle (6) falls below a second threshold value predetermined by the producer. In a preferred version of the present invention, the second threshold value is selected as 0 or as a value close to 0. Thus, it is ensured that no water remains in the collection receptacle (6) after the end of the drying process. Consequently, the generation of bad odors in the laundry dryer (1) is prevented by keeping no water in the collection receptacle (6).

[0016] In another embodiment of the present invention, the laundry dryer (1) comprises the control unit (14) which controls the valve (11) so as to interrupt the fluid communication between the collection receptacle (6) and the spraying line (9) until the liquid level in the collection receptacle (6) reaches a third threshold value predetermined by the producer. The third threshold value corresponds to the amount of water to be sprayed into the drum (3) depending on the selected program. The third threshold value is calculated by the control unit (14) depending on the type of the program selected by the user via the control panel and/or the weight of the laundry. For example, when the user wants to dry a single cotton shirt, the amount of water to be sprayed into the drum (3) is 40 ml. In this case, the third threshold value is 40 ml. The valve (11) is controlled so as to interrupt the fluid communication between the collection receptacle (6) and the spraying line (9) until the amount of water in the collection receptacle (6) reaches 40 ml. Thus, sufficient amount of water for the selected program is ensured to be sprayed into the drum (3).

[0017] In an embodiment of the present invention, the control unit (14) prevents the operation of the pump (12)

until the liquid level in the collection receptacle (6) reaches a third threshold level predetermined by the producer. When sufficient amount of water to be sprayed into the drum (3) depending on the selected program is not present in the collection receptacle (6), the control unit (14) does not activate the pump (12). Thus, it is ensured to spray sufficient amount of water into the drum (3).

[0018] By means of the present invention, a laundry dryer (1) is realized, wherein the condensate collected in the collection receptacle (6) is delivered to the nozzle (10) so as to be sprayed into the drum (3) or to the water tank (8) so as to be emptied by means of the control unit (14) controlling a single pump (12) and a single valve (11) according to the data received from the liquid level sensor (13).

Claims

1. A laundry dryer (1) **comprising** a body (2); a drum (3) which is disposed in the body (2) and wherein the laundry is loaded; an air circulation duct (4) which is configured to provide the delivery of the drying air into the drum (3); a heat exchanger (5) which is provided on the air circulation duct (4) and which is configured to condense the humidity in the air; a collection receptacle (6) wherein the water condensed by the heat exchanger (5) is collected; a water tank (8) which is connected to the collection receptacle (6) in fluid communication by means of a delivery line (7); a spraying line (9) which extends between the collection receptacle (6) and the drum (3); at least one nozzle (10) which is provided at the end of the spraying line (9) and which is configured to enable the water to be sprayed into the drum (3); and a pump (12) which is configured to provide the delivery of the water in the collection receptacle (6) to the water tank (8) and/or the nozzle (10), **characterized by** further comprising a valve (11) which connects the collection receptacle (6) and the delivery line (7) as well as the collection receptacle (6) and the spraying line (9) to each other and a liquid level sensor (13) which is configured to measure the level of the water in the collection receptacle (6), and a control unit (14) which is configured to control the valve (11) and the pump (12) so as to deliver the water in the collection receptacle (6) to the water tank (8) or the nozzle (10) and which is configured to control the valve (11) and the pump (12) so as to deliver the water from the collection receptacle (6) to the water tank (8) when the liquid level in the collection receptacle (6) exceeds a first threshold value predetermined by the producer and which is configured to control the valve (11) so as to interrupt the fluid communication between the collection receptacle (6) and the spraying line (9) until the liquid level in the collection receptacle (6) reaches a third threshold value predetermined by the producer .

2. A laundry dryer (1) as in Claim 1, **characterized by** a humidity sensor (15) which is provided in the body (2), and the control unit (14) which terminates the drying process when the humidity value received from the humidity sensor (15) falls below a predetermined value, which, after the termination of the drying process, processes the data received from the liquid level sensor (13) and operates the pump (12) until the amount of water in the collection receptacle (6) falls below a predetermined second threshold value and which, when the pump (12) is operated, closes the valve (11) between the collection receptacle (6) and the spraying line (9) and controls the valve (11) such that the collection receptacle (6) is in fluid communication with the delivery line (7) until the liquid level in the collection receptacle (6) reaches a third threshold value predetermined by the producer.
3. A laundry dryer (1) as in Claim 1, **characterized by** the control unit (14) which prevents the operation of the pump (12) until the liquid level in the collection receptacle (6) reaches a third threshold level.

Patentansprüche

1. Ein Wäschetrockner (1) **umfasst** einen Körper (2); eine Trommel (3), die in dem Körper (2) angeordnet ist und in die die Wäsche geladen wird; eine Luftzirkulationsleitung (4), die so konfiguriert ist, dass sie die Zufuhr der Trocknungsluft in die Trommel (3) bereitstellt; einen Wärmetauscher (5), der an der Luftzirkulationsleitung (4) vorgesehen ist und der dazu konfiguriert ist, die Feuchtigkeit in der Luft zu kondensieren; einen Sammelbehälter (6), in dem das durch den Wärmetauscher (5) kondensierte Wasser gesammelt wird; einen Wassertank (8), der mittels einer Förderleitung (7) mit dem Sammelbehälter (6) in Fluidverbindung steht; eine Sprühleitung (9), die sich zwischen dem Sammelbehälter (6) und der Trommel (6) erstreckt; mindestens eine am Ende der Sprühleitung (9) vorgesehene Düse (10), die so konfiguriert ist, dass sie das Sprühen des Wassers in die Trommel (3) ermöglicht; und eine Pumpe (12), die so konfiguriert ist, dass sie das Wasser in dem Sammelbehälter (6) zu dem Wassertank (8) und/oder der Düse (10) liefert, **gekennzeichnet ist es dadurch, dass** ferner ein Ventil (11), das den Sammelbehälter (6) und die Förderleitung (7) sowie den Sammelbehälter (6) und die Sprühleitung (9) miteinander verbindet, und ein Füllstandssensor (13) umfasst, die dazu konfiguriert ist, den Pegel des Wassers in dem Sammelbehälter (6) zu messen, und eine Steuereinheit (14), die konfiguriert ist, um das Ventil (11) und die Pumpe (12) zu steuern, um das Wasser im Sammelbehälter (6) dem Wassertank (8) oder der Düse (10) zuzuführen und das dazu konfiguriert ist, das Ventil (11) und die Pumpe (12)

zu steuern, um das Wasser aus dem Sammelbehälter (6) in den Wassertank (8) zu fördern, wenn der Flüssigkeitsstand im Sammelbehälter (6) einen vom Hersteller vorgegebenen ersten Schwellenwert überschreitet und das so konfiguriert ist, dass es das Ventil (11) steuert, um die Fluidverbindung zwischen dem Sammelbehälter (6) zu unterbrechen und der Sprühleitung (9) bis der Flüssigkeitsspiegel im Sammelbehälter (6) einen vom Hersteller vorgegebenen dritten Schwellenwert erreicht.

2. Ein Wäschetrockner (1), wie in Anspruch 1 aufgeführt, **ist dadurch gekennzeichnet, dass** ein Feuchtigkeitssensor (15), der im Körper (2) vorgesehen ist, und die Steuereinheit (14), die den Trocknungsprozess beendet, wenn der von dem Feuchtigkeitssensor (15) empfangene Feuchtigkeitsswert unter einen vorbestimmten Wert fällt, die nach Beendigung des Trocknungsvorgangs die vom Füllstandssensor (13) empfangenen Daten verarbeitet und die Pumpe (12) solange betreibt, bis die Wassermenge im Sammelbehälter (6) einen vorgegebenen zweiten Schwellenwert unterschreitet und die bei Betrieb der Pumpe (12) das Ventil (11) zwischen dem Sammelbehälter (6) und der Spritzleitung (9) schließt und das Ventil (11) so steuert, dass der Sammelbehälter (6) in Flüssigkeitsverbindung mit der Förderleitung (7) bis der Flüssigkeitsspiegel im Sammelbehälter (6) einen vom Hersteller vorgegebenen dritten Schwellenwert erreicht.
3. Ein Wäschetrockner (1), wie in Anspruch 1 aufgeführt, **ist dadurch gekennzeichnet, dass** die Steuereinheit (14), die den Betrieb der Pumpe (12) verhindert, bis der Flüssigkeitspegel im Sammelbehälter (6) einen dritten Schwellenpegel erreicht.

Revendications

1. Un sèche-linge (1) **comprenant** un corps (2) ; un tambour (3) qui est disposé dans le corps (2) et dans lequel le linge est chargé ; un conduit de circulation d'air (4) qui est configuré pour assurer la fourniture de l'air de séchage dans le tambour (3) ; un échangeur de chaleur (5) qui est prévu sur le conduit de circulation d'air (4) et qui est configuré pour condenser l'humidité dans l'air ; un réceptacle de collecte (6) dans lequel l'eau condensée par l'échangeur de chaleur (5) est collectée ; un réservoir d'eau (8) qui est relié au réceptacle de collecte (6) en communication fluide au moyen d'une ligne d'alimentation (7) ; une conduite de pulvérisation (9) qui s'étend entre le réceptacle de collecte (6) et le tambour (6) ; au moins une buse (10) qui est prévue à l'extrémité de la conduite de pulvérisation (9) et qui est configurée pour permettre la pulvérisation de l'eau dans le tambour (3) ; et une pompe (12) qui est configurée pour

fournir la livraison de l'eau dans le réceptacle de collecte (6) au réservoir d'eau (8) et/ou à la buse (10), **caractérisé par** la fait qu'il comprend en outre une vanne (11) qui connecte le réceptacle de collecte (6) et la ligne de livraison (7) ainsi que le réceptacle de collecte (6) et la ligne de pulvérisation (9) l'un à l'autre et un capteur de niveau de liquide (13) qui est configuré pour mesurer le niveau de l'eau dans le réceptacle de collecte (6), et une unité de commande (14) qui est configurée pour commander la vanne (11) et la pompe (12) afin de délivrer l'eau dans le récipient de collecte (6) au réservoir d'eau (8) ou à la buse (10) et qui est configurée pour commander la vanne (11) et la pompe (12) afin de délivrer l'eau du récipient de collecte (6) au réservoir d'eau (8) lorsque le niveau de liquide dans le récipient de collecte (6) dépasse une première valeur seuil prédéterminée par le producteur et qui est configurée pour commander la vanne (11) afin d'interrompre la communication fluïdique entre le récipient de collecte (6) et la ligne de pulvérisation. le récipient de collecte (6) dépasse une première valeur seuil prédéterminée par le producteur et qui est configuré pour commander la vanne (11) de manière à interrompre la communication fluïdique entre le récipient de collecte (6) et la ligne de pulvérisation (9) jusqu'à ce que le niveau de liquide dans le récipient de collecte (6) atteigne une troisième valeur seuil prédéterminée par le producteur.

2. Un sèche-linge (1) selon la déclaration 1, **caractérisé par** un capteur d'humidité (15) qui est prévu dans le corps (2), et l'unité de commande (14) qui termine le processus de séchage lorsque la valeur d'humidité reçue du capteur d'humidité (15) tombe en dessous d'une valeur prédéterminée, qui, après la fin du processus de séchage, traite les données reçues du capteur de niveau de liquide (13) et fait fonctionner la pompe (12) jusqu'à ce que la quantité d'eau dans le récipient de collecte (6) tombe en dessous d'une deuxième valeur seuil prédéterminée et qui, lorsque la pompe (12) est actionnée, ferme la vanne (11) entre le réceptacle de collecte (6) et la ligne de pulvérisation (9) et commande la vanne (11) de telle sorte que le réceptacle de collecte (6) soit en communication fluïdique avec la ligne de distribution (7) jusqu'à ce que le niveau de liquide dans le réceptacle de collecte (6) atteigne une troisième valeur seuil prédéterminée par le producteur.
3. Un sèche-linge (1) comme dans la déclaration 1, **caractérisé par** l'unité de commande (14) qui empêche le fonctionnement de la pompe (12) jusqu'à ce que le niveau de liquide dans le réceptacle de collecte (6) atteigne un troisième niveau de seuil.

Figure 1


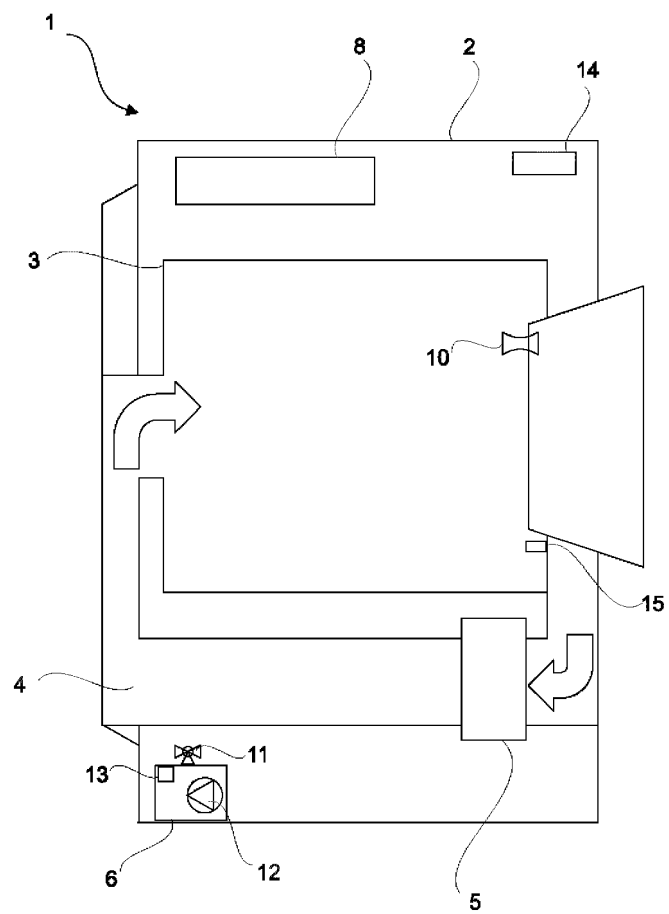


Figure 2

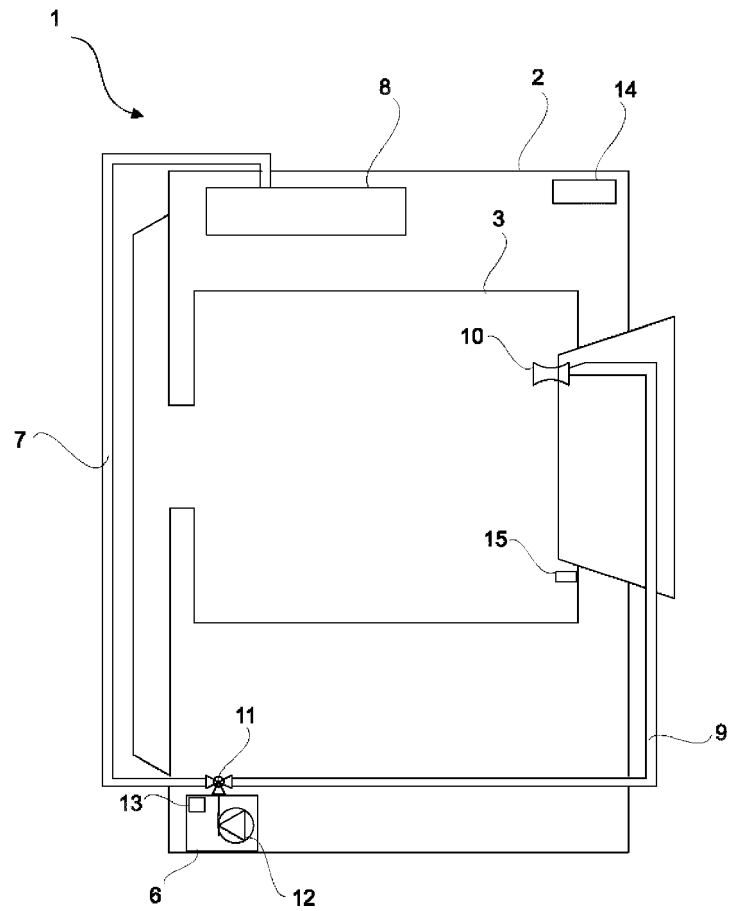

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2020015914 A [0003]
- EP 2520706 A2 [0003]