



(12) **DEMANDE DE BREVET CANADIEN**
CANADIAN PATENT APPLICATION
(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2016/08/08	(51) Cl.Int./Int.Cl. <i>G07C 1/30</i> (2006.01)
(87) Date publication PCT/PCT Publication Date: 2017/02/16	(71) Demandeur/Applicant: J.J. MACKAY CANADA LIMITED, CA
(85) Entrée phase nationale/National Entry: 2018/01/30	(72) Inventeurs/Inventors: MACKAY, GEORGE ALLAN, CA; MACKAY, JAMES GEORGE, CA; O'NEIL, ADRIAN IGNATIUS, CA; COSH, ROBERT STEVEN, CA; CAMERON, DARREN SCOTT, CA; CHAUVIN, GERGORY EMILE, CA; MCMULLIN, DAVID ANDREW, CA; ...
(86) N° demande PCT/PCT Application No.: CA 2016/050927	(74) Agent: GOWLING WLG (CANADA) LLP
(87) N° publication PCT/PCT Publication No.: 2017/024396	
(30) Priorités/Priorities: 2015/08/11 (CA2,900,177); 2015/10/16 (CA2,908,793); 2016/06/09 (CA2,932,667)	

(54) Titre : PARCMETRE A ESPACE UNIQUE
(54) Title: SINGLE SPACE PARKING METER

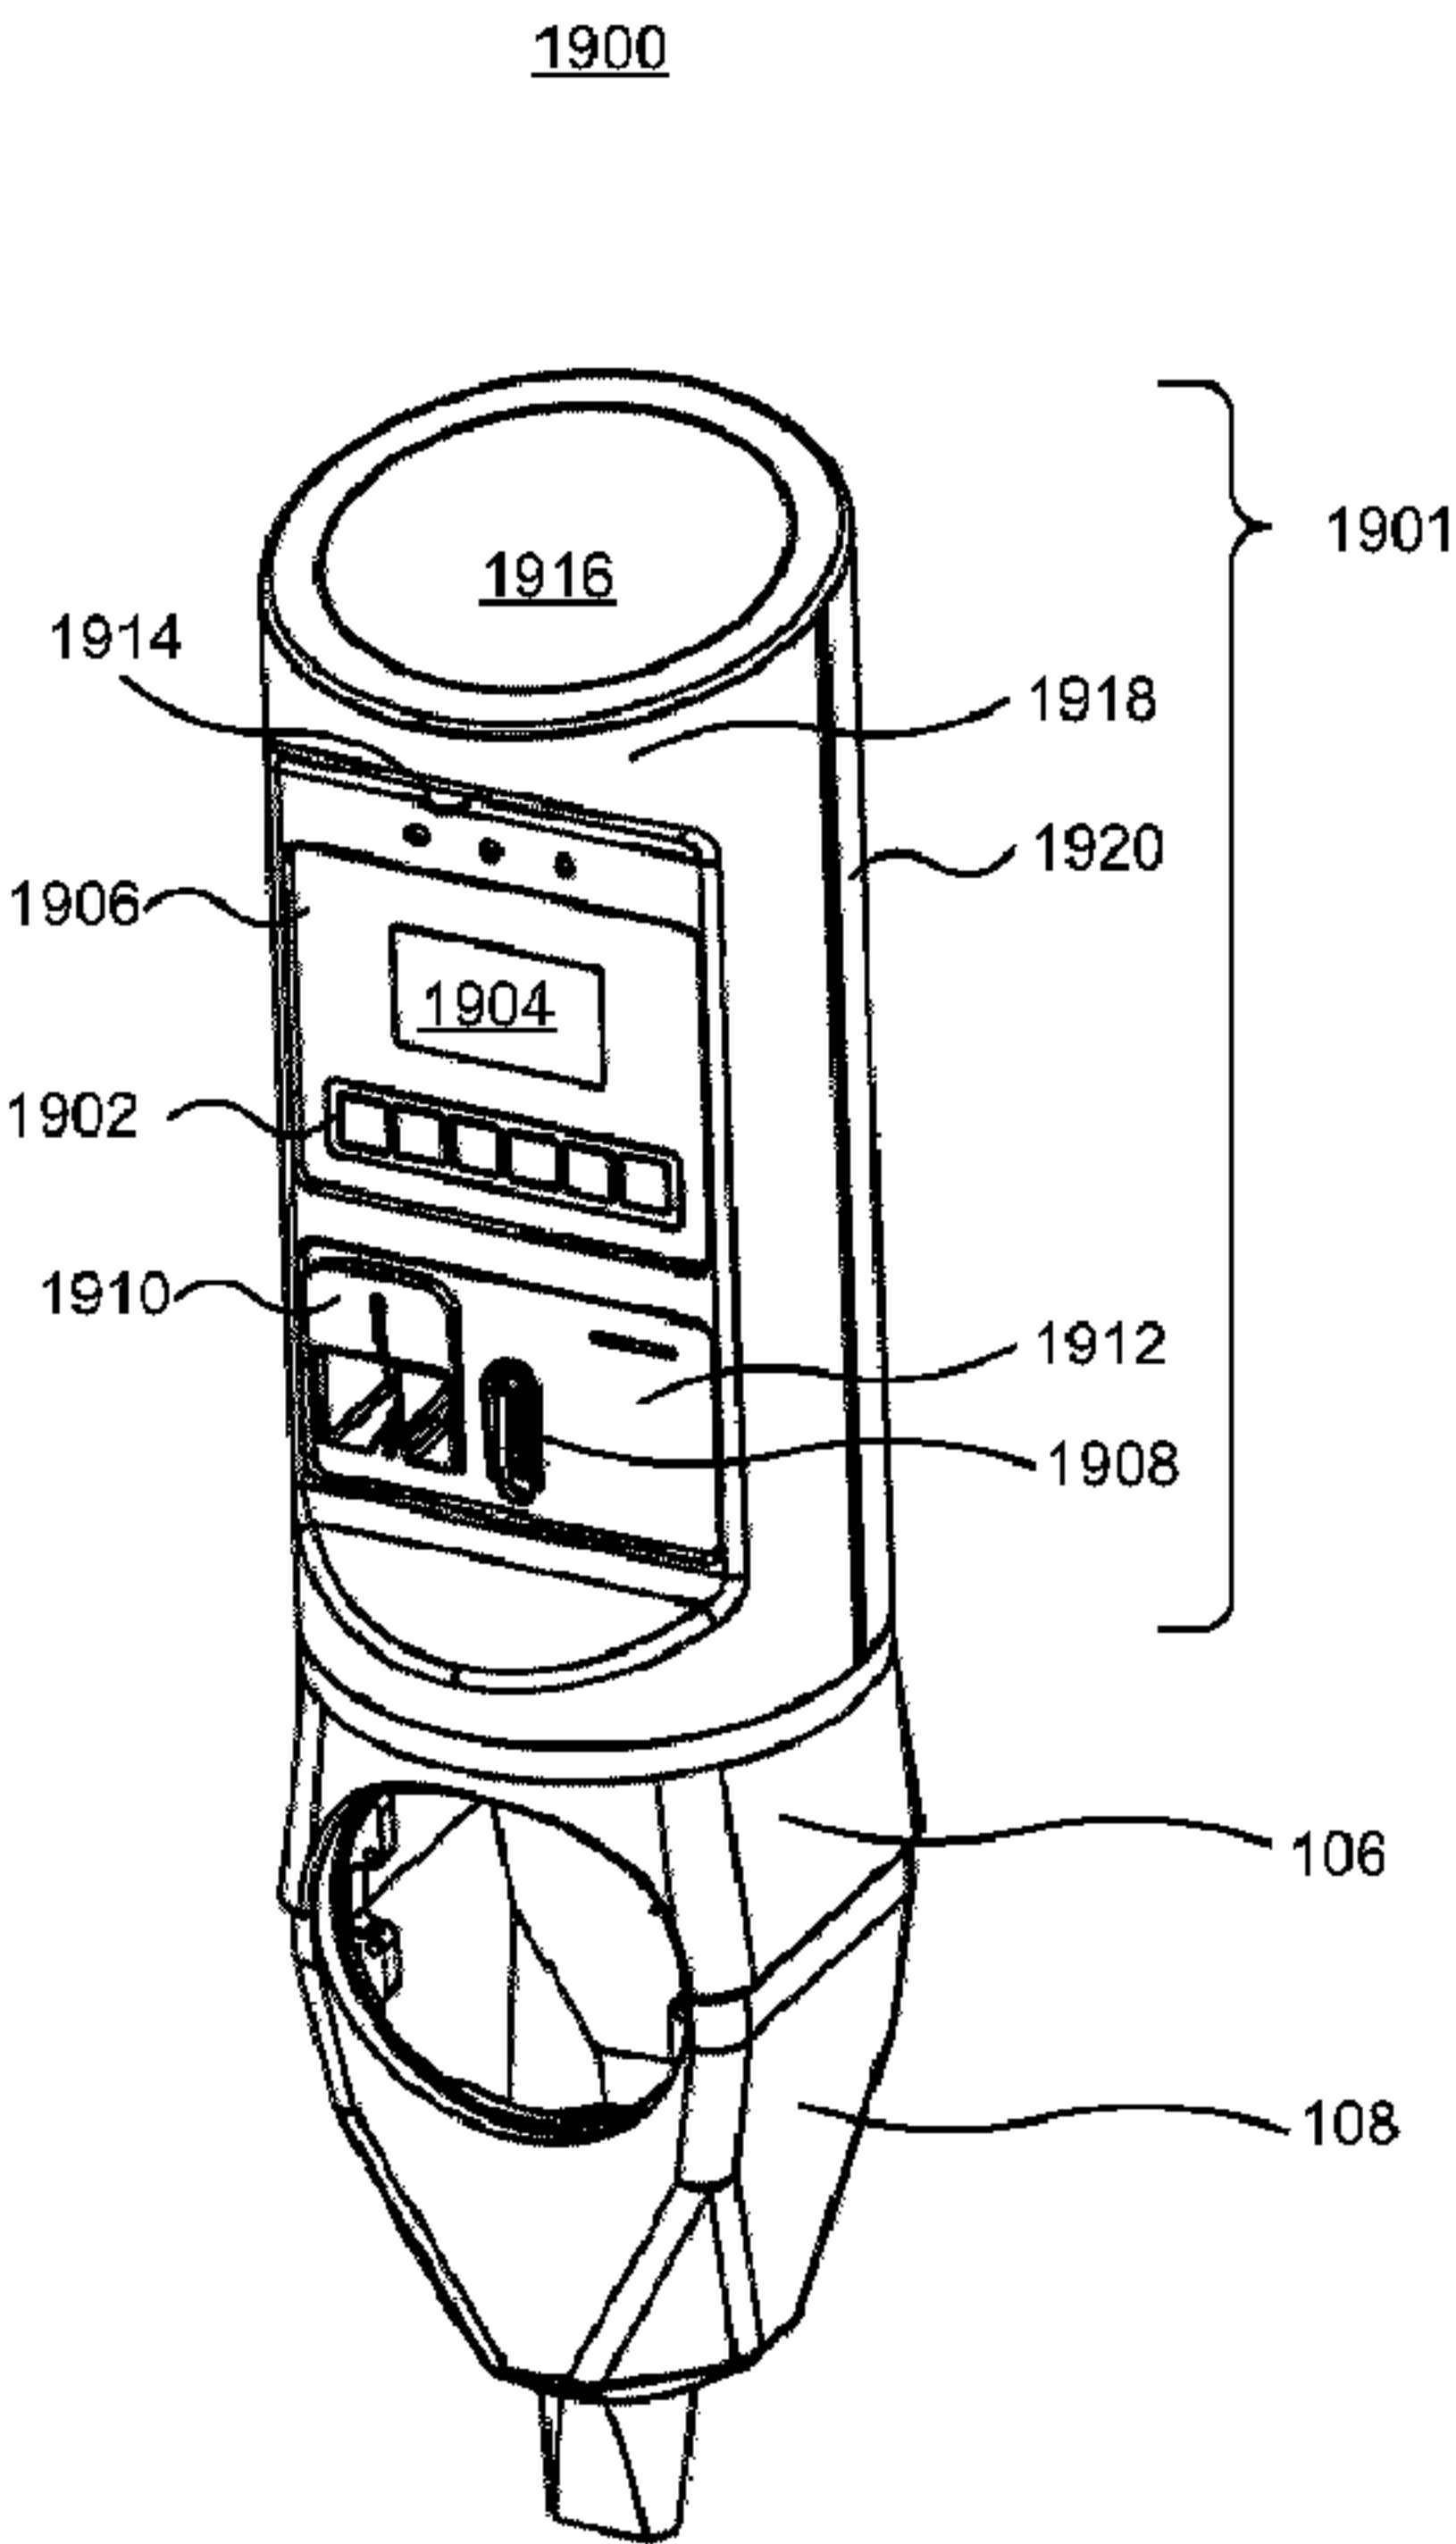


Figure 19

(57) **Abrégé/Abstract:**
A single space parking meter assembly for retrofitting onto an existing coin vault assembly includes a number of parking meter components enclosed within a protective outer covering that is rotatably or slidably engageable with the coin vault assembly when a

(72) Inventeurs(suite)/Inventors(continued): BROWN, MICHAEL, CA; WATSON, MATTHEW, CA...

(57) Abrégé(suite)/Abstract(continued):

bottom surface of the protective outer covering is positioned against or adjacent to an upper surface of the coin vault assembly. A locking mechanism secures the protective outer covering to the coin vault assembly when the protective outer covering is engaged with the coin vault assembly.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)
(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
16 February 2017 (16.02.2017)




(10) International Publication Number
WO 2017/024396 A1

- (51) International Patent Classification:
G07C 1/30 (2006.01)
- (21) International Application Number:
PCT/CA2016/050927
- (22) International Filing Date:
8 August 2016 (08.08.2016)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2,900,177 11 August 2015 (11.08.2015) CA
2,908,793 16 October 2015 (16.10.2015) CA
2,932,667 9 June 2016 (09.06.2016) CA
- (71) Applicant: **J.J. MACKAY CANADA LIMITED**
[CA/CA]; P.O. Box 338, 1342 Abercrombie Road, New Glasgow, Nova Scotia B2H 5E3 (CA).
- (72) Inventors: **MACKAY, George Allan**; 497 Terrace Street, New Glasgow, Nova Scotia B2H 5J6 (CA). **MACKAY, James George**; 497 Terrace Street, New Glasgow, Nova Scotia B2H 5J6 (CA). **O'NEIL, Adrian Ignatius**; 263 Blue Heron Drive, New Glasgow, Nova Scotia B2H 5Z2 (CA). **COSH, Robert Steven**; 28 Brookside Way, Antigonish, Nova Scotia B2G 3A8 (CA). **CAMERON, Darren Scott**; 362 Meadowlark Drive, New Glasgow, Nova Scotia B2H 1S1 (CA). **CHAUVIN, Gregory Emile**; 29 Oakridge Drive, Brookside, Nova Scotia B3T 1S8 (CA). **MCMULLIN, David Andrew**; 88 Kenilworth Street, Ottawa, Ontario K1Y 3Y7 (CA). **BROWN, Michael**; 40 Lakeside Avenue, Ottawa, Ontario K1S 3H2 (CA). **WATSON, Mat-**

[Continued on next page]

(54) Title: SINGLE SPACE PARKING METER

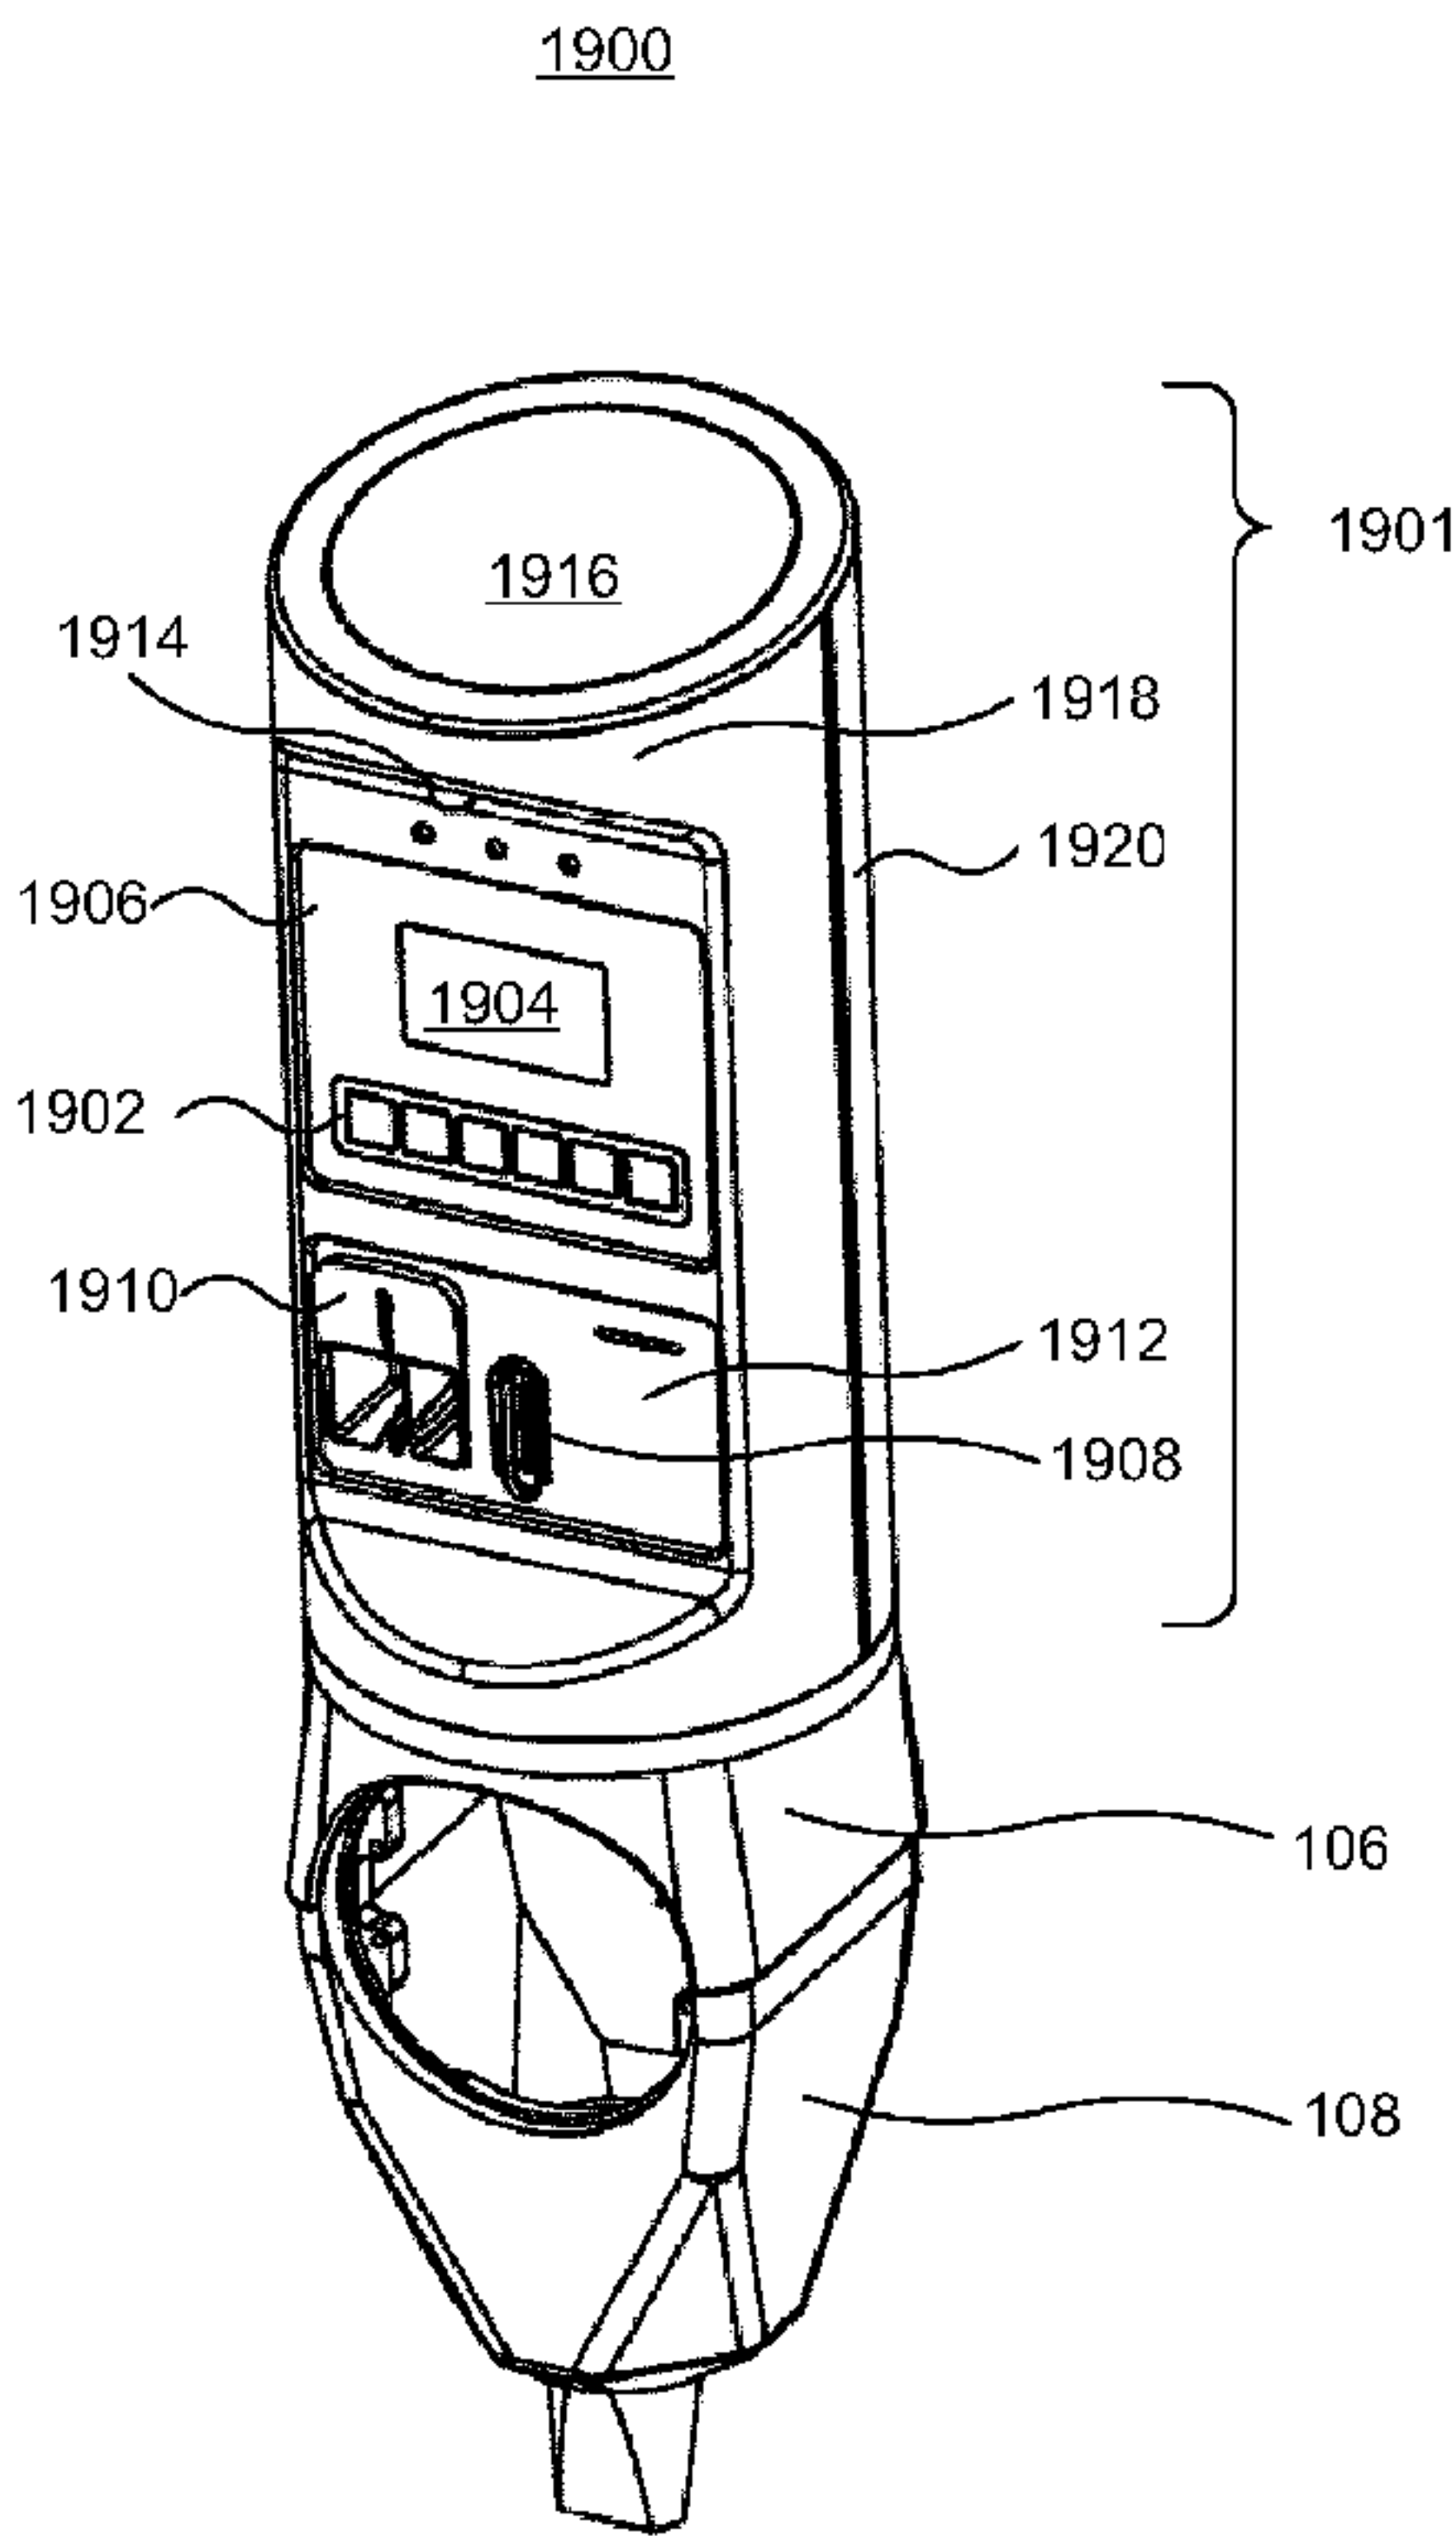

(57) Abstract: A single space parking meter assembly for retrofitting onto an existing coin vault assembly includes a number of parking meter components enclosed within a protective outer covering that is rotatably or slidably engageable with the coin vault assembly when a bottom surface of the protective outer covering is positioned against or adjacent to an upper surface of the coin vault assembly. A locking mechanism secures the protective outer covering to the coin vault assembly when the protective outer covering is engaged with the coin vault assembly.

Figure 19

WO 2017/024396 A1

WO 2017/024396 A1

- thew; 159 Baillie Avenue, Ottawa, Ontario K0A 3M0 (CA).

(74) **Agents:** **CRICHTON, Michael** et al.; GOWLING WLG (CANADA) LLP, 160 Elgin St., Suite 2600, Ottawa, Ontario K1P 1C3 (CA).

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

— *with international search report (Art. 21(3))*

SINGLE SPACE PARKING METER

TECHNICAL FIELD

The current disclosure relates to single space parking meters and in particular to single space parking meters that may be retrofit to existing coin vault housings.

5 BACKGROUND

Traditional single space parking meters comprise a number of components. The metering functionality is provided by a meter mechanism that is received within a protective lower housing. An upper housing may be secured to the lower housing to retain the meter mechanism within the protective housing. These protective housing
10 components are traditionally made of either a lighter weight cast metal such as ZAMAC which is an alloy made of Zinc Aluminum Magnesium and Copper or of a much heavier cast ductile iron. The lower housing is secured on top of a coin vault housing that contains a coin canister that stores coins inserted into the parking meter. Earlier models of coin vault housings were made of light weight ZAMAK; however, as parking has
15 increased in cost, to provide more security to the cash in the coin vault municipalities have replaced most of these light weight alloy coin vault housings with a heavier model made out of ductile cast iron. The functionality of the parking meter may be updated by replacing the meter mechanism while retaining the housing components.

Most upgrades or retrofits to these traditional single space parking meters are based
20 and/or rely upon the use of the existing metal casings or housings. This retrofit approach potentially can save a city or municipality on overall retrofit cost, as they only need to purchase the internal parking meter mechanism that will fit into these existing metal housings.

Notwithstanding the advantages of using the existing traditional meter housing that the
25 parking meter mechanism is typically placed into, such traditional housing acts as a constraint on which and how features may be offered in a newer electronic parking meter and how such features may be offered. Features in this regard include, but are not limited to, display, customer input/interaction, power generation and storage, wireless communications, and payment-related features. Often the above features

included in electronic parking meter retrofits which involve traditional housings are constrained, limited or compromised in some fashion by the physical constraints of existing traditional housings. For example a traditional housing can restrict the placement and size of a number of components, including a display, user input buttons
5 or controls, a solar panel, a battery, and payment devices. Integrating new features into a smaller constrained space also introduces serviceability challenges. Traditional single space parking meter housings are further restricted by their requirement to provide a method to interlock with and secure the parking meter mechanism within the existing traditional lower housings. Retrofit solutions which introduce a new electronic parking
10 meter that reuses part of the existing physical meter housing may also introduce a new housing cap, cover or other panel-like component to secure and protect the new parking meter mechanism while attempting to increase available space or add new meter features. These housing caps, covers, or panels may add additional weight to the retrofit solution, and may unintentionally introduce gaps, or tolerance sloppiness such
15 that the retrofit solution does not offer the same level of physical security as provided with the original housing cap or cover.

The traditional metal housings being primarily made of cast iron or other metal alloys offer more than adequate security to the meter mechanism; however, they are also quite heavy to transport and costly to repair or replace. Most traditional metal housings
20 must be painted regularly, as exposed metals will rust and oxidize over time, and will require attention or eventual replacement. Rust stains in this regard represent an unsightly streetscape to the parking public. Simply replacing the old meter mechanism with new meter technology which is placed into an existing traditional housing that may be worn, rusty, or heavily weathered does little to improve public confidence or bring
25 attention to the new and improved meter mechanisms that may be placed inside. Further, if the meter mechanism has to be removed and a replacement meter mechanism is not available, the open housing is exposed to the elements and vandalism, and, furthermore, exposed metal edges of the open housing pose an injury risk to the public.

30 An electronic parking meter, including protective housing, that offers advantages over

previous electronic parking meter retrofit and housing approaches, and that is not constrained to use an existing lower housing of a single space parking meter, is desirable.

SUMMARY

- 5 In accordance with the present disclosure, there is provided a single space parking meter for retrofitting onto an existing coin vault housing, the parking meter comprising: a saddle plate adapted to be received over a portion of the existing coin vault housing; and a parking meter assembly comprising: parking meter components for metering parking time; a rear cover; a front cover separable from the rear cover; a bottom plate
10 adapted to releasably secure to the saddle plate; and a locking mechanism adapted to secure the front cover and rear cover together and secure the bottom plate to the saddle plate.

In accordance with a further embodiment of the parking meter, the rear cover is attached to the bottom plate to form a rear assembly.

- 15 In accordance with a further embodiment of the parking meter, the parking meter components are coupled to the front cover to form a front assembly.

In accordance with a further embodiment of the parking meter, the front assembly is slidably engageable with the rear assembly.

- In accordance with a further embodiment of the parking meter, the rear assembly
20 comprises one or more rails on which the front assembly is slidably engageable.

In accordance with a further embodiment of the parking meter, the one or more rails are located on edges of the rear cover.

In accordance with a further embodiment of the parking meter, one or more rail guides of the front assembly are slidably engageable with the rear assembly.

- 25 In accordance with a further embodiment of the parking meter, the one or more rail guides of the front assembly are formed as separate components and attached to the edges of the front cover of the front assembly.

In accordance with a further embodiment of the parking meter, the locking mechanism prevents the front assembly from sliding relative to the rear assembly when the locking mechanism is engaged.

5 In accordance with a further embodiment of the parking meter, the locking mechanism is attached to a lower lock plate attached to the front assembly.

In accordance with a further embodiment of the parking meter, the locking mechanism is attached to a lower lock plate attached to the rear assembly.

10 In accordance with a further embodiment of the parking meter, the bottom plate comprises an elevated overhang extending upwards through the lower lock plate when the parking meter is assembled, and wherein the locking mechanism comprises at least one moveable arm positioned under the elevated overhang in a locked position to secure the front assembly to the rear assembly.

15 In accordance with a further embodiment of the parking meter, wherein the saddle plate is secured to the existing coin vault housing using a plurality of bolts having a non-threaded portion extending away from the saddle plate when secured and having a large diameter head.

20 In accordance with a further embodiment of the parking meter, the bottom plate comprises a plurality of key holes having a large diameter opening aligned with the large diameter head of the bolts securing the saddle plate to the coin vault housing, the key holes further comprising a smaller diameter opening extending from the larger diameter opening to allow the non-threaded portion of the bolts to be received when the bottom plate is rotated or twisted, the large diameter head of the bolts preventing the bottom plate from separating from the saddle plate when the non-threaded portion of the bolts is received in the smaller diameter opening.

25 In accordance with a further embodiment of the parking meter, the locking mechanism prevents rotation of the bottom plate relative to the saddle plate when engaged.

In accordance with a further embodiment of the parking meter, the locking mechanism

interferes with the saddle plate to prevent the rotation of the bottom plate.

In accordance with a further embodiment of the parking meter, the front assembly and the rear assembly when secured together provide a protective housing having a generally cylindrical shape.

- 5 In accordance with a further embodiment of the parking meter, the front cover comprises a flat recessed portion providing a location for user interaction components.

In accordance with a further embodiment of the parking meter, the user interaction components comprise a display for presenting information to a user and one or more input controls allowing the user to interact with the parking meter.

- 10 In accordance with a further embodiment of the parking meter, the display and input controls are provided by a touch screen display.

In accordance with a further embodiment of the parking meter, the user interaction components further comprise one or more payment means.

- 15 In accordance with a further embodiment of the parking meter, the payment means comprises a coin chute for receiving coins of different denominations.

In accordance with a further embodiment of the parking meter, the payment means comprises a magnetic stripe and/or chip card reader for receiving payment information from a payment card.

- 20 In accordance with a further embodiment of the parking meter, the payment means comprises a contactless payment reader for receiving payment information from a contactless payment device.

In accordance with a further embodiment of the parking meter, an antenna for the contactless payment reader is located within the flat recessed portion of the front cover.

- 25 In accordance with a further embodiment of the parking meter, the antenna for the contactless payment reader surrounds at least a portion of, or is in close proximity to,

the display.

In accordance with a further embodiment of the parking meter, the antenna for the contactless payment reader is located on a portion of the front cover transitioning from the flat recessed portion of the front cover to the generally cylindrical portion of the front
5 cover.

In accordance with a further embodiment of the parking meter, wherein the front cover comprises a cylindrical recess at a top of the parking meter assembly.

In accordance with a further embodiment, the parking meter further comprises a solar panel located within the cylindrical recess.

10 In accordance with a further embodiment of the parking meter, an arcuate portion of the cylindrical recess is further recessed to form an antenna recess.

In accordance with a further embodiment, the parking meter further comprises a cellular antenna located within the antenna recess.

In accordance with a further embodiment of the parking meter, the front assembly
15 comprises a battery compartment for receiving at least one battery.

In accordance with a further embodiment of the parking meter, the battery compartment comprises a primary battery compartment and a secondary battery compartment.

In accordance with a further embodiment of the parking meter, the battery compartment is pivotally attached to the front assembly to allow the battery compartment to pivot
20 outwards to provide access to the batteries.

In accordance with a further embodiment of the parking meter, the battery compartment comprises a latching mechanism for preventing the battery compartment from pivoting outwards unintentionally.

In accordance with a further embodiment of the parking meter, the rear cover is formed
25 from an extrusion.

In accordance with a further embodiment of the parking meter, the rear cover is formed out of folded stainless steel.

In accordance with a further embodiment of the parking meter, one or more of the rear cover, the front cover, and the bottom plate are formed from injection molded plastic.

- 5 In accordance with a further embodiment of the parking meter, wherein one or more of the rear cover, the front cover, and the bottom plate are formed from injection molded polycarbonate co-polymer resins.

In accordance with a further embodiment of the parking meter, the bottom plate is attached to the rear cover by a plurality of threaded bolts or rods passing through the
10 bottom plate and extended cylindrical extrusions on the rear cover.

In accordance with a further embodiment of the parking meter, the the bottom plate and rear cover are formed out of stainless steel and welded together.

In accordance with a further embodiment of the parking meter, the bottom plate is made from injection molded plastic, the rear cover is formed out of stainless steel and the
15 bottom plate is attached to the rear cover by using bolts through a series of mounting holes that align to the stainless steel rear cover.

In accordance with a further embodiment of the parking meter, wherein the saddle plate comprises: a lower profile matching an upper profile of the existing coin vault housing; an upper profile matching a lower profile of the parking meter assembly; and a transition
20 section transitioning from the lower profile to the upper profile.

In accordance with a further embodiment of the parking meter, the saddle plate is rigidly and fixedly attached to the coin vault housing and the parking meter assembly is rotatably engageable with the saddle plate.

In accordance with a further embodiment of the parking meter, a plurality of bolts secure
25 the saddle plate to the coin vault housing, and the bottom plate comprises a plurality of key holes engageable with the plurality of bolts when the parking meter assembly is rotated.

In accordance with a further embodiment, the parking meter further comprises a solar panel assembly that is removably engageable with the parking meter assembly, wherein the solar panel assembly comprises a solar panel.

5 In accordance with a further embodiment of the parking meter, the solar panel is rotatably adjustable.

In accordance with a further embodiment of the parking meter, the solar panel can be vertically angled or sloped to two or more different positions.

10 In accordance with the present disclosure, there is further provided a single space parking meter assembly for retrofitting onto an existing coin vault assembly, the coin vault assembly comprising a coin vault housing, the parking meter assembly comprising: a locking mechanism; at least one battery for supplying power for the parking meter assembly; a display; at least one payment means for accepting payment for parking time selected from the group comprising a coin chute, a card slot and a contactless payment reader; a radio transceiver; and a protective outer covering that at
15 least partially houses the locking mechanism, the at least one battery, the display, the at least one payment means, and the radio transceiver; and wherein the protective outer covering is rotatably or slidably engageable with the coin vault assembly when a bottom surface of the protective outer covering is positioned against or adjacent to an upper surface of the coin vault assembly, and the locking mechanism secures the protective
20 outer covering to the coin vault assembly when the protective outer covering is engaged with the coin vault assembly.

In a further embodiment of the parking meter assembly, the existing coin vault assembly is fitted with a saddle plate adapted to be received over a portion of the coin vault housing, wherein the saddle plate is rigidly and fixedly attached to the coin vault
25 housing, and the protective outer covering is rotatably or slidably engageable with the coin vault assembly when a bottom surface of the protective outer covering is positioned against or adjacent to an upper surface of the saddle plate.

In a further embodiment of the parking meter assembly, the protective outer covering

comprises a front cover, a rear cover and a bottom plate.

In a further embodiment of the parking meter assembly, the protective outer covering comprises a front cover, a rear cover and a bottom plate, wherein the front cover and rear cover are slidably engageable with one another, and wherein the bottom plate is
5 rotatably or slidably engageable with the coin vault assembly when the bottom plate is positioned against or adjacent to an upper surface of the coin vault assembly.

In a further embodiment of the parking meter assembly, the locking mechanism when engaged prevents rotation or sliding of the bottom plate, and prevents sliding of the front cover relative to the rear cover.

10 In a further embodiment, the parking meter assembly, further comprises a solar panel assembly that is removably engageable with the parking meter assembly, wherein the solar panel assembly comprises a solar panel.

In a further embodiment of the parking meter assembly, the solar panel is rotatably adjustable.

15 In a further embodiment of the parking meter assembly, the solar panel can be vertically angled or sloped to two or more different positions.

In accordance with a further embodiment of the parking meter, the protective outer covering is formed from injection molded plastic.

In accordance with a further embodiment of the parking meter, the protective outer
20 covering is formed from injection molded polycarbonate co-polymer resins.

In accordance with the present disclosure, there is further provided a method for retrofitting a single space parking meter assembly onto an existing coin vault assembly, the coin vault assembly comprising a coin vault housing, the method comprising: disassembling an existing parking meter to the existing coin vault housing; rotatably or
25 slidably engaging a protective outer covering of the parking meter assembly with the coin vault assembly when a bottom surface of the protective outer covering is positioned against or adjacent to an upper surface of the coin vault assembly; and securing by way

of a locking mechanism the protective outer covering to the coin vault assembly once the protective outer covering has been engaged with the coin vault assembly.

In a further embodiment of the method, the step of rotatably or slidably engaging a protective outer covering of the parking meter assembly with the existing coin vault
5 assembly also comprises the step of rigidly and fixedly attaching a saddle plate to the coin vault housing, wherein the saddle plate is adapted to be received over a portion of the existing coin vault housing, and the protective outer covering rotatably or slidably engages the saddle plate.

In accordance with the present disclosure, there is further provided a single space
10 parking meter assembly comprising: a front assembly comprising: a solar panel; a radio communication component; a payment component; metering components; and a front housing to be exposed to the external environment; and a rear assembly slidably engageable with the front assembly, the rear assembly comprising: a bottom plate
15 securable to existing parking infrastructure at a parking location; a rear housing to be exposed to the external environment wherein the rear housing is secured to the bottom plate; a lock assembly preventing relative sliding between the front assembly and the rear assembly.

In a further embodiment of the single space parking meter, the bottom plate comprises a plurality of key holes each having a large diameter opening and a small diameter
20 opening extending from the large diameter opening, the large diameter opening sized to allow a bolt head of a bolt to pass through and the small diameter opening sized to allow a neck of the bolt to pass through but prevent the bolt head to pass through.

In a further embodiment of the single space parking meter, the key holes are aligned to allow bolt heads of securing bolts secured to the existing parking infrastructure to pass
25 through the plurality of key holes and to allow necks of the securing bolts to enter the small openings of the respective key holes when the rear assembly is twisted, rotated or slid relative to the securing bolts.

In a further embodiment of the single space parking meter, the lock assembly comprises

a vertical locking component preventing the relative sliding between the front assembly and the bottom assembly, and a rotational locking component preventing relative rotation or sliding of the rear assembly relative to the securing bolts.

5 In a further embodiment of the single space parking meter, wherein the rotational locking component comprises a pivotable locking arm comprising at least one protrusion, which in a locked position extends through an opening in the bottom plate into an aperture of the parking infrastructure to prevent rotation or sliding of the rear assembly.

10 In a further embodiment of the single space parking meter, the vertical locking component comprises a cylindrical lock secured to the bottom plate and comprising a rotatable hook that engages a locking rod of the front assembly when in a locked position to prevent relative movement between the front assembly and the rear assembly.

15 In a further embodiment of the single space parking meter, the vertical locking component cannot engage the front assembly if the rotational locking component is in an unlocked position.

In a further embodiment of the single space parking meter, the radio communication component comprises a removable radio module slidably engageable with the front assembly.

20 In a further embodiment of the single space parking meter, the removable radio module is securable to the front assembly using a thumbscrew.

In a further embodiment of the single space parking meter, the removable radio module comprises an electrical connection that mates to a corresponding connection of the front assembly when the radio module is engaged with the front assembly.

25 In a further embodiment of the single space parking meter, the payment component comprises one or more payment modules that are each individually securable to the front assembly.

In a further embodiment of the single space parking meter, the one or more payment modules are securable to the front assembly using thumbscrews.

In a further embodiment of the single space parking meter, the one or more payment modules comprises one or more of: a coin chute module; contact-based card reader
5 module; and a contactless payment reader module.

In a further embodiment of the single space parking meter, the solar panel is located within a solar panel module.

In a further embodiment of the single space parking meter, the solar panel module is slidably engageable with the front housing.

10 In a further embodiment of the single space parking meter, one or more of the rear housing, the front housing, and the bottom plate are formed from injection molded plastic.

In a further embodiment of the single space parking meter, one or more of the rear housing, the front housing, and the bottom plate are formed from injection molded
15 polycarbonate co-polymer resins.

In a further embodiment of the single space parking meter, the rear assembly and front assembly comprise one or more rails or rail guides, respectively, and at least one of the one or more rails or rail guides comprises one or more of: a spring-catch assembly; and, a removable or detachable rail or rail guide for allowing release, separation or
20 detachment of the front assembly relative to the rear assembly.

In a further embodiment of the single space parking meter, the parking meter assembly further comprises a hinge joining the first and second portions and which allows rotation of the second portion relative to the first portion.

In accordance with the present disclosure, there is further provided a single space
25 parking meter comprising: an internal mounting structure, a plurality of removable components secured to the internal structure using tool-less connectors; and a main processing board comprising a processor communicatively coupled to at least one of

the removable components and providing metering functionality for a parking location.

In a further embodiment of the single space parking meter, the plurality of removable components comprises one or more of: a coin chute; a contact-based payment reader; and a contactless payment reader.

- 5 In a further embodiment of the single space parking meter, the plurality of removable components comprises: a radio communication component.

In a further embodiment of the single space parking meter, the plurality of removable components comprises: a solar panel module.

- 10 In a further embodiment of the single space parking meter, the tool-less connectors comprise thumbscrews.

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments are described herein with reference to the appended drawings, in which:

- Figure 1 depicts a front isometric view of a single space parking meter;
 Figure 2 depicts a rear isometric view of the single space parking meter;
 15 Figure 3A depicts a front isometric view of the parking meter with the meter mechanism fully removed;
 Figure 3B depicts a front isometric view of the parking meter with the meter mechanism partially removed;
 Figure 4 depicts a front isometric view of a coin vault housing and retrofit saddle;
 20 Figure 5 depicts the retrofit saddle attached to the coin vault housing;
 Figure 6 depicts an isometric view of a rear assembly comprising a rear cover and bottom plate;
 Figure 7 depicts an isometric view of the rear cover;
 Figure 8 depicts an isometric view of the bottom plate;
 25 Figure 9 depicts a top view of the rear cover and bottom plate;
 Figure 10 depicts a rear isometric view of the parking meter mechanism;
 Figure 11 depicts a rear isometric view of the parking meter mechanism's front cover;

Figure 12 depicts a front isometric view of the parking meter mechanism's inner frame;

Figure 13 depicts a rear isometric view of the parking meter mechanism's inner frame;

5 Figure 14 depicts a battery housing;

Figure 15 depicts a locking mechanism;

Figure 16 depicts isolated components of the locking mechanism of Figure 15;

Figure 17 depicts a method of retrofitting an existing parking meter;

Figure 18 depicts a top view of an alternative bottom plate;

10 Figure 19 depicts a front isometric view of an alternative single space parking meter;

Figure 20 depicts a rear isometric view of the single space parking meter of Figure 19 with the parking meter mechanism partially raised;

15 Figure 21 depicts an internal isometric view of a front cover of the single space parking meter of Figure 19;

Figure 22 depicts a rear isometric view of an internal structure of the single space parking meter of Figure 19;

Figure 23 depicts a side view of the internal structure of Figure 22 attached to the front cover of Figure 21;

20 Figure 24 depicts a top perspective view of removable components of the parking meter of Figure 19;

Figure 25 depicts a detail perspective view of a removable contactless payment reader;

25 Figure 26 depicts details of the mounting of the removable contactless payment reader of Figure 25;

Figure 27 depicts a side view of the front cover, internal structure and solar panel assembly;

Figure 28 depicts a side view of the front cover, internal structure, solar panel assembly and radio assembly;

30 Figure 29 depicts a top view of the radio assembly;

Figure 30 depicts a rear perspective view of the front cover, internal structure and locking assembly;

Figure 31 depicts a perspective view of the rear cover, base plate and locking assembly;

5 Figure 32 depicts a side perspective view of the saddle plate, base plate and locking assembly;

Figure 33 depicts a rear perspective view of the internal structure and locking assembly; and

Figure 34 depicts details of service locks.

10 DETAILED DESCRIPTION

A single space parking meter is described that can be retrofit to an existing coin vault housing. By retrofitting the existing coin vault to fit the single space parking meter, it is possible to provide improved designs that are not constrained by having to fit a meter mechanism within an existing lower housing as with previous parking meter mechanisms. As described further herein, the retrofit parking meter comprises a saddle plate that may be mounted to the existing coin vault housing. A single space parking meter may be mounted directly to the saddle plate, and as such the design is not constrained by a meter mechanism having to be received within, or be secured to, an existing lower housing. The parking meter may comprise a rear assembly that includes a bottom plate for connecting the rear assembly to the saddle plate. A front assembly, providing the main parking meter mechanism components, may be connected to the rear assembly. The retrofit parking meter may allow an improved user interface and user experience since the parking meter mechanism is not constrained by an existing housing.

25 Plastic components have been used with success in single space parking meters for many years. These include some components attached to the housings and exposed to the external elements. Specific component examples include clear plastics such as Lexan for the domes or windows that cover a user display, LED indicators, or a solar panel. Additionally, internally to the parking meter, components made of molded plastic are generally widely accepted and used. Specific component examples may include

30

coin guides, and coin reader covers and chute. However, until now the exterior housings that the meter mechanisms are placed into have traditionally been made of cast metal alloy or cast ductile iron. This was done primarily for security concerns, as plastic on or as the exterior housing was seen as being prone to UV degradation and generally inferior to an equivalent metal housing component.

There have been ongoing scientific and technological developments and advancements in plastics, particularly in the area of formulations combining polycarbonate (PC) and co-polymers. For example, Lexan EXL resin produced by Sabic is a co-polymer formulation of polycarbonate and polysiloxane resulting in plastic with extreme impact performance and low temperature ductility. Having high heat and humidity resistance characteristics, plastics such as Sabic Lexan EXL resin formulations can also include flame retardant and UV-stabilizers. Polycarbonate co-polymer resins may be used to provide parking meters, and in particular parking meter housings, that meet challenging weatherability, aging, strength, chemical resistance, flame retardance, and impact and drop test toughness requirements, even in cold outdoor environments.

In addition to providing greater flexibility for the design of a parking meter mechanism, the retrofit parking meter described herein may provide improved security and/or safety. In previous parking meters, when the parking meter mechanism is removed from the lower housing, for example for repair, and a replacement is not immediately available, an open lower housing remains on the street. The open lower housing presents a target for vandalism, which may require subsequent costly replacement of the lower housing. In the retrofit parking meter described herein, when a parking meter assembly is removed from the street, the coin vault housing remains, optionally along with the saddle plate. As such, an open lower housing is not present on the street.

Further, the current parking meter design may be manufactured using a number of techniques that improve manufacturability. For example, portions of the parking meter housing may be manufactured using metal extrusions, or formed and welded stainless steel, rather than more expensive metal or alloy castings. Further, portions of the housing or outer covering of the parking meter may be formed using high strength

plastics, co-polymers and/or resins. Such plastic housing components or other parts may be made by way of injection molding. Polycarbonate co-polymer resins may be used in the parking meter components, including particularly the housing components, to provide lower cost, lighter weight, improved corrosion resistance, high strength and impact resistance components.

Further still, while the current retrofit parking meter provides greater flexibility for the design of, as well as the feature set provided by, the parking meter, the existing coin vault housing is still retained. Municipalities and cities may have a large existing investment in coin collection methods and equipment based on the use and design of existing coin vault housings and coin canisters contained therein, and as such it may be undesirable to change the coin vault housing design and/or operation.

Further as the use of coin as a payment option diminishes, some municipalities may decide to offer these same current retrofit parking meters without a coin payment option, or they may not offer this payment option in areas with high vandalism or theft. The parking public would still have multiple non-cash payment options and a standard user experience. Such non-coin payment retrofit meters may alternatively have a saddle plate that transitions directly to a pole adapter rather than to the existing coin vault housing.

Further, and unlike traditional parking meter mechanisms in which components are permanently or least semi-permanently secured, the parking meter of the present disclosure may make use of quick-connect connections for securing components, such as radio boards or modules, as well as payment components or modules, such as contact-based card readers, coin chutes, and contactless payment readers within the parking meter. The quick-connect connections may simplify the maintenance process as individual components that may have failed or malfunctioned may now be quickly and easily replaced with functioning components. Similarly, the modules or components may be easily and quickly replaced with new modules or components that provide improved performance, updated configurations or new/different features. For example, a radio module may be replaced with a new version that provides increased

transmission range while reducing power consumption. The quick-connect connections may be employed so as to secure the removable components or modules to an internal structure of the single space parking meter using tool-less connectors (e.g., thumbscrews). In turn, a main processing board of the single space parking meter, which includes a processor, may be communicatively coupled to one or more of the removable components and may provide metering functionality for a parking location.

Although various retrofit parking meter designs are possible, Figures 1 to 17 describe details for one specific design. It will be appreciated that other specific designs, such as those described with reference to Figures 18 - 34 are possible based on the use of a saddle plate to allow a new parking meter assembly to be secured to a coin vault assembly comprising an existing coin vault housing.

Although the following description refers to single space parking meters, it is possible for the parking meters to provide metering functionality for two or more spaces. It will be appreciated that a single space parking meter refers to a style of parking meters that historically metered only a single parking space. Single space parking meters are typically located along a street and affixed to posts adjacent to the parking spaces being metered. As an example of metering multiple parking spots, a single space parking meter located on a post in between two parking spots may be configured to provide metering of the parking space located to the left of the parking meter as well as the parking space located to the right of the parking meter. Single space parking meters are typically differentiated from multi-space meters, such as pay-and-display meters, pay-by-space meters and pay-by-plate meters, by their size. Multi space meters, which are typically provided in larger cabinets, are typically located one or a few per block, or per parking area such as a parking lot. The larger cabinets of multi space meters may allow for additional peripheral equipment such as thermal type receipt or ticket printers, paper currency readers, full alpha-numeric keypads, higher capacity cash cans, and correspondingly larger batteries and solar panels. In contrast, multiple single space meters, even when metering multiple parking spots, are typically located on a single block, or parking area such as a small parking lot. The single space meters are typically much smaller in size than multi-space meters.

Figure 1 depicts a front isometric view of a retrofit single space parking meter 100. The parking meter 100 comprises a parking meter assembly 101 that is connected to a coin vault assembly 103. The coin vault assembly 103 may comprise a saddle plate 106, which in turn may be secured to a coin vault housing 108. The coin vault housing provides an opening 110, secured by a door or covering (not shown), through which a coin vault or canister can be inserted and removed. The coin vault assembly may include or be attached to a lower protrusion 112 for use in directly securing the coin vault assembly, and indirectly the attached parking meter assembly 101, to a post or other structure. As described in further detail with reference to Figures 4 and 5, the saddle plate 106 is secured to the coin vault housing 108 and provides a mounting structure to which the parking meter assembly 101 may be releasably secured. Alternatively, a saddle plate may be attached to any non-coin vault housing base structure that provides a mounting structure or surface that may transition or connect to a post or other structure. In the further alternative, the parking meter embodiments described herein may, in addition to being securable to such existing parking infrastructure as a coin vault housing, be securable to other existing parking infrastructure with or without the use of a saddle plate.

The parking meter assembly 101 comprises a protective outer covering. As depicted, the protective outer covering comprises a rear cover or housing 102, a front cover or housing 104 and a bottom plate (not visible in Figure 1). One or more of the protective outer covers may be made of high-impact plastic or polycarbonate co-polymer resins. As described further herein, the protective outer covering may engage with the coin vault assembly when a bottom surface of the protective outer covering is positioned against or adjacent to an upper surface of the coin vault assembly. The parking meter assembly further includes a number of parking meter components for providing a functioning parking meter. Particular components included in a parking meter may vary depending upon the specific requirements of a city, municipality, or other potential purchaser of parking meters. The front cover 104 and rear cover 102 may be securely joined together in order to provide a secure housing to protect the parking meter components against an external environment, including dirt, dust, rain and snow, as well as from vandalism. Although the secure housing is depicted as being provided by two

interacting housing components, namely, the front cover 104 and the rear cover 102, it is contemplated that additional covers, or portions of the housing, may be provided. When in use, the rear cover 102, front cover 104, parking meter components and bottom plate are coupled together and secured to the saddle plate 106 by a locking
5 mechanism. The locking mechanism may be provided by a single locking component securing all of the parking meter assembly components to the saddle plate. Alternatively, the locking mechanism may include a plurality of locking components. For example, one locking component may secure the rear cover 102, the front cover 104 and the bottom plate together, and a second locking component may secure the bottom
10 plate, and as such the rest of the parking meter assembly 101, to the saddle plate 106. The separate locking components may be operated or actuated individually. Although it is possible for the individual locking components to be operated individually, it may be desirable to operate all of the locking components together. As described further with regard to Figures 15 and 16, a locking mechanism may be provided that operates a
15 plurality of locking components from a single actuator, namely, a locking cylinder.

The rear cover 102 and the front cover 104 of the parking meter assembly 101 may provide a generally cylindrical appearance to or shape for the parking meter assembly. Although the appearance of the parking meter assembly 101 may be a design aesthetic that may be varied based on different design factors, a cylindrical appearance may
20 provide a more attractive parking meter assembly than a non-cylindrical assembly. In addition to providing a visually pleasing appearance, the cylindrical shape may improve the strength of the parking meter to withstand physical attacks since the cylindrical nature of the housing eliminates, or at least reduces, the number of corners in the housing, as a corner may provide a weak point. The front cover 104 may have a
25 recessed flat portion 114 that provides a location for user interaction. The recessed flat portion 114 may comprise an information area 116 for presenting information to a user as well as providing input controls for interacting with and controlling the parking meter assembly 101. The recessed flat portion may also include a payment area 118 for providing a plurality of different payment mechanisms. For example, a coin chute,
30 including an opening 120 for inserting coins into the coin chute, may be provided along with a card slot 122 for accepting payment via a magnetic stripe or chip card. The card

slot 122 as depicted is vertically-oriented. Optionally, the card slot may be horizontally-orientated and/or angled so as to shed away any water in the vicinity of the card slot (e.g., the card slot may be sloped downwardly in the direction away from the parking meter). The payment area 118 may also have an area 124 for making payment via a contactless payment device. The tap area 124 may include an industry-recognized logo and/or a message such as "tap here" for directing a user with respect to where the contactless payment device should be held to effect payment. The tap area 124 may also include one or more progress indicators, which may for example be a band of light emitting diodes (LEDs) 126 for providing an indication of the progress of the transaction, which may include color-based indications (e.g., green indicates a successful transaction). Although depicted as a separate tap area 124 in the payment area 118, contactless payment readers may be provided at other locations including, for example surrounding, or in close proximity to, the display 130, or on a lower non-vertical or angled surface 134 that provides a transition from the recessed flat portion 114 to the cylindrical perimeter of the front cover 104. The contactless payment readers and/or antennas therefor may alternatively be mounted such that they are attached to or mounted on top of a surface of the housing, such as on top of one or more surfaces of the front cover as opposed to being flush mounted and/or hidden behind a front cover surface(s). In this regard, a number of locations for the contactless payment reader and corresponding antenna are possible. For example: a self-contained contactless payment reader device, such as an after-market contactless payment reader device may include a built-in antenna, and may be located or mounted either behind the front cover surface or on top of the front cover surface; or, alternatively, a contactless payment reader device may be physically separate from but connected to its corresponding antenna, and either one or both of the reader and the antenna may be located or mounted either behind the front cover surface or on top of the front cover surface (such that if the antenna is mounted externally and the reader is mounted internally, there would be a connection between the two through the front cover). For instances where the contactless payment reader and/or antenna are mounted on the surface of the front cover, they may be mounted by way of bolt and/or adhesive, and the may be protected by suitable plastic or other protective covering for protection against

vandalism and the elements. In the case of a contactless reader mounted on the surface of the front cover, it may extend outwardly from such surface or sit higher on the surface. The front cover 104 may be made from a polycarbonate copolymer resin, which may be substantially transparent to radio frequency (RF) signals, allowing greater flexibility in where the tap area for the contactless payment reader may be located. In addition, and depending on the layout of components, either the information (or user interaction) area 116 or payment area 118 may include a keypad (not shown) for entering information, such as a PIN or license plate number for carrying out transactions. Further, the recessed flat portion 114 that provides a location for user interaction may be illuminated with one or more lights (not shown), such as LED-type lights, that may be positioned at or near where the top of the flat portion 114 transitions from the recessed flat portion 114 to the cylindrical perimeter of the front cover 104.

As depicted in Figure 1, the information area 116 may include one or more input controls 128 for interacting with and controlling the parking meter. For example, the input controls 128 may include buttons for increasing and decreasing an amount of time to be purchased, an OK button, a cancel button and one or more additional input controls which may be used for navigating one or more options or menus presented on a display 130. For example, if the parking meter is for two parking spots, left and right buttons may be included so that a user may indicate which spot he/she is paying for. Individual buttons may alternatively be combined into a keypad array, arranged horizontally above or below the user display or vertically to the left or right of the display.

The individual buttons and/or individual keys of a keypad array may use piezo-style switches, buttons or actuators, which are substantially or fully sealed from external environmental elements, thus making them advantageous for use in outdoor equipment. The keypad array may provide an electrical interface in the form of one or two conductors for each normally open or normally closed piezo-style switch, button or actuator in the array. Alternatively, to reduce the number of conductors, the keypad array electrical interface may use a circuit that implements a one, two or three-wire communications protocol, such as inter-integrated circuit (I2C) bus, serial peripheral interface (SPI) bus, or a custom protocol. In this regard, the number of input/output

(I/O) lines or conductors required to detect switch states may be reduced or minimized. This form of electrical interface provides improved flexibility, as a keypad array with just a few buttons can use the same electrical interface as a keypad array with many buttons. For example a two-button, a six-button, or a 40-button keypad array could all
5 be implemented using the same electrical interface. Further, reducing the number of conductors as described may also advantageously free up I/O on a meter's controller, and/or use an existing bus already used by the meter to manage other peripherals.

In addition to the display 130 for presenting information to a user, the information (or user interaction) area 116 may further include one or more status LEDs 132 for
10 communicating a status of the parking meter at a distance. For example, the status LEDs may be used by parking enforcement personnel to determine which parking meters have expired time, have purchased time remaining, are malfunctioning, etc. without having to closely inspect the meter. The status LEDs may employ one color or more than one color in order to convey one or more statuses to parking enforcement
15 personnel with respect to the parking meter, which, for example, may be a parking meter for a single parking spot or two parking spots. It is possible to replace the status LEDs 132 with other indications that can be understood from a distance, such as flashing of the display, or magnetic "flip dots". However, the status LEDs, particularly when flashing a low duty cycle, draw relatively very little power, and as such are
20 preferable for remaining on for long periods of time, whereas powering the relatively large display 130, even if only flashing, may consume a significantly greater amount of power. Additionally, although depicted as separate display and input components, it is contemplated that the input controls 128 and the display 130 may be provided by a single touch screen display, which may or may not provide color graphics. Although
25 different types of touch screen sensors may be used, the chosen technology would preferably offer relatively low power consumption, which preferably allows the touch screen sensor circuits to remain active during operational periods, even when the main display is off, so that any tap or touch to the display screen by the user will activate the meter. A touch screen display may allow some or all other user input controls to be
30 eliminated. Alternatively, an additional touch or proximity sensor located anywhere on the meter front surface that has a relatively low power consumption may be used to

detect an initial user proximity or interaction with the parking meter, which may permit the parking meter to power on additional components such as the touch screen display. The touch screen sensor would preferably be robust, resistant to abuse and vandalism, and function reliably in outdoor environments, including extreme heat and cold, as well as with a gloved finger. Although not depicted in the Figures, the parking meter may comprise a printer, including paper roll, and opening in the front cover for dispensing receipts for users upon payment of parking time.

As is well understood, single space parking meters are powered by one or more internal battery packs. The batteries may be supplemented, and/or charged, by a solar panel 136. Although other positions are possible, locating a solar panel 136 at the top of the parking meter assembly is a desirable location. While the solar panel 136 is depicted in the Figures as being in a fixed, forward sloping orientation, it will be appreciated that the cylindrical shape of the exterior housing allows for an adjustable solar panel assembly that can be rotated at the time of installation such that the solar panel may be orientated to point in any direction. Typically, the direction to be pointed is due south for the northern hemisphere. The adjustable solar panel assembly may be allowed to be adjusted to any one of two or more vertical slopes or angles relative to the horizon. Although not depicted in the Figures, the solar panel 136 at the top of the meter may also be optionally augmented with one or more additional flexible type solar panels attached to the exterior of the smooth cylindrical surface of the rear cover 102.

Figure 2 depicts a rear isometric view of a single space parking meter. The parking meter 100 comprises the rear cover 102, which may be a generally smooth cylindrical extrusion. The rear cover may include one or more rear status LEDs 204. The rear status LEDs 204 may serve a similar purpose as the status LEDs 132 located on the front cover 102. The rear status LEDs 204 allow a parking enforcement agent to determine the status of the parking meter from a distance. Further, one or more of the front or rear status LEDs may be dual color type, such that the LEDs may be powered by the meter control circuits and may illuminate as either red or green in colour in order to indicate a space is either expired or paid, respectively. In this fashion the parking status of a single space or multiple spaces may be readily discerned by a parking attendant

observing the front or rear LEDs. While not depicted, the rear cover may also provide a clear widow that allows two or more brightly coloured and/or highly visible enforcement “flip-dots” (also known as “flip-discs”). The “flip-dots” may be magnetically energized, and each individual “flip-dot” may have a different colour on each side of it. A particular
5 colour serves to represent a particular status of a specific parking space managed by the meter. Such “flip-dots” may be easily visible from enforcement vehicles or by walking parking attendants even in bright sunlight.

Figure 3A depicts a front isometric view of the parking meter 300a with the meter mechanism fully removed. Figure 3B depicts a front isometric view of the parking meter
10 300b with the meter mechanism partially removed. As depicted, the parking meter assembly 101 may be comprised of two sub-assemblies, namely, a front assembly 302, and a rear assembly 304. The rear assembly 304 may be secured to the saddle plate 106 as described in further detail with reference to Figures 5 to 9. The rear assembly 304 may comprise a bottom plate 306 and the rear cover 102, which may be secured to
15 the bottom plate 306. The bottom plate 306 may be permanently, or semi-permanently, attached to the coin vault housing 108 or saddle plate 106. The front assembly 302 may be slidably engageable with the rear assembly 304 to allow the front assembly 302 to be removed from the rear assembly. As depicted, the front assembly 302 may be fully removed (Figure 3A), or partially removed or partially installed (Figure 3B). That is,
20 the front assembly 302 may engage with and slide down or up rails or profiles of the rear assembly 304 in order to secure the front assembly 302 to the rear assembly 304. In this regard, the front assembly 302 may comprise rail guides that engage with the rails of the rear assembly 304. The rail guides of the front assembly 302 may be formed as part of the front cover 104, or may be provided as separate components that may be
25 attached to the front cover 104. It will be appreciated that the opposite configuration – i.e., rail guides on the rear assembly and rails on the front assembly – may also be possible, and that the variations and embodiments described herein may similarly be reverse vis-à-vis the front and rear assemblies. Additionally or alternatively, the front cover of the front assembly may include side edge surfaces that provide a bearing
30 surface that in conjunction with bearing surfaces of an internal structure of the front assembly capture the rails of the rear assembly and allow the front assembly to slide up

and down the rear assembly.

The front assembly 302 may be locked to the rear assembly 304 using a locking mechanism, which may be operated via a keyhole 202 in the rear cover 102 as depicted in Figure 2. The locking mechanism may be affixed to the rear cover and engage with
5 and secure the front cover in the locked position, or alternatively the locking mechanism may be affixed to the front cover and engage with and secure the rear cover when in the locked position. The front assembly 302 may be removed and replaced as a complete assembly, for example, by fully raising or lifting the front assembly vertically until its
10 bottom end clears the rails of the rear assembly. Partially or fully raising the front assembly 302 from the rear assembly 304 may be done to, for example, inspect components or perform routine maintenance such as replacing batteries or clearing card reader or coin chute blockages. The rails may provide a spring-catch assembly (not shown) that allows the front assembly 302 to be lifted and held at any one of
15 multiple partially raised positions which allows hands free service work and testing of the meter to be carried out while in the partially raised or lifted position. Releasing the spring-catch would release the front assembly 302 allowing it to freely slide up or down on the rails or profiles. Alternatively, the front assembly 302 may be raised to a first position such that the rail guides of the front assembly 302 may be released from the rails of the rear assembly 304 at this first position, while the bottom of the front
20 assembly 302 remains engaged with the rear assembly. Under this alternative configuration, there would also be a hinge, such as a telescoping or folded metal rod, located at a release point. For example, the hinge may be fixed at or near the top of the front assembly at one of its ends (such as at or near the top of the rail guides) and at the other end fixed at or near the top of the rear assembly (such as at or near the top of
25 the rails). Releasing, separating or detaching the front assembly from the rear assembly at the release point allows the hinge to unfold or extend to a stopping point and the front assembly to tilt forward to a non-vertical or horizontal position. The bottom of the front assembly that remains engaged with the bottom of the rear assembly is pivotably configured at such bottom location so as to allow the front assembly to rotate
30 forward from its vertical position to the more horizontal position. Such pivotable configuration may require that the rail guides at the bottom of the front assembly be

partially releasable or hinge-able relative to the bottom of the rails and/or bottom of the rear assembly in order to allow for the rotation of the front assembly. Such rotation, which involves pivoting or hinging about an axis at the bottom location, thus allows for the back side or internally-facing components of the front assembly to be exposed for service work. The ability to raise the front assembly in this regard is advantageous for more openly exposing some or all of the internal parking meter components as compared with traditional single space parking meters. This may make repair, servicing and/or replacement of such components easier and/or quicker. With respect to the coin chute, a mirror (not shown) may be positioned just above a coin inspection slot or opening for the purpose of facilitating or making easier the inspection of the coin chute for blockages. Alternatively, payment devices may have quick release knobs allowing them to be disengaged from a normally fixed/rigid position on the front cover, such that they can be quickly and easily inspected, serviced and/or removed without the use of tools.

Figure 4 depicts a front isometric view of a coin vault assembly 103. The coin vault assembly 103 may comprise a coin vault housing 108 and retrofit saddle plate 106. A parking meter assembly may be engaged to the coin vault assembly. The saddle plate 106 and bolts 402 allow a parking meter mechanism to be connected to existing coin vault housing 108. The saddle plate 106 can provide flexibility in designing the parking meter mechanism since it does not need to be received within, or otherwise mate with, an existing lower housing. The saddle plate 106 further allows new parking meter designs, such as the parking meter assembly 101 described herein, to operate with existing coin vault housings 108, which is beneficial since cities and municipalities, or other purchasers of parking meters, may have invested in collection equipment, such as coin carts, as well as training of coin collection agents regarding collection methods. Accordingly, it is desirable to allow new parking meter designs to function with existing coin vaults.

A bottom portion of the saddle plate 106 is adapted to fit over a top of the coin vault housing 108. In this regard, the saddle plate has a lower profile 404 that generally matches the profile of the coin vault housing. The lower profile 404 includes a cutout to

allow a door (not shown) to the coin vault housing, which would be located at opening 110, to open and close thereby permitting insertion and removal of a coin vault or canister. The saddle plate 106 further comprises an upper profile 406 that generally matches a lower profile of the parking meter assembly 101. As described above, the parking meter assembly is generally cylindrical in shape, and as such the upper profile 406 of the saddle plate 106 is generally circular. The saddle plate 106 may provide a smooth transition between the lower profile 404 and the upper profile 406. In addition to providing an appealing visual appearance to the parking meter, the transition that the saddle plate may provide may also reduce potential areas of attack by vandals by presenting a smoother exposed surface.

Existing coin vault housings generally conform to a common bolt pattern used for securing a traditional lower housing to the coin vault housing. The upper surface of the coin vault housing 108 also includes a coin opening 412 through which coins can enter the coin vault housing 108. Above the coin vault housing 108, coins may pass through a corresponding coin opening 414 in the saddle plate 106. The coin vault housing 108 further has an upper surface that includes a plurality of threaded holes 410. The saddle plate 106 may include a plurality of matching holes 408 that align with the threaded holes 410 of the coin vault housing to allow the saddle plate 106 to be rigidly connected to the coin vault housing 108. It will be appreciated that while the saddle plate may be removed from the coin vault housing 108, such removal is generally considered to be infrequent. The saddle plate 106 provides a securing mechanism for securing the saddle plate 106 to the coin vault housing 108. The saddle plate 106 also provides a securing mechanism that allows the parking meter assembly 101 to be secured to the saddle plate 106, and as such to the coin vault housing 108. Although described above as two separate securing mechanisms, the two securing mechanisms may be inter-related. For example, as depicted in Figure 4, the saddle plate 106 may be secured to the coin vault housing 108 using a plurality of bolts 402. Each of the bolts 402 may comprise a threaded portion 416 and a non-threaded portion 418 that provides a shoulder extending radially past the threaded portion 416 as depicted in Figure 4. The bolts may be inserted through the holes 408 in the saddle plate 106 and threaded into the threaded holes 410 of the coin vault housing 108. The larger non-threaded shoulder

portion 418 acts as a bolt head in securing the saddle plate 106 to the coin vault housing 108. The non-threaded shoulder portion 418 that acts as a bolt head also provides a standoff with respect to a larger diameter head 420 of bolt 402. The larger diameter head 420 may pass through corresponding large diameter holes in the bottom plate 306 of the parking meter assembly 101. Details regarding the bottom plate 306 are discussed below with respect to Figures 8 and 9. By placing the parking meter assembly 101 on the saddle plate 106, and twisting or rotating the parking meter assembly 101, which includes the bottom plate 306 of such assembly 101, the standoff non-threaded portion 418 of the bolts 402 may enter a smaller diameter or spaced opening of the bottom plate 306 that is connected to the larger diameter opening. The combination of the larger diameter head 420 and smaller opening will, as a result, prevent retraction or lifting of the parking meter assembly 101, including bottom plate 306. Accordingly, the bolts 402, in cooperation with matching components such as threaded holes and appropriately sized openings in the bottom plate 306 of the parking meter assembly 101, may provide both the securing mechanism for securing the saddle plate 106 to the lower housing 108 as well as the securing mechanism for securing the parking meter assembly 101 to the saddle plate 106. Securing the parking meter assembly 101 as a whole to the saddle plate 106, and having the ability to easily or quickly remove the parking meter assembly 101 as a whole from the saddle plate 106, all as described herein, is advantageous in that the typical approach of leaving behind a traditional lower housing with exposed metal edges may be avoidable.

In the alternative to having the parking meter assembly 101 be placed on the saddle plate 106 and twisted or rotated so as to prevent retraction or lifting of the parking meter assembly 101, including bottom plate 306, the parking meter assembly 101 may be secured to the coin vault housing 108 using other fastening techniques such as screws or bolts, wherein the bottom plate 306 is not rotatable in the manner as described above. In this regard, the parking meter assembly 101, including bottom plate 306, may be permanently, or semi-permanently, attached to the coin vault housing 108.

Figure 5 depicts the coin vault assembly 103 comprising the retrofit saddle 106 attached to the coin vault housing 108. As depicted, the bolts 402 may be threaded into the

threaded holes of the coin vault housing, and the shoulders of the non-threaded portions of the bolts 418 also secure the saddle plate 106 to the coin vault housing 108. Once fully threaded into the threaded holes of the coin vault housing 108, the non-threaded portions of the bolts 418 stand off from the saddle plate and allow a bottom
5 plate to capture the non-threaded portion 418 in an opening. The large diameter head 420 of the bolts 402 prevents the bottom plate from being withdrawn from the saddle plate 106, including from the bolts 402. The securing mechanism for securing the parking meter assembly 101, including in particular the bottom plate 306 of the parking meter assembly 101, is described in further detail with regard to Figures 6 to 9.

10 Alternatively, the coin vault assembly may be provided without the saddle plate. By way of example only, bolts 402 as described above may be secured to the coin vault housing 108, and the parking meter assembly, including bottom plate, rear cover and front cover, may be coupled to the bolts and coin vault housing in the manner described herein. Such a parking meter assembly may or may not take a cylindrical form. Further,
15 although referred to as a coin vault assembly, it is possible to provide an assembly that allows a parking meter assembly to be secured to a post or other structure without providing an actual housing for a coin vault. Such assemblies may be useful to allow cities or municipalities to provide similar parking meters, some of which include coin vaults and some of which do not include coin vaults. Having a mix of parking meters
20 available may be useful for addressing areas of high vandalism or theft.

Figure 6 depicts an isometric view of a rear assembly. The rear assembly 304 may comprise the rear cover 102 described above, which provides a portion of a protective housing for the parking meter, as well as the bottom plate 306. As described in further detail with reference to Figure 6, the rear cover 102 may be formed as an extrusion that
25 is cut to the required length and subsequently machined to provide the desired component. Alternatively the rear cover 102 may be formed from rolled and formed stainless steel. As depicted, the extrusion may include a plurality of extended cylindrical portions 604 that extend down a length of the rear cover. The extrusion may be machined to remove an upper most portion from the extended cylindrical portions 604.
30 A bolt (not visible in Figure 6) may extend through the bottom plate 306 and the

extended cylindrical portions 604. A nut 606 may be used to secure the bolt. With the bolt secured within the extended cylindrical portion 604, the bottom plate 306 may be secured to the rear cover 102. Alternatively a rear cover 102 formed from rolled and formed stainless steel may be welded to the bottom plate 306.

5 Figure 7 depicts an isometric view of the rear cover. As depicted, the rear cover 102 may be formed as an extrusion that has been machined to provide additional features. The machining may include boring a hole for a lock as well as machining a location for the rear status LEDs 204. The extrusion of the rear cover 102 includes rails, protrusions or similar structures 702 that the front assembly can engage with, and slide
10 up and down on. The rails 702 may be located on the circumferential ends of the semi-circular rear cover 102. As depicted in Figure 7, the extended cylindrical portions 604 may comprise a slit running the length of each extended cylindrical portion 604. The slits allow the rear cover 102 to be formed as an extrusion. An upper portion 704 of the rear cover extrusion is machined to remove an upper portion of the rails 702 and an
15 upper portion of the extended cylindrical portions 604. The machining of the upper portion 704 of the rear cover allows the front assembly 302 to be received within the rear cover 102. While a rear cover formed as an extrusion as described above may include formed rails 702 that the front assembly can engage with, it should be recognized that equivalent rails, protrusions or structures can be created using a rear
20 cover created from formed and folded stainless steel, or injection molded high strength plastic or polycarbonate co-polymer resins. Injection molded covers may include one or more formed vertical channels around the inside perimeter of the cylindrical wall which may accept hardened reinforcing rods that extend from the bottom plate up to the top of the cylinder. The vertical channels may take the form of extended cylindrical portions
25 604. The reinforcement rods may be used to augment the high strength housing, and act as a deterrent to vandal attack using hack saws, or other common cutting tools. Similar reinforcements may be applied to injection molded covers or housings in strategic areas, such as connection points, surrounding openings, or in likely points of attack by vandals. The reinforcing metal components may be inserted into formed
30 channels, pockets, or similar structures for receiving the reinforcing components. Additionally or alternatively, the reinforcing metal components may be incorporated into

the injection molded covers using an over molding technique.

Figure 8 depicts a rear isometric view of the bottom plate. The bottom plate 306 includes a plurality of key holes 802a, 802b, 802c, 802d (referred to collectively as key holes 802) that allow the bottom plate 306 to be secured to the saddle plate 106. Each
5 of the key holes 802 comprise a large diameter opening 804 and an extended opening of a smaller diameter 806 connected to the large diameter opening 804. It is noted that the large diameter opening 804 and smaller diameter opening are only labeled for key hole 802b for simplicity of the Figure. As described above, the saddle plate 106 may be secured by bolts 402 that have a non-threaded portion 418 extending away from the
10 saddle plate 106 when secured and a large diameter head 420. The large diameter head 420 of the bolts 402 can pass through the large diameter opening 804 of the key holes 802. The bottom surface of the large diameter head 420 passes over, although it may contact, the upper surface of the bottom plate 306 in the region of the key holes 802. When the bottom plate is rotated or twisted in a clockwise direction, the non-
15 threaded portion 418 of the bolts 402 enters into the extended smaller diameter opening 806 of the key holes 802. Since the larger diameter heads 420 of the bolts 402 are larger than and therefore cannot pass through the smaller diameter openings 806 of the key holes 802, the bottom surfaces of the large diameter heads 420 engage with the upper surface of the bottom plate in the vicinity of the key holes 802 and secure the
20 bottom plate 306 to the saddle plate 106. The upper surface of each of the key holes 802 may be machined or tapered such that the overall thickness at the end of the extended opening of a smaller diameter 806 that is away from the large diameter opening 804 is higher than at the start of the extended opening of a smaller diameter 806 (i.e., the end of the extended opening of a smaller diameter 806 that meets the
25 large diameter opening 804), such that as the bottom plate is rotated or twisted in a clockwise direction, any clearance gap between the bottom surfaces of the large diameter heads 420 and the upper surfaces of the keyholes 802 is eliminated or minimized at or near the end of the clockwise rotation. The bottom plate 306 may be secured to the rear cover 102 by bolts or rods extending through mounting holes 808a,
30 808b, 808c, 808d, 808e, 808f (referred to collectively as holes 808). The holes 808 may have a recess for receiving a lower portion of the injection molded or extruded features

of the rear cover 102. The bottom plate may include a raised lip 814 at the front to provide a secure mating surface at the bottom of the front cover of the front assembly. The bottom plate may further include a coin opening 818 that aligns with the coin opening 412 of the coin vault housing 108. The bottom plate is depicted with large
5 openings 820a, 820b, which may simply reduce an amount of material required for the bottom plate. The bottom plate 306 may further include a securing component used to secure the front assembly to the bottom plate, and as such to the rear cover and rear assembly as a whole. The securing components may comprise elevated overhangs 816a, 816b that can engage with a corresponding finger, bar or similar structure of a
10 lock to prevent vertical movement of the front assembly relative to the rear assembly, including relative to bottom plate 306. A particular lock is described further with reference to Figures 15 and 16.

As described above, the rear cover may include rails, protrusions or similar structures that can engage with corresponding features of the front assembly. Accordingly, the
15 front assembly may be engaged to the rear cover 102 by sliding the front assembly down the rails 702 of the rear cover. The rear cover 102 may be secured to the bottom plate 306 by bolts or threaded rods extending through the extended cylindrical portions 604 on the interior of the rear cover 102. Alternatively, the bottom plate 306 may be welded to the rear cover 102. The bottom plate 306 may be secured to the saddle 106
20 plate by a twist or rotation lock mechanism on the extended bolts 402 securing the saddle plate 106 to the coin vault housing 108. Accordingly, if the bottom plate 306 is prevented from rotating, the bottom plate 306 and the attached rear cover 102 will not be able to be removed from the saddle plate 106 and coin vault housing 108. Further, if the front assembly 302 is prevented from being slid vertically on or along the rear cover
25 rails 702, the entire parking meter assembly 101 will be rigidly secured to the existing coin vault housing 108.

While the above has described the bottom plate 306 as being secured to the saddle plate, or bolts securing the saddle plate to the coin vault housing, it is contemplated that the bottom plate 306 may be secured to a coin vault assembly that does not include a
30 saddle plate in a similar manner. Further, the bottom plate may be secured to a

mounting assembly, which may provide the same or similar mounting points as the coin vault assembly for engaging with the parking meter assembly; however, the mounting assembly may not include a coin vault housing.

Figure 9 depicts a top view of the rear cover 102 and bottom plate 306 secured to the saddle plate 106. As depicted in Figure 9, when the bottom plate 306 is rotated or twisted in the clockwise direction, the large diameter heads 420 of the bolts 402 secure the bottom plate 306 to the saddle plate 106. The nuts 606 secure the bolts passing through the extended cylindrical portions 604 of the rear cover 102 to the bottom plate 306. The rail like structures 702 upon which the front assembly may slidably engage are depicted in the Figure.

Figure 10 depicts a rear isometric view of the front assembly. The front assembly 302 may provide a removable parking meter mechanism. The front assembly 302 comprises a front cover 104 and attached parking meter components. The front assembly 302 may include rail guides 1004 that engage with the rails 702 of the rear cover 102. The rail guides 1004 of the front assembly 302 may be formed as part of the front cover 104, or may be provided as separate components that may be attached to the front cover 104. If provided as separate components, the rail guides 1004 may be formed from metal and secured to the front cover by screws or bolts. In addition to providing a strong connection to the rear assembly, the engagement of the metal rails 702 with the rail guides 1004 may provide additional strength against vandalism. The front assembly 302 comprises a plurality of parking meter components mounted, either directly or indirectly, to the front cover 104. The parking meter components comprise a coin chute component 1006 that can discriminate a value of a coin inserted into the parking meter mechanism. The parking meter components may also comprise a magnetic stripe and chip card reader 1008, as well as a contactless payment reader 1010 for carrying out transactions. An inner frame 1012, which is depicted in greater detail in Figures 12 and 13, is mounted to the front cover 104 and may be used to mount electronic components, including, for example, a main processing board comprising a processor and associated memory for storing and executing control code to provide the desired software functionality of the parking meter. As well, a radio

module or modem may be mounted to or in the vicinity of the inner frame 1012. A battery compartment 1014, described in further detail with reference to Figure 14, may be pivotally connected to the inner frame 1012. The battery compartment 1014 may include a main battery compartment (not visible in Figure 10) and rechargeable battery
5 compartment 1016. The pivotally connected battery compartment 1014 may be secured in the position depicted in Figure 10 by clasps or similar structures. The battery compartment 1014 may be released from the inner frame 1012, and so rotated outwards to allow replacement of the batteries, by pressing release tabs 1018. The front assembly 302 may further include a radio transceiver 1020 as well as a solar panel
10 136 located at the top of the front assembly 302. Further, the front assembly 302 may include a locking mechanism 1022 for securing the front assembly to the rear assembly 304, as well as for preventing the joined front and rear assemblies from rotating when connected to the saddle plate. Alternatively, the rear assembly 304 may include the locking mechanism 1022 for securing the front assembly 302 to the rear assembly 304,
15 as well as for preventing the joined front and rear assemblies from rotating when connected to the saddle plate.

Figure 11 depicts a rear isometric view of the front assembly's front cover or housing. The front cover 104 may be formed from plastic or other high strength materials, including, for example, metals or alloys. Advantages of high strength plastic include
20 lower interference with wireless communications from the parking meter and stronger protection of internal components (as compared to prior parking meters that included antennas with no high strength housing protection). The front cover 104 may be molded or otherwise machined to provide the exterior surface, as well as to provide a plurality of mounting points for connecting the parking meter components. The front
25 cover 104 if injected molded using high strength plastic formulations, may include strategically placed features or projections on the inside surfaces for the attachment of steel rod or sheet metal which may provide additional vandal resistance against common cutting tools. In addition, the injected molded plastic formulations may include a mixture of small glass or ceramic beads providing anti-drilling protection. The front
30 cover 104 may include rearward projecting protrusions 1102 that may extend toward the rear cover. The rearward projecting protrusions 1102 may provide screw or bolt holes

for securing a lock plate, described further below with particular reference to Figures 15 and 16. The front cover 104 may include a recess 1104 at the top of the front cover 104 for receiving a solar panel. The solar panel recess 1104 may include a secondary radio antenna recess 1106 located towards the front of the front cover 104. The radio antenna recess 1106 may provide a location for a flexible antenna that may be used for various communications, including for example cellular data communications related to authorization of payment transactions, verification of parking meter status, and/or updating of parking meter functions. Preferably, the antenna is located at or close to the curved inner surface of the front cover 104 within the recess 1106. Alternatively, the antenna may be integrated into or surface mounted to the top facing surface of the solar panel. The solar panel recess 1104 and radio antenna recess 1106 may be fixedly part of, or rigidly attached to, the front cover 104, or, alternatively, the solar panel recess 1104 and radio antenna recess 1106 may be removable components that are replaceable in the field. The solar panel may optionally be covered with a transparent material that may be applied after the solar panel is received in the solar panel recess. Also, the solar panel may be permanently sealed or glued in the recess using an adhesive, such as a 3M adhesive gasket. In the alternative, the solar panel 136 may be provided in a solar panel assembly or module that slidably engages with or is removably coupled or secured to the front cover 104, and further electrically engages with a battery of the parking meter when the solar panel assembly is fully engaged with the front cover. The solar panel assembly allows the solar panel to be replaceable/serviceable in the event of vandalism, failure or other damage. Such solar panel assembly may include the one or more lights, such as LED-type lights, that may be positioned at or near where the top of the flat portion 114 transitions from the recessed flat portion 114 to the cylindrical perimeter of the front cover 104. Such solar panel assembly may further include status LEDs or holes for permitting the visibility of such status LEDs. In addition to the alternative solar panel assembly, the radio antenna may alternatively be provided in a radio antenna compartment that slidably engages with or is removably coupled or secured to the front cover 104, and further electrically engages with the main electronics board when the radio antenna compartment is fully engaged with the front cover. This allows the radio and antenna combination to be quickly and easily swapped

out in the field for maintenance/service, to replace/inspect a SIM card, or to switch the meter from one cellular network to another alternative network that may have better coverage or signal strength than the original network. The inside surface of the front cover 104 comprises a number of mounting locations for other components. The mounting points may include, for example, a mounting location for display and input components 1108, a mounting location for a contactless reader 1110, a mounting location for a magnetic stripe and chip reader 1112 as well as a mounting location for a coin chute 1114. Although a specific molding of a front cover is depicted, it will be appreciated that the particular locations of the mounting points and other features may vary, and will depend upon the specific components incorporated into the parking meter.

Figure 12 depicts a front isometric view of the parking meter mechanism's inner frame. Figure 13 depicts a rear isometric view of the parking meter mechanism's inner frame. The inner frame 1012 may be mounted to the front cover in the display and input control mounting area 1108. The inner frame 1012 may include one or more expanded openings 1202, which may be shaped to allow different cable connectors to pass through, or may be oversized to allow different connectors to pass through. The inner frame 1012 may further incorporate standoffs 1204 or mounting points for securing main board electronics, or possibly other components, to the inner frame 1012. The inner frame 1012 may also include pivotal connection openings 1206 located on opposite side walls towards a lower end of the inner frame 1012. The pivotal connection openings 1206 may receive pivotal connection pins on the battery compartment and allow the battery compartment to pivot outwards about the pivot connection openings. The side walls of the frame also include slots or openings 1208 that engage with clasps on the battery compartment in order to prevent the battery compartment from pivoting outwards unexpectedly or unintentionally. The inner frame 1012 may include a rear status LED mounting location 1210 for holding rear status LEDs. Clear acrylic light pipes or alternatively a clear lexan material may be used in front of the rear as well as front status LEDs.

Figure 14 depicts a battery compartment housing. The battery compartment 1014 comprises a pair of pivot connection pins 1402 located on either side of the

compartment. The pivotal connection pins 1402 may be located on a depressible portion of 1404 of the sides of the battery compartment 1014. The depressible portion 1404 may be provided by cutout at least partially surrounding the pivot connection pin 1402, thereby providing a resilient hinge at an end of the depressible portion 1404. The
5 battery compartment 1014 may further comprise depressible release tabs 1018 on either side of the battery compartment 1014. The depressible release tabs 1018 may include outwardly extending clasps 1406 that can engage with openings 1208 in the side of the inner frame 1012. When pressed, the release tabs 1018 withdraw the clasps out of the openings 1208 of the inner frame 1012 to allow the battery compartment 1014
10 to pivot outwards. The battery compartment 1014 may include a main battery compartment 1410 for receiving a main power supply of the parking meter, as well as a secondary battery compartment 1016 for receiving a rechargeable battery that may be periodically charged by a solar panel. It will be appreciated that either battery compartment 1410 or 1016 may contain a battery that can supply power to the parking
15 meter. Further battery compartment 1410 may alternatively accept a rechargeable battery that may also be periodically charged by a solar panel.

Figure 15 depicts a locking mechanism. Figure 16 depicts components of the locking mechanism of Figure 15. The locking mechanism 1022 may be secured to the front cover 104 and used to secure the front assembly 302 to the rear assembly 304, and
20 also to prevent rotation of the rear assembly 304, and in particular to prevent rotation of the bottom plate 306, relative to the saddle plate 106. Alternatively, the locking mechanism 1022 may be secured to the rear cover 102 and used to secure the front assembly 304 to the rear assembly 302, and also to prevent rotation of the rear assembly 302. In particular, the locking mechanism 1022 in this regard may prevent
25 rotation of the bottom plate 306 relative to the saddle plate 106. As depicted, the locking mechanism 1022 comprises a lower lock plate 1506 that is secured to the front cover 104. The lower lock plate 1506 includes openings 1518a, 1518b through which the elevated overhangs 816a, 816b of the bottom plate 306 may be received. The lower lock plate 1506 comprises an upwardly turned portion 1508 that provides a mounting
30 location for other locking mechanism components, including a cylinder lock 1502. The cylinder lock has a rotating barrel that rotates when an appropriate key is turned. The

rotating barrel is attached to an actuating cam plate 1504 that rotates and extends or retracts locking arms 1514a, 1514b attached to the cam plate. It is noted that the connection between the rotating cam plate 1504 and the locking arms 1514a, 1514b is not depicted in Figure 15 for simplicity. A capture plate 1510 may be secured to the
5 upturned section 1508 of the lower lock plate 1506. The capture plate 1510 may have bent sections 1512 on either end of the capture plate 1510. When attached to the lock plate 1506, the capture plate 1510, and in particular the bent sections 1512, provide a guide channel through which the lock arms 1514a, 1514b may pass. The guide channels allow the locking arms 1514a, 1514b to move inwards and outwards when the
10 lock is turned. In Figure 15, the locking arms 1514a, 1514b are depicted in the locked position. In the locked position, horizontal surfaces of the locking arms 1514a, 1514b, which are parallel to the lower lock plate 1506, are located under lower surfaces of the elevated overhangs 816a, 816b and adjacent to openings 1518a, 1518b, respectively. With the locking arms 1514a, 1514b retained or secured under the elevated overhangs
15 816a, 816b of the bottom plate 306 of the rear assembly 304, the locking mechanism 1022, and the attached front assembly 302 become rigidly coupled to the rear assembly 304. As a result, vertical separation of the front assembly 302 from the rear assembly 304 is prevented. In addition to vertically securing the front assembly to the rear assembly, the locking mechanism 1022 also prevents rotation of the bottom plate 306
20 relative to the saddle plate 106, as openings 1516a, 1516b engage the large diameter heads 420 of the bolts 402, which are stationary relative to the locking mechanism 1022 of the front assembly 302 when fully inserted into and engaged with the rear assembly 304. In the unlocked position, the horizontal surfaces of the locking arms 1514a, 1514b as described above are retracted out from under the elevated overhangs 816a, 816b,
25 and as such the front assembly 302 may be slid vertically upward on or along the rear assembly 304, and in such situation the rear assembly 304 including bottom plate 306 may be rotated, thus permitting rotation of the full parking meter assembly 101. Having the ability to vertically slid the front assembly 302 alone in an upward direction when in the unlocked position is advantageous, as it allows, for example, maintenance
30 personnel access to the electronic and other components of the front assembly 302 in the event that repair or replacement is required, or inspection of components (such as

coin or card payment components) is desirable.

Although the locking mechanism described herein contemplates it being rigidly secured to the front assembly and engageable with the rear assembly, it will be appreciated that the opposite could be implemented, namely, a locking mechanism that is rigidly secured
5 to the rear assembly and engageable with the front assembly.

Although the locking mechanism is described herein with regard to an actuating cam plate 1504 that rotates and extends or retracts locking arms 1514a, 1514b attached to the cam plate to prevent or allow vertical movement of the front assembly 302 relative to the rear assembly 304, as well as to prevent or allow rotation of the bottom plate 306
10 relative to the saddle plate 106, it will be appreciated that alternative locking methods or mechanisms are possible. To prevent rotation, a locking mechanism will preferably cause interference between some or all of the parking meter assembly and the coin vault housing, e.g., interference between the bottom plate and the saddle plate. A plurality of methods or locking mechanism designs could be employed to achieve this.
15 For example, rotation of the bottom plate relative to the saddle plate can be prevented or allowed by manually engaging or disengaging a second, manually engageable set of locking arms during the retrofit process while the front assembly is elevated vertically relative to the rear assembly. Once manually engaged to prevent rotation, the front assembly can be lowered into place, and an additional and relatively simpler lock used
20 to prevent or allow vertical movement of the front assembly 302 relative to the rear assembly 304. Thus, the locking mechanism in this example comprises a manually engageable set of locking arms to govern rotational movement, and an additional lock to govern vertical movement.

Figure 17 depicts a method of retrofitting an existing parking meter. The method 1700
25 begins with removing all of the existing parking meter components from the coin vault housing (1702). This may include removing a front or upper housing that is secured to a lower housing. A removable meter mechanism may be removed from the lower housing and the lower housing may be subsequently removed from the coin vault housing. Once the existing parking meter is disassembled to the coin vault, a saddle

plate is connected to the coin vault housing (1704) and the retrofit parking meter may be coupled to the saddle plate (1706). The parking meter may then be locked (1706) to the saddle plate to prevent subsequent removal of the parking meter from the saddle plate and coin vault housing.

- 5 A parking meter assembly has been described above that engages with a coin vault assembly when a bottom surface of a protective outer covering of the parking meter assembly is positioned against or adjacent to an upper surface of the coin vault assembly. Although described above in detail, variations may be made to the above described parking meter assembly. For example, the display and/or user input buttons,
10 as well as the payment means, may be arranged in different configurations and/or locations, or using an alternative size or type of display, input means, or payment means. Additionally, the locking, or engaging mechanism securing the parking meter assembly to the coin vault assembly may differ from the rotationally engageable mechanism described above.
- 15 Figure 18 depicts a further bottom plate. The bottom plate 1800 may be used in the alternative to the bottom plate 306 described above. As described above, the bottom plate engages with the coin vault assembly to secure the parking meter assembly to the coin vault assembly. The above has described the bottom plate as engaging with the coin vault assembly by rotation. As depicted in Figure 18, other types of engagement
20 are possible. For example, the bottom plate 1800 provides a sliding engagement with the coin vault assembly. The keyhole openings 1802a, 1802b, 1802c, 1802d (referred to collectively as keyhole openings 1802) are arranged in the same orientation as each other. As such, when the bottom plate 1800 is placed over the large diameter bolt heads of the coin vault assembly, and the bolt heads pass through the large diameter openings of the keyholes 1802, the parking meter assembly with the bottom plate 1800
25 can slidably engage the bolts by sliding the parking meter assembly to the right (vis-à-vis Figure 18) such that the bolts will be positioned in the smaller diameter openings of the keyholes 1802. The bottom plate 1800 may be secured to the rear cover of the parking meter assembly in various ways, including nuts and bolts as described above
30 with reference to bottom plate 306. Alternatively, if the bottom plate is made from a

metal, it is possible to weld the bottom plate 1800 to the rear cover. Other types of connections are possible for securely attaching the bottom plate 1800 to the remainder of the parking meter assembly. Alternatively, the bottom plate and the rear cover, or other portions of a protective outer covering of the parking meter assembly, may be integrally formed as a single component. As described above, the parking meter assembly, which may include bottom plate 1800, may provide a protective outer covering to protect the internal parking meter components. It is possible to secure the parking meter assembly to the coin vault assembly by positioning a bottom surface of the protective outer covering against or adjacent to an upper surface of the coin vault assembly. The protective outer covering may then be slid in order to secure the parking meter assembly to the coin vault assembly.

Figure 19 depicts a further parking meter. The parking meter 1900 is similar to the parking meter 100 described above. In particular, a parking meter assembly providing a protective outer covering to internal parking meter components includes a bottom plate for securing the parking meter assembly to a coin vault assembly. The protective outer covering may engage the coin vault assembly when a bottom surface of the protective outer covering is positioned against or adjacent to an upper surface of the coin vault assembly. Various components and features of the parking meter 1900 are substantially similar to those of parking meter 100 and, as such, the following description focuses on differences between the parking meters.

The parking meter 1900 provides a low-profile parking meter assembly 1901 that can be secured to a coin vault assembly, or similar structure. The parking meter assembly comprises an input area 1906 comprising a plurality of input controls 1902 arranged horizontally below a display 1904. It will be appreciated that other arrangements of input controls and/or displays are possible. Further, in order to reduce an overall height of the parking meter assembly 1901, the payment means are all located in the same general horizontal area located below the input area 1906. That is, the coin chute 1908 is located horizontally adjacent to the card slot 1910 for the card reader as well as a tap target, or antenna location, 1912 for the contactless payment reader. As depicted in Figure 19, the payment means 1908, 1910 and 1912 are generally horizontally aligned

with each other. This is in contrast to the coin chute 120 of parking meter 100, which is vertically offset from, and so not generally horizontally aligned with, the other payment means 122, 124. The parking meter 1900 may further comprise an overhead light 1914 projecting downwards from the front cover in order to illuminate at least a portion of the parking meter to facilitate user interactions in the evening or during dark periods. The parking meter may include a solar panel 1916 located at a top section of the parking meter. As described further below, the parking meter assembly 1901 may include an internal structure to which various parking meter components may be connected. A front cover 1918 may be secured to the internal structure and the internal structure and front housing 1918 may slide up and down a rear assembly 1920 that remains fixed to the coin vault.

Figure 20 depicts a rear isometric view of the single space parking meter of Figure 19 with the parking meter mechanism partially raised. As depicted, a rear assembly 1920 can be secured to the coin vault 108 and saddle plate 1922. The rear assembly 1920 may comprises a bottom plate 1924 that can be secured to bolts securing the saddle plate 1922 to the coin vault housing 108 using a twisting motion to capture the bolts within narrowing openings in the bottom plate. A rear cover 1989 may be secured to the bottom plate 1924 using any number of fastening techniques such as welding, screws, bolts, etc. Although not visible in Figure 20, the rear assembly also includes a locking assembly that comprises a locking component that prevents rotation of the rear assembly 1920 relative to the bolts securing the saddle plate 1924 to the coin vault housing 108. As described above, bolt heads of the bolts cannot be withdrawn through the narrowed portion of the openings in the bottom plate, and, as such, when rotation of the rear assembly is prevented, removal of the rear assembly from the saddle plate and coin vault housing is also prevented. The locking assembly further comprises a locking component for preventing vertical movement of a front assembly 1926 relative to the rear assembly 1920 when engaged with the front assembly in a lowered position. When the vertical locking component is disengaged, the front assembly 1926 may be slid up and/or down the rear assembly 1920. The front assembly 1926 may be partially slid up the rear assembly 1920 to a service position as depicted in Figure 20 that allows for inspection and servicing of internal parking meter components. Although described as

sliding vertically to a service position, it is possible for other movements to be provided. For example, it is possible for the front assembly 1926 to slide vertically and then rotate or hinge so as to place the front assembly in an angled or at least partially horizontal position to facilitate servicing and inspections. The front assembly 1926 may be
5 completely removed from the rear assembly 1920 for replacement or other purposes.

As depicted in Figure 20, the front assembly 1926 may comprise the front cover 1918 which may be securely attached to an internal structure 1928. The internal structure 1928 and the front cover 1918 may provide mounting connections for securing various parking meter components to the front assembly 1926. The components may be
10 secured using a quick-connection type of mechanism that allows individual components to be moved for inspection and/or removed for servicing or replacing without requiring any tools for such moving and/or removal. The components may include a solar panel assembly or module that includes a solar panel 1916, a radio board component or radio antenna compartment 1930, a battery compartment 1932 (depicted with a battery), a
15 magnetic stripe and/or contact based card reader 1934, a coin chute 1936 and/or a contactless payment card reader and antenna 1938.

Figure 21 depicts an internal isometric view of a front cover of the single space parking meter of Figure 19. As depicted, the front cover 1918 may provide various mounting structures for securing various components, such as displays, main circuit boards, input
20 components, the internal structure, etc. to the front cover 1918. The front cover 1918 includes an upper portion 1940 where the solar panel assembly may be received. The upper portion may include a downward protrusion 1942 above a user interface panel to provide a housing for an LED to illuminate the user interface panel. The upper portion may also include a ridge 1944 for securely capturing the solar panel assembly when slid
25 into the upper portion 1940. The front cover 1918 may include two side edge surfaces 1946, 1948 that provide a bearing surface that in conjunction with bearing surfaces of the internal structure 1928 capture rails of the rear assembly 1920 and allow the front assembly 1926 to slide up and down the rear assembly 1920.

Figure 22 depicts a rear isometric view of an internal structure 1928 of the single space

parking meter of Figure 19. The internal structure may include various mounting points for securing components to the parking meter. As described above, individual components may be connected using quick-connect connections such as thumbscrews or similar friction type connections to secure the components in place. The internal
5 structure 1928 comprises a number of square openings 1950 that may receive capturing components that allow, for example, a thumbscrew to secure the component with a quarter turn. The internal structure 1928 includes two side edge surfaces 1952, only one of which is labeled, that provide bearing surfaces that cooperate with the bearing surfaces 1946, 1948 of the front cover to capture rails of the rear assembly
10 1920. The internal structure 1928 may also include an opening or section 1954 for receiving a cylindrical locking component used to secure the front assembly from vertical movement. A locking bar or rod 1956 is secured within the internal structure 1928 and may be captured by a hook (not shown) when the lock is engaged.

Figure 23 depicts a side view of the internal structure of Figure 22 attached to the front
15 cover of Figure 21. As depicted, when the front cover 1918 is secured to the internal structure 1928, the corresponding bearing surfaces 1946, 1952 of the front cover 1918 and the internal structure 1928, respectively, are in close proximity to each other forming a channel 1958. The channel 1958 captures a rail of the rear assembly 1920 to secure the front assembly 1926 to the rear assembly 1920 while allowing the front
20 assembly 1926 to slide up and down the rear assembly 1920.

Figure 24 depicts a top perspective view of removable components of the parking meter of Figure 19. As described above, the internal structure 1928 (not shown in Figure 24) and the front cover 1918 may provide mounting features to allow the payment components, such as coin chute 1936, card reader 1934 and contactless payment
25 reader 1938 to be releasably secured within the parking meter. As an example, the payment components may be secured to the front cover 1918 and internal structure 1928 using thumbscrews 1960. The thumbscrews 1960 allow the components to be easily disengaged from the meter housing or covering for inspection, service, or removal from the meter housing or covering if necessary. The thumbscrews 1960 may
30 be inserted through a capturing component on the internal structure and turned an

amount, such as a quarter turn, in order to secure the connection. For example, during routine maintenance on the street, a coin chute 1936 may be quickly replaced with another coin chute by unscrewing the thumbscrew or thumbscrews and removing the coin chute 1936. Additionally or alternatively, unscrewing the thumbscrew may allow the
5 payment component to be moved to a partially attached position which allows the payment component to be easily inspected while not being fully separated from the parking meter. For example, the payment components may be pivotally connected to the parking meter's front cover. Unscrewing the thumbscrew may allow the payment component to become partially disengaged from the meter housing or covering and
10 swing outwards into a disengagement position. Such a disengagement position may provide improved visibility for inspection and improved access for service without actual removal of the payment component from the parking meter. Once inspection or service has been completed, the payment component may be swung or rotated back to a fully engaged position and the thumbscrew re-attached to secure the payment device in the
15 fully engaged position. If upon inspection or servicing it is determined that the payment component should be replaced, it can be removed from the disengagement position and a replacement component secured to the parking meter.

Figure 25 depicts a detail perspective view of a removable contactless payment reader 1938. The removable contactless payment reader 1938 may include electronic
20 components, such as the reader circuitry and antenna secured to, or formed on, one or more boards 1962 that can be secured to a frame 1964. The frame 1964 includes a thumbscrew 1960 that can be used to secure the removable contactless payment reader 1938 in place. The frame 1964 includes a lower portion that has a protruding cylindrical portion 1966 that may act as a pivot point of the connection.

25 Figure 26 depicts details of the mounting of the removable contactless payment reader of Figure 25. The contactless payment reader 1938 is secured within the parking meter by a thumbscrew 1960 that secures the reader 1938 to the internal structure 1928. Additionally the cylindrical protrusion 1966 of the frame 1964 provides a second connection point that can help provide a secure connection of the removable
30 contactless payment reader to the parking meter. The cylindrical protrusion may be

partially secured against a retaining bar 1968 that may be secured to the parking meter, for example by screws or other attachment means. When the internal structure 1928, and front cover (not shown) are raised, the removable contactless payment reader 1938 may be removed by disengaging the thumbscrew 1960 and lowering the removable
5 contactless payment reader 1938 so that the cylindrical protrusion clears the retaining bar 1968 and the reader 1938 can be fully removed from the parking meter. The contactless payment reader 1938 may be partially disengaged from the internal structure by disengaging the thumbscrew 1960, but maintaining contact between the cylindrical protrusion 1966 and the retaining bar 1968. Such partial disengagement may
10 allow the component to be rotated for quick inspection. The component may then be easily re-secured to the internal structure 1918 by the thumbscrew 1960.

Figure 27 depicts a side view of the front cover, internal structure and solar panel assembly. The parking meter may include a solar panel that is located in a solar panel assembly 1970 that can be inserted into the front assembly 1926, and further electrically
15 engages with a battery of the parking meter when the solar panel assembly is fully engaged with the front assembly. This allows the solar panel assembly 1970 to be easily replaceable and/or serviceable in the event of vandalism, failure, or other damage or malfunction. The solar panel assembly 1970 may include the one or more lights 1972 that can be exposed through a small opening or downward protrusion 1942 in the
20 front cover 1918 for illuminating the user interface of the parking meter. The solar panel assembly 1970 may further include status LEDs or holes 1974 for permitting the visibility of such status LEDs. As depicted, the solar panel assembly 1970 may include a channel 1976 that matches with the ridge 1944 to secure the solar panel assembly 1970 within the front assembly 1926. Figure 27 also depicts rotatable battery
25 compartment 1932 as well as the card payment reader 1934.

Figure 28 depicts a side view of the front assembly and radio assembly (or radio communication component). In addition to the slidable solar panel assembly 1970 described above, the radio antenna of the parking meter may be provided in a radio antenna compartment or removable radio module 1930 that slidably engages with or is
30 removably coupled or secured to the front assembly 1926 and further electrically

engages with the main electronics board when it is fully engaged onto the front assembly. The radio antenna compartment 1930 may be secured in position by, for example, thumbscrews 1960. The radio antenna compartment 1930 comprises a housing 1978 that can enclose radio electronics such as radio transceivers. An electrical connector 1984 may be secured to the housing 1978 so that when the radio antenna compartment is slid into the front assembly, the electrical connector mates with a corresponding connection to establish power and data connections. This allows the radio and antenna combination to be quickly and easily swapped out in the field for maintenance/service, to replace/inspect a SIM card, or to switch the meter from one cellular network to another alternative network that may have better coverage or signal strength than the original network. The radio antenna compartment 1930 may include a metal ground plane 1980 above which an antenna board 1982 may be located. As will be appreciated, the metal ground plane may be used to provide desired radio frequency (RF) transmission performance from the antenna of the antenna board 1982. The radio antenna compartment 1930 may also include conductive sprays applied onto inside surfaces of the compartment for the purpose of shielding the radio and reducing spurious emissions. As depicted in Figure 29, the radio antenna board 1982 (as seen from above) may be contoured in order to follow the shape of the front cover 1918 in order to locate the antenna in a favorable location adjacent the front cover.

Figure 30 depicts a rear perspective view of the front cover, internal structure and locking assembly with the rear cover removed for visibility. The locking assembly comprises a cylindrical locking component 1984 that is secured to the bottom plate 1924. Upon rotation of the cylindrical lock, a hook bar 1986 rotates so that a hook portion captures a locking rod 1956 fixed within the front assembly 1926. By rotating the cylindrical lock 1984 to a locked position with the hook bar engaged with the locking rod 1956, the front assembly cannot be raised from the bottom plate, which in turn is secured to the coin vault assembly.

Figure 31 depicts a perspective view of the rear assembly. The rear assembly 1920 includes a rear cover 1989 that provides the rear portion of the protective housing. The rear cover 1989 includes two rails 1990, 1992 that can be received within the channel

1958 between the bearing surfaces of the front cover 1918 and the internal structure 1928 (as shown in Figure 23). The front assembly can be slid up and down the rails 1990, 1992. The rails may include an indent 1994 that can engage a releasable locking pin to maintain the front assembly in a partially raised position, such as that of Figure 20, to facilitate servicing and inspections. The rear assembly 1920 further includes the cylindrical lock 1984 and attached hook bar 1986 for securing the front assembly to the rear assembly and preventing vertical movement. The rear assembly further includes a second locking component 1995 that prevents rotation of the rear assembly 1920. As described above, the rear assembly may be secured to the coin vault housing by twisting the rear cover, and attached bottom plate, so that expanded bolt heads secured to the coin vault housing are positioned above a reduced-sized opening. The bolt heads in this position, in combination with the reduced-sized openings of the bottom plate, prevent the rear assembly from being lifted away from the coin vault assembly. As a result, the combination of the second locking component 1995 and bolt heads positioned above reduced-sized openings prevents withdrawal or removal of the rear assembly from the coin vault assembly and ensures the two assemblies are secured together. The second locking component or rotational lock 1995 comprises a locking arm 1996 pivotally connected to the bottom plate 1924. The locking arm 1996 includes two protrusions 1998, although other numbers of protrusions are possible, that when the locking arm is in a lowered locked position, protrude through openings in the bottom plate and are received in corresponding apertures in the coin vault assembly to prevent rotation. When in an unlocked position, the protrusions 1998 do not extend into the apertures of the coin vault assembly, and the rear assembly can be rotated such that the securing bolt heads of the coin vault assembly may be positioned within the expanded portions of the bottom plate openings. As such, the securing bolt heads can be lifted or withdrawn through the openings. Alternatively, the rear assembly may be secured to the coin vault housing using other fastening techniques such as screws or bolts, wherein the bottom plate is not rotatable in the manner as described above.

Figure 32 depicts a side perspective view of a portion of the coin vault assembly and a portion of the rotational lock 1995. The bottom plate is removed from Figure 32 to more clearly illustrate the interaction between the protrusions 1998 of the locking arm 1996

and apertures 2000 in the coin vault assembly. As depicted, the apertures are sized so as to prevent any substantial rotation of the locking arm 1996, and so the rear assembly to which the locking arm 1996 is secured. In addition to the protrusions 2000, the locking arm may include cam surfaces 2002 that bear against a mating surface 2004 of the coin vault assembly when in the locked position. The cam surfaces 2002 may provide an upward force to the rear assembly, which may provide a securing force against minor movement of the components.

Figure 33 depicts a rear perspective view of the internal structure 1928 and locking mechanisms 1984 and 1995. As will be appreciated from Figures 30 and 31, in order to secure the front assembly 1926 to the rear assembly 1920, the front assembly must be fully lowered so that the hook bar 1986 can engage with the locking rod 1956. In order to ensure that the rear assembly 1920 is secured to the coin vault assembly before locking the front assembly 1926 to the rear assembly 1920, the front assembly includes a housing section or structure 2006 that will prevent the front assembly from fully lowering unless the locking arm 1996 is in the fully lowered and locked position. The locking arm can only be in the fully lowered and locked position when the protrusions 1998 extend into the corresponding apertures. Accordingly, if the rear assembly has not been twisted to secure it onto the coin vault assembly, the locking arm cannot be fully lowered, and the front assembly will be prevented from being fully lowered into the lockable position. Accordingly, the two stage locking components interact to ensure that each lock is properly secured.

Figure 34 depicts details of service locks. As described above with reference to Figure 31, the rails 1990, 1992 upon which the front assembly slides up and down may include indents or notches 1994. Service locking bars 2008 may be pivotally connected to the internal structure 1928. The locking bars 2008 may include a biasing spring 2010 at one end of the locking bars 2008 to bias the locking bars 2008 into a locked position. The locked position forces the lower end of the locking bars which includes a foot protrusion 2012 into the rail's notch as it slides past. The notch 1994 and foot protrusions 2012 may have an angled surface to allow the foot protrusion to be forced out of the notch 1994 when sliding the front assembly upwards. However, a bottom of

the foot protrusions 2012 and notches may be relatively flat so that upon sliding the front assembly down the rails, the foot protrusions may engage with the notches 1994 to prevent further sliding down of the front assembly. The locking bars 2008 may be manually disengaged from the notches 1994 by pressing the spring biased portion
5 inwards to release the foot protrusions 2012 from the notches. In addition, and as discussed in greater detail above, the front assembly may be raised to a first position such that rail guides at the top of the front assembly may be released from the rails of the rear assembly at this first position, while the bottom of the front assembly remains engaged with the rear assembly. Under this configuration, there would also be a hinge,
10 such as a telescoping or folded metal rod, located at a release point, thus allowing movement or rotation of the front assembly so that even more convenient access to the internal components for servicing or removal is made possible.

As described above, the parking meter may include a radio frequency (RF) antenna for transmitting and/or receiving RF signals. In some embodiments, there may be a
15 plurality of RF antennas or RF transmitters in, on or at the parking meter. In this regard, such RF transmitters may comprise one or more of a near-field communication (NFC) reader, a Bluetooth radio, a ZigBee® radio, a WiFi® radio, and a cellular radio.

With respect to the WiFi radio, it may use a private communication channel, or any public or otherwise available hotspot for carrying out communications. For example, an
20 owner or operator of one or more parking meters may engage or contract with an Internet service provider (ISP) to provide for Internet access over WiFi for the parking meter(s). In one example, the arrangement with the ISP may involve the use of additional or secondary channels, such as secondary ISDN channels that may be referred to as “service flow” channels, associated with one or more WiFi routers located
25 within wireless communication range of the parking meter(s). Typically, the WiFi routers in this example are located at an ISP’s customer premises, and are such that they have the ability to concurrently route or support one or two additional or secondary non-overlapping and non-interfering ISDN service flow channel(s). The service flow channel(s) is in addition to the primary ISDN channel used by the customer, and all
30 channels use the same wire or other physical connection to the ISP’s network

equipment located outside the customer premises. The result is that the router acts as a secured WiFi hotspot for one or both of the two additional channels, and, in parallel, routes any associated data or traffic separately and independently from the data and traffic of the primary ISP customer. Use of one or more of the additional service flow
5 channels by a parking meter system operator establishes a connection between a parking meter and the Internet so that regular two-way flow of data between the meter and a backend meter management system is possible.

The foregoing describes one example of how a WiFi radio and communication system may be used; other approaches would be understood to be possible. Use of WiFi as
10 described or otherwise for parking meter communications may be advantageous, as purchasing or inclusion of additional hardware by parking meter vendors, installers or operators may be unnecessary. This is in contrast to cellular communications and other alternative ISM band solutions such as ZigBee where additional hardware may be required. In this regard, and by way of example, a transceiver or repeater with antenna
15 may need to be located relatively close to a parking meter, and may need to be mounted to a pole, building or other structure, which may further complicate installation and/or implementation of a parking meter system. In addition, use of WiFi as described or otherwise may be advantageous in that regulatory requirements (e.g., FCC requirements) may be less restrictive or onerous, the WiFi radios may be less
20 expensive than other radios, and the data transmission costs associated with cellular communications may be reduced or eliminated as a result of a greater amount of data being transmitted over WiFi as opposed to cellular. Further, with respect to the example approach described above, reliability of transmissions may be improved because of the use of a managed, secured and/or restricted Internet access point (as compared to a
25 public WiFi hotspot, which may be less reliable and/or provide poor performance due to heavy use or data loading).

In addition, the parking meter may include a low power and short range RF radio that is a Bluetooth® type radio, although other types of RF radios are possible, including, for example, WiFi, ZigBee, etc., as described above. More specifically, the low power and
30 short range RF radio may be a Bluetooth low energy (also known as Bluetooth LE, BLE

or Bluetooth Smart) radio, which provides lower power consumption than traditional Bluetooth but maintains a similar communication range. The RF radio may be mounted within the interior of the housing and may be constantly supplied with power, or supplied with power while there is sufficient power to power the RF radio. The housing, which
5 may be made either significantly or substantially of polycarbonate copolymer resin, will not significantly attenuate RF signals from the RF radio. Accordingly, the housing may provide flexibility in the placement and mounting of the RF radio within the meter interior. The RF radio may have an electrical connection, or interface, to the meter controller board allowing the constantly powered RF radio to notify or interrupt the
10 controller board, even if the meter is in a low powered or sleep state, as well as send and receive data and/or commands to and from the controller. By having the RF radio continuously powered, there is no need for a user having a mobile device to initially interact with the meter such as by pressing a user button, inserting a card, etc. in order to ensure the parking meter is in a wake, or operation, mode. Rather, the user, or more
15 particularly the user's mobile device communicating with the RF radio, may place the meter in the wake or operation mode.

The primary power source for the Bluetooth low energy radio may comprise one or more battery packs located inside the parking meter. A supplementary source of power for the Bluetooth low energy radio, and/or for other devices, components or circuits
20 within the parking meter, may comprise an alternative energy harvesting mechanism or device. For example, the parking meter may include an alternative energy harvesting mechanism or device that harvests energy from ambient RF signals, variations or differentials in nearby materials temperatures, and/or street vibrations. Energy harvested in this regard may be used to at least partially power the Bluetooth low
25 energy radio and/or other devices, components or circuits within the parking meter. Such supplemental power source may allow a device such as a Bluetooth low energy radio to be more autonomous from and self-sufficient relative to the primary parking meter power sources and circuits, including the one or more battery packs of the parking meter.

30 The RF radio device may be used to facilitate purchases of park time from mobile

devices or vehicles which have paired, or otherwise associated, with it. An associated mobile app may be used by the owner of the mobile device or vehicle to request and make the park time purchase. An identifier or name of the RF radio device in a particular meter being paired with, or otherwise associated with, the mobile device or
5 vehicle may be associated with the meter's location or an ID label found on the exterior of the meter housing. Such a visible identifier or name allows the mobile device or vehicle owner to visually check to ensure they are pairing with, or otherwise associating with, the desired meter from or within a group of nearby meters that may also be outfitted with RF radio devices and possibly be within reception range of the mobile
10 device or vehicle. The application on the mobile device may also provide the ability to scan or read barcodes, 2-D 'QR' codes, or RFID tags attached to the exterior of the meter, which can provide additional information about the meter including the meter location identifier or ID. Scanning a bar code, QR code or RFID tag may reduce the amount of user keyboard entry, thus speeding up the park time request process. The
15 owner of the mobile device or vehicle may have previously registered the mobile app and associated it with a payment means such as a credit or debit card or other financial payment means such as PayPal, Applepay, GoogleWallet or Android Pay.

Once the mobile app or vehicle has paired with, or otherwise associated with, the selected RF radio device in a given meter, the current meter parking rate information is
20 made available to the app, and the user completes their request for park time and confirms payment. Once payment is confirmed by the mobile app or vehicle, payment information, such as payment amount, park time, expiry time and/or authorization details may be provided from the app or vehicle to the meter via the RF radio device. The meter may then show paid status as well as the amount of park time purchased
25 and/or remaining.

The low power RF radio may also be used by parking authority meter repair staff (e.g., city or municipality staff) to interact with the meter using an app on their mobile devices, without the use of any other special service cards, pressing any buttons, or physically opening up the meter housing. The app may allow for meter diagnostics, meter data
30 collection, meter configuration, as well as repair staff time management. This alternative

meter communication channel is particularly helpful to parking authority meter repair staff if the meter's cellular radio is not functional or the meter is located in an area with particularly poor cellular coverage.

5 Although various individual features and/or functionality may have been described with reference to a specific embodiment, such features and/or functionality may be incorporated into other embodiments.

10 Parking meters for retrofitting to existing coin vault housings have been described by way of examples. It will be appreciated that components of one example may be incorporated into another example. For example, the use of polycarbonate co-polymer resin covers may be included in any of the examples described. Further, features such as quick-connections of individual components may be incorporated into parking meters of different structures. Similarly, other features such as the locking mechanism may be incorporated into parking meters that do not incorporate all of the other features of parking meter embodiments described above. Likewise, the service locks for securing a parking meter mechanism into a service position may be applied to other parking meter designs that do not incorporate all of the other features of parking meter embodiments described above. Although specific embodiments of a retrofit parking meter are described, it will be appreciated that other parking meter designs, including other parking meter components or configurations of parking meter components, may be implemented. Variations and modifications not described herein will be apparent to one of ordinary skill in the art having regard to the description herein.

15

20

WHAT IS CLAIMED IS:

1. A single space parking meter for retrofitting onto an existing coin vault housing, the parking meter comprising:
 - a saddle plate adapted to be received over a portion of the existing coin vault housing; and
 - a parking meter assembly comprising:
 - parking meter components for metering parking time;
 - a rear cover;
 - a front cover separable from the rear cover;
 - a bottom plate adapted to releasably secure to the saddle plate; and
 - a locking mechanism adapted to secure the front cover and rear cover together and secure the bottom plate to the saddle plate.
2. The parking meter of claim 1, wherein the rear cover is attached to the bottom plate to form a rear assembly.
3. The parking meter of claim 2, wherein the parking meter components are coupled to the front cover to form a front assembly.
4. The parking meter of claim 3, wherein the front assembly is slidably engageable with the rear assembly.
5. The parking meter of claim 4, wherein the rear assembly comprises one or more rails on which the front assembly is slidably engageable.
6. The parking meter of claim 5, wherein the one or more rails are located on edges of the rear cover.
7. The parking meter of any one of claims 4 to 6, wherein one or more rail guides of the front assembly are slidably engageable with the rear assembly.

8. The parking meter of claim 7, wherein the one or more rail guides of the front assembly are formed as separate components and attached to the edges of the front cover of the front assembly.
9. The parking meter of any one of claims 3 to 8, wherein the locking mechanism prevents the front assembly from sliding relative to the rear assembly when the locking mechanism is engaged.
10. The parking meter of claim 9, wherein the locking mechanism is attached to a lower lock plate attached to the front assembly.
11. The parking meter of claim 9, wherein the locking mechanism is attached to a lower lock plate attached to the rear assembly.
12. The parking meter of claim 10, wherein the bottom plate comprises an elevated overhang extending upwards through the lower lock plate when the parking meter is assembled, and wherein the locking mechanism comprises at least one moveable arm positioned under the elevated overhang in a locked position to secure the front assembly to the rear assembly.
13. The parking meter of any one of claims 9 to 12, wherein the saddle plate is secured to the existing coin vault housing using a plurality of bolts having a non-threaded portion extending away from the saddle plate when secured and having a large diameter head.
14. The parking meter of claim 13, wherein the bottom plate comprises a plurality of key holes having a large diameter opening aligned with the large diameter head of the bolts securing the saddle plate to the coin vault housing, the key holes further comprising a smaller diameter opening extending from the larger diameter opening to allow the non-threaded portion of the bolts to be received when the bottom plate is rotated or twisted, the large diameter head of the bolts preventing the bottom plate

from separating from the saddle plate when the non-threaded portion of the bolts is received in the smaller diameter opening.

15. The parking meter of any one of claims 1 to 14, wherein the locking mechanism prevents rotation of the bottom plate relative to the saddle plate when engaged.
16. The parking meter of any one of claims 1 to 15, wherein the locking mechanism interferes with the saddle plate to prevent the rotation of the bottom plate.
17. The parking meter of any one of claims 3 to 16, wherein the front assembly and the rear assembly when secured together provide a protective housing having a generally cylindrical shape.
18. The parking meter of claim 17, wherein the front cover comprises a flat recessed portion providing a location for user interaction components.
19. The parking meter of claim 18, wherein the user interaction components comprise a display for presenting information to a user and one or more input controls allowing the user to interact with the parking meter.
20. The parking meter of claim 19, wherein the display and input controls are provided by a touch screen display.
21. The parking meter of any one of claims 18 to 20, wherein the user interaction components further comprise one or more payment means.
22. The parking meter of claim 21, wherein the payment means comprises a coin chute for receiving coins of different denominations.
23. The parking meter of claim 21 or 22, wherein the payment means comprises a magnetic stripe and/or chip card reader for receiving payment information from a payment card.

24. The parking meter of any one of claims 21 to 23, wherein the payment means comprises a contactless payment reader for receiving payment information from a contactless payment device.
25. The parking meter of claim 24, wherein an antenna for the contactless payment reader is located within the flat recessed portion of the front cover.
26. The parking meter of claim 24, wherein the antenna for the contactless payment reader surrounds at least a portion of, or is in close proximity to, the display.
27. The parking meter of claim 24, wherein the antenna for the contactless payment reader is located on a portion of the front cover transitioning from the flat recessed portion of the front cover to the generally cylindrical portion of the front cover.
28. The parking meter of any one of claims 17 to 27, wherein the front cover comprises a cylindrical recess at a top of the parking meter assembly.
29. The parking meter of claim 28, further comprising a solar panel located within the cylindrical recess.
30. The parking meter of claim 28 or 29, wherein an arcuate portion of the cylindrical recess is further recessed to form an antenna recess.
31. The parking meter of claim 30, further comprising a cellular antenna located within the antenna recess.
32. The parking meter of any one of claims 3 to 31, wherein the front assembly comprises a battery compartment for receiving at least one battery.
33. The parking meter of claim 32, wherein the battery compartment comprises a primary battery compartment and a secondary battery compartment.

34. The parking meter of claim 32 or 33, wherein the battery compartment is pivotally attached to the front assembly to allow the battery compartment to pivot outwards to provide access to the batteries.
35. The parking of claim 34, wherein the battery compartment comprises a latching mechanism for preventing the battery compartment from pivoting outwards unintentionally.
36. The parking meter of any one of claims 1 to 35, wherein the rear cover is formed from an extrusion.
37. The parking meter of any one of claims 1 to 36, wherein the rear cover is formed out of folded stainless steel.
38. The parking meter of any one of claims 1 to 35, wherein one or more of the rear cover, the front cover, and the bottom plate are formed from injection molded plastic.
39. The parking meter of any one of claims 1 to 35, wherein one or more of the rear cover, the front cover, and the bottom plate are formed from injection molded polycarbonate co-polymer resins.
40. The parking meter of claim 4, wherein the bottom plate is attached to the rear cover by a plurality of threaded bolts or rods passing through the bottom plate and extended cylindrical extrusions on the rear cover.
41. The parking meter of claim 4, wherein the bottom plate and rear cover are formed out of stainless steel and welded together.
42. The parking meter of claim 4, wherein the bottom plate is made from injection molded plastic, the rear cover is formed out of stainless steel and the bottom plate is attached to the rear cover by using bolts through a series of mounting holes that align to the stainless steel rear cover.

43. The parking meter of any one of claims 1 to 42, wherein the saddle plate comprises:
- a lower profile matching an upper profile of the existing coin vault housing;
 - an upper profile matching a lower profile of the parking meter assembly; and
 - a transition section transitioning from the lower profile to the upper profile.
44. The parking meter of any one of claims 1 to 43, wherein the saddle plate is rigidly and fixedly attached to the coin vault housing and the parking meter assembly is rotatably engageable with the saddle plate.
45. The parking meter of claim 44, wherein a plurality of bolts secure the saddle plate to the coin vault housing, and the bottom plate comprises a plurality of key holes engageable with the plurality of bolts when the parking meter assembly is rotated.
46. The parking meter of any one of claims 1 to 27, further comprising a solar panel assembly that is removably engageable with the parking meter assembly, wherein the solar panel assembly comprises a solar panel.
47. The parking meter of claim 46, wherein the solar panel is rotatably adjustable.
48. The parking meter of claim 46 or 47, wherein the solar panel can be vertically angled or sloped to two or more different positions.
49. A single space parking meter assembly for retrofitting onto an existing coin vault assembly, the coin vault assembly comprising a coin vault housing, the parking meter assembly comprising:
- a locking mechanism;
 - at least one battery for supplying power for the parking meter assembly;
 - a display;
 - at least one payment means for accepting payment for parking time selected from the group comprising a coin chute, a card slot and a contactless payment reader;

- a radio transceiver; and
- a protective outer covering that at least partially houses the locking mechanism, the at least one battery, the display, the at least one payment means, and the radio transceiver; and
- wherein the protective outer covering is rotatably or slidably engageable with the coin vault assembly when a bottom surface of the protective outer covering is positioned against or adjacent to an upper surface of the coin vault assembly, and the locking mechanism secures the protective outer covering to the coin vault assembly when the protective outer covering is engaged with the coin vault assembly.
50. The single space parking meter assembly of claim 49, wherein the existing coin vault assembly is fitted with a saddle plate adapted to be received over a portion of the coin vault housing, wherein the saddle plate is rigidly and fixedly attached to the coin vault housing, and the protective outer covering is rotatably or slidably engageable with the coin vault assembly when a bottom surface of the protective outer covering is positioned against or adjacent to an upper surface of the saddle plate.
51. The single space parking meter assembly of any one of claims 49 to 50, wherein the protective outer covering comprises a front cover, a rear cover and a bottom plate.
52. The single space parking meter assembly of any one of claims 49 to 50, wherein the protective outer covering comprises a front cover, a rear cover and a bottom plate, wherein the front cover and rear cover are slidably engageable with one another, and wherein the bottom plate is rotatably or slidably engageable with the coin vault assembly when the bottom plate is positioned against or adjacent to an upper surface of the coin vault assembly.
53. The single space parking meter assembly of claim 52, wherein the locking mechanism when engaged prevents rotation or sliding of the bottom plate, and prevents sliding of the front cover relative to the rear cover.

54. The single space parking meter assembly of any one of claims 49 to 53, further comprising a solar panel assembly that is removably engageable with the parking meter assembly, wherein the solar panel assembly comprises a solar panel.
55. The single space parking meter assembly of claim 54, wherein the solar panel is rotatably adjustable.
56. The single space parking meter of claim 54 or 55, wherein the solar panel can be vertically angled or sloped to two or more different positions.
57. The single space parking meter of any one of claims 49 to 56, wherein the protective outer covering is formed from injection molded plastic.
58. The single space parking meter of any one of claims 49 to 56, wherein the protective outer covering is formed from injection molded polycarbonate co-polymer resins.
59. A method for retrofitting a single space parking meter assembly onto an existing coin vault assembly, the coin vault assembly comprising a coin vault housing, the method comprising:
- disassembling an existing parking meter to the existing coin vault housing;
 - rotatably or slidably engaging a protective outer covering of the parking meter assembly with the coin vault assembly when a bottom surface of the protective outer covering is positioned against or adjacent to an upper surface of the coin vault assembly; and
 - securing by way of a locking mechanism the protective outer covering to the coin vault assembly once the protective outer covering has been engaged with the coin vault assembly.
60. The method of claim 59, wherein the step of rotatably or slidably engaging a protective outer covering of the parking meter assembly with the existing coin vault assembly also comprises the step of rigidly and fixedly attaching a saddle plate to

the coin vault housing, wherein the saddle plate is adapted to be received over a portion of the existing coin vault housing, and the protective outer covering rotatably or slidably engages the saddle plate.

61. A single space parking meter assembly comprising:

a front assembly comprising:

a solar panel;

a radio communication component;

a payment component;

metering components; and

a front housing to be exposed to the external environment; and

a rear assembly slidably engageable with the front assembly, the rear assembly comprising:

a bottom plate securable to existing parking infrastructure at a parking location;

a rear housing to be exposed to the external environment wherein the rear housing is secured to the bottom plate;

a lock assembly preventing relative sliding between the front assembly and the rear assembly.

62. The single space parking meter assembly of claim 61, wherein the bottom plate comprises a plurality of key holes each having a large diameter opening and a small diameter opening extending from the large diameter opening, the large diameter opening sized to allow a bolt head of a bolt to pass through and the small diameter opening sized to allow a neck of the bolt to pass through but prevent the bolt head to pass through.

63. The single space parking meter assembly of claim 62, wherein the key holes are aligned to allow bolt heads of securing bolts secured to the existing parking infrastructure to pass through the plurality of key holes and to allow necks of the

securing bolts to enter the small openings of the respective key holes when the rear assembly is twisted, rotated or slid relative to the securing bolts.

64. The single space parking meter assembly of claim 63, wherein the lock assembly comprises a vertical locking component preventing the relative sliding between the front assembly and the bottom assembly, and a rotational locking component preventing relative rotation or sliding of the rear assembly relative to the securing bolts.
65. The single space parking meter assembly of claim 64, wherein the rotational locking component comprises a pivotable locking arm comprising at least one protrusion, which in a locked position extends through an opening in the bottom plate into an aperture of the parking infrastructure to prevent rotation or sliding of the rear assembly.
66. The single space parking meter assembly of claim 64 or 65, wherein the vertical locking component comprises a cylindrical lock secured to the bottom plate and comprising a rotatable hook that engages a locking rod of the front assembly when in a locked position to prevent relative movement between the front assembly and the rear assembly.
67. The single space parking meter assembly of any one of claims 64 to 66, wherein the vertical locking component cannot engage the front assembly if the rotational locking component is in an unlocked position.
68. The single space parking meter assembly of any one of claims 61 to 68, wherein the radio communication component comprises a removable radio module slidably engageable with the front assembly.
69. The single space parking meter assembly of claim 68, wherein the removable radio module is securable to the front assembly using a thumbscrew.

70. The single space parking meter assembly of claim 68 or 69, wherein the removable radio module comprises an electrical connection that mates to a corresponding connection of the front assembly when the radio module is engaged with the front assembly.
71. The single space parking meter assembly of any one of claims 61 to 70, wherein the payment component comprises one or more payment modules that are each individually securable to the front assembly.
72. The single space parking meter assembly of claim 71, wherein the one or more payment modules are securable to the front assembly using thumbscrews.
73. The single space parking meter assembly of claim 72, wherein the one or more payment modules comprises one or more of:
- a coin chute module;
 - contact-based card reader module; and
 - a contactless payment reader module.
74. The single space parking meter assembly of any one of claims 61 to 73, wherein the solar panel is located within a solar panel module.
75. The single space parking meter assembly of claim 74, wherein the solar panel module is slidably engageable with the front housing.
76. The single space parking meter assembly of any one of claims 61 to 75, wherein one or more of the rear housing, the front housing, and the bottom plate are formed from injection molded plastic.
77. The single space parking meter assembly of any one of claims 61 to 75, wherein one or more of the rear housing, the front housing, and the bottom plate are formed from injection molded polycarbonate co-polymer resins.

78. A single space parking meter comprising:

- an internal mounting structure,
- a plurality of removable components secured to the internal structure using tool-less connectors; and
- a main processing board comprising a processor communicatively coupled to at least one of the removable components and providing metering functionality for a parking location.

79. The single space parking meter of claim 78, wherein the plurality of removable components comprises one or more of:

- a coin chute;
- a contact-based payment reader; and
- a contactless payment reader.

80. The single space parking meter of claim 78 or 79, wherein the plurality of removable components comprises:

- a radio communication component.

81. The single space parking meter of any one of claims 78 to 80, wherein the plurality of removable components comprises:


- a solar panel module.

82. The single space parking meter of any one of claims 78 to 81, wherein the tool-less connectors comprise thumbscrews.


83. The single space parking meter assembly of any one of claims 61 to 77, wherein the rear assembly and front assembly comprise one or more rails or rail guides, respectively, and at least one of the one or more rails or rail guides comprises one or more of: a spring-catch assembly; and, a removable or detachable rail or rail guide for allowing release, separation or detachment of the front assembly relative to the rear assembly.

84. The single space parking meter assembly of claim 83, wherein the parking meter assembly further comprises a hinge joining the first and second portions and which allows rotation of the second portion relative to the first portion.

1/34

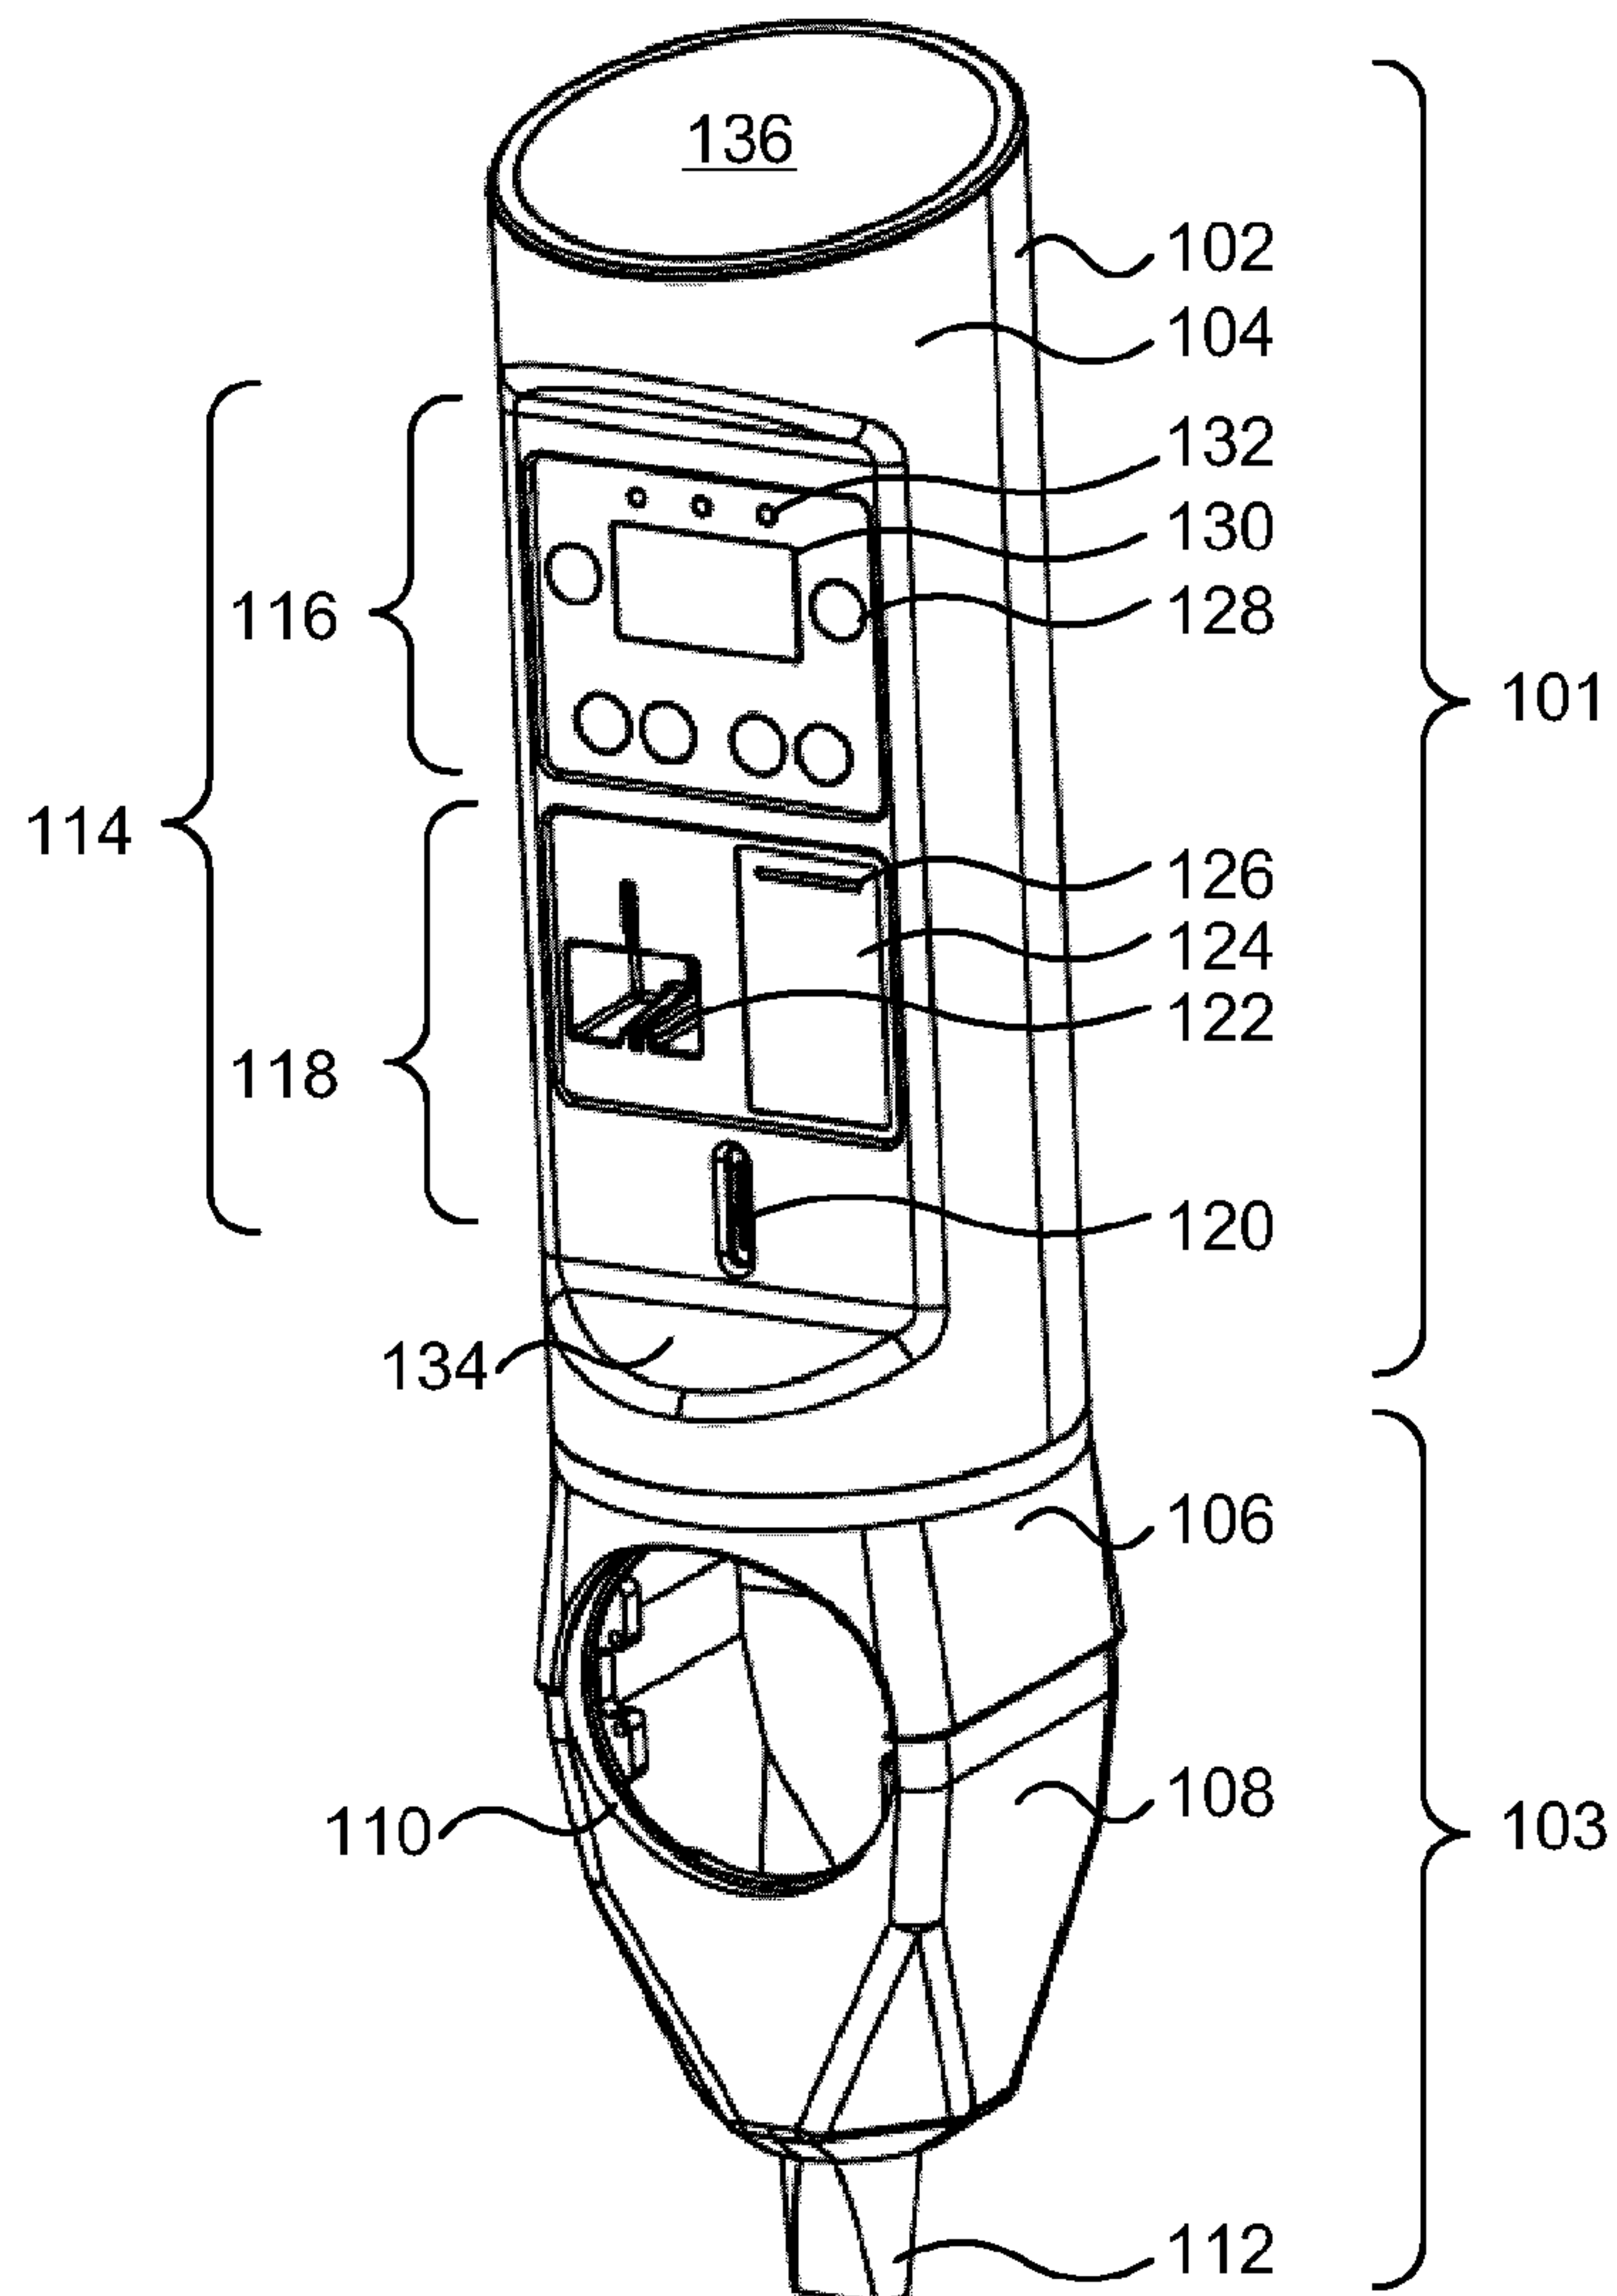100**Figure 1**

2/34

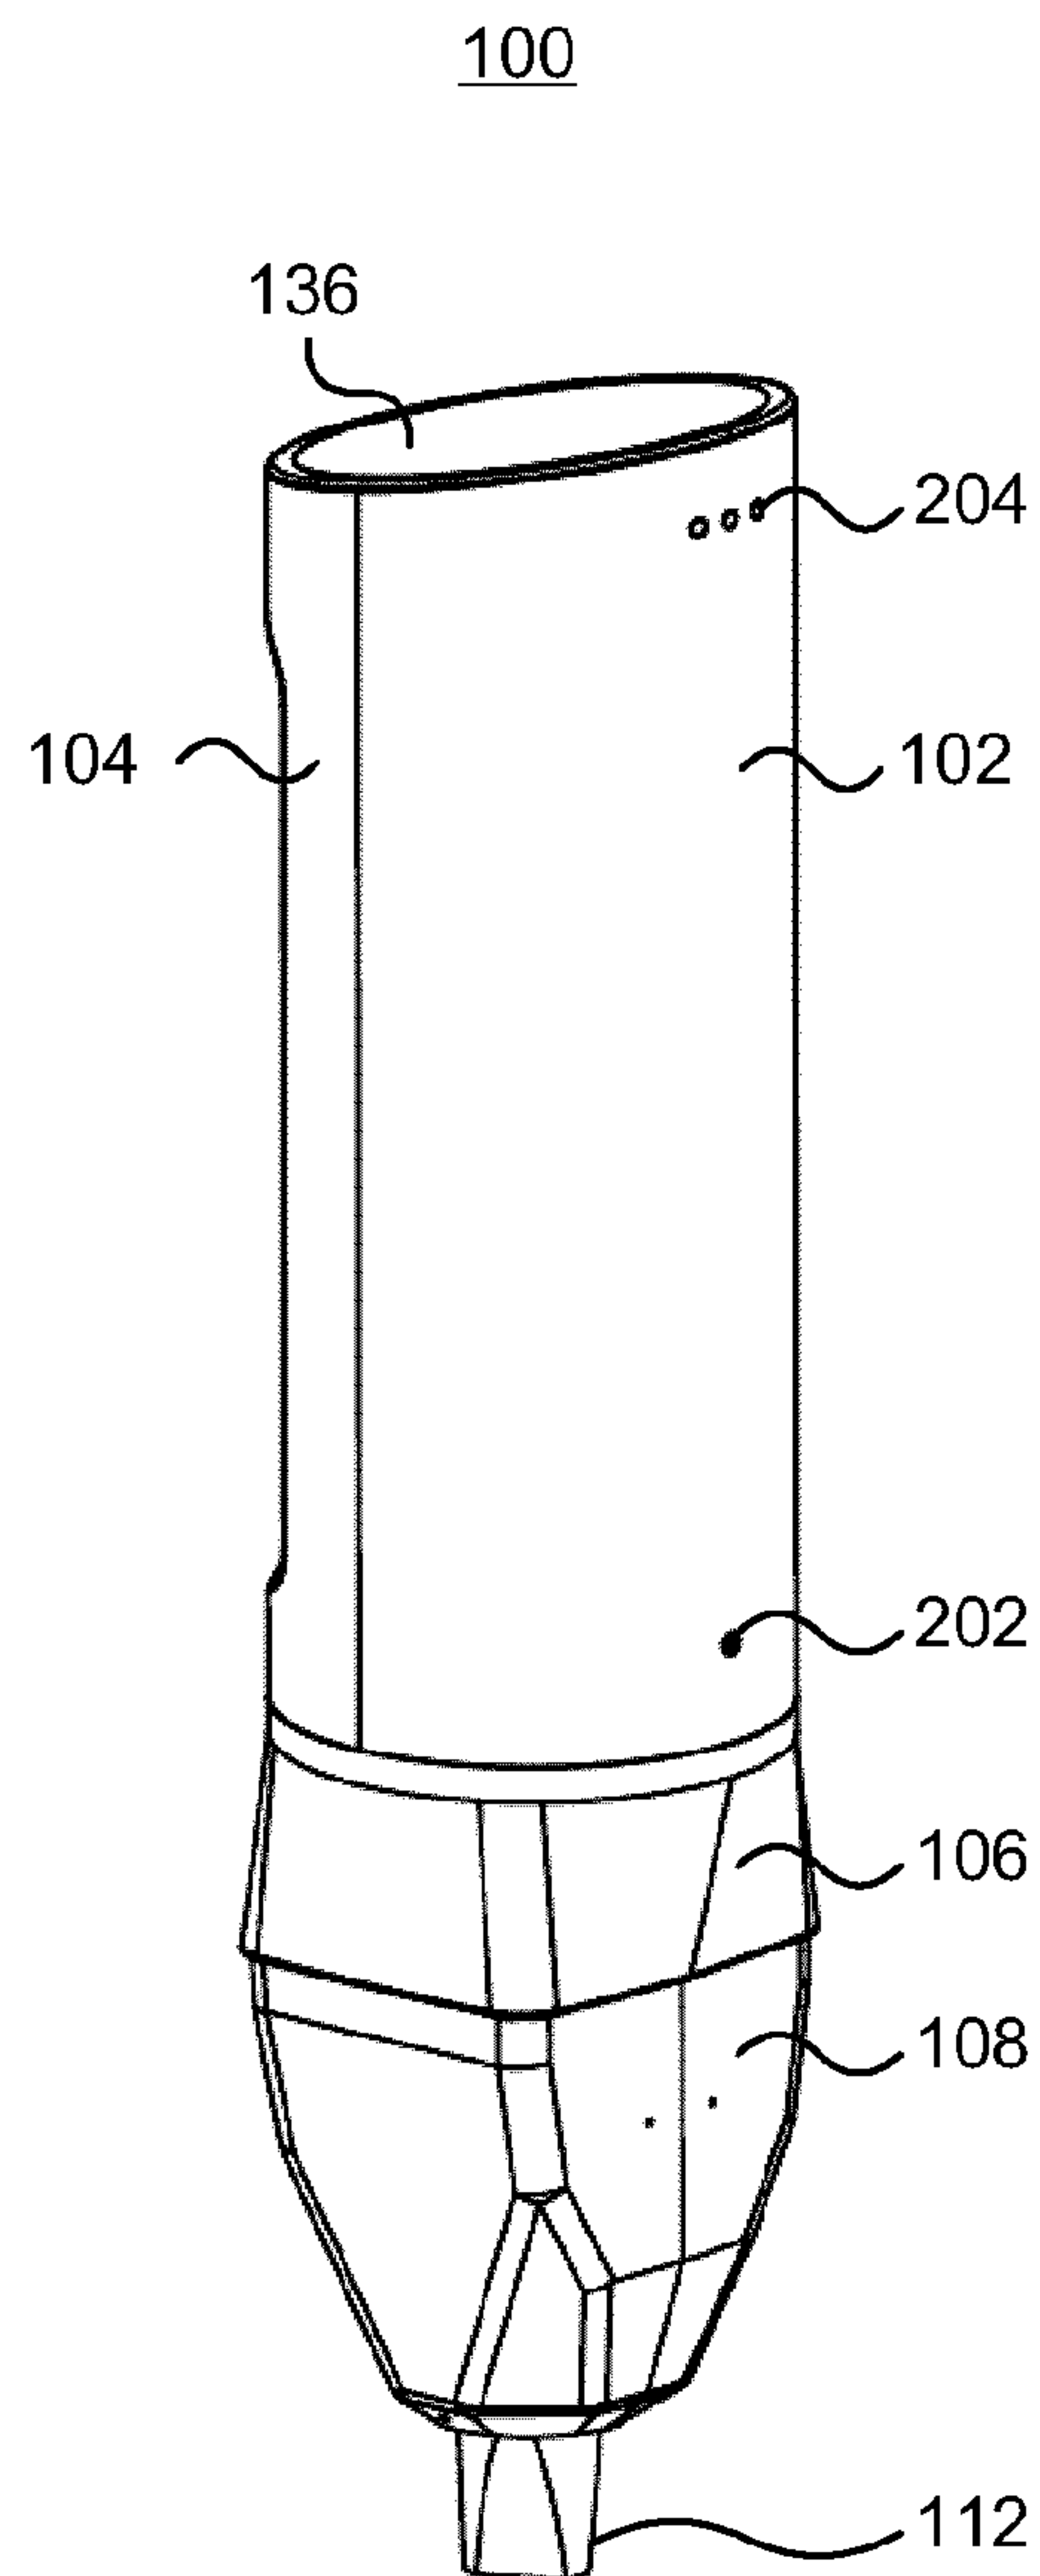**Figure 2**

3/34

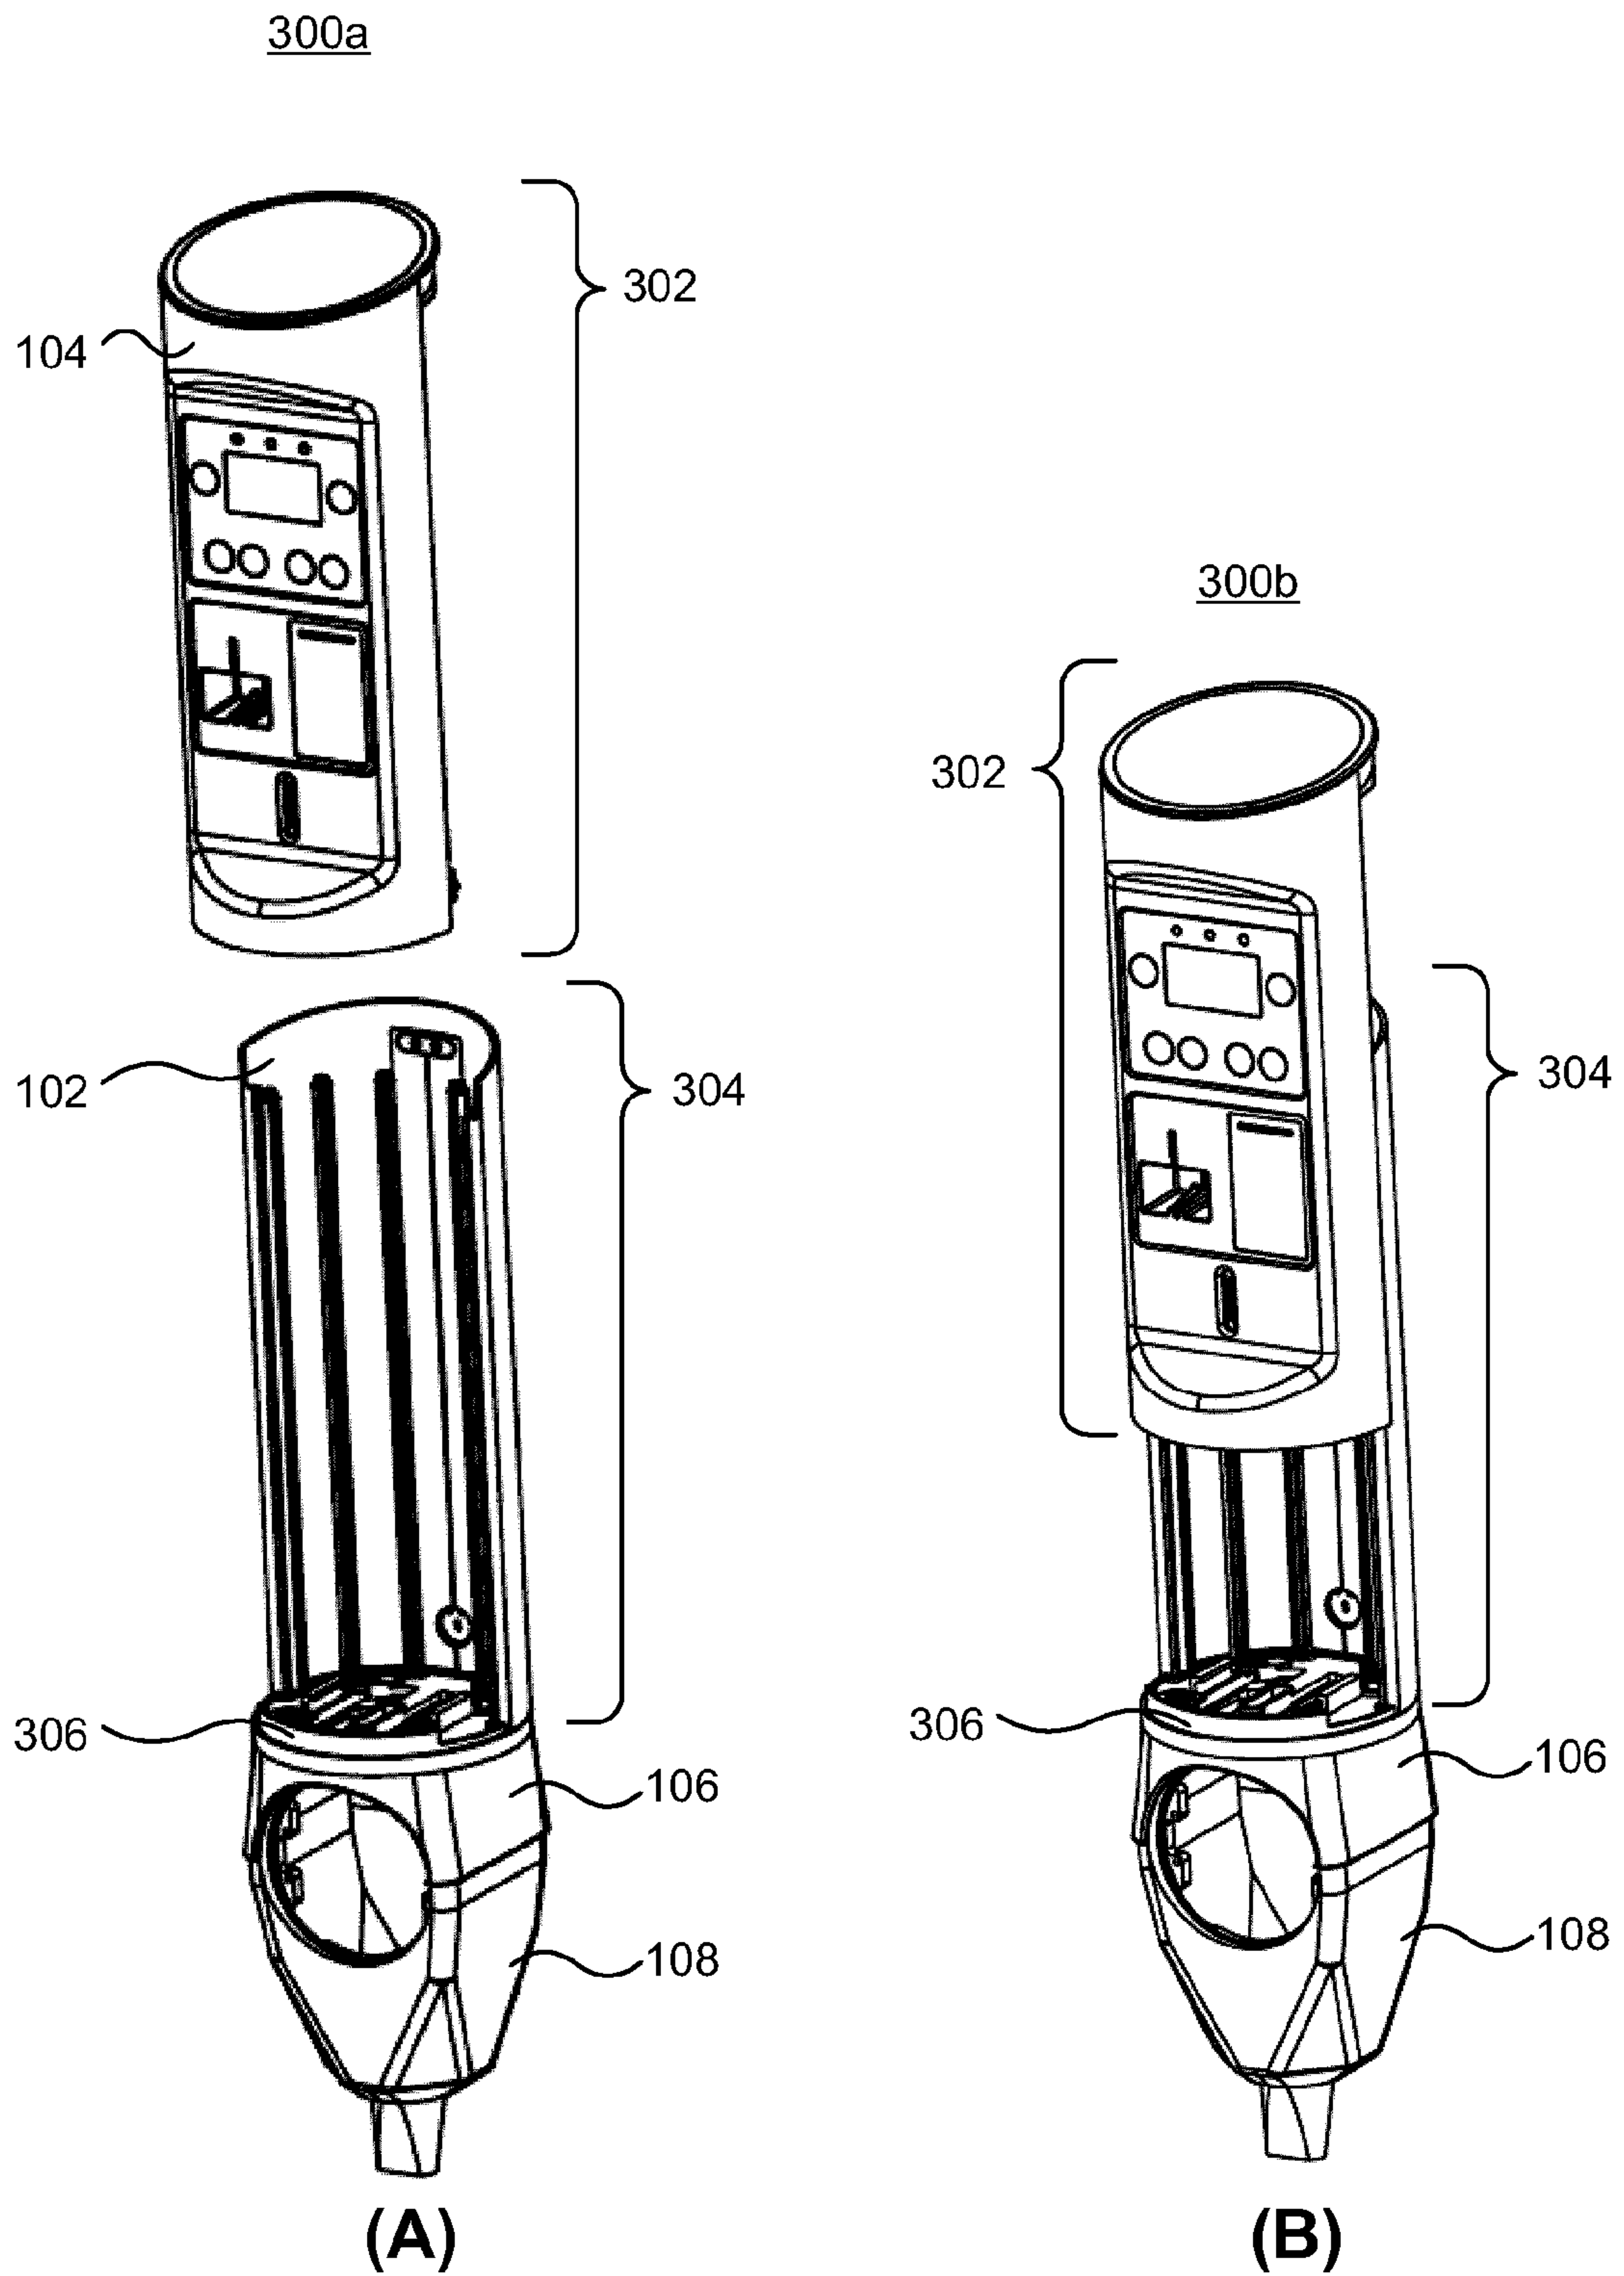


Figure 3

4/34

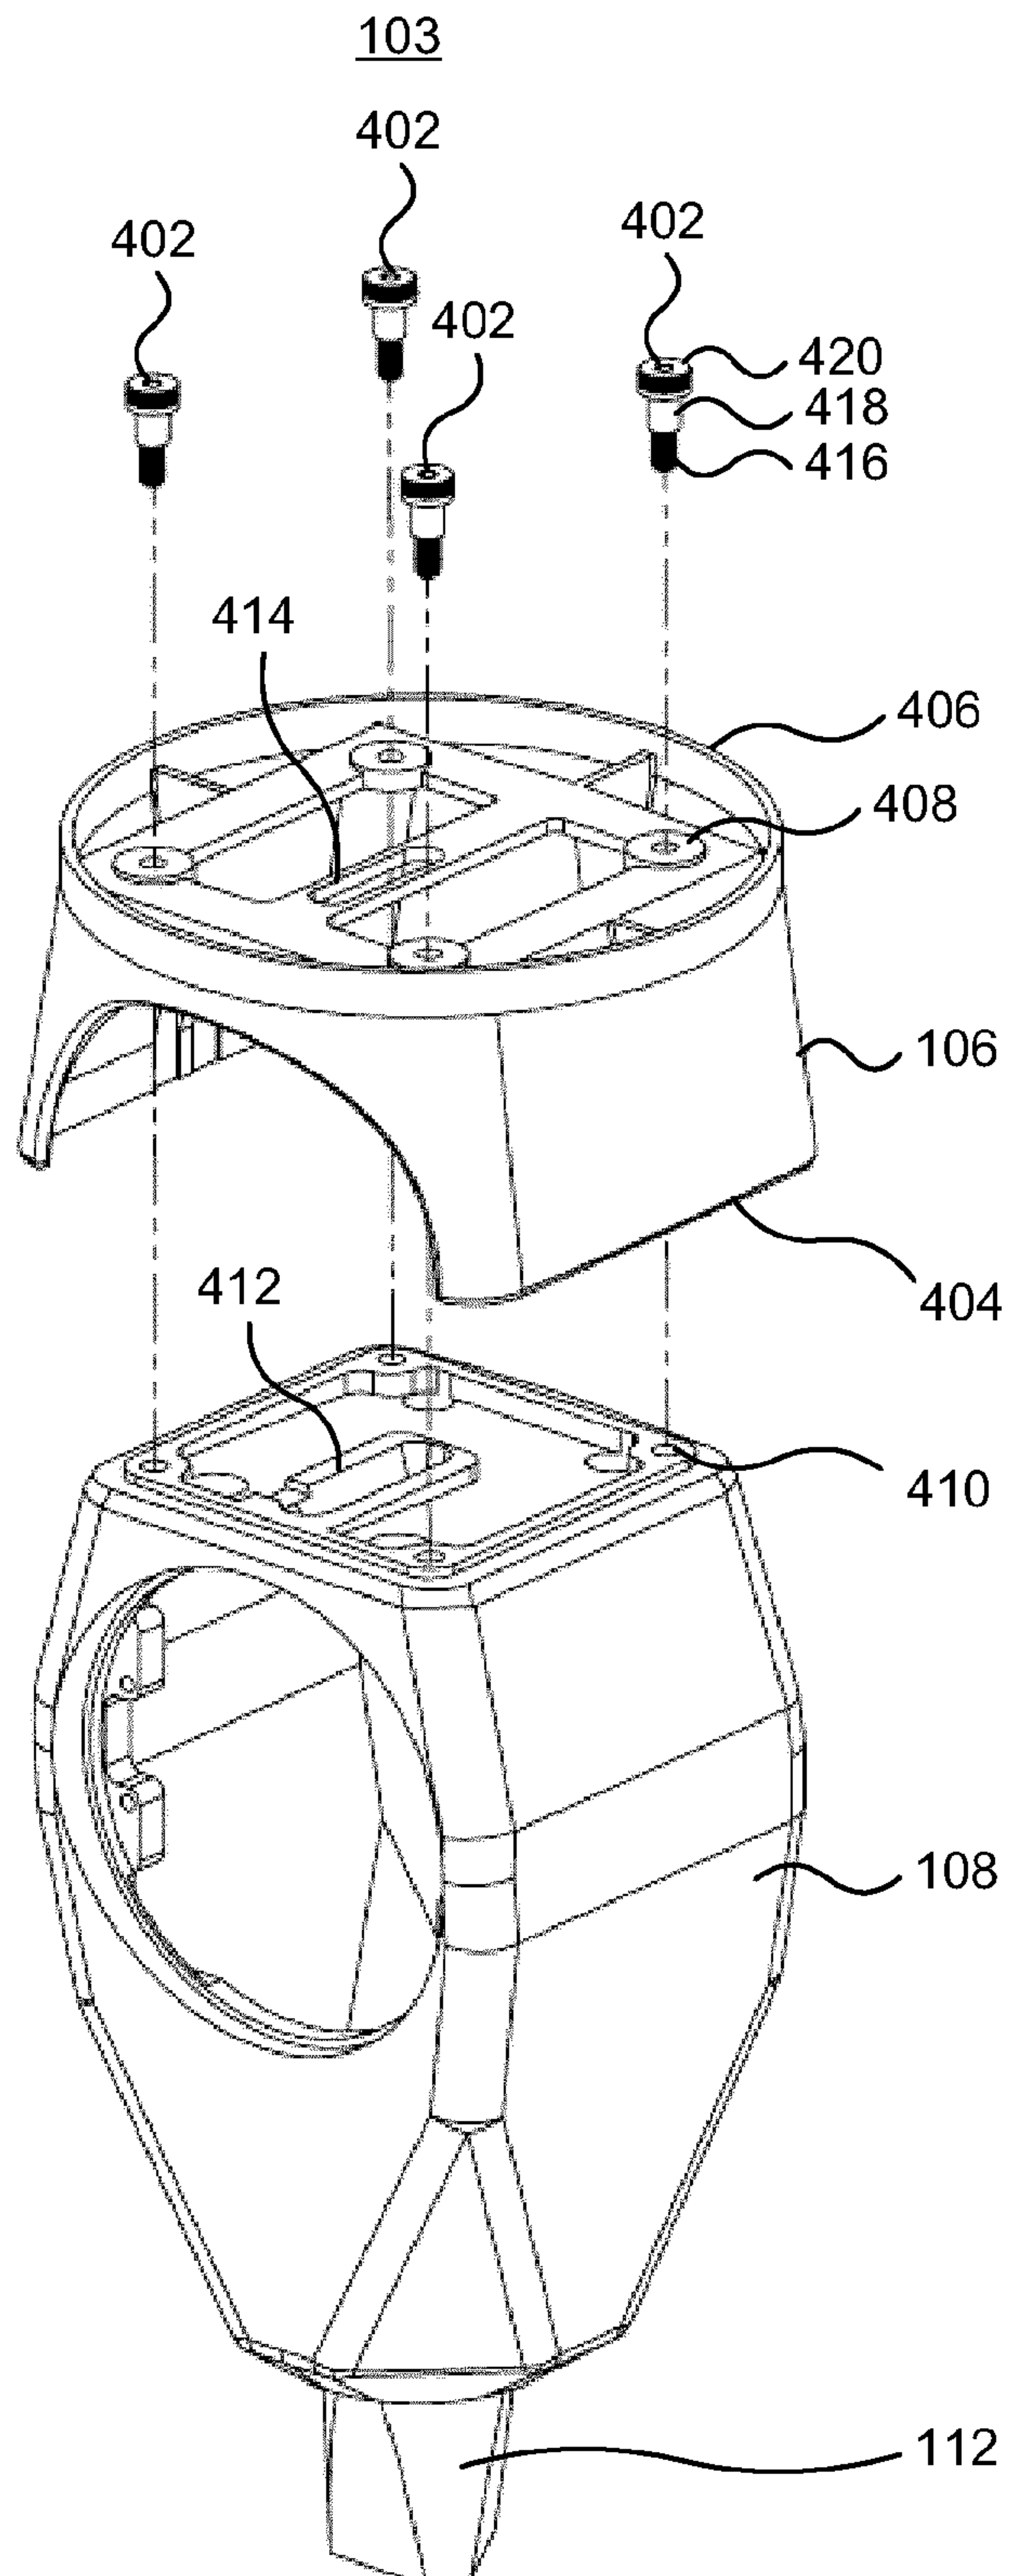
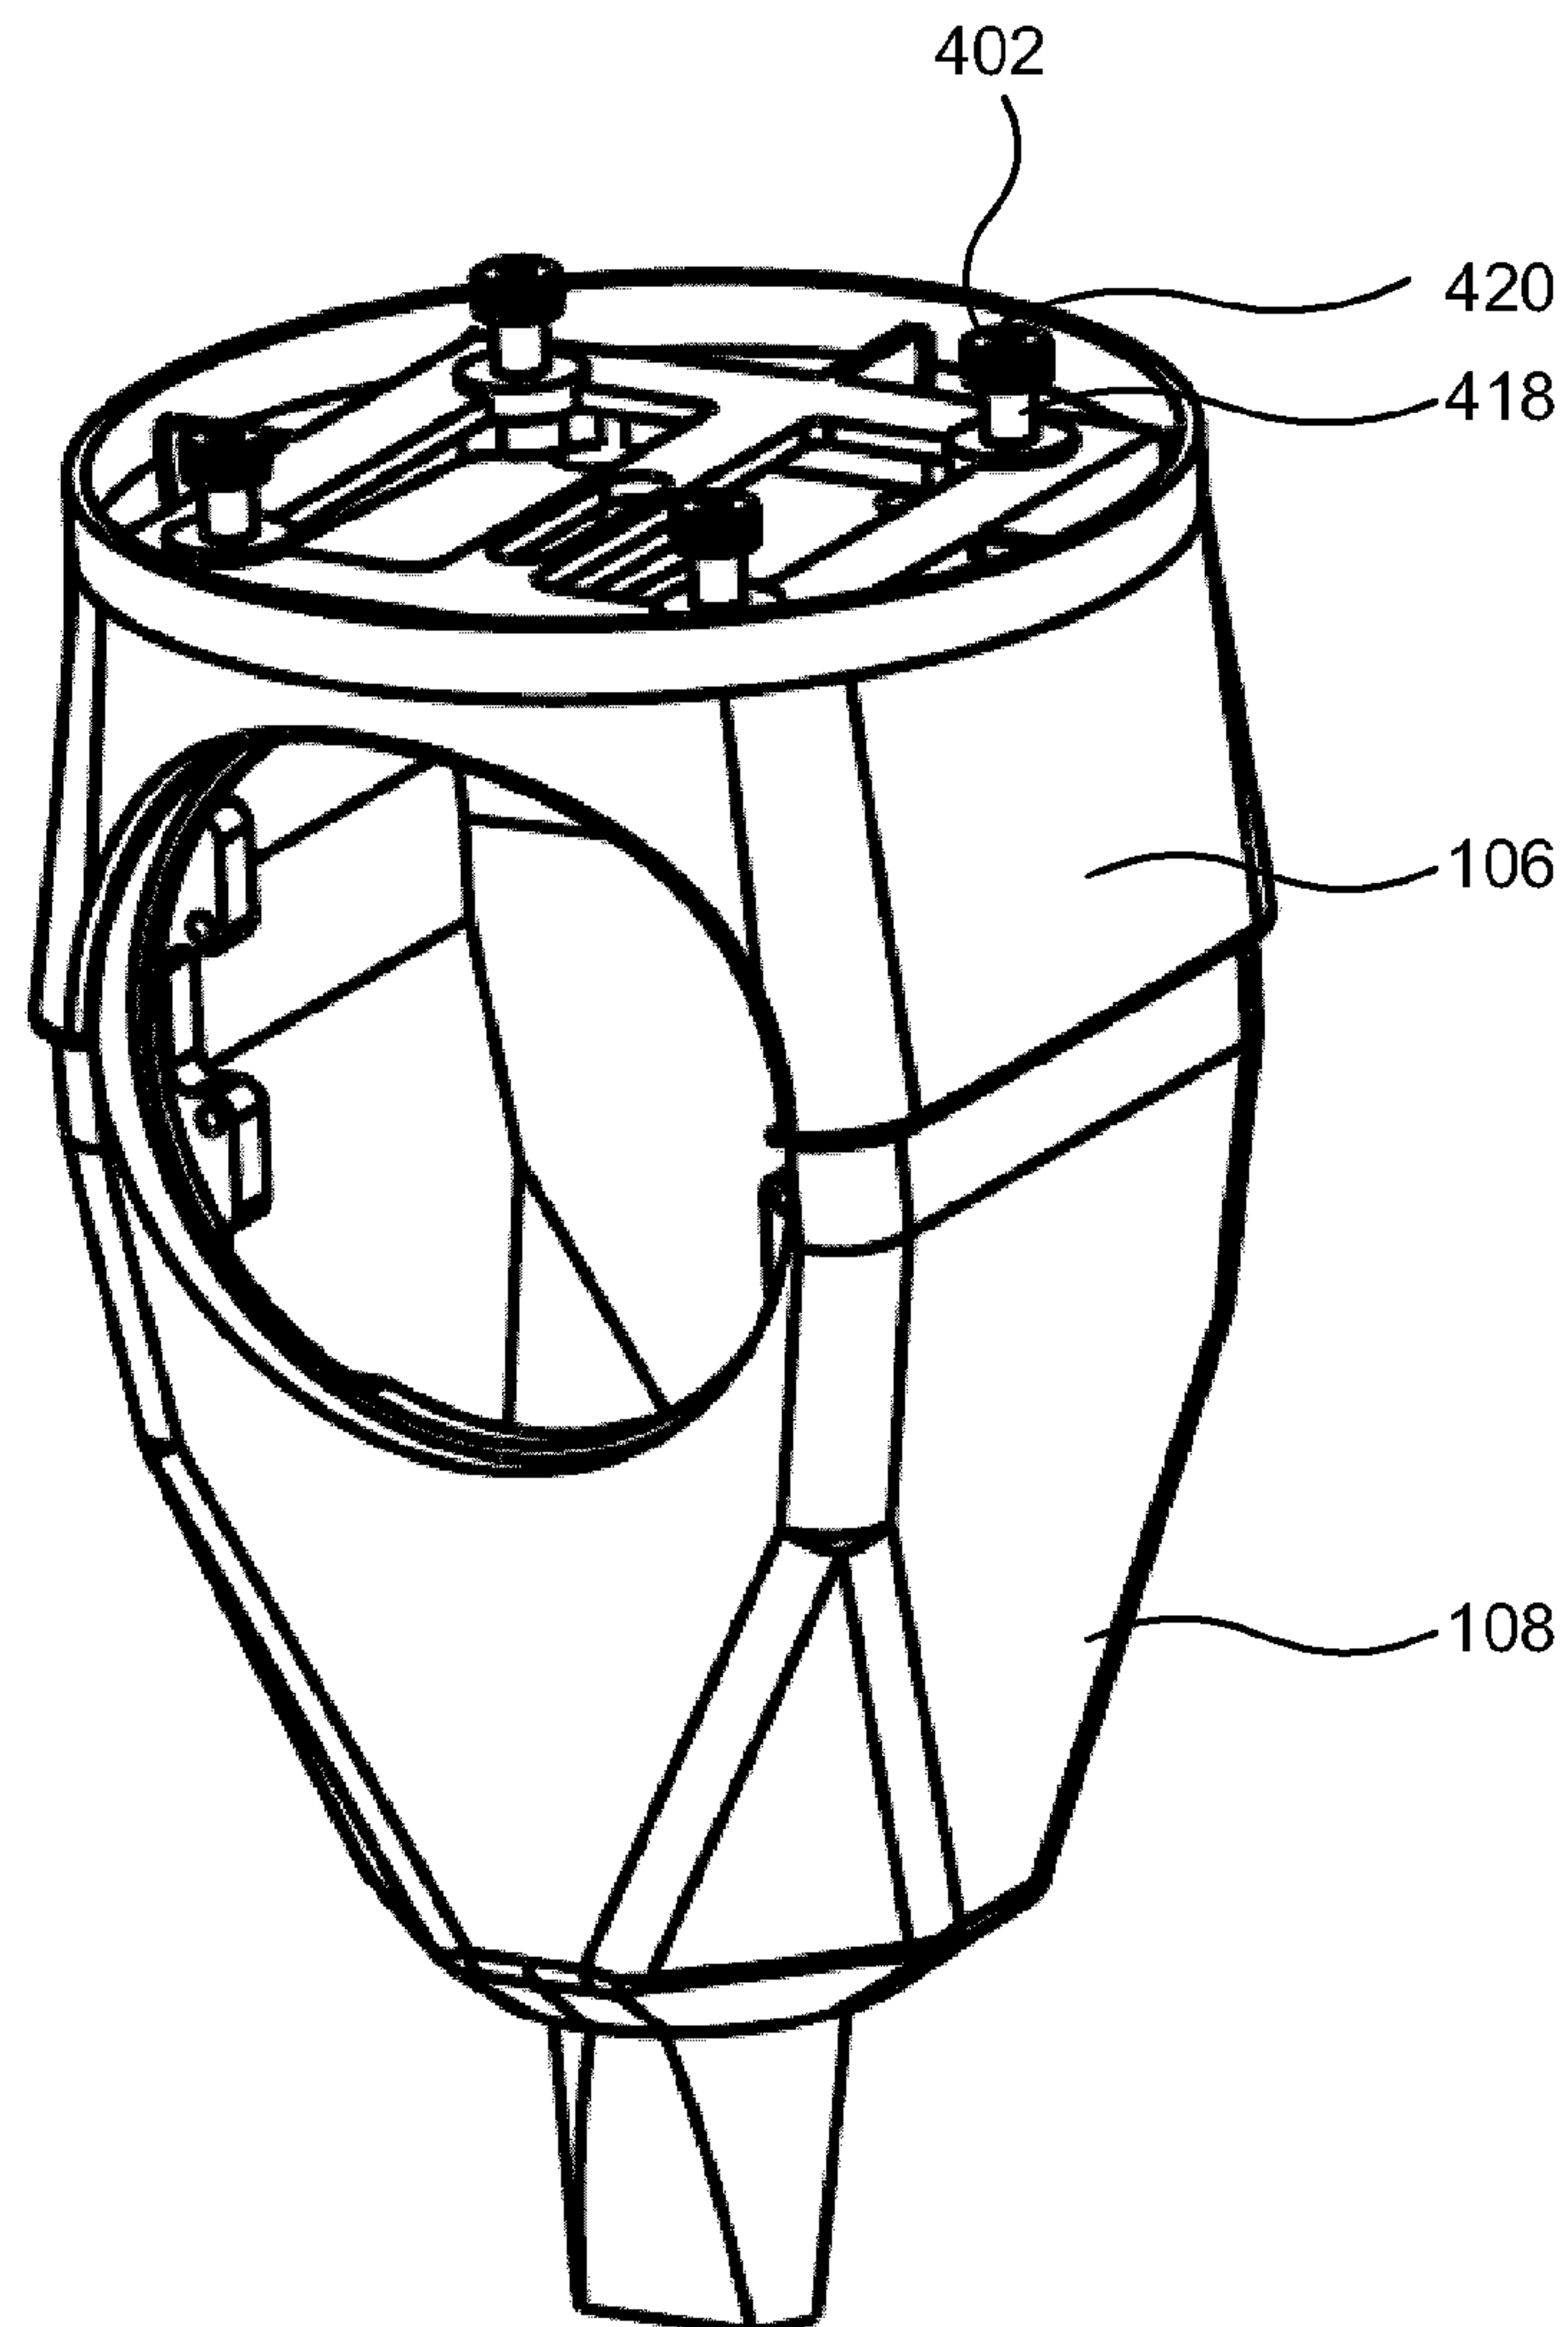


Figure 4

5/34

103**Figure 5**

6/34

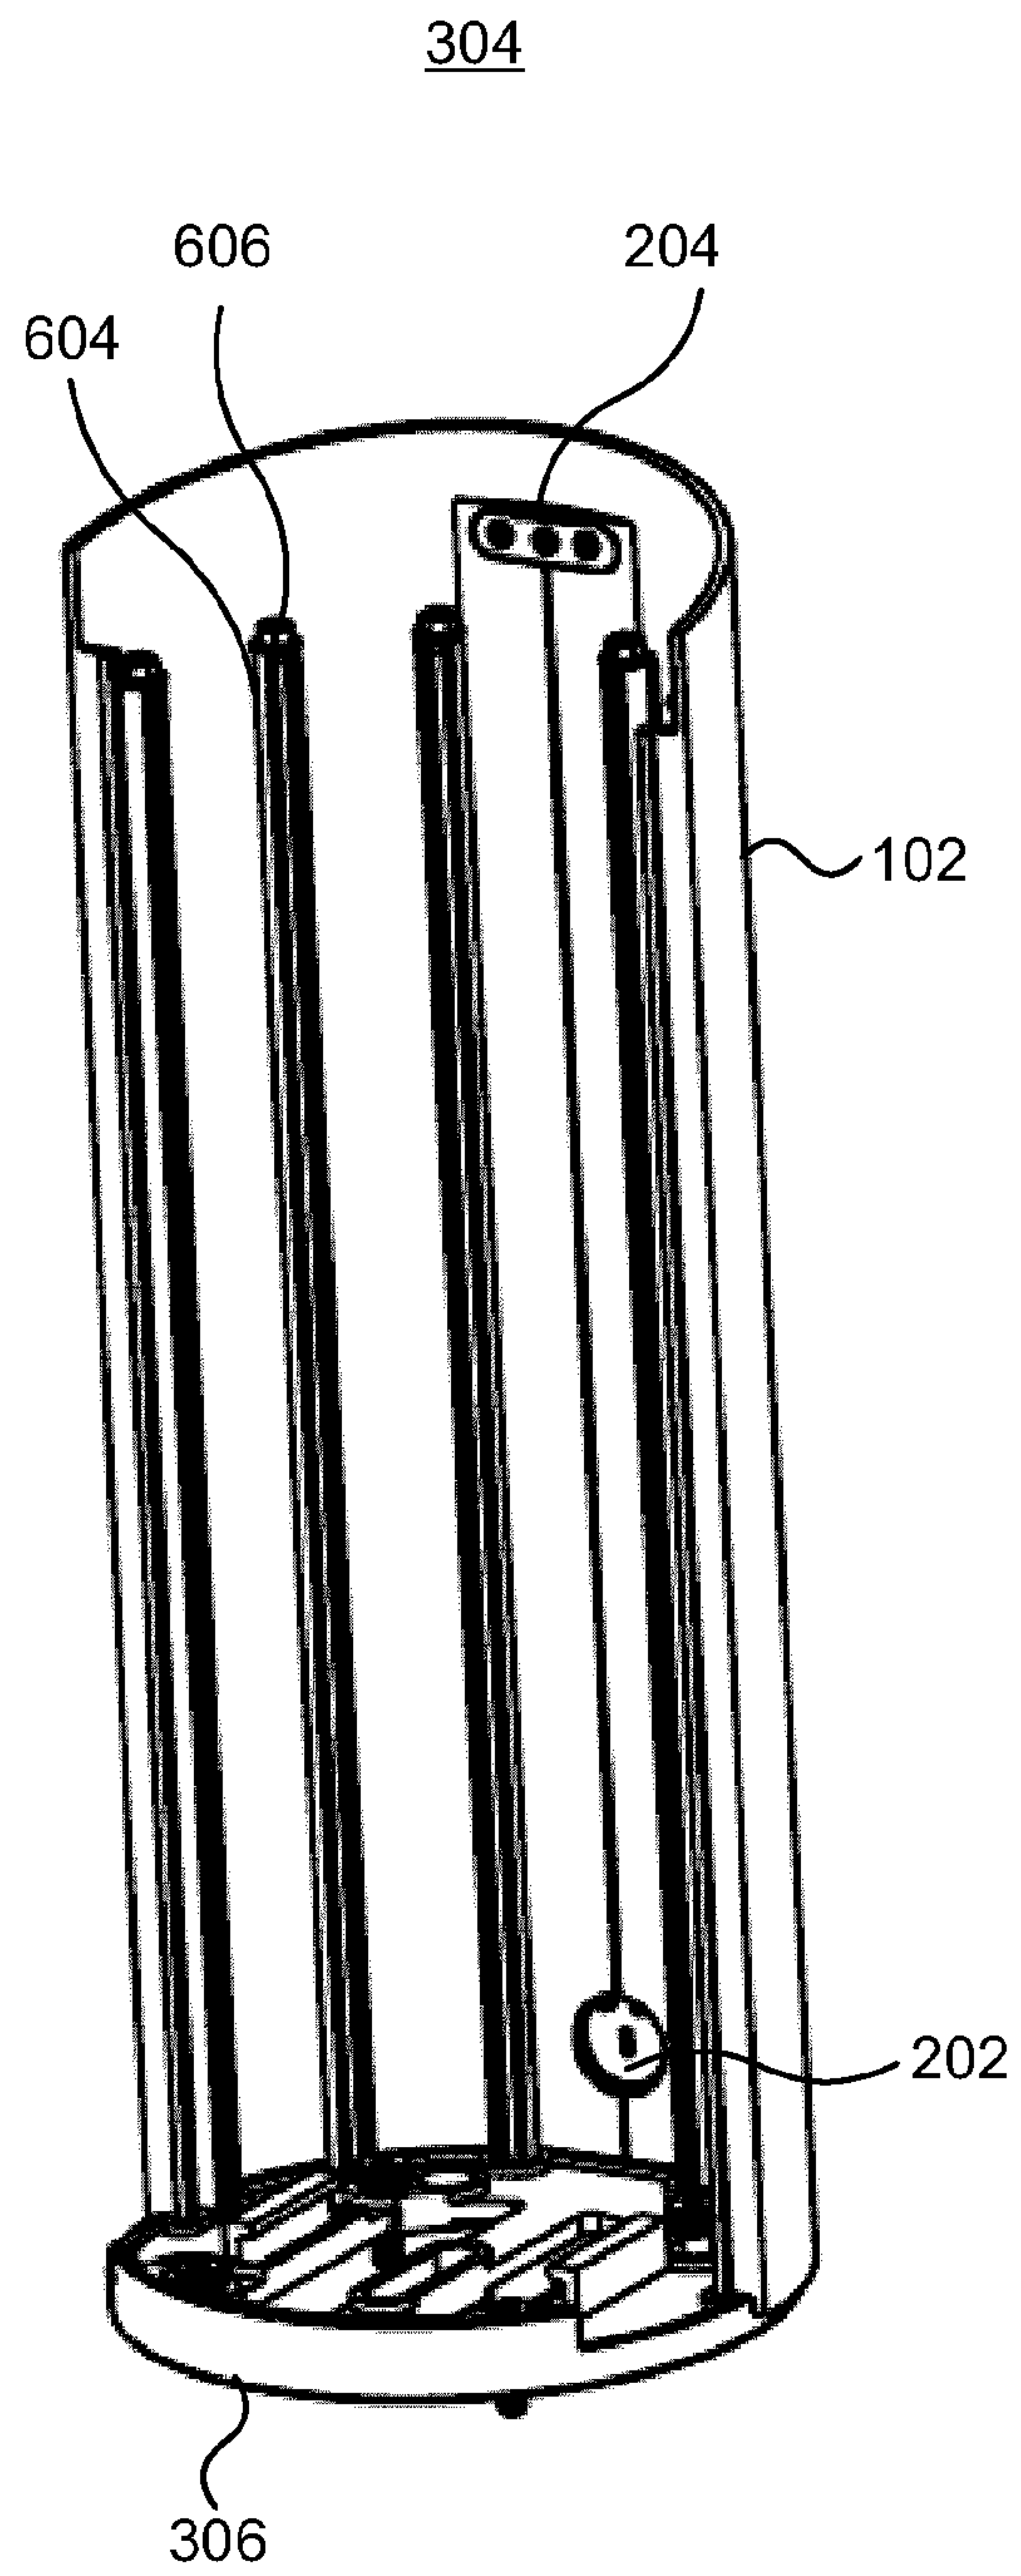
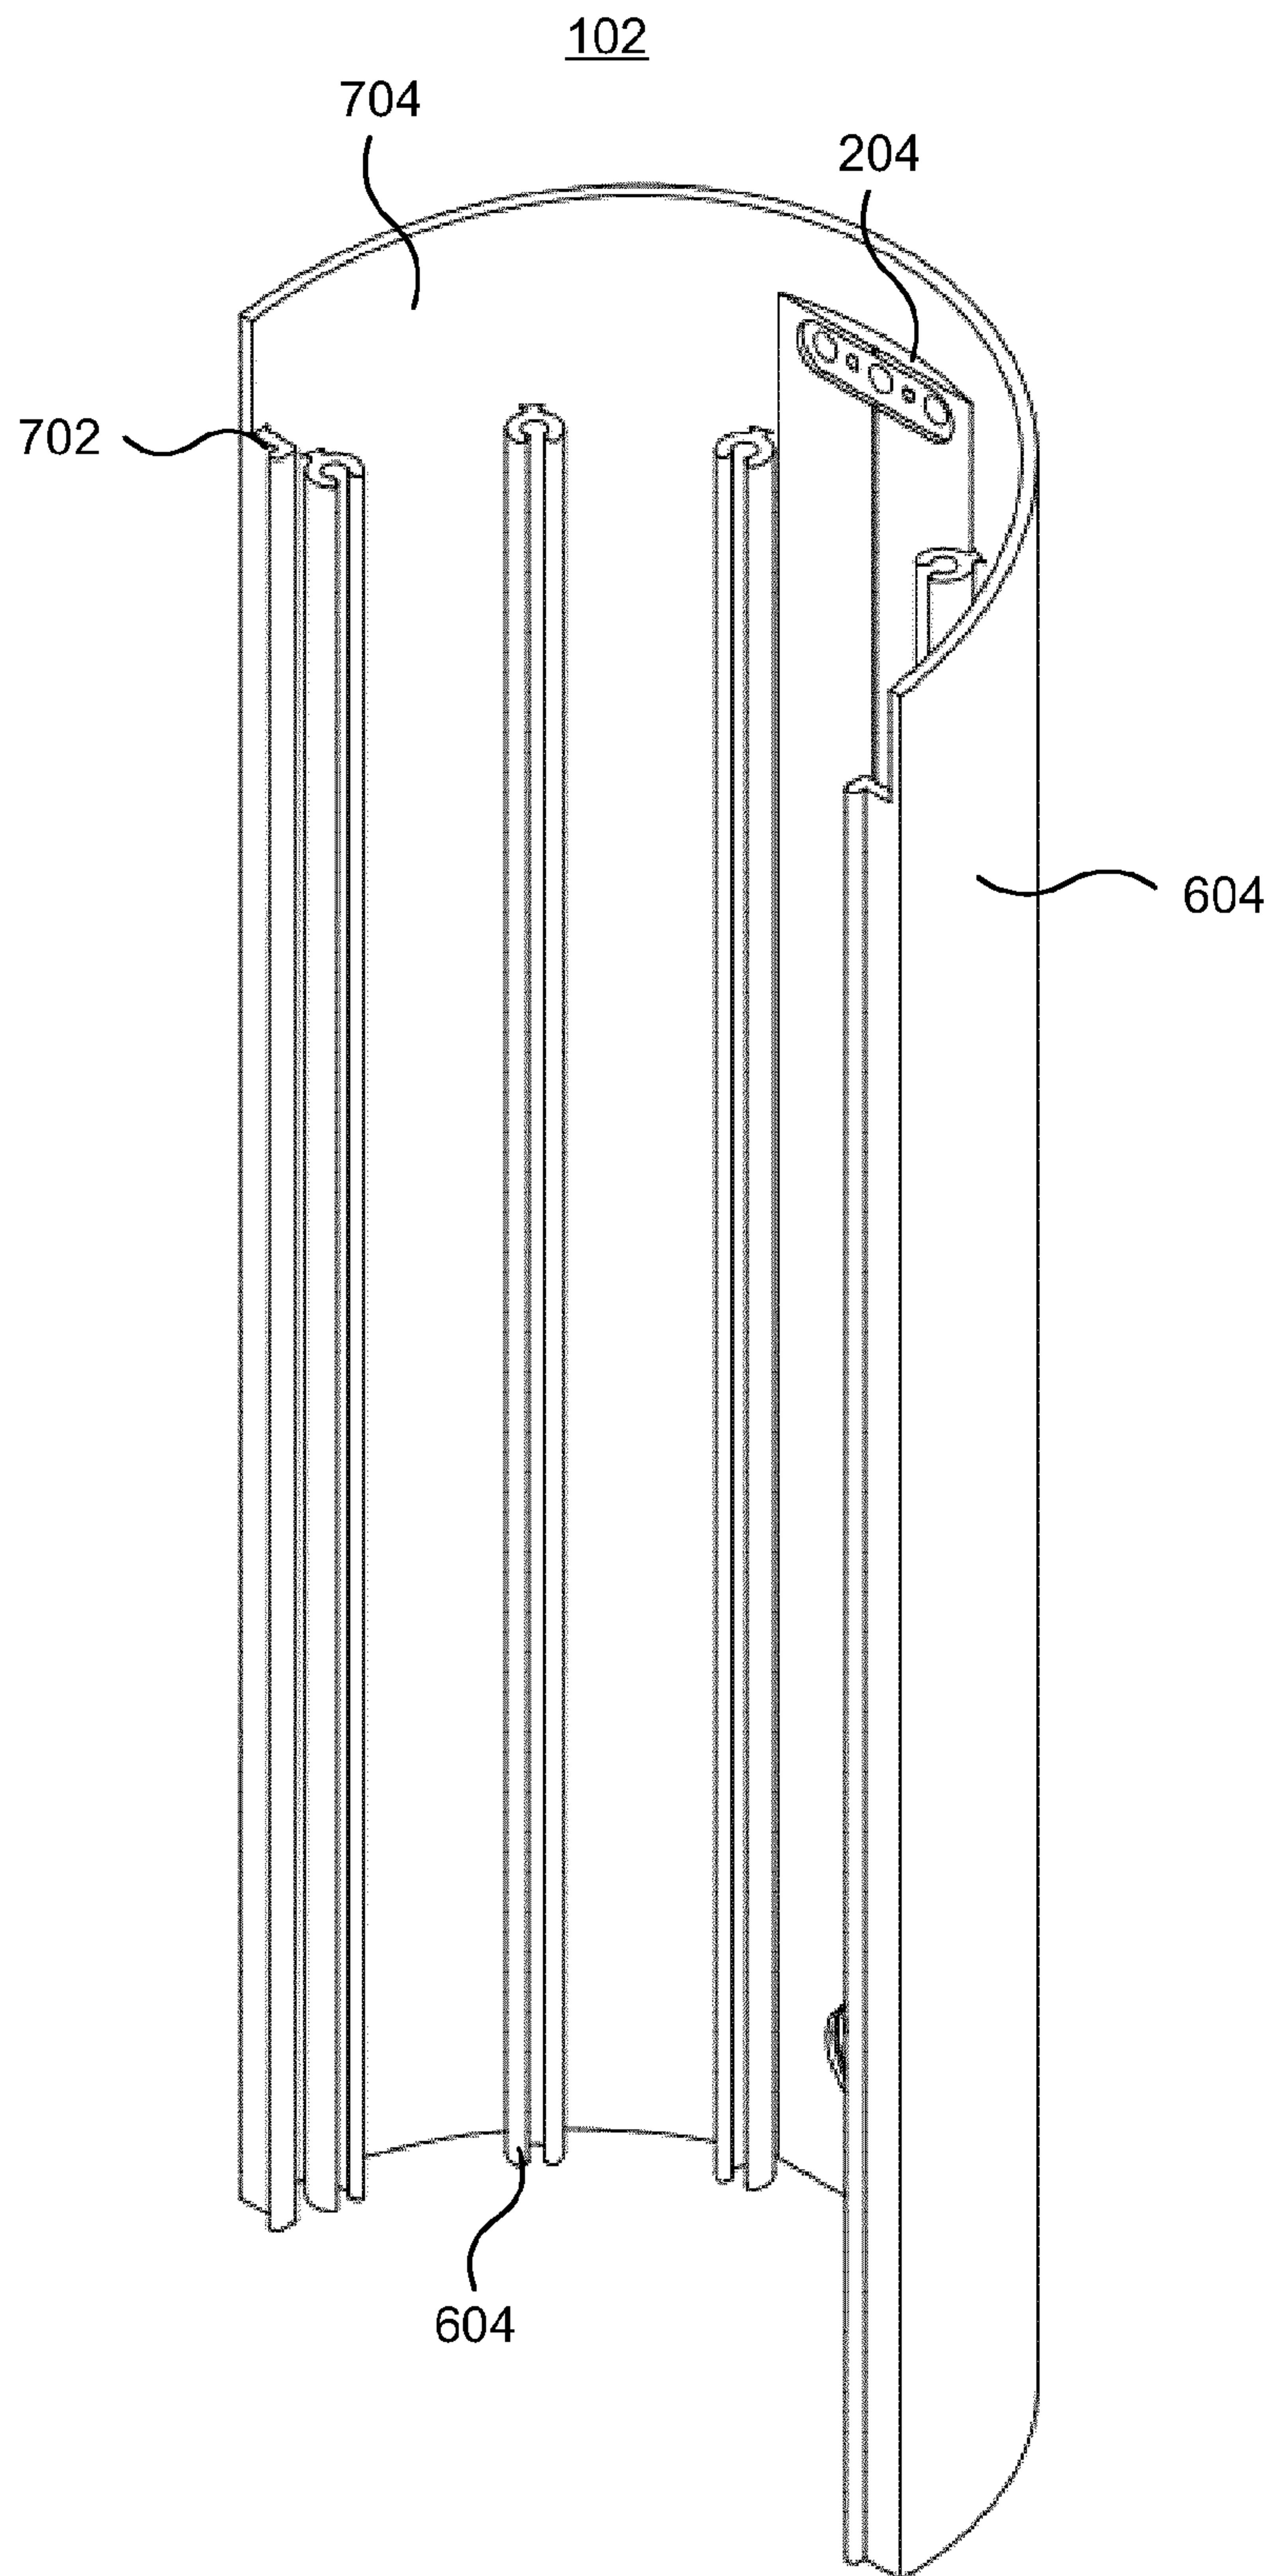
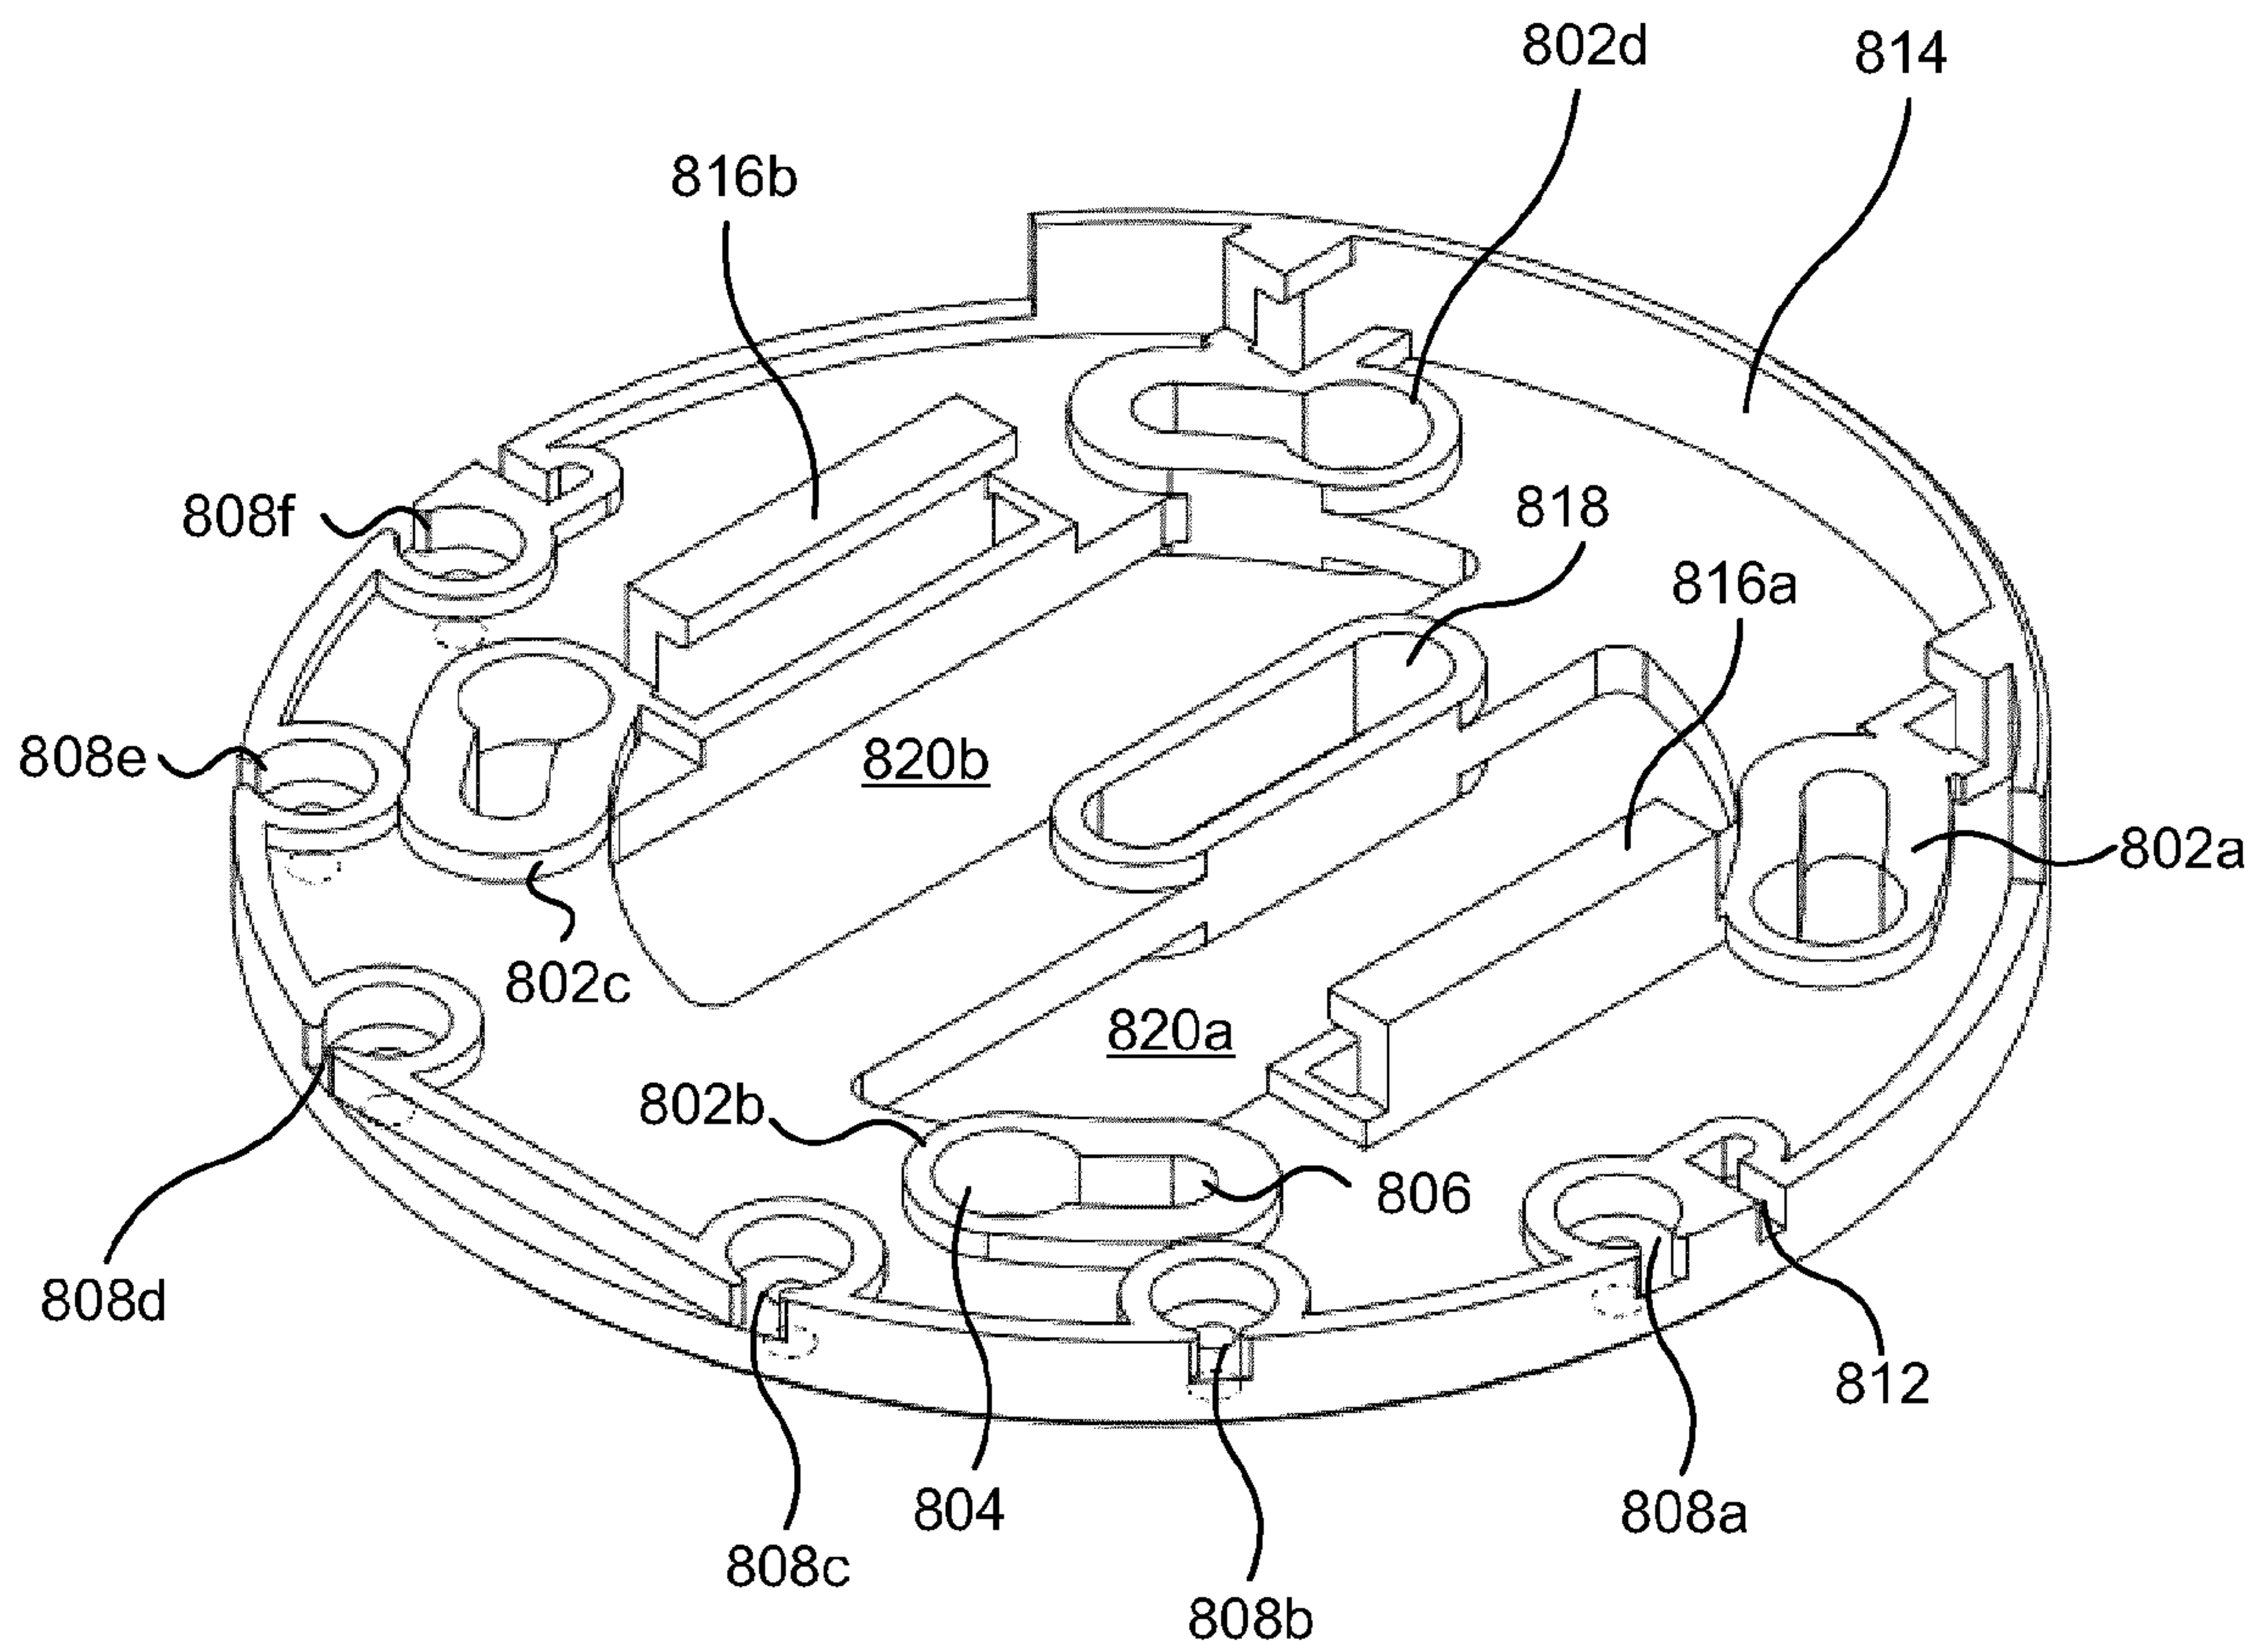


Figure 6

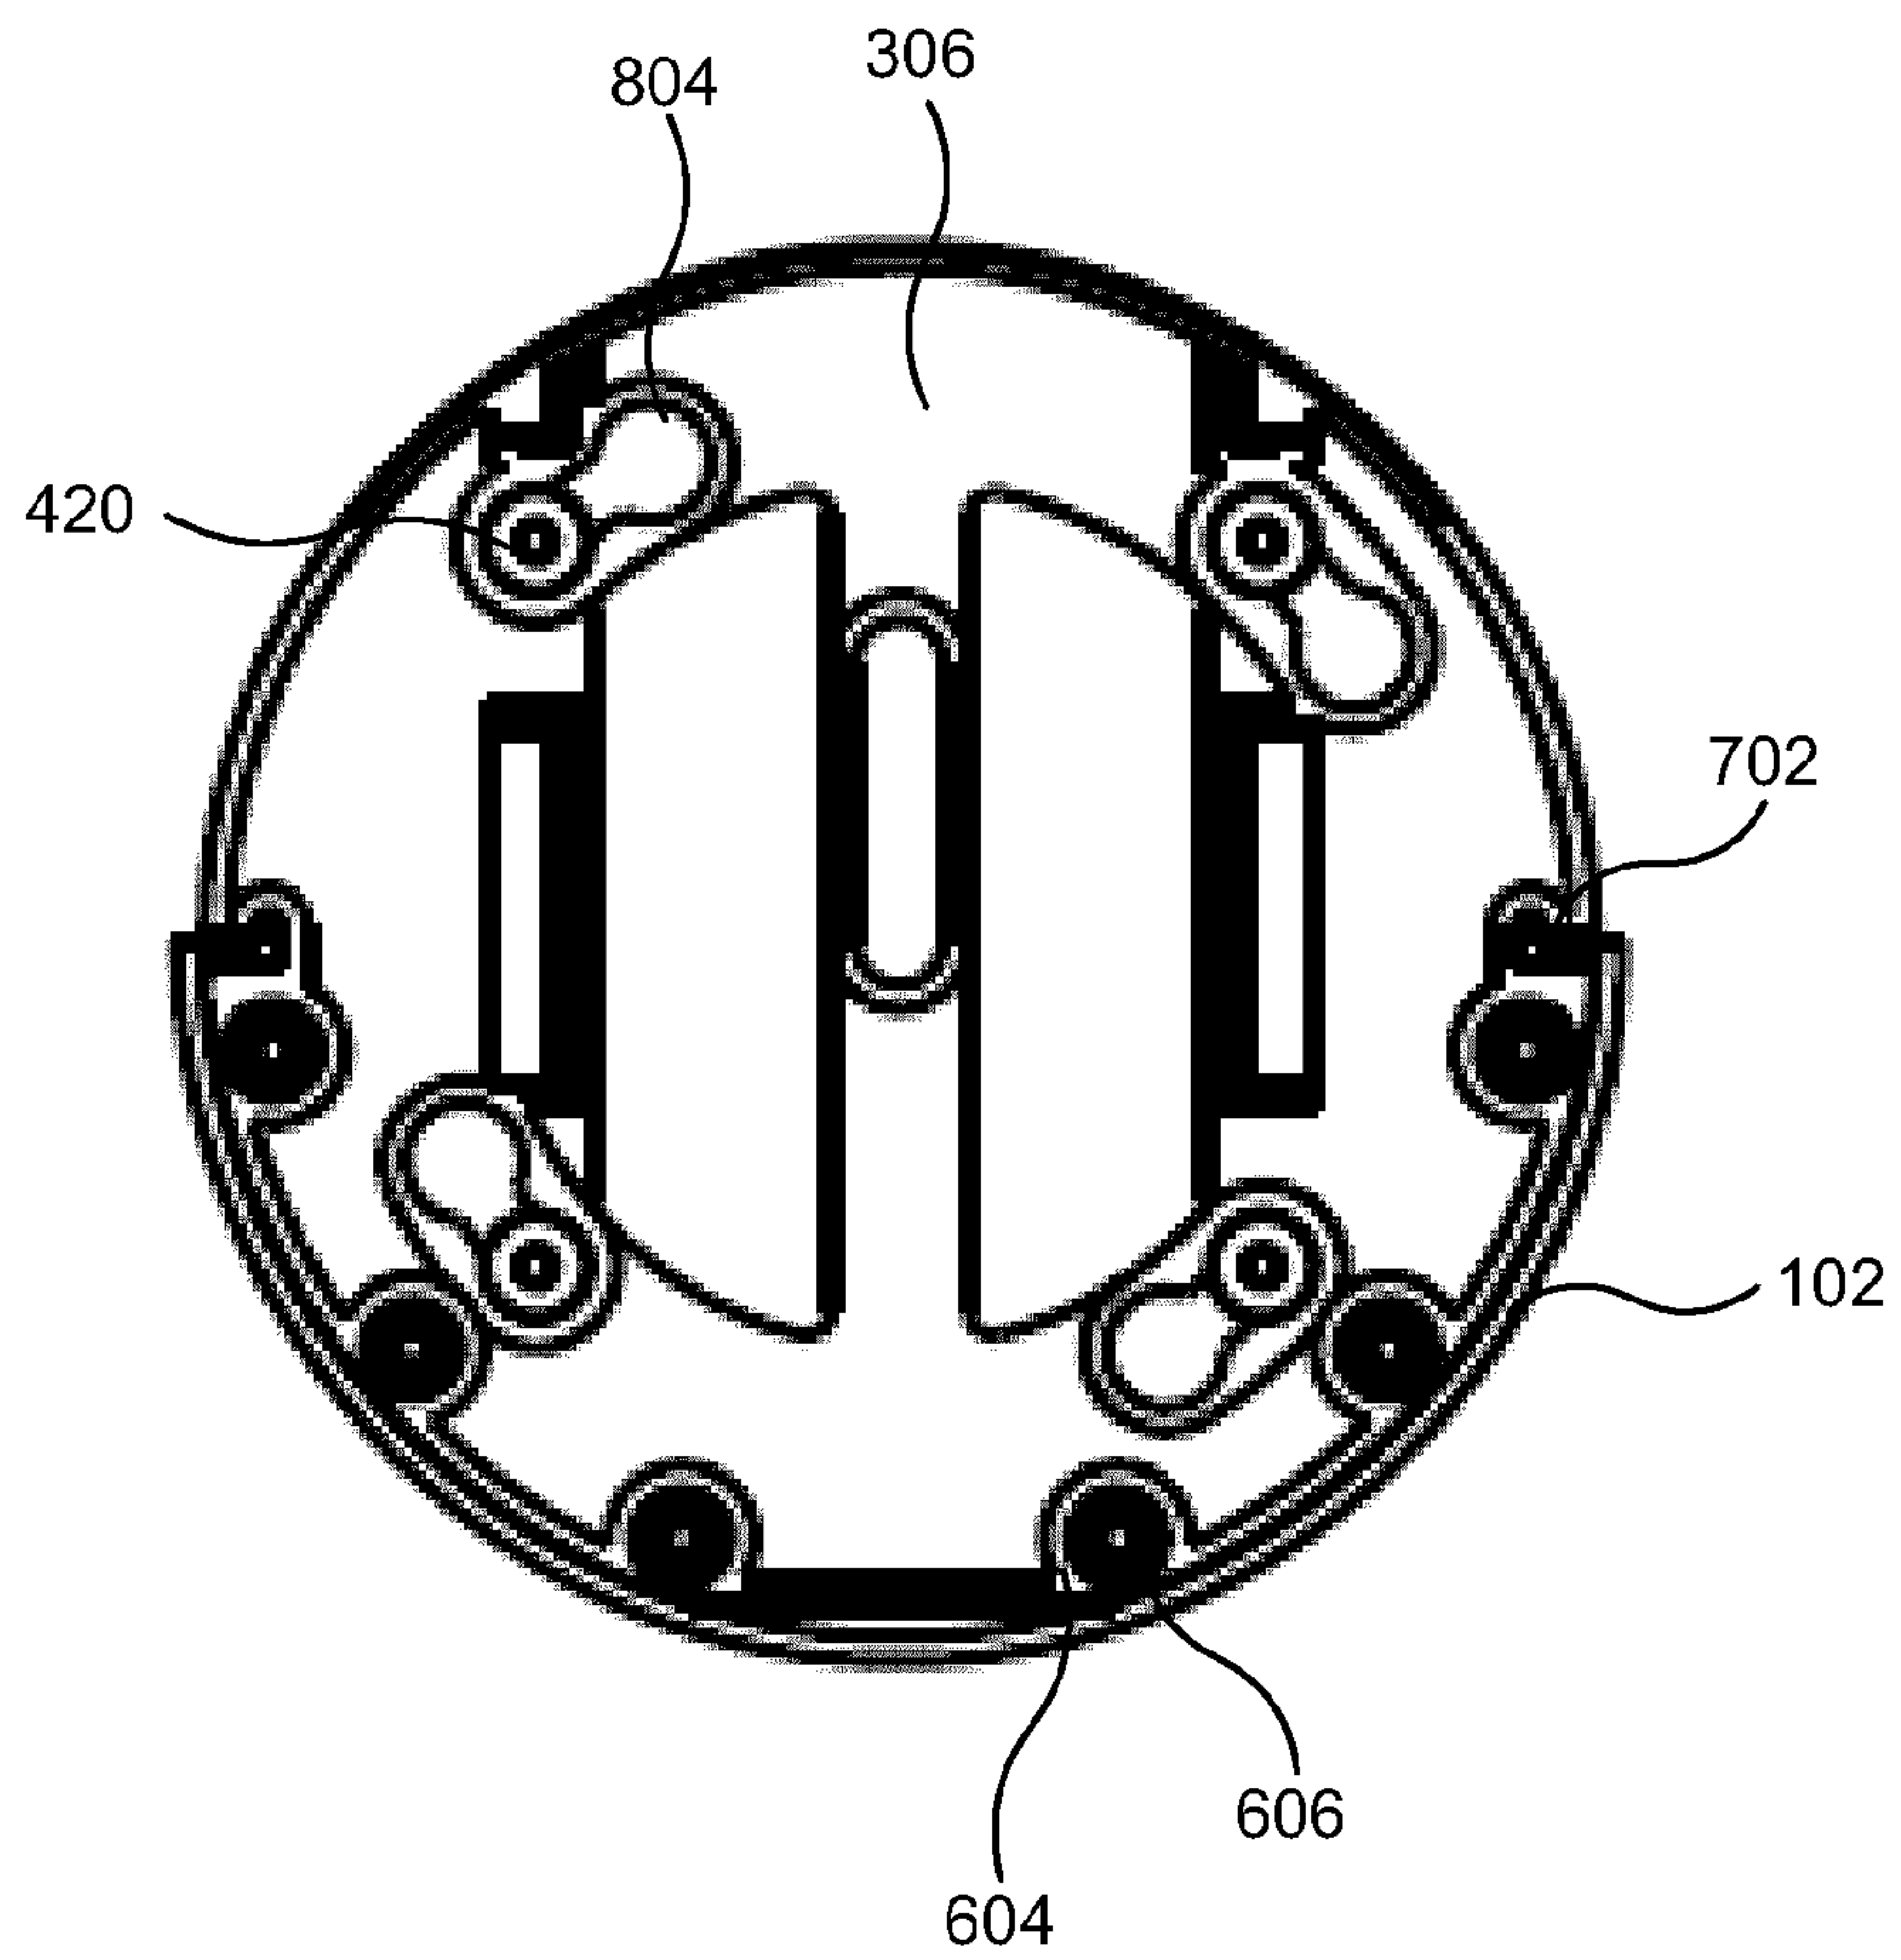
7/34

**Figure 7**


8/34

306**Figure 8**


9/34

**Figure 9**


10/34

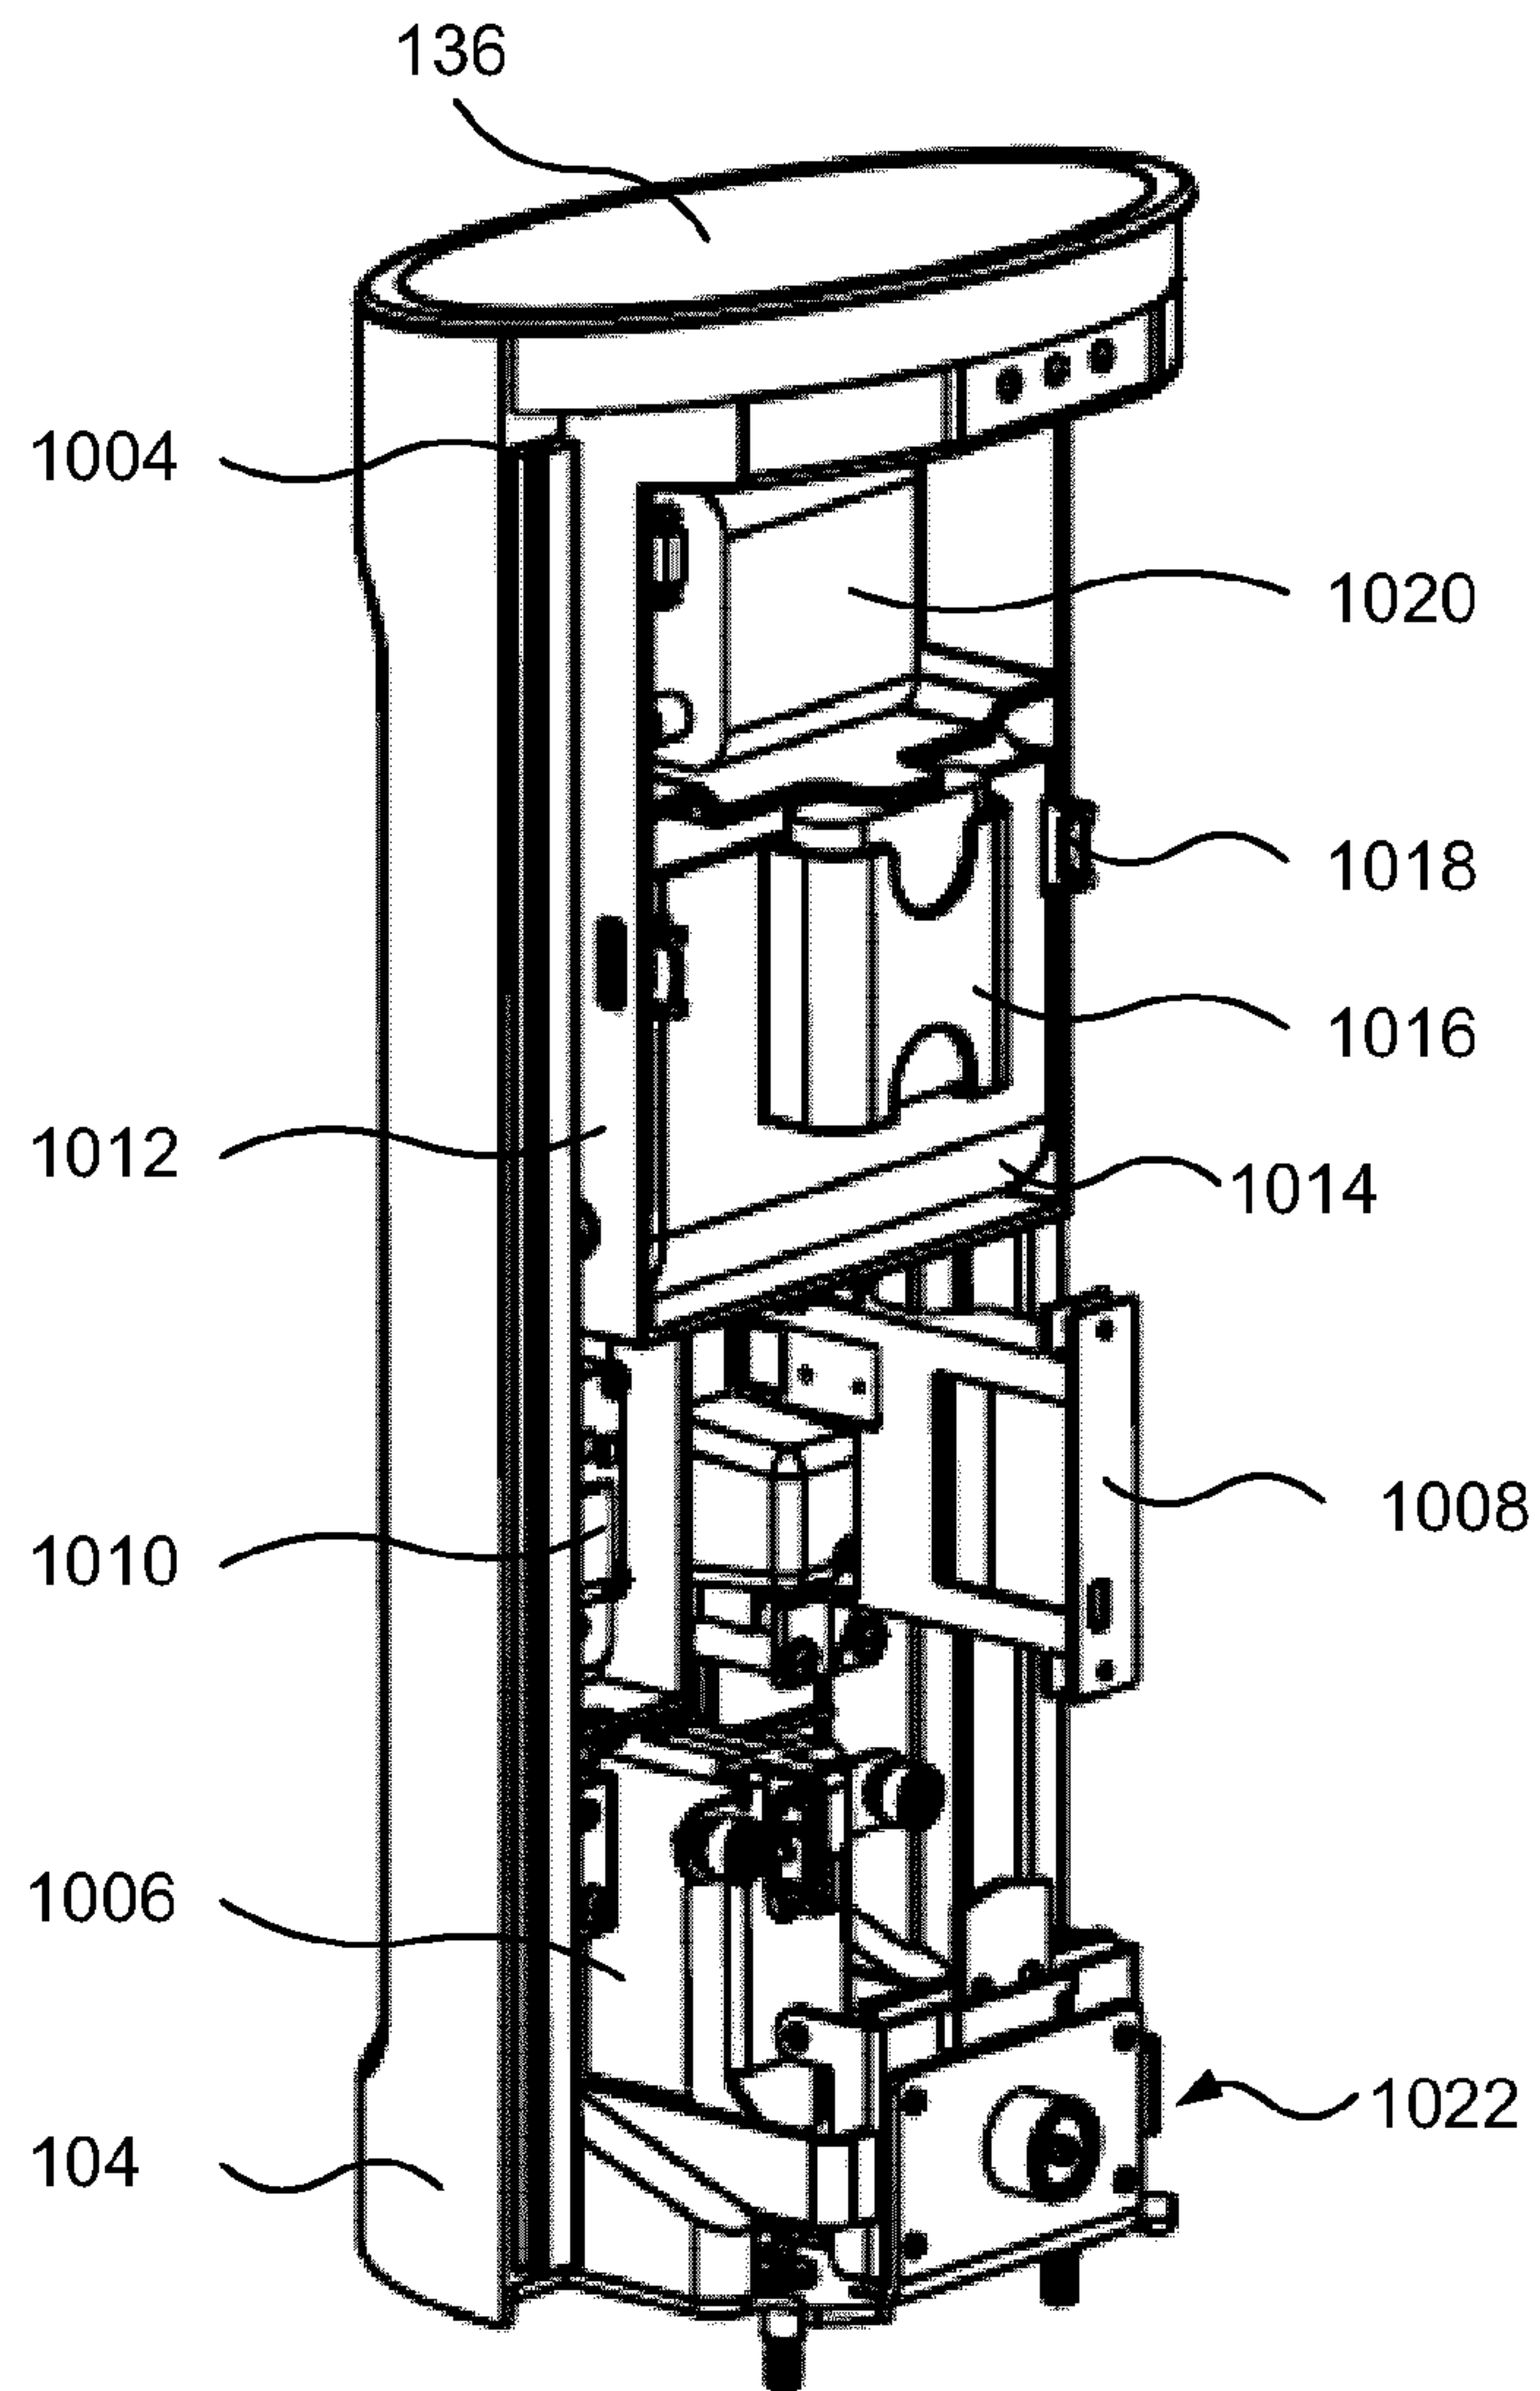302**Figure 10**


11/34

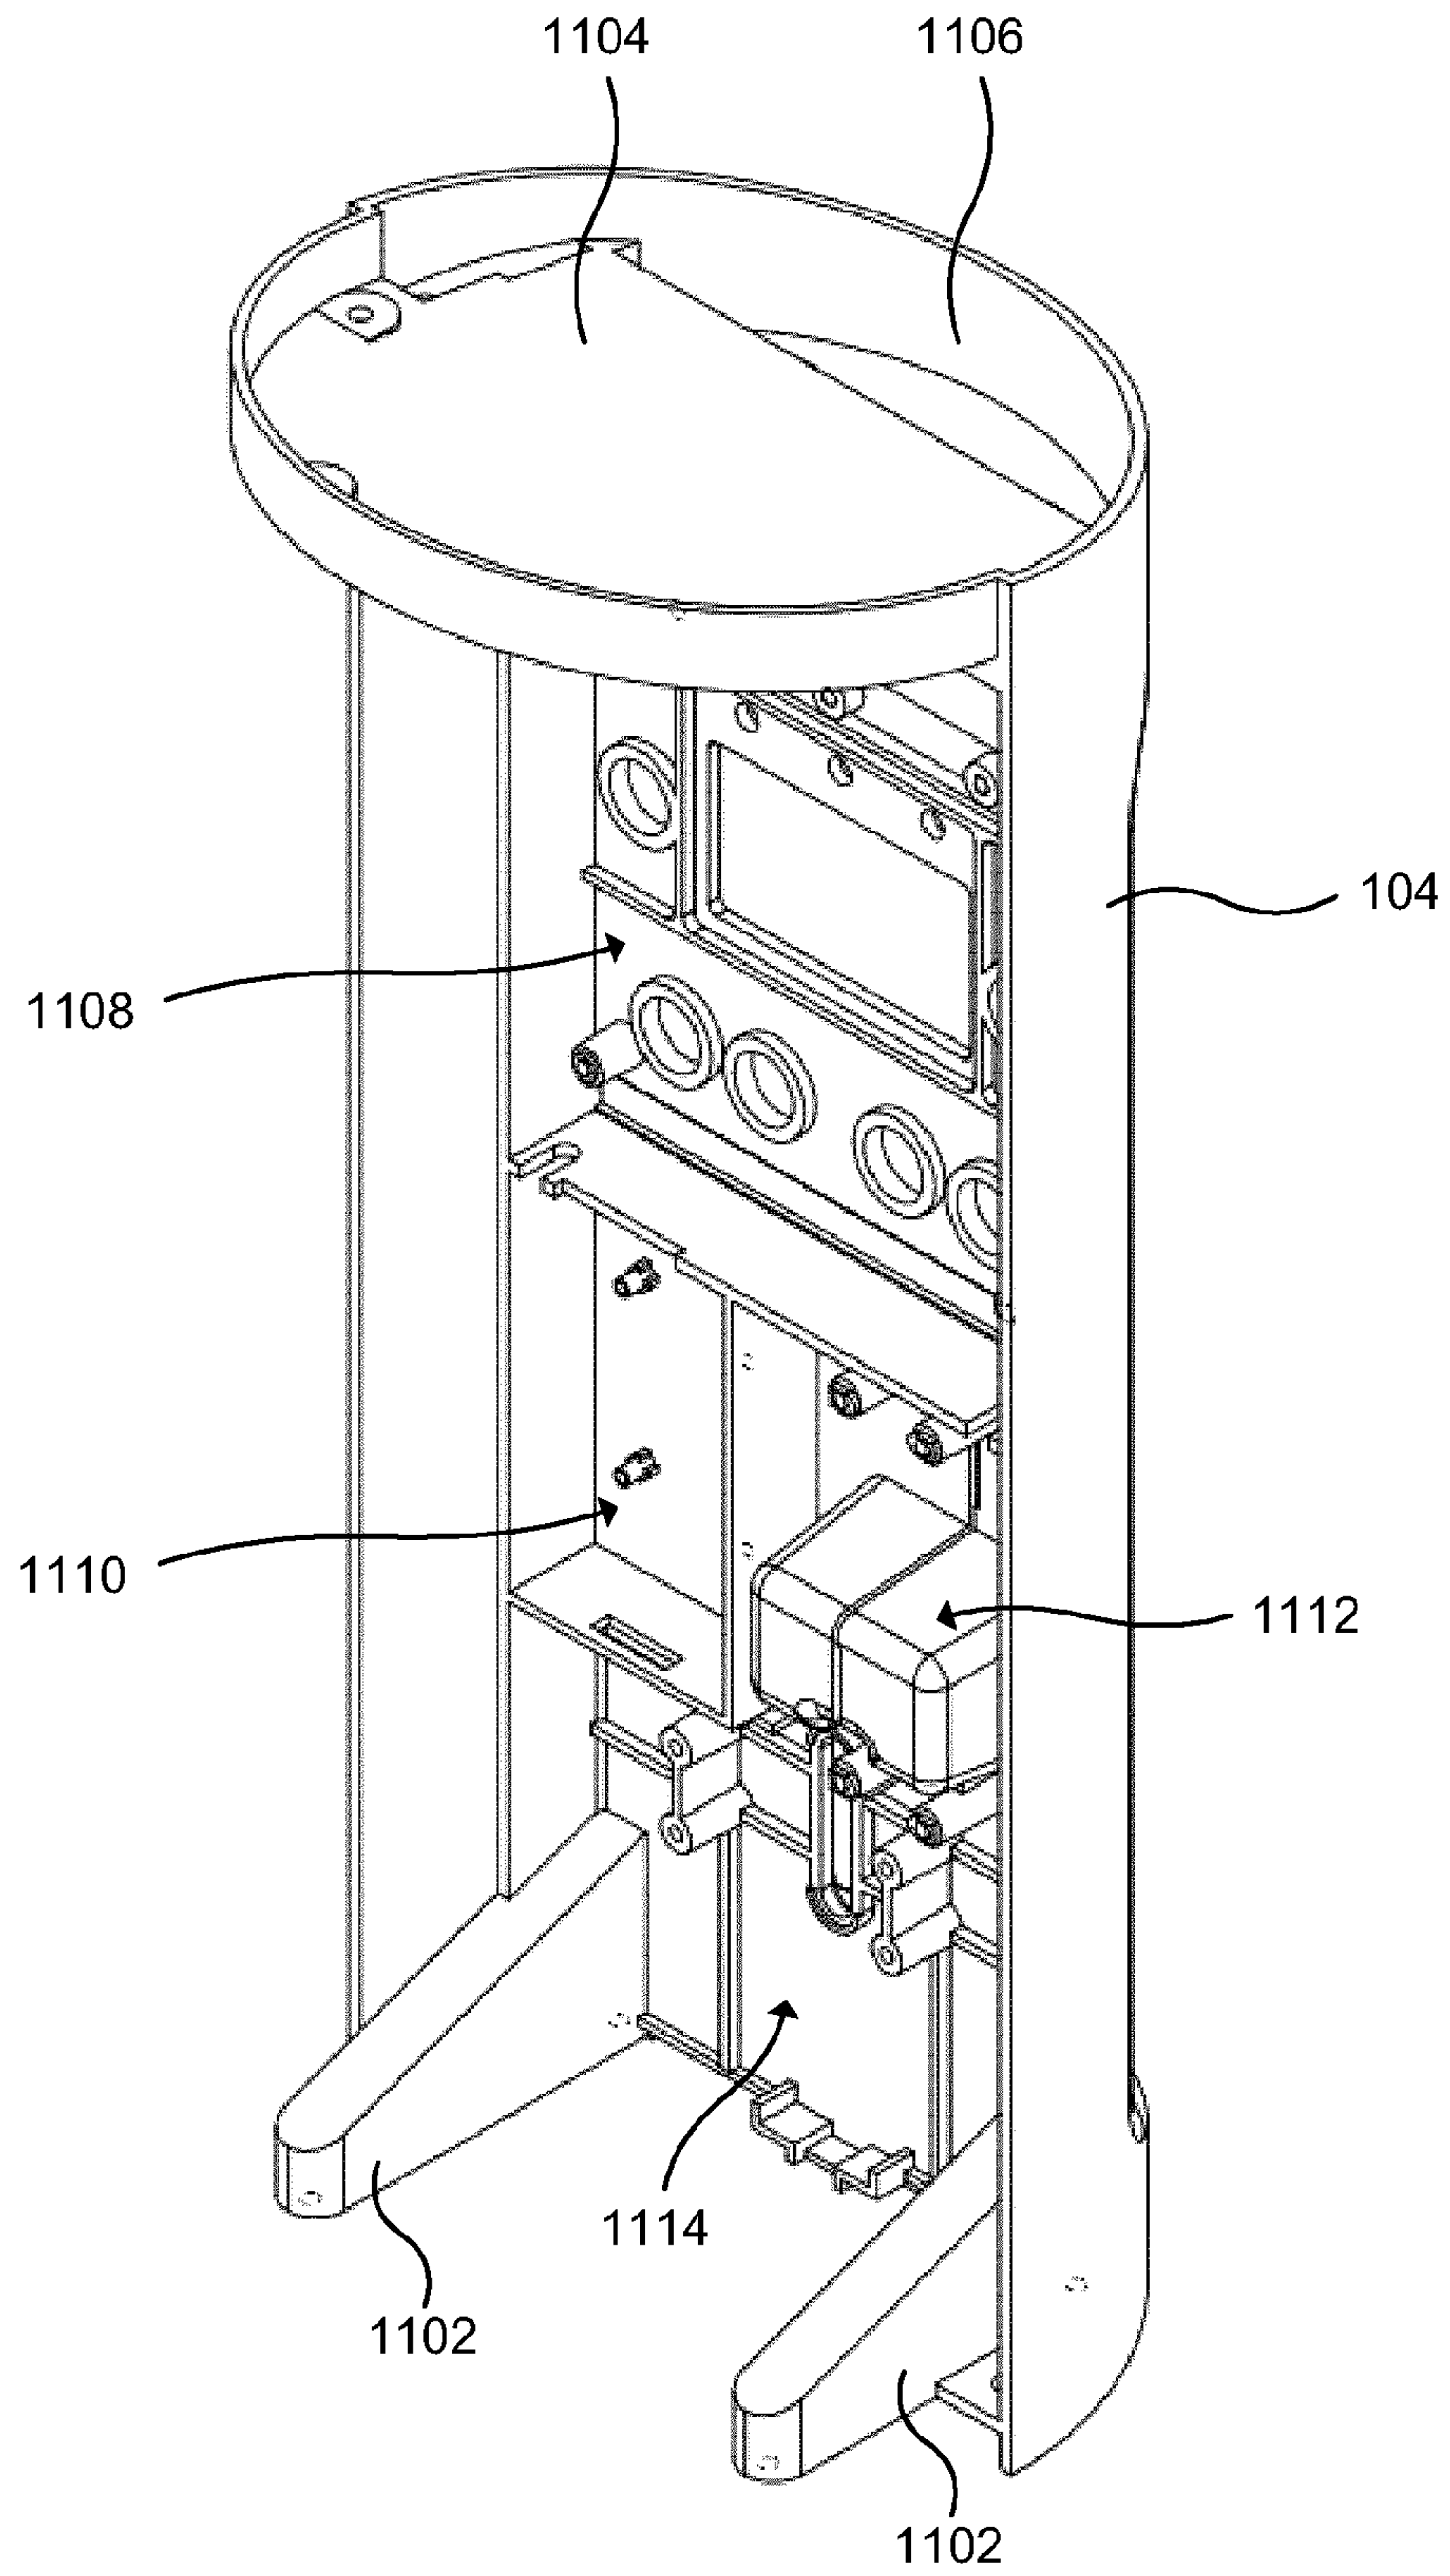**Figure 11**


12/34

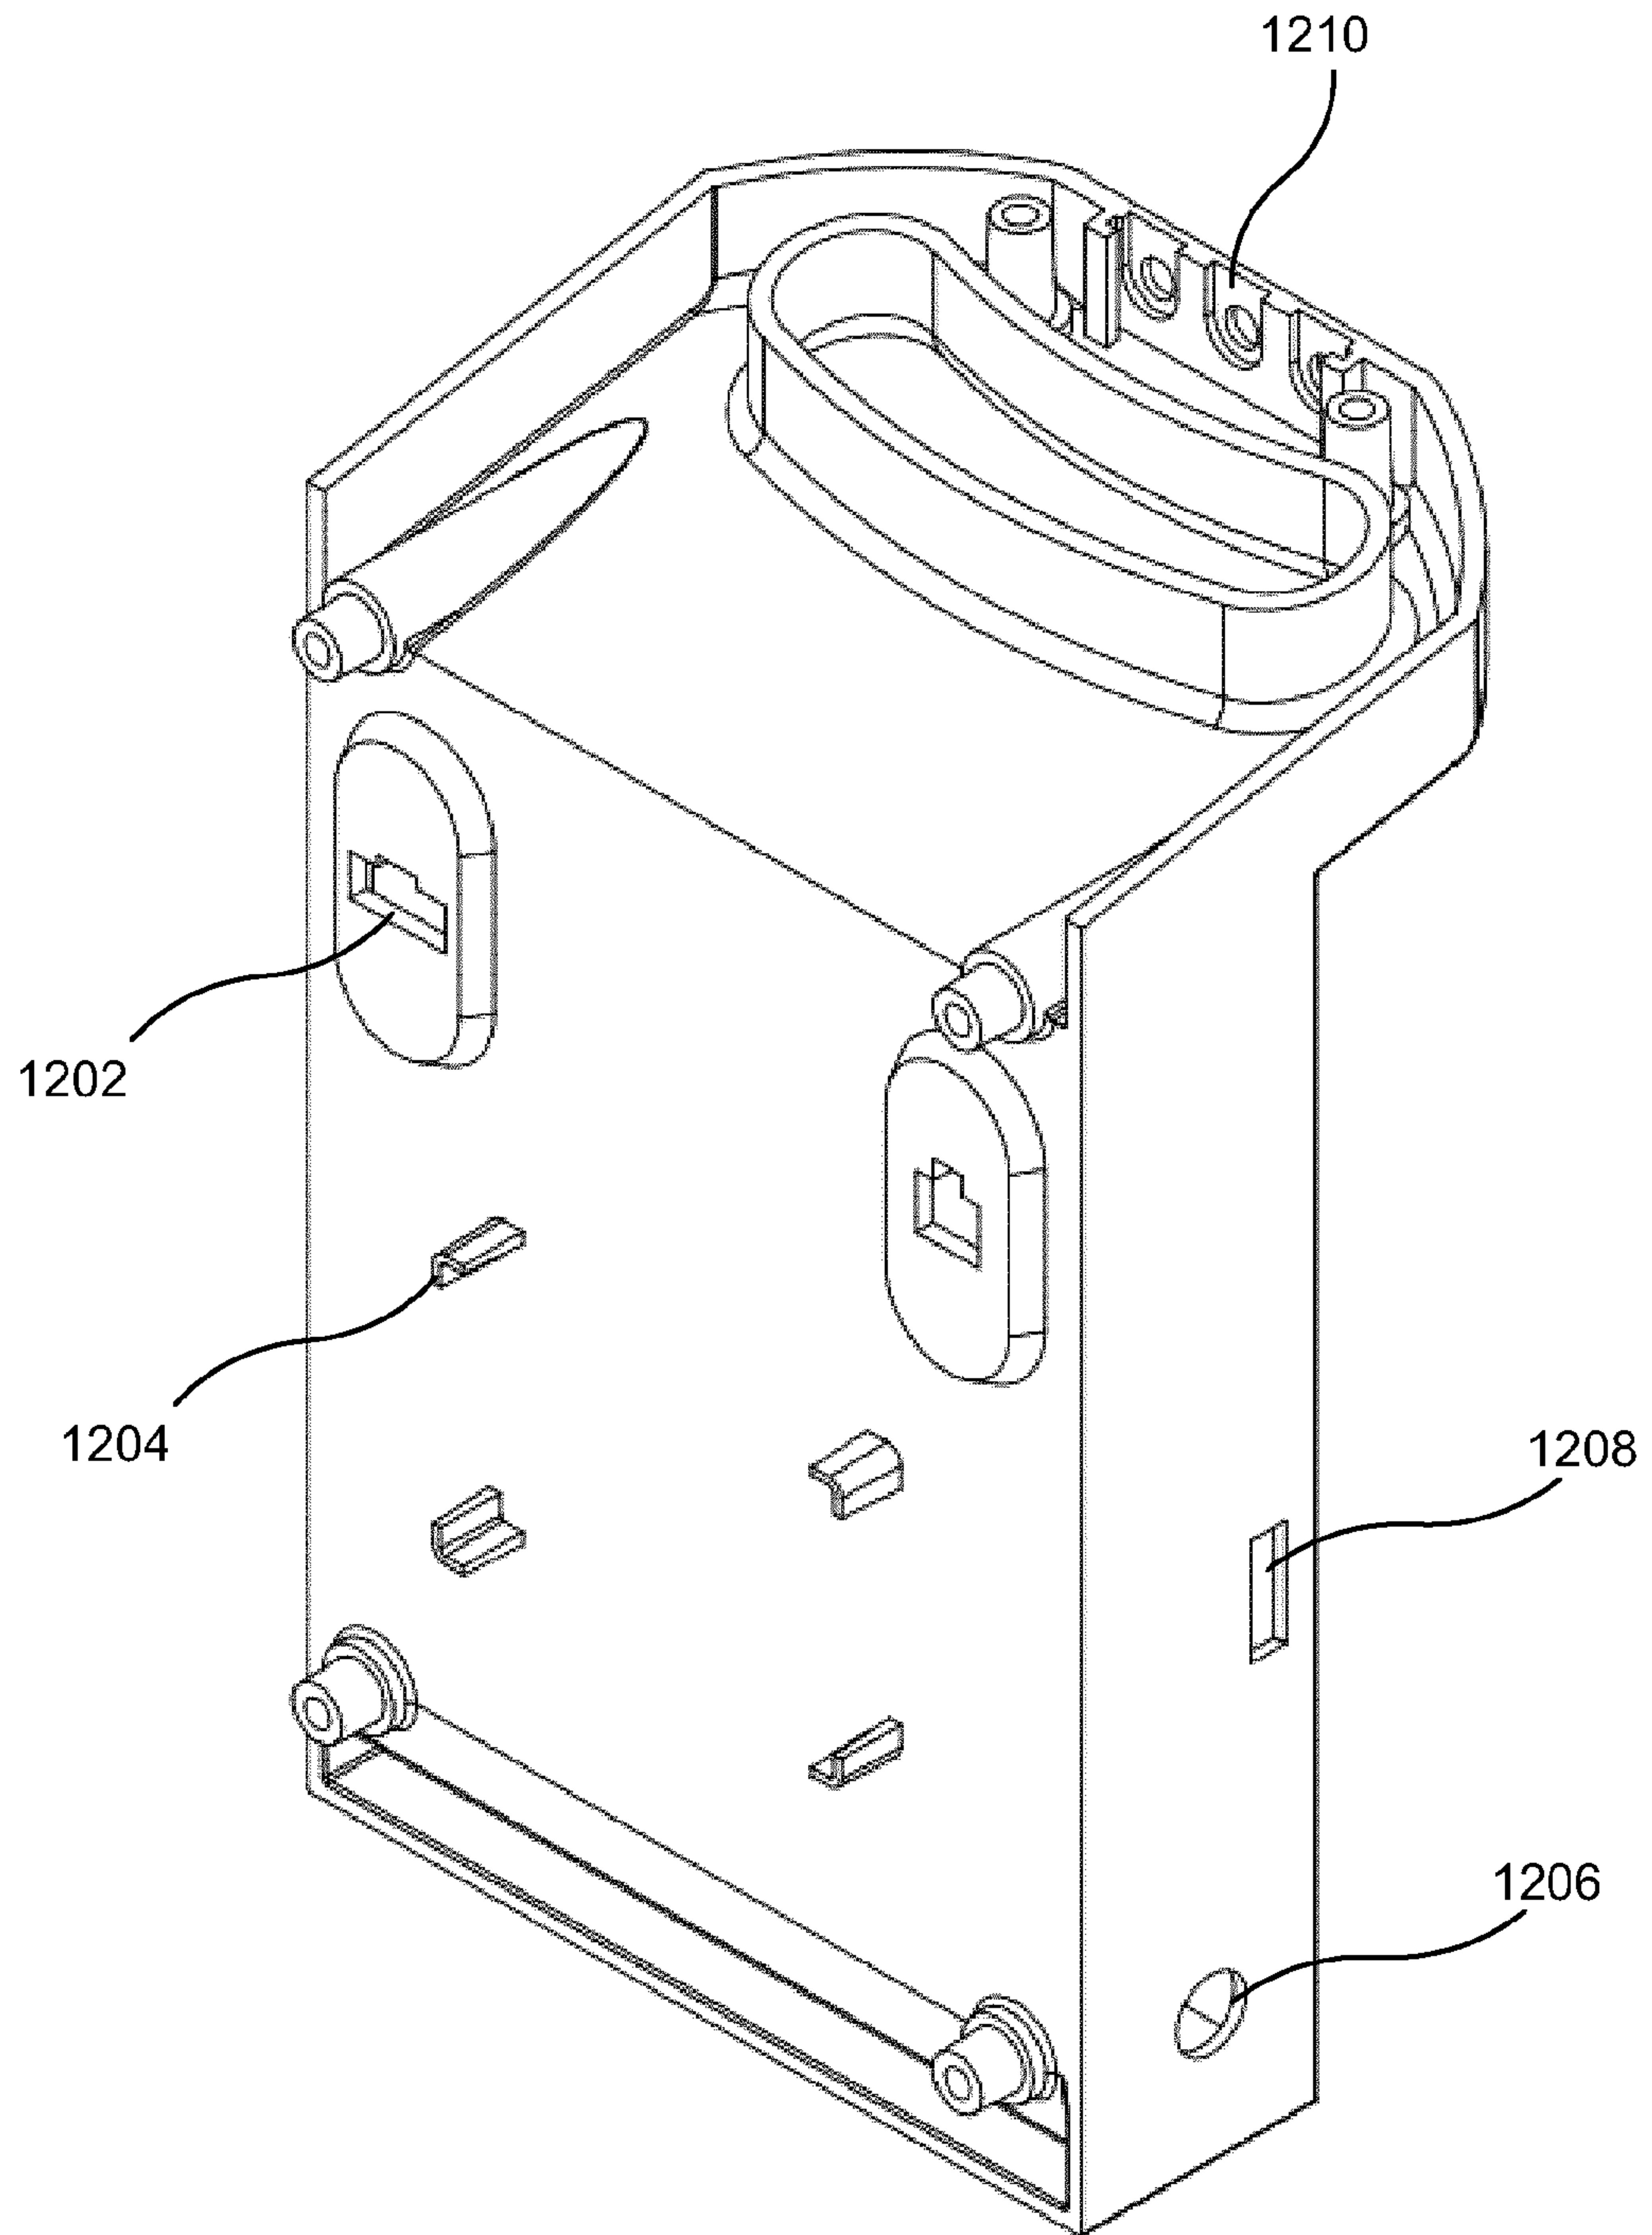1012**Figure 12**


13/34

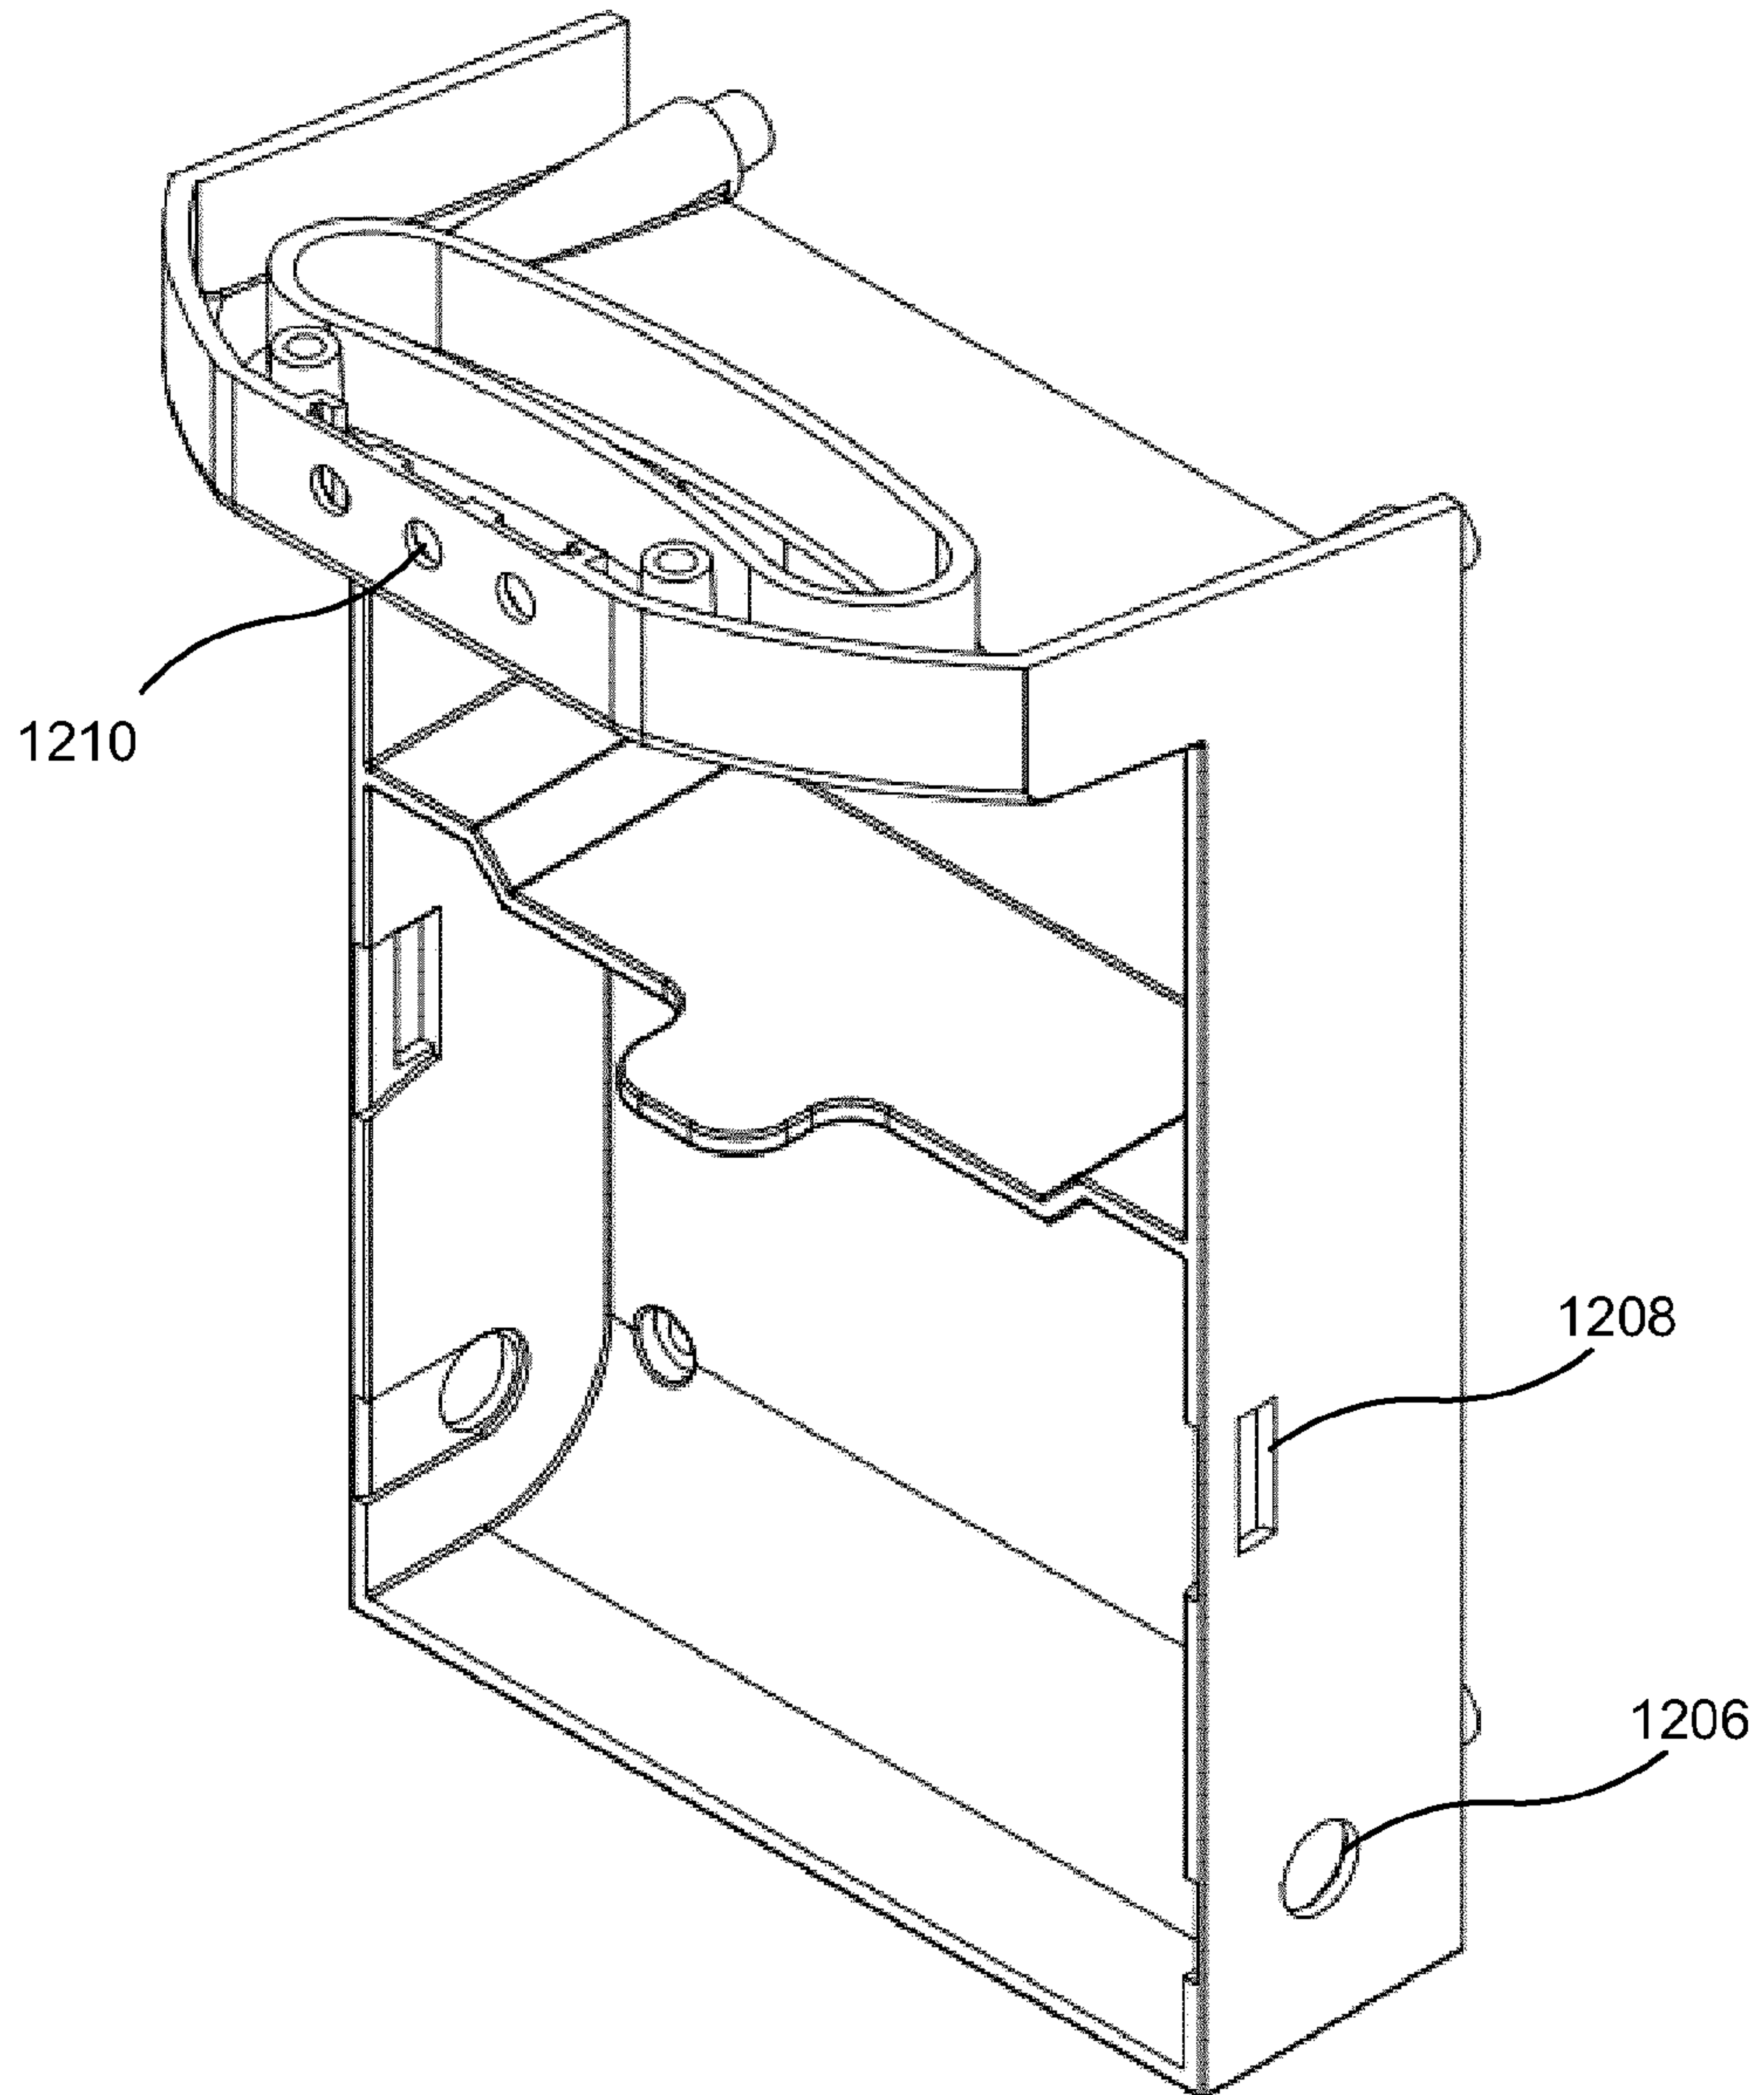1012**Figure 13**


14/34

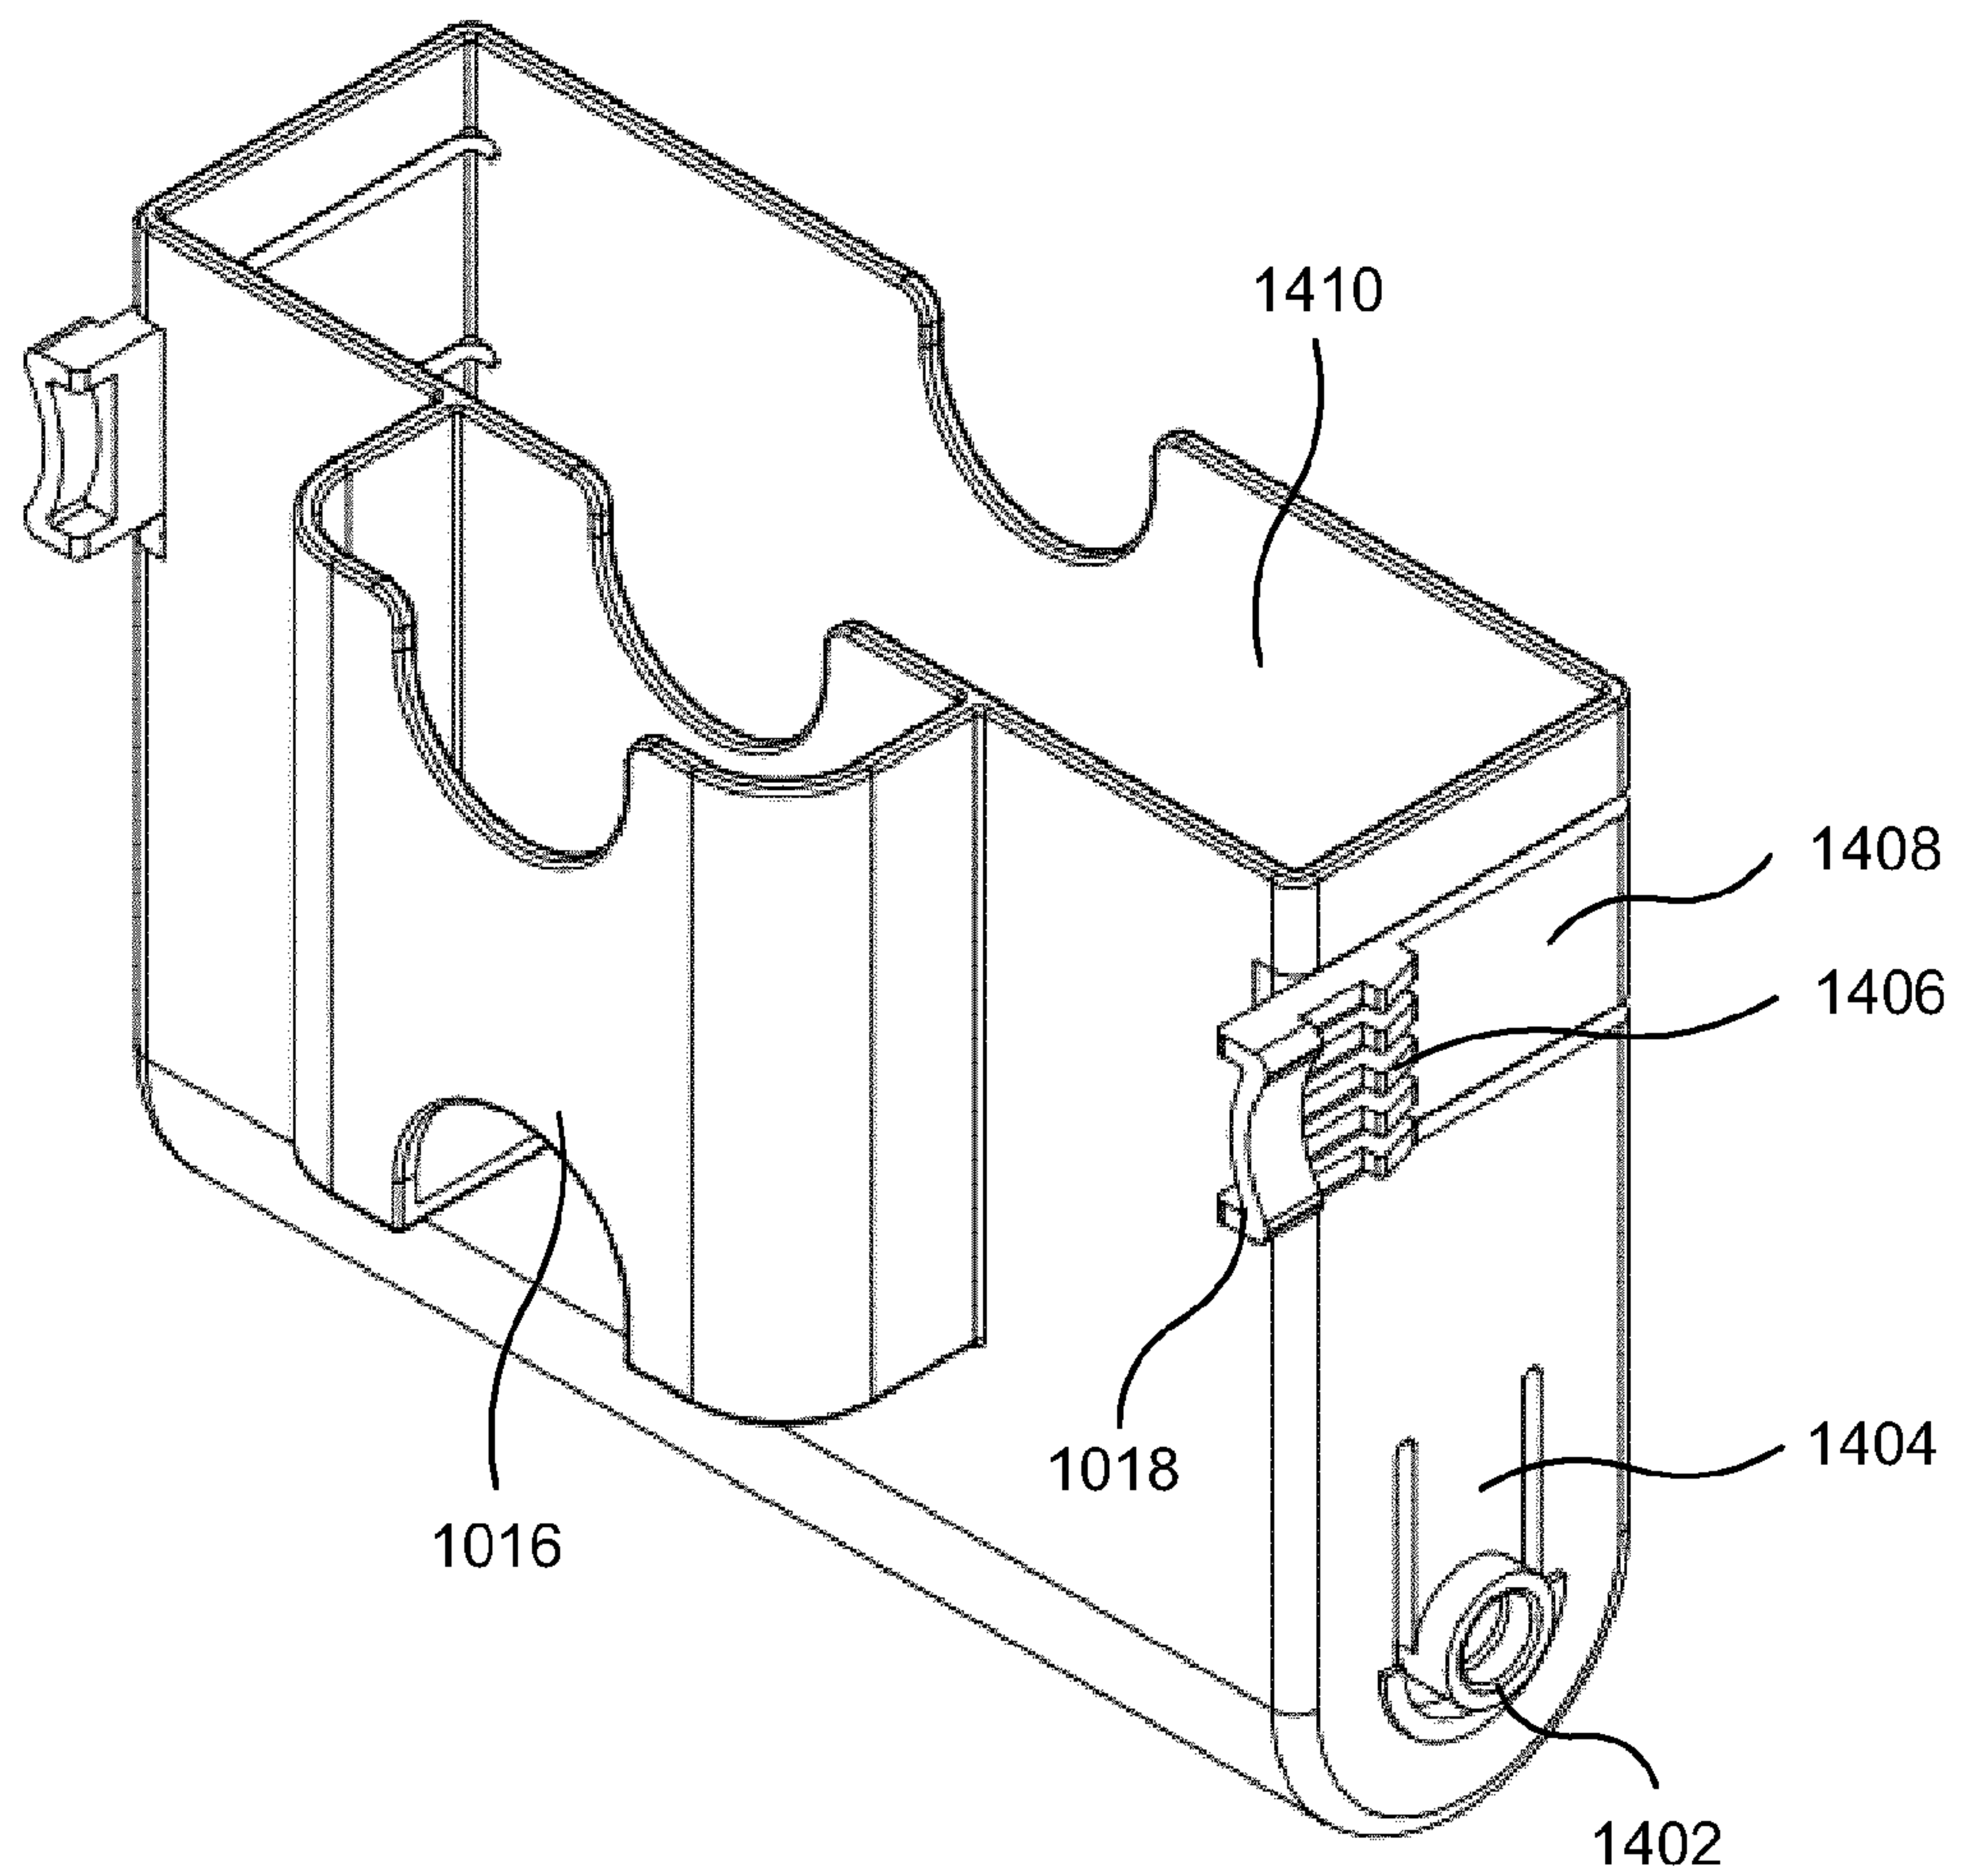1014**Figure 14**


15/34

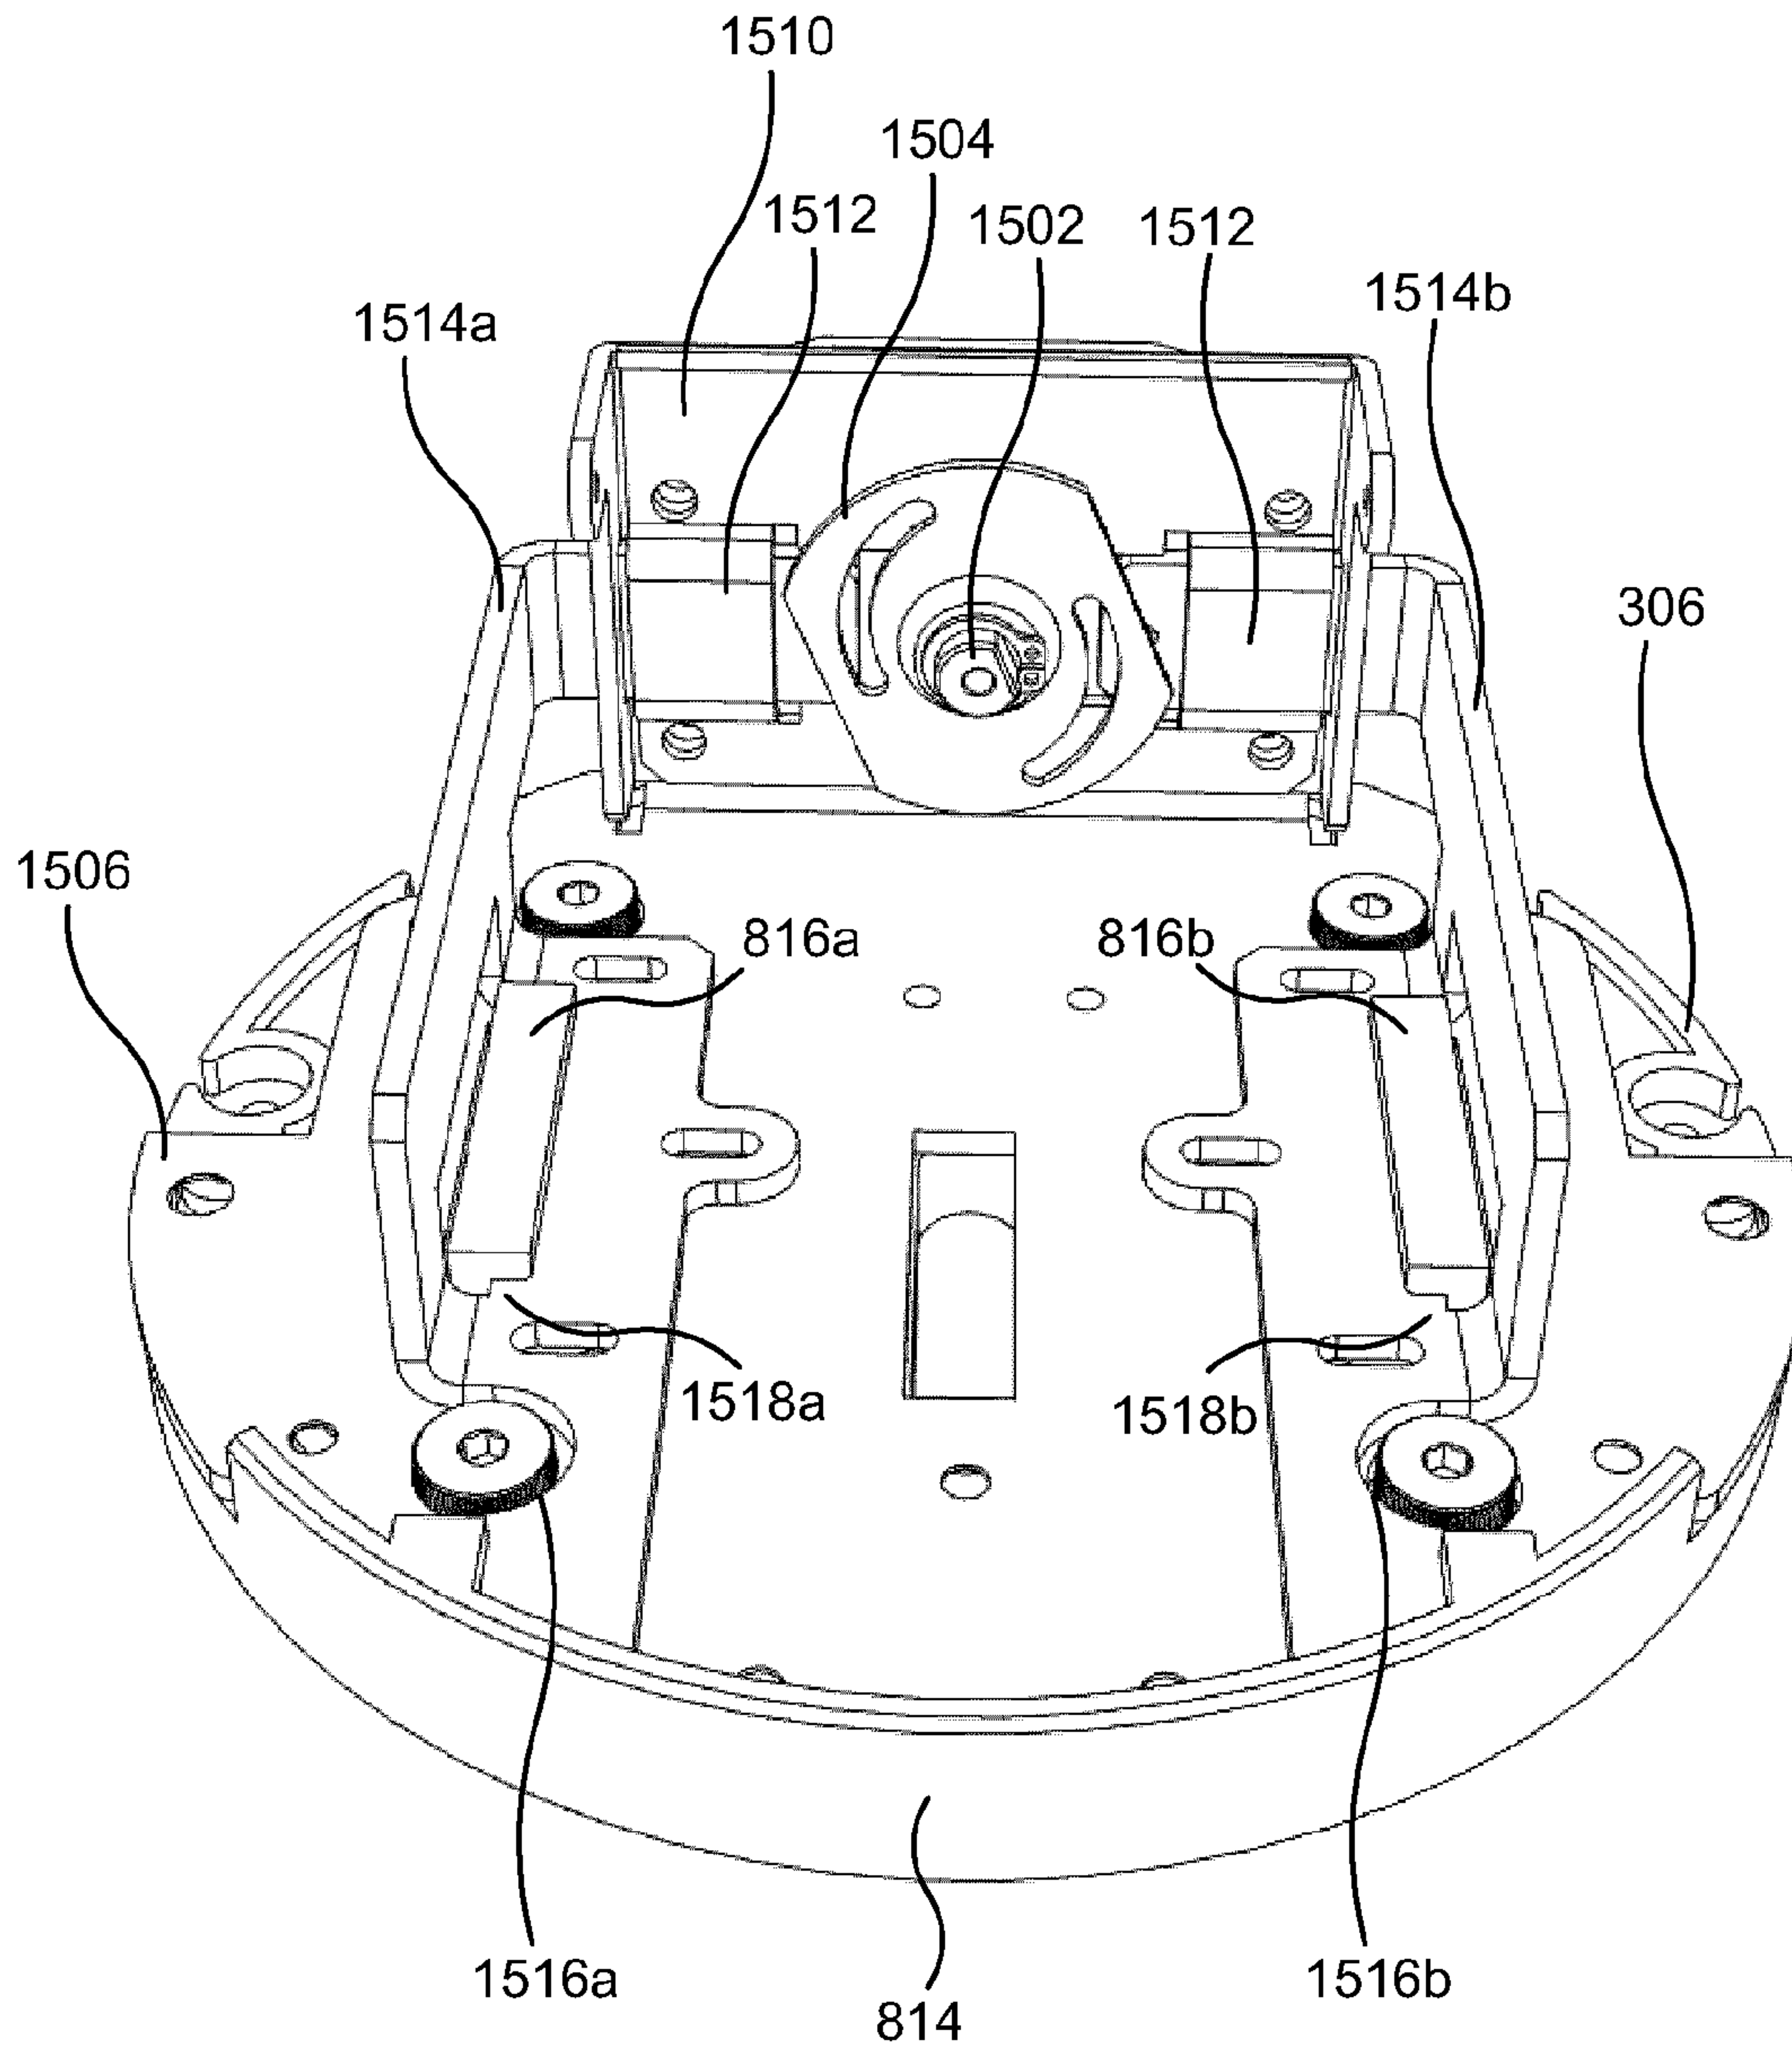1022**Figure 15**


16/34

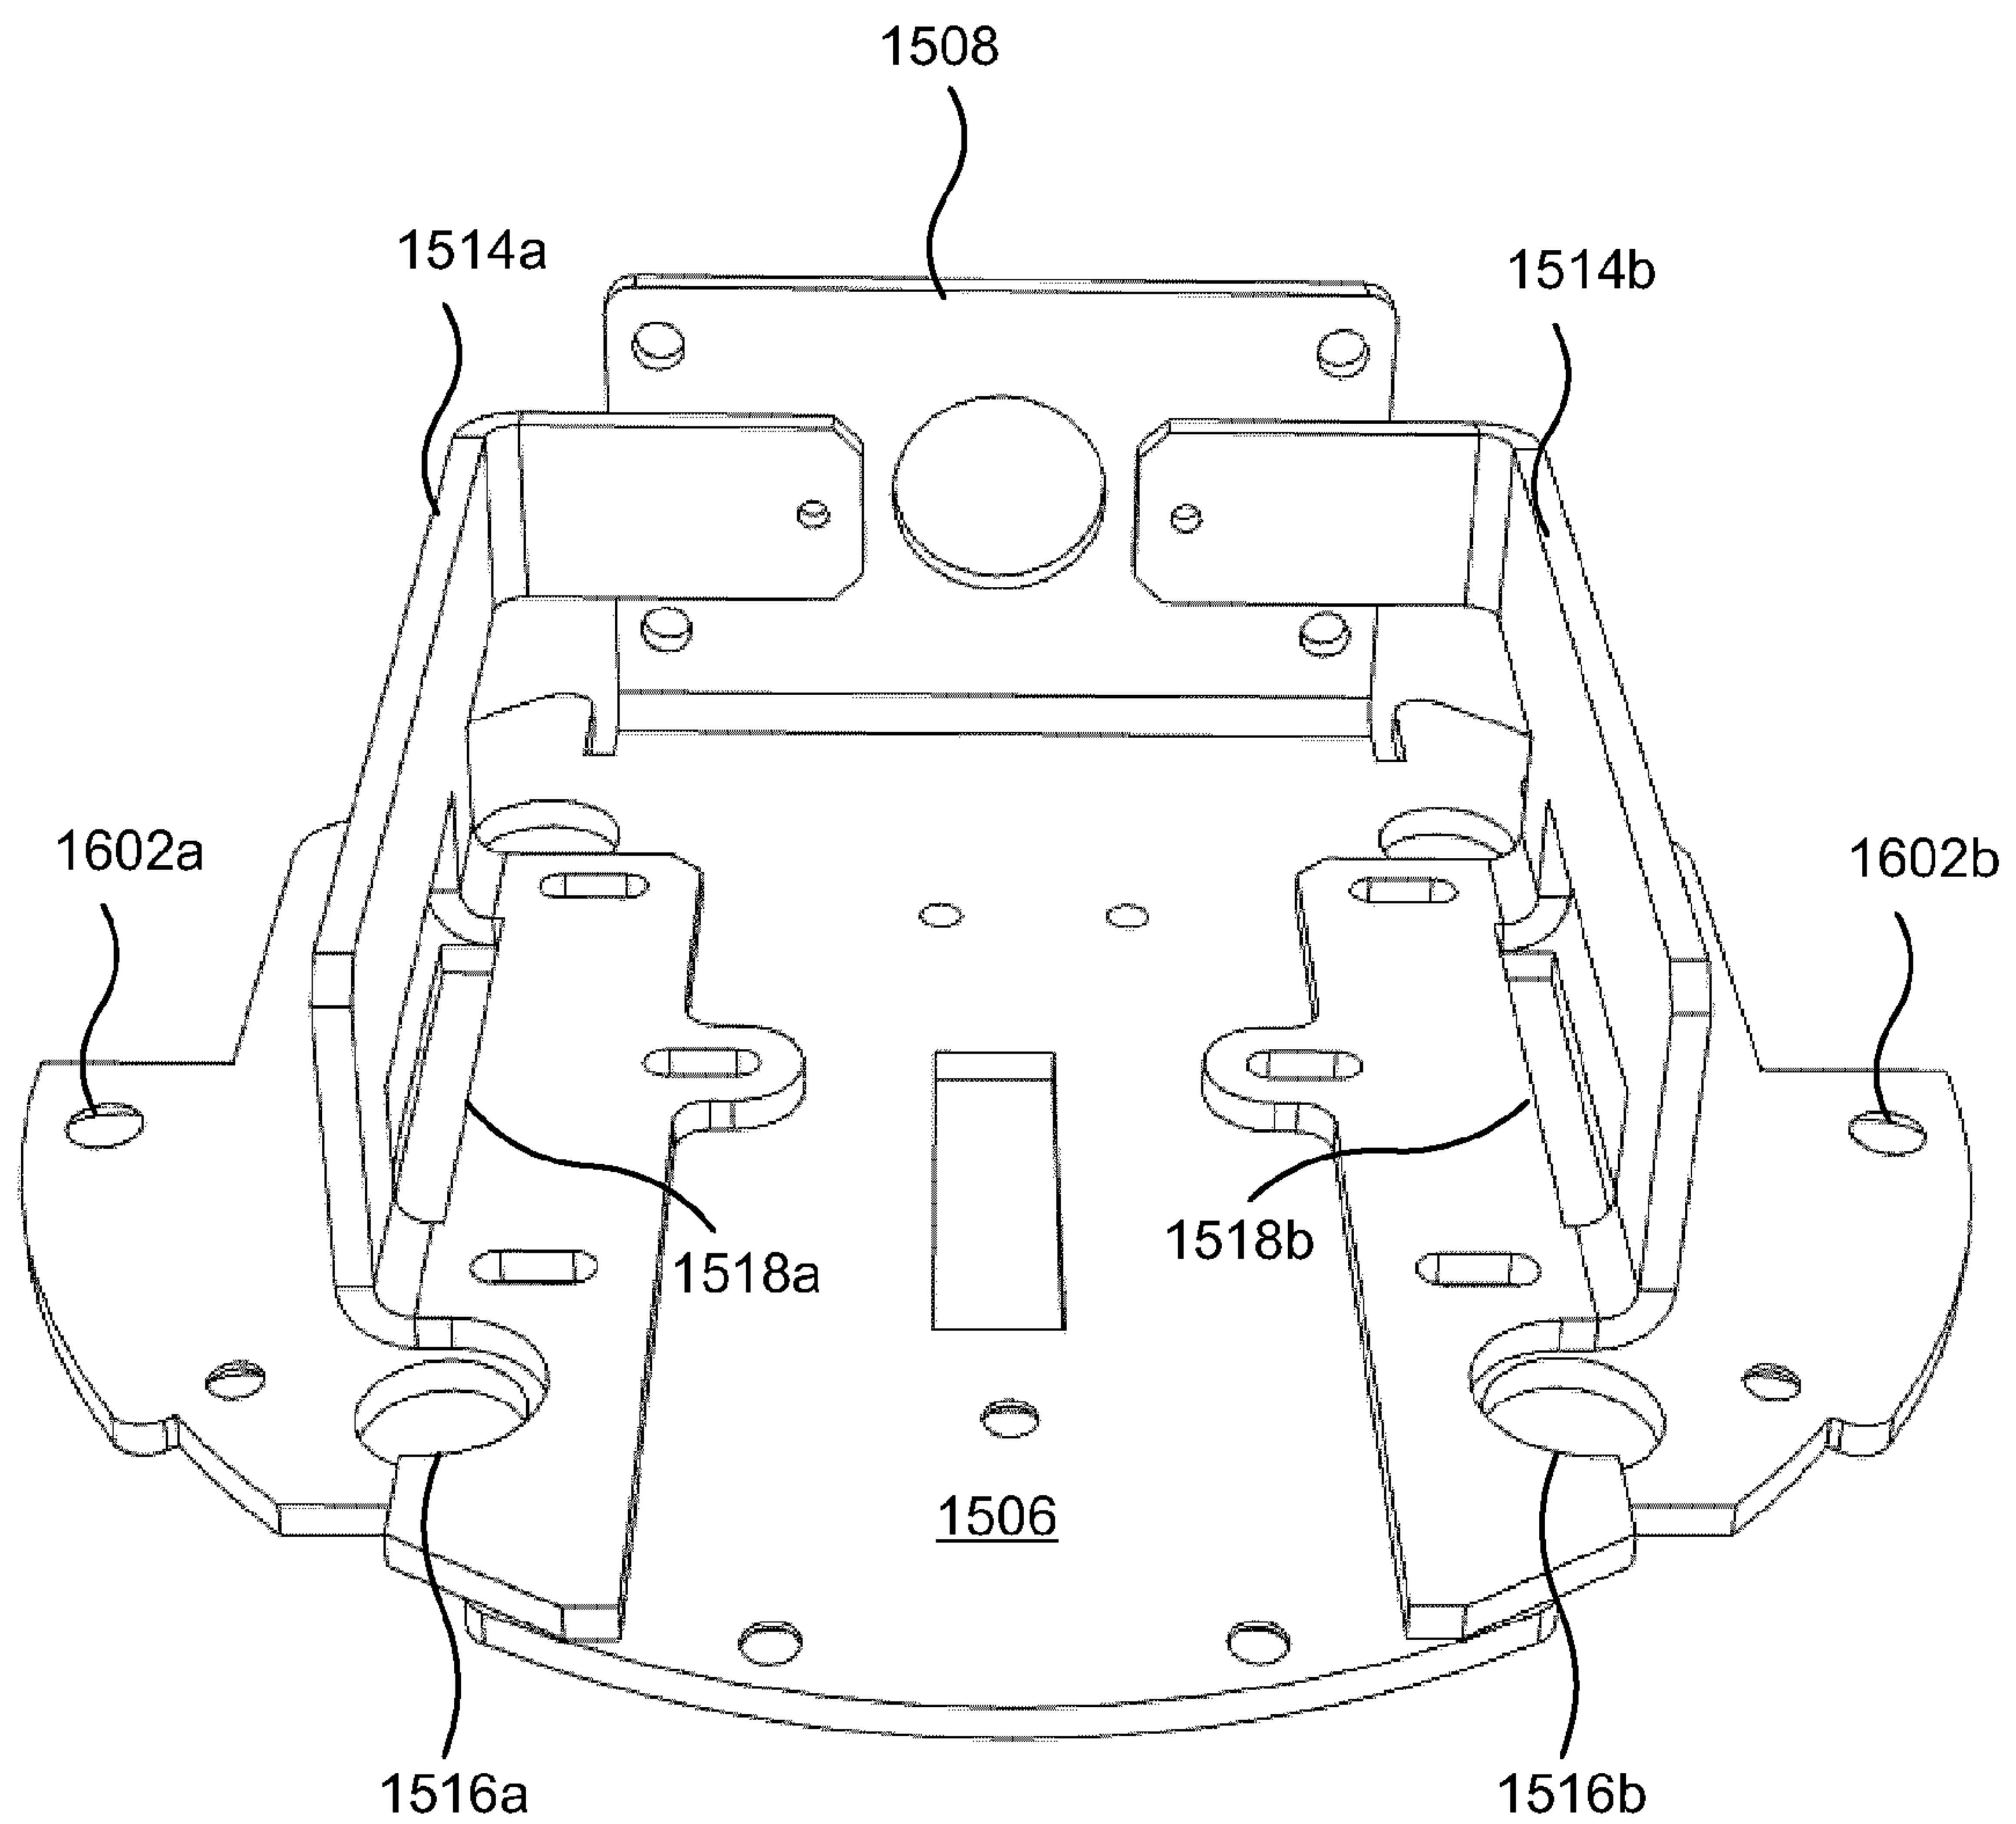**Figure 16**


17/34

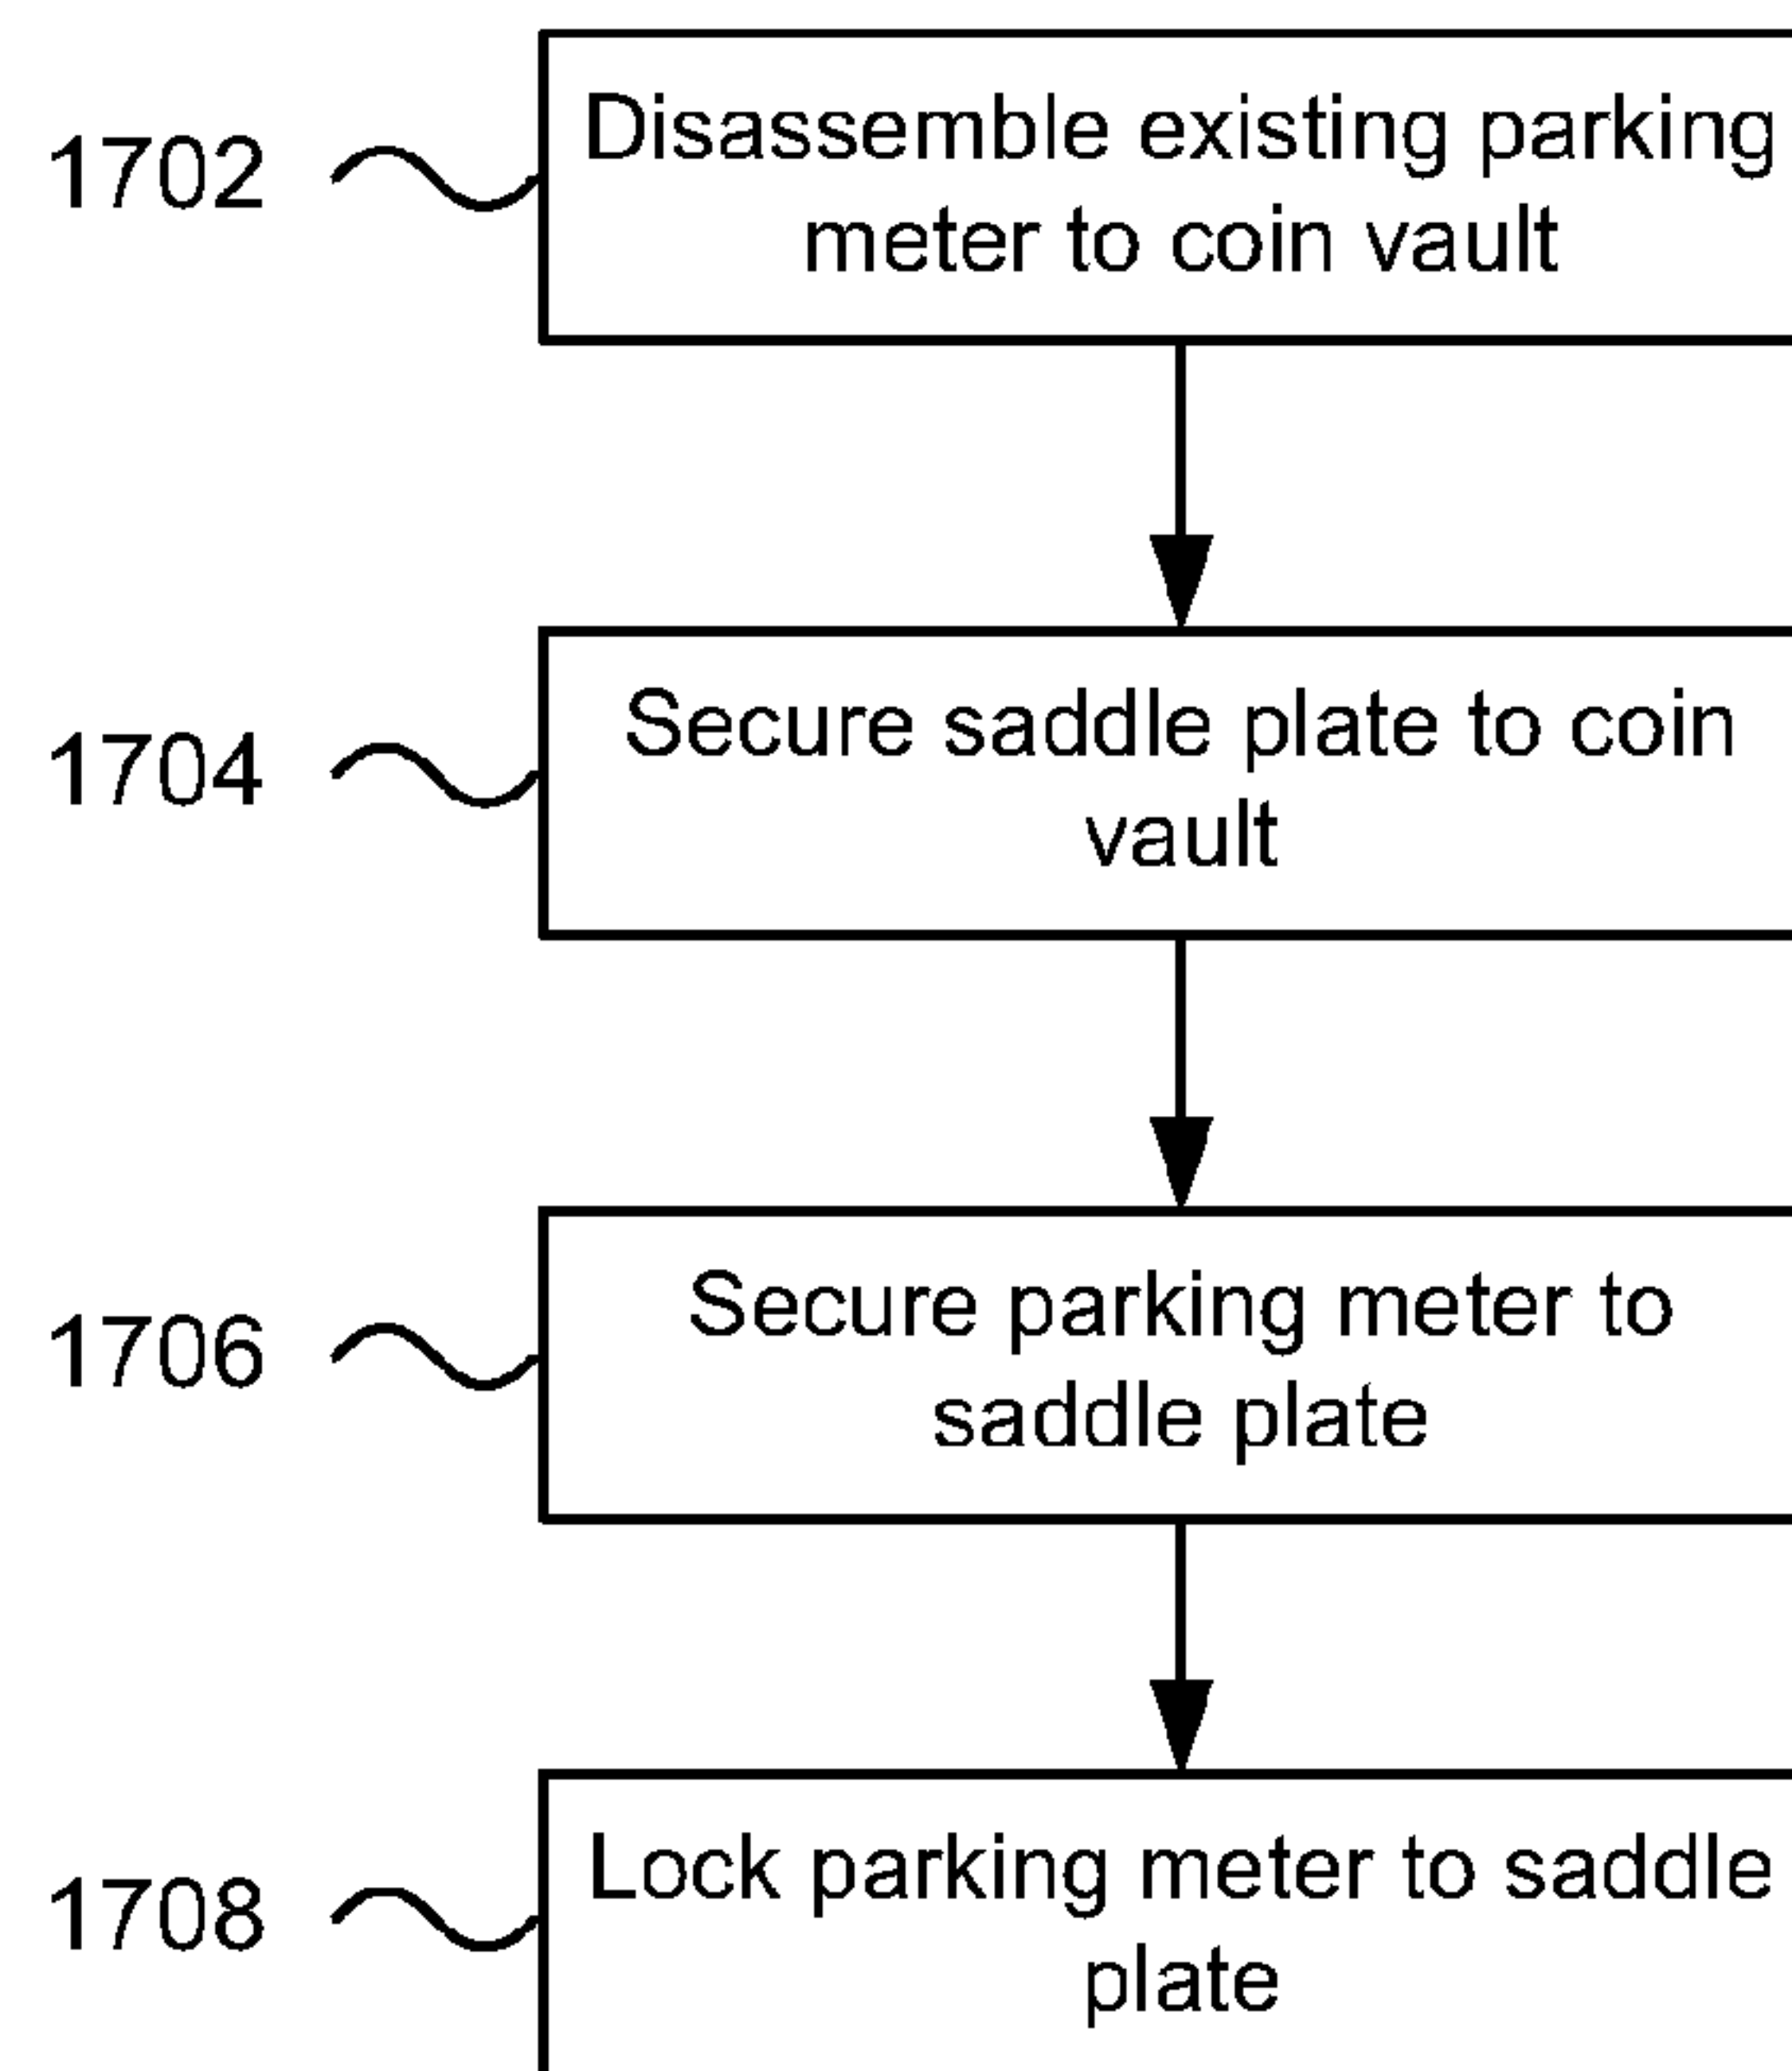1700**Figure 17**

18/34

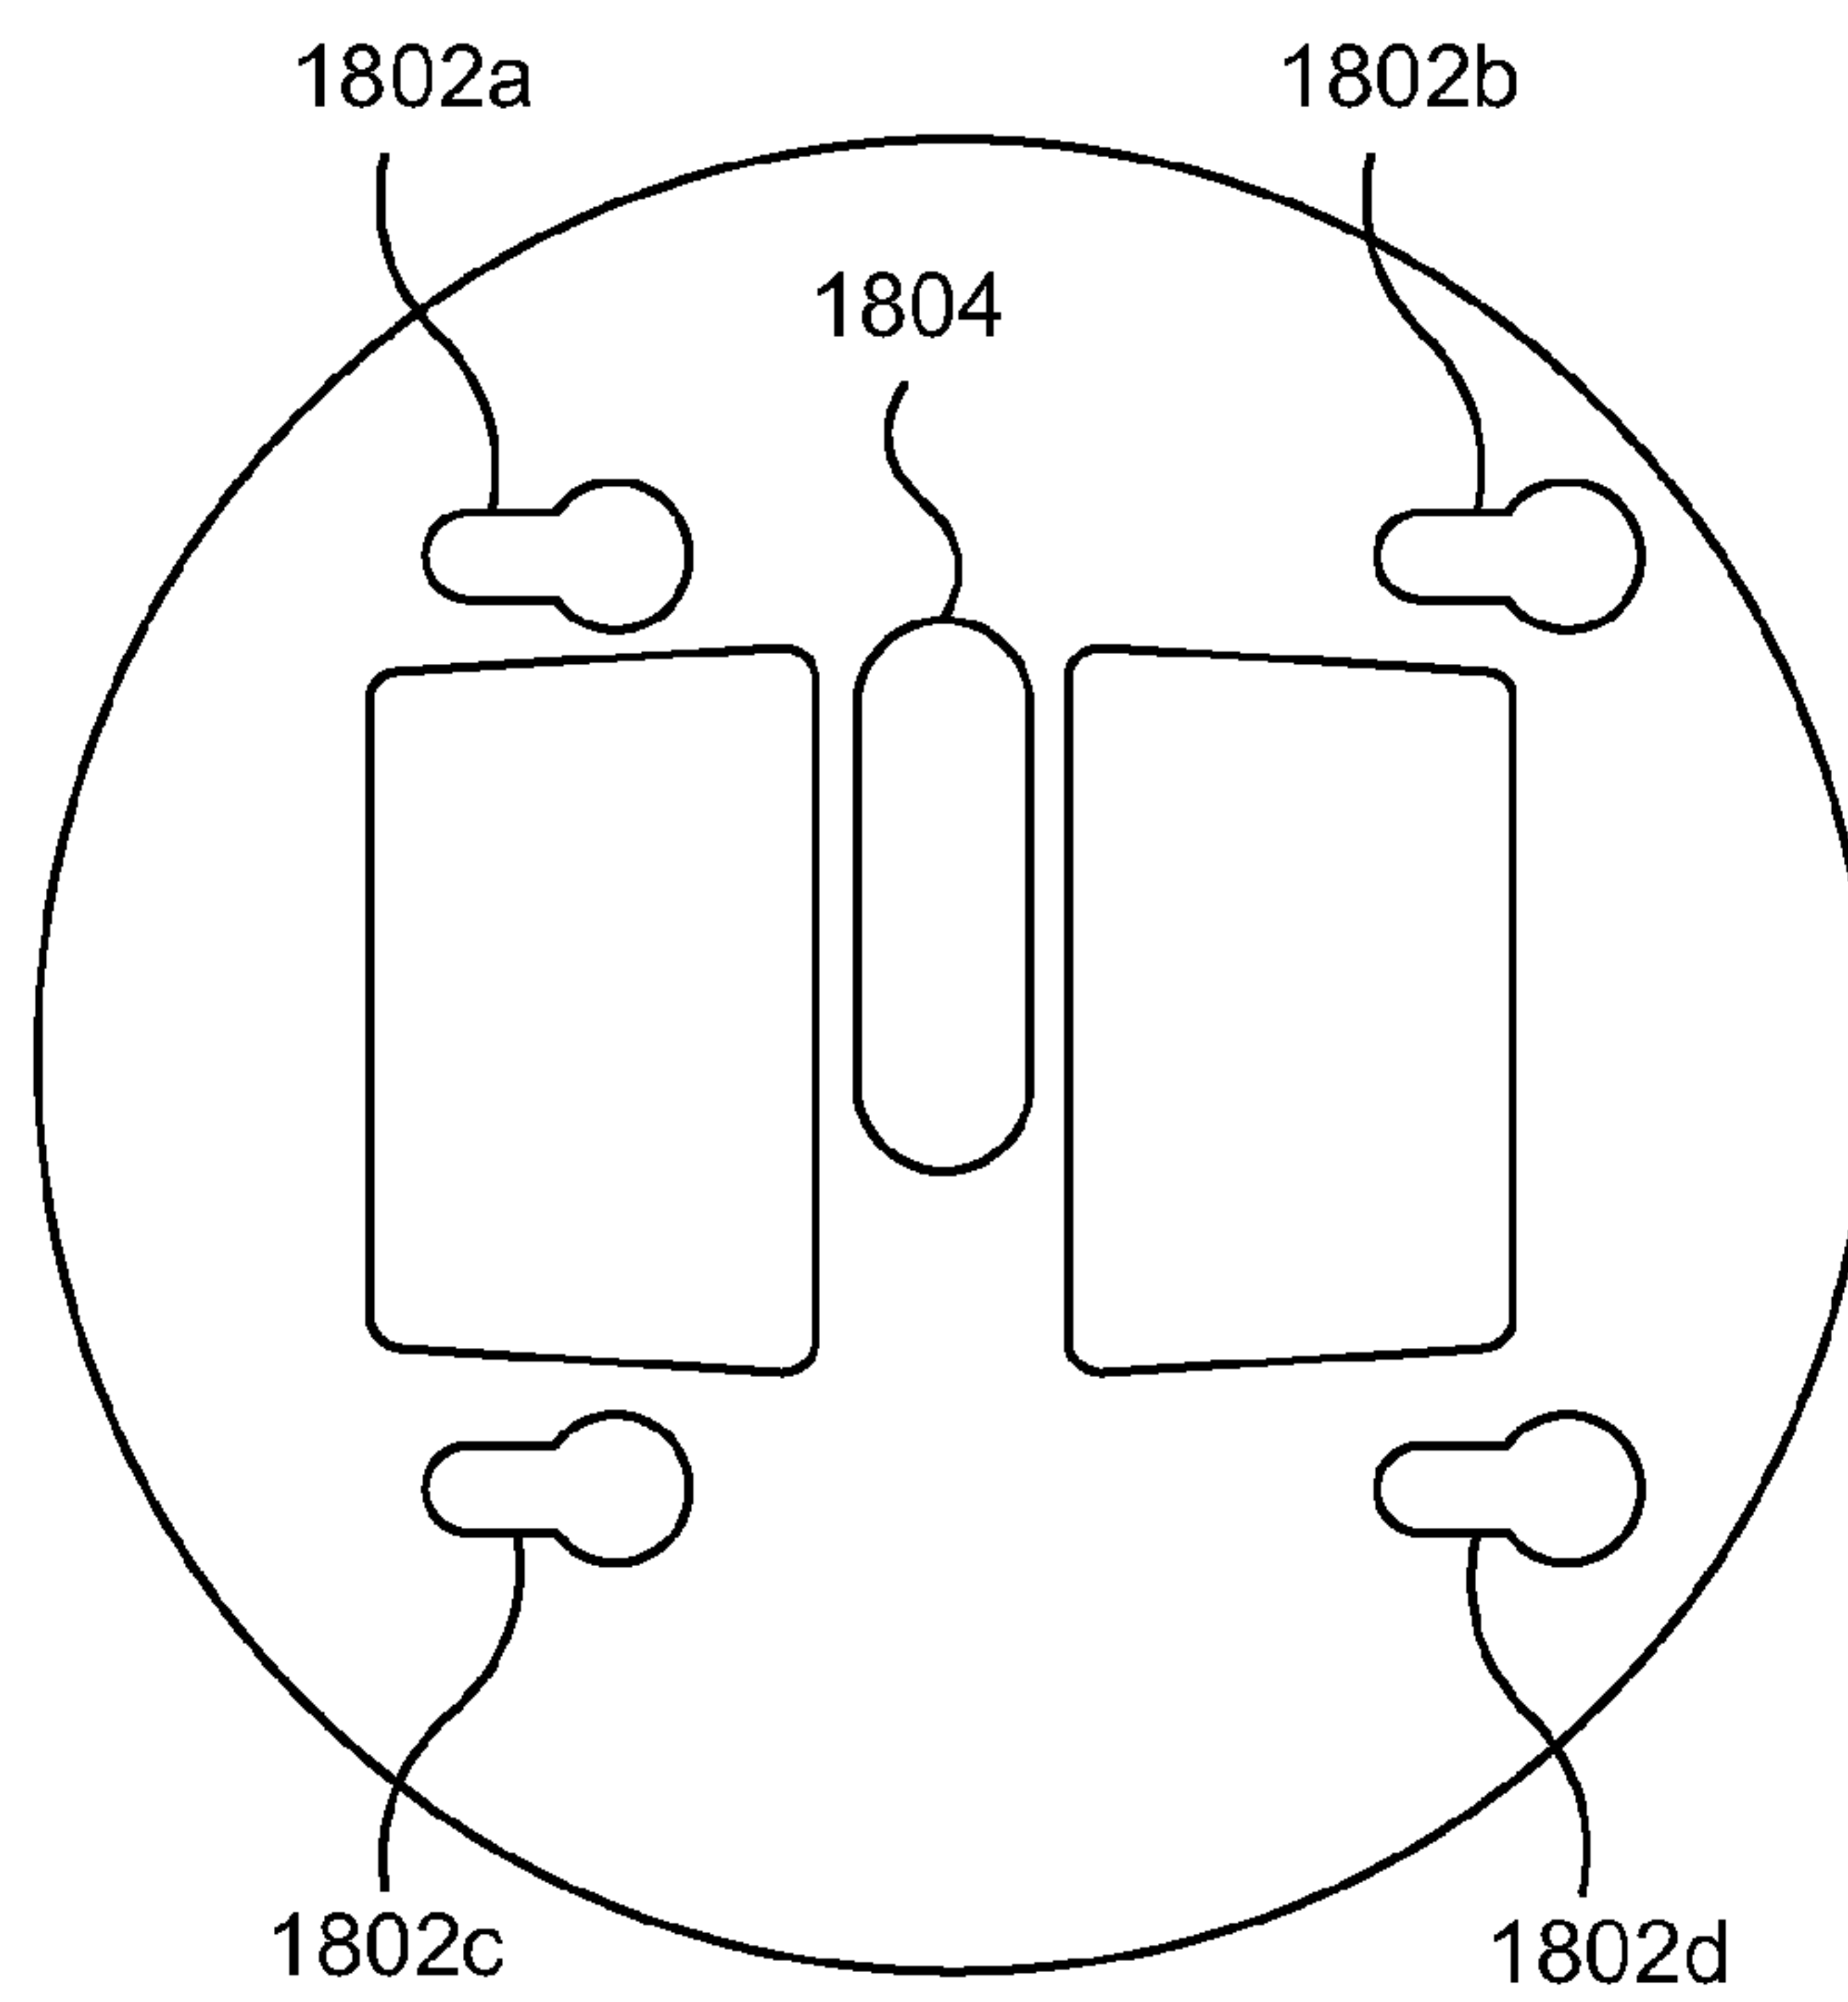1800**Figure 18**

19/34

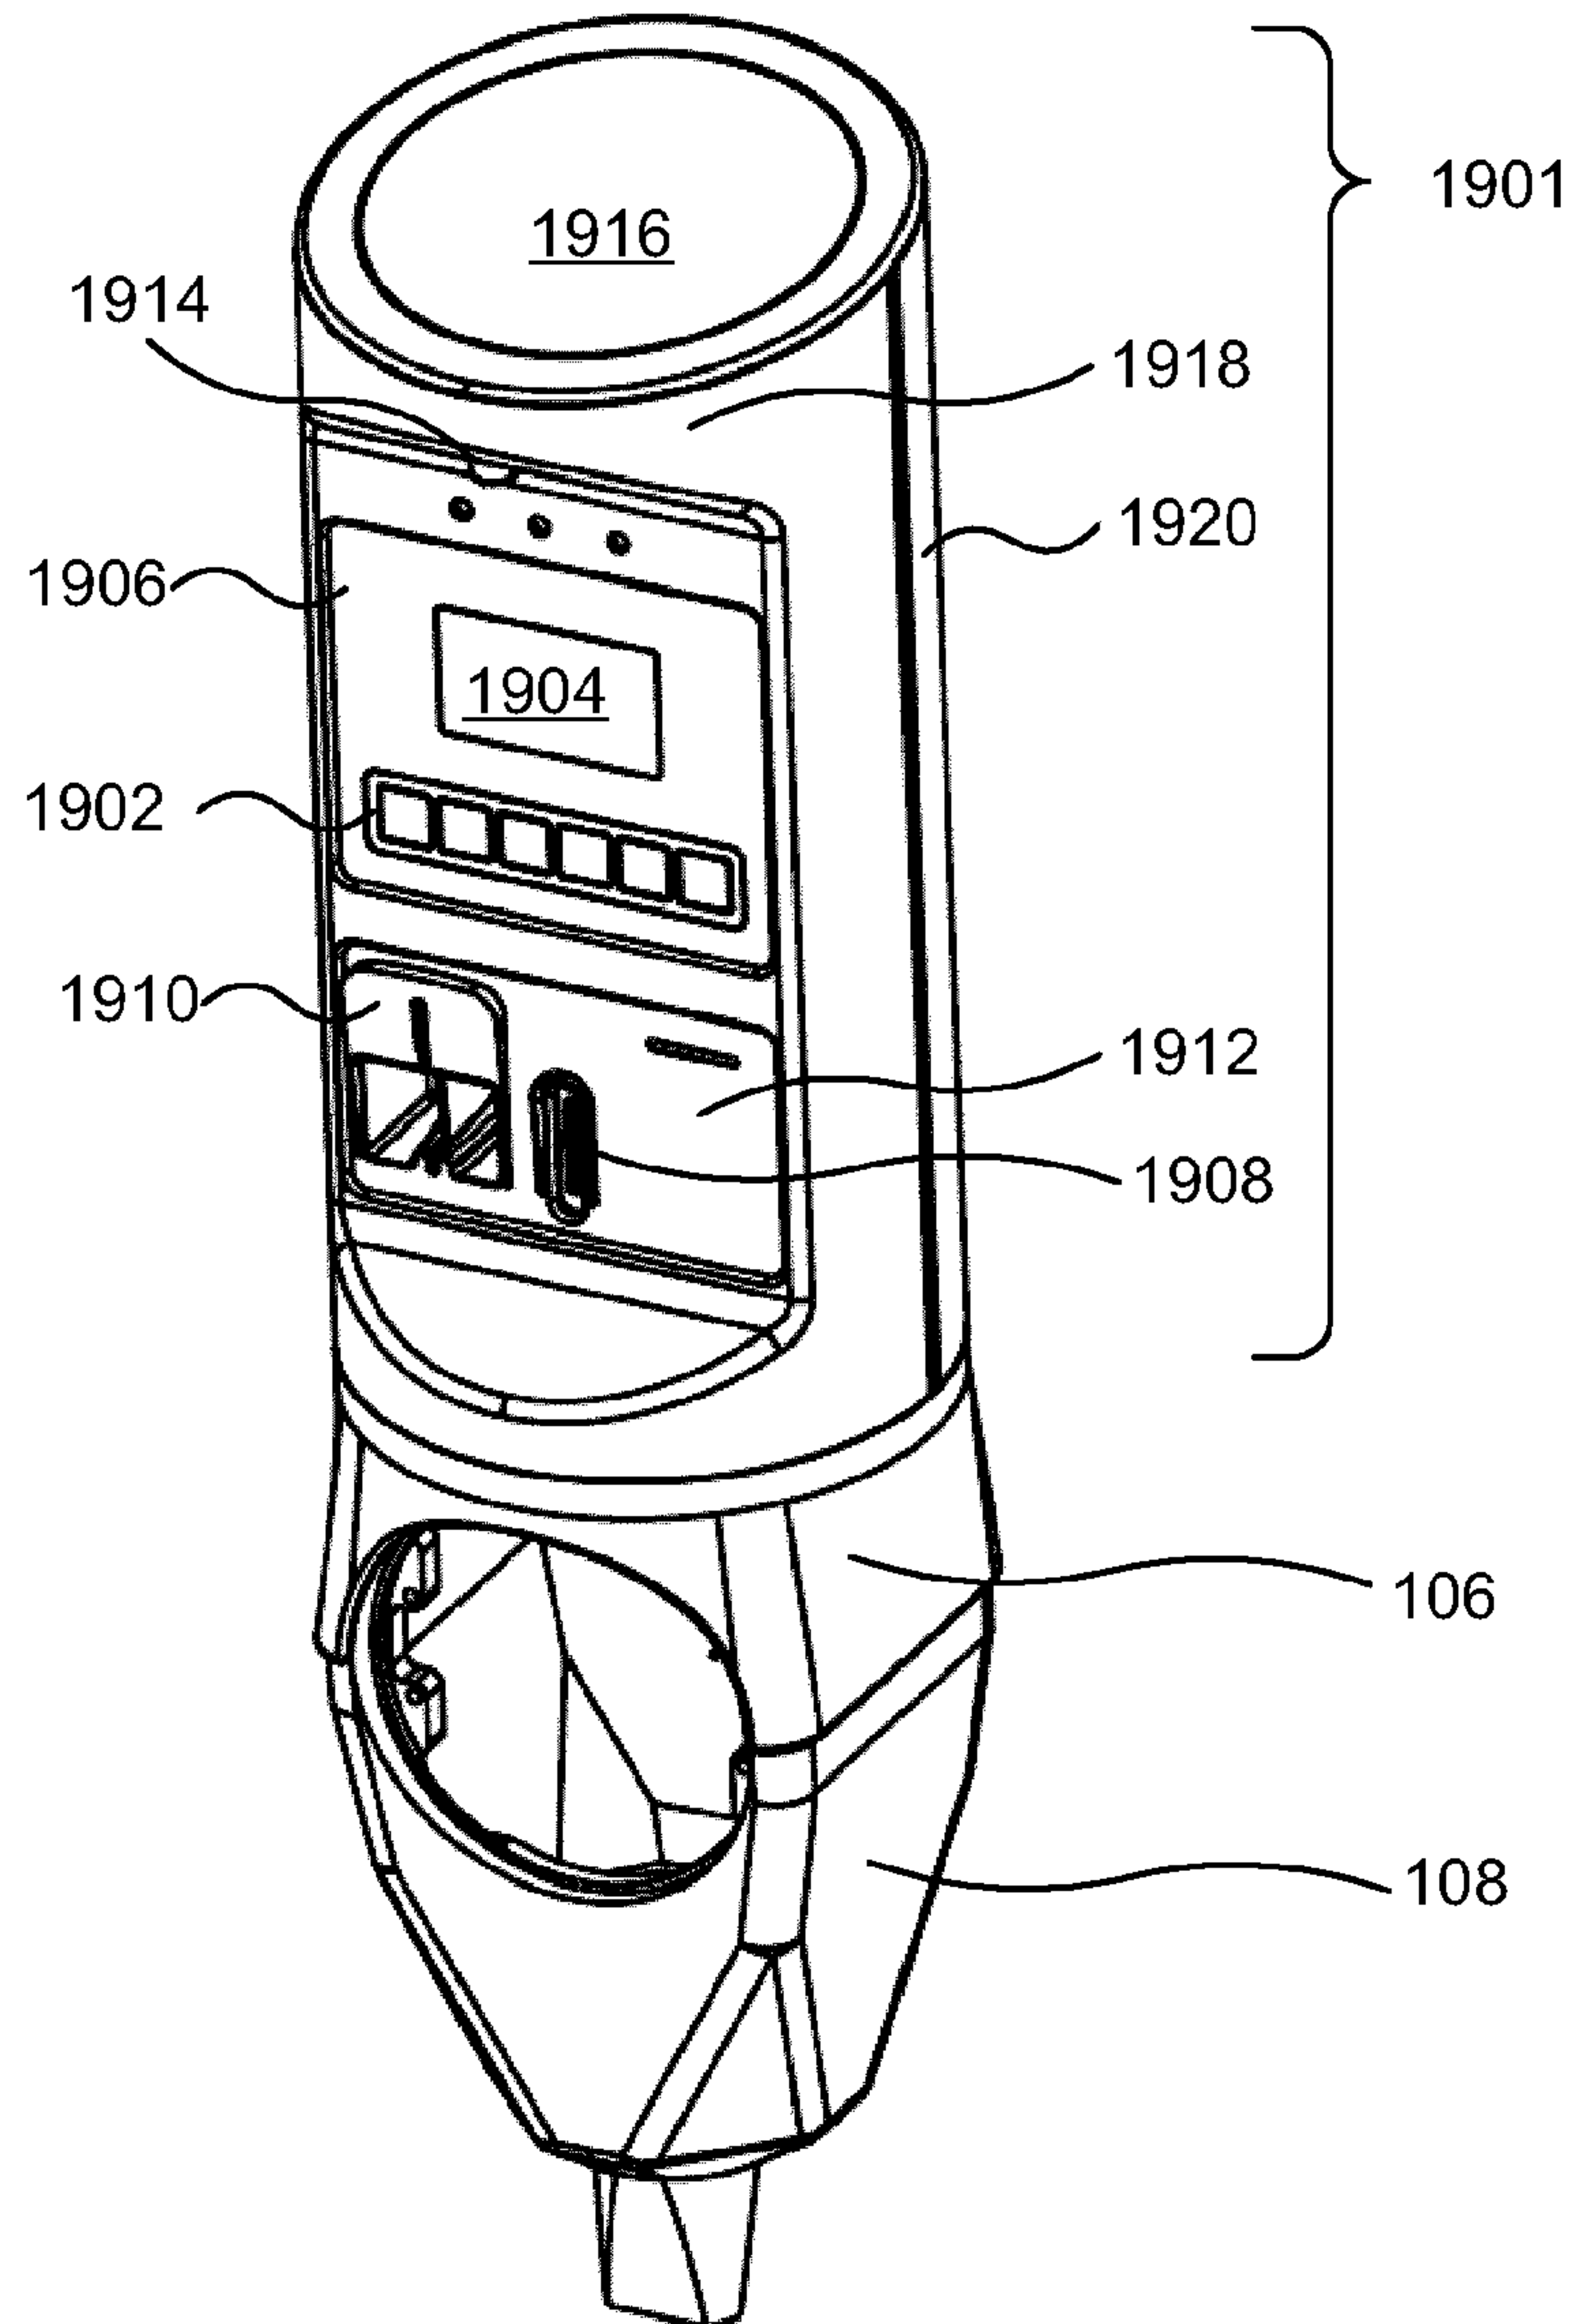1900**Figure 19**

20/34

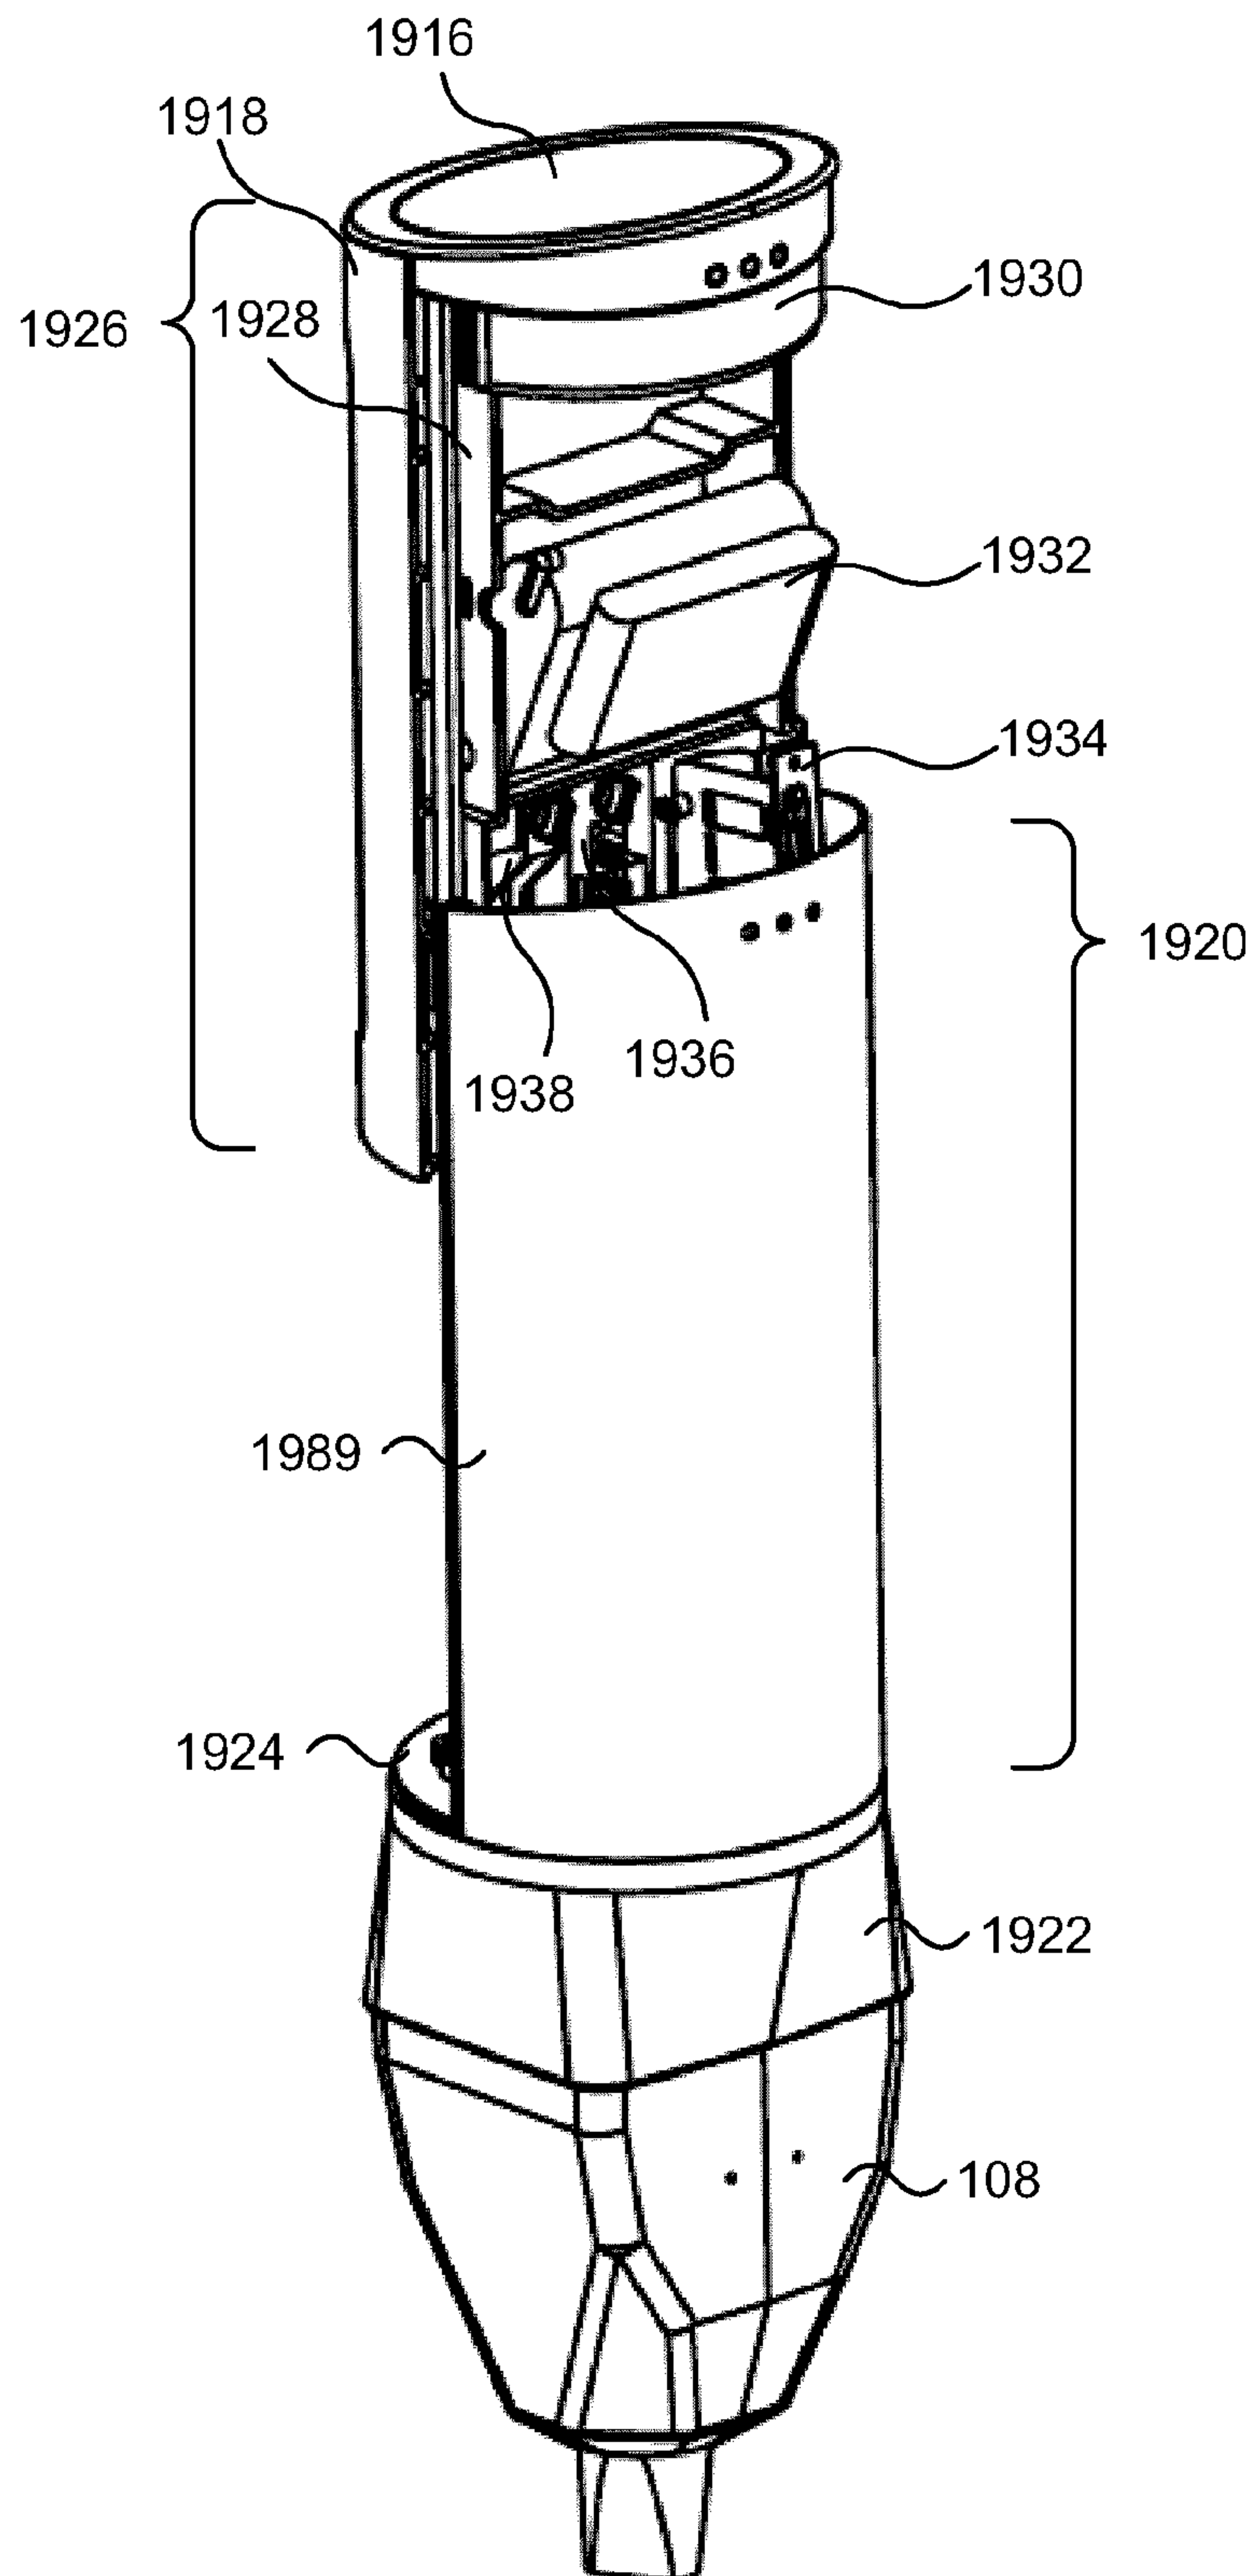


Figure 20

21/34

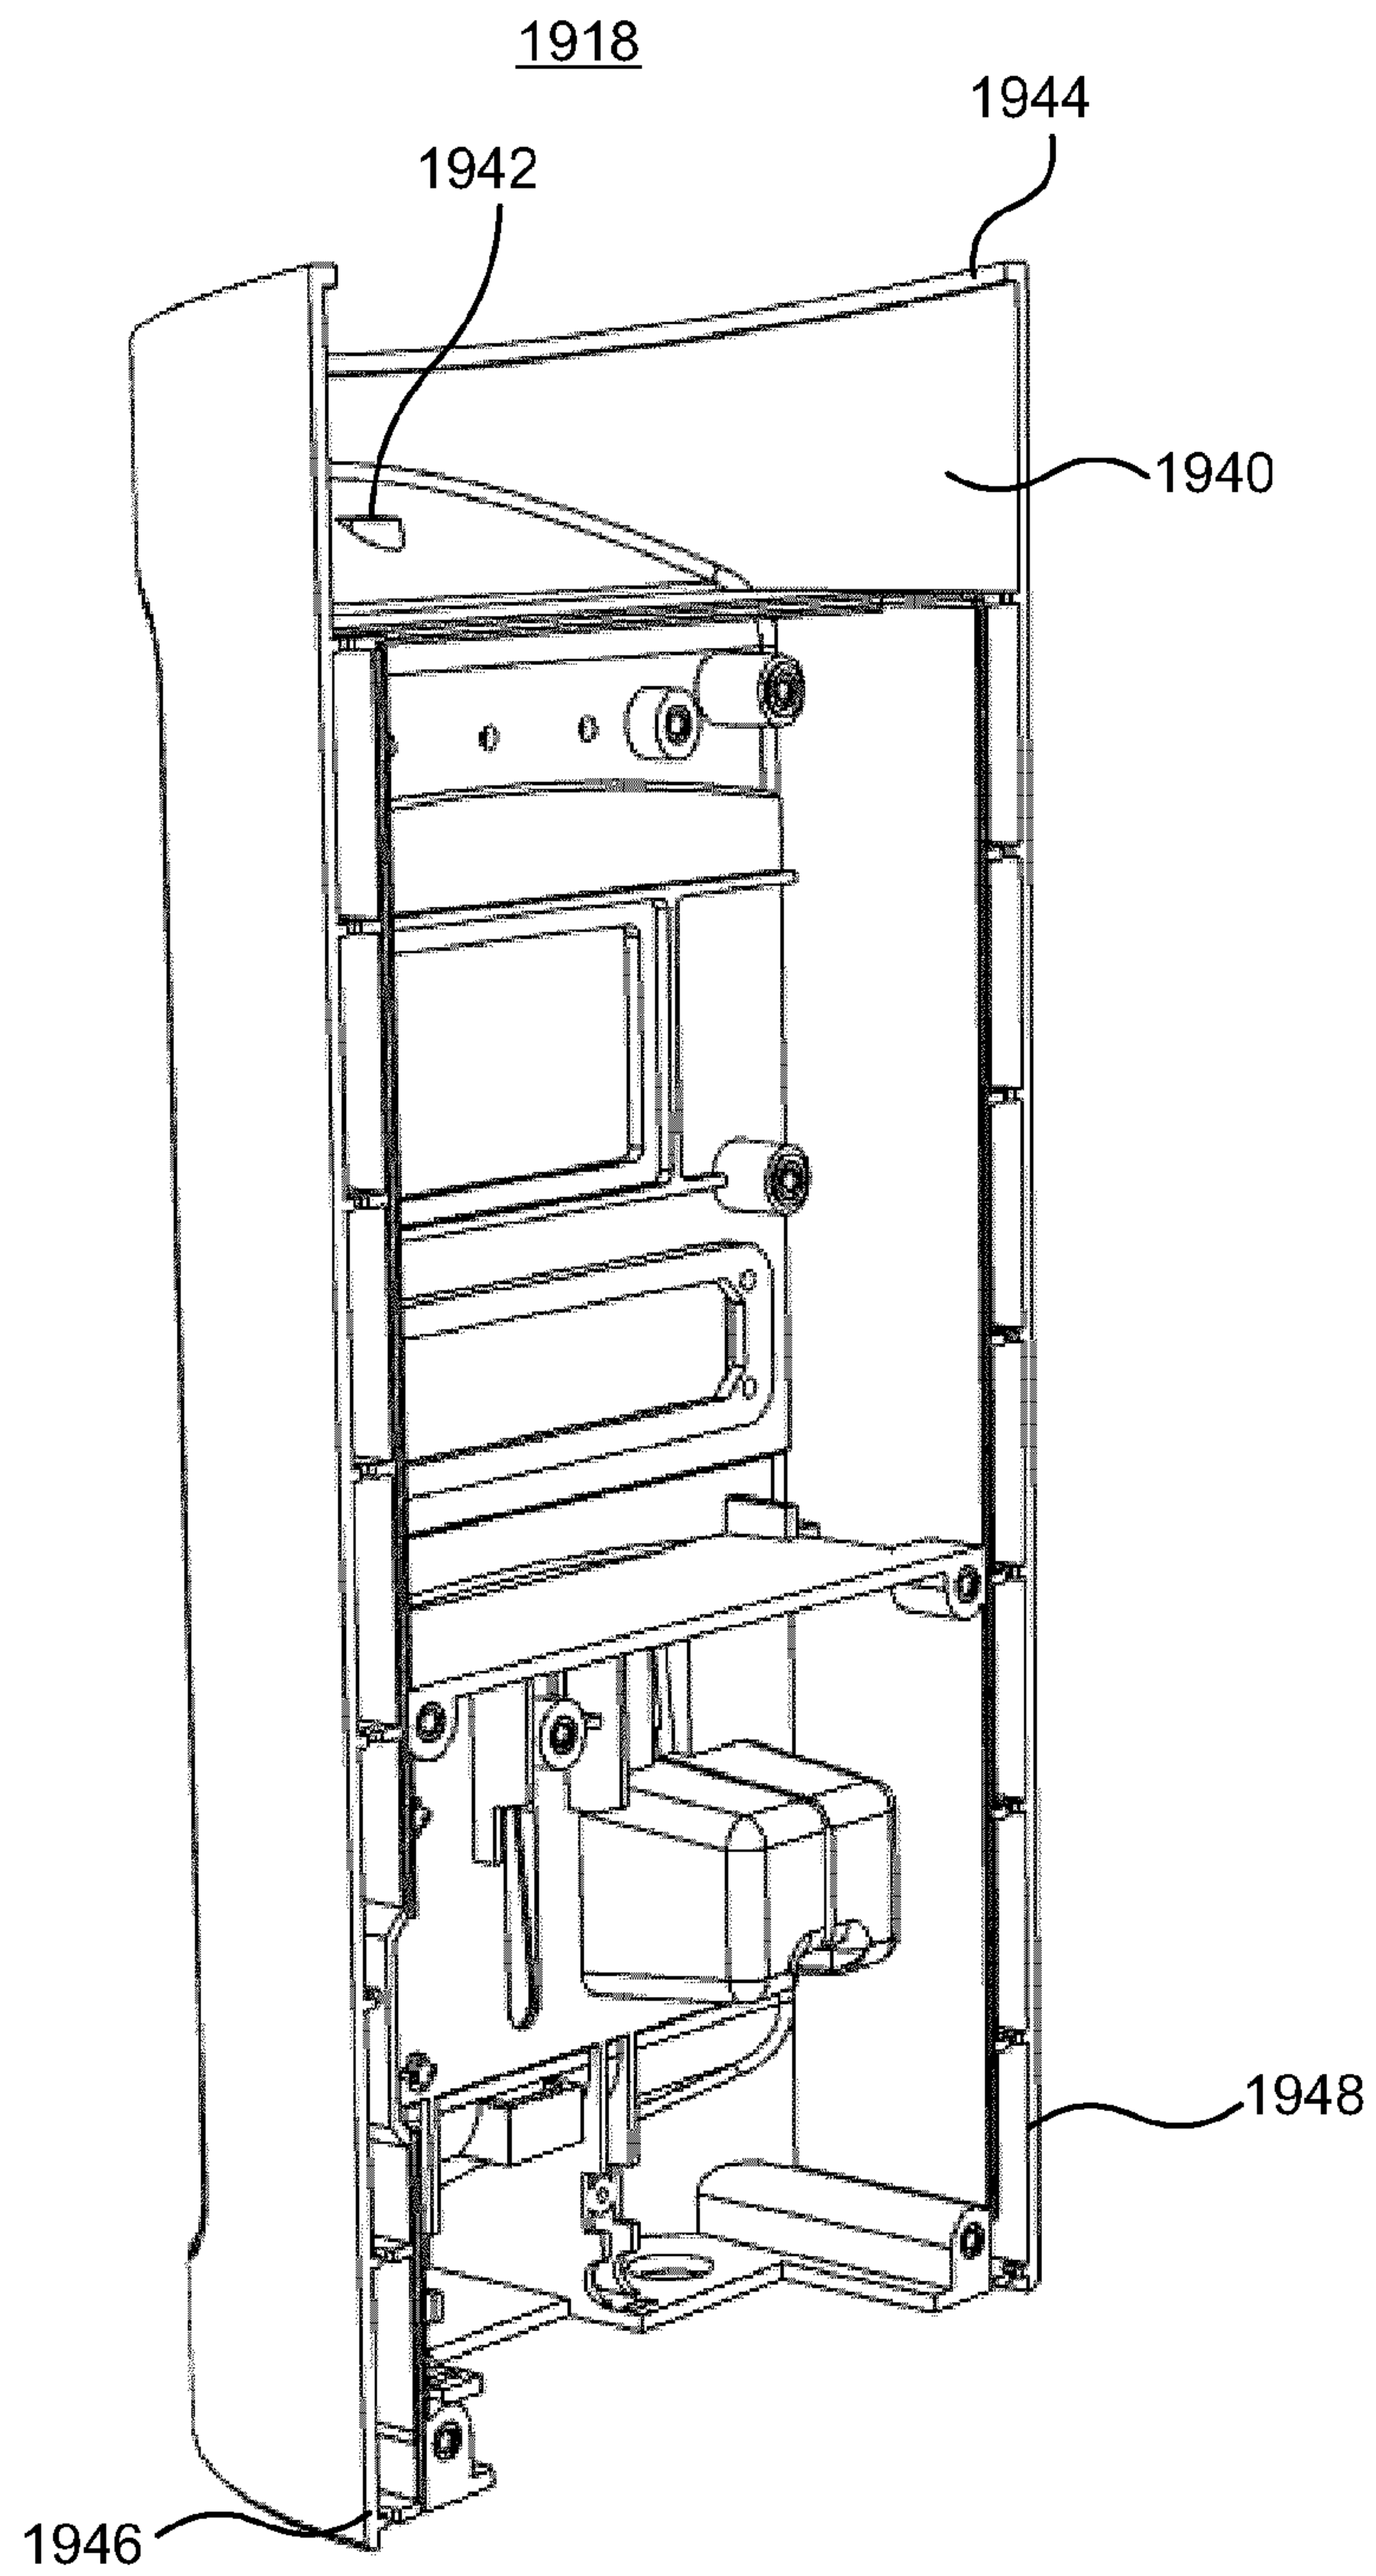
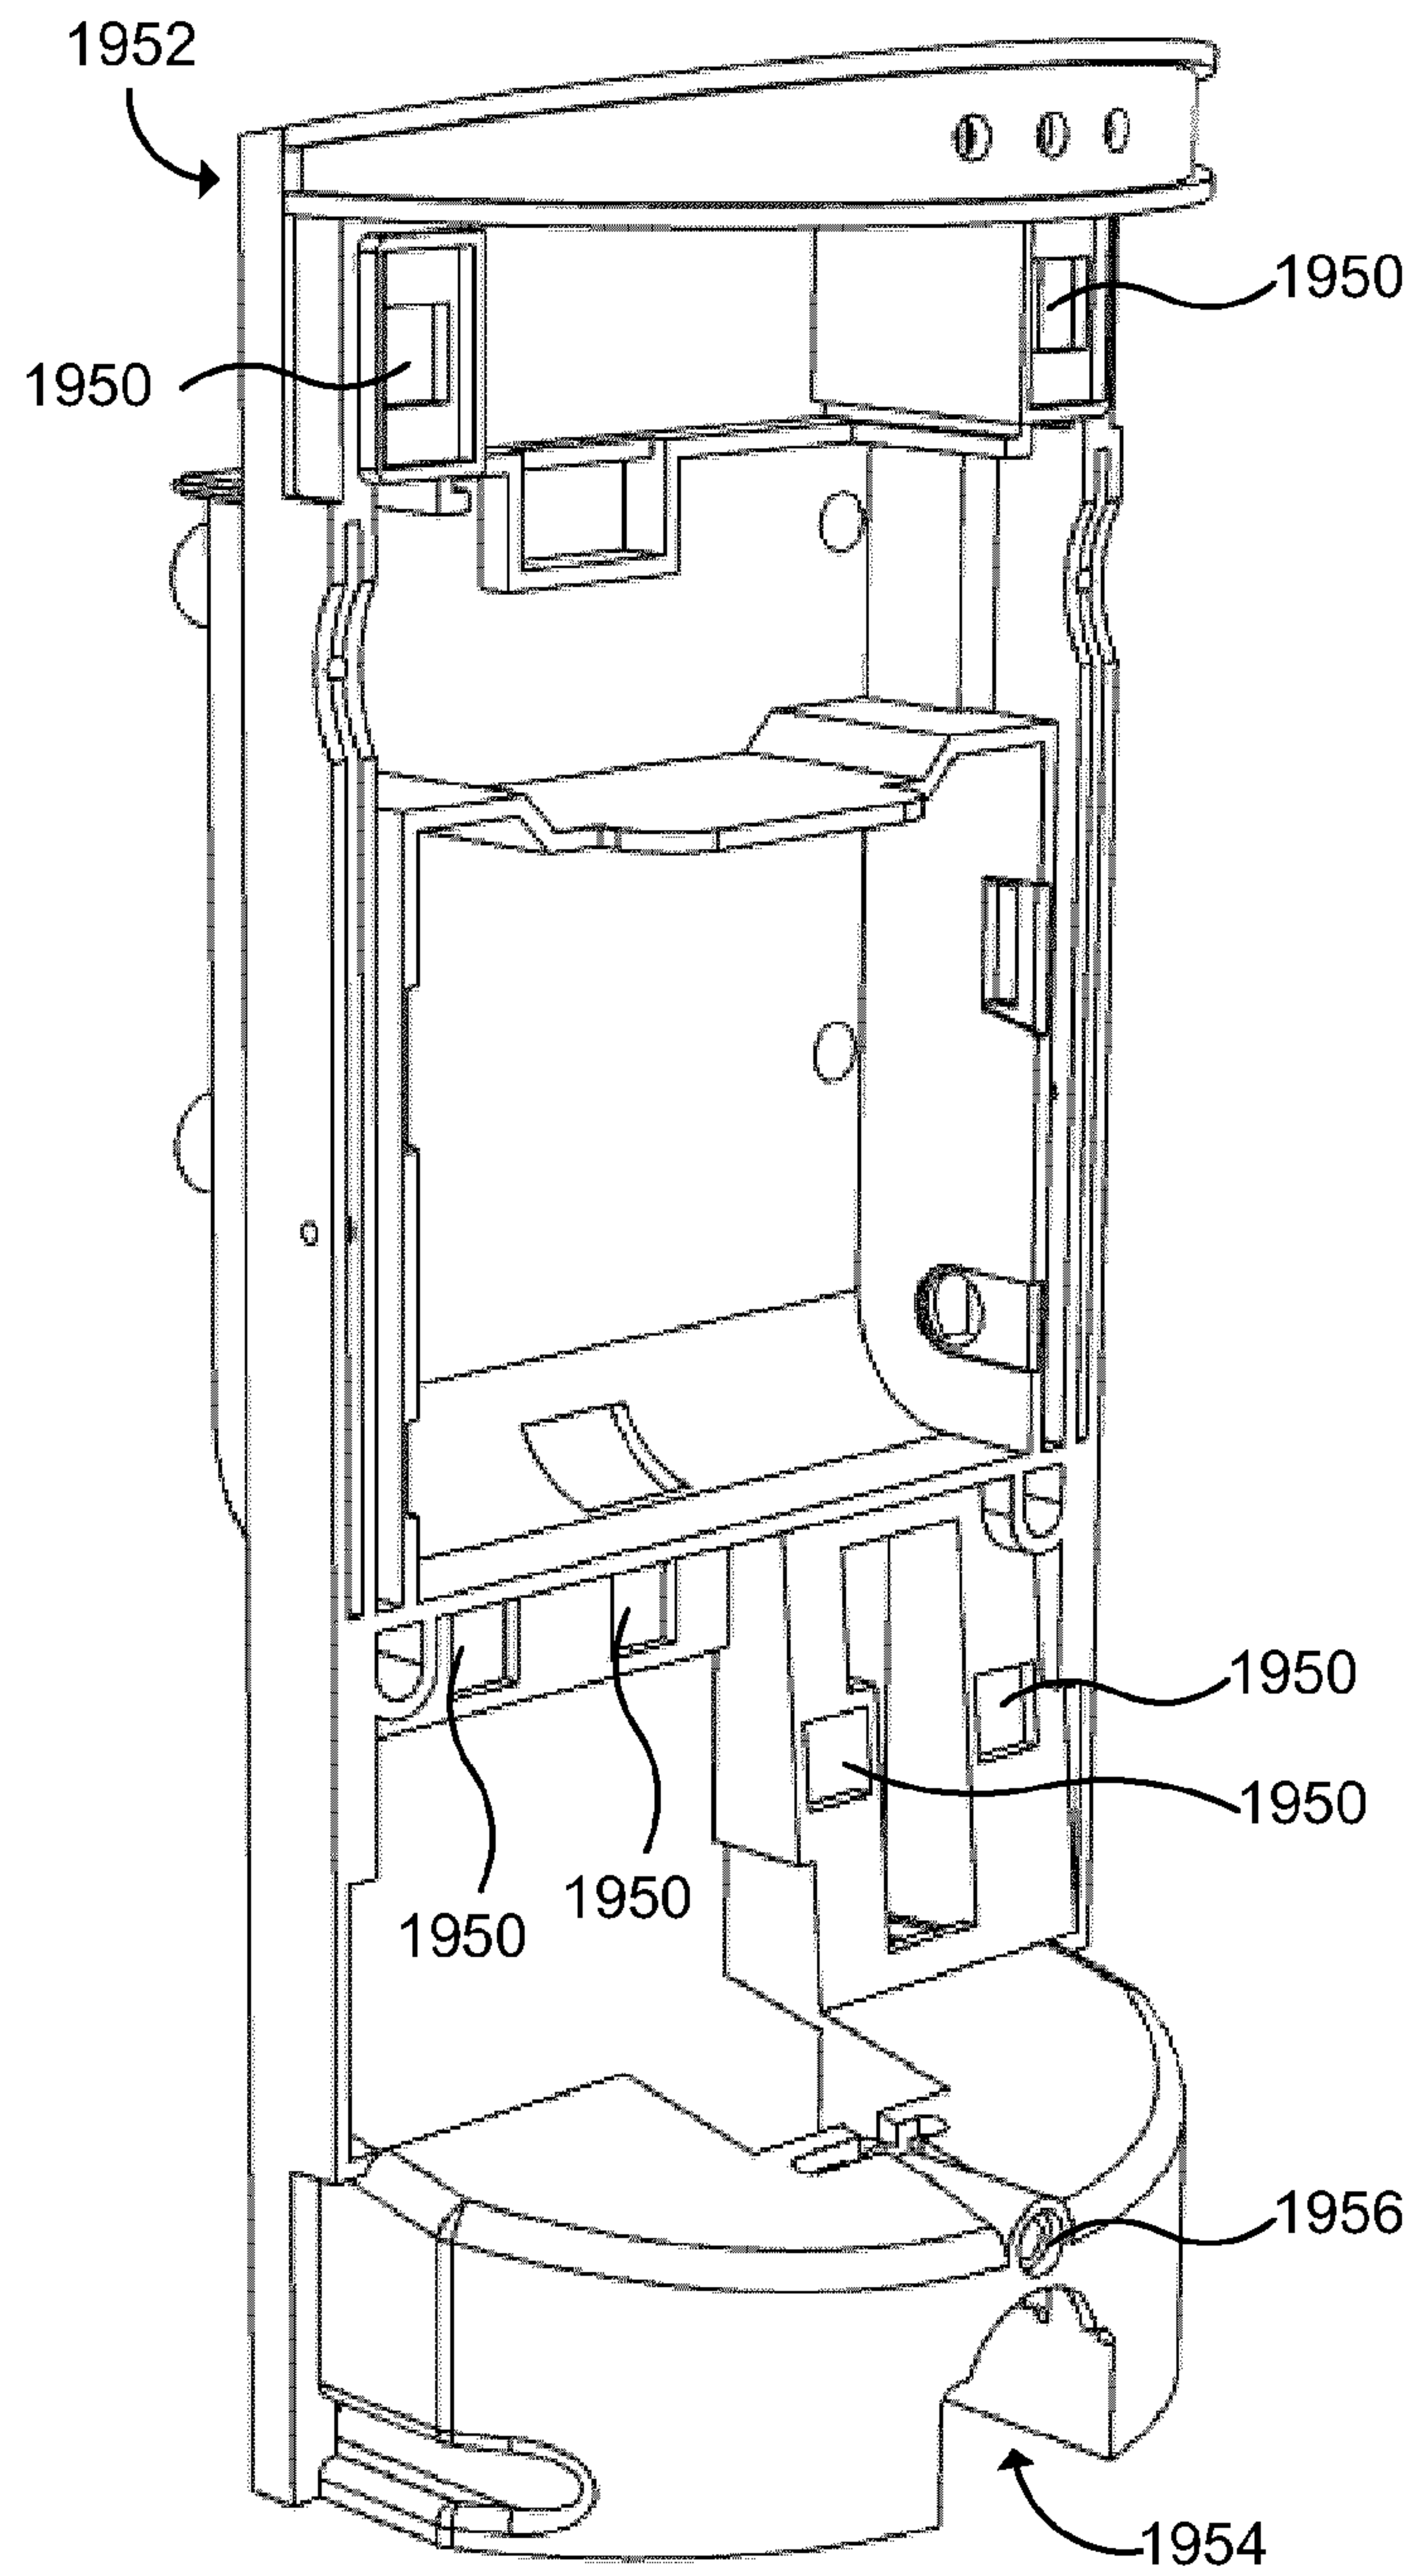
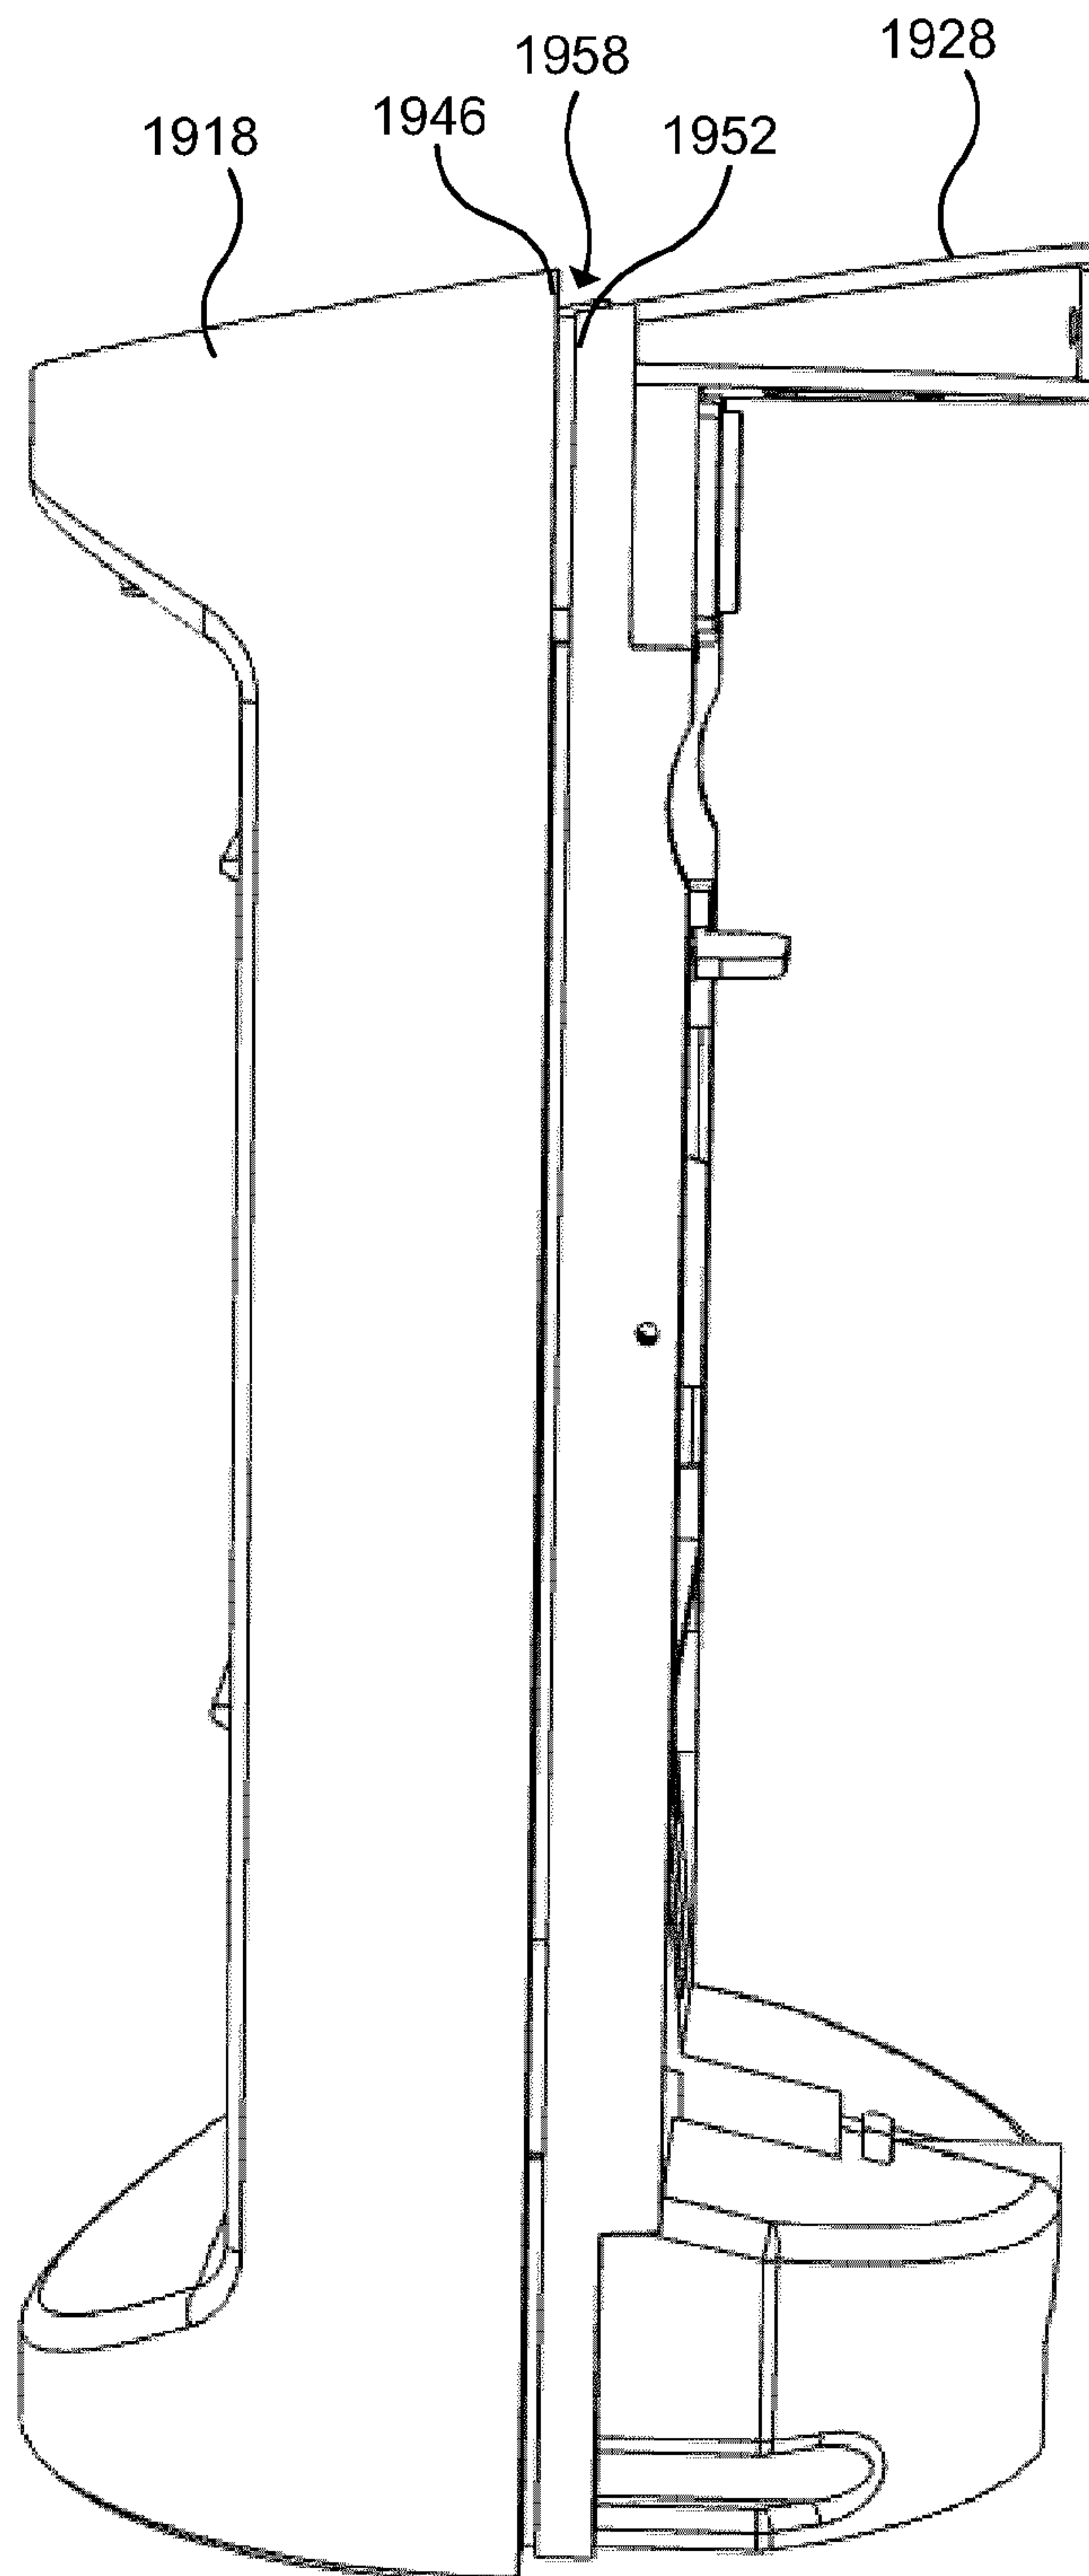


Figure 21


22/34

1928**Figure 22**


23/34

1926**Figure 23**


24/34

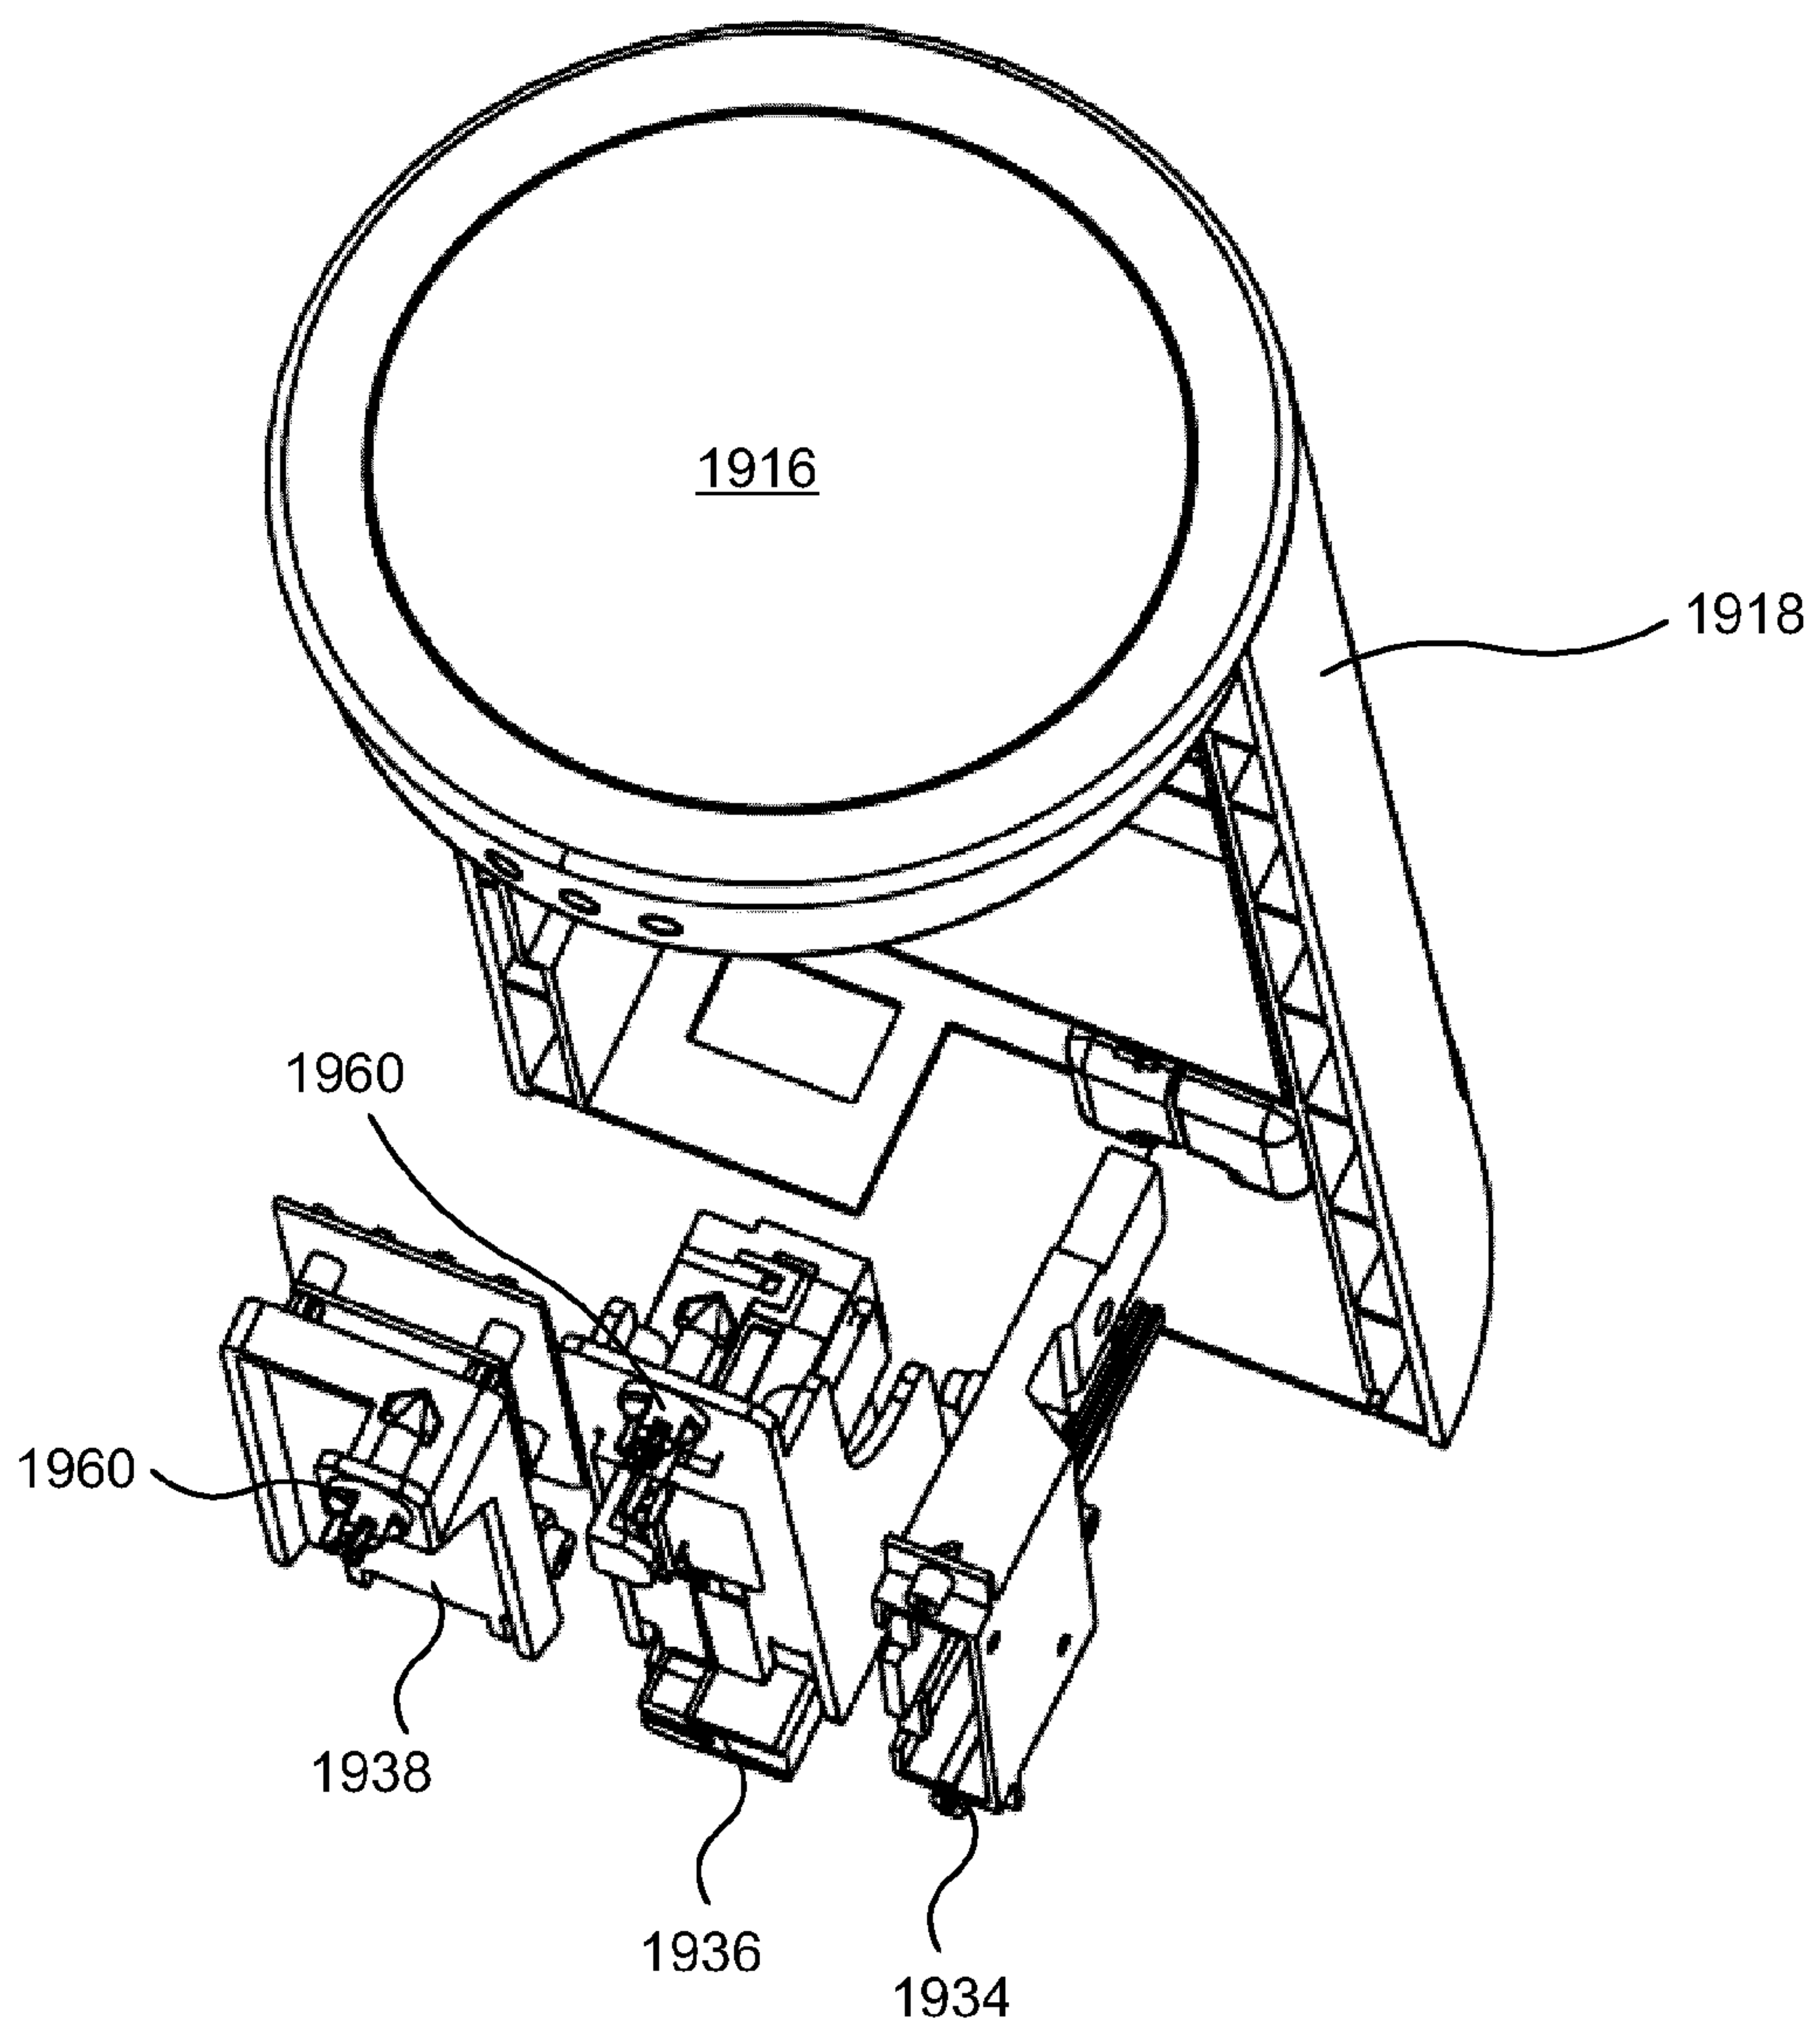
**Figure 24**

25/34

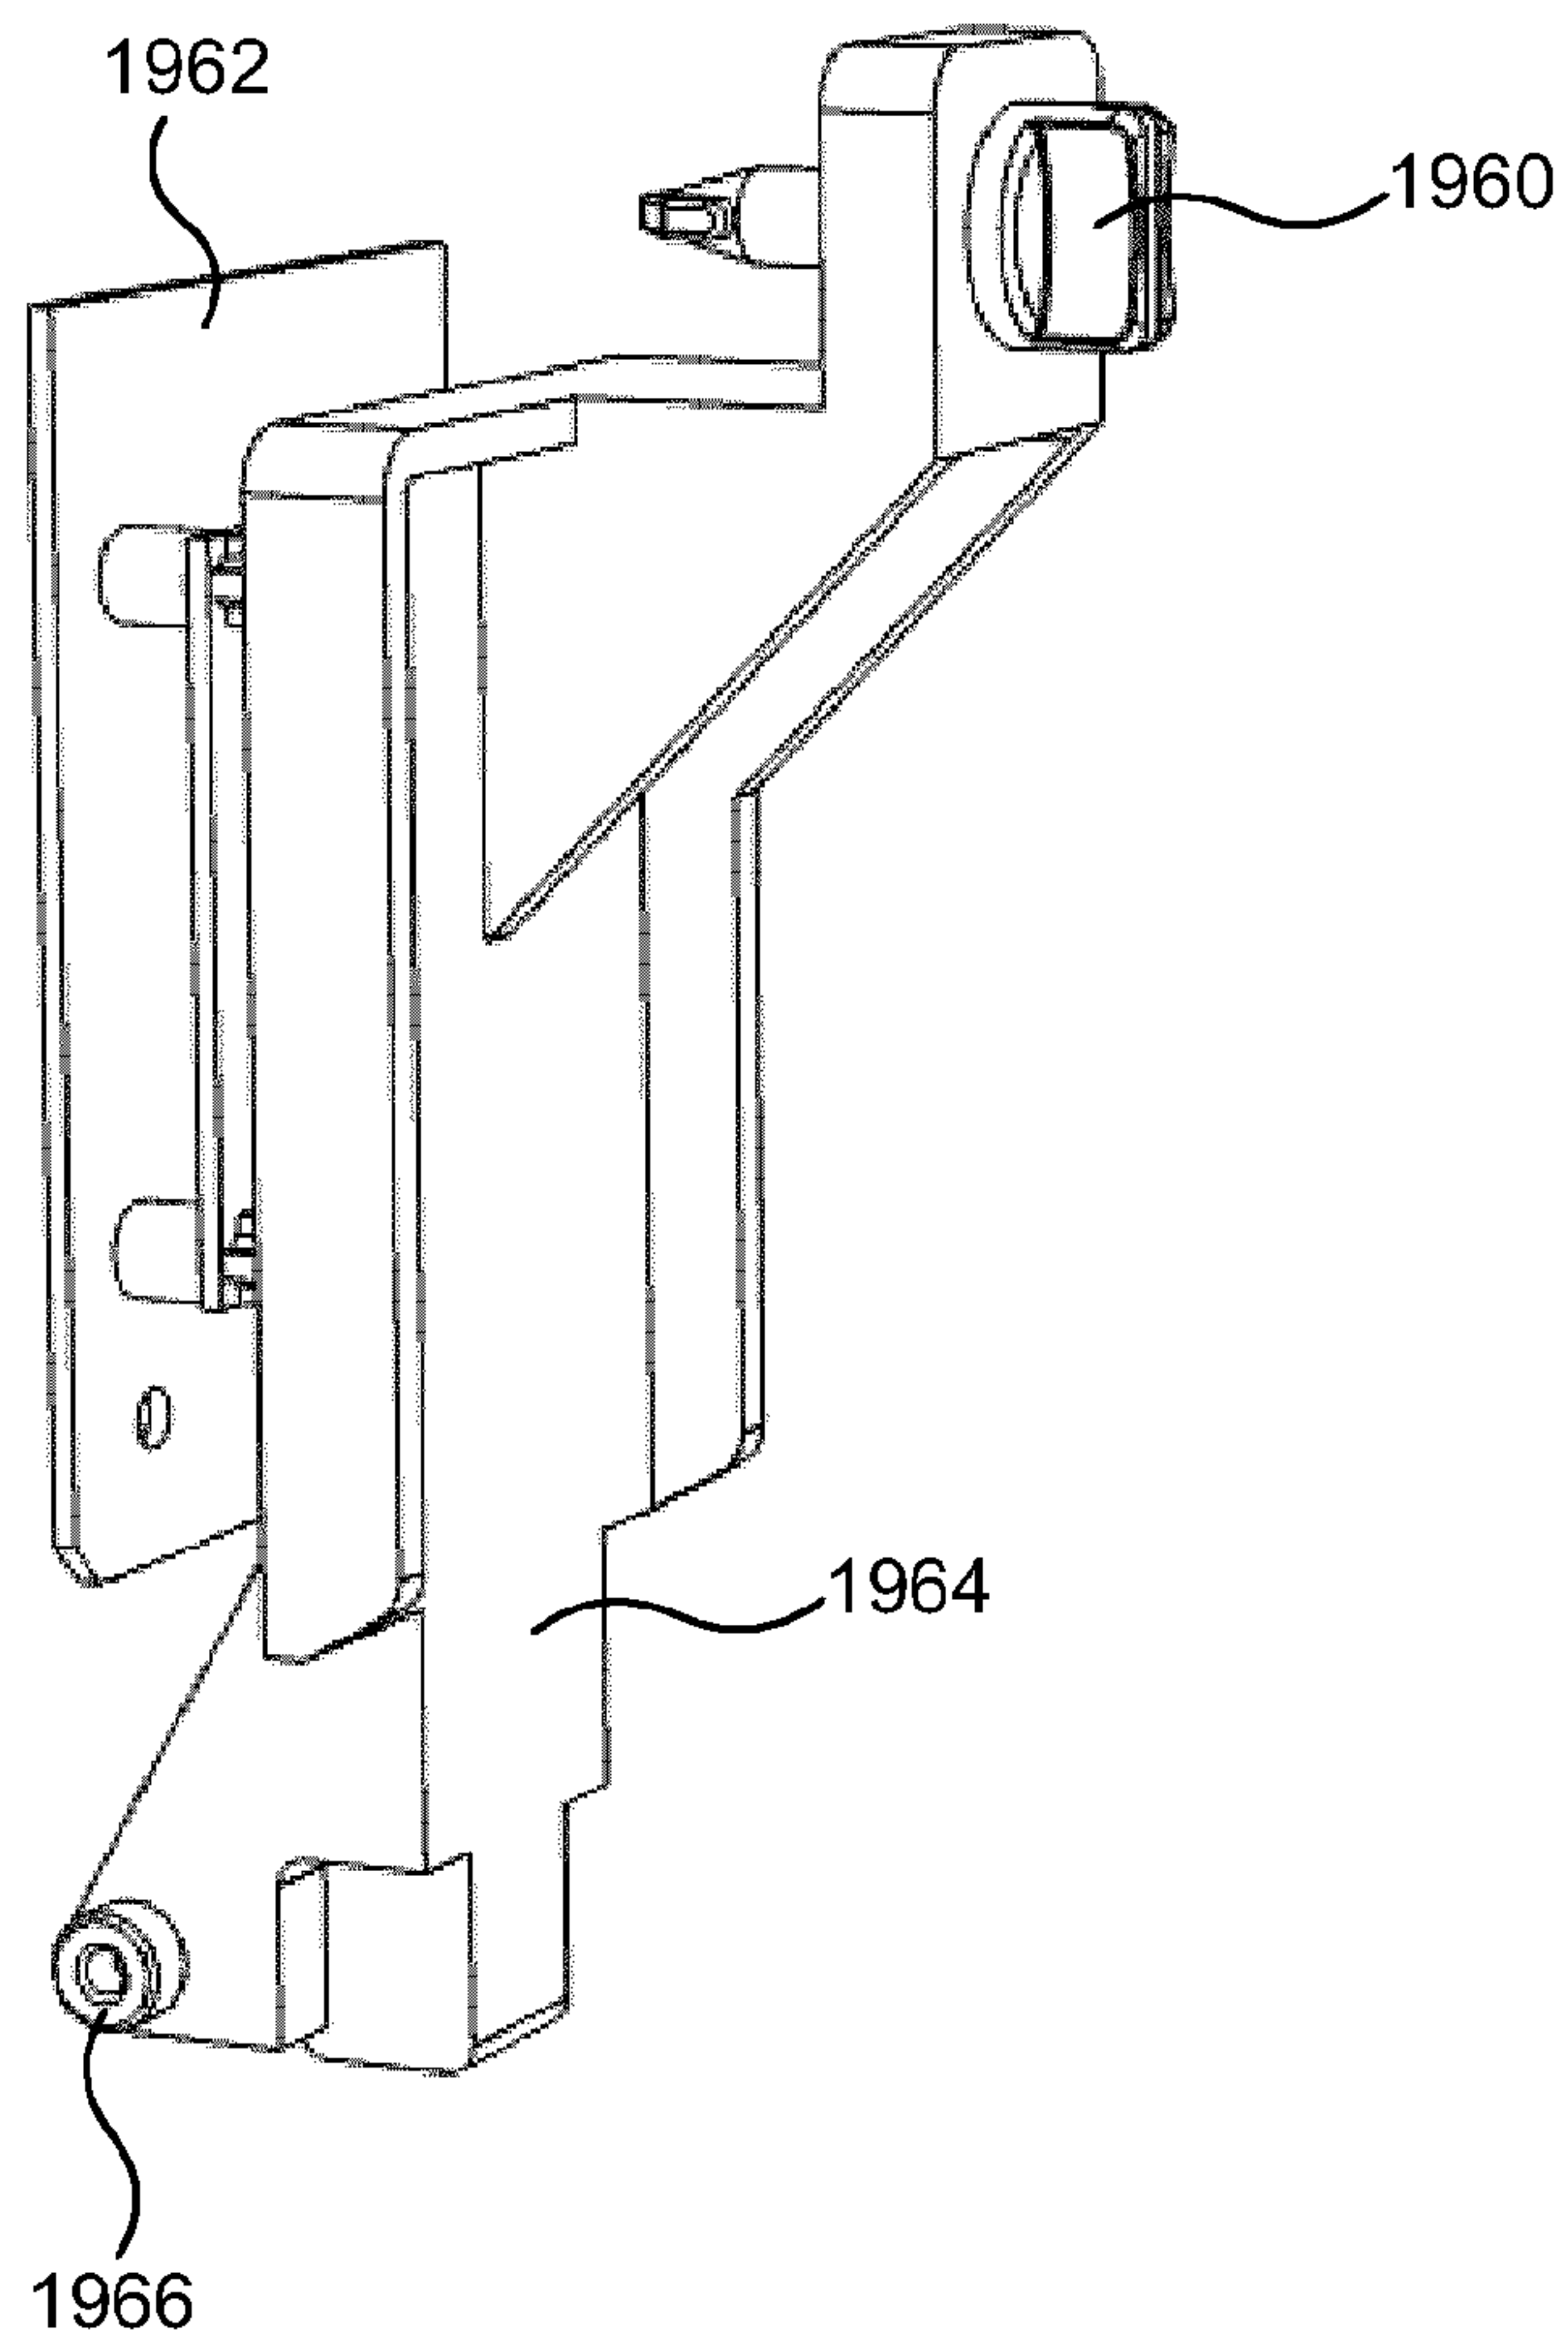1938**Figure 25**

26/34

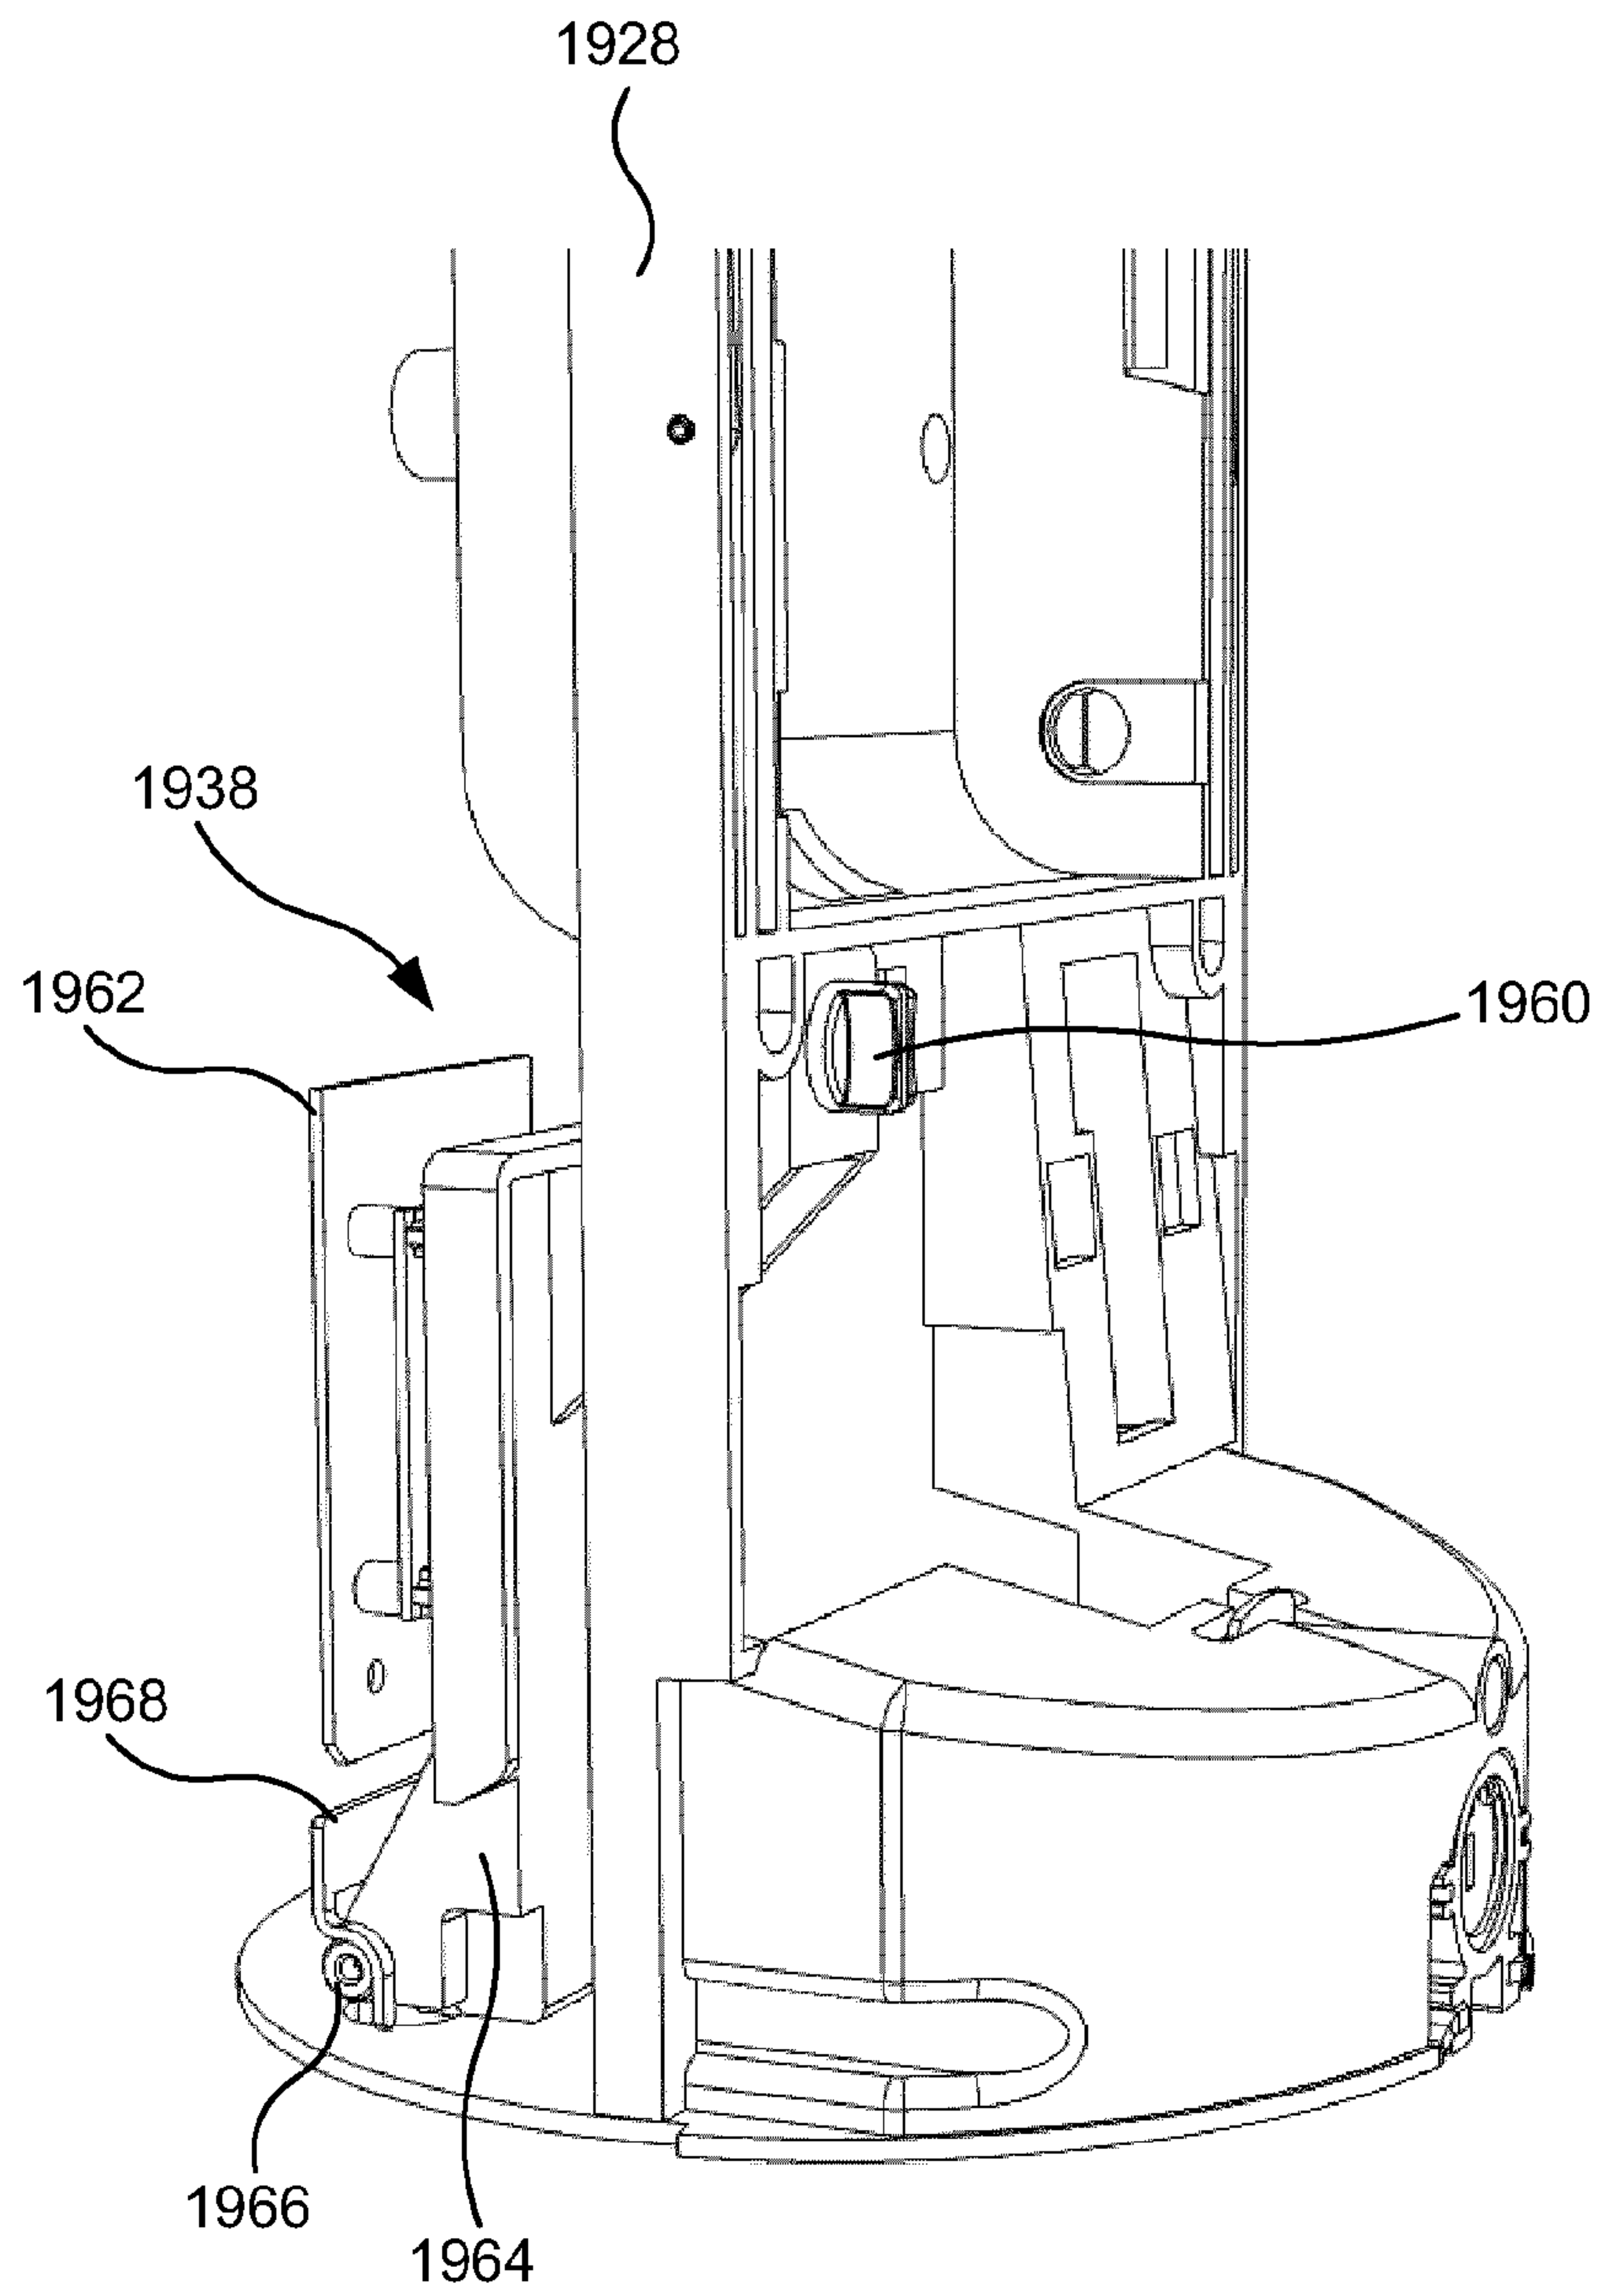**Figure 26**

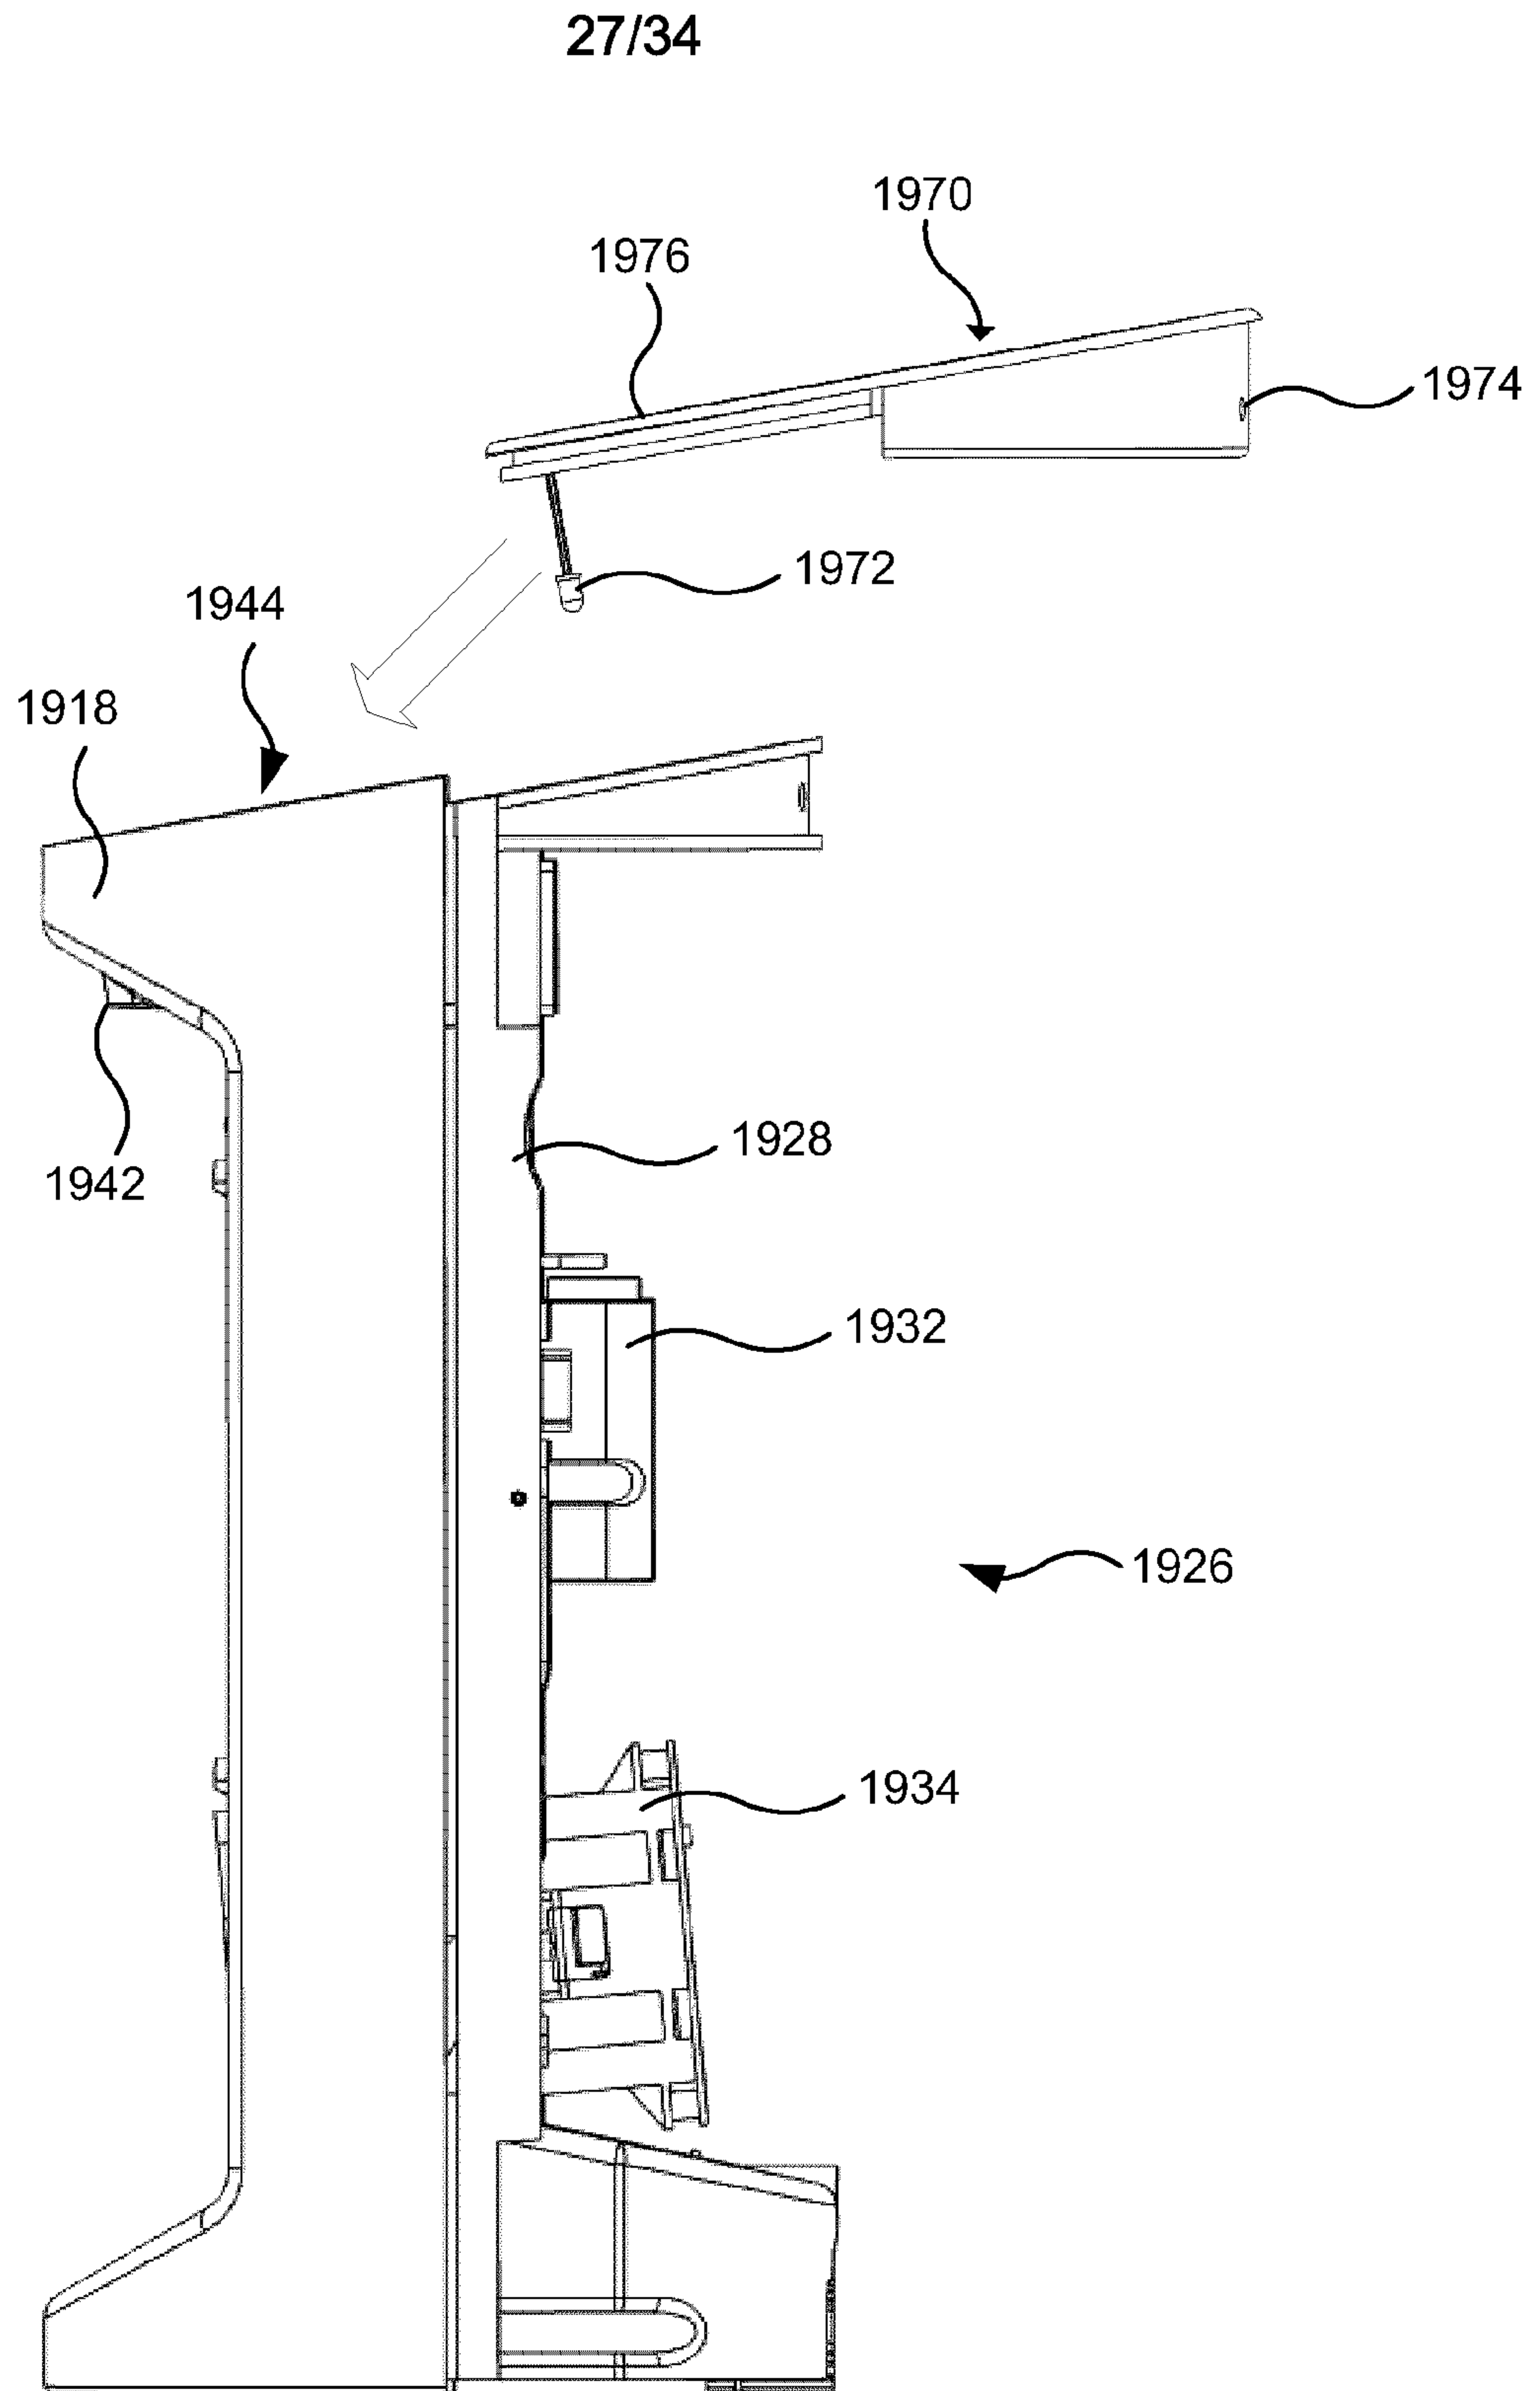**Figure 27**

28/34

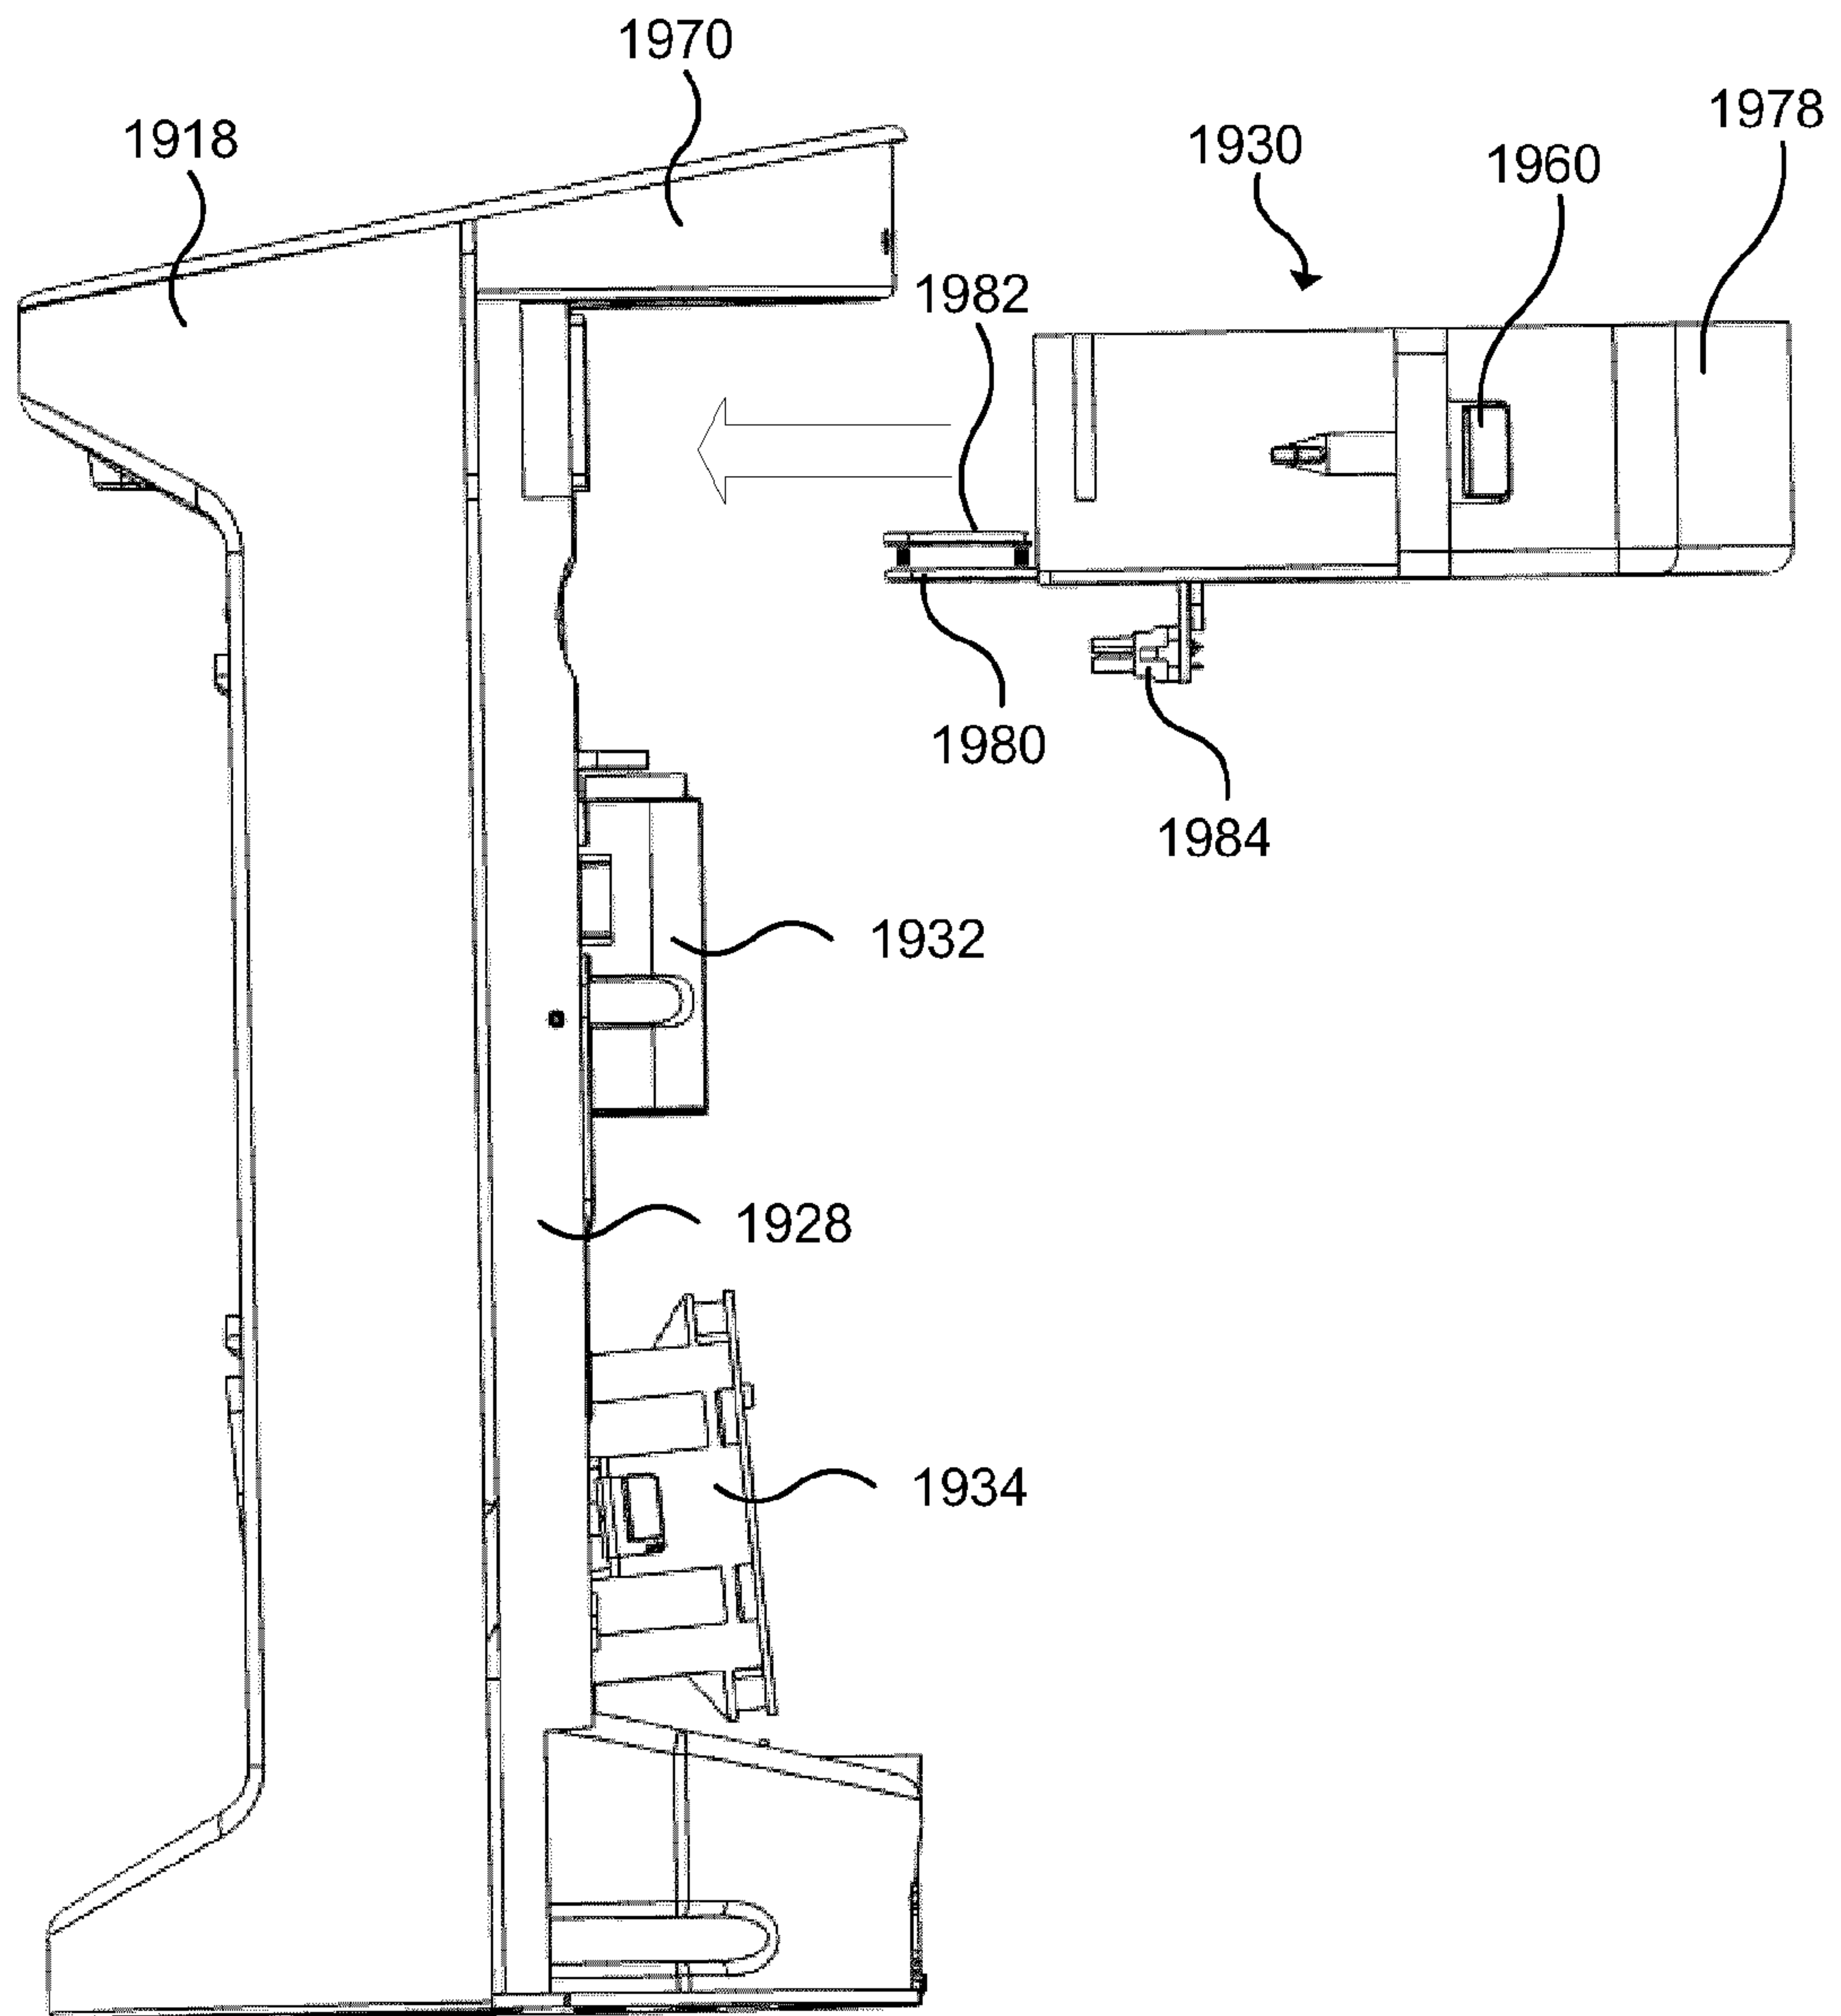


Figure 28

29/34

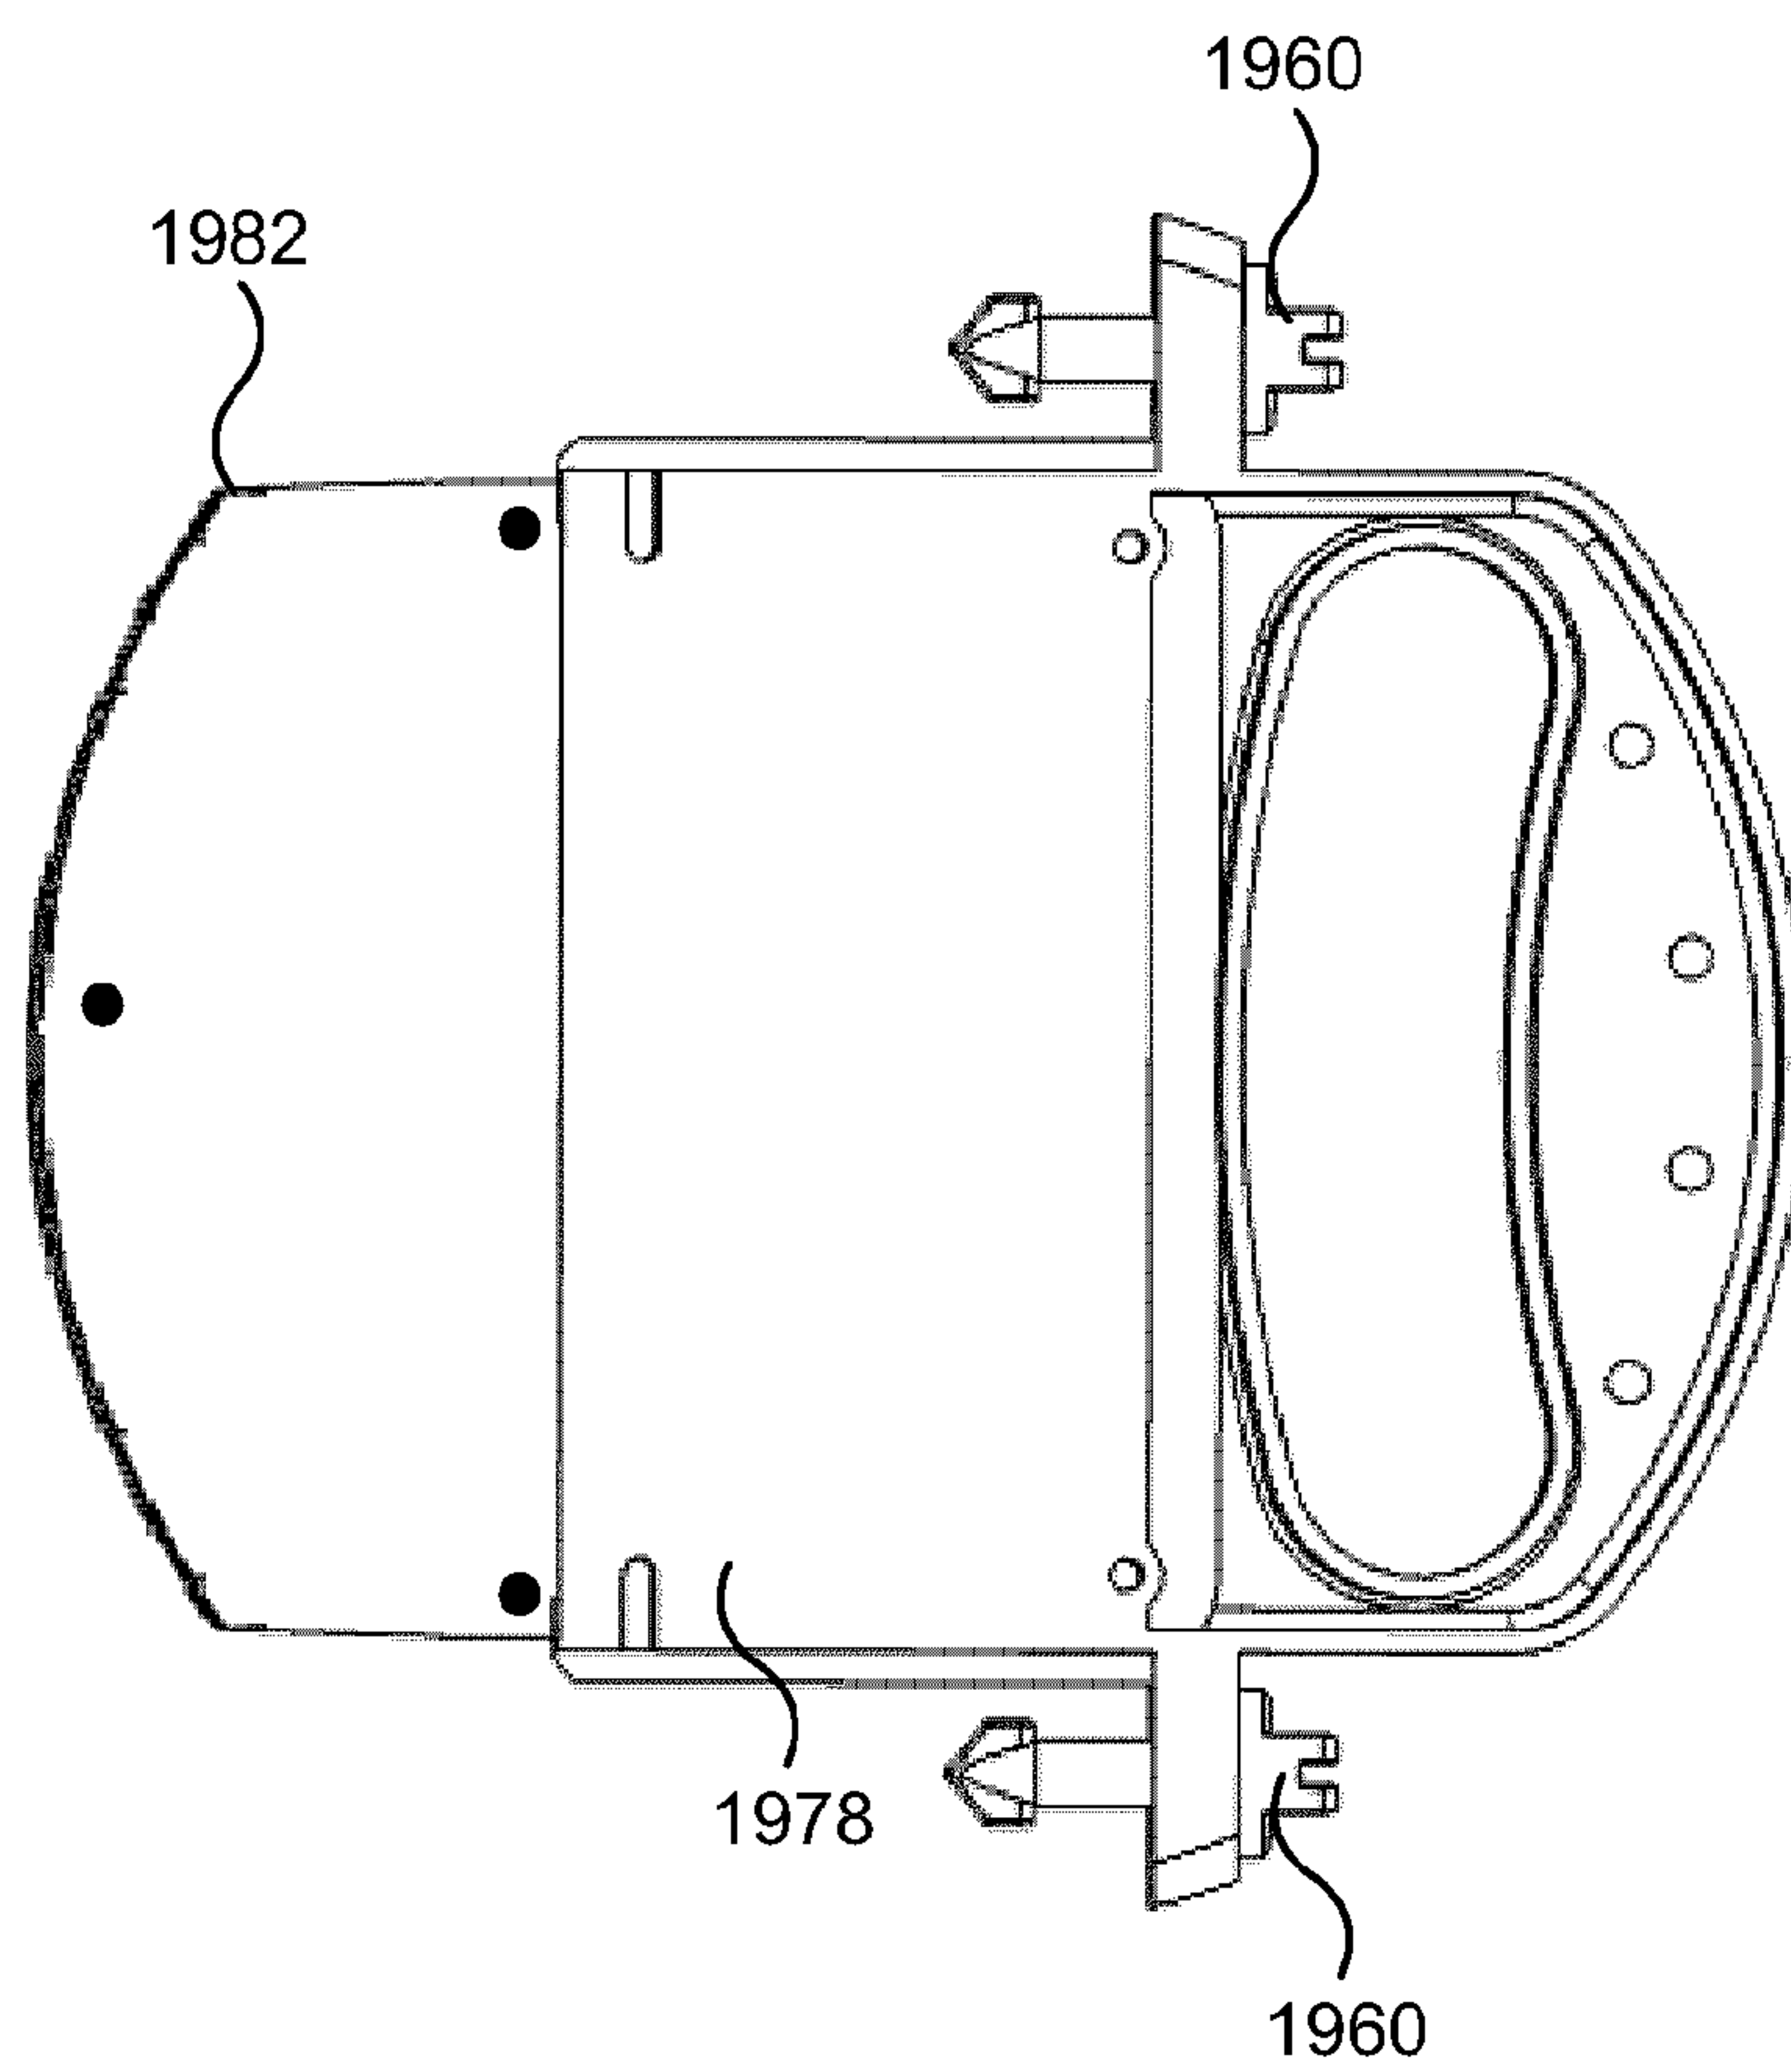


Figure 29

30/34

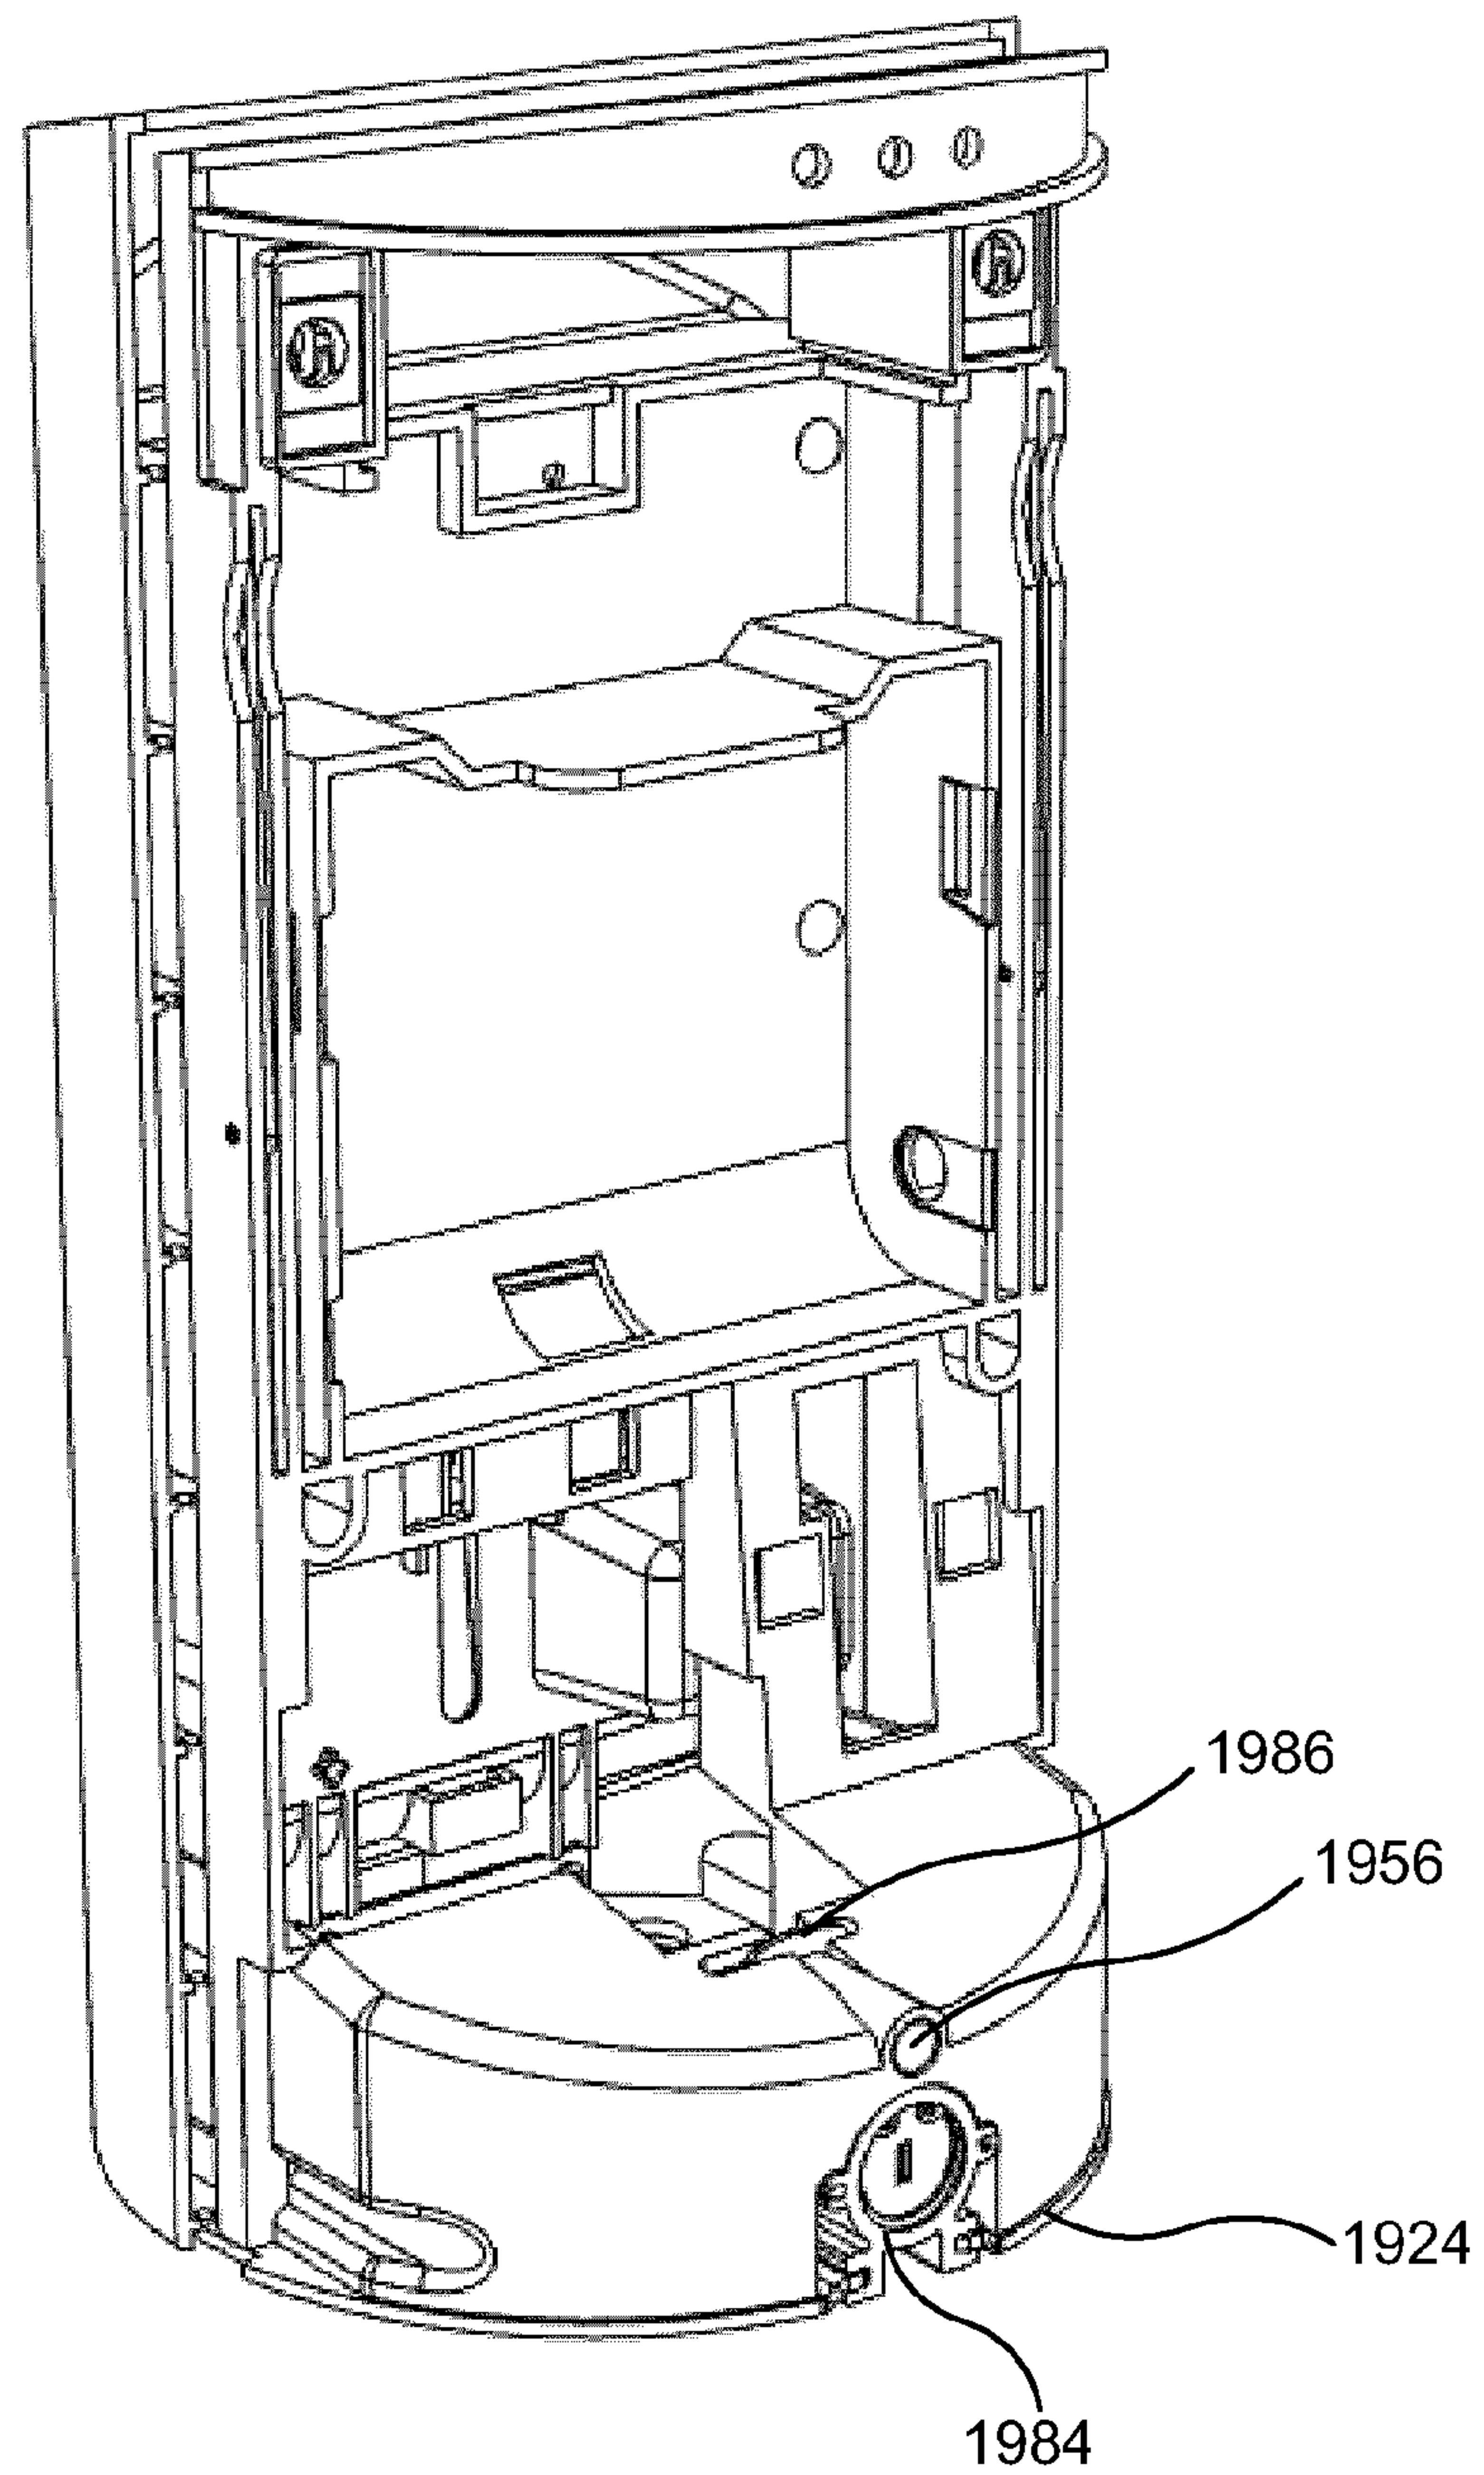


Figure 30

31/34

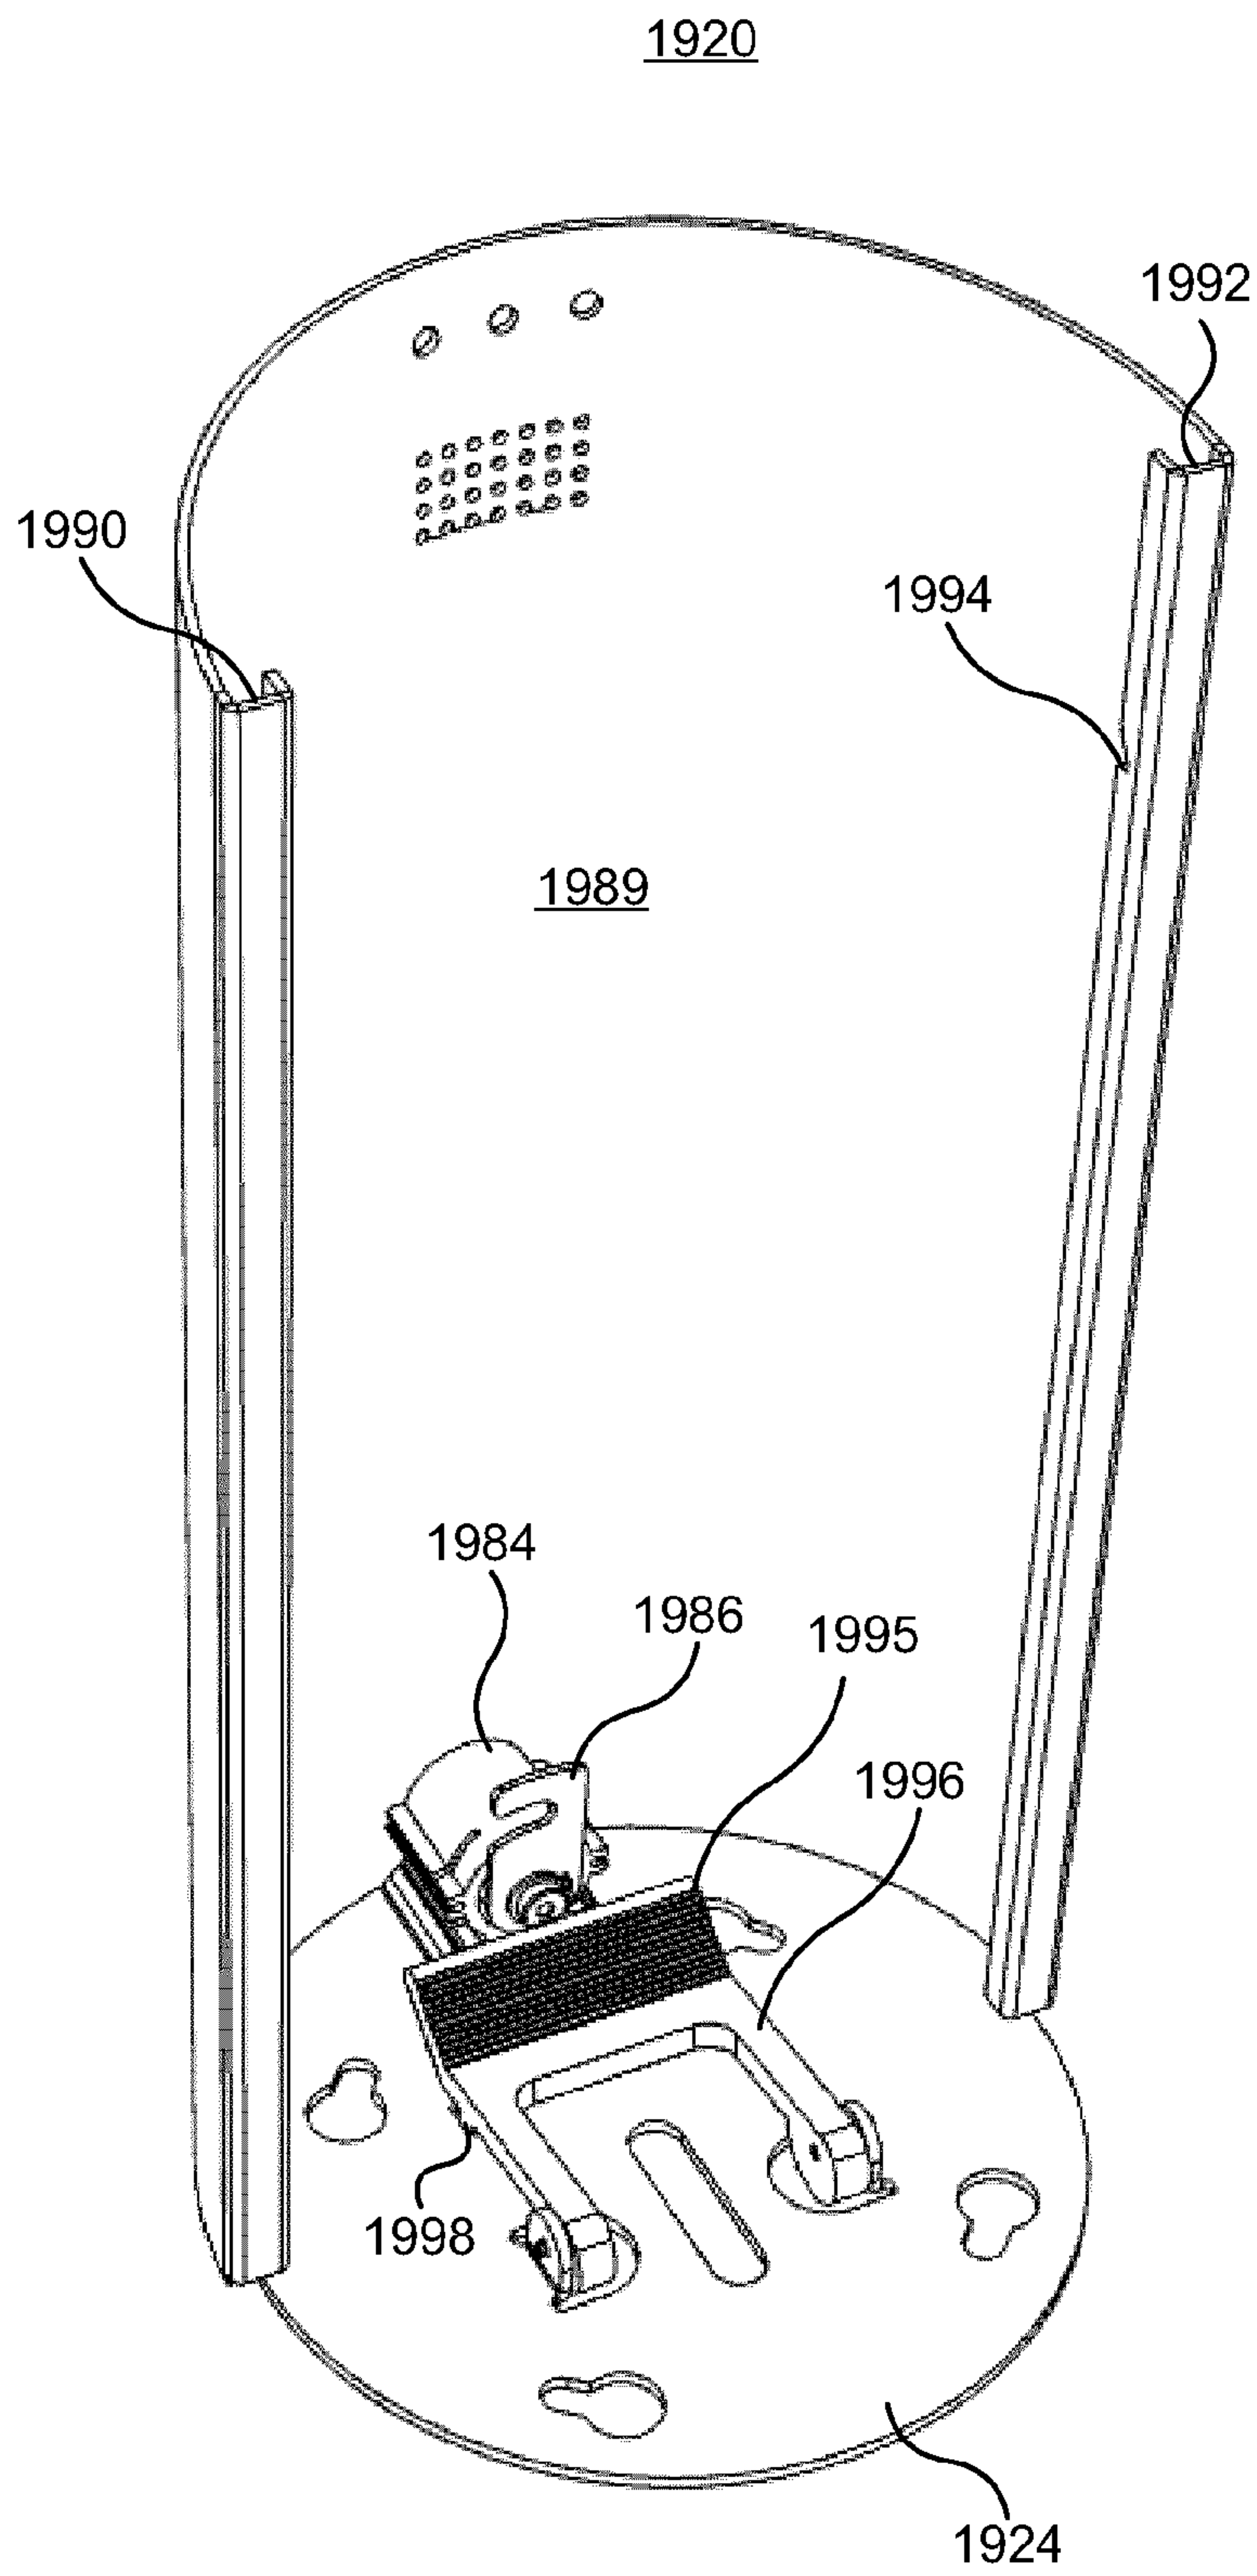
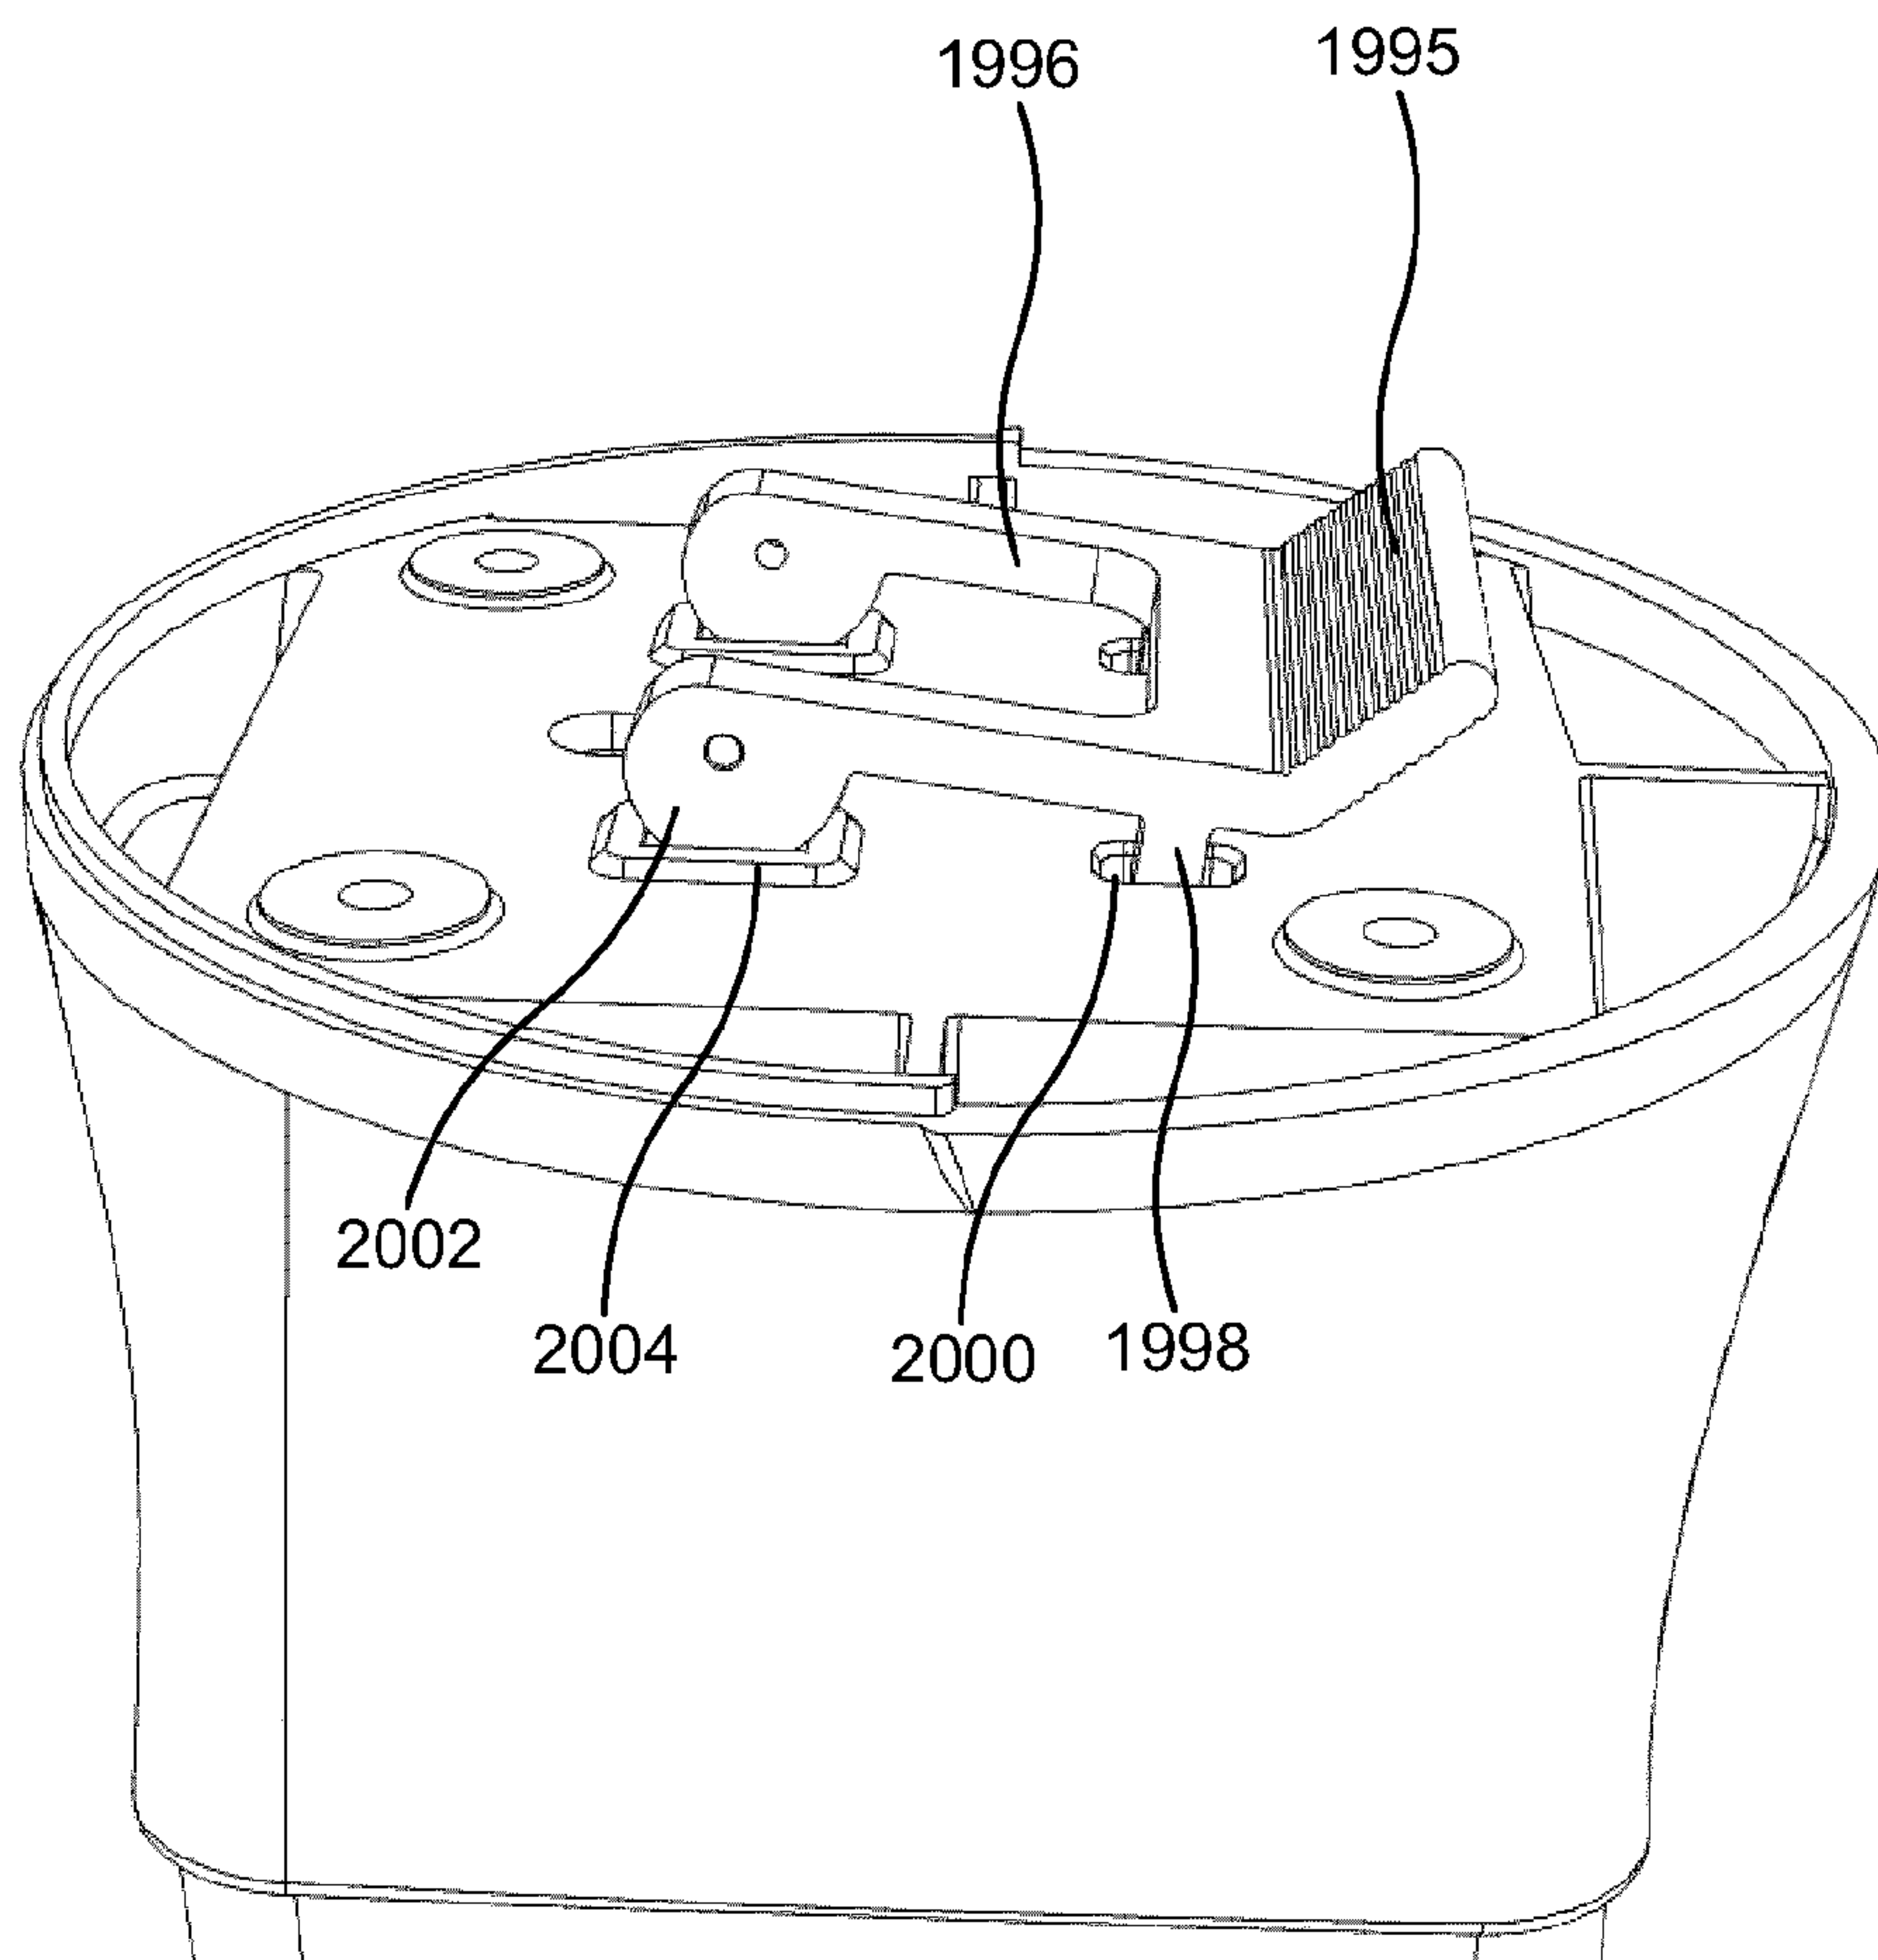
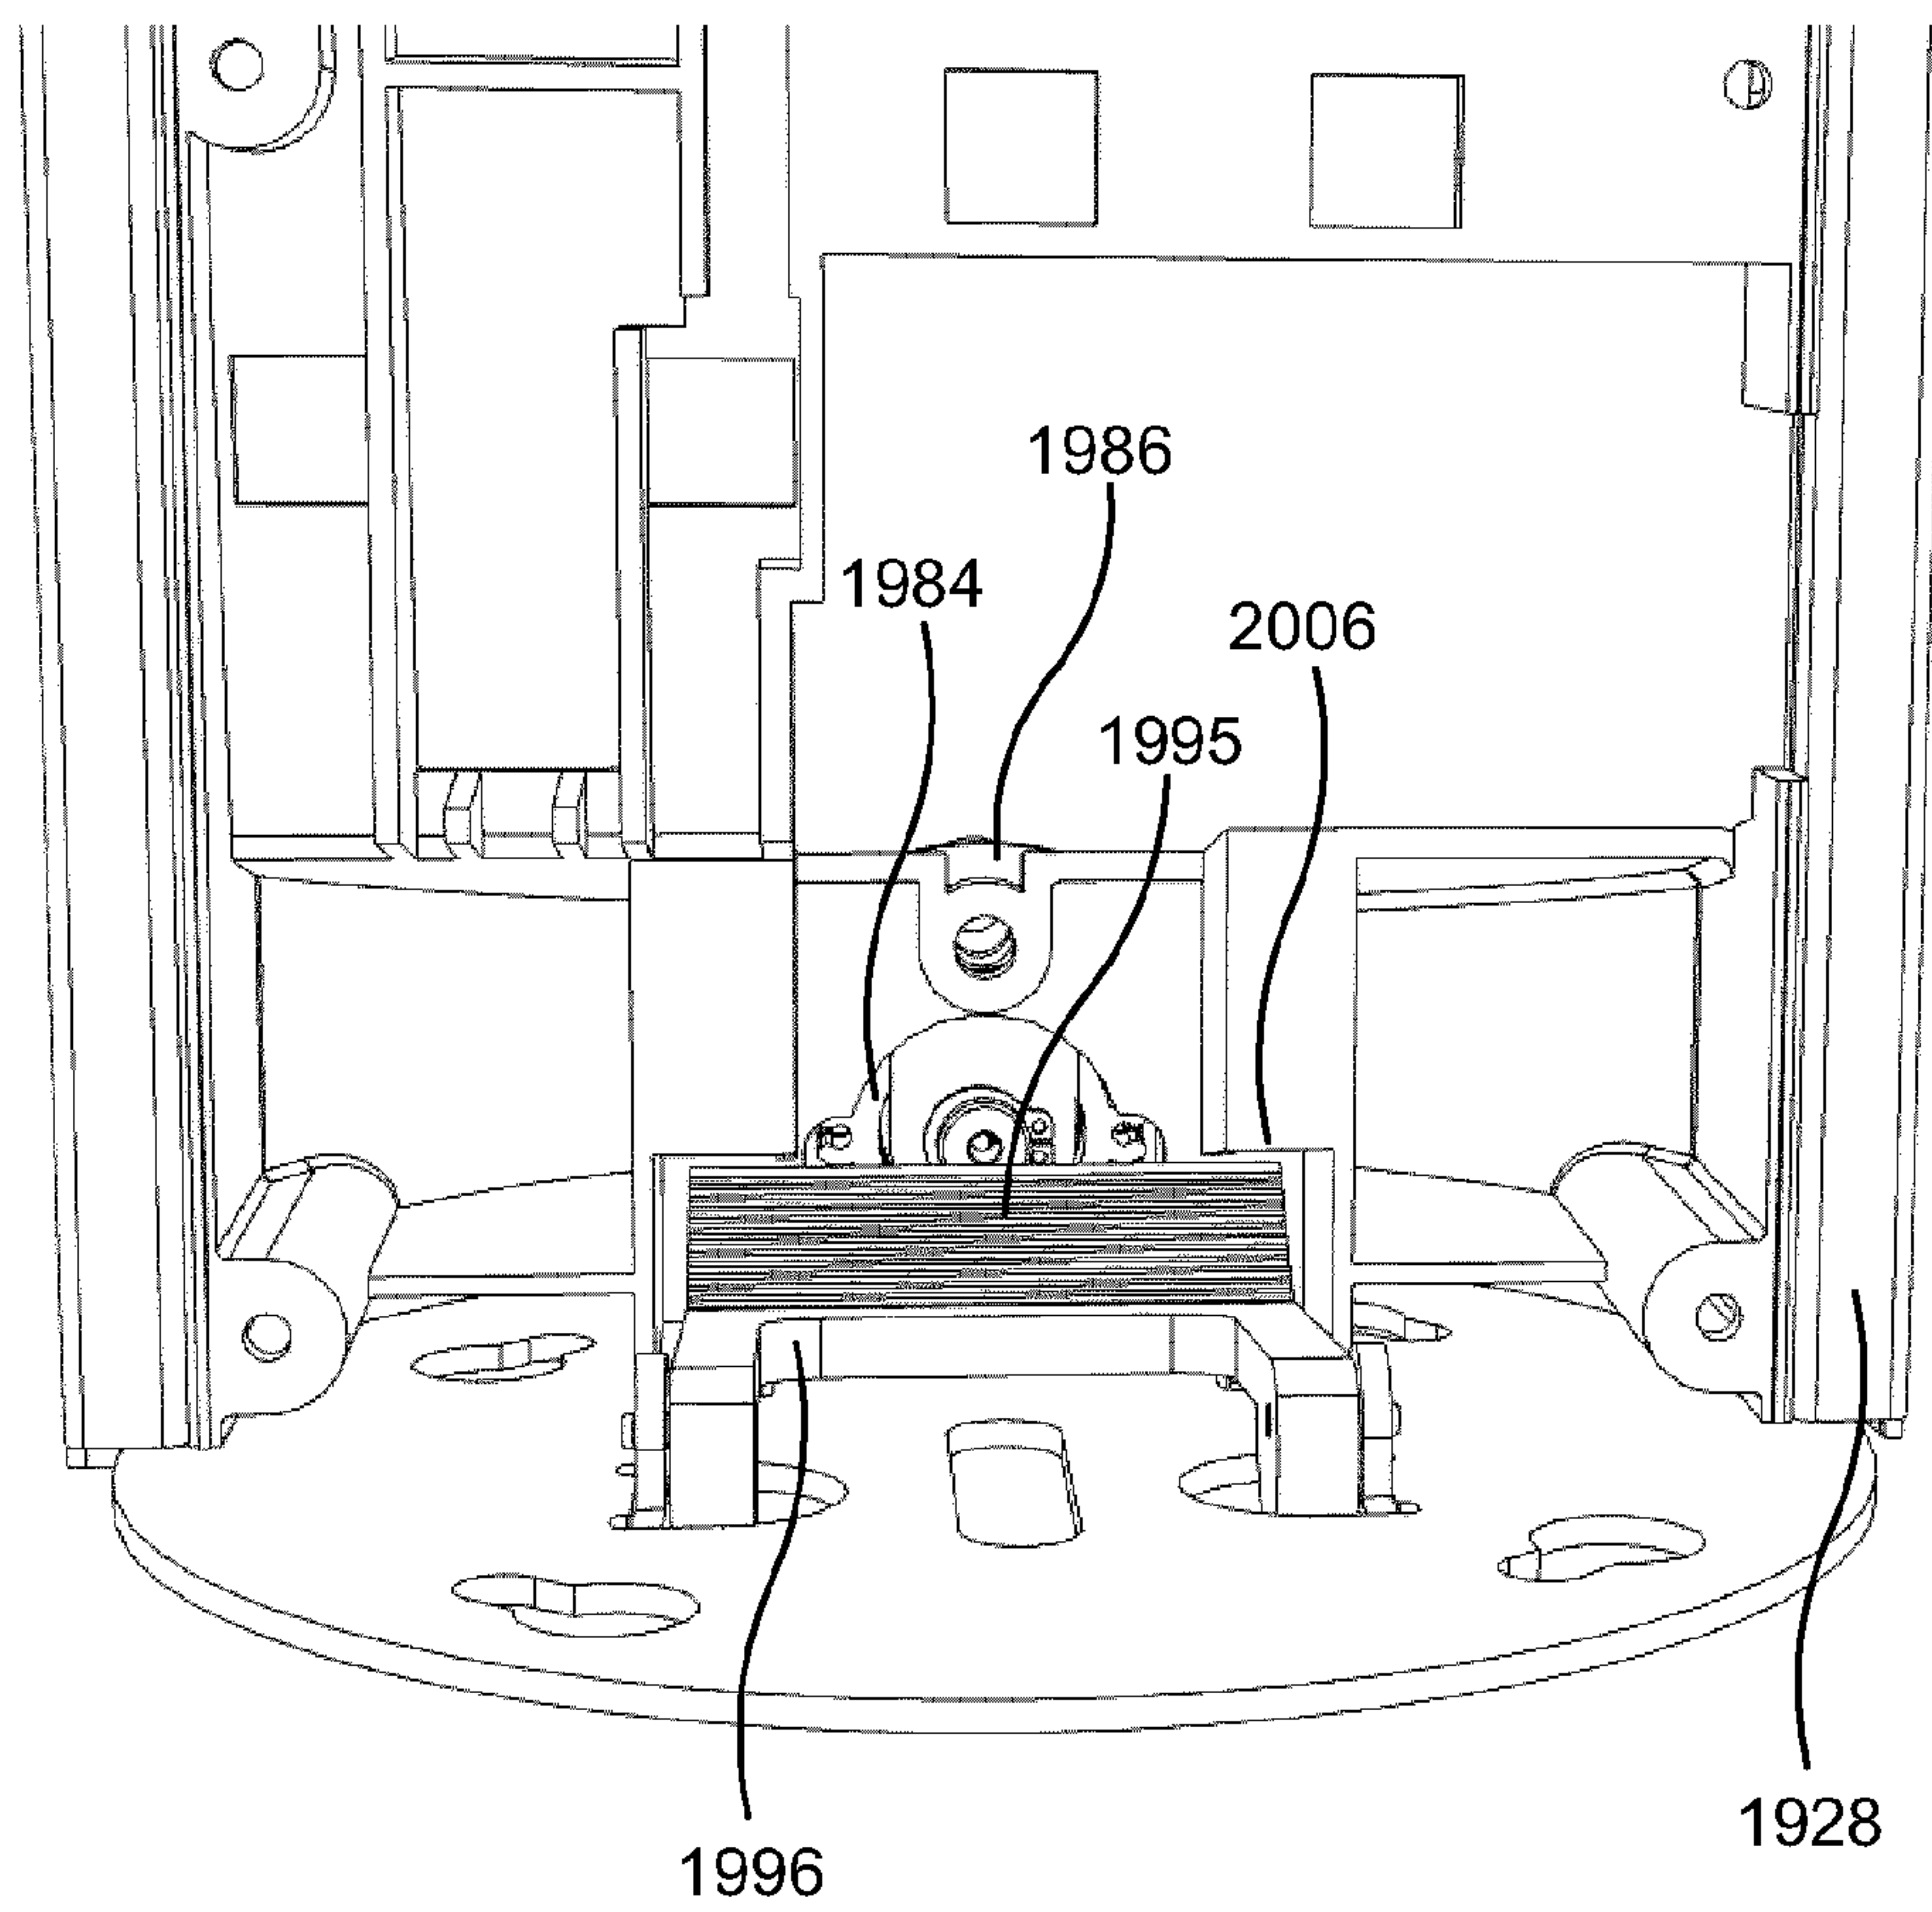


Figure 31

32/34

**Figure 32**

33/34

**Figure 33**

34/34

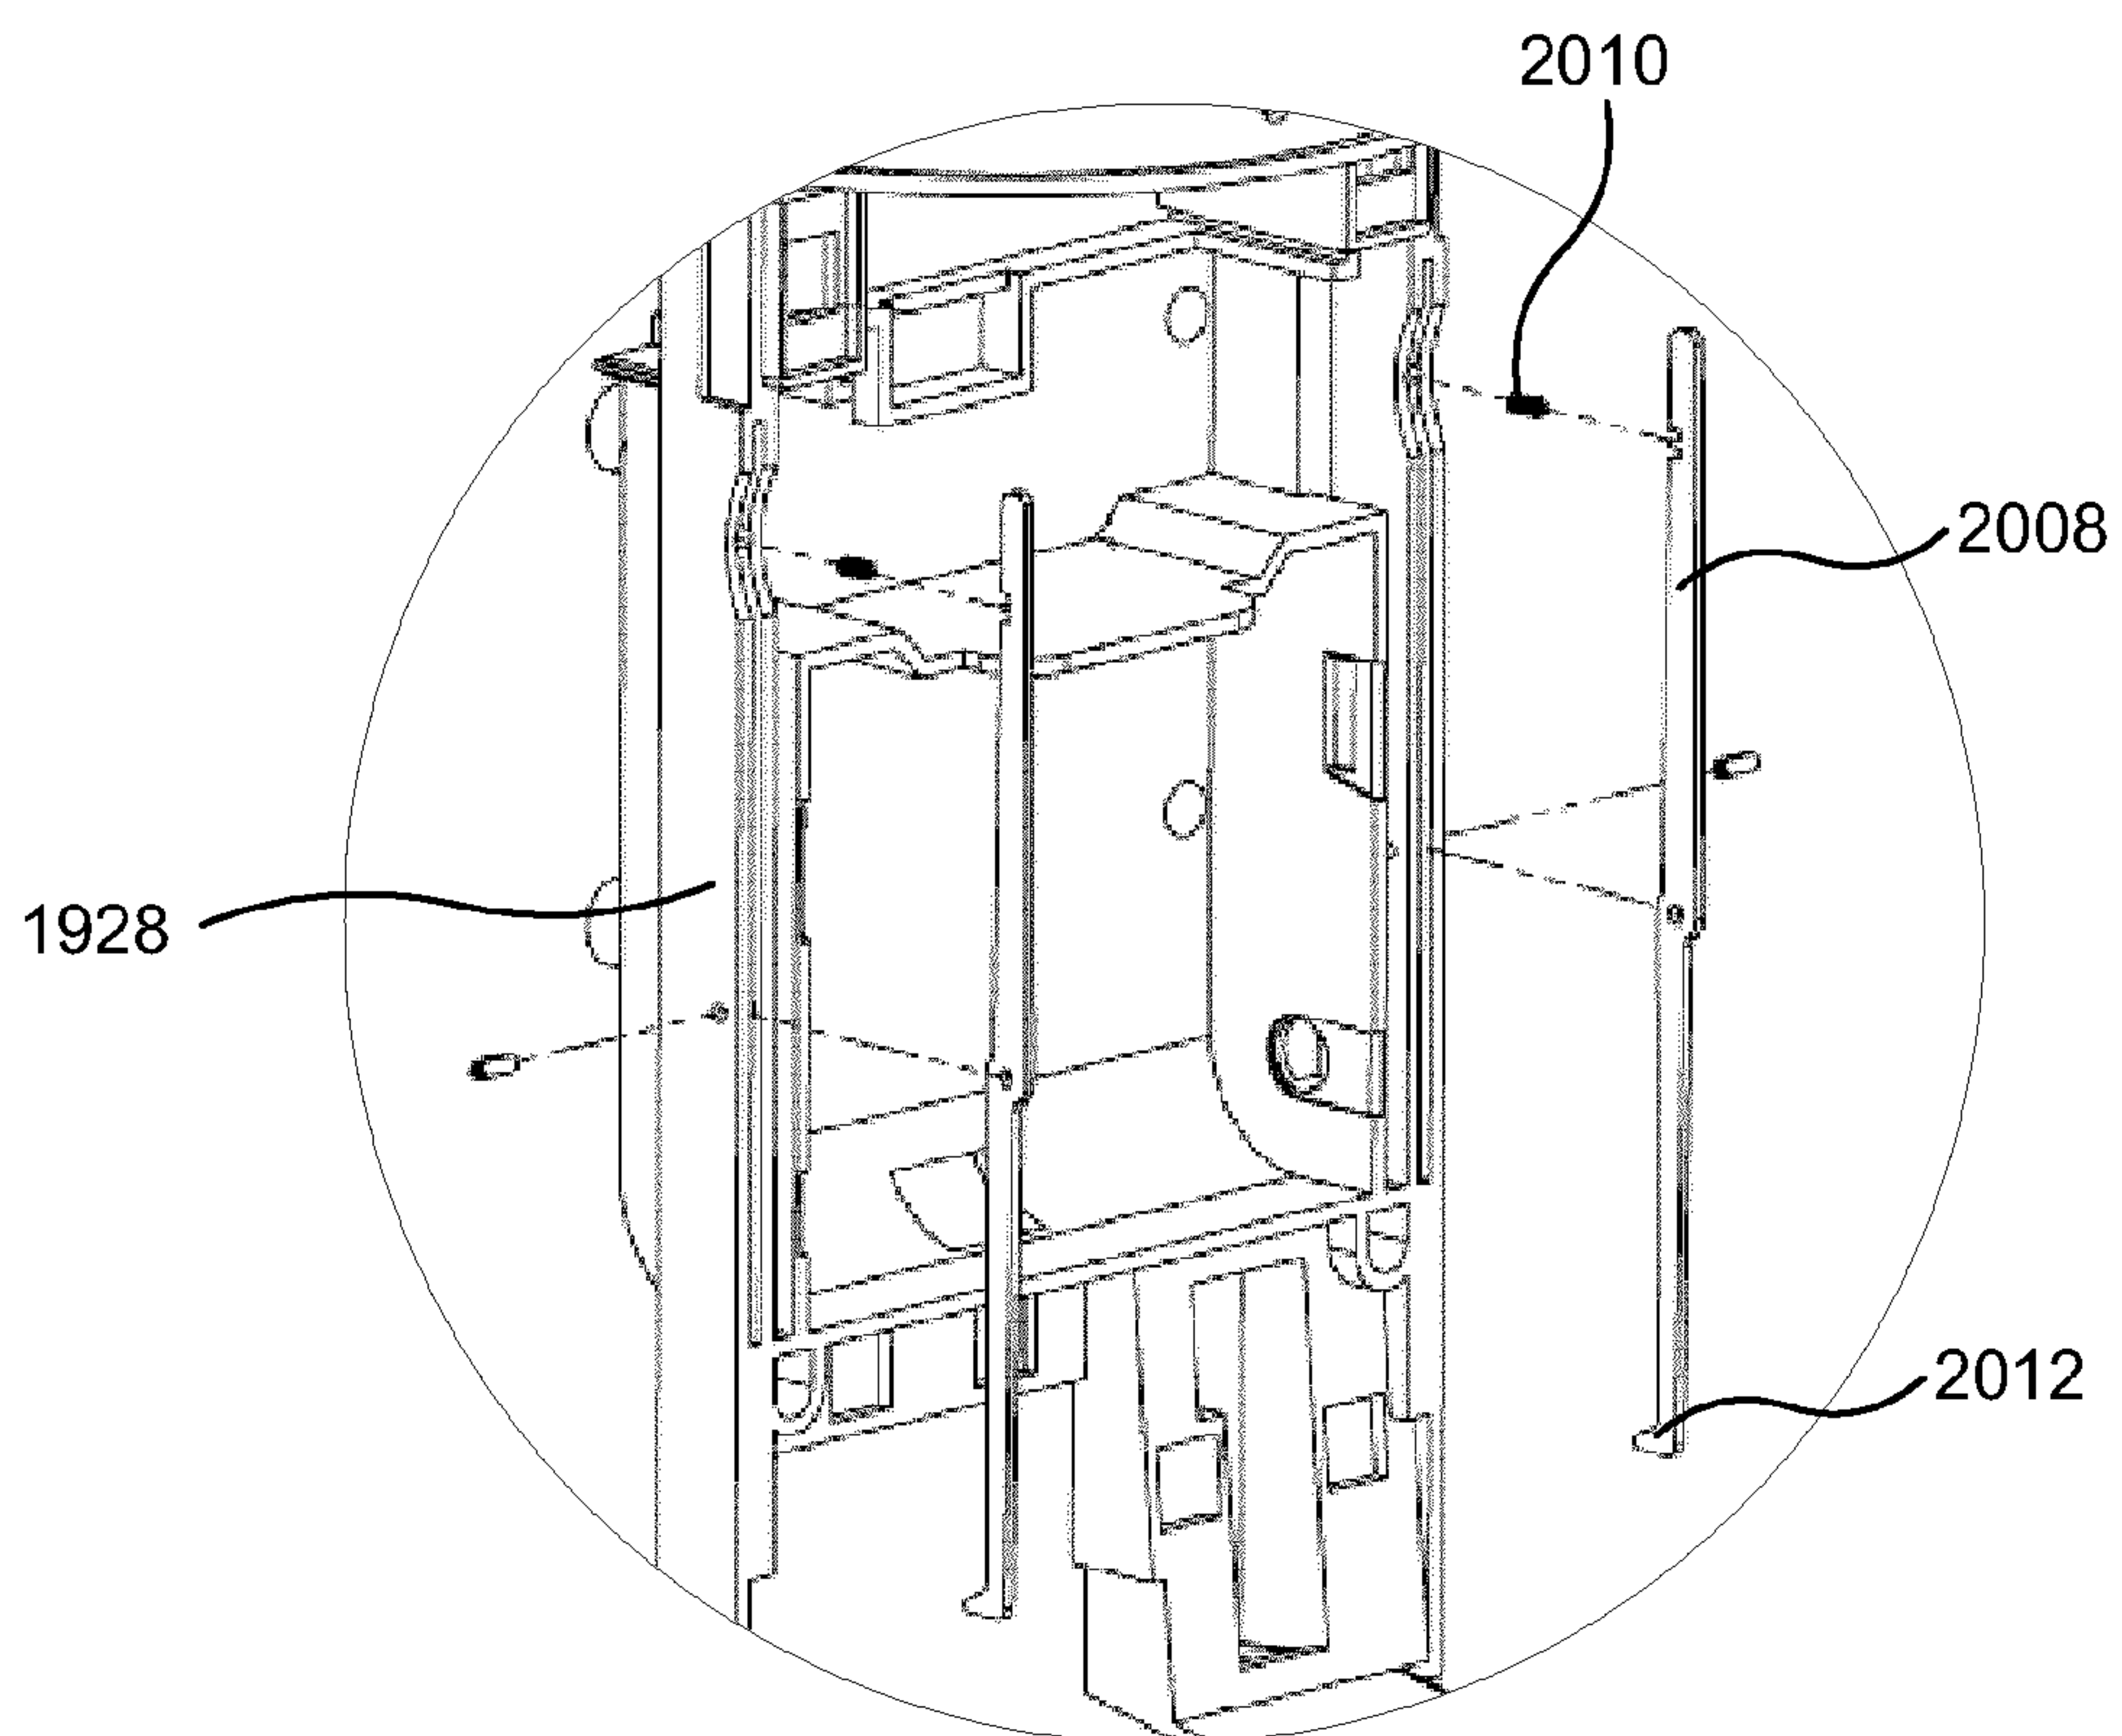


Figure 34

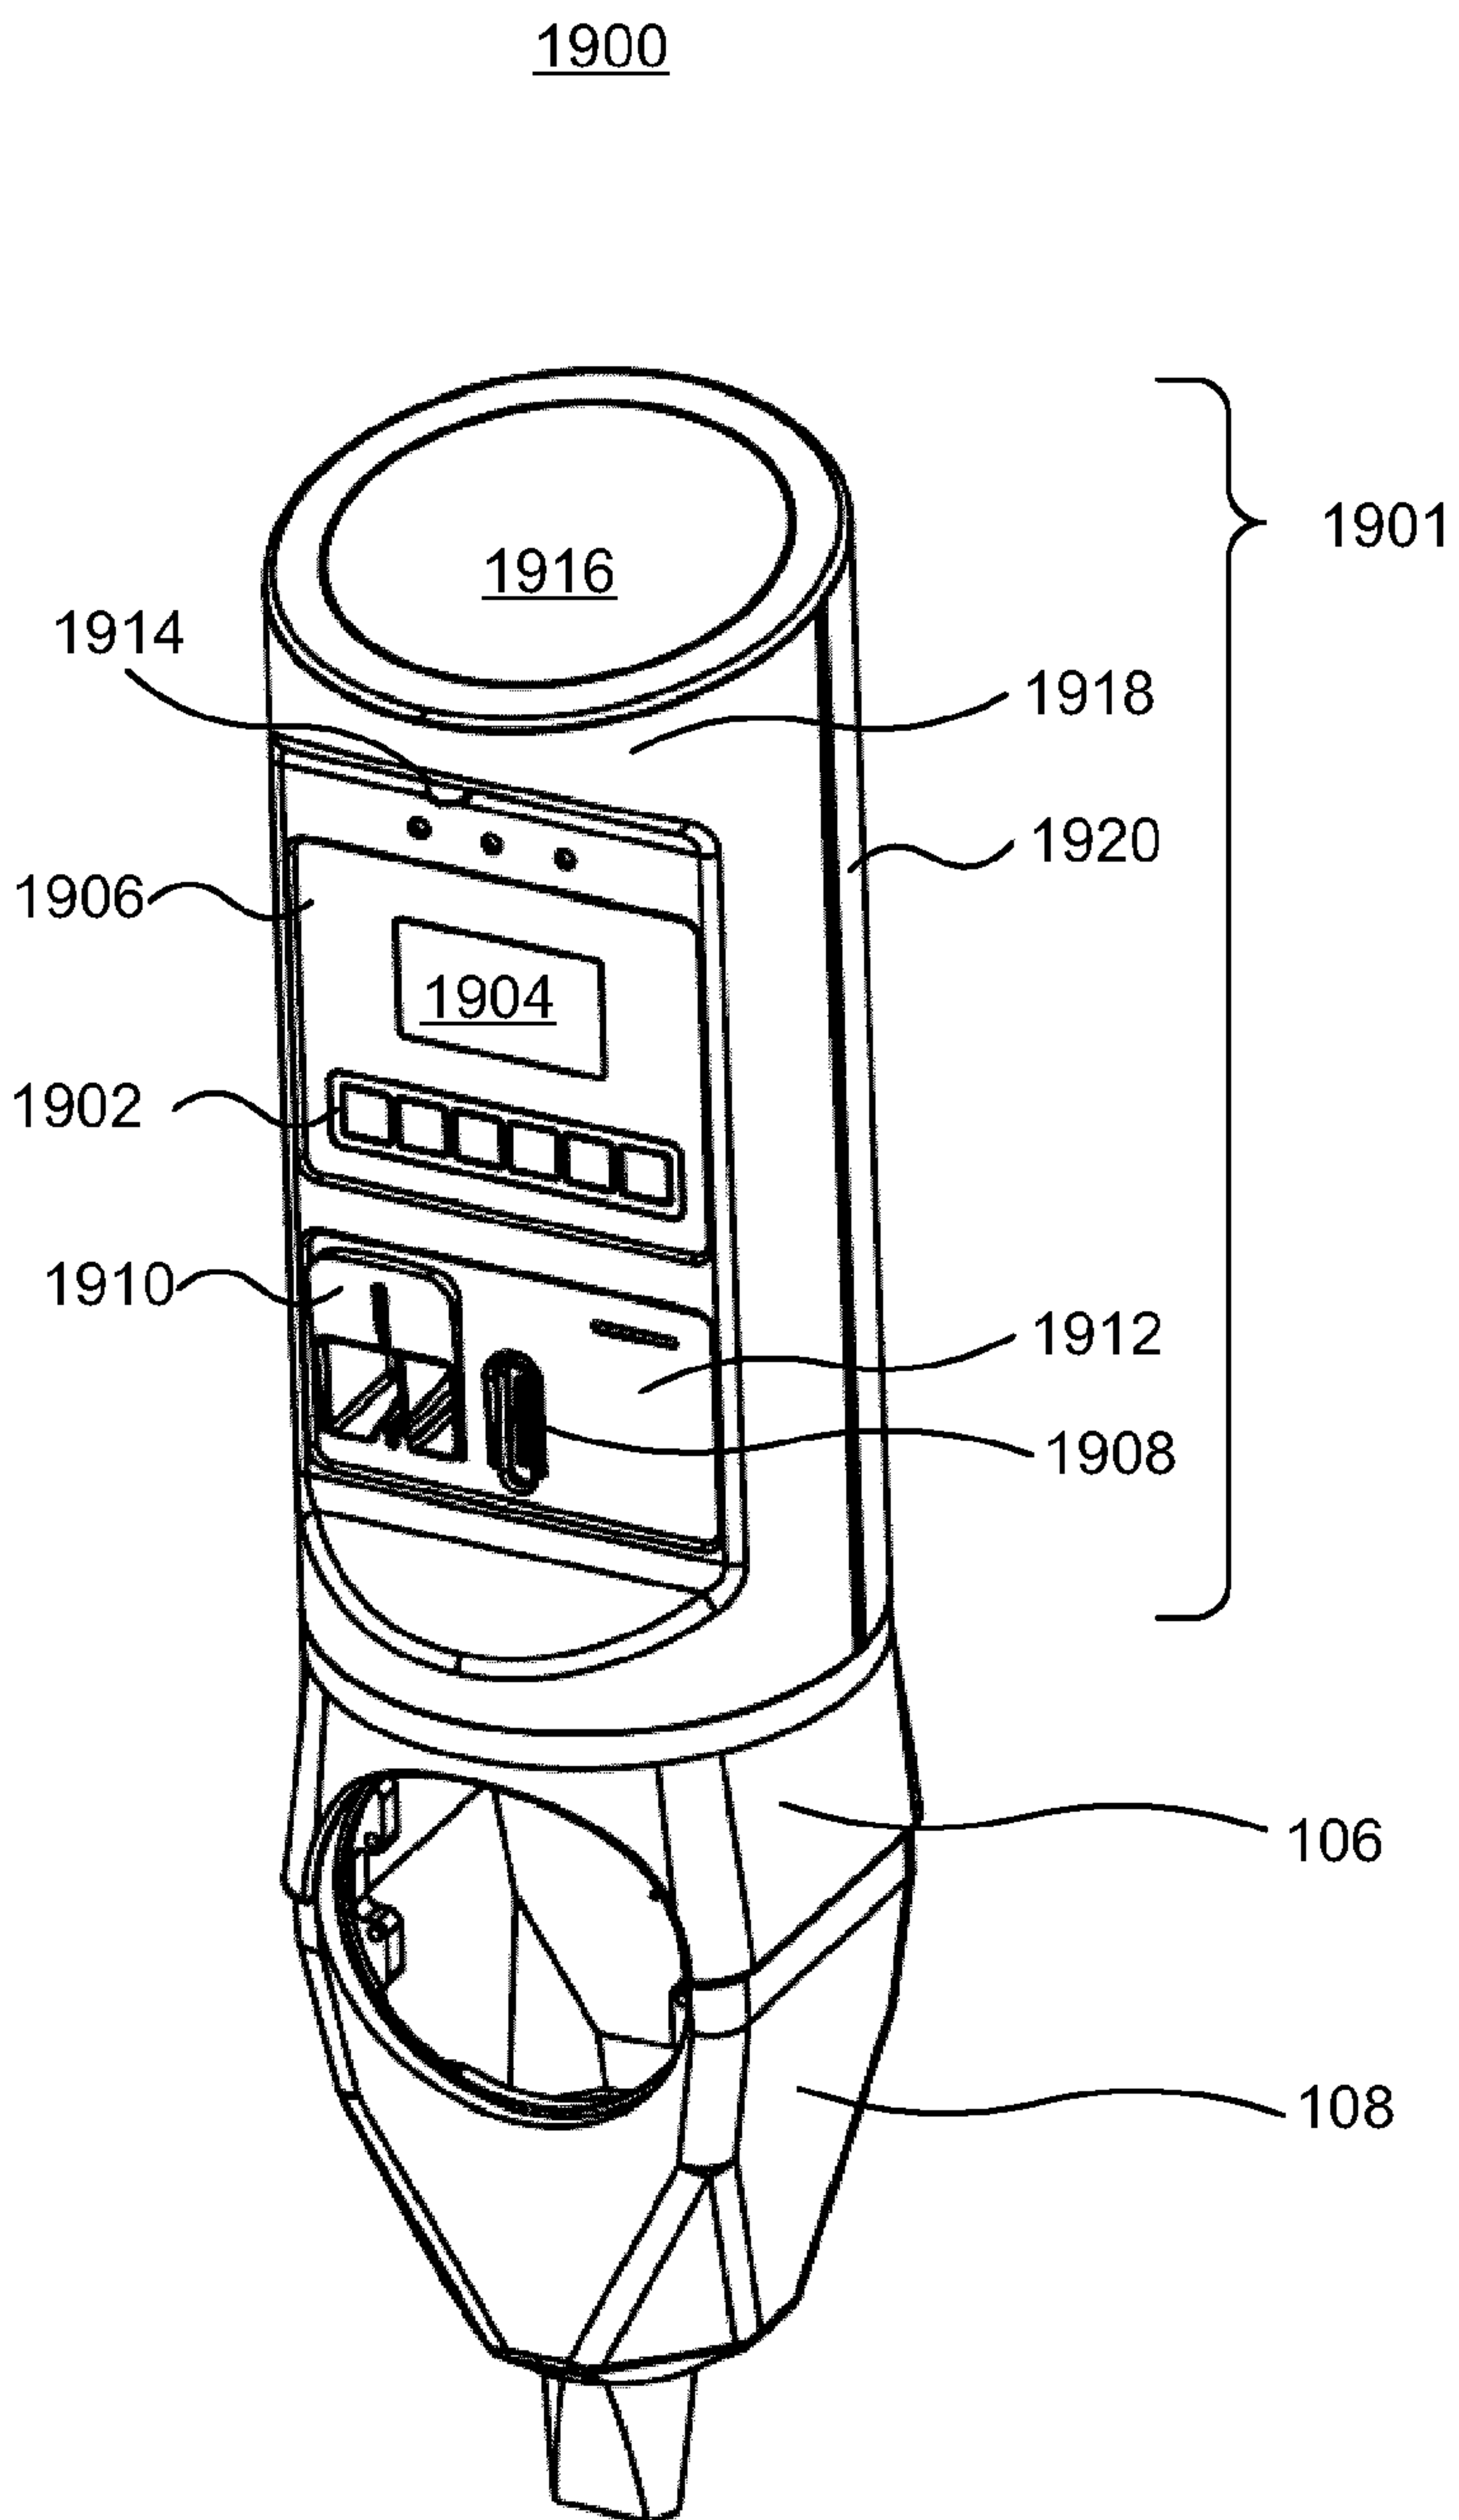


Figure 19