



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2695552 C 2017/01/03

(11)(21) **2 695 552**

(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**

(22) **Date de dépôt/Filing Date:** 2010/03/04

(41) **Mise à la disp. pub./Open to Public Insp.:** 2011/09/04

(45) **Date de délivrance/Issue Date:** 2017/01/03

(51) **Cl.Int./Int.Cl. C08F 4/6592** (2006.01),
C08F 10/02 (2006.01)

(72) **Inventeur/Inventor:**
WANG, QINYAN, CA

(73) **Propriétaire/Owner:**
NOVA CHEMICALS CORPORATION, CA


(74) **Agent:** CHISHOLM, P. SCOTT

(54) **Titre : METHODE DE PREPARATION D'UNE CIRE A FAIBLE POIDS MOLECULAIRE**

(54) **Title: PROCESS FOR PREPARING LOW MOLECULAR WEIGHT WAX**

(57) **Abrégé/Abstract:**

Polyethylene wax having a number average molecular weight of from 1,000 to 10,000 and a molecular weight distribution of from 2 to 4 may be produced using a phosphinimine catalyst under "forced" solution polymerization conditions. The "forced" conditions include high polymerization temperatures; comparatively low catalyst efficiencies and very high ethylene conversions. These "forced" conditions may be achieved by operating the reactor at a temperature of between 190° C and 250° C, using a high catalyst concentration and high ethylene conversion. Using these conditions, polyethylene wax may be produced in the absence of hydrogen.

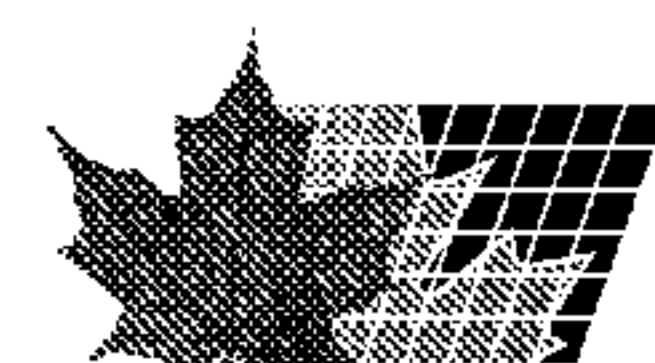

5

10

PROCESS FOR PREPARING LOW MOLECULAR WEIGHT WAX**ABSTRACT OF THE DISCLOSURE**

Polyethylene wax having a number average molecular weight of from 1,000 to 10,000 and a molecular weight distribution of from 2 to 4 may be produced using a phosphinimine catalyst under “forced” solution polymerization conditions. The “forced” conditions include high polymerization temperatures; comparatively low catalyst efficiencies and very high ethylene conversions. These “forced” conditions may be achieved by operating the reactor at a temperature of between 190° C and 250° C, using a high catalyst concentration and high ethylene conversion. Using these conditions, polyethylene wax may be produced in the absence of hydrogen.

PROCESS FOR PREPARING LOW MOLECULAR WEIGHT WAX

FIELD OF THE INVENTION

This invention relates to the preparation of polyethylene waxes having a narrow molecular weight distribution in a solution polymerization process using a
5 phosphinimine catalyst.

BACKGROUND OF THE INVENTION

Polyethylene waxes are readily available items of commerce and are used to prepare such products as paints, inks, cleaning waxes and polishes.

These waxes are prepared by the polymerization of ethylene (and, optionally, a
10 comonomer such as butene, hexene or octene) in the presence of a catalyst. Conventional Zeigler Natta catalysts may be used to prepare the waxes, but extremely high levels of hydrogen are generally required to produce low molecular weights.

U.S. patent 5,023,388 teaches the use of a metallocene catalyst to prepare polyethylene without using disproportionately large amounts of hydrogen.

15 U.S. patent 6,063,879 (Stephan et al.) teaches the preparation of high molecular weight polyethylene in a solution polymerization process using a phosphinimine catalyst. We have now discovered that the phosphinimine catalyst disclosed in the Stephan et al. patent may also be used to prepare low molecular weight polyethylene waxes (even in the absence of hydrogen) when used at polymerization temperatures in
20 excess of 190° C under polymerization conditions which allow greater than 90% ethylene conversion.


SUMMARY OF THE INVENTION

In one embodiment, the present invention provides:

25 A process to prepare polyethylene wax having a number average molecular weight of from 500 to 10,000 and a molecular weight distribution of from 2 to 4, said process

comprising polymerizing ethylene and optionally, at least one C₃ to C₁₀ alpha olefin, under solution polymerization conditions in a reactor in the presence of:

a) a catalyst defined by the formula:

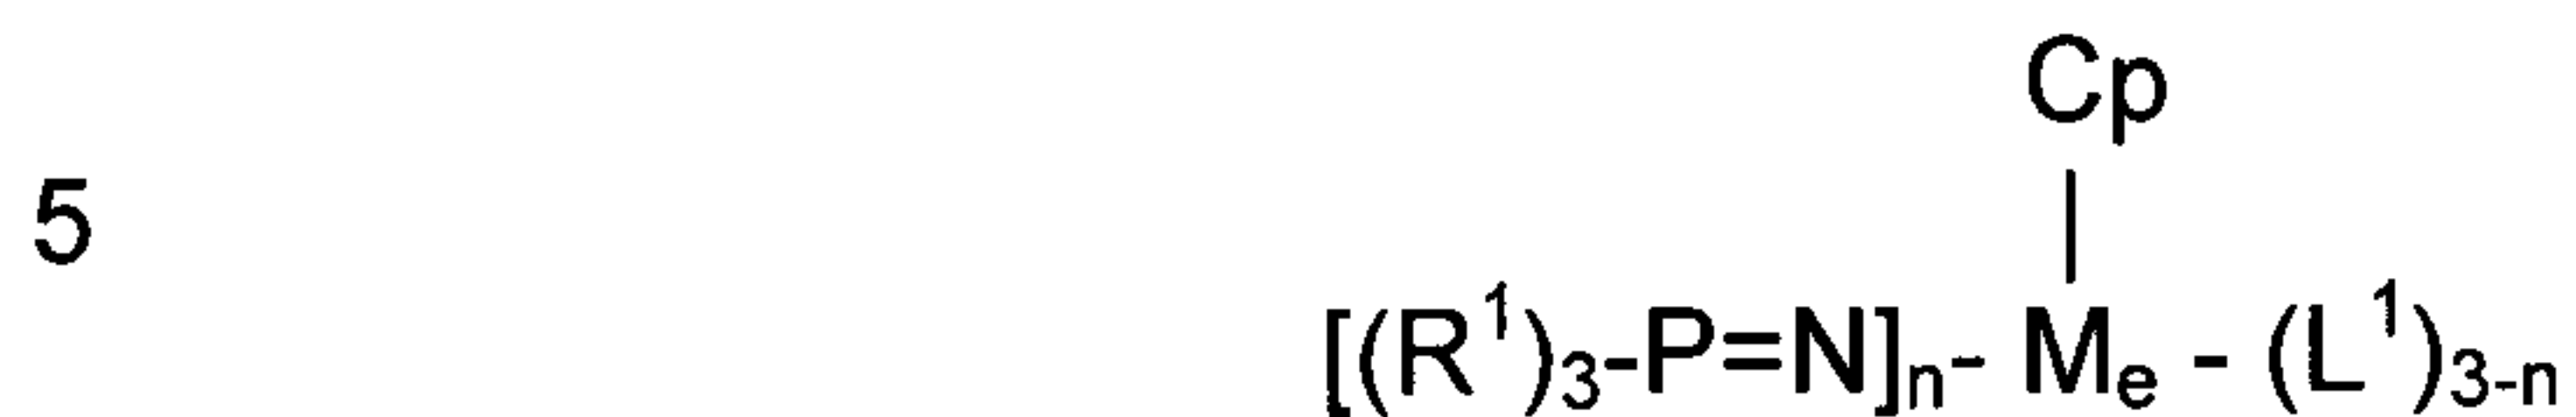

wherein M_e is selected from the group consisting of Ti, Zr, and Hf; n is 1 or 2; Cp is a monocyclopentadienyl ligand which is unsubstituted or substituted by up to five substituents independently selected from the group consisting of a C₁₋₁₀ hydrocarbyl radicals or two hydrocarbyl radicals taken together may form a ring which hydrocarbyl substituents or cyclopentadienyl radical are unsubstituted or further substituted by a halogen atom, a C₁₋₈ alkyl radical, C₁₋₈ alkoxy radical, a C₆₋₁₀ aryl or aryloxy radical; an amido radical which is unsubstituted or substituted by up to two C₁₋₈ alkyl radicals; a phosphido radical which is unsubstituted or substituted by up to two C₁₋₈ alkyl radicals; silyl radicals of the formula -Si-(R²)₃ wherein each R² is independently selected from the group consisting of hydrogen, a C₁₋₈ alkyl or alkoxy radical, C₆₋₁₀ aryl or aryloxy radicals; germanyl radicals of the formula Ge-(R²)₃ wherein R² is as defined above; each R¹ is independently selected from the group consisting of a hydrogen atom, a halogen atom, C₁₋₁₀ hydrocarbyl radicals which are unsubstituted by or further substituted by a halogen atom, a C₁₋₈ alkyl radical, C₁₋₈ alkoxy radical, a C₆₋₁₀ aryl or aryloxy radical, a silyl radical of the formula -Si-(R²)₃ wherein each R² is independently selected from the group consisting of hydrogen, a C₁₋₈ alkyl or alkoxy radical, C₆₋₁₀ aryl or aryloxy radicals, germanyl radical of the formula Ge-(R²)₃ wherein R² is as defined above or two R¹ radicals taken together may form a bidentate C₁₋₁₀ hydrocarbyl radical, which is unsubstituted by or further substituted by a halogen atom, a C₁₋₈ alkyl radical, C₁₋₈

alkoxy radical, a C₆₋₁₀ aryl or aryloxy radical, a silyl radical of the formula -Si-(R²)₃ wherein each R² is independently selected from the group consisting of hydrogen, a C₁₋₈ alkyl or alkoxy radical, C₆₋₁₀ aryl or aryloxy radicals, germanyl radicals of the formula Ge-(R²)₃ wherein R² is as defined above, provided that R₁ individually or two R₁ radicals taken together may not form a Cp ligand as defined above; each L¹ is independently selected from the group consisting of a hydrogen atom, of a halogen atom, a C₁₋₁₀ hydrocarbyl radical a C₁₋₁₀ alkoxy radical, a C₅₋₁₀ aryl oxide radical, each of which said hydrocarbyl, alkoxy, and aryl oxide radicals may be unsubstituted by or further substituted by a halogen atom, a C₁₋₈ alkyl radical, C₁₋₈ alkoxy radical, a C₆₋₁₀ aryl or aryl oxy radical, an amido radical which is unsubstituted or substituted by up to two C₁₋₈ alkyl radicals; a phosphido radical which is unsubstituted or substituted by up to two C₁₋₈ alkyl radicals, provided that L¹ may not be a Cp radical as defined above; and

b) an activator,

with the provisos that:

- 1) said polymerization conditions are conducted at a temperature of from 190° C to 250° C;
- 2) at least 85 weight % of said ethylene is converted to polyethylene wax under said polymerization conditions; and
- 3) catalyst efficiency, K_p, is less than 300 but greater than 25 [mM × minutes]⁻¹, where mM is the concentration, expressed in millimoles, of said transition metal M_e within said reactor.

As used herein, the term "polyethylene wax" refers to a polymer of ethylene (and, optionally, an alpha olefin monomer) which has a number average molecular weight (M_n) of from about 500 to 10,000. The polyethylene waxes of this invention are

further characterized by having a molecular weight distribution, M_w/M_n , of from 2 to 4 (where M_w is weight average molecular weight).

We have discovered that such waxes may be prepared at high polymerization temperatures under “forced” solution polymerization conditions. The term “forced” means that a very high ethylene conversion is achieved. In particular, the ethylene conversion must be greater than 85% (preferably greater than 90%) of the ethylene fed to the reactor. This forced condition can be achieved by using a very high level of catalyst (such that the catalyst efficiency, as quantified by the kinetic parameter “ K_p ” – discussed later) is less than 300. As will be shown in the Examples, wax may be produced using these conditions, even in the absence of hydrogen.

All three of these conditions (high temperature, high ethylene conversions and low catalyst efficiency) are required by the present invention. In other words, if only two of these conditions are used, the present catalyst system will generally provide a higher molecular weight polyethylene. Moreover, the catalyst efficiency (expressed as K_p , described below) is also strongly influenced by impurities. Specifically, impurities that are contained in the reactor feedstreams (for example, polar contaminants in the solvent or monomers) will typically reduce the catalyst efficiency without significantly changing the molecular weight of the polymer. While not wishing to be bound by theory, it is believed that such impurities interact with the catalyst in a manner that reduces or even eliminates the activity of the catalyst molecule that interacts with the impurity. The present invention requires comparatively high catalyst concentrations – even if all reactor feedstreams are highly purified. In other words, a given catalyst concentration that provides a high molecular weight thermoplastic polyethylene for given reaction conditions and a given ethylene conversion is “too low” for the process of


this invention. The molecular weight of the polymer can be reduced (so that wax is formed) by then increasing the catalyst concentration and ethylene conversion.

Finally, the Examples show that wax may be produced by the process of this invention even in the absence of hydrogen. The present invention does encompass the use of hydrogen. Hydrogen is a well known chain transfer agent and the use of hydrogen will generally allow the production of lower molecular weight polymer under less forced polymerization conditions.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Part A. Catalyst

The catalyst used in this invention is a Group 4 metal complex of the formula:

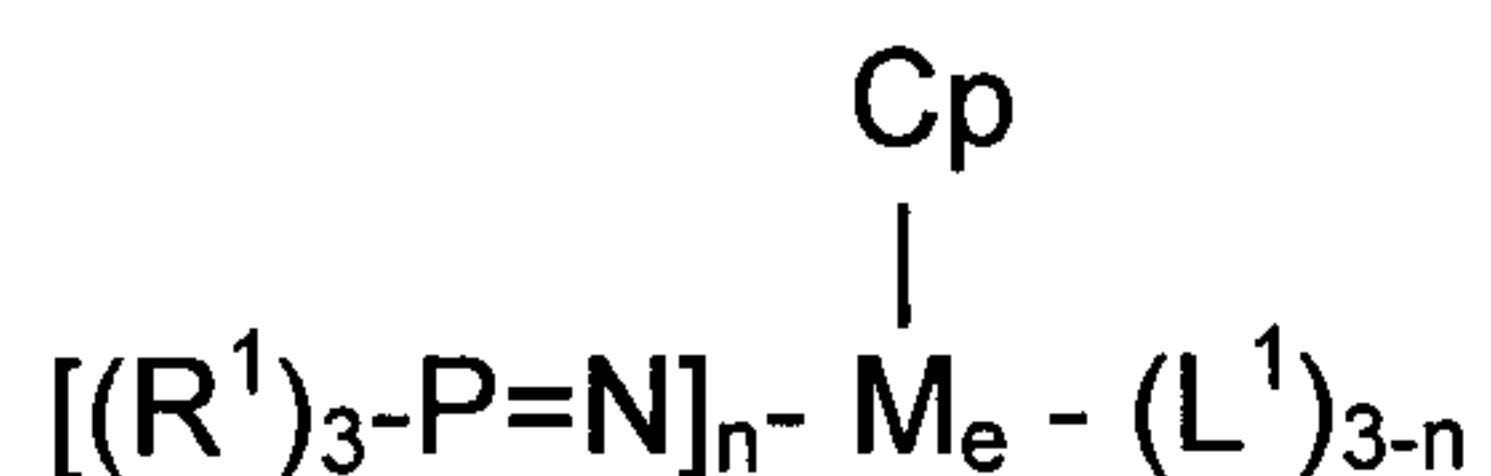

wherein M_e is selected from the group consisting of Ti, Zr, and Hf; n is 1 or 2; Cp is a monocyclopentadienyl ligand which is unsubstituted or substituted by up to five substituents independently selected from the group consisting of a C_{1-10} hydrocarbyl radicals or two hydrocarbyl radicals taken together may form a ring which hydrocarbyl substituents or cyclopentadienyl radical are unsubstituted or further substituted by a halogen atom, a C_{1-8} alkyl radical, C_{1-8} alkoxy radical, a C_{6-10} aryl or aryloxy radical; an amido radical which is unsubstituted or substituted by up to two C_{1-8} alkyl radicals; a phosphido radical which is unsubstituted or substituted by up to two C_{1-8} alkyl radicals; silyl radicals of the formula $-\text{Si}(\text{R}^2)_3$ wherein each R^2 is independently selected from the group consisting of hydrogen, a C_{1-8} alkyl or alkoxy radical, C_{6-10} aryl or aryloxy radicals; germanyl radicals of the formula $\text{Ge}(\text{R}^2)_3$ wherein R^2 is as defined above; each R^1 is independently selected from the group consisting of a hydrogen atom, a halogen atom, C_{1-10} hydrocarbyl radicals which are unsubstituted by or further substituted by a halogen

atom, a C₁₋₈ alkyl radical, C₁₋₈ alkoxy radical, a C₆₋₁₀ aryl or aryloxy radical, a silyl radical of the formula -Si-(R²)₃ wherein each R² is independently selected from the group consisting of hydrogen, a C₁₋₈ alkyl or alkoxy radical, C₆₋₁₀ aryl or aryloxy radicals, germanyl radical of the formula Ge-(R²)₃ wherein R² is as defined above or two R¹ radicals taken together may form a bidentate C₁₋₁₀ hydrocarbyl radical, which is unsubstituted by or further substituted by a halogen atom, a C₁₋₈ alkyl radical, C₁₋₈ alkoxy radical, a C₆₋₁₀ aryl or aryloxy radical, a silyl radical of the formula -Si-(R²)₃ wherein each R² is independently selected from the group consisting of hydrogen, a C₁₋₈ alkyl or alkoxy radical, C₆₋₁₀ aryl or aryloxy radicals, germanyl radicals of the formula Ge-(R²)₃ wherein R² is as defined above, provided that R₁ individually or two R₁ radicals taken together may not form a Cp ligand as defined above; each L¹ is independently selected from the group consisting of a hydrogen atom, of a halogen atom, a C₁₋₁₀ hydrocarbyl radical a C₁₋₁₀ alkoxy radical, a C₅₋₁₀ aryl oxide radical, each of which said hydrocarbyl, alkoxy, and aryl oxide radicals may be unsubstituted by or further substituted by a halogen atom, a C₁₋₈ alkyl radical, C₁₋₈ alkoxy radical, a C₆₋₁₀ aryl or aryl oxy radical, an amido radical which is unsubstituted or substituted by up to two C₁₋₈ alkyl radicals; a phosphido radical which is unsubstituted or substituted by up to two C₁₋₈ alkyl radicals, provided that L¹ may not be a Cp radical as defined above.

As used in this specification the term "cyclopentadienyl" refers to a 5-member carbon ring having delocalized bonding within the ring and typically being bound to the Group 4 metal (M) through covalent η^5 -bonds.

In the Group 4 metal complex preferably Cp is unsubstituted. However, if Cp is substituted preferred substituents include a fluorine atom, a chlorine atom, C₁₋₆ hydrocarbyl radical, or two hydrocarbyl radicals taken together may form a bridging ring, an amido radical which is unsubstituted or substituted by up to two C₁₋₄ alkyl

radicals, a phosphido radical which is unsubstituted or substituted by up to two C_{1-4} alkyl radicals, a silyl radical of the formula $-Si-(R^2)_3$ wherein each R^2 is independently selected from the group consisting of a hydrogen atom and a C_{1-4} alkyl radical; a
 5 germanyl radical of the formula $-Ge-(R^2)_3$ wherein each R^2 is independently selected from the group consisting of a hydrogen atom and a C_{1-4} alkyl radical.

In the Group 4 metal complex preferably each R^1 is selected from the group consisting of a hydrogen atom, a halide, preferably fluorine or chlorine atom, a C_{1-4} alkyl radical, a C_{1-4} alkoxy radical, a silyl radical of the formula $-Si-(R^2)_3$ wherein each R^2 is independently selected from the group consisting of a hydrogen atom and a C_{1-4} alkyl
 10 radical; and a germanyl radical of the formula $-Ge-(R^2)_3$ wherein each R^2 is independently selected from the group consisting of a hydrogen atom and a C_{1-4} alkyl radical.

In the Group 4 metal complex preferably each L^1 is independently selected from the group consisting of a hydrogen atom, a halogen, preferably fluorine or chlorine
 15 atom, a hydrocarbyl such as a C_{1-6} alkyl radical, a C_{1-6} alkoxy radical, and a C_{6-10} aryl oxide radical.

Preferred catalysts are those in which M is titanium, each R^1 is an alkyl group (especially isopropyl or tertiary butyl) and there are 2 L ligands, each of which is preferably a halide (especially chlorine).

20 Part B. Activator

Preferred activators are selected from the groups consisting of aluminoxanes, ionic activators and mixtures of the two.

The aluminoxane activator may be of the formula $(R^4)_2AlO(R^4AlO)_mAl(R^4)_2$ wherein each R^4 is independently selected from the group consisting of C_{1-20}
 25 hydrocarbyl radicals and m is from 0 to 50, preferably R^4 is a C_{1-4} alkyl radical and m is

from 5 to 30. Commercially available aluminoxanes (as described in the Examples) are preferably used for reasons of convenience, but aluminoxanes may be prepared by carefully reacting aluminum alkyls with small amounts of water.

Activation of a polymerization catalyst with aluminoxane generally requires a molar ratio of aluminum in the activator to Group 4 metal in the complex from 10:1 to 1000:1. The process of this invention preferably has an aluminum to Group 4 metal ratio of at least 50:1 (on a molar basis) most preferably from 50 to 500:1. High “absolute” amounts of aluminoxane are generally preferred. Without wishing to be bound by theory, it is believed that the high level of aluminum may lead to lower molecular weights (which is desired in the production of wax) by a chain transfer mechanism to aluminum. (Due to the high levels of transition metal catalyst that is preferably used in the process of this invention, the “absolute” levels of Al are also high even at relatively low Al/Ti ratios. For example, even at an Al/M ratio of 50/1, an increase of “X” millimoles of transition metal will increase the Al level by 50 X millimoles).

The “ionic activator” may be selected from the group consisting of:

- (i) compounds of the formula $[R^5]^+ [B(R^7)_4]^-$ wherein B is a boron atom, R^5 is a cyclic C_{5-7} aromatic cation or a triphenyl methyl cation and each R^7 is independently selected from the group consisting of phenyl radicals which are unsubstituted or substituted with from 3 to 5 substituents selected from the group consisting of a fluorine atom, a C_{1-4} alkyl or alkoxy radical which is unsubstituted or substituted by a fluorine atom; and a silyl radical of the formula $-Si-(R^9)_3$; wherein each R^9 is independently selected from the group consisting of a hydrogen atom and a C_{1-4} alkyl radical; and

(ii) compounds of the formula $[(R^8)_t ZH]^+[B(R^7)_4]^-$ wherein B is a boron atom, H is a hydrogen atom, Z is a nitrogen atom or phosphorus atom, t is 2 or 3 and R^8 is selected from the group consisting of C_{1-8} alkyl radicals, a phenyl radical which is unsubstituted or substituted by up to three C_{1-4} alkyl radicals, or one R^8 taken together with the nitrogen atom may form an anilinium radical and R^7 is as defined above; and

(iii) compounds of the formula $B(R^7)_3$ wherein R^7 is as defined above.

In the above compounds preferably R^7 is a pentafluorophenyl radical, and R^5 is a triphenylmethyl cation, Z is a nitrogen atom and R^8 is a C_{1-4} alkyl radical or R^8 taken together with the nitrogen atom forms an anilium radical which is substituted by two C_{1-4} alkyl radicals.

The "ionic activator" may abstract one or more L^1 ligands so as to ionize the Group 4 metal center into a cation but not to covalently bond with the Group 4 metal and to provide sufficient distance between the ionized Group 4 metal and the ionizing activator to permit a polymerizable olefin to enter the resulting active site.

Examples of ionic activators include the following compounds:

triethylammonium tetra(phenyl)boron,

tripropylammonium tetra(phenyl)boron,

tri(n-butyl)ammonium tetra(phenyl)boron,

20 trimethylammonium tetra(p-tolyl)boron,

trimethylammonium tetra(o-tolyl)boron,

tributylammonium tetra(pentafluorophenyl)boron,

tripropylammonium tetra (o,p-dimethylphenyl)boron,

tributylammonium tetra(m,m-dimethylphenyl)boron,

25 tributylammonium tetra(p-trifluoromethylphenyl)boron,

- tributylammonium tetra(pentafluorophenyl)boron,
tri(n-butyl)ammonium tetra (o-tolyl)boron
N,N-dimethylanilinium tetra(phenyl)boron,
N,N-diethylanilinium tetra(phenyl)boron,
5 N,N-diethylanilinium tetra(phenyl)n-butylboron,
N,N-2,4,6-pentamethylanilinium tetra(phenyl)boron
di-(isopropyl)ammonium tetra(pentafluorophenyl)boron,
dicyclohexylammonium tetra (phenyl)boron
triphenylphosphonium tetra(phenyl)boron,
10 tri(methylphenyl)phosphonium tetra(phenyl)boron,
tri(dimethylphenyl)phosphonium tetra(phenyl)boron,
tropillium tetrakis(pentafluorophenyl) borate,
triphenylmethylium tetrakis(pentafluorophenyl) borate,
benzene (diazonium) tetrakis(pentafluorophenyl) borate,
15 tropillium phenyltris-pentafluorophenyl borate,
triphenylmethylium phenyl-trispentafluorophenyl borate,
benzene (diazonium) phenyltrispentafluorophenyl borate,
tropillium tetrakis (2,3,5,6-tetrafluorophenyl) borate,
triphenylmethylium tetrakis (2,3,5,6-tetrafluorophenyl) borate,
20 benzene (diazonium) tetrakis (3,4,5-trifluorophenyl) borate,
tropillium tetrakis (3,4,5-trifluorophenyl) borate,
benzene (diazonium) tetrakis (3,4,5-trifluorophenyl) borate,
tropillium tetrakis (1,2,2-trifluoroethenyl) borate,
triphenylmethylium tetrakis (1,2,2-trifluoroethenyl) borate,
25 benzene (diazonium) tetrakis (1,2,2-trifluoroethenyl) borate,

tropillium tetrakis (2,3,4,5-tetrafluorophenyl) borate,
 triphenylmethylium tetrakis (2,3,4,5-tetrafluorophenyl) borate, and
 benzene (diazonium) tetrakis (2,3,4,5-tetrafluorophenyl) borate.

Readily commercially available ionic activators include:

- 5 N,N- dimethylaniliumtetrakis pentafluorophenyl borate; triphenylmethylium
 tetrakis pentafluorophenyl borate ("trityl borate"); and trispentafluorophenyl boron.

Part C. Monomers and Comonomers

Homopolymer polyethylene waxes are encompassed by this invention.

- However, preferred monomers are ethylene and C₃₋₂₀ alpha olefins. Illustrative non-
- 10 limiting examples of such alpha-olefins are one or more of propylene, 1-butene, 1-
 pentene, 1-hexene, 1-octene and 1-decene.

- The polyethylene waxes which may be prepared in accordance with the present invention preferably comprise not less than 60, preferably not less than 70 weight % of ethylene and the balance of one or more C₄₋₈ alpha olefins, most preferably selected
- 15 from the group consisting of 1-butene, 1-hexene, 1-octene. The polyethylene waxes
 may contain large amounts of comonomer (and, as a result, have a very low density of less than 0.900 g/cc) or be ethylene homopolymers (having a density of greater than 0.955 g/cc) or copolymer waxes with intermediate levels of comonomer having an intermediate density.

- 20 As previously noted, the waxes of this invention have a number average
 molecular weight of from 500 to 10,000 (preferred range is from 500 to 2000).
 Comonomer may also be used to reduce the melting point of the wax.

Part D. Solution Polymerization

- Solution polymerization processes for the preparation of polyethylene are well
- 25 known in the art. These processes are conducted in the presence of a hydrocarbon

solvent for the polymer, which solvent is typically a C₅₋₁₂ hydrocarbon which may be unsubstituted or substituted by C₁₋₄ alkyl group, such as pentane, hexane, heptane, octane, cyclohexane, methylcyclohexane and hydrogenated naphtha. An additional solvent is Isopar E™ (C₈₋₁₂ aliphatic solvent, Exxon Chemical Co.).

5 Solution polymerizations for polyethylene are generally conducted at temperatures from about 80°C to about 250°C. The pressure of reaction may be as high as about 15,000 psig for the older high pressure processes or may range from about 100 to 4,500 psig. However, we have determined that high polymerization temperatures (especially greater than about 190° C) are preferable for the preparation
10 of waxes.

 In a solution polymerization the liquid monomers are dissolved/ dispersed in the solvent either prior to being fed to the reactor, or for gaseous monomers the monomer may be fed to the reactor so that it will dissolve in the reaction mixture. Prior to mixing, the solvent and monomers are generally purified to remove polar moieties. The polar
15 moieties, or catalyst poisons include water, oxygen, metal impurities, etc. Preferably steps are taken before provision of such into the reaction vessel, for example by chemical treatment or careful separation techniques after or during the synthesis or preparation of the various components. The feedstock purification prior to introduction into the reaction solvent follows standard practices in the art, e.g. molecular sieves,
20 alumina beds and oxygen removal catalysts are used for the purification of ethylene, alpha-olefin, and optional diene. The solvent itself as well (e.g. hexane and toluene) is similarly treated. In some instances, out of an abundance of caution excess scavenging activators may be used in the polymerization process.

The feedstock may be heated prior to feeding to the reactor. However, in many instances it is desired to remove heat from the reactor so the feed stock may be at ambient temperature to help cool the reactor.

5 Generally, the catalyst components may be premixed in the solvent for the reaction or fed as separate streams to the reactor. In some instances premixing is desirable to provide a reaction time for the catalyst components prior to entering the reaction.

The reactor may comprise a tube or serpentine reactor used in the "high pressure" polymerizations or it may comprise one or more reactors or autoclaves. It is well known that the use in series of two such reactors each of which may be operated so as to achieve different polymer molecular weight characteristics. The residence time in the reactor system will depend on the design and the capacity of the reactor. Generally the reactors should be operated under conditions to achieve a thorough mixing of the reactants. On leaving the reactor system the solvent is removed and the resulting polymer is finished in a conventional manner.

10
15

EXAMPLES

Chemicals and Reagents

Purchased cyclohexane was dried and deoxygenated by passing it through a bed of deoxygenation catalyst (brand name R311 from BASF), an alumina bed (brand name Selexsorb™ COS/CD), and a molesieve (3A/13X) bed.

20

Purchased o-xylene was further purified by passing through the same purification beds as described for cyclohexane purification.

Ethylene was purchased from Praxair as polymer grade. The ethylene was purified and dried by passing the gas through a series of purification beds including

alumina (brand: Selexsorb COS), molesieve (type: 13X), and a deoxygenation bed (brand: Oxiclear®).

Cyclopentadienyltitanium-(tri-tert-butylphosphinimino) dichloride was synthesized according the procedure disclosed in the publication (*Organometallics*, **2003**, 22, 1937-
5 1947) and confirmed with ¹H-NMR for 98.9% of purity.

Tritylborate was purchased from Albemarle with minimum 97% of purity.

Methylaluminoxane ("MAO") was purchased from Akzo Nobel under the trade name MMAO-7, reported to contain 13.0 wt% of Al.

4-ethyl-2,6-di-tert-butyl phenol ("Phenol 1") was purchased from Aldrich with
10 99% of purity.

Purchased 1-butene was dried by passing a series of columns containing 3A, COS and 13X.

Butene cyclohexane solution was prepared by passing pure 1-butene gas into butene absorption vessel containing cyclohexane. The concentration of 1-butene was
15 determined by collecting a pressurized sample of 1-buene in cyclohexane using a sample loop. The collected sample was then analyzed by gas chromatography (GC-FID) to obtain a weight % (wt%) of butene in the cyclohexene.

Purchased 1-hexene was dried by in a similar way as 1-butene.

Purchased isopropanol was used without further purification.

20 Analytical Methods

Polymer molecular weights and molecular weight distributions were measured by gel permeation chromatography (GPC). The instrument (Waters 150-C) was used at 140°C in 1,2,4-trichlorobenzene and was calibrated using polyethylene standards.

Polymer branch frequencies were determined by Fourier Transform-Infra Red
25 (FT-IR). The instrument used was a Nicolet 750 Magna-IR™ spectrophotometer.

Butene content was determined by GC-FID. Composition was measured by split injection capillary gas chromatography with flame ionization detection. Sample injection was done with a pressurized liquid injection valve system. Component response factors were assumed to be unity. The GC-FID instrument used was HP 5890 Series 2.

5 Continuous Polymerization

Continuous polymerizations were conducted on a continuous polymerization unit (CPU). The CPU contained a 71.5 millilitre (mL) stirred reactor and was operated between 160-280 °C for the polymerization experiments. An upstream mixing reactor having a 20 mL volume was operated at 5° C lower than the polymerization reactor to a maximum 220° C. The mixing reactor was used to pre-heat the monomers and some of the solvent streams. Catalyst feeds and the rest of the solvent were added directly to the polymerization reactor as a continuous process. A total continuous flow of 27 mL/minute ("min") into the polymerization reactor was maintained. MAO and phenol 1 solutions were premixed prior to entering the reactor and the catalyst and the tritylborate were premixed before entering the reactor. The catalyst was activated in situ (in the polymerization reactor) at the reaction temperature in the presence of the monomers. Ethylene was supplied to the reactor by a calibrated thermal mass flow meter and was dissolved in the reaction solvent prior to the polymerization reactor. The comonomers were premixed with the ethylene before entering the polymerization reactor. Internal reaction temperature is monitored by a thermocouple in the polymerization medium and can be controlled at the required set point to $\pm 0.5^\circ \text{C}$. Ethylene and 1-hexene copolymer was made at 1-hexene / ethylene weight ratio of 0.75, 1 and 1.5. Ethylene and 1-butene copolymers were made at a 1-butene / ethylene weight ratio of 1. The ethylene was fed at a 2.0 g/min of ethylene to the polymerization reactor for the 1-butene runs whereas at a 4.5 g/min of ethylene for the

1-hexene runs. The CPU system operated at a pressure of 10.5 Mega Pascals (MPa). The solvent, monomer and comonomer streams were all purified by the CPU systems before entering the reactor. Q is ethylene conversion (and determined by an online gas chromatograph (GC)) and polymerization activity Kp is defined as:

$$(K_p)(HUT) = (Q \div (1-Q))(1/\text{catalyst concentration})$$

wherein Q is the fraction of ethylene monomer converted; HUT is a reciprocal space velocity (hold up time) in the polymerization reactor expressed in minutes and maintained constant throughout the experimental program; and the catalyst concentration is the concentration in the polymerization reactor expressed in mmol of transition metal (Ti) per liter. Thus, the units for Kp are $[\text{mM} \times \text{min}]^{-1}$ where mM is the millimolar concentration of the transition metal in the catalyst (which is titanium in the Examples) and min is minutes. The concentration of catalyst used in each experiment is shown in Table 1 (expressed as the micromolar concentration of Ti). MAO was added with an Al/Ti aiming point of 80/1; tritylborate was added with a B/Ti aiming point of 1.2/1; phenol 1 was added with a phenol 1/Al aiming point of 0.3/1 (where all of these ratios are expressed on a molar basis).

Downstream of the reactor the pressure was reduced from the reaction pressure to atmospheric pressure. The solid polymer was then recovered as a slurry in the condensed solvent and was dried by evaporation and vacuum oven before analysis.

In this set of experiments, polymerization temperature and ethylene conversion were used to control the polymer molecular weights.

Mn (or number average molecular weight) is reported in Table 1. "PD" (or "polydispersity", also known as "molecular weight distribution"), which is calculated by dividing weight average molecular weight ("Mw") by Mn is also reported in Table 1.

TABLE 1


run #	polymerization temperature C	Comonomer to C2 ratio	C2 in feed g/min	Ti concentration in reactor μM	Q %	Kp (1/mM*min)	comonomer content wt %	comonomer type	Mn	Pd
1	230	1	2	37.04	93.6	152.82	14.1	butene	1744	2.82
2	230	1	2	50.00	90.7	75.59	13.7	butene	1582	2.99
3	230	1	2	74.07	92.6	65.54	14.5	butene	1742	2.6
4	240	1	2	74.07	87.5	36.35	10	butene	1457	3.67
5	220	1	1.47	32.03	91.6	130.47	14.4	butene	1998	2.64
6	220	1.01	2	29.11	92.7	168.29	15.6	butene	2232	2.74
7	220	1.01	2	21.49	90.3	167.49	12.8	butene	2600	3.68
8	210	1.01	2	19.29	92.5	247.72	16	butene	3324	2.47
9	210	1.01	2	13.93	90.1	250.67	13.3	butene	3423	2.94
10	224.3	1.5	4.5	22.42	90.7	168.18	18.2	hexene	3185	3.53
11	220	0.7	4.5	14.90	90.9	258.57	9.5	hexene	5228	3.64
12	220	1	4.5	16.52	89.4	196.14	10.7	hexene	9288	2.17

C = Centigrade
C₂ = ethylene
Mn = number average molecular weight
Pd = Mw/Mn
mM = millimoles
μM = micromoles

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A process to prepare polyethylene wax having a number average molecular weight of from 500 to 2000 and a molecular weight distribution of from 2 to 4, said process comprising polymerizing ethylene and optionally, at least one C₃ to C₁₀ alpha olefin, under solution polymerization conditions in a reactor in the presence of:

a) a catalyst defined by the formula:

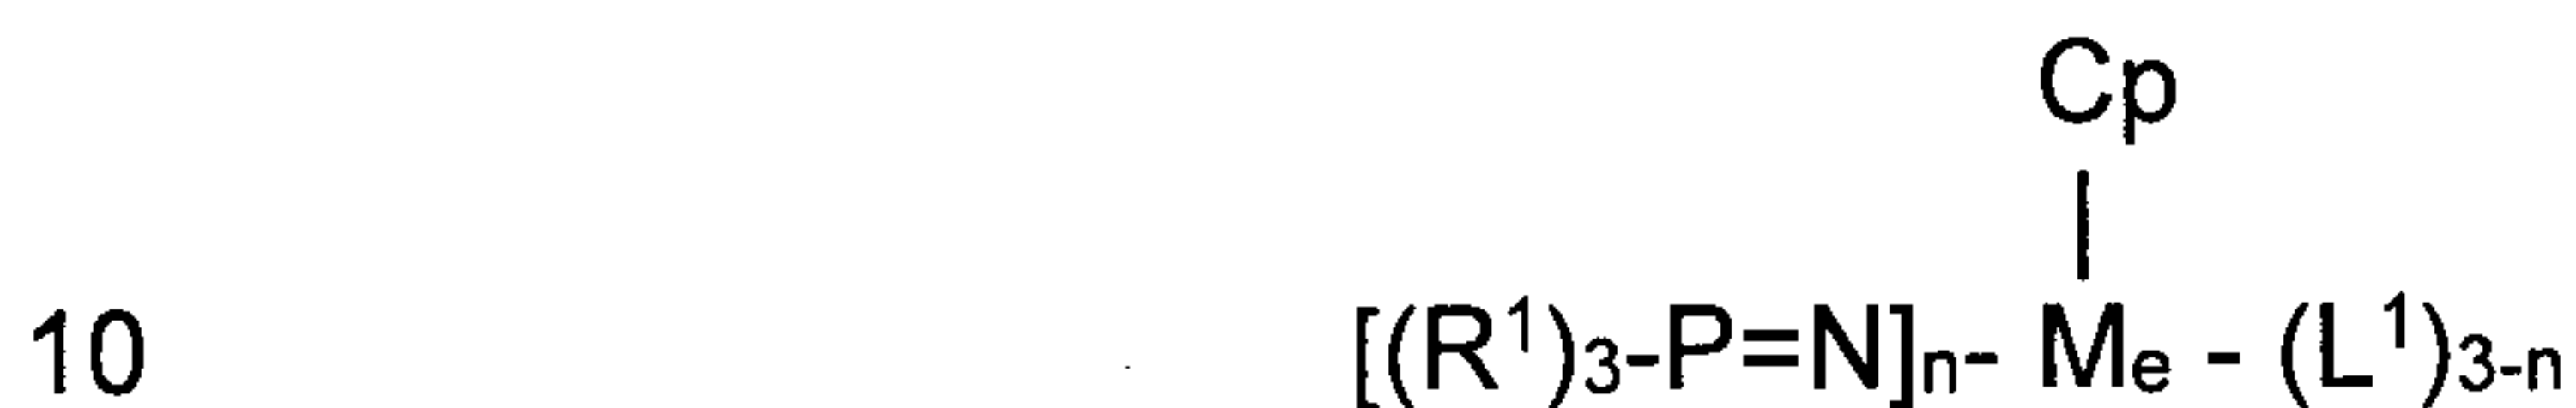

wherein M_e is selected from the group consisting of Ti, Zr, and Hf; n is 1 or 2; Cp is a monocyclopentadienyl ligand which is unsubstituted or substituted by up to five substituents independently selected from the group consisting of a C₁₋₁₀ hydrocarbyl radicals or two hydrocarbyl radicals taken together may form a ring which hydrocarbyl substituents or cyclopentadienyl radical are unsubstituted or further substituted by a halogen atom, a C₁₋₈ alkyl radical, C₁₋₈ alkoxy radical, a C₆₋₁₀ aryl or aryloxy radical; an amido radical which is unsubstituted or substituted by up to two C₁₋₈ alkyl radicals; a phosphido radical which is unsubstituted or substituted by up to two C₁₋₈ alkyl radicals; silyl radicals of the formula -Si-(R²)₃ wherein each R² is independently selected from the group consisting of hydrogen, a C₁₋₈ alkyl or alkoxy radical, C₆₋₁₀ aryl or aryloxy radicals; germanyl radicals of the formula Ge-(R²)₃ wherein R² is as defined above; each R¹ is independently selected from the group consisting of a hydrogen atom, a halogen atom, C₁₋₁₀ hydrocarbyl radicals which are unsubstituted by or further substituted by a halogen atom, a C₁₋₈ alkyl radical, C₁₋₈ alkoxy radical, a C₆₋₁₀ aryl or aryloxy radical, a silyl radical of the formula

-Si-(R²)₃ wherein each R² is independently selected from the group consisting of hydrogen, a C₁₋₈ alkyl or alkoxy radical, C₆₋₁₀ aryl or aryloxy radicals, germanyl radical of the formula Ge-(R²)₃ wherein R² is as defined above or two R¹ radicals taken together may form a bidentate C₁₋₁₀ hydrocarbyl radical, which is

5 unsubstituted by or further substituted by a halogen atom, a C₁₋₈ alkyl radical, C₁₋₈ alkoxy radical, a C₆₋₁₀ aryl or aryloxy radical, a silyl radical of the formula -Si-(R²)₃ wherein each R² is independently selected from the group consisting of hydrogen, a C₁₋₈ alkyl or alkoxy radical, C₆₋₁₀ aryl or aryloxy radicals, germanyl radicals of the formula Ge-(R²)₃ wherein R² is as defined above, provided that R¹ 10 individually or two R¹ radicals taken together may not form a Cp ligand as defined above; each L¹ is independently selected from the group consisting of a hydrogen atom, of a halogen atom, a C₁₋₁₀ hydrocarbyl radical a C₁₋₁₀ alkoxy radical, a C₅₋₁₀ aryl oxide radical, each of which said hydrocarbyl, alkoxy, and aryl oxide radicals may be unsubstituted by or further substituted by a halogen 15 atom, a C₁₋₈ alkyl radical, C₁₋₈ alkoxy radical, a C₆₋₁₀ aryl or aryl oxy radical, an amido radical which is unsubstituted or substituted by up to two C₁₋₈ alkyl radicals; a phosphido radical which is unsubstituted or substituted by up to two C₁₋₈ alkyl radicals, provided that L¹ may not be a Cp radical as defined above; and

20 b) an activator,

with the provisos that:

1) said polymerization conditions are conducted at a temperature of from 190° C to 250° C;

2) at least 85 weight % of said ethylene is converted to polyethylene wax

25 under said polymerization conditions; and

3) polymerization activity, K_p , is less than 300 but greater than 25 $[\text{mM} \times \text{minutes}]^{-1}$, where mM is the concentration, expressed in millimoles, of said transition metal M_e within said reactor.

5 2. The process of claim 1 wherein said M_e is titanium.

3. The process of claim 1 wherein said activator includes both an aluminoxane and an ionic activator.

10 4. The process of claim 1 wherein said catalyst is cyclopentadienyl titanium – (tri-tertiarybutyl phosphinimine) dichloride.

5. The process of claim 4 wherein said activator is a combination of methylaluminoxane and tritylborate.

15

6. The process of claim 5 wherein the molar ratio of aluminum contained in said methylaluminoxane to titanium contained in said catalyst is from 50:1 to 500:1.

7. The process of claim 1 which comprises polymerizing ethylene and one C_4 to C_8
20 alpha olefin.