



(12) **DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION**

(13) **A1**

(86) **Date de dépôt PCT/PCT Filing Date:** 2017/12/14
(87) **Date publication PCT/PCT Publication Date:** 2018/04/19
(85) **Entrée phase nationale/National Entry:** 2019/04/04
(86) **N° demande PCT/PCT Application No.:** CA 2017/051519
(87) **N° publication PCT/PCT Publication No.:** 2018/068155
(30) **Priorités/Priorities:** 2016/10/15 (US62/408,733);
2017/10/15 (US15/784,148)

(51) **Cl.Int./Int.Cl.** **B63H 9/06** (2006.01),
B63B 15/00 (2006.01), **B63H 9/10** (2006.01)
(71) **Demandeur/Applicant:**
JOHNSON, ALISTAIR, CA
(72) **Inventeur/Inventor:**
JOHNSON, ALISTAIR, CA
(74) **Agent:** OYEN WIGGS GREEN & MUTALA LLP

(54) **Titre : SYSTEME DE VOILES AUXILIAIRES POUR NAVIRES ET SYSTEMES DE SECURITE ASSOCIES**
(54) **Title: AUXILIARY SAIL SYSTEM FOR SHIPS AND SAFETY SYSTEMS FOR SAME**

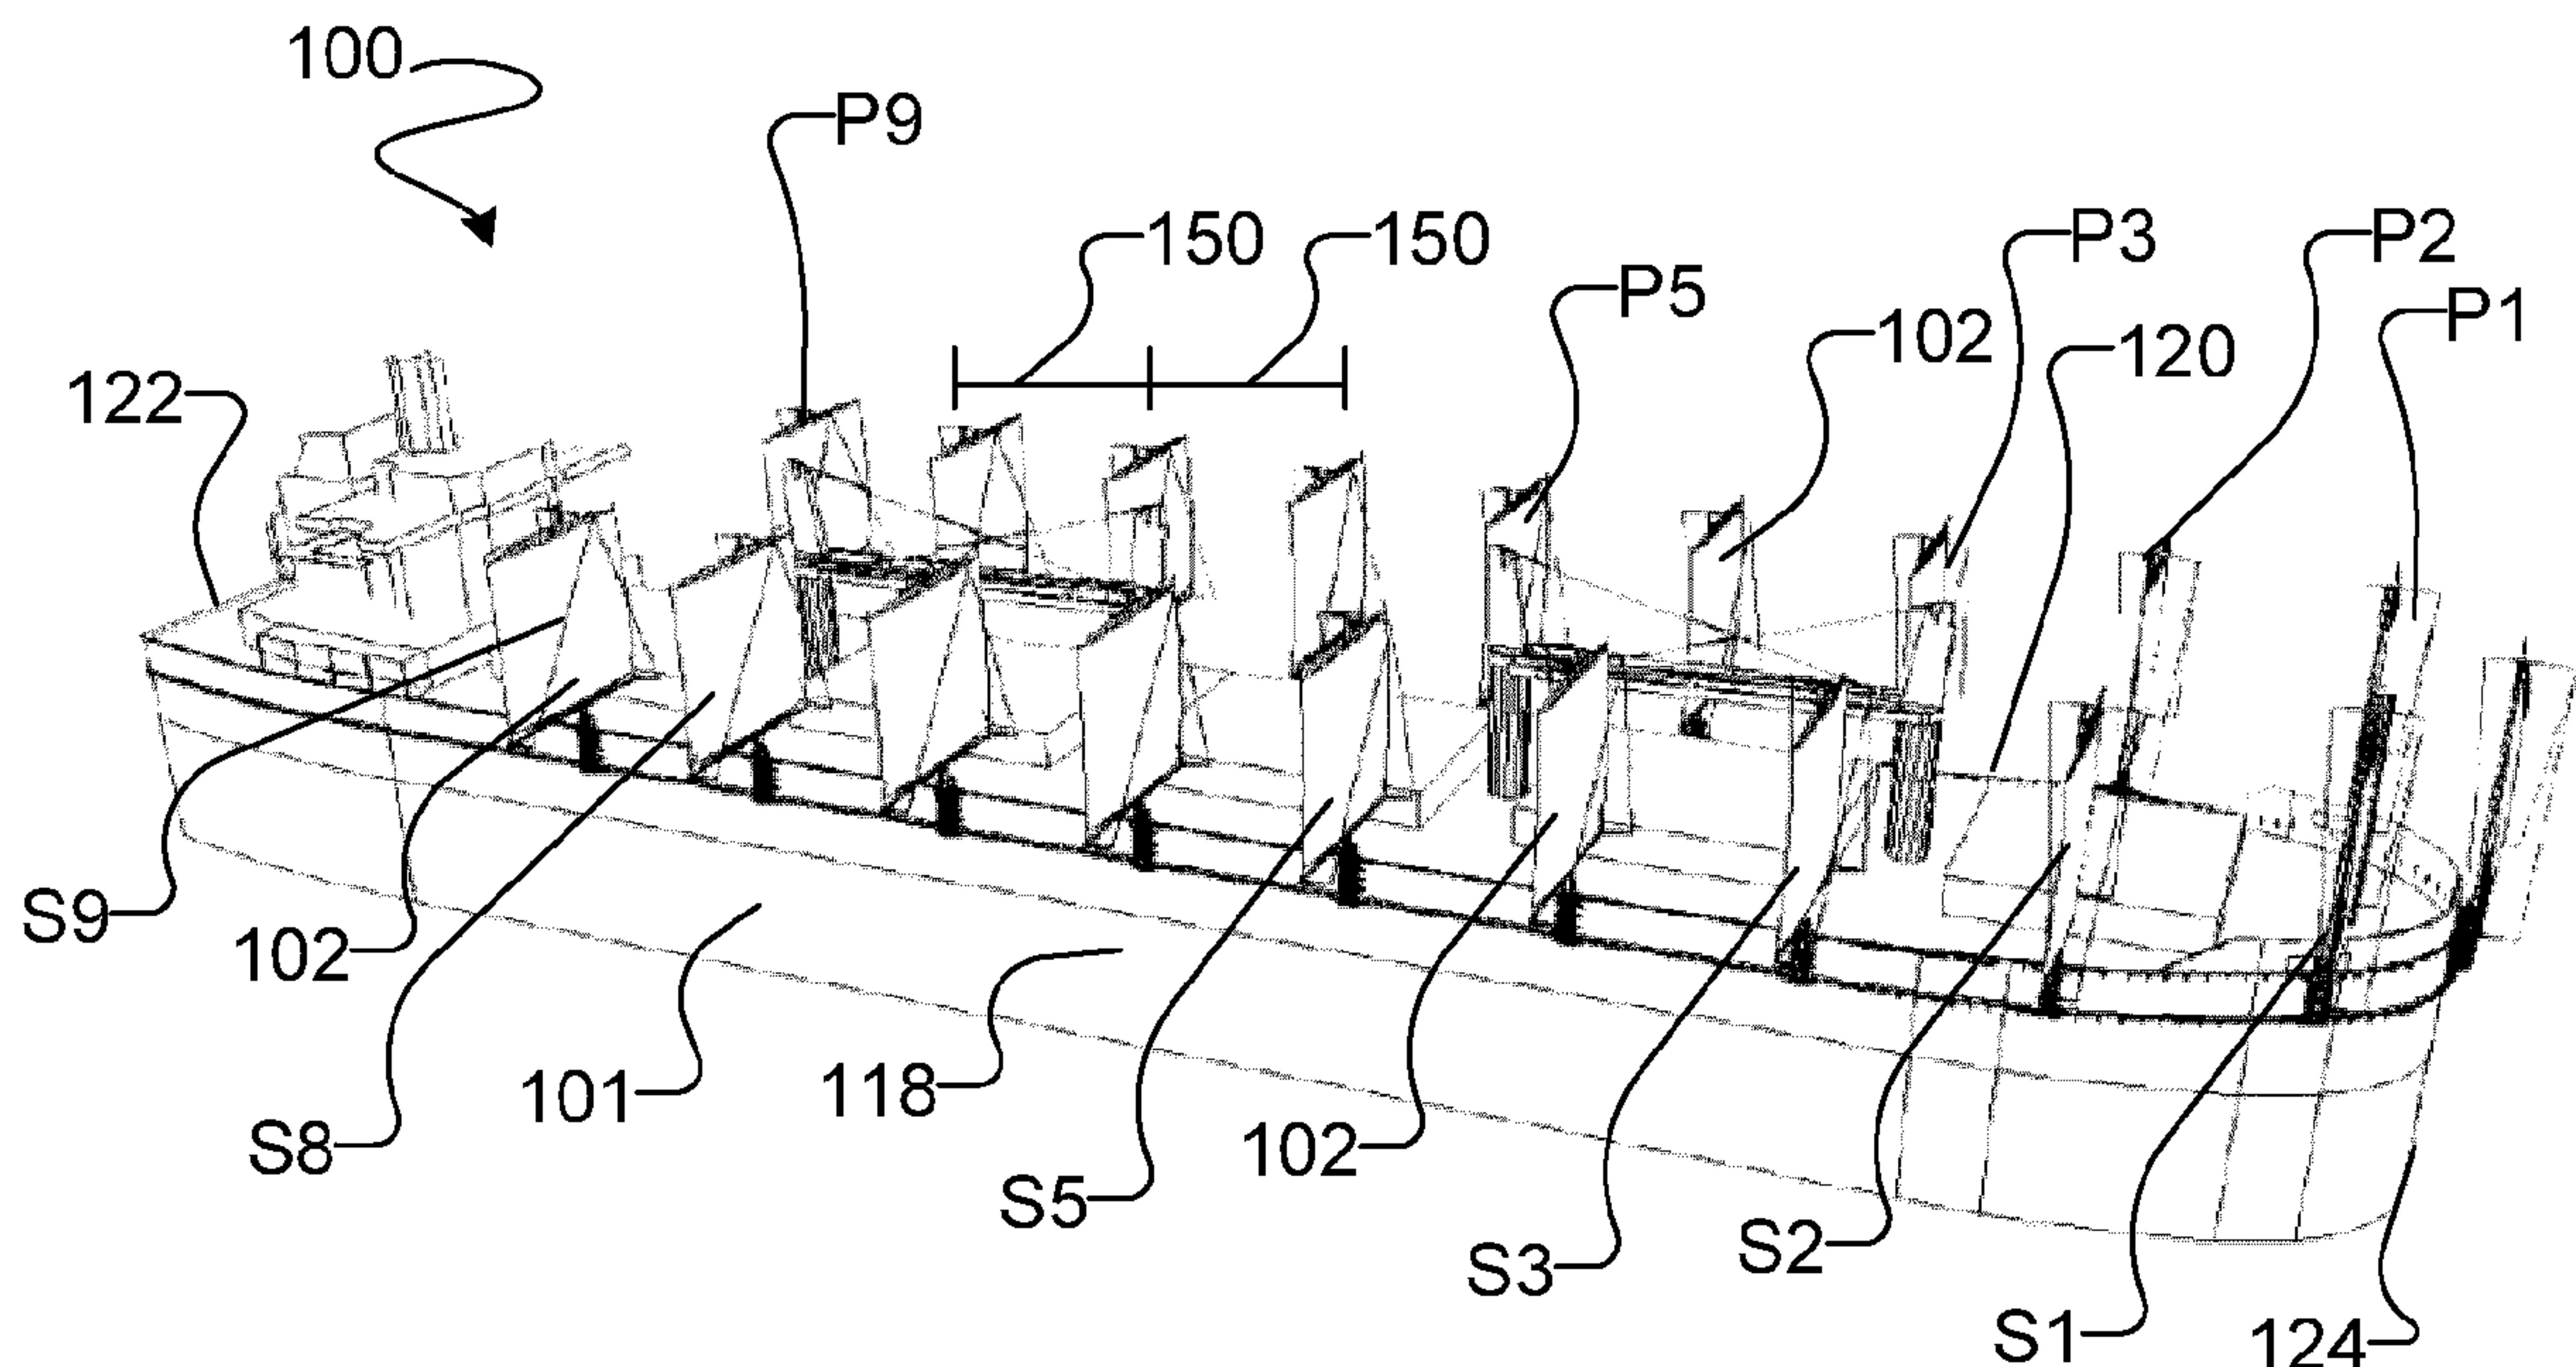


FIG. 3

(57) **Abrégé/Abstract:**

A ship-mounted auxiliary sail system featuring a plurality of sail units mountable and movable about the ship on a rail system. The sail units can have automatic reefing safety features and/or automatic mast release safety features.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
19 April 2018 (19.04.2018)



(10) International Publication Number
WO 2018/068155 A3

(51) International Patent Classification:

B63H 9/06 (2006.01) *B63H 9/10* (2006.01)
B63B 15/00 (2006.01)

(21) International Application Number:

PCT/CA2017/051519

(22) International Filing Date:

14 December 2017 (14.12.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/408,733	15 October 2016 (15.10.2016)	US
15/784,148	15 October 2017 (15.10.2017)	US

(72) Inventor; and

(71) Applicant: **JOHNSON, Alistair** [CA/CA]; 7116 150th Street, Surrey, British Columbia V3S 3J4 (CA).

(74) Agent: **MARLES, Jennifer A.** et al.; 480 - 601 West Cordova Street, Vancouver, British Columbia V6B 1G1 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,

KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

(54) Title: AUXILIARY SAIL SYSTEM FOR SHIPS AND SAFETY SYSTEMS FOR SAME

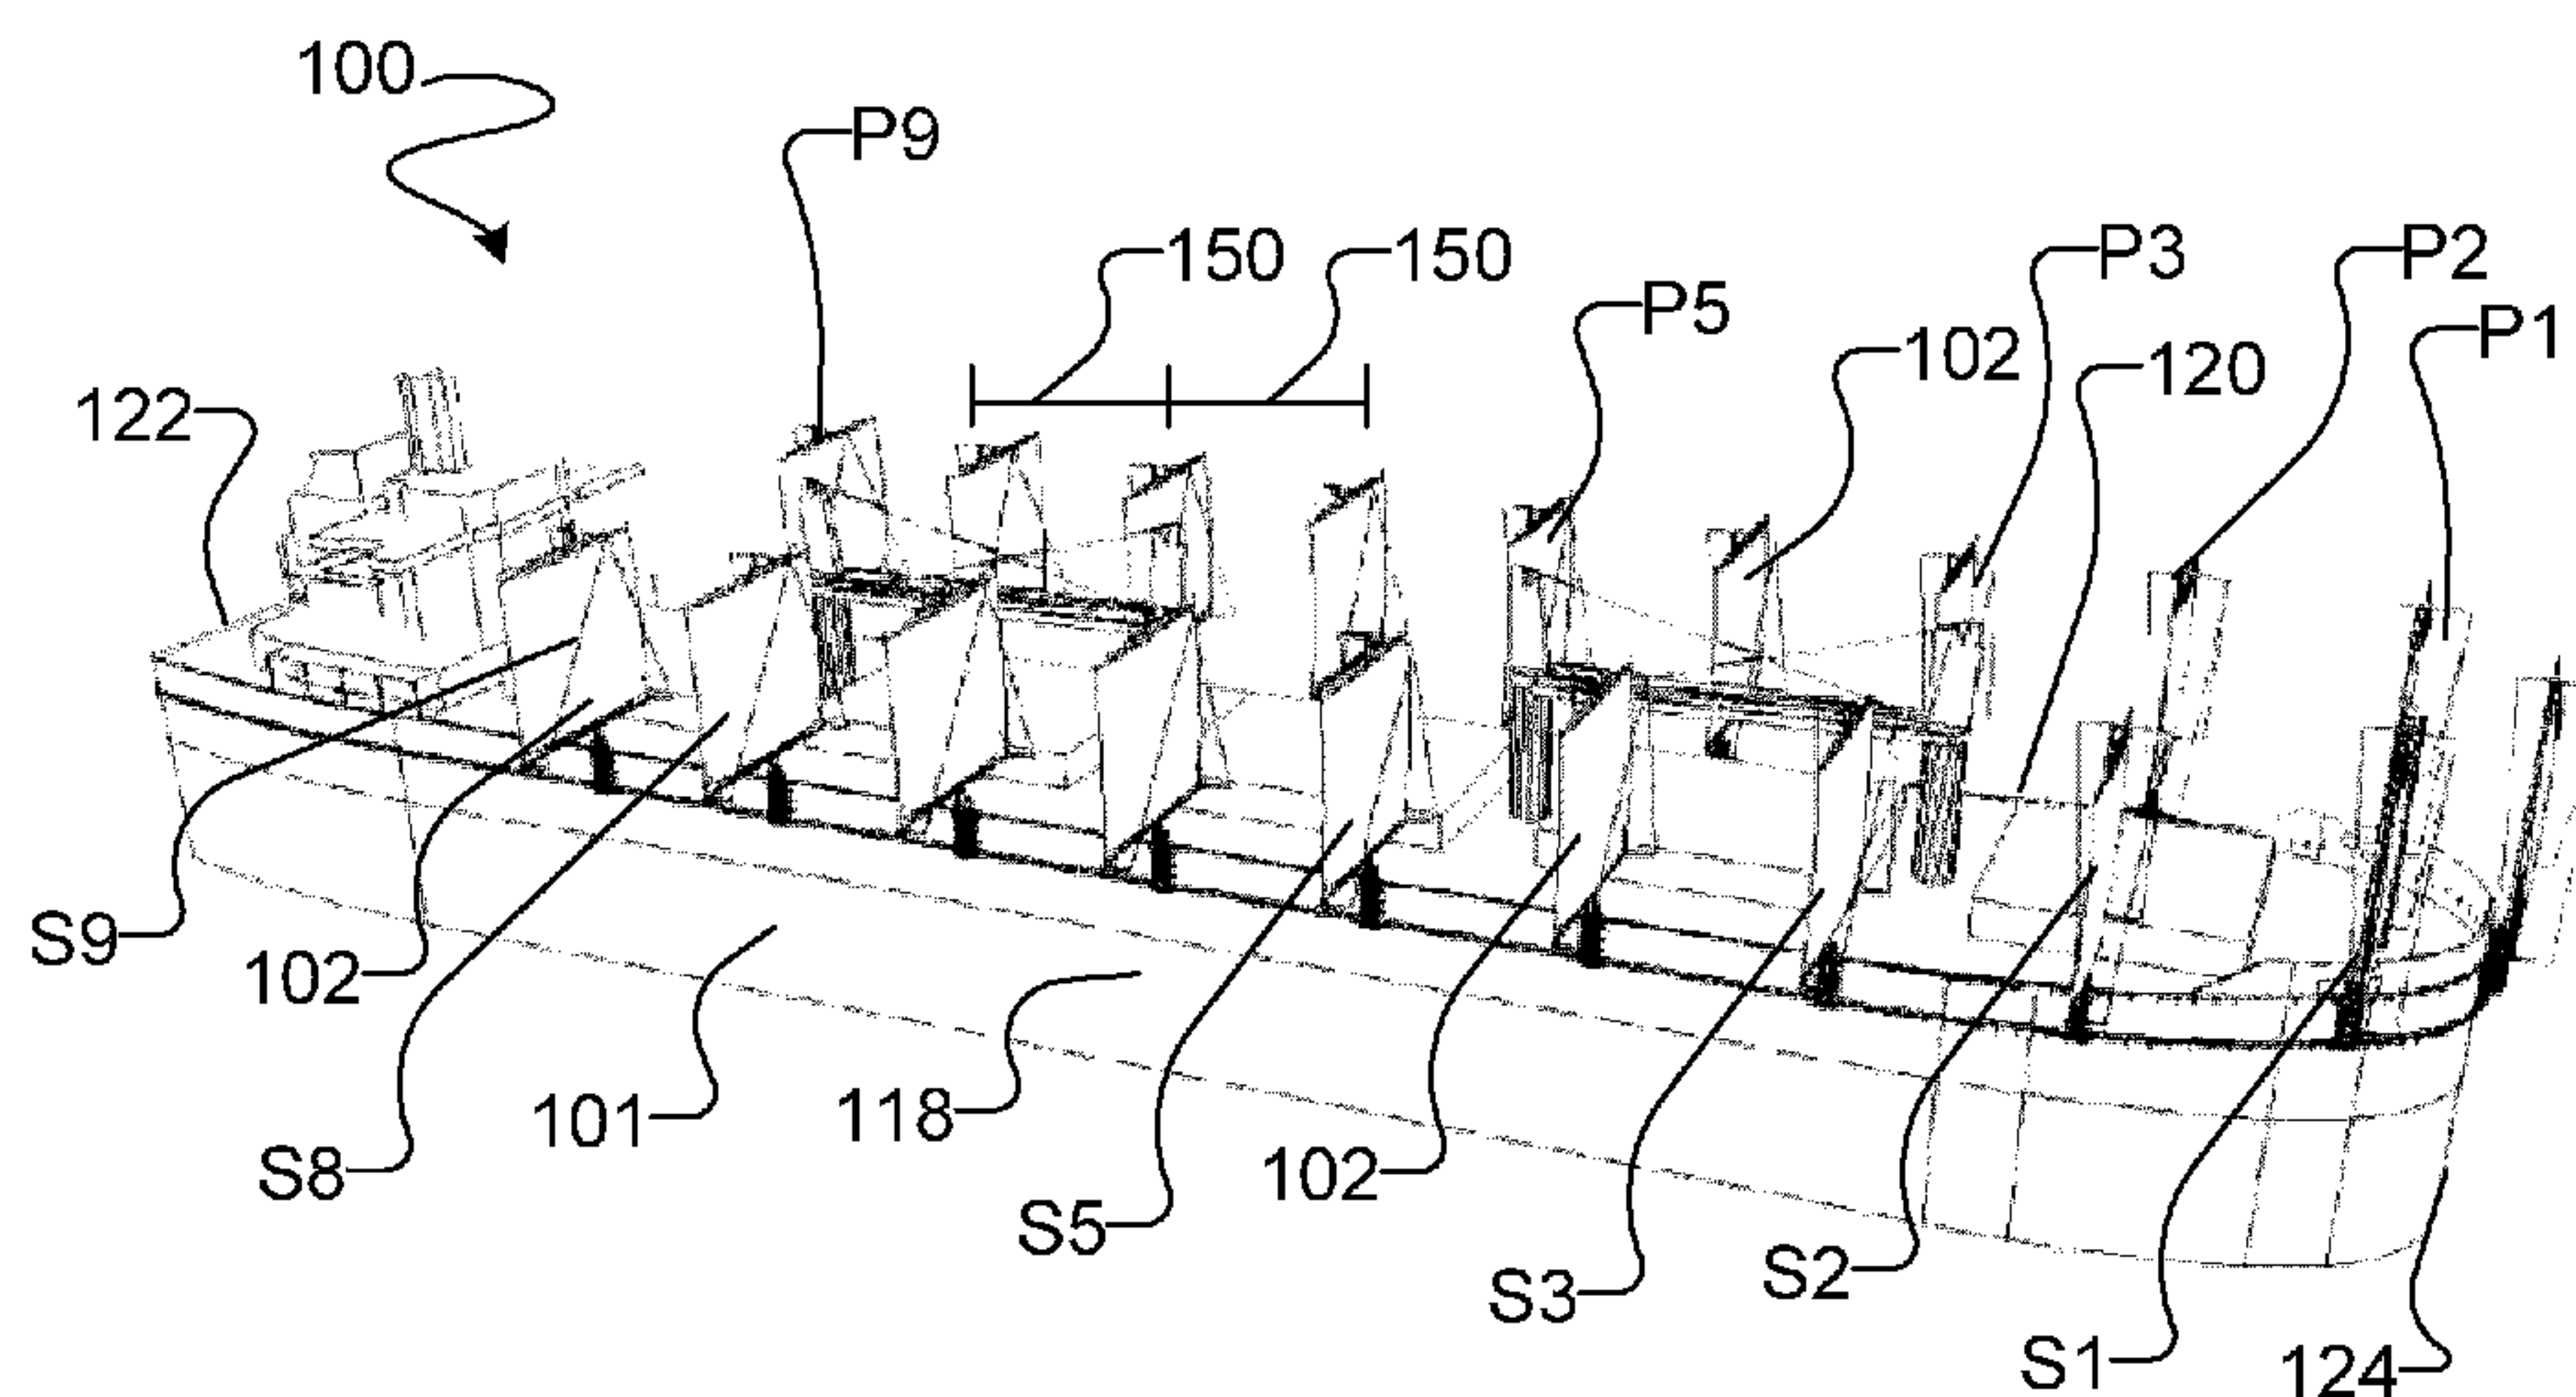


FIG. 3

(57) Abstract: A ship-mounted auxiliary sail system featuring a plurality of sail units mountable and movable about the ship on a rail system. The sail units can have automatic reefing safety features and/or automatic mast release safety features.

[Continued on next page]

WO 2018/068155 A3 **Published:**

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*
- *with information concerning request for restoration of the right of priority in respect of one or more priority claims (Rules 26bis.3 and 48.2(b)(vii))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*

(88) Date of publication of the international search report:

24 May 2018 (24.05.2018)

AUXILIARY SAIL SYSTEM FOR SHIPS AND SAFETY SYSTEMS FOR SAME

Reference to Related Applications

5 [0001] This application claims priority to and is a continuation-in-part of United States patent application No. 15/784148 filed 15 October 2017, and claims priority to and the benefit of United States provisional patent application No. 62/408733 filed 15 October 2016. Both of the foregoing applications are incorporated by reference herein in their entireties.

Technical Field

10 [0002] Some embodiments of the present invention relate to auxiliary sail systems for ships. Some embodiments of the present invention relate to auxiliary sail systems for ships that are mounted to be easily stowed or placed into an operating configuration.

[0003] Some embodiments of the present invention relate to auxiliary sail systems for ships that incorporate features allowing the sail area exposed to wind to be incrementally
15 decreased. Some embodiments of the present invention relate to auxiliary sail systems for ships that incorporate features allowing the sail area exposed to wind to be rapidly decreased.

Background

20 [0004] Sail on ships is an ancient technology. Historically at the advent of steam there were many hybrid sail/engine designs for ships built from scratch. There have only been a few attempts to reintroduce sail to conventionally powered merchant ships in recent times although the last commercial voyage of a fully sail driven ship was in 1957, to the best of the inventor's knowledge.

25 [0005] Some problems precluding practical implementation of 'sail on conventional ship' devices are the complexity of design, the expense and intrusiveness of installation, the lack of safety features to guard against sudden excessive winds, the obstruction that the device presents to the loading and unloading of cargo, and/or significant labour requirements for operating the devices. Further, known devices have not been designed with a view to

retrofitting to existing ships, meaning that they can be installed only on newly constructed vessels.

5 [0006] There is a general desire for improved auxiliary sail systems for powered ships. It may be desirable to provide such systems wherein the auxiliary sails are securely mounted such that damage is avoided or minimized under the extreme conditions found at sea (e.g. in the open ocean). It may be desirable for an auxiliary sail system to easily and quickly be removed from an operational configuration to a stowed configuration, so that the regular dockside operations of the ship while it is in port are not impeded.

10 [0007] The foregoing examples of the related art and limitations related thereto are intended to be illustrative and not exclusive. Other limitations of the related art will become apparent to those of skill in the art upon a reading of the specification and a study of the drawings.

Summary

15 [0008] The following embodiments and aspects thereof are described and illustrated in conjunction with systems, tools and methods which are meant to be exemplary and illustrative, not limiting in scope. In various embodiments, one or more of the above-described problems have been reduced or eliminated, while other embodiments are directed to other improvements.

20 [0009] One aspect of the invention provides a rail-mounted auxiliary sail system for a ship, e.g. a cargo ship. A rail system is provided that extends around at least a portion of the perimeter of the deck of the ship. A plurality of sail units mountable and movable on the rail system are provided. The rail system includes a plurality of fixed mounting points to which a respective one of the plurality of sail units can be fixed for use as an auxiliary sail to help drive the ship.

25 [0010] In one aspect, each one of the sail units has a base that can be fixed to the fixed mounting points, at least two rollers or wheels mounted to the base to allow the sail unit to move along the rail system, a mast mounted to the base, and a sail unit. In some aspects, the sail unit is a roller-blind design of sail having an upper boom, a lower boom, and a square sail that can be raised and lowered to extend between the upper and lower booms.
30 In some aspects, the sail is held in a fixed position with respect to the upper boom and the

lower boom, the lower boom being rotatable so that the sail can be wound around the circumference of the lower boom. In the lowered configuration, the sail is wound about the lower boom, and the upper boom sits just above the lower boom. A reefing cable extends from a bobbin fixedly connected to the lower boom for rotation therewith to an upper portion
5 of the mast and then to a top boom collar that is used to raise and lower the upper boom. In the lowered configuration, no or only a small portion of the reefing cable is wound about the bobbin.

[0011] In one aspect, to raise the sail, the upper boom is hoisted, for example using a hoisting cable supported from the top of the mast. The lifting of the upper boom unfurls the
10 sail from the lower boom, causing the sail to be released and correspondingly causing the reefing cable to be wound round the bobbin as the top boom collar rises on the mast. To lower the sail, the upper boom is lowered, for example by allowing the hoisting cable to lower the upper boom. A corresponding force is exerted on the reefing cable causing it to both be unwound from the bobbin and to rotate the lower boom, so that slack produced in
15 the sail as it is lowered is taken up and wound around the lower boom.

[0012] In one aspect, an automatic reefing safety feature is provided. A flex detecting cable is provided to detect flexion in the upper boom caused by a strong wind event. The flex detecting cable is connected to a damping member that absorbs the forces applied by the flex detecting cable during normal sailing operations. The damping member can be an
20 inertia drum. During a strong wind event, the damping member cannot absorb the force applied by the flex detecting cable, and this force is transferred to actuate a lever that releases a latch that ordinarily secures a top boom cable drum against rotation. When the latch is released, the top boom cable drum is permitted to rotate, and the top boom cable that is connected to raise and lower the top boom is permitted to unwind or move with the
25 rotation of the top boom cable drum to lower the top boom.

[0013] Once the force applied by the strong wind event subsides, the automatic reefing safety feature is no longer activated, and the latch is biased back to its ordinarily securing position to secure the top boom cable drum against rotation. Thus, in some aspects, the top boom cable drum is permitted to rotate once in response to a strong wind event. In
30 some aspects, the circumference of the top boom cable drum about which the top boom cable is wound is equivalent to about $1/10^{\text{th}}$ of the height of the mast, so that activation of the automatic reefing safety feature results in a reefing of the sail by $1/10^{\text{th}}$ of its height.

[0014] In one aspect, a mast rotation release safety feature is provided. The mast is mounted on a rotatable platform that is ordinarily engaged with an engagement member operable to rotate the mast to its desired position. A sensing cable is attached to the mast to detect strong wind events that cause greater than a predetermined degree of flexion of the mast. The sensing cable is configured to actuate a mechanical switch once more than the predetermined degree of flexion of the mast is detected. In one aspect, actuation of the mechanical switch releases a weight that is configured to raise the rotatable platform out of engagement with the engagement member, to thereby allow the rotatable platform to freely rotate so that a sail affixed to the mast is permitted to be placed into a configuration parallel with the prevailing wind, to thereby rapidly release the force applied to the sail and to the mast.

[0015] In one aspect, a chain tensioner is provided to regulate actuation of the mechanical switch. A spring within the chain tensioner has a spring constant selected to damp ordinary forces applied by the sensing cable during normal sailing operations. Once more than a predetermined level of force is exerted by the sensing cable, the spring allows a retaining member within the chain tensioner to be forced into a locked position, which locks an activating finger into a rigid position that moves the mechanical switch to the actuated configuration. Movement of the mechanical switch to the actuated configuration moves a pin from a secured position to a release position to release the weight and thereby lift the rotatable platform out of engagement with the engagement member to allow the rotatable platform to freely rotate.

[0016] In one aspect, activation of the mast rotation release safety device triggers an automatic full reefing of the sail. In one aspect, the sail incorporates an automatic reefing safety system as heretofore described, and actuation of the mechanical switch by the mast rotation release safety device triggers the latch that ordinarily secures the top boom cable drum against rotation to be moved to its released configuration and held there. This allows the top boom cable drum to freely rotate for as many rotations as are required to drop the top boom, and hence the sail, to its fully lowered position.

[0017] In addition to the exemplary aspects and embodiments described above, further aspects and embodiments will become apparent by reference to the drawings and by study of the following detailed descriptions.

Brief Description of the Drawings

5 [0018] Exemplary embodiments are illustrated in referenced figures of the drawings. It is intended that the embodiments and figures disclosed herein are to be considered illustrative rather than restrictive.

[0019] FIG. 1 is a top view of a ship equipped with an example embodiment of an auxiliary sail system.

[0020] FIG. 2 is a partial perspective view showing an example embodiment of a sail unit.

10 [0021] FIG. 3 is a perspective view of a ship equipped with an example embodiment of an auxiliary sail system, with the auxiliary sail system in its fully deployed configuration but with the sails raised.

[0022] FIG. 4 is a perspective view of the example embodiment of FIG. 3, with the port sail units gathered.

15 [0023] FIG. 5 is a perspective view of the example embodiment of FIG. 3, with the starboard sail units drawn fully round and the stern clear of sail units.

[0024] FIG. 6 shows an example embodiment of a ship having a discontinuous rail system, with an independently mounted auxiliary bow-mounted sail unit.

[0025] FIG. 7 shows an example embodiment of a ship having a continuous rail system that extends around the bow of the ship.

20 [0026] FIG. 8 shows an example embodiment of a spool holding three ropes for use in moving the sail units about the ship in accordance with an example embodiment.

[0027] FIG. 9A shows an example embodiment of a motorized capstan with rope spools positioned below. FIG. 9B shows an example embodiment of rollers as used to direct the rope system about the stern of the ship.

25 [0028] FIG. 10 shows an example embodiment of attaching a sail unit to a rope.

[0029] FIG. 11 shows an example embodiment of drawing a rope out of the bow of the ship.

[0030] FIGS. 12, 13, 14, 15 and 16 show schematically steps in an example method of clearing sail units from one side of the ship to allow dockside operations to be carried out using a three-rope rope system.

[0031] FIGS. 17 and 18 show schematically steps in an example method of clearing sail
5 units from one side of the ship to allow dockside operations to be carried out using a two-rope rope system.

[0032] FIG. 19 shows an example embodiment of a rope guide and horn cleat provided on the sail units in some embodiments.

[0033] FIG. 20 shows an example embodiment of a mounting point for affixing the sail units
10 in place for use.

[0034] FIG. 21 shows a perspective view of an example embodiment of a bottom rail.

[0035] FIG. 22 shows a perspective view of an example embodiment of a top rail.

[0036] FIG. 23 shows an example embodiment of the engagement of a base unit of a sail unit with the top rail.

[0037] FIG. 24 shows an example embodiment of the engagement of lugs on a base unit of
15 a sail unit with the fixed mounting points provided on the ship.

[0038] FIG. 25 shows an example configuration of the lugs on a base unit.

[0039] FIG. 26 is a side view of the base unit of a sail unit locked into place on the rail system.

[0040] FIG. 27 is a side view of the base unit of a sail in position on the rail system, with the
20 braces in a stored configuration.

[0041] FIG. 28 shows an example embodiment of a step in loading the sail units onto the rail system.

[0042] FIG. 29 shows an example embodiment of a roller-blind sail.

[0043] FIG. 30 shows an example embodiment of a rod used to secure the sail within the
25 top boom.

[0044] FIG. 31 shows an example embodiment of the pulleys and cables used to rotate the rods used to secure the sails within the booms.

[0045] FIG. 32 shows an example embodiment of a top boom support.

[0046] FIG. 33 shows example embodiments of mast strengthener cables.

[0047] FIG. 34A shows a detailed view of a lower boom in one example embodiment. FIG. 34B shows an example of a bottom boom insert rotatable within bearings that allows the sail
5 to be reefed around the lower boom.

[0048] FIGS. 35, 36 and 37 show how the top boom flexes to activate a top boom flex detecting cable in one example embodiment.

[0049] FIG. 38 shows an example embodiment of a top boom flex detecting cable.

[0050] FIG. 39 shows the mechanism that is used to incrementally reef the sails when the
10 top boom flex detecting cable is activated.

[0051] FIG. 40 shows the mechanism that is used to incrementally reef the sails in the activated configuration.

[0052] FIGS. 41 and 42 show the position of the actuating lever of the automatic reefing sail safety feature in one example embodiment, in the unactivated and activated configurations,
15 respectively.

[0053] FIGS. 43 and 44 show schematically how the automatic mast rotation release feature is triggered in some example embodiments by movement of the mast from its normal operating position (FIG. 43) to a deflected position caused by a high wind event (FIG. 44).

[0054] FIGS. 45 and 46 show an example embodiment of a mechanical switch that is
20 actuated to trigger the automatic mast rotation release safety feature in some embodiments, in the unactuated and actuated configurations, respectively.

[0055] FIGS. 47 and 48 show alternate views of the mechanical switch that is used to release a mast weight to allow the mast to freely rotate in some embodiments. FIG. 47
25 shows the switch in the unactuated configuration and FIG. 48 shows the switch just approaching the actuated configuration, prior to the mast release weight being dropped.

[0056] FIGS. 49 and 50 show the mast cog being lifted off the worm screw to allow the mast to rotate during a high wind event, and FIGS. 51 and 52 show the corresponding activation of a full automatic sail reefing feature provided in some embodiments. FIGS. 49 and 51

show the normal operating position of the mast cog, and FIGS. 50 and 52 shows the raised position of the mast cog when the automatic mast rotation release safety feature is triggered.

5 [0057] FIG. 53 shows the configuration of the mast and sail during normal operations, and FIG. 54 shows the configuration of the mast and sail after the automatic mast rotation release safety feature has been activated.

[0058] FIG. 55 shows a configuration of the sail units that is suitable to allow the ship to pass through a narrow space, such as the Panama Canal.

[0059] FIG. 56 (drawing sheet 15/19) shows the sail units in a chevron configuration.

10

Description

[0060] Throughout the following description specific details are set forth in order to provide a more thorough understanding to persons skilled in the art. However, well known elements may not have been shown or described in detail to avoid unnecessarily obscuring the disclosure. Accordingly, the description and drawings are to be regarded in an illustrative, rather than a restrictive, sense.

15 [0061] With reference to FIG. 1 in which the wind direction is illustrated by arrows and the air flow by curved lines, one example embodiment of a rail-mounted auxiliary sail system 100 is illustrated on a ship 101 with the sails 108 in their deployed configuration. Rail-mounted auxiliary sail system 100 includes a plurality of sail units 102. Sail units 102 are mounted about the perimeter of ship 101 on its hull, so that the main cargo area of the ship 101 is left generally clear, e.g. for carrying cargo and the like.

20 [0062] Rail-mounted auxiliary sail system 100 provides fuel savings for ships with which it is used. Without being bound by theory, using theoretical sail area to displacement calculations and a model recently wind tunnel tested by the inventor, fuel savings as compared with running on a ship's existing engines alone were estimated to be up to 25%. It is believed that in some embodiments this may translate into a typical savings of fuel across a shipping route on the order of 10%. In some embodiments, rail-mounted auxiliary sail system 100 is used to assist in manoeuvring and/or stopping a ship.

[0063] In some embodiments, a plurality of sail units **102** are deployed along the sides of the hull of ship **101**. In the illustrated embodiment of FIGS. 2-5, auxiliary sail system **100** is installed on a Green Dolphin 575 Handmax. In the illustrated embodiment, rail-mounted auxiliary sail system **100** has nineteen sail units **102**. Any suitable number of sail units **102** could be used in alternative embodiments, including between 1 and 25 sail units or any number or interval therebetween, e.g. 2, 4, 6, 8, 10, 12, 15, or 20 sail units **102**. In the illustrated embodiment in the operating configuration, nine sail units **102** are provided on each side of ship **101**, and one sail unit **102** is provided at the bow of ship **101**.

[0064] The size and position of sail units **102** can be determined by one skilled in the art depending on the type of ship on which the sail units **102** are installed. The distance between adjacent pairs of sail units **102** must be sufficient to allow their booms to rotate fully without interfering with one another, e.g. in embodiments in which upper and lower booms **106**, **104** have a length of approximately 15.6 m, a spacing interval of at least 16.5 m should be provided between adjacent sail units **102** to avoid interference therebetween.

[0065] In some embodiments, sail units **102** are rotated such that the array of sails formed thereby are erected in a chevron configuration, with all sails pointing inwards towards the bow as shown in FIG. 56. Such a configuration may be desirable e.g. when the wind is blowing from directly behind ship **101**, which can avoid a need for tacking. The chevron configuration also allows for the further use of additional auxiliary sails if desired, e.g. a spinnaker or other similar sail, such as the SkySail used on the MS Beluga SkySails.

[0066] In the illustrated embodiment, sail units **102** are square rigged sails **108**. In some embodiments, the square rigged sails **108** have a surface area of between 100 m² and 300 m², including any value therebetween, e.g. 120, 140, 160, 180, 200, 220, 240, 260 or 280 m². In alternative embodiments, any desired sail surface area could be used. In alternative embodiments, any desired type of sail could be used in place of square rigged sails, for example aircraft-wing style sails, Flettner rotors, conventional sails, or the like.

[0067] As best seen in FIG. 2 in which like reference numerals refer to like components of the embodiment shown in FIG. 1, each sail unit **102** has a lower boom **104**, an upper boom **106**, a square sail **108**, and a mast **110**. Mast **110** extends vertically above the deck of ship **101** to support square sails **108**, and upper and lower booms **106**, **104** extend generally horizontally so that sail **108** extends therebetween. Upper boom **106** can be raised and

lowered vertically along mast **110** to thereby raise and lower square sail **108** as explained in greater detail below.

[0068] Each sail unit **102** is supported for movement about the outer deck of ship **101** along a rail system **112**. In the illustrated embodiment, rail system **112** has a top rail **114** that runs
 5 along at least a portion of the outer deck of ship **101**, and a bottom rail **116** that extends parallel to and at a lower elevation than top rail **114**. A plurality of fixed mounting points **200** are provided about rail system **112** so that sail units **102** can be secured in position for use at any desired mounting point **200**.

[0069] As best seen in FIGS. 3-5, sail units **102** can be slid along rail system **112** to move
 10 about the outer circumference of the ship's deck. In the illustrated embodiment of FIG. 7, rail system **112** runs in a continuous manner about the starboard side **118**, port side **120**, stern **122** and bow **124** of ship **101**. In alternative embodiments, rail system **112** can be discontinuous, for example, extending only along the starboard side **118** and port side **120**, extending only partially along starboard side **118** and partially along port side **120**,
 15 extending in two separate sections along starboard side **118** and two separate sections along port side **120**, extending in addition to any of the foregoing variations independently along stern **122**, extending continuously around stern **122** and only a portion of starboard side **118** and only a portion of port side **120**, and so on. Generally, rail system **112** will extend along at least a portion of port side **120**, a portion of starboard side **118**, and fully
 20 around stern **122**, to allow sail units **102** to be fully removed from either side of ship **101**.

[0070] FIG. 6 shows an example embodiment in which rail system **112** is discontinuous. Rail system **112** extends around the port side, stern, and starboard side of ship **101** in the embodiment of FIG. 6, but does not extend continuously around the bow **124** of ship **101**. In this embodiment, an auxiliary bow-mounted sail unit **103** is provided. Auxiliary bow-mounted sail unit **103** is not mounted to rail system **112**, but is independently mounted at a
 25 specific point on the hull of ship **101** at bow **124** using a pocket-mounting system, i.e. a fixed mounting at a specific point on the hull of ship **101**, independent of rail system **112**. Auxiliary bow-mounted sail unit **103** cannot be moved along rail system **112**, but must be separately installed and uninstalled as desired.

[0071] As can be seen from FIGS. 4 and 5, the sail units **102** can be moved along rail
 30 system **112** to be selectively cleared out of the way, for example for stowage when sail units

102 are not required, or to clear the sides of ship **101** so that dockside operations (e.g. loading and unloading of cargo) can be undertaken. FIG. 5 illustrates a configuration in which the sail units **102** have been cleared from both the starboard side **118** and stern **122** of ship **101**, so that dockside operations can be carried out on the starboard side **118** of ship **101** in port. In some embodiments, ship **101** is lashed to shore with ropes running across the stern **122**.

[0072] In the illustrated embodiment, sail units **102** are moved along rail system **112** using a rope system **126**. In one example embodiment illustrated in FIG. 8, rope system **126** has three ropes, first rope **128**, second rope **130**, and third rope **132**, wherein the first and second ropes **128**, **130** can be lashed together as described below. The first, second and third ropes **128**, **130** and **132** are initially provided wound round spools **138** provided near the bow **124** of ship **101**, as shown in FIG. 8.

[0073] In one example embodiment, first, second and third ropes **128**, **130** and **132** have looped ends **128A**, **130A** and **132A** provided at each of their free ends, as best seen in FIG. 9A.

[0074] Rope system **126** is moved to move sail units **102** about the deck of ship **101** using a capstan **134** that is rotated by a motor **136** (FIG. 9A). In the illustrated embodiment, capstan **134** is mounted at the bow **124** of ship **101** and first, second and third ropes **128**, **130**, **132** are stored below capstan **134** on spools **138**. In alternative embodiments, capstan **134** can be mounted in any desired location and first, second and third ropes **128**, **130**, **132** can be stored in any suitable location.

[0075] Rope system **126** is operated to move sail units **102** about rail system **112**. In one example embodiment, sail units **102** are moved along rail system **112** so that they will not interfere with dockside operations. Sail units **102** can be moved at any suitable time to prepare for dockside operations, e.g. during the ship's run into port, or in the port itself.

[0076] To move sail units **102** about rail system **112**, first rope **128** (which may be indicated by being of a particular colour to assist operators in correct use of rope system **126**, e.g. black in one example embodiment so that first rope **128** is also referred to herein as black rope **128**), is wound around capstan **134** and run around a portion of the perimeter of ship **101**. Appropriate structural elements such as rollers **140**, **141** are used at appropriate

locations (e.g. about the stern of ship **101**) to ensure that black rope **128** has a smooth path of travel about ship **101**, e.g. as shown in FIG. 9B.

[0077] The first looped end **128A** of black rope **128** is lashed to the first looped end **130A** of second rope **130** (which may also be indicated by being of a particular colour to assist operators in the correct use of rope system **126**, e.g. white in one example embodiment so that second rope **130** is also referred to herein as white rope **130**) to form a continuous cable, e.g. as shown in FIG. 9A. In one example embodiment, a hook and loop fastener **133** is used to lash the free looped ends of the ropes together.

[0078] Sail units **102** are lashed to the black and white ropes **128**, **130** using cinched straps that can be looped over horn cleats **148** provided at suitable locations on sail units **102**, e.g. as shown in FIG. 10. As shown inset in FIG. 10, a simple webbing loop **142** can be cinched onto a rope (e.g. rope **128**, **130** or **132**) of rope system **126** by passing the webbing loop **142** about the rope and feeding a first end of webbing loop **142** through its opposite end. Webbing loop **142** can then be cinched tightly around the rope to provide a securing end **144**, and the opposite free end **146** of webbing loop **142** can be secured around a horn cleat **148** provided at a suitable location on sail unit **102**.

[0079] To adjust the position of sail units **102** on rail system **112**, for example to provide for dockside clearance, in some embodiments, a third rope **132** (which may also be indicated by being of a particular colour to assist operators in the correct use of rope system **126**, e.g. yellow in one example embodiment so that third rope **132** is also referred to herein as yellow rope **132**) is used. Sail units **102** can be coupled to yellow rope **132** to allow for their movement using simple webbing loop **142** in the same manner as described above to secure yellow rope **132** to the horn cleat **148** of the relevant sail unit **102**. Yellow rope **132** can then be used to gather sail units **102** on a first side of ship **101** closer together, allowing the sail units **102** on the second, dockside, side of ship **101** to be drawn around ship **101** and out of the way of desired dockside activities, as described in greater detail below for one example method of operation.

[0080] In one example embodiment of 19 sail units installed on a GD 575 ship, it is anticipated that the entire operation to clear the sail units from the dockside (referred to as a “curtain operation”) will not take more than 30 minutes for two crew members to complete.

[0081] In one example embodiment, a method of loading a plurality of sail units **102** onto a ship **101** is provided. The two bow doors **139** of the ship are opened as shown in FIG. 11 and crew members go to the capstan **134** and rope spools **138** on the bow platform of ship **101**. Black rope **128** is drawn off spool **138** and is passed over the bow of ship **101** and/or through the bow door **139** (in this example embodiment, the port bow door) in any suitable manner, for example using boat hooks to grasp the first looped end **128A** of black rope **128** as it is fed through the bow door. Black rope **128** is drawn round the side of the ship, in the space between the hand rail of the ship and a top rail of the sail units **102** in this example embodiment, with appropriate rollers **140** and/or side rollers **141** positioned at any locations where guidance or redirection of the rope is necessary or desirable.

[0082] At the stern **122** of ship **101**, as shown in FIG. 9B, black rope **128** is laid round the stern rollers **140**, including over side rollers **141** that support black rope **128** in the vertical direction. In this exemplary embodiment, black rope **128** is drawn around the port side **120** and up the starboard side **118** to the “S9” position, i.e. the position which will be occupied by the ninth sail unit **102**, as counted starting with the first sail unit **102** on the starboard side **118** at bow **124**.

[0083] White rope **130** is drawn around the opposite side of ship **101** to meet black rope **128**, e.g. out the starboard bow door **139**, in a similar manner. In this example embodiment, white rope **130** is drawn down the starboard side **118** to the “S9” position to meet black rope **128**. Both ropes **128**, **130** are held slack on horn cleats provided on the assembly that supports capstan **134**, or at any suitable location on the bow **124** of the ship until the crew can secure black rope **128** about capstan **134**, and secure the looped ends **128A**, **130A** of black rope **128** and white rope **130** by lashing them together in any suitable manner.

[0084] The first looped ends **128A**, **130A** of black rope **128** and white rope **130** are lashed together at their meeting point, e.g. at the “S9” position in this example embodiment, in any suitable manner. In this example embodiment, the two ropes are lashed together using a hook-and-loop (e.g. VelcroTM) strap **133**. The slack in black rope **128** is taken up and wound round capstan **134**, and the second looped end **128A** of black rope **128** is coupled to the second looped end **130A** of white rope **130** at the bow of the ship in any suitable manner, e.g. using a hook-and-loop strap **133** in this example embodiment. Thus, black rope **128** and white rope **130** form one continuous rope when their free looped ends **128A**, **130A** are lashed together in this manner.

[0085] Sail units **102** are spaced apart from each other along the sides of ship **101** by any suitable spacing distance **150** (FIGS. 3 and 4). The spacing distance **150** between each pair of adjacent sail unit **102** can be but need not be the same or approximately the same distance between each pair of adjacent sail units **102** along each side of ship **101**. In this exemplary embodiment, the spacing of sail units **102** along each of starboard side **118** and port side **120** is approximately 16.5 m. In some embodiments, black and white ropes **128**, **130** are marked with distance indicators, for example a double ring marker around the rope at the appropriate location, to assist in the proper positioning of sail units **102** along ropes **128**, **130**.

[0086] In this example embodiment, a first double ring marker is provided at the spacing distance **150** along white rope **130**, i.e. at 16.5 m in this example embodiment. The combined black/white rope **128**, **130** is drawn back on capstan **134** until the first double ring marker is drawn adjacent the point at which the sail units **102** are to be loaded on the rail system **112**. In this example embodiment, the sail units are to be loaded at the S3 position (i.e. the third sail position from bow **124** along starboard side **118**).

[0087] The sail unit **102** that will be located at the P1 position (i.e. the first position at the bow **124** of ship **101** on the port side **120**) is loaded first at the S3 position, and is lashed to white rope **130** at the first double ring marker using a simple webbing loop **142** that is cinched over white rope **130** at its securing end **144** and secured to the P1 sail unit **102** by securing the free end **146** of webbing loop **142** about the horn cleat **148** provided on the P1 sail unit **102**.

[0088] The length of simple webbing loop **142** is selected to be sufficient to provide sufficient play (i.e. freedom of movement) of sail unit **102** so that it can be moved along rail system **112** and into the desired position about ship **101**. For example, it is anticipated that in many embodiments, webbing loop **142** will need to provide sufficient play to allow each sail unit **102** to be moved around the corners at the stern **122** of ship **101**.

[0089] With the P1 sail unit **102** secured to white rope **130** at the first double ring marker, the P1 sail unit **102** is drawn along rail system **112** on starboard side **118** towards stern **122** by the desired spacing distance **150** relative to the next adjacent sail unit **102**, which will be the P2 sail unit **102** in this example embodiment. In this example embodiment, spacing distance **150** between the P1 and P2 sail units **102** is 16.5 m, and so the next double ring

marker along white rope **130** is provided at a spacing distance **150** of 16.5 m from the first double ring marker. The P1 sail unit **102** is thus drawn along starboard side **118** by a distance of 16.5 m, so that the P2 sail unit **102** can be secured to white rope **130** at the desired spacing distance **150** from the P1 sail unit **102**.

- 5 **[0090]** This process is repeated until all of the port side sail units (P1 through P9 in this example embodiment) are coupled to white rope **130** at the desired spacing distance **150** from one another on the starboard side.

[0091] The port side sail units are then drawn around the stern **122** of the ship **101** with their sails in a movement configuration (i.e. with upper and lower booms **106**, **104** oriented
10 generally parallel to the side of ship **101**) until the first sail unit reaches the P1 position using rope system **126** actuated by capstan **134**. Each one of the sail units **102** P1 through P9 are then lowered into position and secured in place on their respective mounting points **200** as described below. In the illustrated embodiment, each one of sail units **102** P1 through P9 are released from white rope **130** by removing the free end **146** of webbing loop **142**
15 from horncleat **148** and removing the securing end **144** of webbing loop **142** from white rope **130**.

[0092] At this stage, and in this example embodiment, the lower and upper booms **104**, **106** of the port side sail units **102** can be turned through 90° so that square sails **108** will be oriented perpendicular to the port side **120** of ship **101**, which is the initial configuration in
20 which sail units **102** would be deployed for use.

[0093] After the port side sail units **102** have been released (P1 through P9 in this example embodiment), the continuous rope **128/130** is drawn around ship **101** using capstan **134** until the a double ring marker on white rope **130** is again adjacent the loading position for sail units **102**, i.e. at the S3 position in this example embodiment.

25 **[0094]** The first starboard sail unit **102** that will occupy the S1 position (i.e. the position on the starboard side **118** closest to bow **124**) is then loaded at the loading position (i.e. the S3 position in this example embodiment) and lashed to white rope **130** at the first double ring marker. Because the S1 sail unit **102** does not need to navigate the corners at the stern **122** of ship **101**, in some embodiments a shorter simple webbing loop **142** can be used for
30 loading the starboard side sail units than was used for loading the port side sail units, which did have to navigate the stern **122** of ship **101**.

[0095] Once the S1 sail unit **102** has been lashed to white rope **130**, capstan **134** is actuated to draw the S1 sail unit towards bow **124** by the predetermined spacing distance **150** (i.e. 16.5 m in this example embodiment). Once the second double ring marker reaches the loading position (i.e. the S3 position in this example embodiment), the sail unit **102** that will occupy the S2 position is loaded and lashed to white rope **130** at the second double ring marker, and both the S1 and S2 sail units **102** are drawn towards bow **124** in the movement configuration until the S1 sail unit reaches the S1 position. Both the S1 and S2 sail units **102** are then lowered onto rails **112**, and are deployed and locked into position on their respective mounting points **200** as described below, and the S1 and S2 sail units are unlashed from white rope **130** by removing webbing loops **142**.

[0096] At this stage, and in this example embodiment, the lower and upper booms **104**, **106** of the S1 and S2 sail units **102** can be turned through 90° so that square sails **108** will be oriented perpendicular to the starboards side **118** of ship **101**, which is the initial configuration in which sail units **102** would be deployed for use.

[0097] Capstan **134** is then actuated to return the first double ring marker to the loading position (i.e. the S3 position in this example embodiment). Each of the remaining S9 through S3 sail units **102** is then loaded and lashed to white rope **130** at the appropriate spacing distance **150** and drawn towards the stern **122** of ship **101** in the movement configuration until all of the S3 through S9 sail units are in position. The S3 through S9 sail units **102** are then lowered, locked and released and their upper and lower booms **104**, **106** can be turned through 90° so that square sails **108** will be oriented perpendicular to the starboards side **118** of ship **101**, which is the initial configuration in which sail units **102** would be deployed for use.

[0098] In embodiments in which an auxiliary bow-mounted sail unit **103** is used, auxiliary bow-mounted sail unit **103** is mounted at the bow at any desired time during the loading sequence of sail units **102**, e.g. before, after or during the loading of sail units **102** onto rail system **112**. In one example embodiment, the auxiliary bow-mounted sail unit **103** is mounted on a bow cradle provided at the bow **124** of ship **121** after the first sail unit **102** (e.g. the P1 sail unit **102** in this described example embodiment) has been mounted on rail system **112** and cinched to white rope **130**.

[0099] An example embodiment of a method for clearing some or all of the sail units **102**, for example in preparation for engaging in dockside operations such as loading or unloading ship **101**, is now described. This example embodiment is described with reference to clearing sail units **102** from the starboard side **118** of ship **101**, but with appropriate
5 modifications could be used to clear sail units **102** from the port side **120**.

[0100] As a first step, the upper and lower booms **106**, **104** of the starboard side sail units are rotated from their deployed configuration, i.e. an orientation in which the upper and lower booms **106**, **104** extend generally perpendicularly to the side of the ship **101**, as shown in FIG. 3, to a movement configuration, i.e. are turned so that they extend in parallel
10 to the starboard side **118** of ship **101**, e.g. as shown for the starboard-side sail units **102** in FIG. 4.

[0101] In some embodiments, yellow rope **132** is provided with double ring markers **152** (shown schematically in FIGS. 12 and 13) at predetermined stowage spacing intervals **154** (FIG. 4), which are 6 m intervals in the illustrated embodiment. Yellow rope **132** can be
15 provided with any desired number of double ring markers **152**, for example to indicate the final storage position of the last port-side sail unit **102** (i.e. the P9 sail unit in the illustrated example embodiment), and the final storage position of the first starboard-side sail unit to be pulled around the stern **122** of ship **101** (i.e. the S9 sail unit in the illustrated embodiment). In some embodiments, yellow rope **132** is not provided with any double ring
20 markers. The exact stowage spacing interval **154** used is not critical, but it should be a distance that is sufficient to avoid having components of adjacent sail units **102** collide with one another when in the stored configuration.

[0102] The yellow rope **132** is removed from its spool **138** and is extended over the port side of the ship with its slack end looped over a horn cleat provided at a suitable location, e.g. on the assembly containing capstan **134**. Yellow rope **132** is then drawn down the port
25 side **120** of ship **101** to its starting position, which in this example embodiment is with its third from last double ring marker **152** positioned adjacent the P9 sail unit **102**. In this configuration, the final double ring marker **152** on yellow rope **132** is available for the S8 sail unit **102**, and the second to last double ring marker **152** on yellow rope **132** is available for
30 the S9 sail unit **102** when the starboard sail units **102** are drawn round to their deck-cleared configuration.

[0103] Once yellow rope **132** is secured in its desired starting position, the slack in yellow rope **132** is taken up and yellow rope **132** is wound round capstan **134**. The P9 sail unit **102** is lashed to the yellow rope **132** at the third from last double ring marker **152** using a webbing loop **142** as described previously for white rope **130**. The P9 sail unit **102** is drawn
 5 along the rail system **112** until the next stowage spacing interval **154** (i.e. 6 m in this example embodiment) double ring marker **152** on yellow rope **132** is adjacent the P8 sail unit **102**. The P8 sail unit **102** is then lashed to yellow rope **132** using a webbing loop **142**, and both the P8 and P9 sail units **102** are drawn along rail system **112** until the next stowage spacing interval **154** (i.e. 6m in this example embodiment) double ring marker **152**
 10 on yellow rope **132** is adjacent the P7 sail unit **102**.

[0104] This process is repeated until all of the port-side sail units P9 through P2 have been gathered with the desired stowage spacing interval **154** (in this illustrated embodiment, 6 m) between them. The P1 port side sail unit **102** remains at the P1 position and braced, with the final double ring marker **152** (in this case indicating the 6 m stowage spacing interval
 15 **154**) aligned with the horn cleat **148** of the P1 sail unit **102**.

[0105] The free looped end **132A** of yellow rope **132** is looped over a permanent horn cleat provided along the ship's handrail, and the opposite end of yellow rope **132** is released from capstan **134** and tied off the horn cleat **148** of the P1 sail unit **102**, with slack spooled on the deck of the ship. The continuous rope formed from interconnected black rope **128** and
 20 white rope **130** is deployed about the perimeter of ship **101** as described previously, and the rope is passed through a rope guide **156** provided on the horn cleat **148** of the P1 sail unit **102**, as shown in FIGS. 10 and 19.

[0106] White rope **130** (forming part of the continuous black and white rope **128**, **130**) is aligned so that its double ring markers **152** are positioned adjacent each starboard sail unit
 25 **102**. The starboard sail units **102** are each lashed to white rope **130** using webbing loop **142** as described previously. Because the starboard sail units must pass around stern **122** of ship **101**, the webbing loops **142** used to lash each starboard sail unit to white rope **130** should be sufficiently long to provide sufficient play to allow the sail units **102** to pass round the corners of stern **122**.

[0107] Once the starboard sail units **102** are lashed to white rope **130**, capstan **134** is used
 30 to pull the continuous black and white rope **128**, **130** to move the starboard sail units around

the stern **122** of ship **101** with their sails in the movement configuration until the sail unit **102** from the S9 position is close to the sail unit **102** from the port side P9 position(e.g. within about 10 m in one example embodiment), as shown in FIG. 5.

[0108] The upper and lower booms **106**, **104** on the S9 sail unit **102** are rotated through 90° so that they are in their storage configuration, i.e. so that they extend generally perpendicular to the side of ship **101**, as shown for the port-side sail units **102** in FIG. 5. The starboard sail units are then drawn towards the bow **124** on the port side **120** until the S9 unit is adjacent a double ring marker **152** on yellow rope **132** at a stowage spacing interval **154** (e.g. 6 m in this example embodiment) from the P9 unit. The S9 sail unit **102** is then lashed to yellow rope **132** at the location of double ring marker **152**. A short webbing loop **142** may be used to lash the S9 sail unit **102** to yellow rope **132**. The S9 sail unit **102** is then unlashd from white rope **130** and the process is repeated by turning the upper and lower booms **106**, **104** on the S8 sail unit **102** by 90° to the storage configuration and advancing the S8 sail unit **102** forward to the next double ring marker **152** (spaced apart from the S9 sail unit by a stowage spacing interval **154**, e.g. 6 m in this example embodiment) on yellow rope **132**, lashing the S8 sail unit **102** to yellow rope **132** and unlashd the S8 sail unit **102** from the white rope **130**, and so on for the remaining sail units **102** until a sufficient number are clear of the desired working area for dockside operations, e.g. the starboard side **118** and stern **122** as shown in the illustrated embodiment of FIG. 5.

[0109] To move the sail units **102** back to their deployed configuration for use, the reverse process is followed.

[0110] The process of using rope system **126** to move sail units **102** about ship **101** is illustrated schematically in FIGS. 12-16 with a hypothetical ship having four port-side sail units **102**, labelled P1, P2, P3 and P4, and four starboard-side sail units **102** labelled S1, S2, S3 and S4 and using a rope system **126** having three separate ropes. As shown in FIG. 12, the yellow rope **132** is extended along the port side of ship **101**, and the P4 sail unit is lashed thereto at one of the double ring markers **152** indicating the stowage spacing interval. The P4 sail unit is then drawn forward with its sail in the storage configuration until it is spaced apart from the P3 sail unit by the stowage spacing interval. The P3 sail unit is then lashed to yellow rope **132** at the double ring marker **152** adjacent that to which the P4

sail unit is secured, and the pair are drawn towards the bow **124** until the P3 sail unit is spaced apart from the P2 sail unit by the stowage spacing interval, as shown in FIG. 13.

[0111] This process is repeated until all of the port-side sail units have been drawn forward and secured in place on yellow rope **132**, spaced apart by the stowage spacing interval, which can be but need not be the same distance between each pair of adjacent sail units **102**. The sternmost end of yellow rope **132** is secured in any suitable manner, e.g. on a horn cleat on the rail of ship **101**, while the opposite (i.e. bow) end of yellow rope **132** is then removed from capstan **134** and secured in place to secure the port-side sail units in place, while black and white ropes **128**, **130** are deployed about the perimeter of the ship and lashed together to make a continuous rope as described above.

[0112] The starboard-side sail units in the S1, S2, S3 and S4 positions are all lashed to white rope **130** at the double ring markers **152** indicating the spacing distance, with the sails **108** in their movement configuration (i.e. oriented parallel to the sides of ship **101**), as shown schematically in FIG. 14. Capstan **134** is actuated to move the starboard-side sail units along the edge of ship **101**, around its stern **122**. The S4 sail unit is turned to the storage configuration (i.e. with upper and lower booms **104**, **106** extending perpendicularly to the side of ship **101**), and moved to the stowage distance from the P4 sail unit, as shown in FIG. 15.

[0113] The S4 sail unit can then be lashed to yellow rope **132** if desired, and the S3 sail unit moved to a stowage distance from the S4 sail unit in a similar manner if desired, as shown in FIG. 16. This process is repeated until a sufficient number of the starboard-side sail units have been placed into the storage position so that the starboard side **118** and, if necessary, the stern **122** of ship **101** are clear for dockside operations to be carried out

[0114] In alternative embodiments, an alternative rope system having only two ropes **128** and **130** can be used to move sail units **102** about the perimeter of ship **101**. For example, as illustrated schematically in FIGS. 17-18 with a hypothetical ship having four port-side sail units **102** and four starboard-side sail units **102**, a two-rope system comprising a black rope **128** and a white rope **130** lashed together as described above can be used to move sail units **102** about the perimeter of ship **101**. Rather than using a third rope to which each sail unit **102** is lashed to secure the sail units **102** in place, each sail unit **102** can be moved to its storage position by actuating the combined black and white rope **128**, **130** using capstan

134, and then secured at its storage position by lashing the sail unit **102** to the ship's deck or railing, for example using an appropriately positioned cleat.

[0115] As shown in FIG. 17, each of the port-side sail units and starboard-side sail units is initially in its deployed configuration. The combined black and white rope **128, 130** is run
 5 around the ship **101** as described above. The P1 sail unit is lashed to the ship's rail or other suitable securing structure and placed in the storage configuration (i.e. with upper and lower booms **106, 104** oriented perpendicular to the side of ship **101**), while the P2 through P4 and S1 through S4 sail units are lashed to the combined black and white rope **128, 130** and their sails moved to the movement configuration (i.e. extending parallel to the side of the
 10 ship **101**).

[0116] Capstan **134** is then actuated to move the sail units around the side of the ship **101**, and each successive sail unit is moved to the storage configuration (i.e. with upper and lower booms **106, 104** extending perpendicular to the side of ship **101**) and secured in position along the rail of ship **101** until the starboard side of ship **101** has been cleared of
 15 sail units, as shown in FIG. 18.

[0117] Any suitable rail system along which sail units **102** can be moved can be used in various embodiments. With reference to FIGS. 20-27, an example embodiment of a rail system **112** with mounting points **200** for fixing sail units **102** in place for use is illustrated.

[0118] Sail units **102** each provide a sail **108** and mast **110** mounted on a base unit **204**.
 20 Base unit **204** includes all controls and motors required for its operation in some embodiments. Sail units **102** are mounted in an array on rail system **112** at suitable locations about ship **101**. In some embodiments, base unit **204** has a housing **205** for containing mast **110** that is generally cylindrical.

[0119] In the illustrated embodiment, rail system **112** has a top rail **114** and a bottom rail
 25 **116**. As shown in FIG. 21, bottom rail **116** is mounted on the side of the ship directly to the side of the hull, and has a groove **206** within which wheels **208** provided on an inside face of the housing of base unit **204** of each sail unit **102** are received and movable within groove **206**.

[0120] As shown in FIG. 22, in the illustrated embodiment, top rail **114** has three different
 30 rails. The first is an external top rail **212**, and the second is an inner profile rail **214**, which is a rail that allows a single lifting action to lift base units **204** free of the fixing pegs and lugs

used to secure base units **204** to mounting points **200** as described below by encouraging an upward and outward movement of base units **204** that both releases the lugs used to secure base units **204** in place and angles the base units **204** slightly to allow them to move smoothly along rail system **112**. The external top rail **212** together with an inner profile rail **214** also acts as a channel **216** for a single roller ball **210** provided on base unit **204**, as shown in FIG. 23, which together with suitable wheels provided at the bottom of base unit **204** for movement in groove **206** allows each base unit **204** to be rolled around the ship on rail system **112**. Top rail **114** also has a face rail **218**, which provides a flat surface to avoid interference with movement of sail units **102** about rail system **112**. During movement of sail units **102**, the units are angled slightly outwardly away from face rail **218**, so that base unit **204** can slide smoothly past.

[0121] The base portion of top rail **114** is provided with a plurality of apertures **220** to allow water to run off of the ship's deck. The top and side faces formed by external top rail **212** and face rail **218** are generally flat surfaces save for the presence of occasional slots which receive the locating/fixing and locking pegs on each base unit **204** as described below. In some embodiments, the internal portion of top rail **114** includes an interior space **202**, which can receive e.g. power and data cables used to operate rail-mounted auxiliary sail system **100**.

[0122] Mounting points **200** are provided at each point along the perimeter of ship **101** at which it is desired to deploy sail units **102**. With reference to FIG. 20, an example embodiment of a mounting point **200** is illustrated. Mounting point **200** has two or more horizontal rails **222** that are run across and are secured to a plurality of the ship's ribs or framing members to lock mounting point **200** to the ship's hull. In the illustrated embodiment, at least two vertically extending rails **224** are mounted on horizontal rails **222**, although alternative configurations could be used. Each vertically extending rail **224** is provided with a plurality of keyhole slots **226** formed therethrough, which receive and secure corresponding lugs **228** provided on the inside face of the housing of base unit **204** as shown in FIG. 24 to lock base unit **224** onto the ship's hull. The configuration of lugs **228** in the illustrated embodiment is also shown in FIG. 25, wherein a series of six lugs **228** is provided, with three lugs **228** being provided along vertically extending support struts of base unit **204**. Alternative mounting configurations could be used in alternative embodiments.

[0123] As can be seen in FIGS. 26 and 27, one or more braces **230** is provided at the top and/or bottom of each base unit **204**. Braces **230** are provided with fixed and locking pegs which can be engaged with corresponding slots formed in top rail **114** and bottom rail **116** to further secure base unit **204** in place and stabilise base unit **204** laterally when braces **230** are in their secured configuration.

[0124] As shown in FIG. 27, braces **230** are initially set in their stored configuration, i.e. retracted away from rail system **112**, and can be released and engaged with top rail **114** and bottom rail **116** via corresponding slots **240** provided within top and bottom rails **116** at corresponding locations to receive and secure braces **230**. In one example embodiment, top brace **230** is locked in place using a locking peg with a horncleat handle, while bottom rail can be locked in place by using a latch to engage bottom rail **116**. If desired, the latch can be released, e.g. using a latch releasing cable, and then secured in place to give the final assembly without slamming the latch.

[0125] Sail units **102** can be loaded onto rail system **112** in any suitable manner and at any suitable location. In one example embodiment, with reference to FIG. 28, sail units **102** are loaded at the S3 position, i.e. the position third from the bow **124** on starboard side **118**. Two spacers **232**, fore and aft, are secured on top rail **114**. Spacers **232** have flexible flag markers **234**, which may be different colours (e.g. blue for aft and yellow for fore in this example embodiment), in order to visually assist a crane operator to mount sail units **102** on rail system **112**.

[0126] Sail unit **102** is brought to spacers **232** and the top plate **236** on the base unit **204** engages guides on the spacers **232**. The crane then lowers sail unit **102**, pivoting it until top plate **236** is flush with the spacer recess and setting the unit at a slight angle to the vertical (1.3° in the illustrated embodiment, although the exact angle is not critical and will be a consequence of the positioning of top rail **114** and bottom rail **116** in any given embodiment). Roller ball **210** is brought into contact with top rail **114** to engage top rail **114** as described above.

[0127] The loading operator can then open the fore and aft scissor jacks **238** provided on sail unit **102** somewhat, e.g. halfway in the illustrated embodiment, to lower the bottom wheels **208** into grooves **206** in bottom rail **116**.

[0128] With roller ball **210** on the channel **216** in top rail **114** and bottom wheels **208** in groove **206** on bottom rail **116**, sail unit **102** is self-supporting and the crane is released. Scissor jacks **238** can be opened to full with the wheels **208** and roller ball **210** supporting the unit. The aft spacer **232** is removed. With the unit in the high position, sail unit **102** can be rolled along rail system **114** out of the way and/or to the required position about ship **101**, e.g. using rope system **126** as described above. With sail unit **102** out of the way, aft spacer **232** can be put back into position and the next sail unit **102** loaded by crane.

[0129] As shown in FIG. 29, sail units **102** in the illustrated embodiment are a roller blind design of sail, which are configured to reef from full up to full down in increments of 1/10 of a sail drop. Sails **108** are supported on a mast **110** that can rotate about its longitudinal axis and be fixed in position at any point along its path of rotation. In some embodiments, mast **110** can rotate and be fixed in position through 360° about its longitudinal axis.

[0130] In the illustrated embodiment, lower and upper booms **104**, **106** (and therefore sails **108**) are offset horizontally along mast **110**, i.e. mast **110** is not at a horizontal centrepoint of lower and upper booms **106**, but rather is at approximately a 2/5:3/5 offset, i.e. positioned at approximately 2/5 of the width of booms **104**, **106** as measured from a first edge, with the shorter portion of lower and upper booms **104**, **106** being oriented inwardly towards the centre of ship **101** when sail units **102** are in use.

[0131] In the illustrated embodiment, sails **108** are roller blinds, with the sails **108** trapped within the upper and lower booms **106**, **104** by rods **300** and **315**, as shown in FIGS. 30 and 34A, respectively. Rods **300** are fixed within upper boom **106** to hold the sail fixed within upper boom **106**. Rods **315** likewise hold sail **108** in a fixed relation within lower boom **104**.

[0132] Lower boom **104** is rotatable about its longitudinal axis, so that the cloth from which sail **108** is made can be wound around lower boom **104** as sail **108** is reefed or lowered. Correspondingly, as upper boom **106** is raised, lower boom **104** is rotated as sail **108** unfurls and is raised.

[0133] In the illustrated embodiment, to facilitate rotation of lower boom **104**, a bottom boom insert **314** is provided (FIG. 34B). Bottom boom insert **314** is mounted in fixed relation to lower boom **104** and sits therewithin, so that lower boom **104** and bottom boom insert **314** rotate as a unit. Bottom boom insert **314** is rotatably mounted on a plurality of support bearings in the bottom boom assembly (not shown) to allow lower boom **104** and bottom

boom insert **314** to rotate. Bottom boom insert **314** is provided with a bobbin **318** at one end, which in the illustrated embodiment is integrally formed with bottom boom insert **314**.

[0134] To wind sail **108** about lower boom **104** as sail **108** is lowered and unwind sail **108** as sail **108** is raised, rods **300** and bottom boom insert **314** are coupled together via a set of pulleys **301** and reefing cables **303** as shown schematically in FIG. 31 and in FIG. 34A.

Reefing cables **303** extend from bobbins **318** up to the upper portion of mast **110**, and are coupled at their free end to top boom collar **310**. When upper boom **106** is at its fully lowered position, reefing cables **303** are fully extended from bobbin **318**, up to the upper portion of mast **110**, and down to upper boom **106**, so that bobbin **318** has little or no portion of reefing cable **303** wound therearound.

[0135] As upper boom **106** is actuated upwardly by top boom collar **310** being raised, force is exerted on sail **108**, causing lower boom **104** to rotate to allow sail **108** to be released and hoisted. Correspondingly, slack is introduced into reefing cable **303** by the upward movement of top boom collar **310**, which is wound around bobbin **318** as bobbin **318** rotates. In the illustrated embodiment, bobbin **318** has a tapered surface **320**, i.e. a taper from a radially inward point to a radially outward point.

[0136] When upper boom **106** is lowered, top boom collar **310** is lowered, e.g. by releasing hoisting cable **428** as described below. The lowering of top boom collar **310** pulls on reefing cable **303** at the point where reefing cable **303** reaches bobbin **318**, thereby rotating bottom boom insert **314** and thus lower boom **404** as reefing cable **303** becomes unwound. Sail **108** is held fixed in position on lower boom **104** to rod **315**, so that the unwinding of reefing cable **303** thus winds sail **108** back around lower boom **104**. As the amount of sail **108** that is wound around lower boom **104** increases, the combined thickness of lower boom **104** and sail **108** will increase. In some embodiments, providing tapered surface **320** ensures that the apparent thickness of reefing cable **303** wound around bobbin **318** remains similar to the combined thickness of lower boom **104** and sail **108** throughout the raising and lower process, so that lower boom **104** and bottom boom insert **314** can rotate uniformly and smoothly together.

[0137] Each mast is capped by a mast head **302** with various fixing points and pulleys. The mast head **302** secures the various support cables that secure the mast against the rest of the structure of sail unit **102**, and that secure and actuate lower and upper booms **104**, **106**,

and sail **108**. The mast head **302** also allows the control cables to extend towards the deck of the ship.

[0138] In the illustrated embodiment, mast head **302** holds the mast strengthener arm **304** and the forward spur arm **306** integrally formed as a single-shaped beam, as shown in FIGS. 32 and 33. Upper boom **106** is held in position on mast **110** in any suitable manner, e.g. in part via top boom support cables and in part by a top boom collar **310** that is both engaged with mast **110** to allow vertical motion relative thereto and secured to upper boom **106**. In some embodiments, top boom collar **310** is counterweighted to balance the horizontal offset of upper boom **106** relative to mast **110**, to facilitate ease of movement when hoisting or lowering sail **108**. Upper boom **106** can be actuated up and down mast **110** in any suitable manner, e.g. through the action of appropriate cables and pulleys, to hoist or lower sail **108** as described in greater detail below.

[0139] Lower boom **104** is likewise held in position on mast **110** in any suitable manner, e.g. via bottom boom support cables **312**. Lower boom **104** is secured against movement in the lateral direction in any suitable manner via aft and forward bottom boom support cables, such as aft boom support cables **312**. Two sets of bottom boom support cables, forward and aft, are used in the illustrated embodiment to hold lower boom **104** in position so it does not flip over. In some embodiments, a bottom boom spur is provided that extends perpendicularly to lower boom **104** to extend bottom boom support cables forwards and away from sail **108** to prevent sail **108** from contacting or rubbing against the bottom boom support cables.

[0140] Operational parameters such as the reefing and the angle of mast **110** can be controlled in any suitable manner. In some embodiments, the reefing and the angle of mast **110** are controlled using cables, cogs and worm screws. The cables, cogs and worm screws can be controlled centrally electronically (e.g. centrally from the bridge of ship **101**), by an operator at a control unit of mast **110** electronically, and/or by an operator at a control unit of mast **110** in a manual fashion.

[0141] In one embodiment, automatic mechanical safety devices for conducting automated reefing of sail **108** are provided. In one embodiment, automatic mechanical safety devices for conducting automated mast release of mast **110** are provided. In some embodiments,

these automatic mechanical safety devices can prevent or limit damage to ship **101**, mast **110** or sail **108** through excessive wind and/or sudden gusts of wind.

[0142] In one embodiment, the automatic mechanical safety device provides an auto-reefing function for sails **108** and is referred to generally as automatic reefing sail safety feature **400**. The auto-reefing function is triggered by a top boom flex detecting cable **402**, shown schematically in FIG. 38. As shown in FIG. 35 and schematically in FIG. 36, during normal operating conditions, top boom **106** extends generally horizontally. However, during a strong wind event, i.e. a wind event that exerts greater than a predetermined safe operating force on sail **108** and mast **110**, top boom **106** flexes due to the increased forces, as shown schematically in an exaggerated fashion in FIG. 37.

[0143] The position of top boom flex detecting cable **402** is illustrated schematically in FIG. 38 in two positions: a first position **404** reflective of normal wind conditions, shown in dashed lines, and a second position **406** shown in solid lines, in which high wind conditions have caused upper boom **106** to flex forward against the mast, which in turn exerts a force on each end of the flex detecting cable **402** and therefore an upward force at the point where the two sides meet and on the portion of flex detecting cable **402** that descends to the control panel to actuate variable lever **408** as described below.

[0144] Top boom flex detecting cable **402** acts via appropriately positioned pulleys, cogs and lever on a variable lever **408** (FIG. 39) to release a drum latch **410**, which releases upper boom **106** to reef sail **108** down by one rotation of a top boom cable drum **422** around which the top boom hoisting cable **428** is run. In some embodiments, top boom cable drum **422** has a circumference that is approximately equal to $1/10^{\text{th}}$ the height of sail **108**, to yield in some embodiments a $1/10^{\text{th}}$ drop of sail **108**, i.e. a 10% reduction in the surface area of sail **108** exposed to wind, when top boom flex detecting cable **402** is triggered.

[0145] With reference to FIGS. 39 and 40, to activate automatic reefing sail safety feature **400**, top boom flex detecting cable **402** is run to an inertia drum **414** provided within a control panel of each sail unit **102** (the housing within which inertia drum **414** is supported is omitted from FIG. 39 for clarity). Top boom flex detecting cable **402** is connected at one end to rotate inertia drum **414**. Inertia drum **414** has a rotating actuator cog **416**, the teeth of which are engaged with corresponding teeth provided on a rotating lever cog **418** that is coupled to rotate variable lever **408** via an actuating lever **409**.

[0146] Under normal operating conditions experienced when raising or lowering sail **108**, inertia drum **414** acts as a damping member and is able to absorb typical forces applied by top boom flex detecting cable **402**, i.e. inertia drum **414** does not rotate particularly rapidly, and the turning of the teeth of rotating actuator cog **416** correspondingly turns only a few
5 teeth on rotating lever cog **418**. Actuating lever **409** and variable lever **408** are thus rotated only by small amounts that are insufficient to release drum latch **410**, which is ordinarily biased inwardly against an outer circumference of top boom cable drum **422** as described below.

[0147] However, upon the occurrence of a strong wind event, e.g. a strong gust of wind or a
10 sustained wind above a certain speed, inertia drum **414** is not able to absorb the rotating forces applied by flex detecting cable **402**, with the result that rotating actuator cog **416** rotates rotating lever cog **418** to a sufficient extent to lift actuating lever **409** to a sufficient extent to allow variable lever **408** to actuate drum latch **410**, e.g. as shown in FIG. 42 in the activated position versus FIG. 41 showing the unactivated position. Actuation of drum latch
15 **410** releases top boom cable drum **422** for rotation.

[0148] In the illustrated embodiment, an actuating cable **413** is movable by the lifting of actuating lever **409** to the activated position, and actuating cable **413** is positioned to exert an upward force on first end **408A** of variable lever **408**. This causes variable lever **408** to pivot about a pivot point **415**, so that second end **408B** of variable lever **408** is displaced
20 downwardly, to exert a downward force on drum latch **410** via a second actuating cable **417**.

[0149] Actuation of drum latch **410** releases the top boom cable drum **422** for rotation because drum latch **410** is ordinarily inwardly biased to remain engaged with a securing recess **424** provided along the outer circumference **426** of a portion of top boom cable drum
25 **422**. Drum latch **410** can be inwardly biased to remain engaged with securing recess **424** in any suitable manner, for example via a spring biasing drum latch **410** inwardly in a manner similar to a door latch.

[0150] When actuated by variable lever **408**, drum latch **410** is pulled outwardly out of securing recess **424** (best seen in FIG. 40). This allows the outer circumference **426** of top
30 boom cable drum **422** to slide past drum latch **420**, thereby allowing top boom cable drum **422** to be rotated under the force applied by the dropping upper boom **106** via hoisting

cable **428**, which extends from top boom cable drum **422** to top boom collar **310** to raise and lower top boom **106**. The unactivated and activated positions of actuating lever **409** are illustrated in FIGS. 41 and 42, respectively.

[0151] In some embodiments, hoisting cable **428** is run as a closed loop running around the top boom cable drum **422** and up to the top of upper boom **106** at one end, and up to the bottom of upper boom **106** at the opposite end.

[0152] Once the pressure applied by top boom flex detecting cable **402** has subsided, inertia drum **414** again is able to damp small forces and variable lever **408** does not actuate drum latch **410**. Drum latch **410** thus returns to its inwardly biased securing configuration, and is biased radially inwardly along the outer circumference **426** of top boom cable drum **422**. Thus, once top boom cable drum **422** completes one rotation, drum latch **410** becomes aligned again with securing recess **424** and extends inwardly inside securing recess **424**, to again secure top boom cable drum **422** in place and prevent top boom **106** from dropping further, unless a significant wind event again actuates variable lever **408**.

[0153] As noted, rotation of top boom cable drum **422** as described above releases hoisting cable **428** to allow top boom **106** to move downwardly. In some embodiments, the circumference of top boom cable drum **422** about which hoisting cable **428** is wound corresponds to approximately $1/10^{\text{th}}$ the vertical height of mast **110**. Thus, activation of variable lever **408** and corresponding rotation of top boom cable drum **422** by one rotation will result in a $1/10^{\text{th}}$ drop in height of top boom **106**, or approximately a 10% decrease in the surface area of sail **108** exposed to the wind.

[0154] In some embodiments, the process of reefing sail **108** using automatic sail safety reefing feature **400** may be repeated one, two, three or more times until an appropriate degree of reefing of sail **108** has been reached.

[0155] As best seen in FIG. 39, variable lever **408** is adjustable by providing a plurality of different connection points **411** for the cables **413**, **417** that actuate drum latch **410**. By adjusting the distance between the connection point **411** to which the cables **413**, **417** that actuate drum latch **410** are fixed and the central pivot point **415** of variable lever **408**, the amount of force that must be applied to cause actuating lever **409** to release drum latch **410** can be varied as desired.

[0156] As also seen in FIG. 39, a manual release lever **430** is provided that can be used to rotate drum latch **410** out of engagement with securing recess **424**, to allow for manual actuation of the automatic sail safety reefing feature **400** if desired, and/or to allow drum latch **410** to be released from securing recess **424** when it is desired to raise sail **108** by rotating top boom cable drum **422** to hoist sail **108** using hoisting cable **428**, for example by using a motor or hand crank. In some embodiments, each sail unit **102** is provided with one or more hand cranks mounted to operate the otherwise motor driven components of sail unit **102**, for e.g. manual reefing, control of mast angle, and raising and lowering of mast cog **504** in the event of a loss of electrical power.

[0157] In alternative embodiments, rather than using a hoisting cable **428** wound round top boom cable drum **422**, a continuous chain can instead be run up and down mast **110**, connected to raise and lower upper boom **106**, and wound round a chain-grabbing drum (i.e. a drum with fingers or projections that can be inserted into the links of the chain to wind the chain upwardly to raise upper boom **106** or downwardly to allow upper boom **106** to be lowered) and the chain-grabbing drum could take the place of top boom cable drum **422** in the described embodiment. Such an embodiment might provide more reliable operation over a long period of time, as a chain may be less prone to stretching than a cable. In such embodiment, the chain-grabbing drum could be rotated in the same manner as described above for rotating top boom cable drum **422** to allow upper boom **106** to be raised and lowered, including by the operation of automatic reefing safety sail feature **400**.

[0158] In one embodiment, the automatic mechanical safety device provides an automatic rotational release of mast **110** that allows sail **108** to rotate to be aligned with the wind, to very rapidly release the wind pressure on sail **108**, referred to generally as automatic mast rotation release feature **500**. In this embodiment, a mast strengthener cable **502** is coupled to mast **110** (e.g. as shown in FIGS. 43 and 44). If mast **110** experiences too much force and deflection from wind pressure as shown in FIG. 44, mast strengthener cable **502** actuates a mechanical switch **503** (FIGS. 45-48) to release a mast release weight **520** to lift a mast cog **504** off a worm screw **506**, which controls the angular setting of the mast **110** under ordinary operating conditions (FIGS. 49 and 51). This allows the 2/5ths:3/5ths offset sail to rotate in line with the wind as shown in FIG. 54 versus the normal operating configuration shown in FIG. 53, to immediately release the wind pressure on sail **108** and thus mast **110**.

[0159] In the illustrated embodiment, chain tensioners and a spring are used to trigger a mechanical switch to automatically release mast **110** after a predetermined amount of force has been exerted on mast **110**. As shown in FIGS. 45 and 47, ordinarily mechanical switch **503** is held in a raised position by the weight of the mast release weight **520** acting on a pin **518** which is connected to be moved by switch **503** when switch **503** is actuated. A projecting tab **508** that actuates switch **503** is connected to the mast strengthening cable **502** by an eye bar **511** (FIG. 46) that runs up through a retainer **510** of the chain tensioner. The projecting tab **508** is normally biased to be held in place on top of switch **503** by a spring **512** fixed inside the retainer **510**.

[0160] In more detail, projecting tab **508** sits with a first end **508A** fixed within retainer **510** and that is biased at its first end by spring **512** contained within retainer **510** via eye bar **511**. Retainer **510** acts like a chain tensioner, and is engaged with mast strengthener cable **502** and a fixed point on ship **101** so that forces exerted by mast strengthener cable **502** during normal sailing operations are ordinarily absorbed by spring **512**.

[0161] Upon the occurrence of a strong wind event that causes mast **110** to flex beyond an acceptable predetermined limit and thereby exert a predetermined amount of force on mast strengthener cable **502**, the force exerted by mast strengthener cable **502** on retainer **510** compresses spring **512** to a sufficient extent that a sprung locking tab **514** pivotably mounted within retainer **510** fully enters retainer **510**. Locking tab **514** enters retainer **510** and engages with the first end **508A** of projecting tab **508** as shown in FIGS. 46 and 48. Locking tab **514** thus becomes locked in place. As this occurs, the second end **508B** of projecting tab **508** moves downwardly so that mechanical switch **503** is forced downwardly and actuated. Actuation of switch **503** pulls pin **518** out far enough for the mast releasing weight **520** to drop (FIGS. 46 and 48).

[0162] The spring **512** is selected based on the application of Hooke's law so that once the predetermined amount of force has been exceeded, the spring will experience a corresponding predetermined linear displacement. In some embodiments, the properties of spring **512** and retainer **510** acting as a cable tensioner are selected to ensure that the automatic mast rotation release feature **500** is working within a desirable range of operating margins.

[0163] The actuation of mechanical switch **503** pulls pin **518** to release mast release weight **520**, which by falling lifts mast cog **504** off of worm screw **506** via cable **522** and pulley **524**, as shown by the raised position of mast cog **504** illustrated in FIGS. 50 and 52 as compared with its normal operating position illustrated in FIG. 49 and 51. During normal operation, rotation of worm screw **506** is used to rotate mast cog **504** to thereby control the angle of rotation of mast **110**.

[0164] Once mast cog **504** is free of worm screw **506** (which is ordinarily used to rotate mast **110**), mast **110** is free to rotate, and because sail **108** is offset, one side of sail **108** will experience a greater wind force than the other side of sail **108**, thereby forcing sail **108** to turn parallel to the wind, rapidly decreasing the wind forces applied to sail **108** and mast **110**, as shown by the differences in the position of sail **108** in the ordinary operating configuration shown in FIG. 53 versus the position after automatic mast rotation release feature **500** has been activated, as shown in FIG. 54.

[0165] In some embodiments, including the illustrated embodiment, automatic mast rotation release feature **500** is configured to automatically trigger automatic reefing sail safety feature **400** to fully reef sails **108** if automatic mast rotation release feature **500** is triggered. As best seen in FIGS. 51 and 52, automatic mast rotation release feature **500** includes a cable **516** that is pulled when switch **503** is actuated. Cable **516** is coupled to switch **503** (FIGS. 45-48) and to first end **408A** of variable lever **408**, so that when switch **503** is actuated by mast strengthener cable **502**, cable **516** is pulled and irreversibly activates variable lever **408**, releasing drum latch **410**. Because cable **516** remains under tension because switch **503** remains in its actuated configuration, drum latch **410** is not able to re-engage with securing recess **424** and top boom cable drum **422** is free to continue turning until sail **108** is fully reefed. This embodiment provides additional protection to sail **108** and mast **110** by fully reducing the sail area exposed to wind to zero in the event that mast rotation release feature **500** is triggered by a strong wind event. In some embodiments, because upper boom **106** may fall vigorously when top boom cable drum **422** is free to rotate, a friction strap **526** (FIG. 47) can be wound around a bob **528** on the back of top boom cable drum **422**, which tightens as the mast release weight **520** drops to slow the descent of upper boom **106**.

[0166] In some embodiments, appropriate shielding and weatherproofing can be provided to prevent components of sail units **102** (e.g. cables and levers on the control panel) from becoming damaged due to exposure to ocean weather conditions.

5 [0167] The function of auxiliary sail system **100** when used as described above is to assist the engines of ship **101** and save fuel. Thus, the margin of the operation of sail system **100** is well within the limits of mast failure or ship capsizing, which may lower the lead time from the beginning of development through testing to sales.

10 [0168] Sail units **102** can also be adjusted in any suitable manner to allow ship **101** to be used as any normal ship. For example, FIG. 55 illustrates a configuration of sail units **102** in which sail units **102** have been moved to the bow **124** and stern **122** of ship **101**, with upper and lower booms **106**, **104** placed into a vertical configuration, so that both sides of ship **101** are clear and ship **101** can pass through a narrow space, e.g. the Panama or Suez Canal. In some alternative embodiments, upper and lower booms **106**, **104** can be lowered to the deck or loaded onto storage carts.

15 [0169] Maintenance of various parts of sail system **100** can be done while ship **101** is en route. Because sail system **100** is only an auxiliary sail system, it is not critical to the progress of ship **101**, which means that repairs can be scheduled for calm weather or port, and need not be completed immediately. Ship **101** can still continue its journey, potentially more slowly, if some or all sail units **102** fail.

20 [0170] Suitable materials for making the various components of auxiliary sail system **100** can be selected by those skilled in the art. For example, in some embodiments, mast **110** and lower and upper booms **104**, **106** may be made of aluminum. In such embodiments, to avoid aluminum/steel chemical reactions, resin barriers can be used. In alternative
25 embodiments to avoid aluminum/steel chemical reactions, a design of sail system **100** that uses all steel e.g. for mast **110** and lower and upper booms **104**, **106**, could be used. In some such embodiments, the mast and booms would be triangular open frames such as those used in cranes and broadcast pylons. In alternative embodiments and as a more sustainable material, in some embodiments mast **110** and/or lower and upper booms **104**, **106** could be made from timber, for example laminated sitka spruce, which could be
30 produced to effective lengths.

[0171] The construction and connection of the various components of auxiliary sail system **100** would be within the expected knowledge of the person of ordinary skill in the art. In one example embodiment, cable fixing points are made by chain link traps using a primary locking plate, a secondary locking plate, and an 'R' clip to secure to their points of use, which allows rigging/de-rigging to be done manually by as few as two persons, without tools. However, any suitable engagement mechanism can be used in alternative embodiments.

[0172] While an example embodiment of a rail-mounted auxiliary sail system **100** has been described in conjunction with the example embodiments of automatic mechanical safety devices described herein, in alternative embodiments, other mounting systems could be used to affix appropriate sail units to a ship. For example, in some embodiments, the masts can be mounted at fixed points, and a derigging system can be provided to move the sail unit out of the way, for example to permit loading and unloading of cargo in port. In some embodiments, the masts can be mounted on and movable with respect to a rail system, and a motor can be provided to move each sail unit along the rail system.

[0173] In still a further alternative embodiment, a 'curtain rail' mounting system can be used, and a fixed cable can extend around the ship and be used to move the sail units along the rail system. In some such embodiments, the fixed cable can be moved using a motorised capstan, and the sail units can be lashed to the fixed cable in any suitable manner so that movement of the cable will draw the sail units along the rail system.

[0174] In still a further embodiment, a 'pocket' mounting system can be used to secure some of the sail units **102**, in which the mast is secured within a pocket that is in turn secured to the side of the ship.

[0175] While a number of exemplary aspects and embodiments have been discussed above, those of skill in the art will recognize certain modifications, permutations, additions and sub-combinations thereof. It is therefore intended that the following appended claims and claims hereafter introduced are interpreted to include all such modifications, permutations, additions and sub-combinations as are consistent with the broadest interpretation of the specification as a whole.

CLAIMS:

1. A ship-mounted auxiliary sail system comprising:
a rail system extending about at least a portion of a deck of the ship;
a plurality of sail units mountable on the rail system and movable along the rail
5 system; and
a plurality of spaced-apart fixed securement points provided on the rail system for
fixing the sail units to the hull of the ship for use, each one of the plurality of
spaced-apart fixed securement points being configured to receive and secure
a corresponding one of the plurality of sail units.
- 10 2. A ship-mounted auxiliary sail system as defined in claim 1, wherein adjacent ones of
the plurality of spaced-apart fixed securement points on a first side of the ship are
spaced apart by a spacing distance.
3. A ship-mounted auxiliary sail system as defined in claim 2, comprising a drive rope
for moving the plurality of sail units along the rail system.
- 15 4. A ship-mounted auxiliary sail system as defined in claim 3, wherein the drive rope is
marked at spaced apart intervals corresponding to the spacing distance.
5. A ship-mounted auxiliary sail system as defined in any one of claims 1 to 4, further
comprising a storage rope for positioning at least some of the plurality of sail units in
a stowage configuration.
- 20 6. A ship-mounted auxiliary sail system as defined in claim 5, wherein the storage rope
is marked at spaced apart intervals corresponding to a stowage spacing of the sail
units.
7. A method of using a ship-mounted auxiliary sail system as defined in any one of
claims 1 to 6, the method comprising using webbing loops to cinch the sail units to
25 the drive rope or the storage rope.
8. A method as defined in claim 7, wherein the webbing loops are used to cinch the sail
units to the drive rope or the storage rope at at least some of the marked locations.

9. A method of positioning a plurality of sail units at a plurality of spaced-apart fixed securement points for fixing the sail units to a hull of a ship for use as an auxiliary sail system for the ship, the method comprising the steps of:
- 5 (a) loading a first one of the plurality of sail units on a rail system, the rail system extending about at least a portion of a deck of a ship;
- (b) securing the first one of the plurality of sail units to a drive rope;
- (c) using the drive rope to move the first one of the plurality of sail units towards a desired deployment location until the first one of the sail units has moved a predetermined spacing distance;
- 10 (d) loading a second one of the plurality of sail units on the rail system;
- (e) securing the second one of the plurality of sail units to the drive rope;
- (f) using the drive rope to move the second one of the plurality of sail units towards a desired deployment location;
- 15 repeating steps (d) through (f) for successive ones of the plurality of sail units, until the desired number of sail units have been loaded on the rail system and moved to their desired deployment locations; and
- securing each one of the sail units at its corresponding fixed securement point.
10. A method of clearing a plurality of sail units coupled to a plurality of spaced-apart fixed securement points of an auxiliary sail system for a ship from a first side of the ship, the method comprising the steps of:
- 20 (a) advancing a second one of the plurality of sail units on a second side of the ship opposite to the first side to a storage distance from a first one of the plurality of sail units on the second side and securing the second one of the plurality of sail units in a storage configuration;
- 25 (b) advancing a third one of the plurality of sail units on the second side of the ship to a storage distance from the second one of the plurality of sail units and securing the third one of the plurality of sail units in a storage configuration;
- 30 (c) repeating step (b) for successive ones of the plurality of sail units on the second side of the ship until a sufficient portion of the second side of the ship has been cleared;

- (d) using a drive rope to move the plurality of sail units located on the first side of the ship towards the second side of the ship;
- (e) advancing a first one of the plurality of sail units on the first side of the ship to a storage distance from the last one of the plurality of sail units on the second side of the ship and securing the first one of the plurality of sail units from the first side of the ship in a storage configuration; and
- (f) securing successive ones of the plurality of sail units from the first side of the ship a storage distance from the preceding one of the plurality of sail units from the first side of the ship in a storage configuration.
11. A method as defined in claim 10, wherein securing the plurality of sail units in the storage configuration comprises securing the plurality of sail units to a storage rope
12. A method as defined in claim 11, wherein the storage rope is marked at spaced apart intervals corresponding to the storage distance, and wherein each one of the plurality of sail units is secured in the storage configuration at a corresponding one of the marks on the storage rope.
13. An automatic reefing sail safety system for a square-rigged roller-blind sail, the system comprising:
- a flex detecting cable positioned to detect flex of a component of the square-rigged roller blind sail due to high wind;
- a damping member positioned to absorb movement of the flex detecting cable during normal sailing operations, the damping member being selected to transmit movement of the flex detecting cable to a first lever during high wind events; the first lever positioned to be actuated by the damping member during high wind events;
- a retaining member configured to be actuated by actuation of the first lever, wherein the retaining member is ordinarily biased in a retaining configuration;
- a rotatable cable drum having a hoisting cable wound therearound for raising and lowering a top boom of the square-rigged roller blind sail, an outer circumference of a portion of the cable drum comprising an engaging element to engage with the retaining member when the retaining member is in the

retaining configuration to thereby prevent rotation of the rotatable cable drum;
and

the rotatable cable drum being rotatable to lower a top boom of the square-rigged
roller blind sail by rotating a portion of the hoisting cable when the retaining
member is actuated to a released configuration.

14. An automatic reefing sail safety system as defined in claim 13, wherein the
circumference of the rotatable cable drum about which the hoisting cable is wound is
equal to approximately $1/10^{\text{th}}$ of the height of a mast of the square-rigged roller blind
sail.

10 15. An automatic reefing sail safety system as defined in any one of claims 13 or 14,
wherein the damping member comprises an inertia drum that is connected to be
rotated by movement of the flex detecting cable.

15 16. An automatic reefing sail safety system as defined in claim 15, wherein the inertia
drum rotates an actuator cog, and the actuator cog in turn rotates a rotating lever
cog to raise a second lever during high wind events, the second lever being
connected to actuate the first lever.

20 17. An automatic reefing sail safety system as defined in claim 16, wherein the first lever
comprises a variable lever, and wherein the second lever is connected to a first end
of the first lever and the retaining member is connected to a second end of the first
lever so that when the first end of the first lever is actuated by the second lever, the
retaining member is actuated to the released configuration.

18. An automatic reefing sail safety system as defined in any one of claims 13 to 17,
wherein the flex detecting cable extends along the top boom.

25 19. An automatic mast rotation release device comprising:
a rotatable platform;
a mast mounted on the rotatable platform;
an engagement member ordinarily engaged with and configured to rotate the
rotatable platform;
a sensing cable connected to the mast for detecting strong wind events;



a mechanical switch configured to be actuable in response to the application of a predetermined level of force to the sensing cable; and
 a weight configured to be in a first position during normal sailing operations, and movable to a second position upon actuation of the mechanical switch to lift
 5 the rotatable platform out of engagement with the engagement member to thereby permit the rotatable platform to freely rotate.

20. An automatic mast rotation release device as defined in claim 19, comprising a spring-supported latch for actuating the mechanical switch, wherein the spring-supported latch and a spring supporting the spring-supported latch are contained
 10 within a retainer that is configured to transfer force applied by the sensing cable to the spring to cause the spring-supported latch to actuate the mechanical switch when the predetermined level of force is applied to the sensing cable.

21. An automatic mast rotation release device as defined in any one of claims 19 or 20, wherein the weight is supported in position during normal sailing operations by a pin
 15 positioned to release the weight when the mechanical switch is actuated.

22. An automatic mast rotation release device as defined in any one of claims 19 to 21, wherein the sensing cable is further connected to trigger an automatic reefing sail system as defined in any one of claims 13 to 18 when the mechanical switch is actuated.

20 23. An automatic mast rotation release device defined in any one of claims 19 to 21, wherein the mechanical switch is connected to actuate a lever that releases a retaining member from engagement with a rotatable cable drum when the mechanical switch is actuated, the rotatable cable drum being positioned to rotate a hoisting cable for raising and lowering a top boom of a sail supported by the mast, to
 25 thereby allow the rotatable cable drum to freely rotate to allow the top boom of the sail to fall and be placed in a fully lowered configuration.

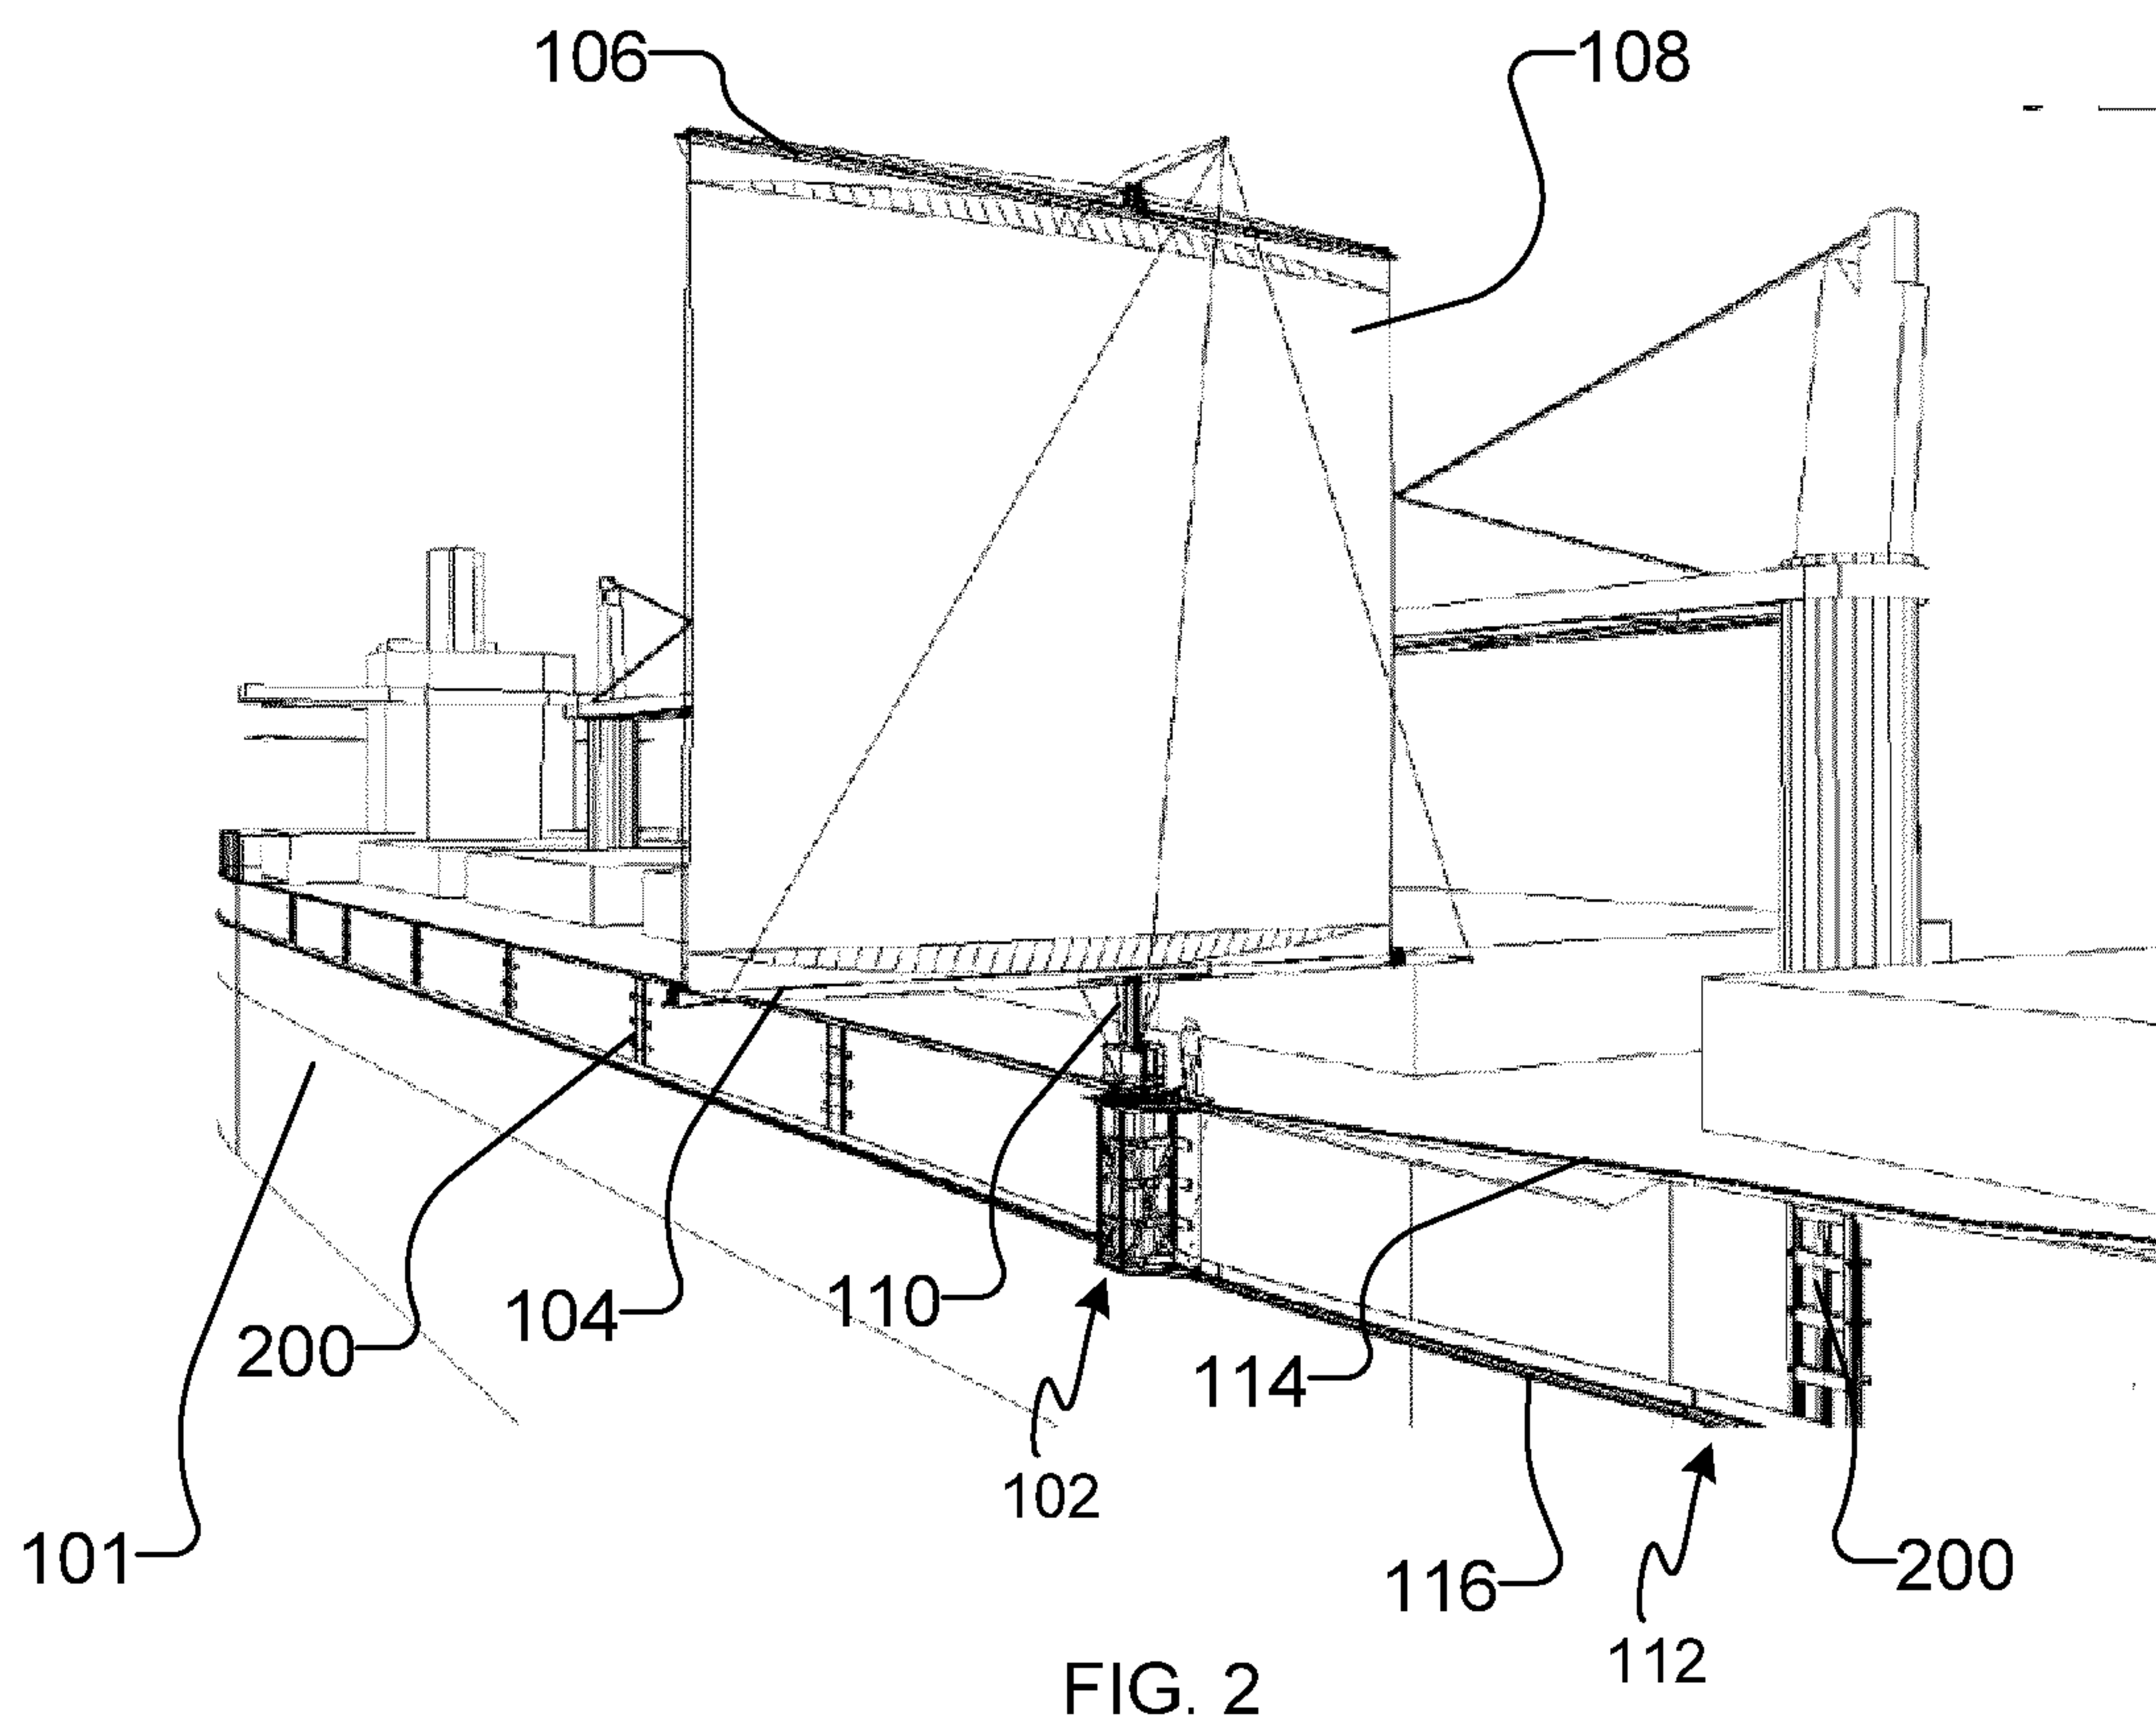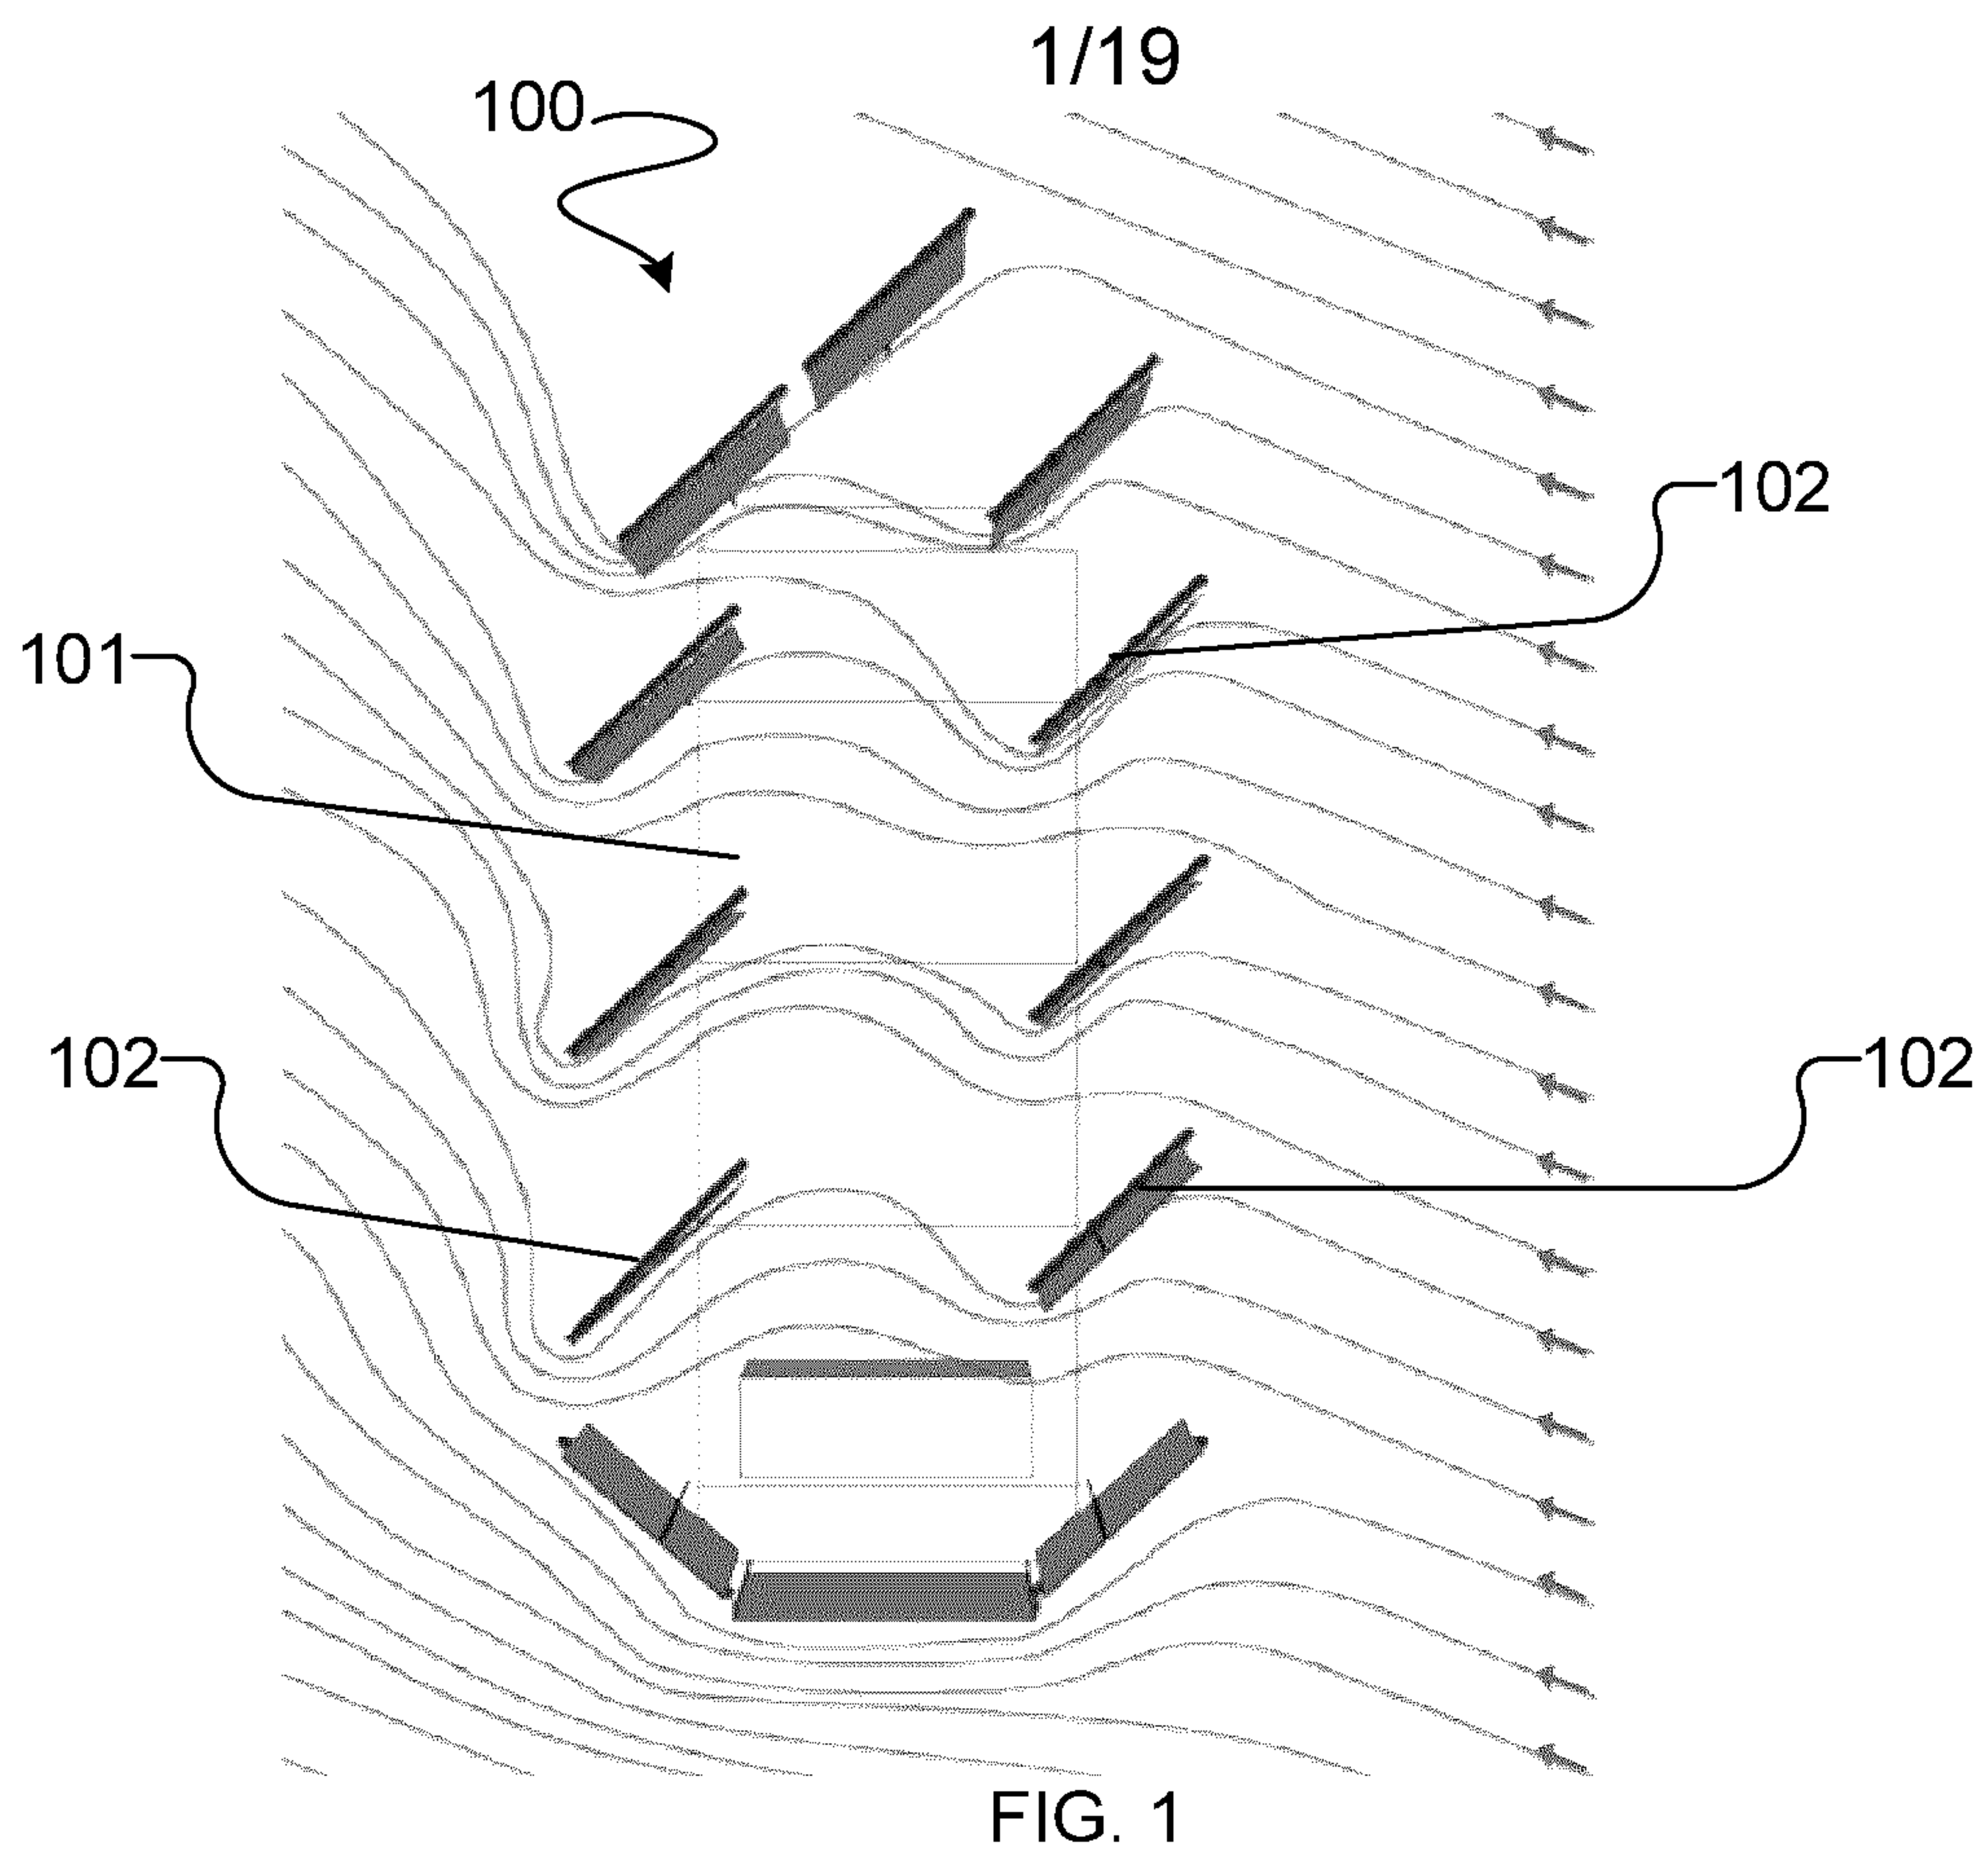

2/19

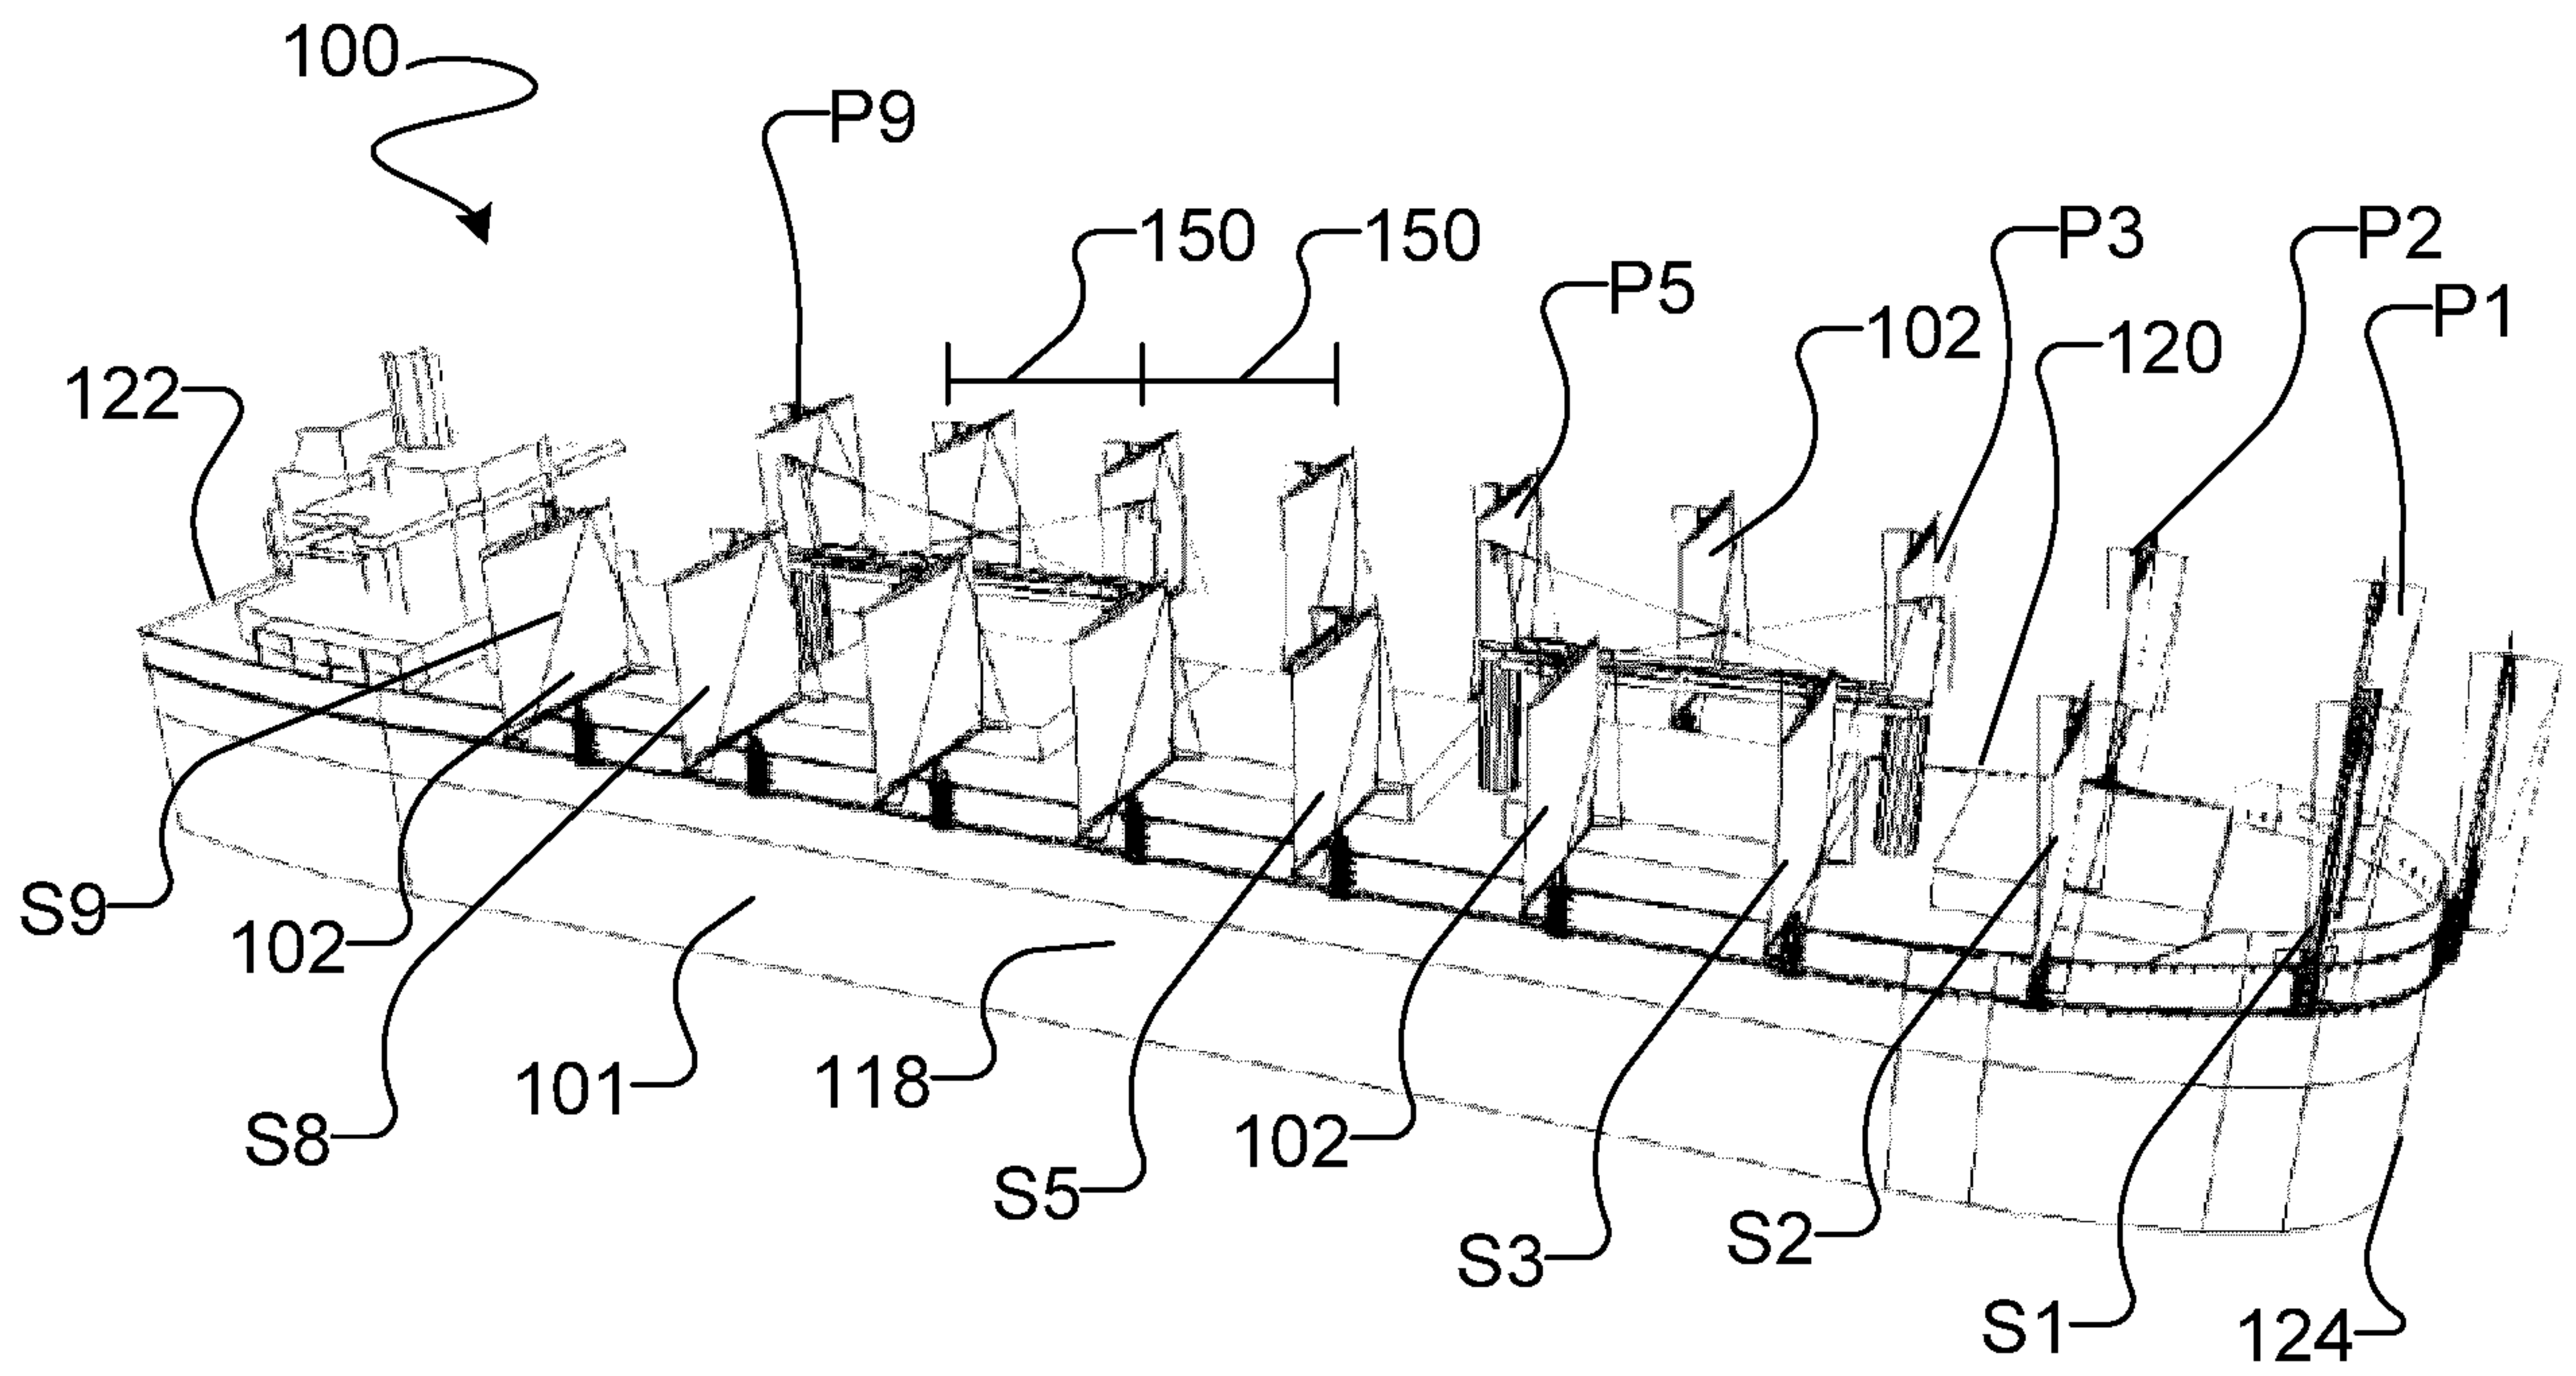


FIG. 3

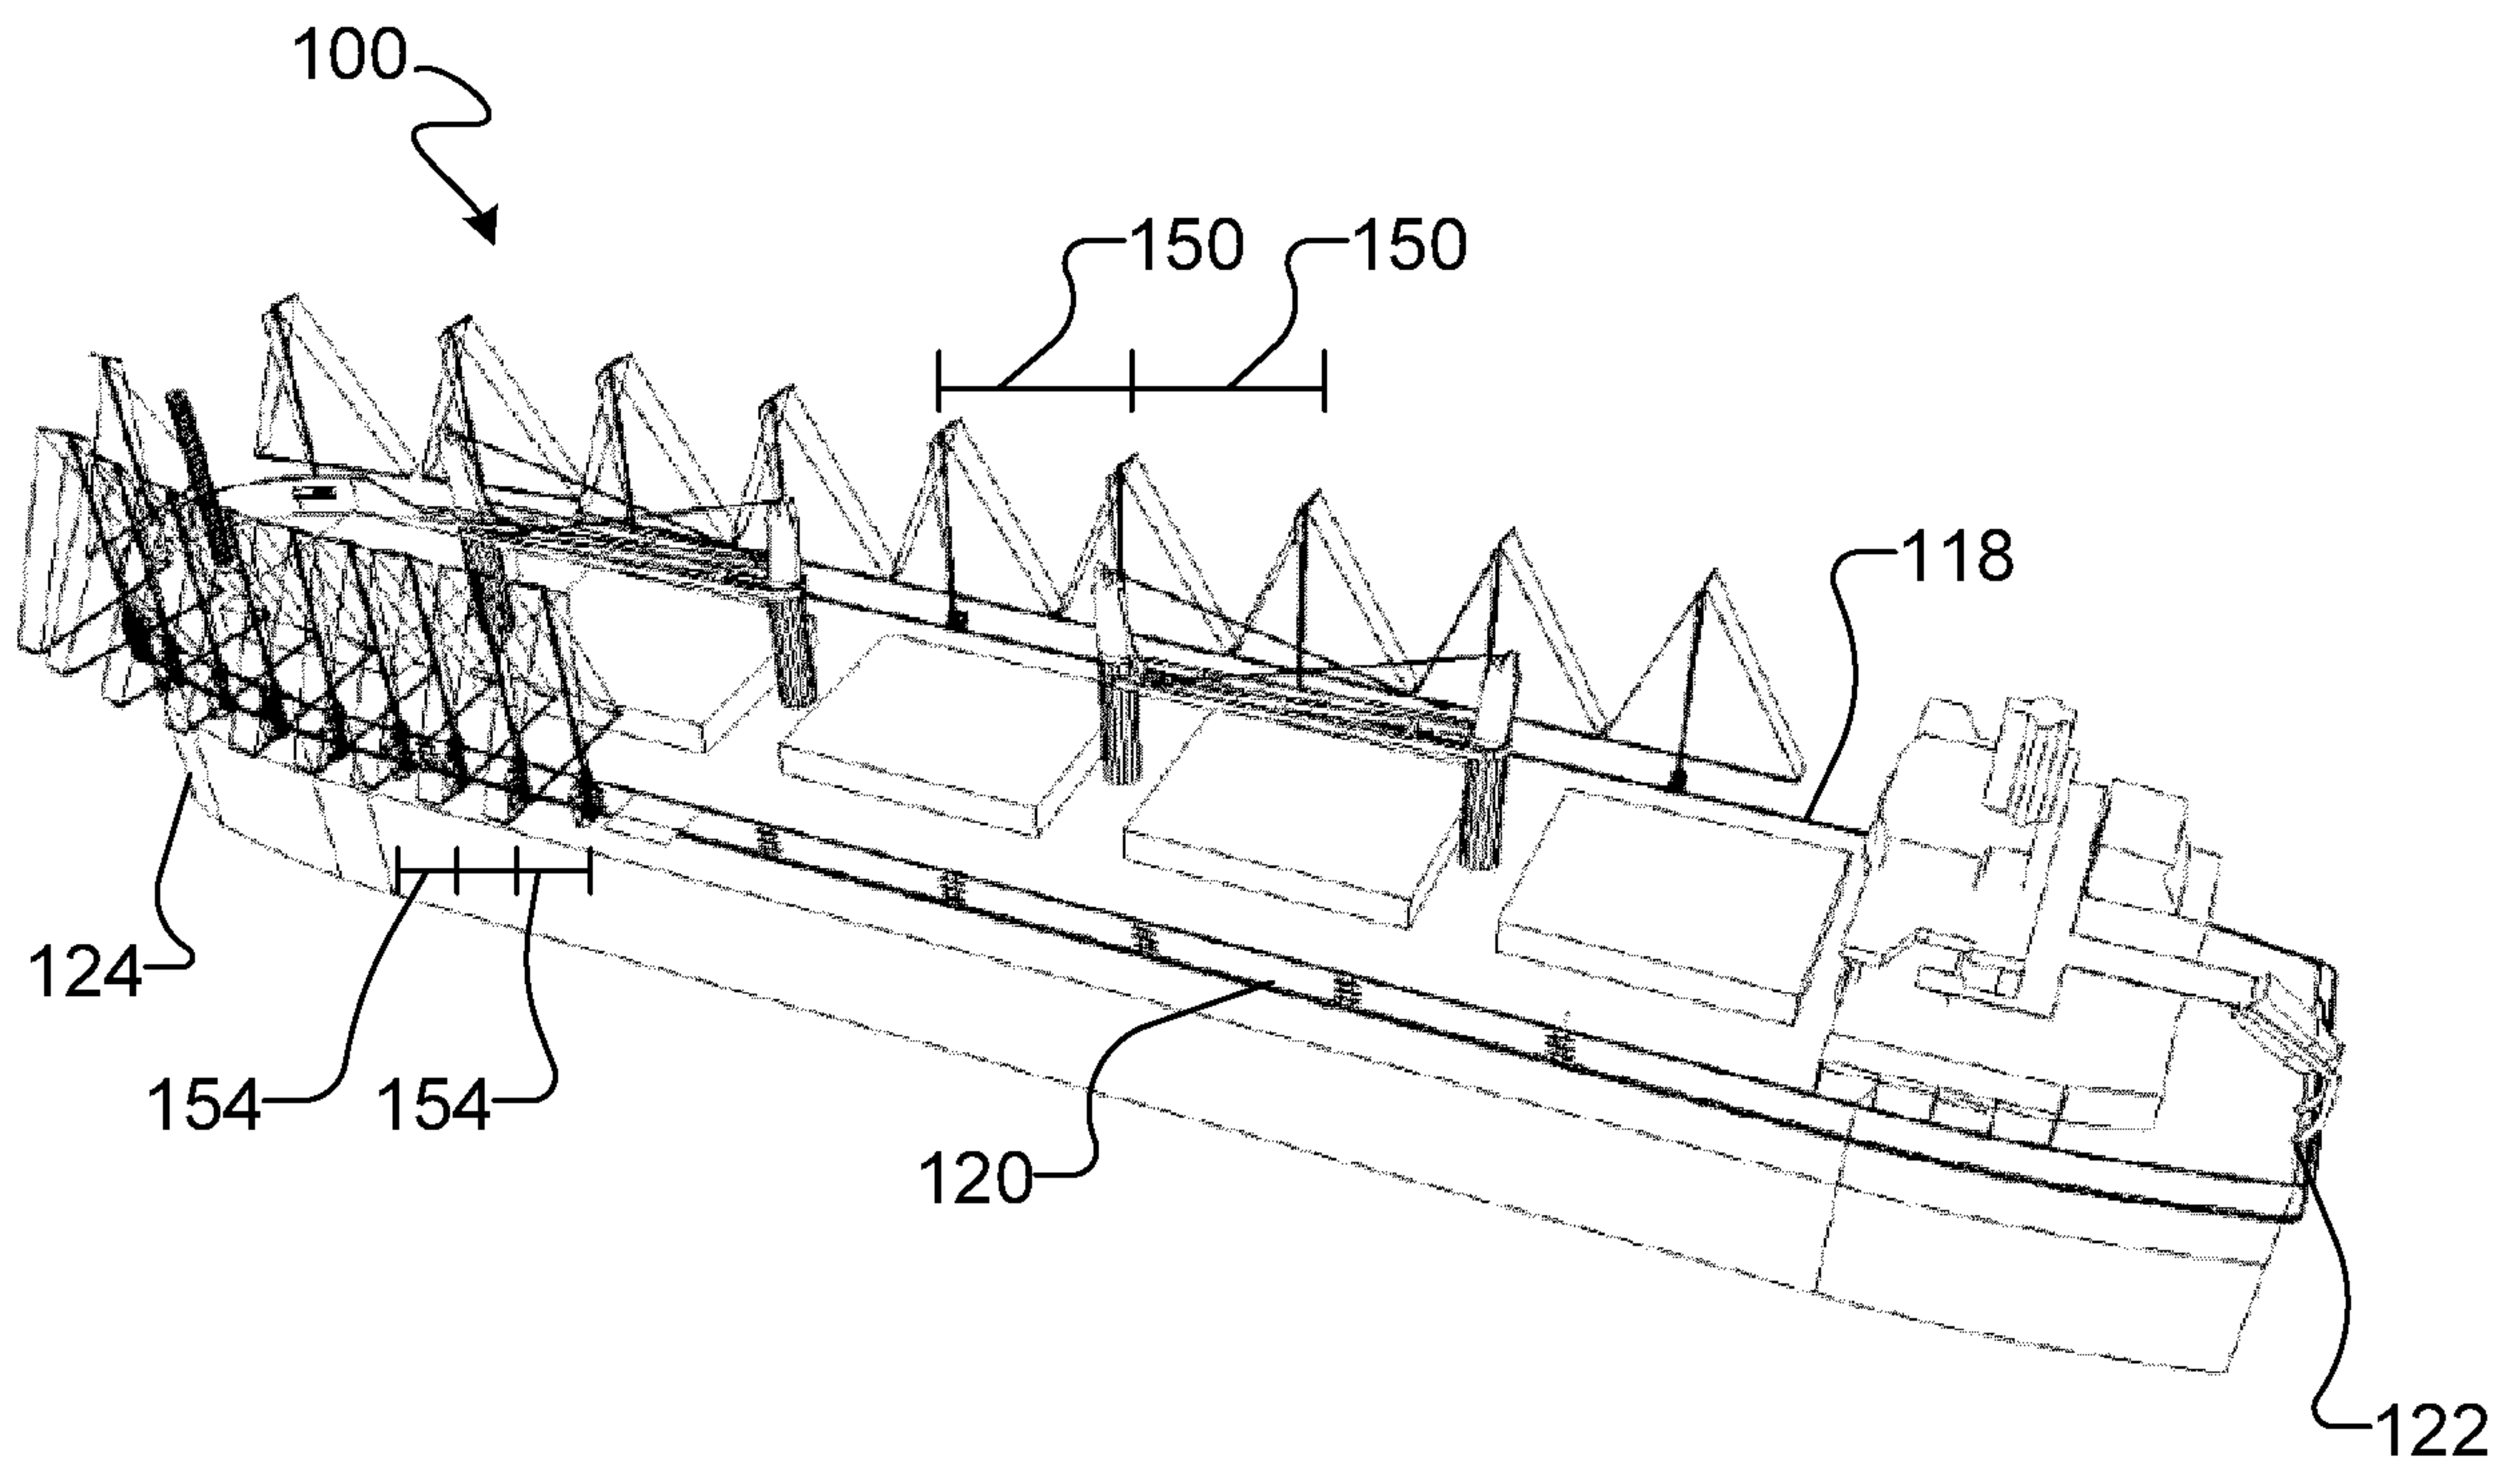


FIG. 4

3/19

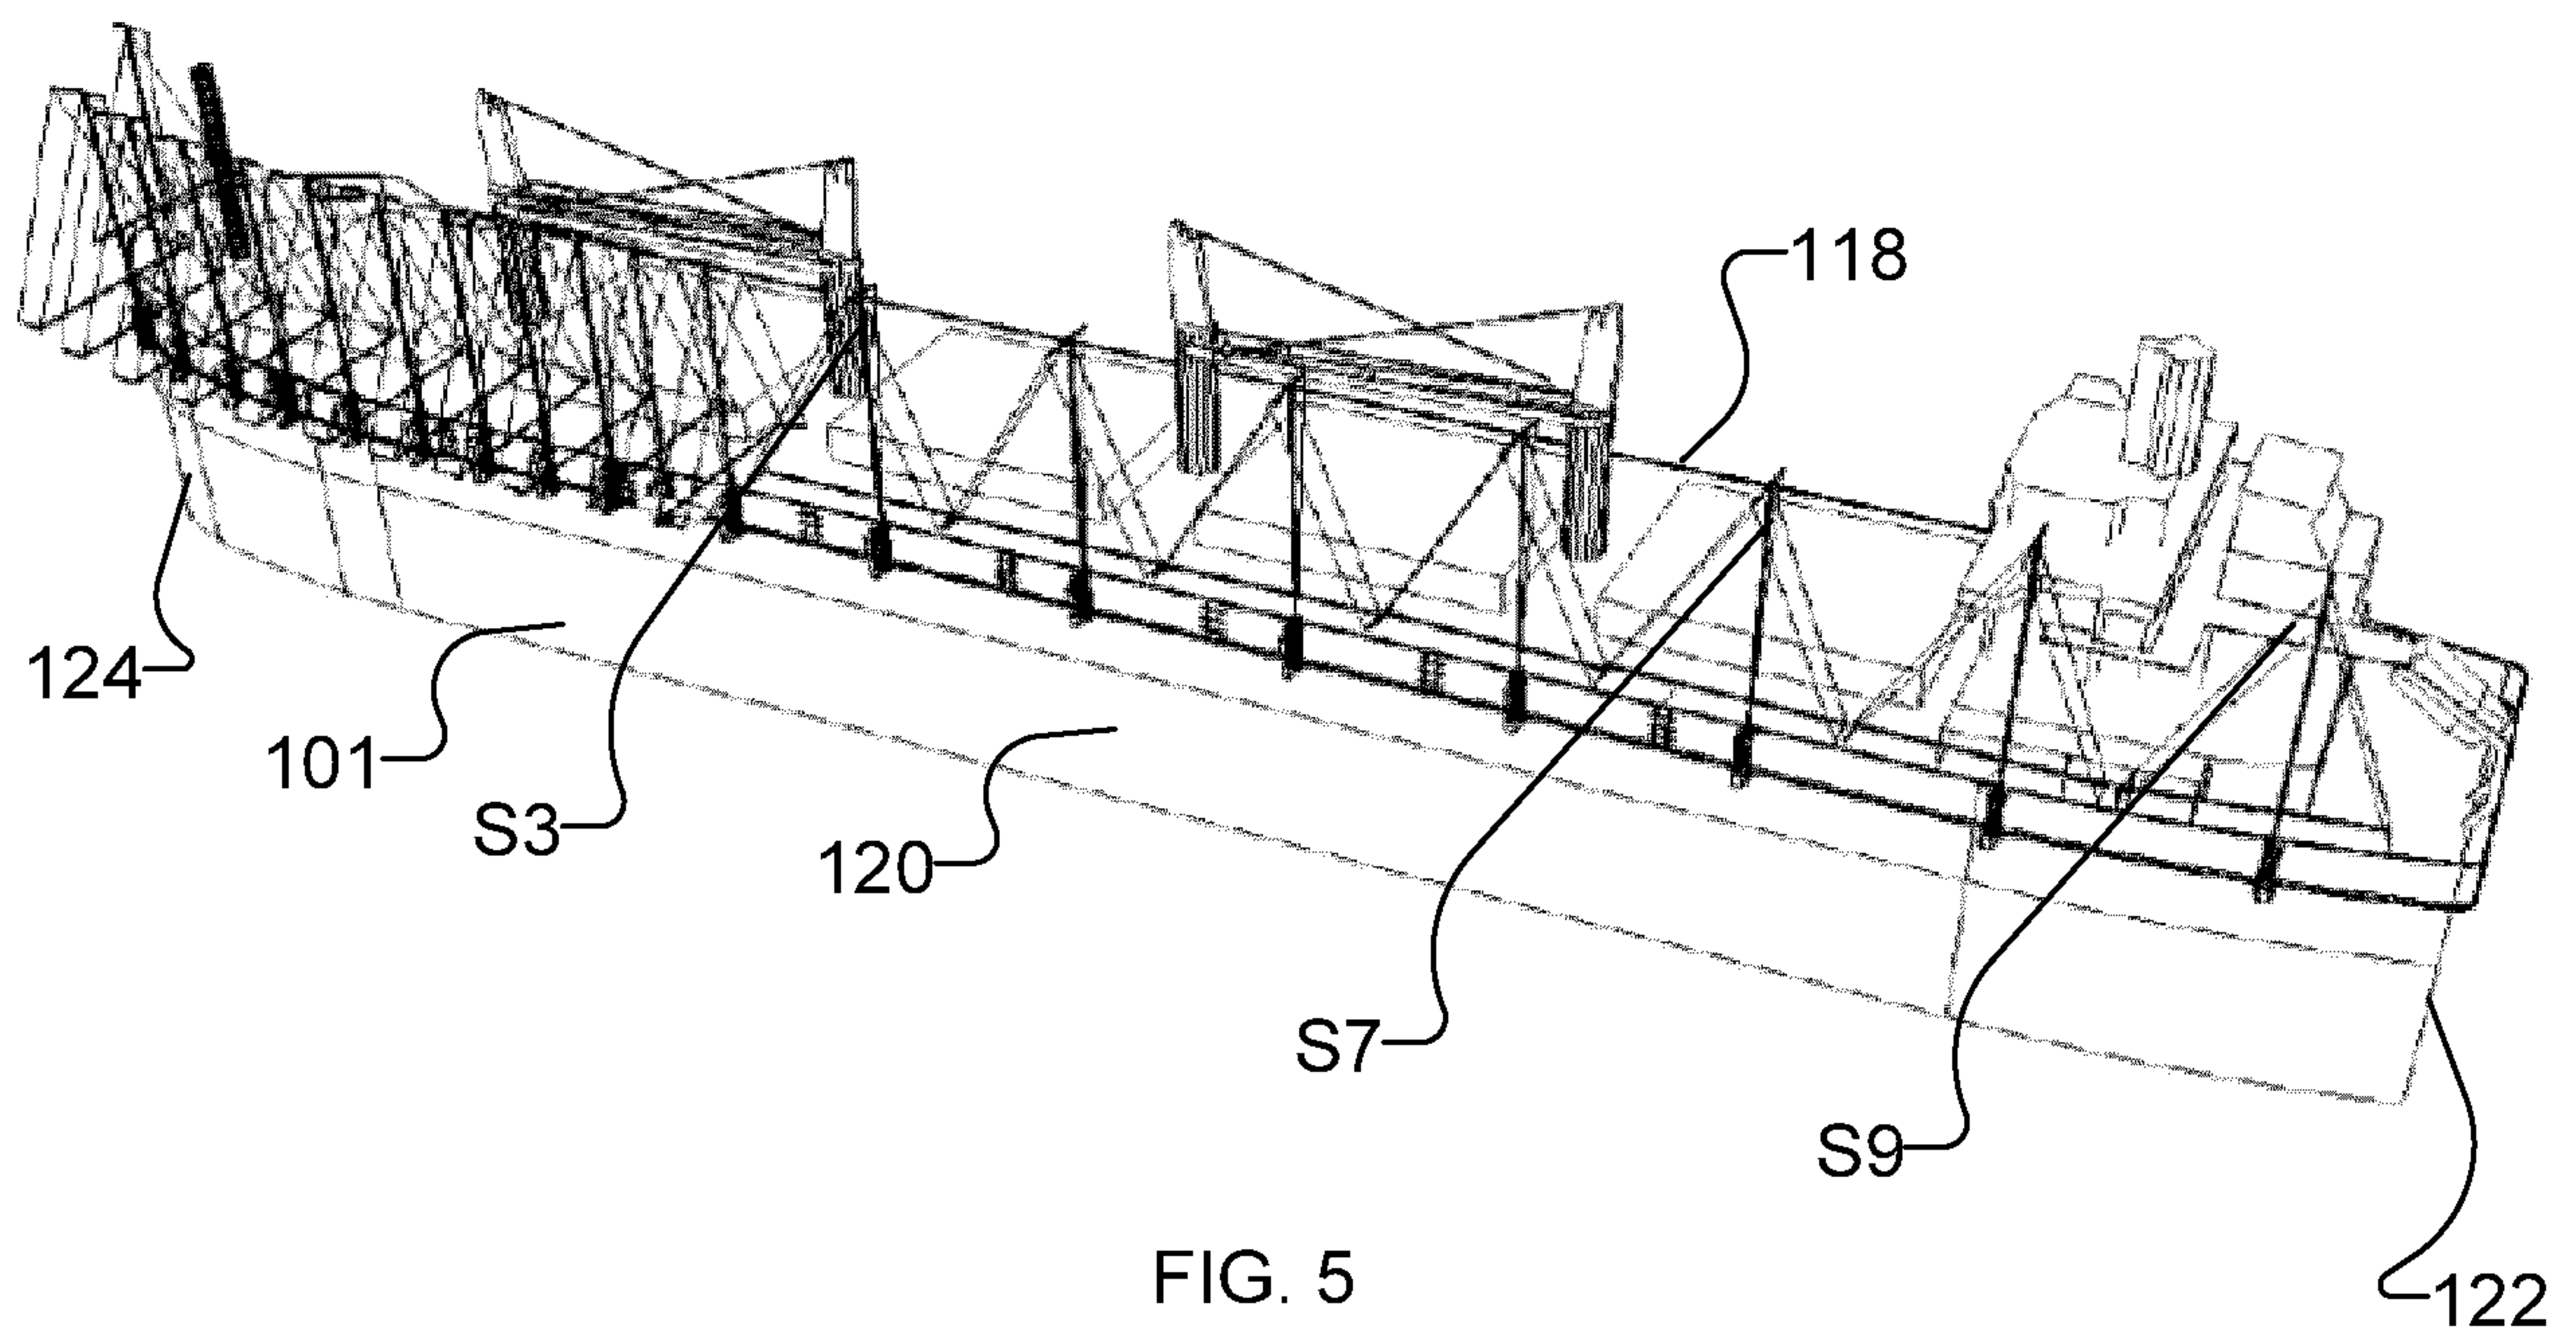


FIG. 5







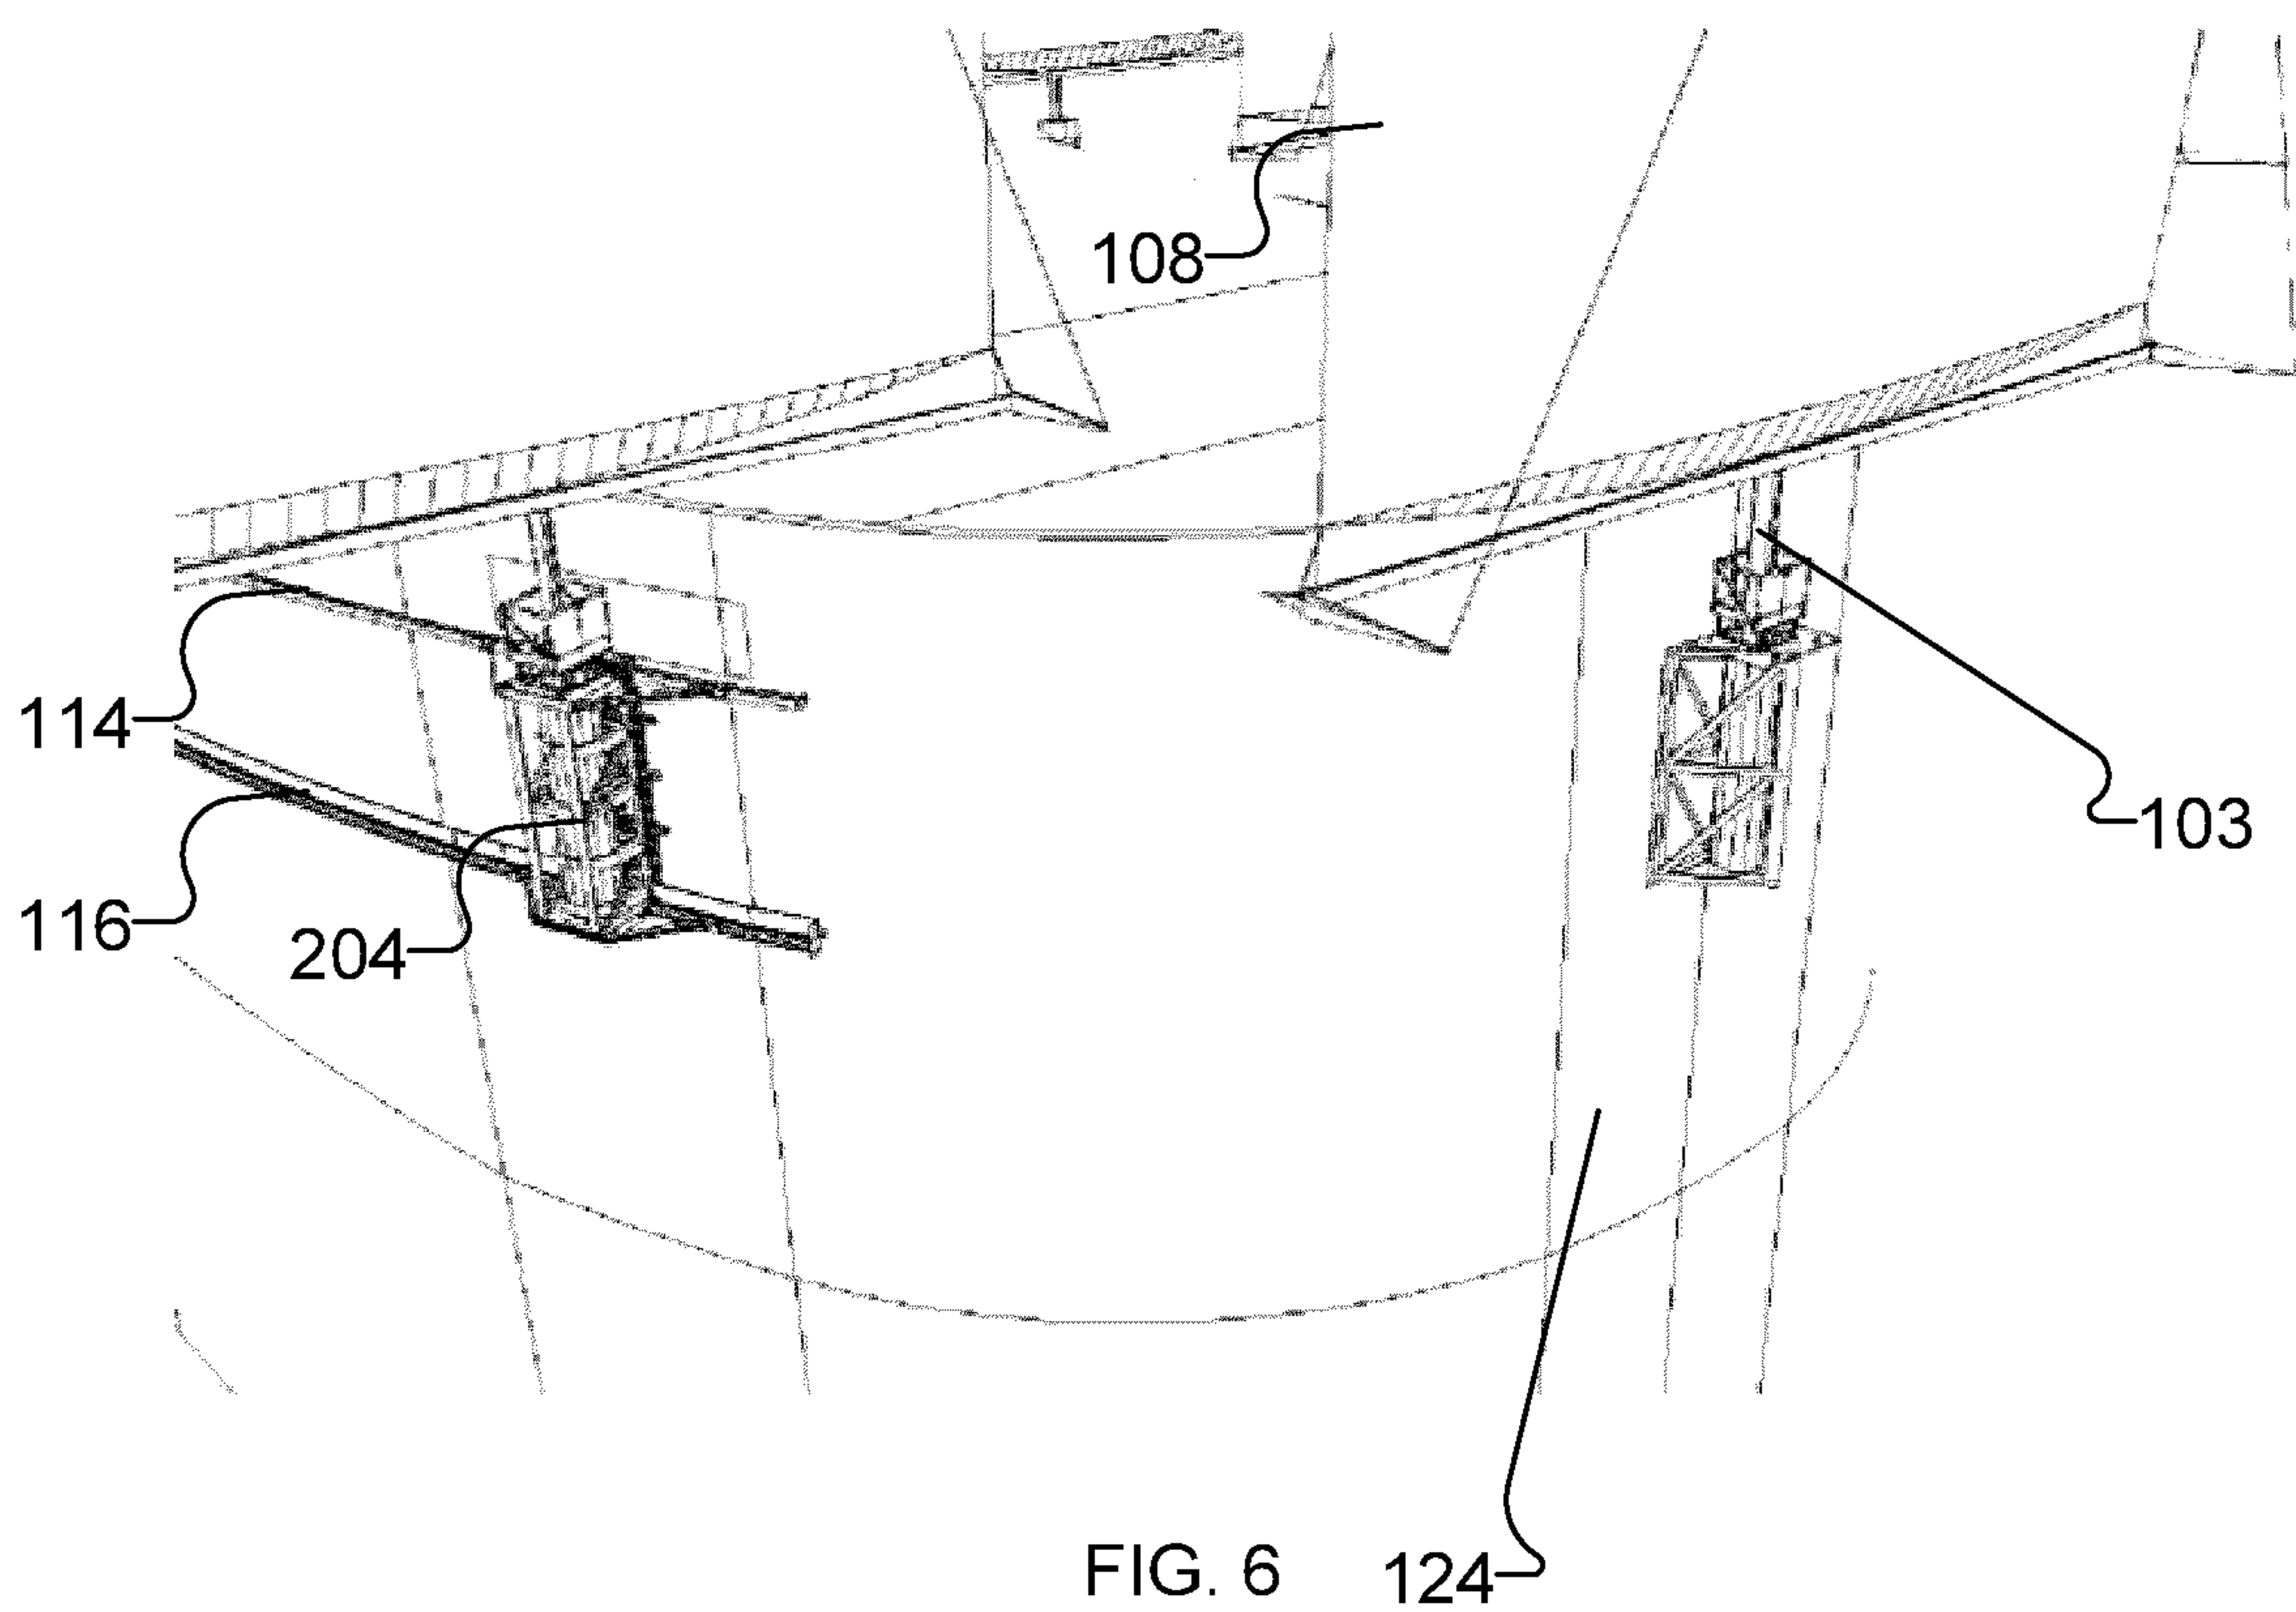


FIG. 6

4/19

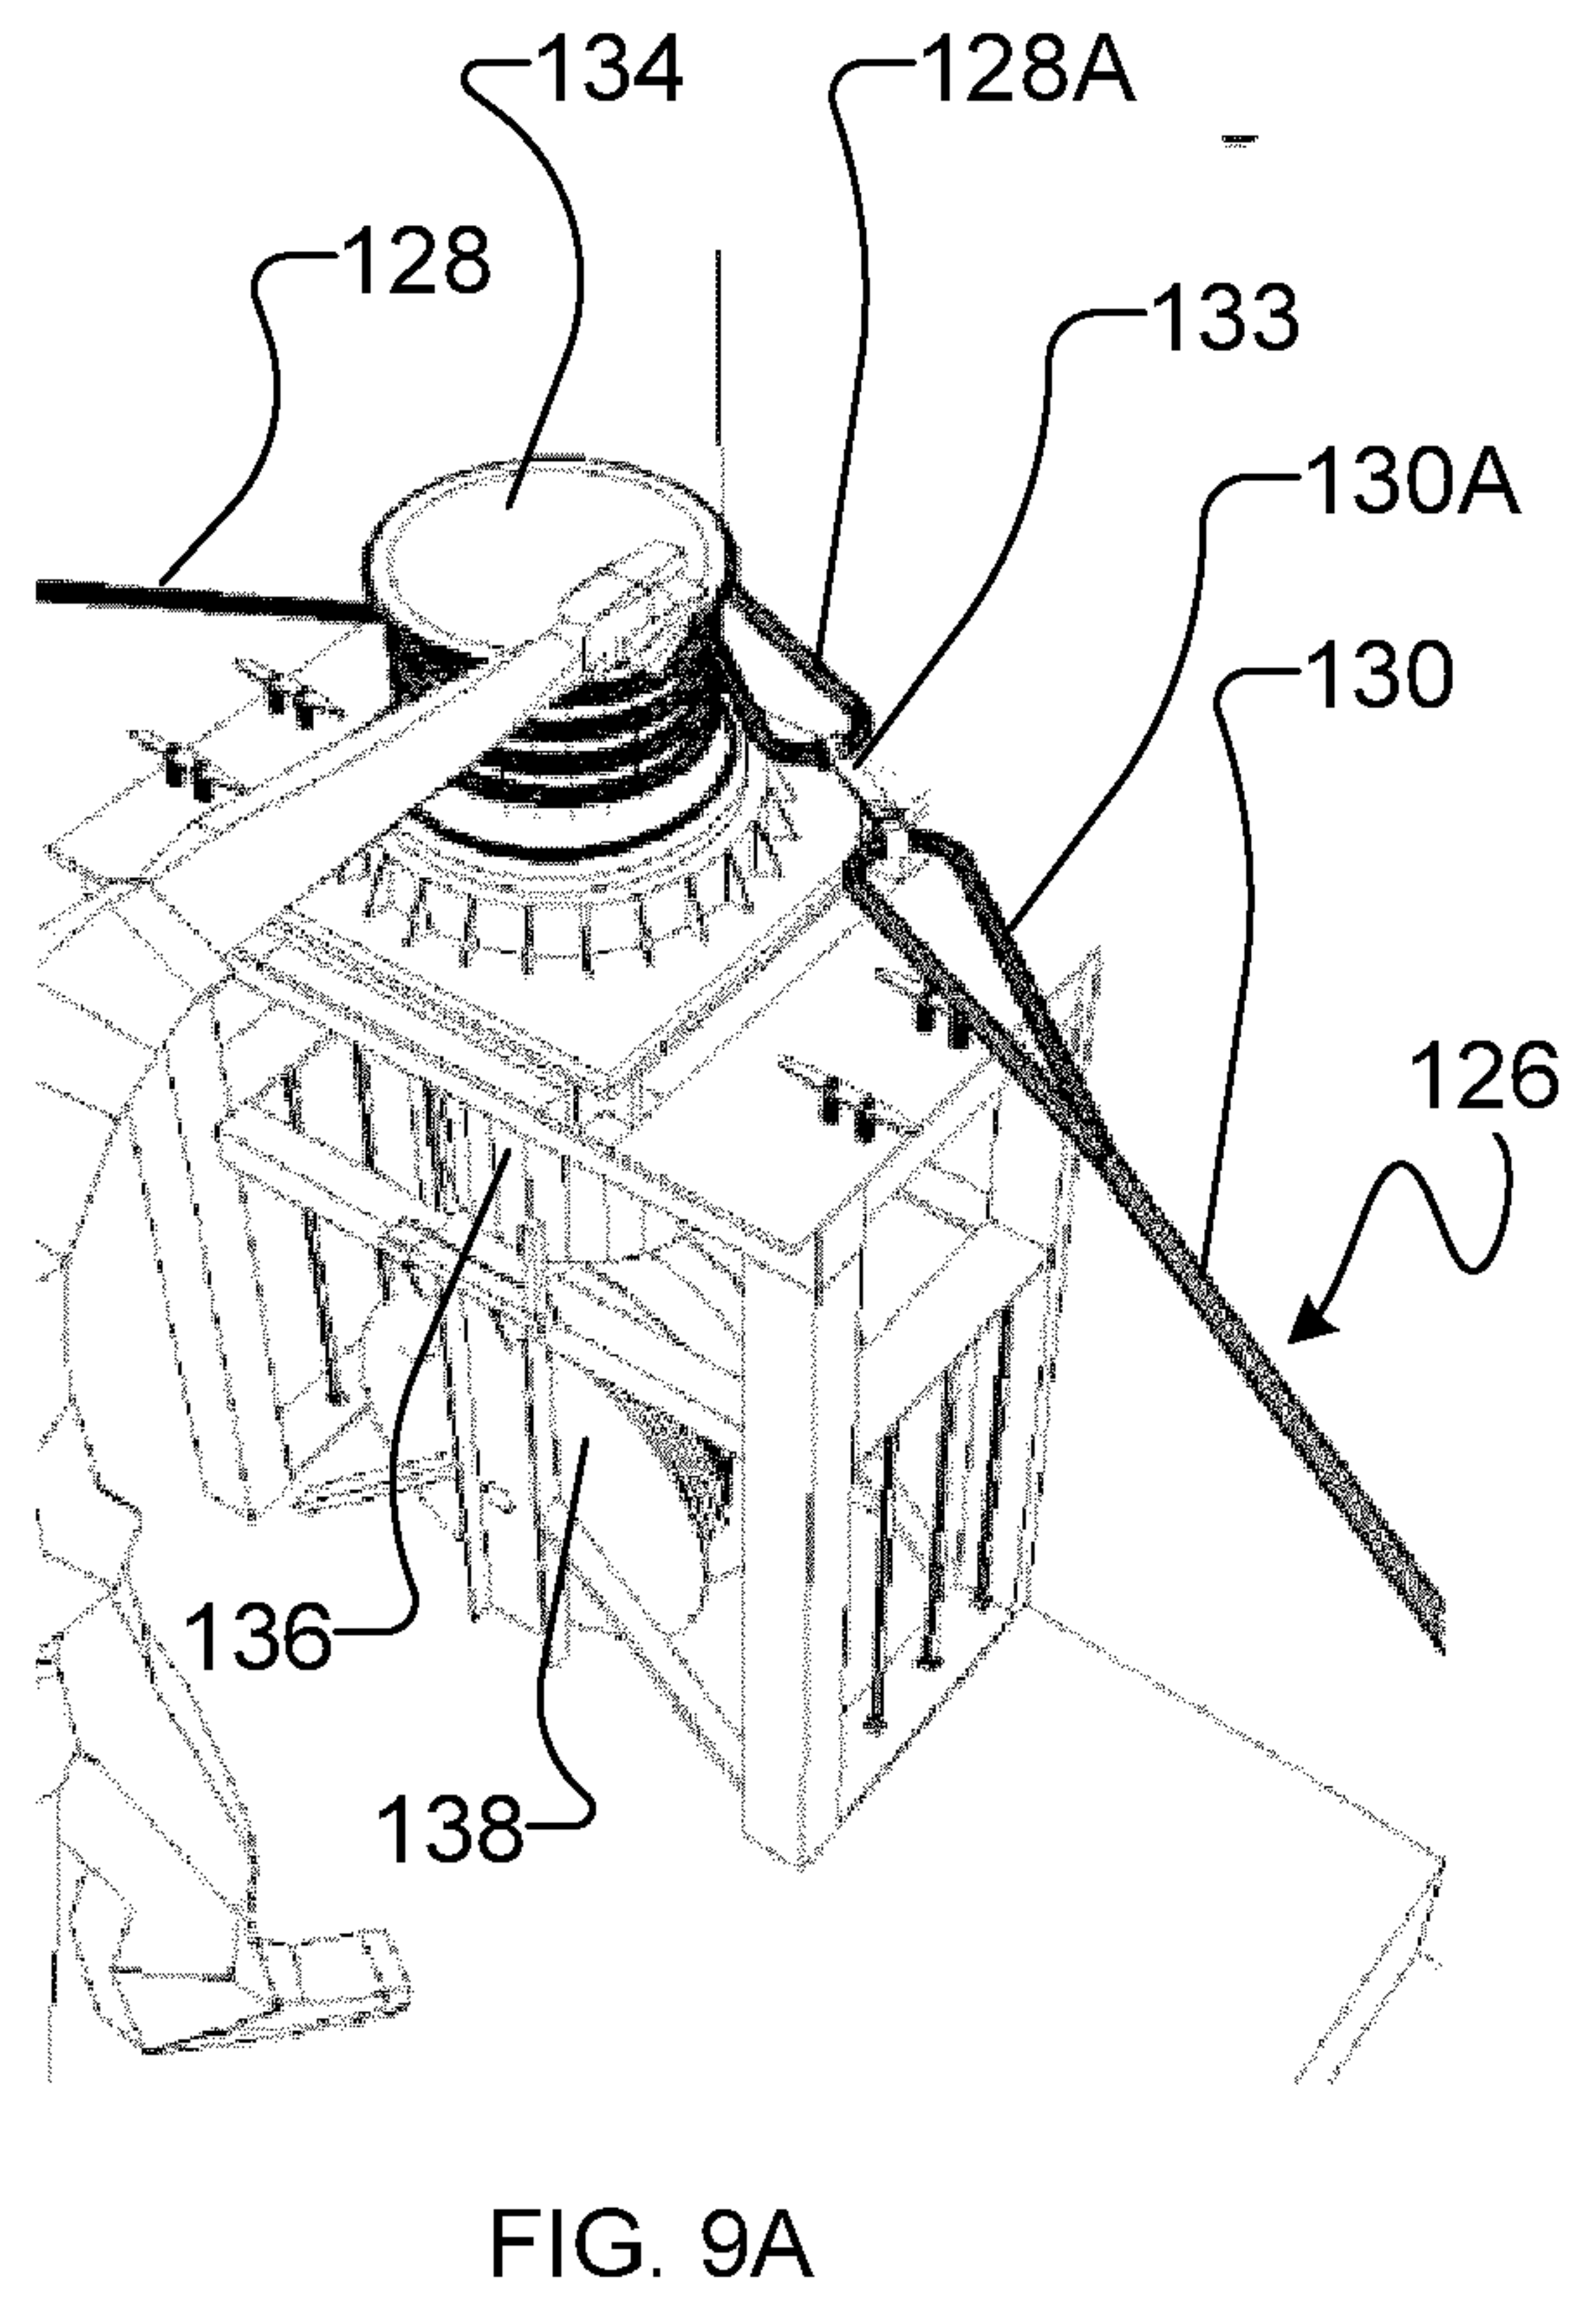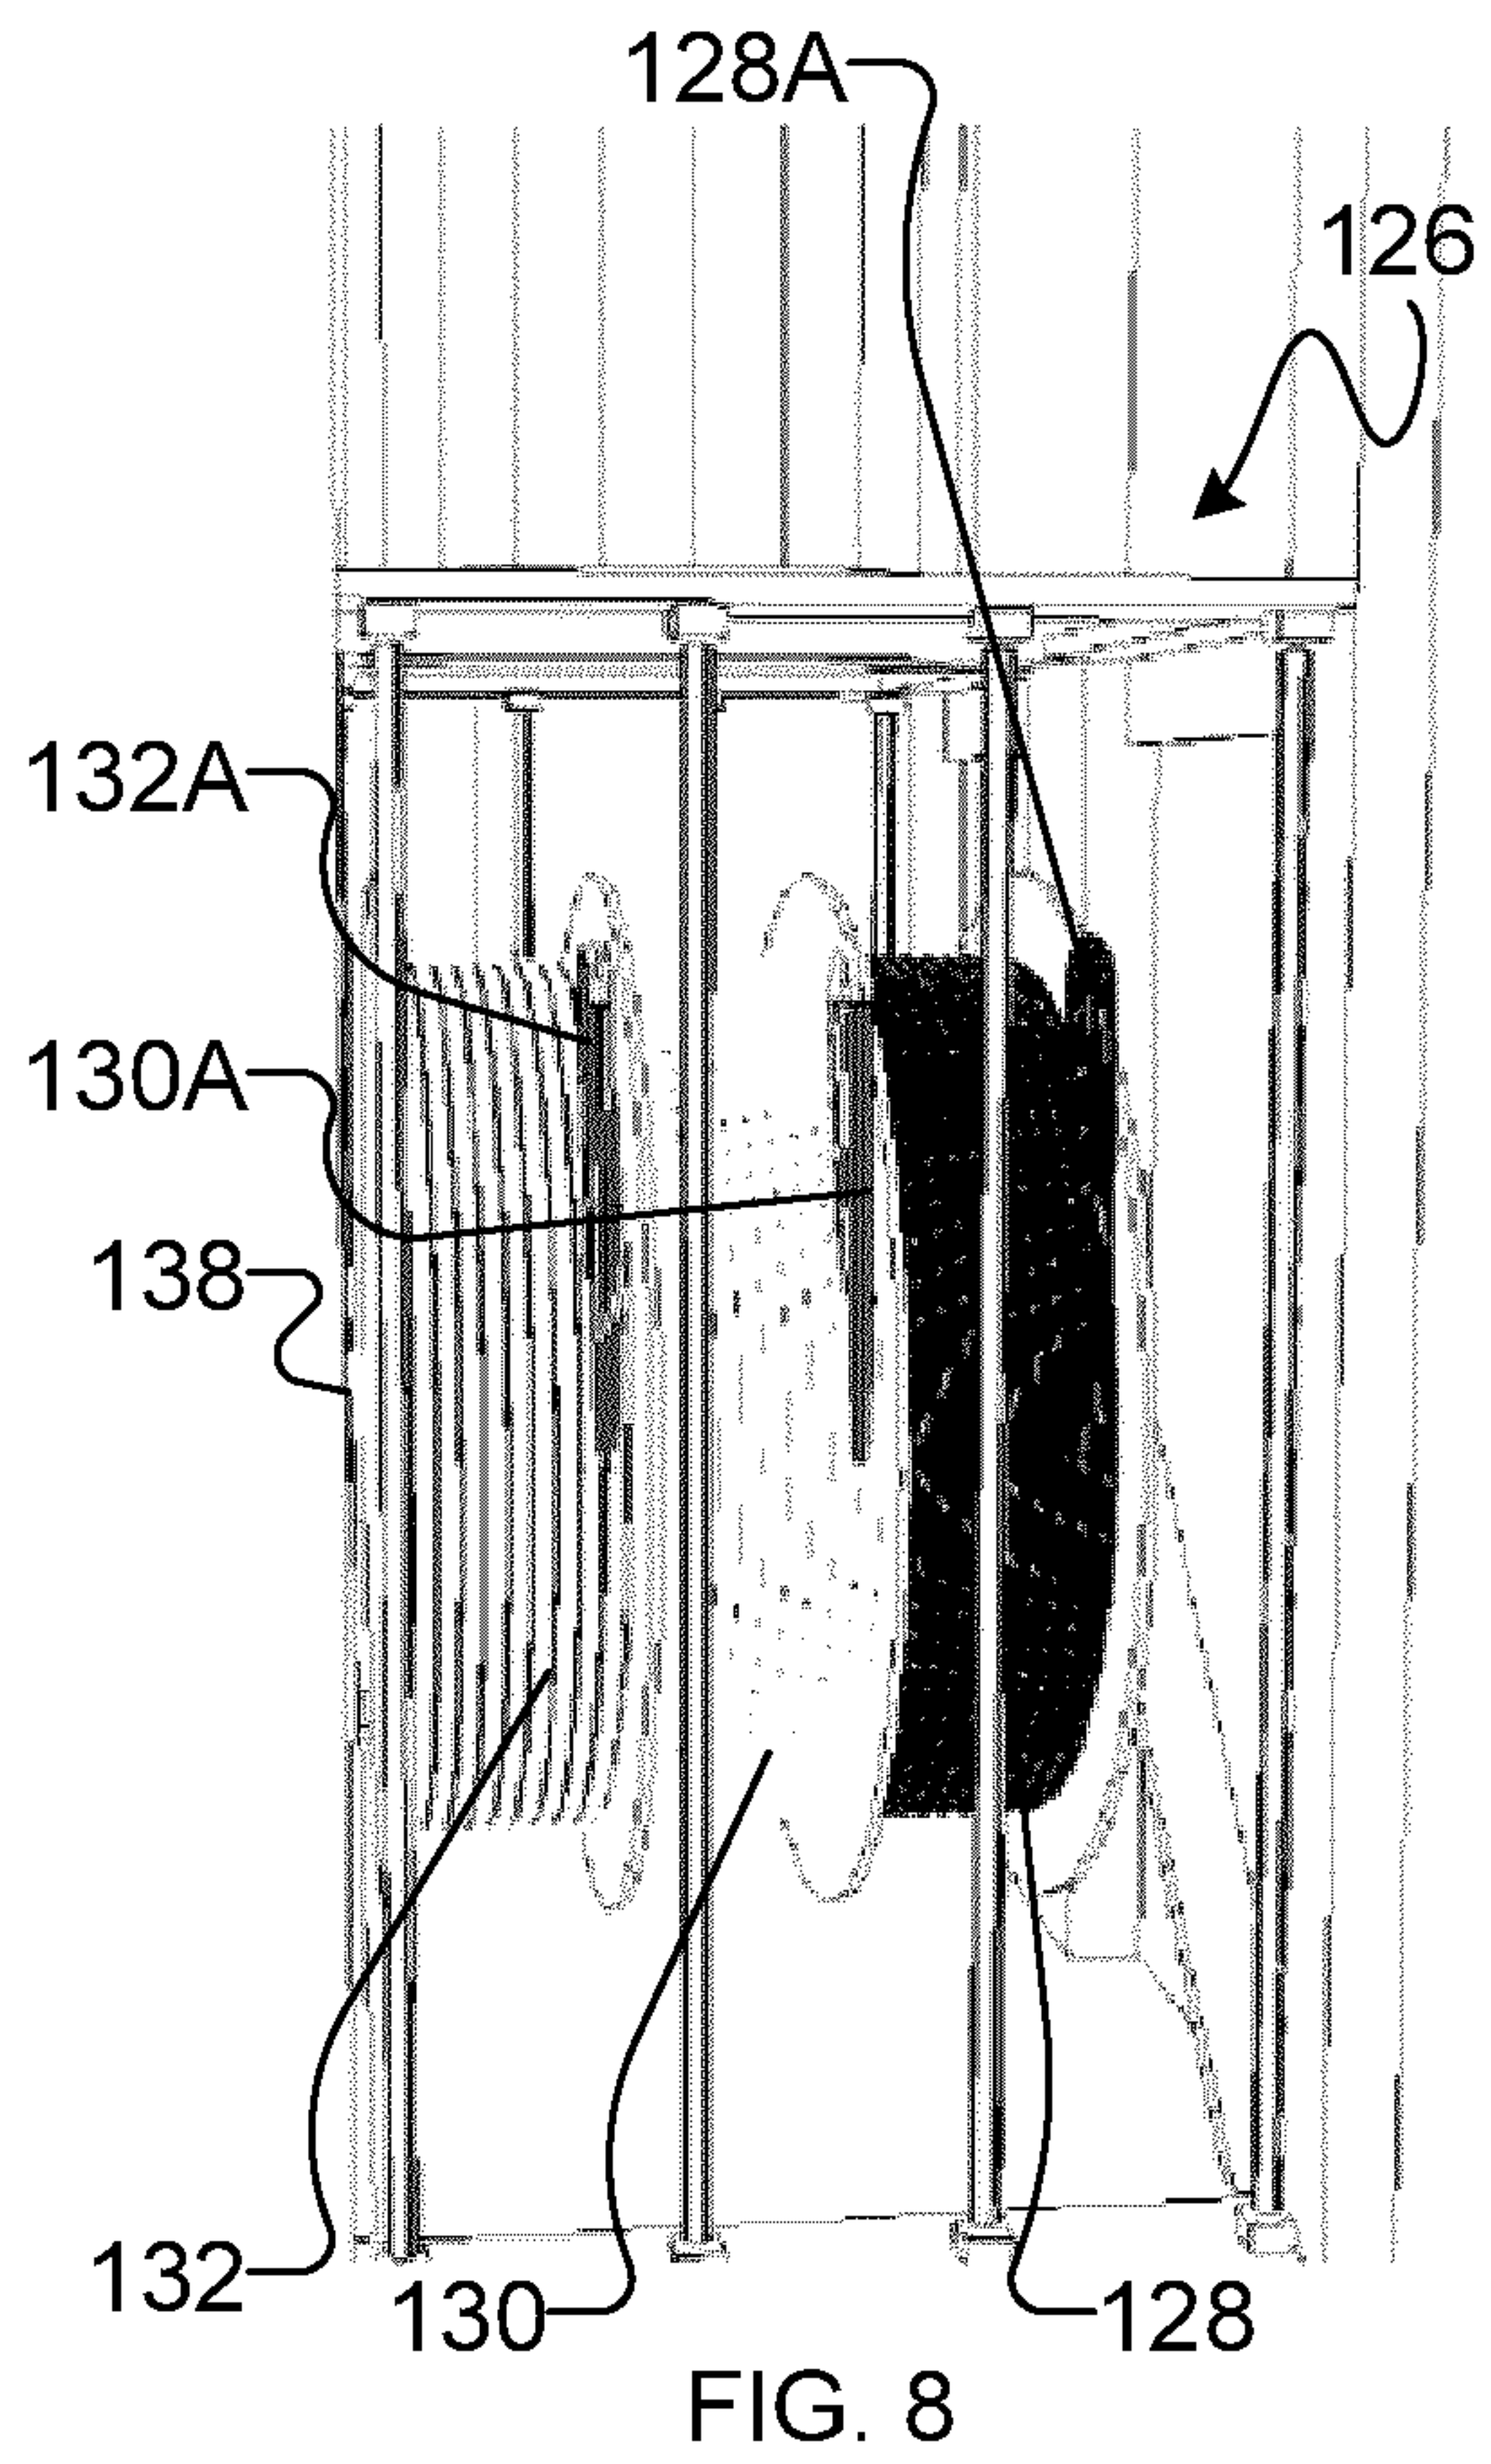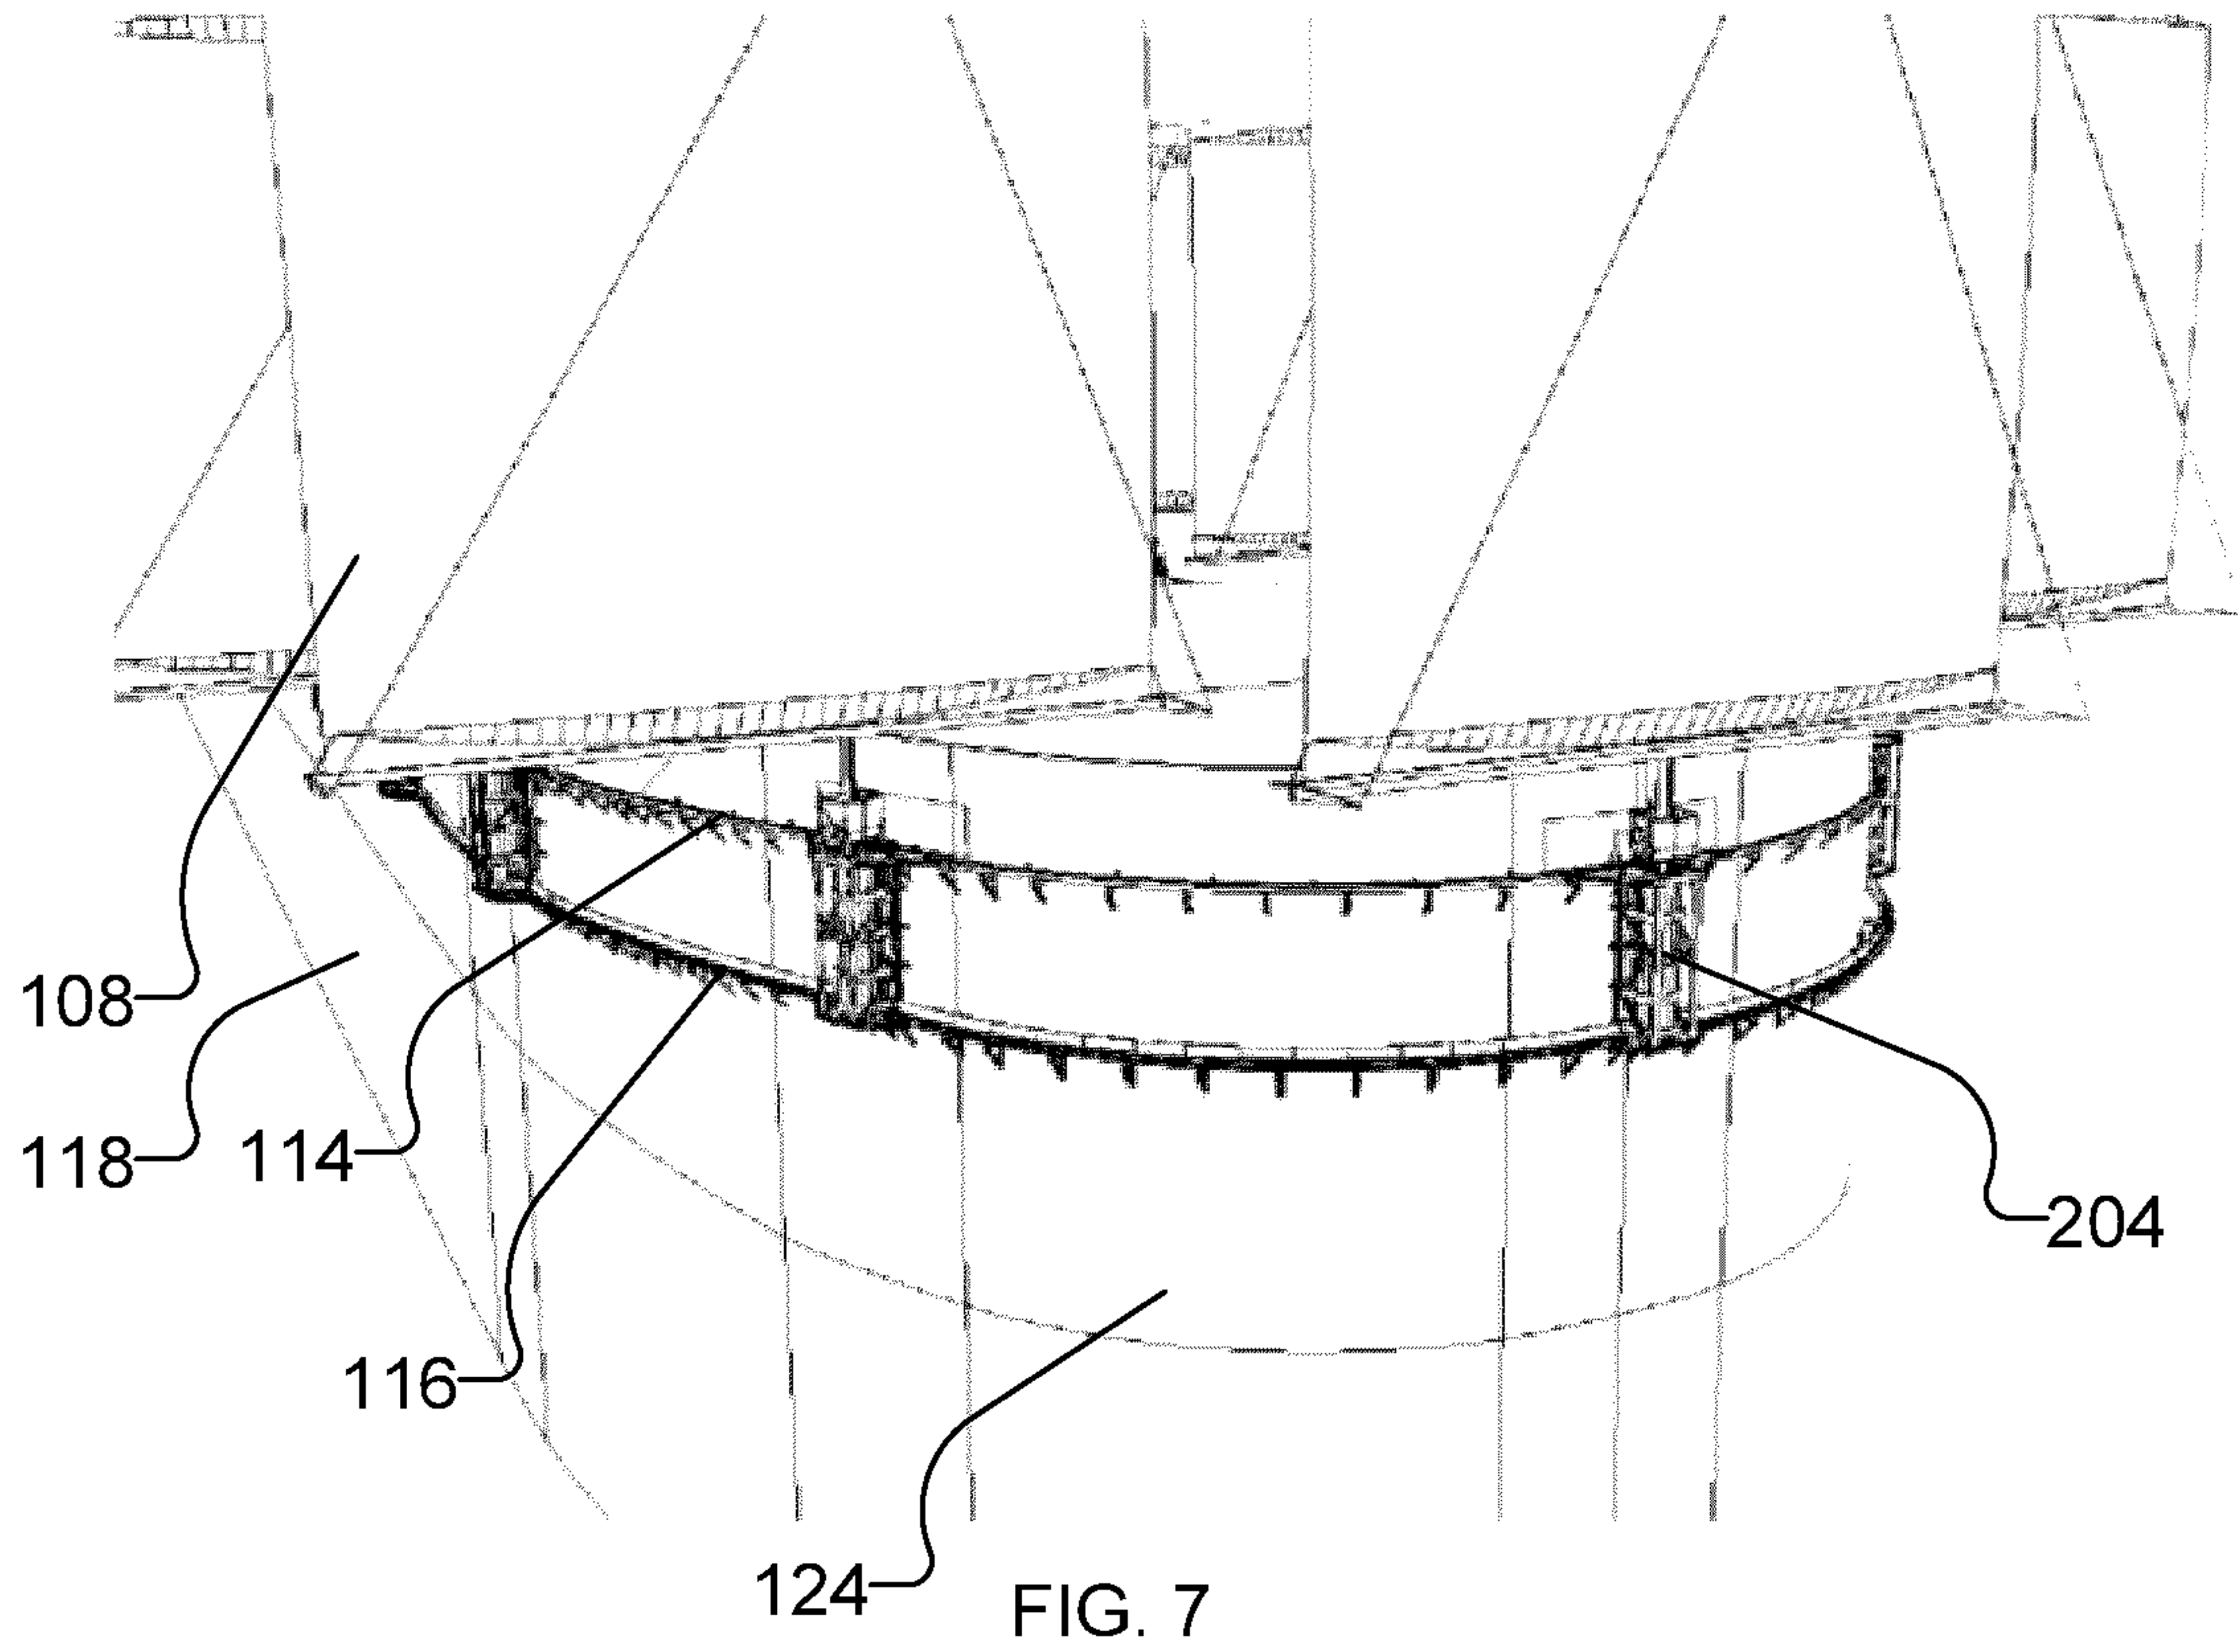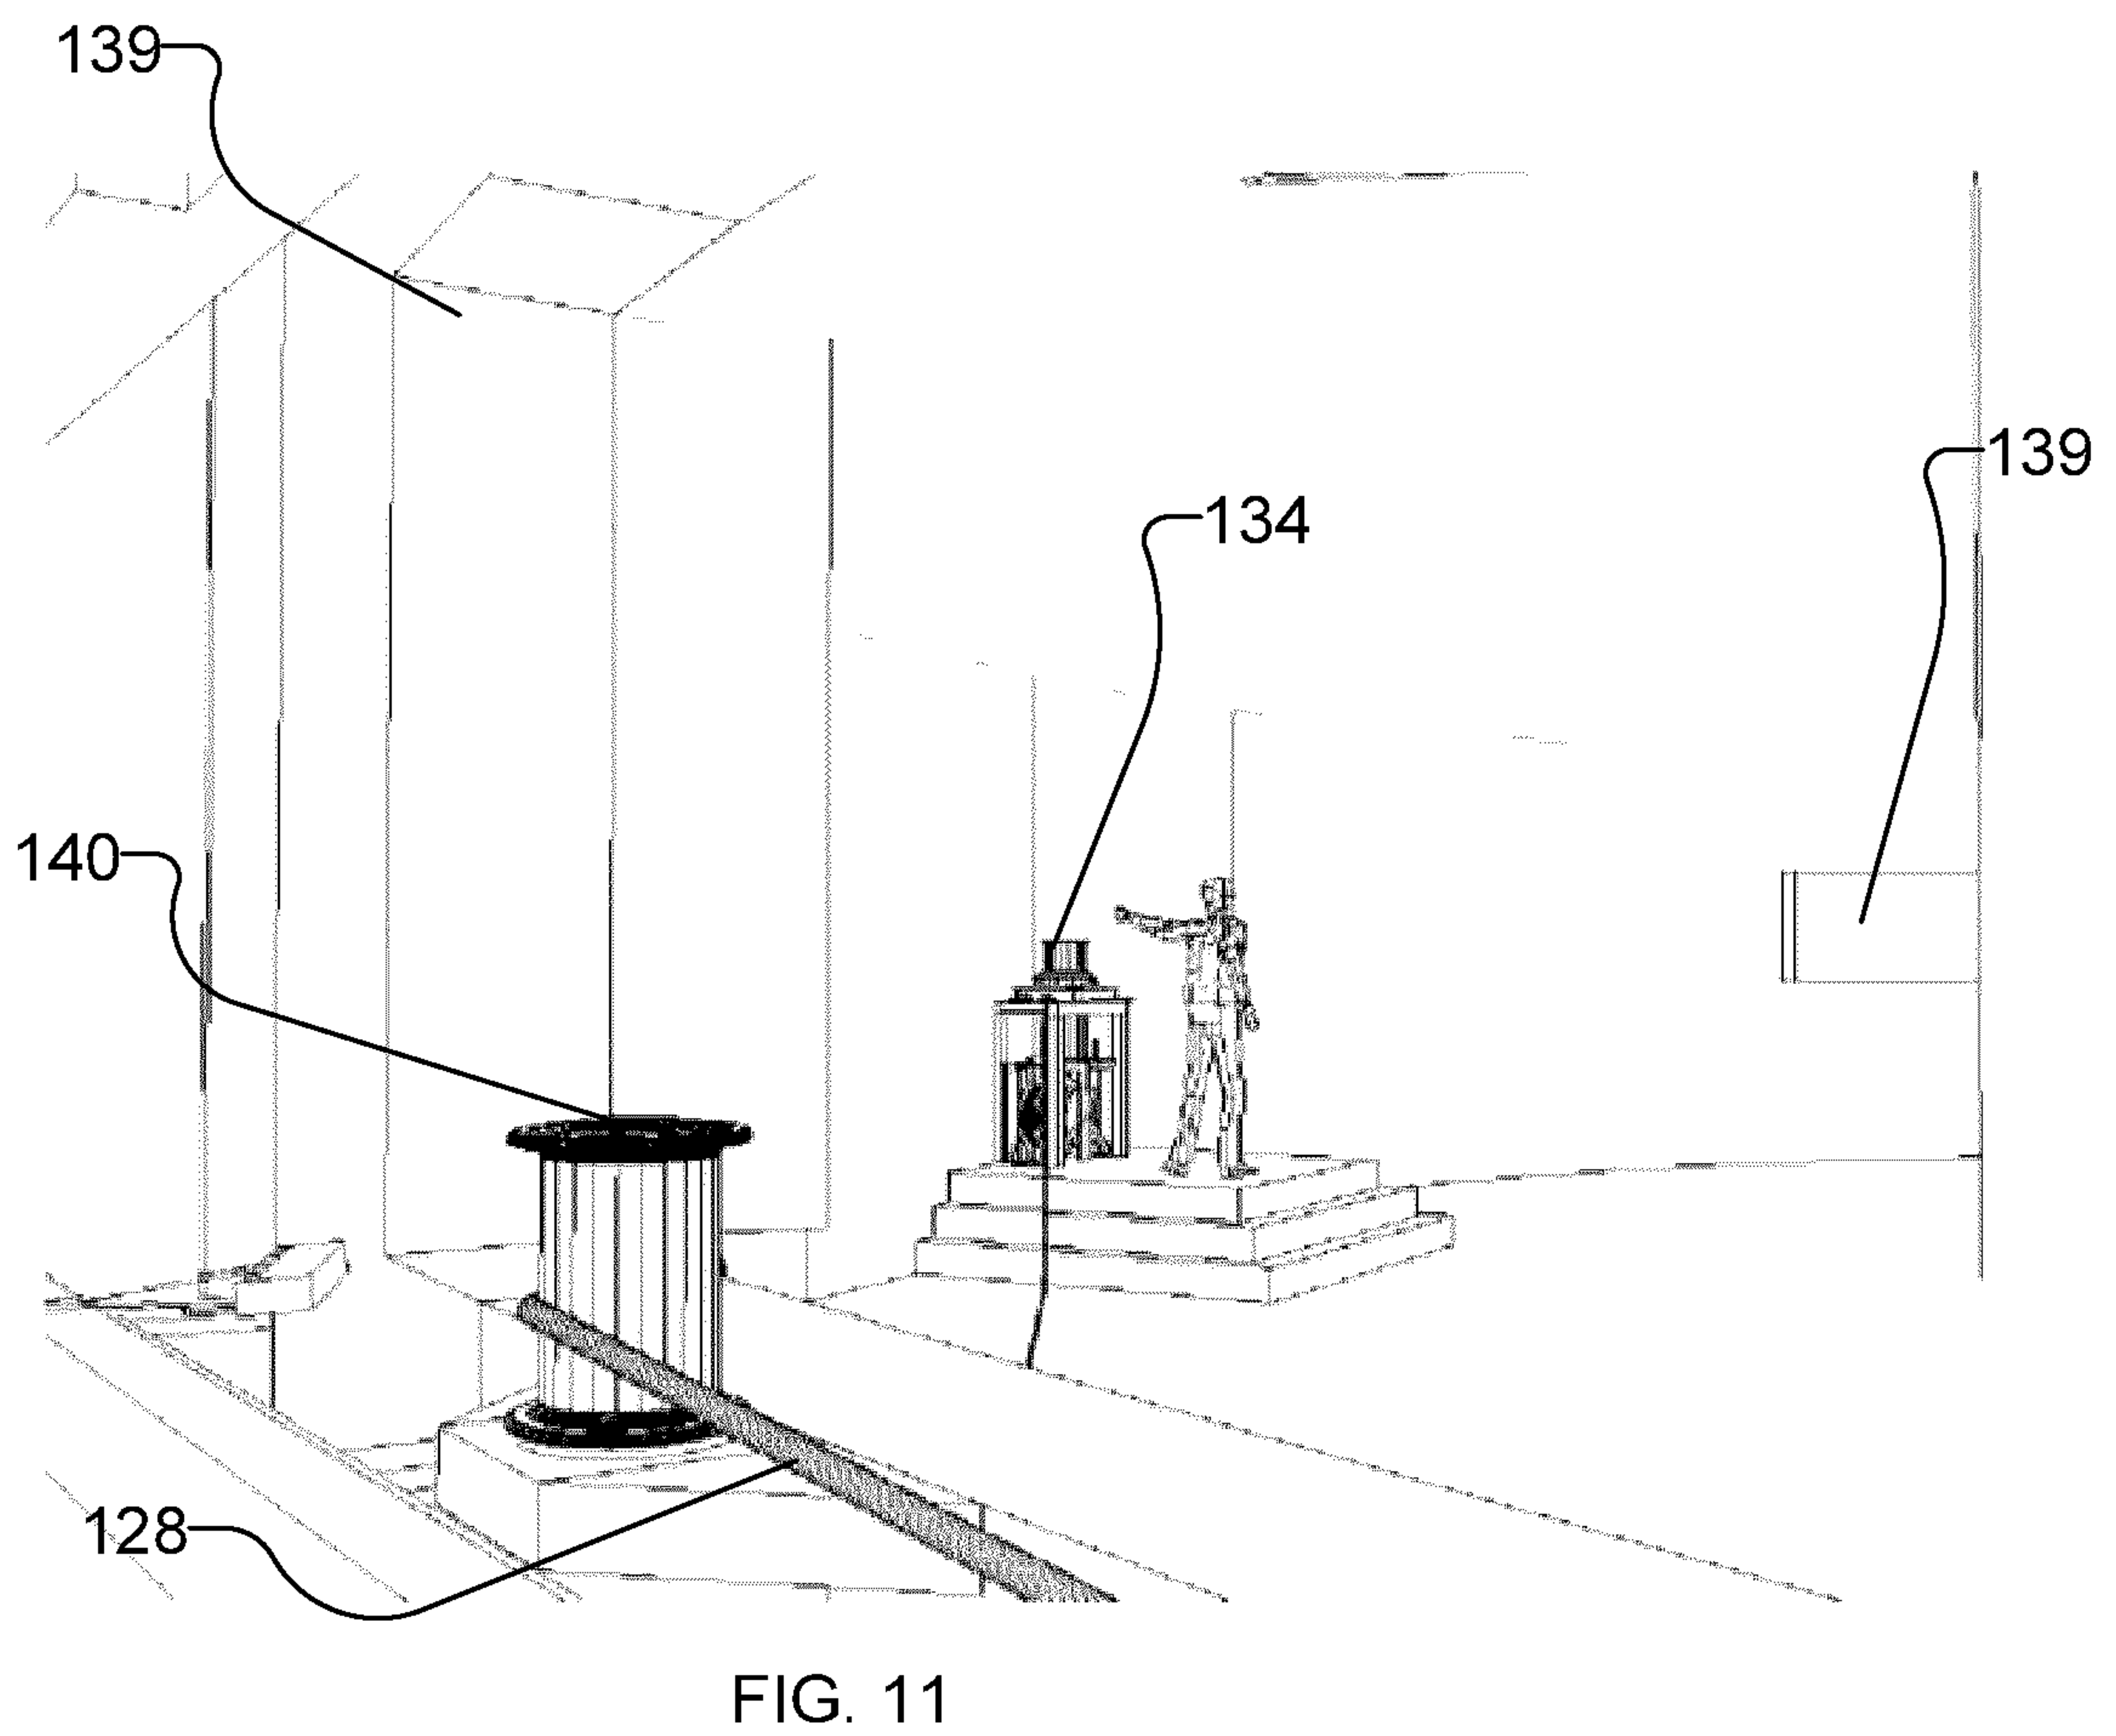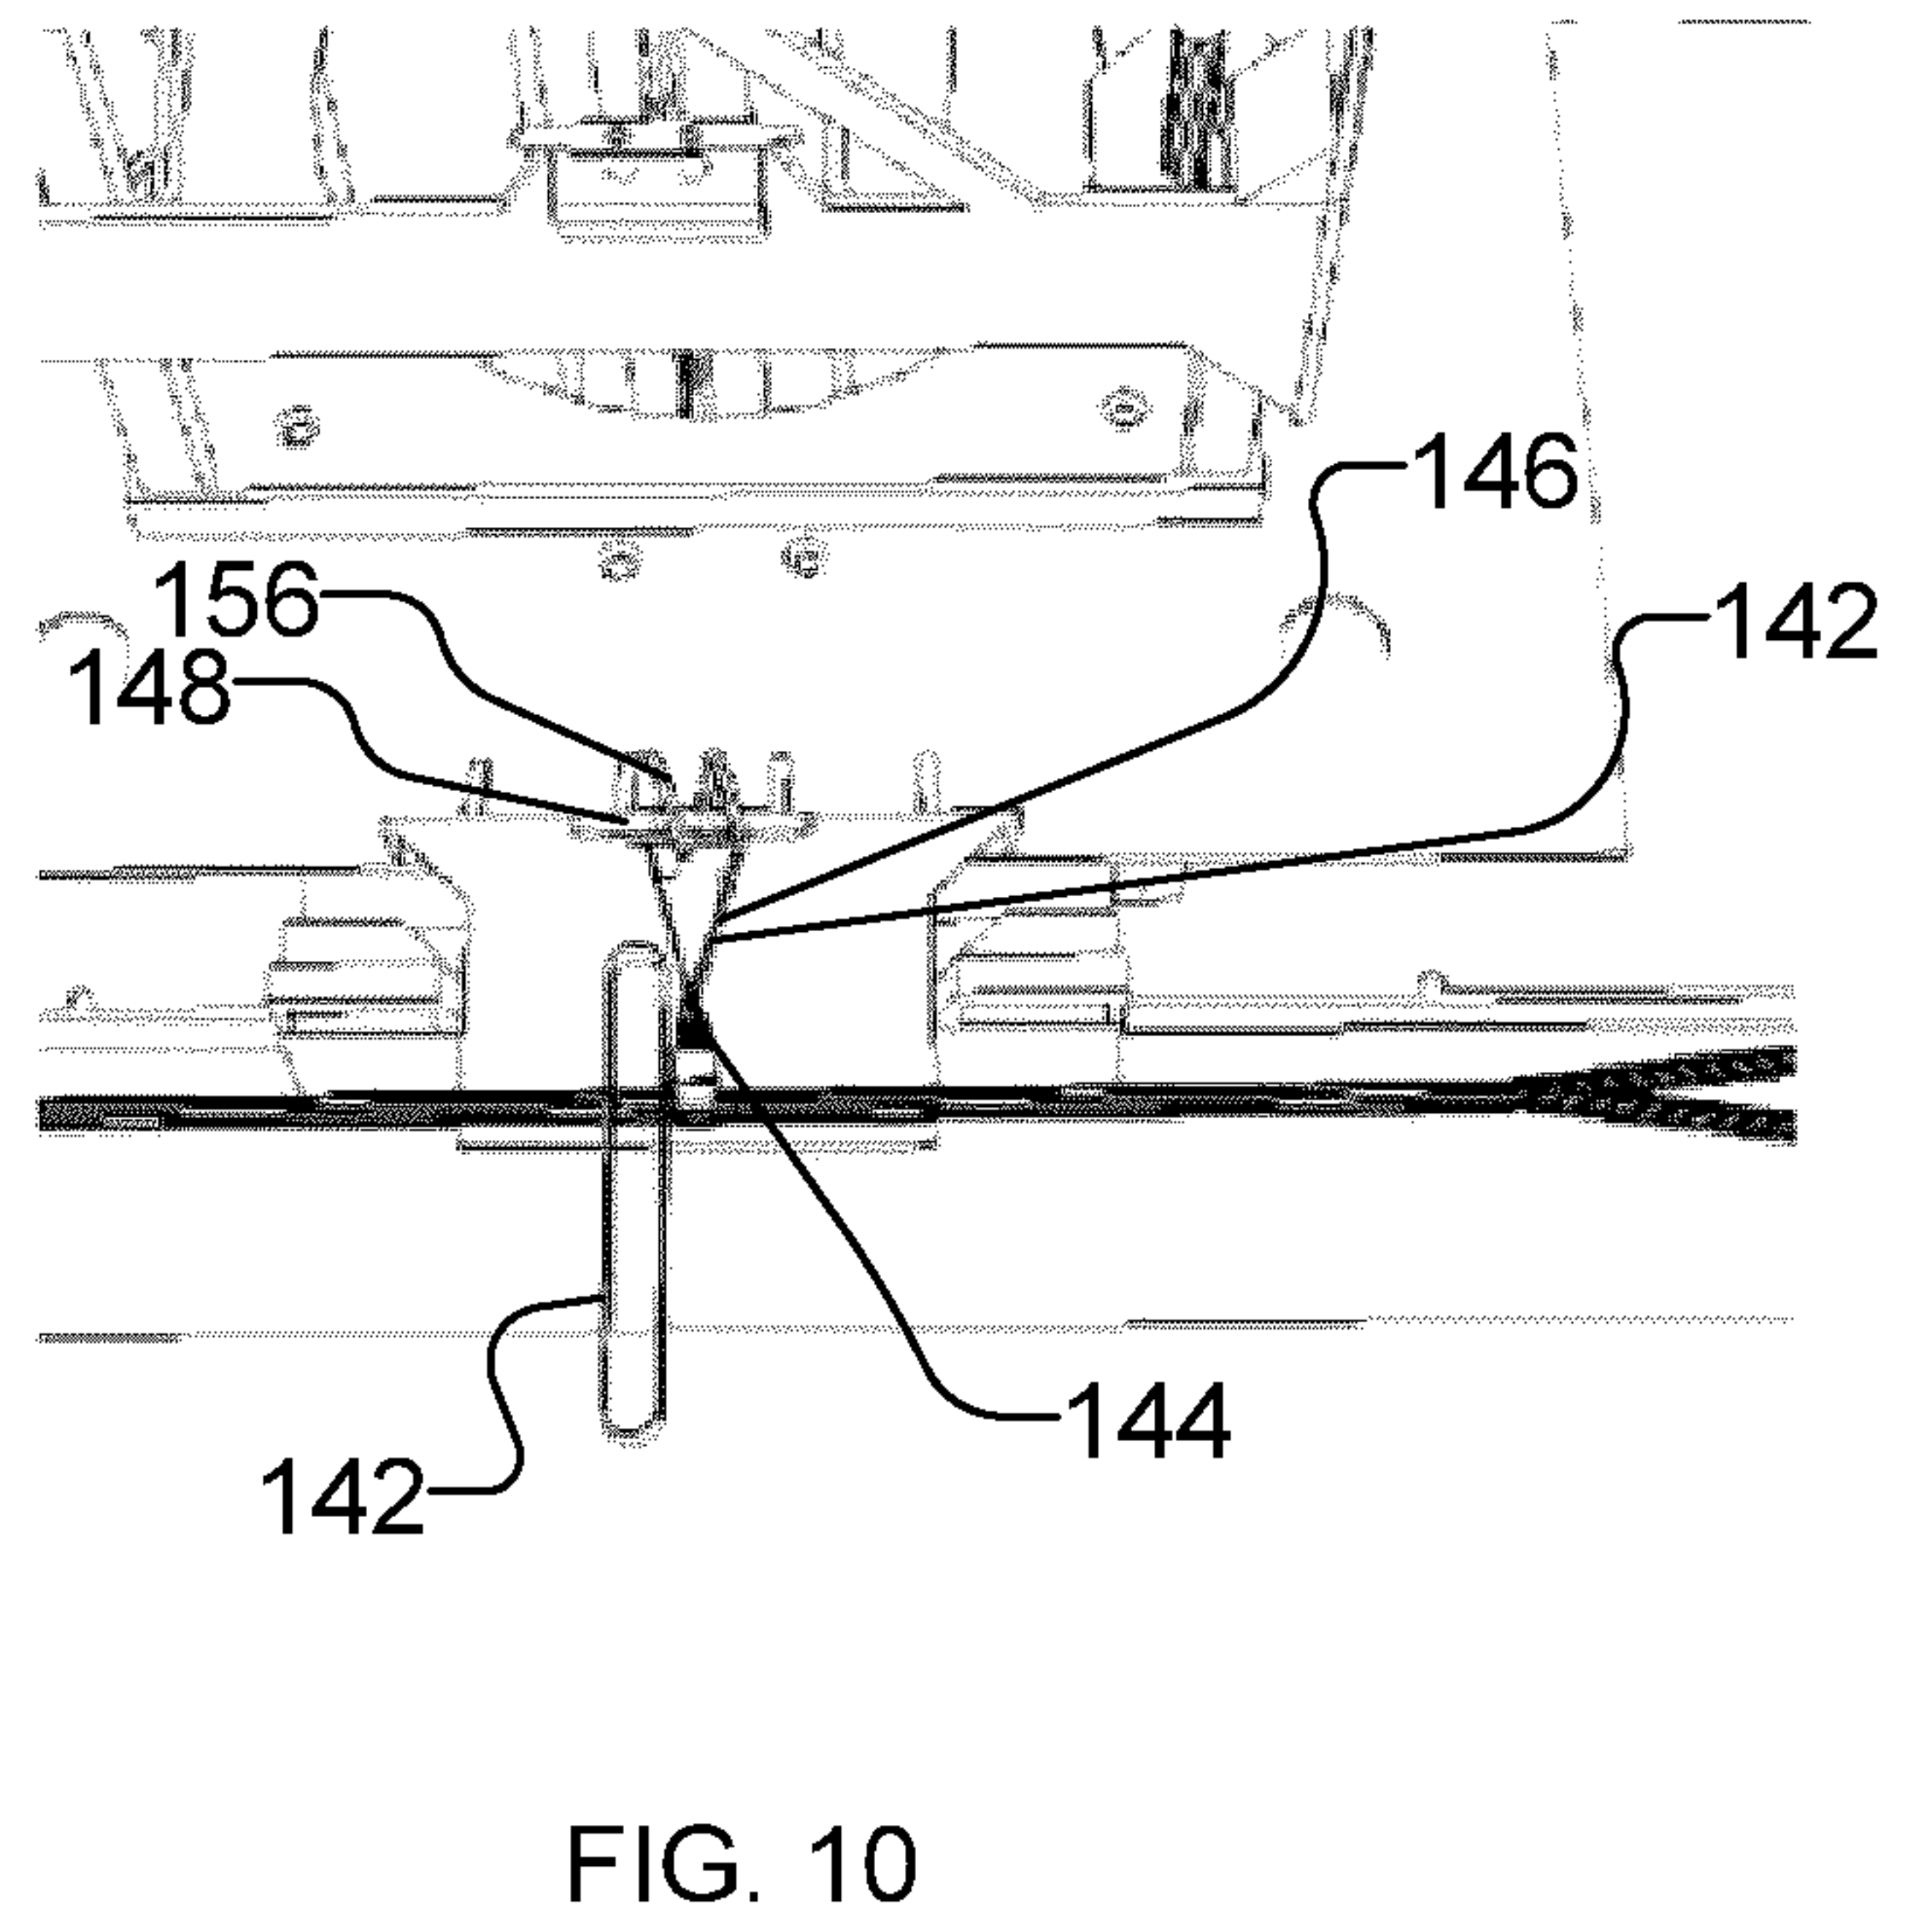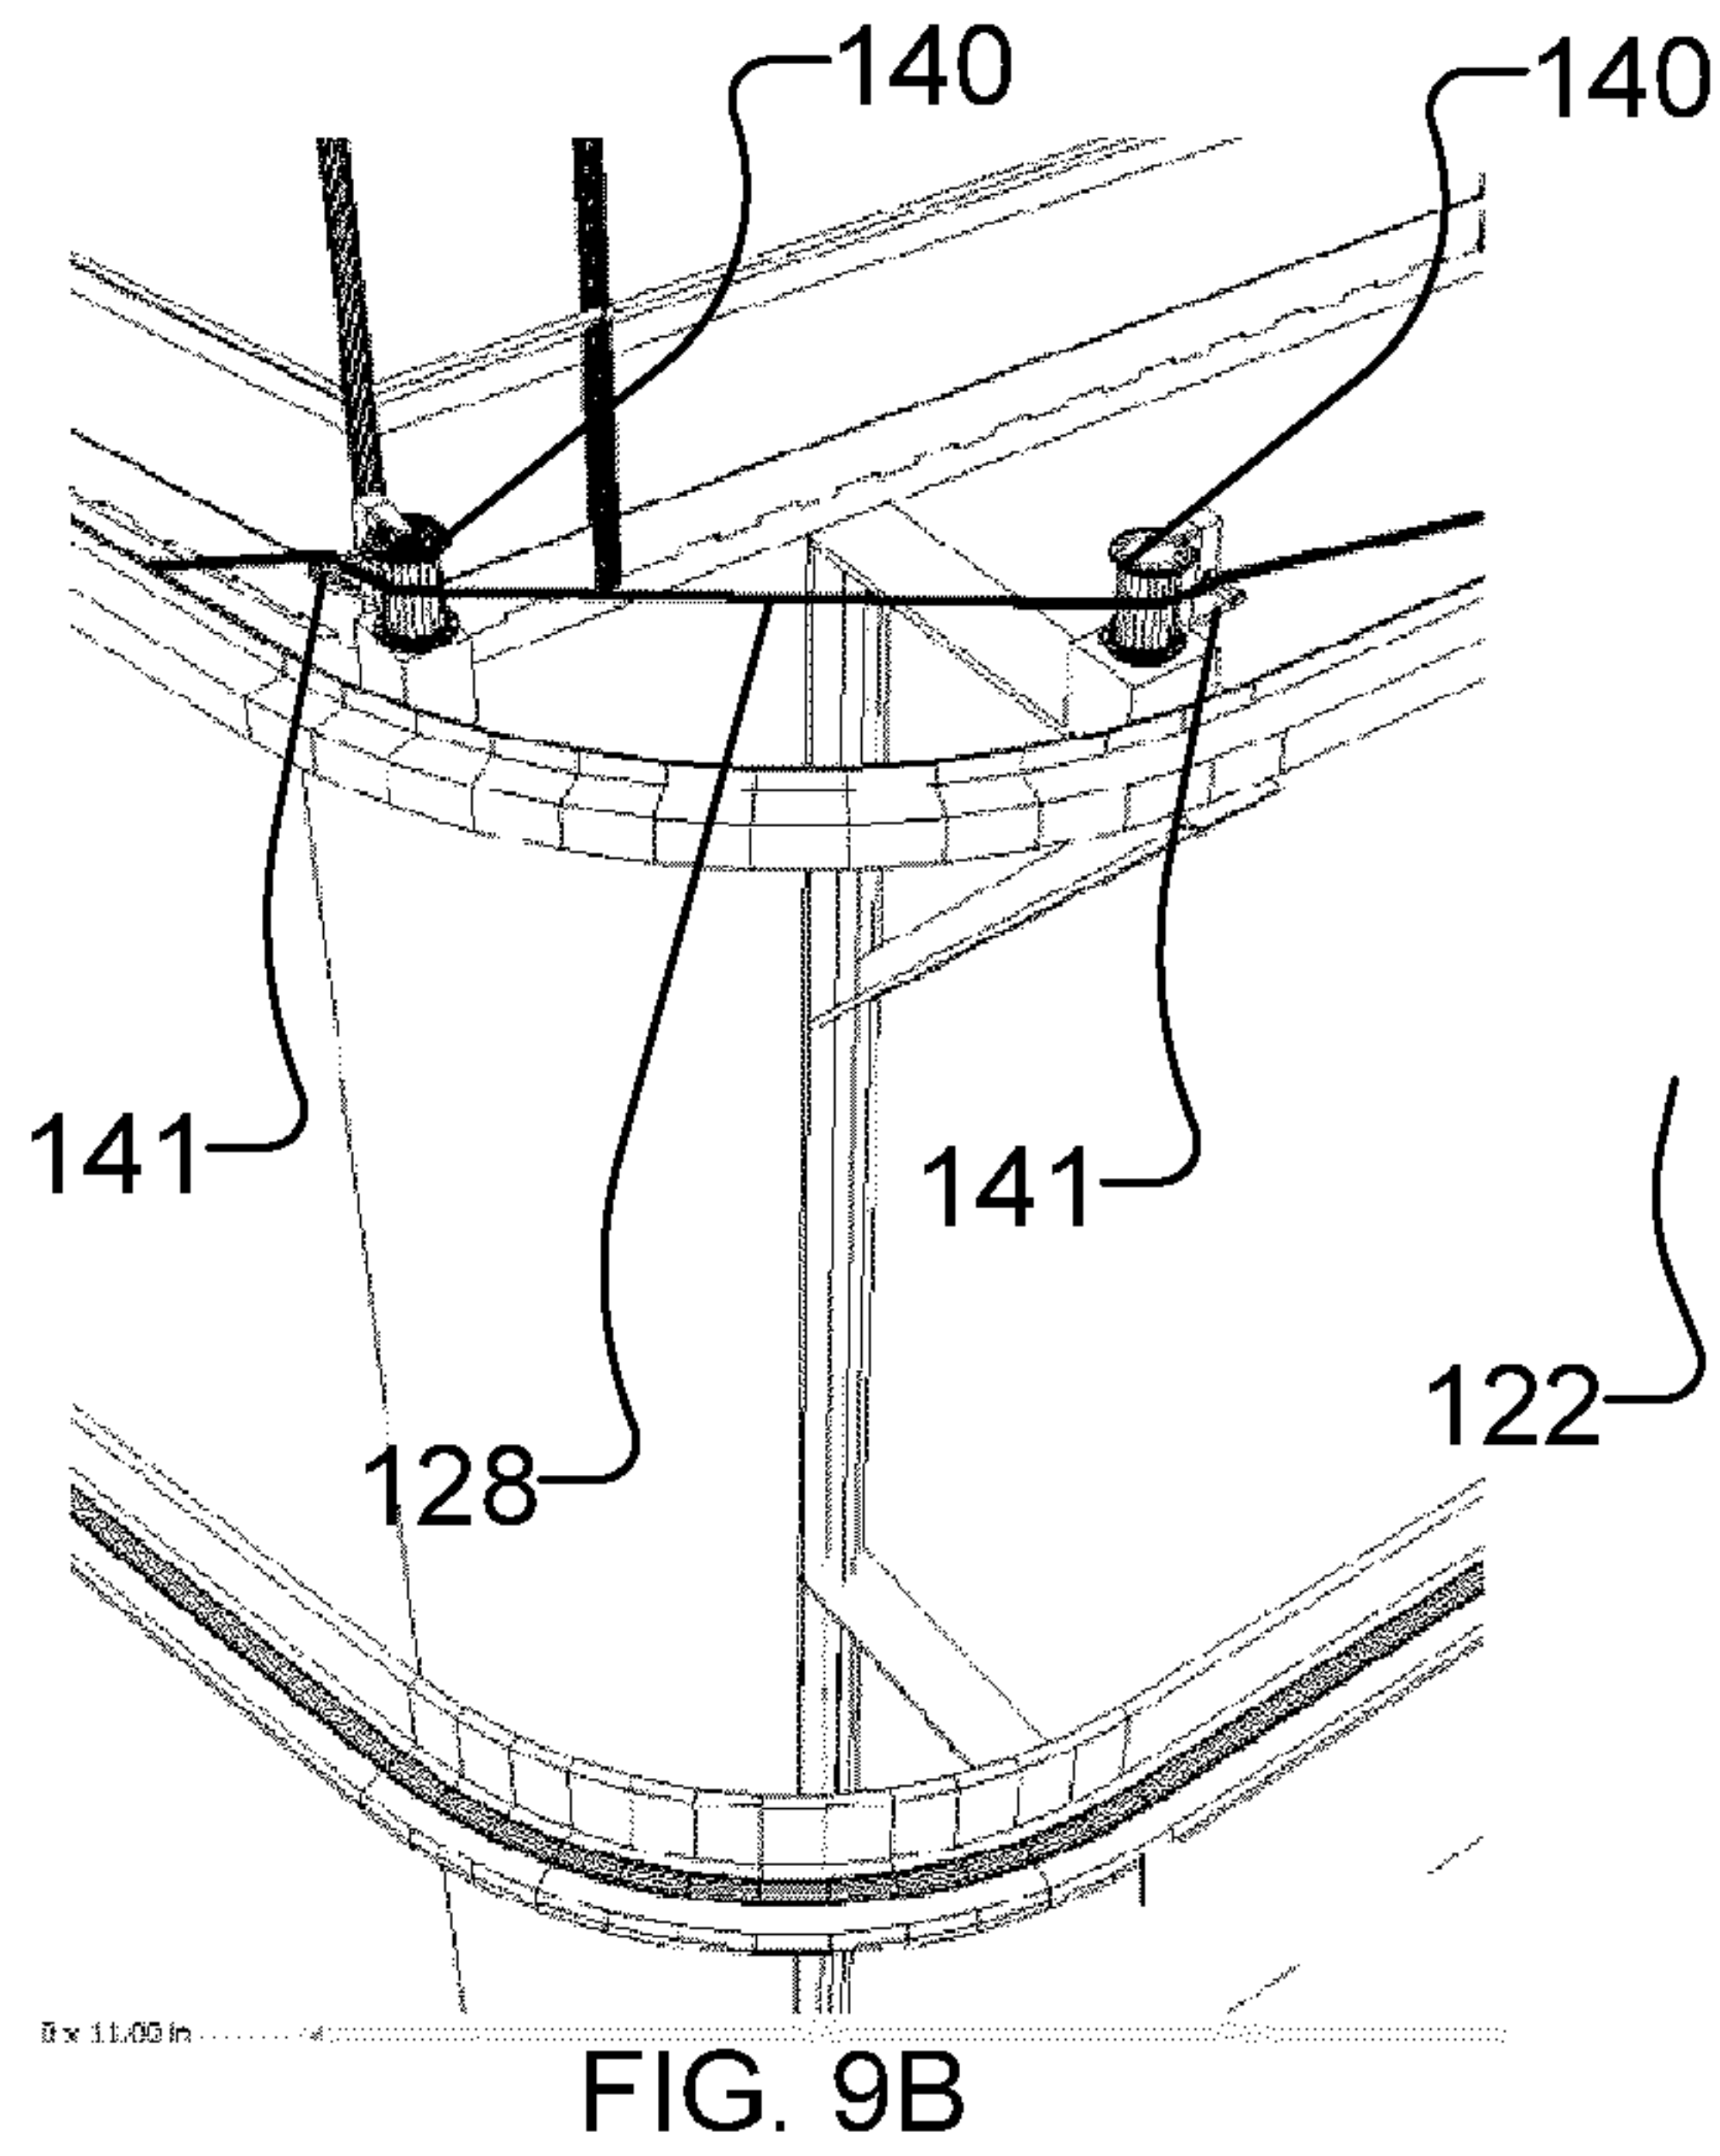

5/19



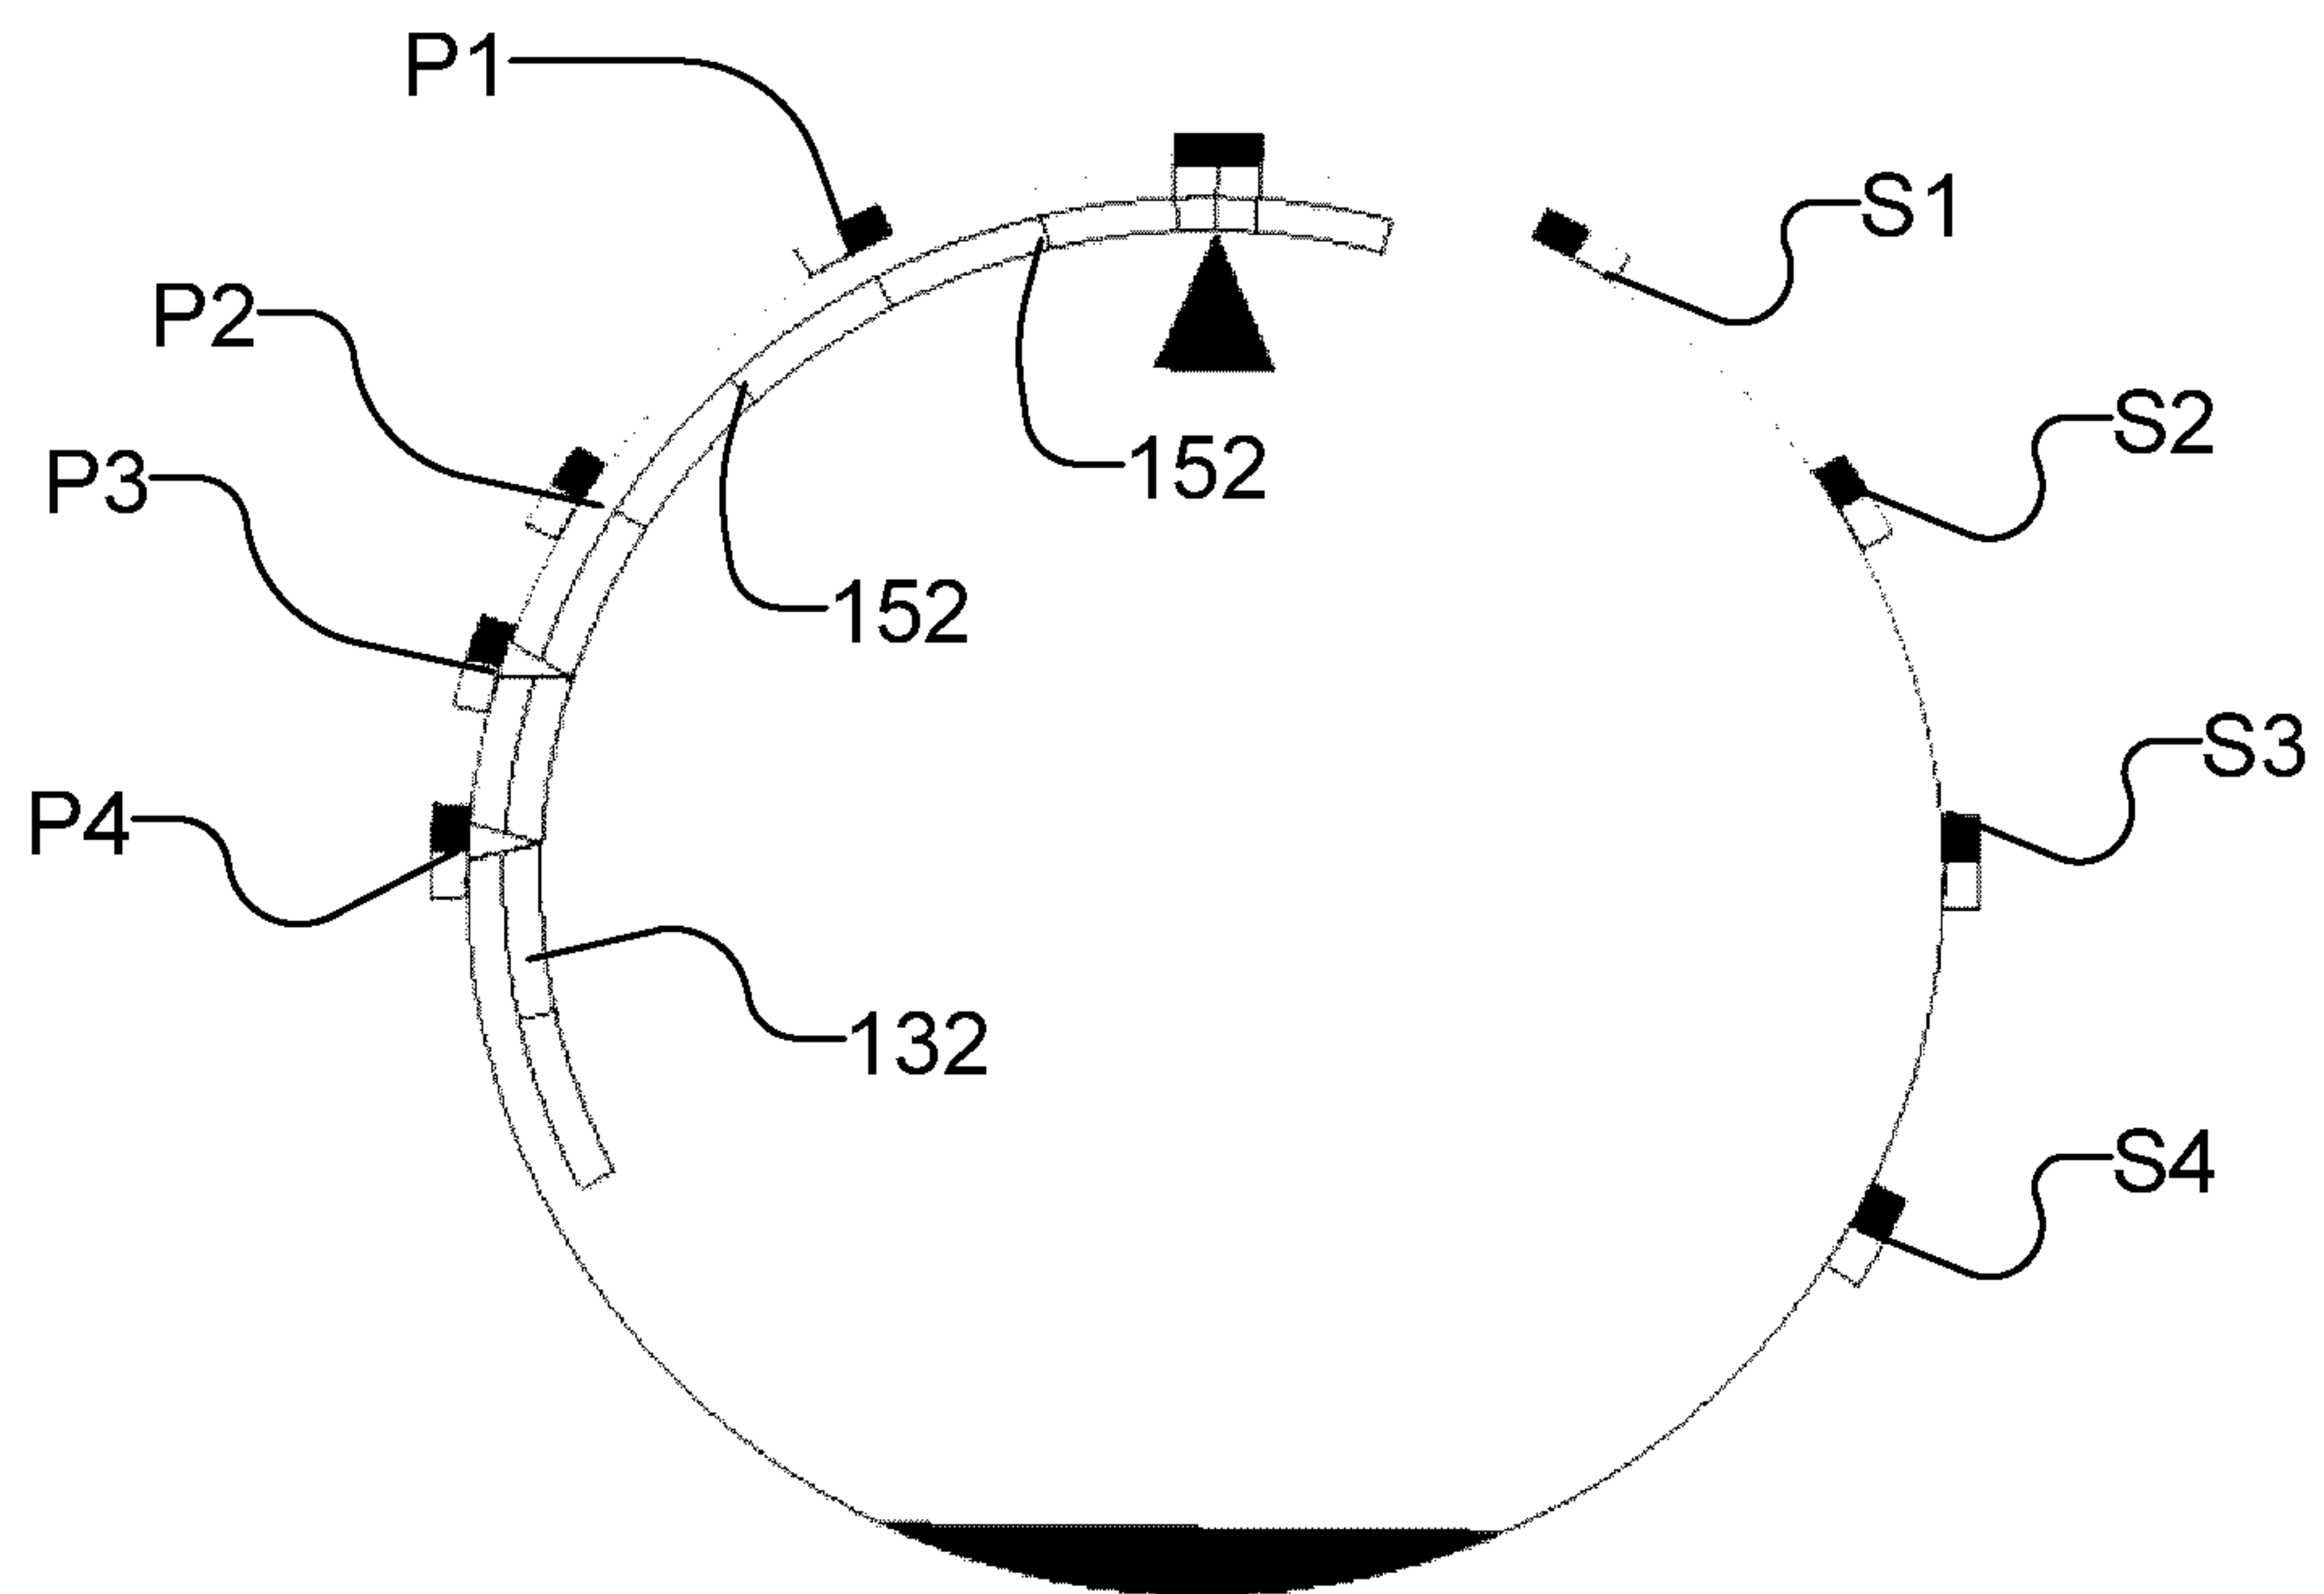
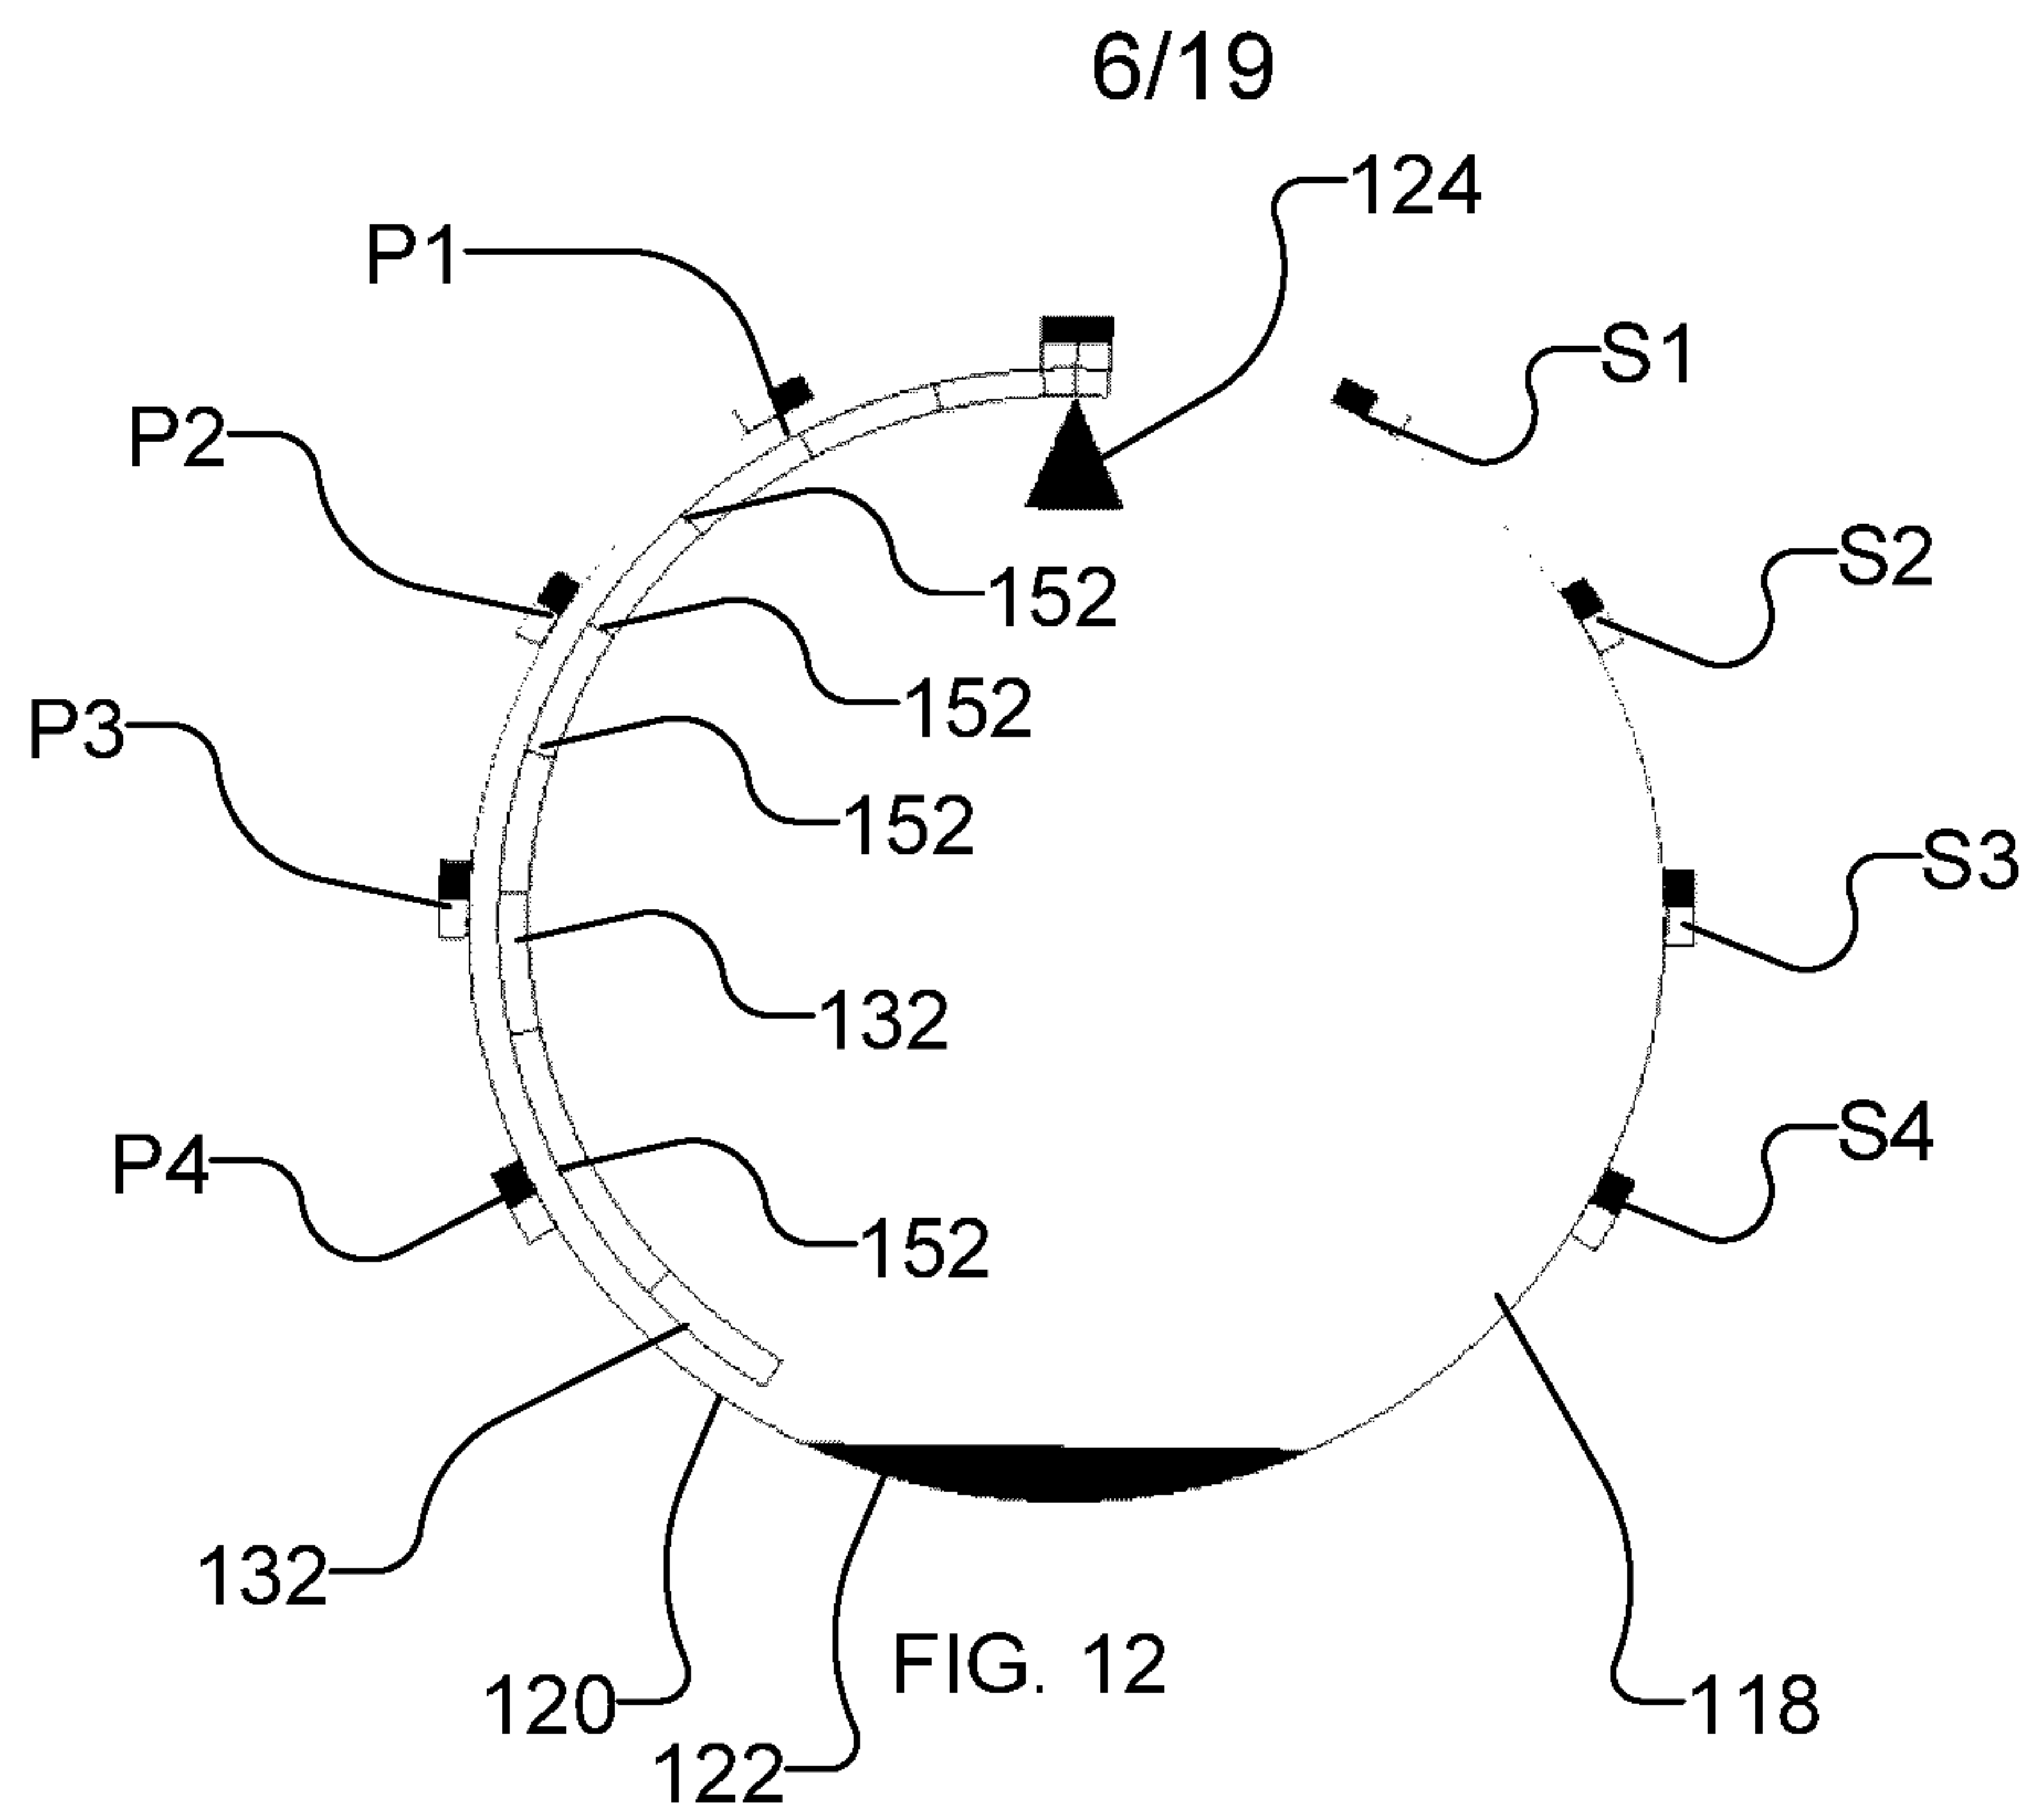


FIG. 13

7/19

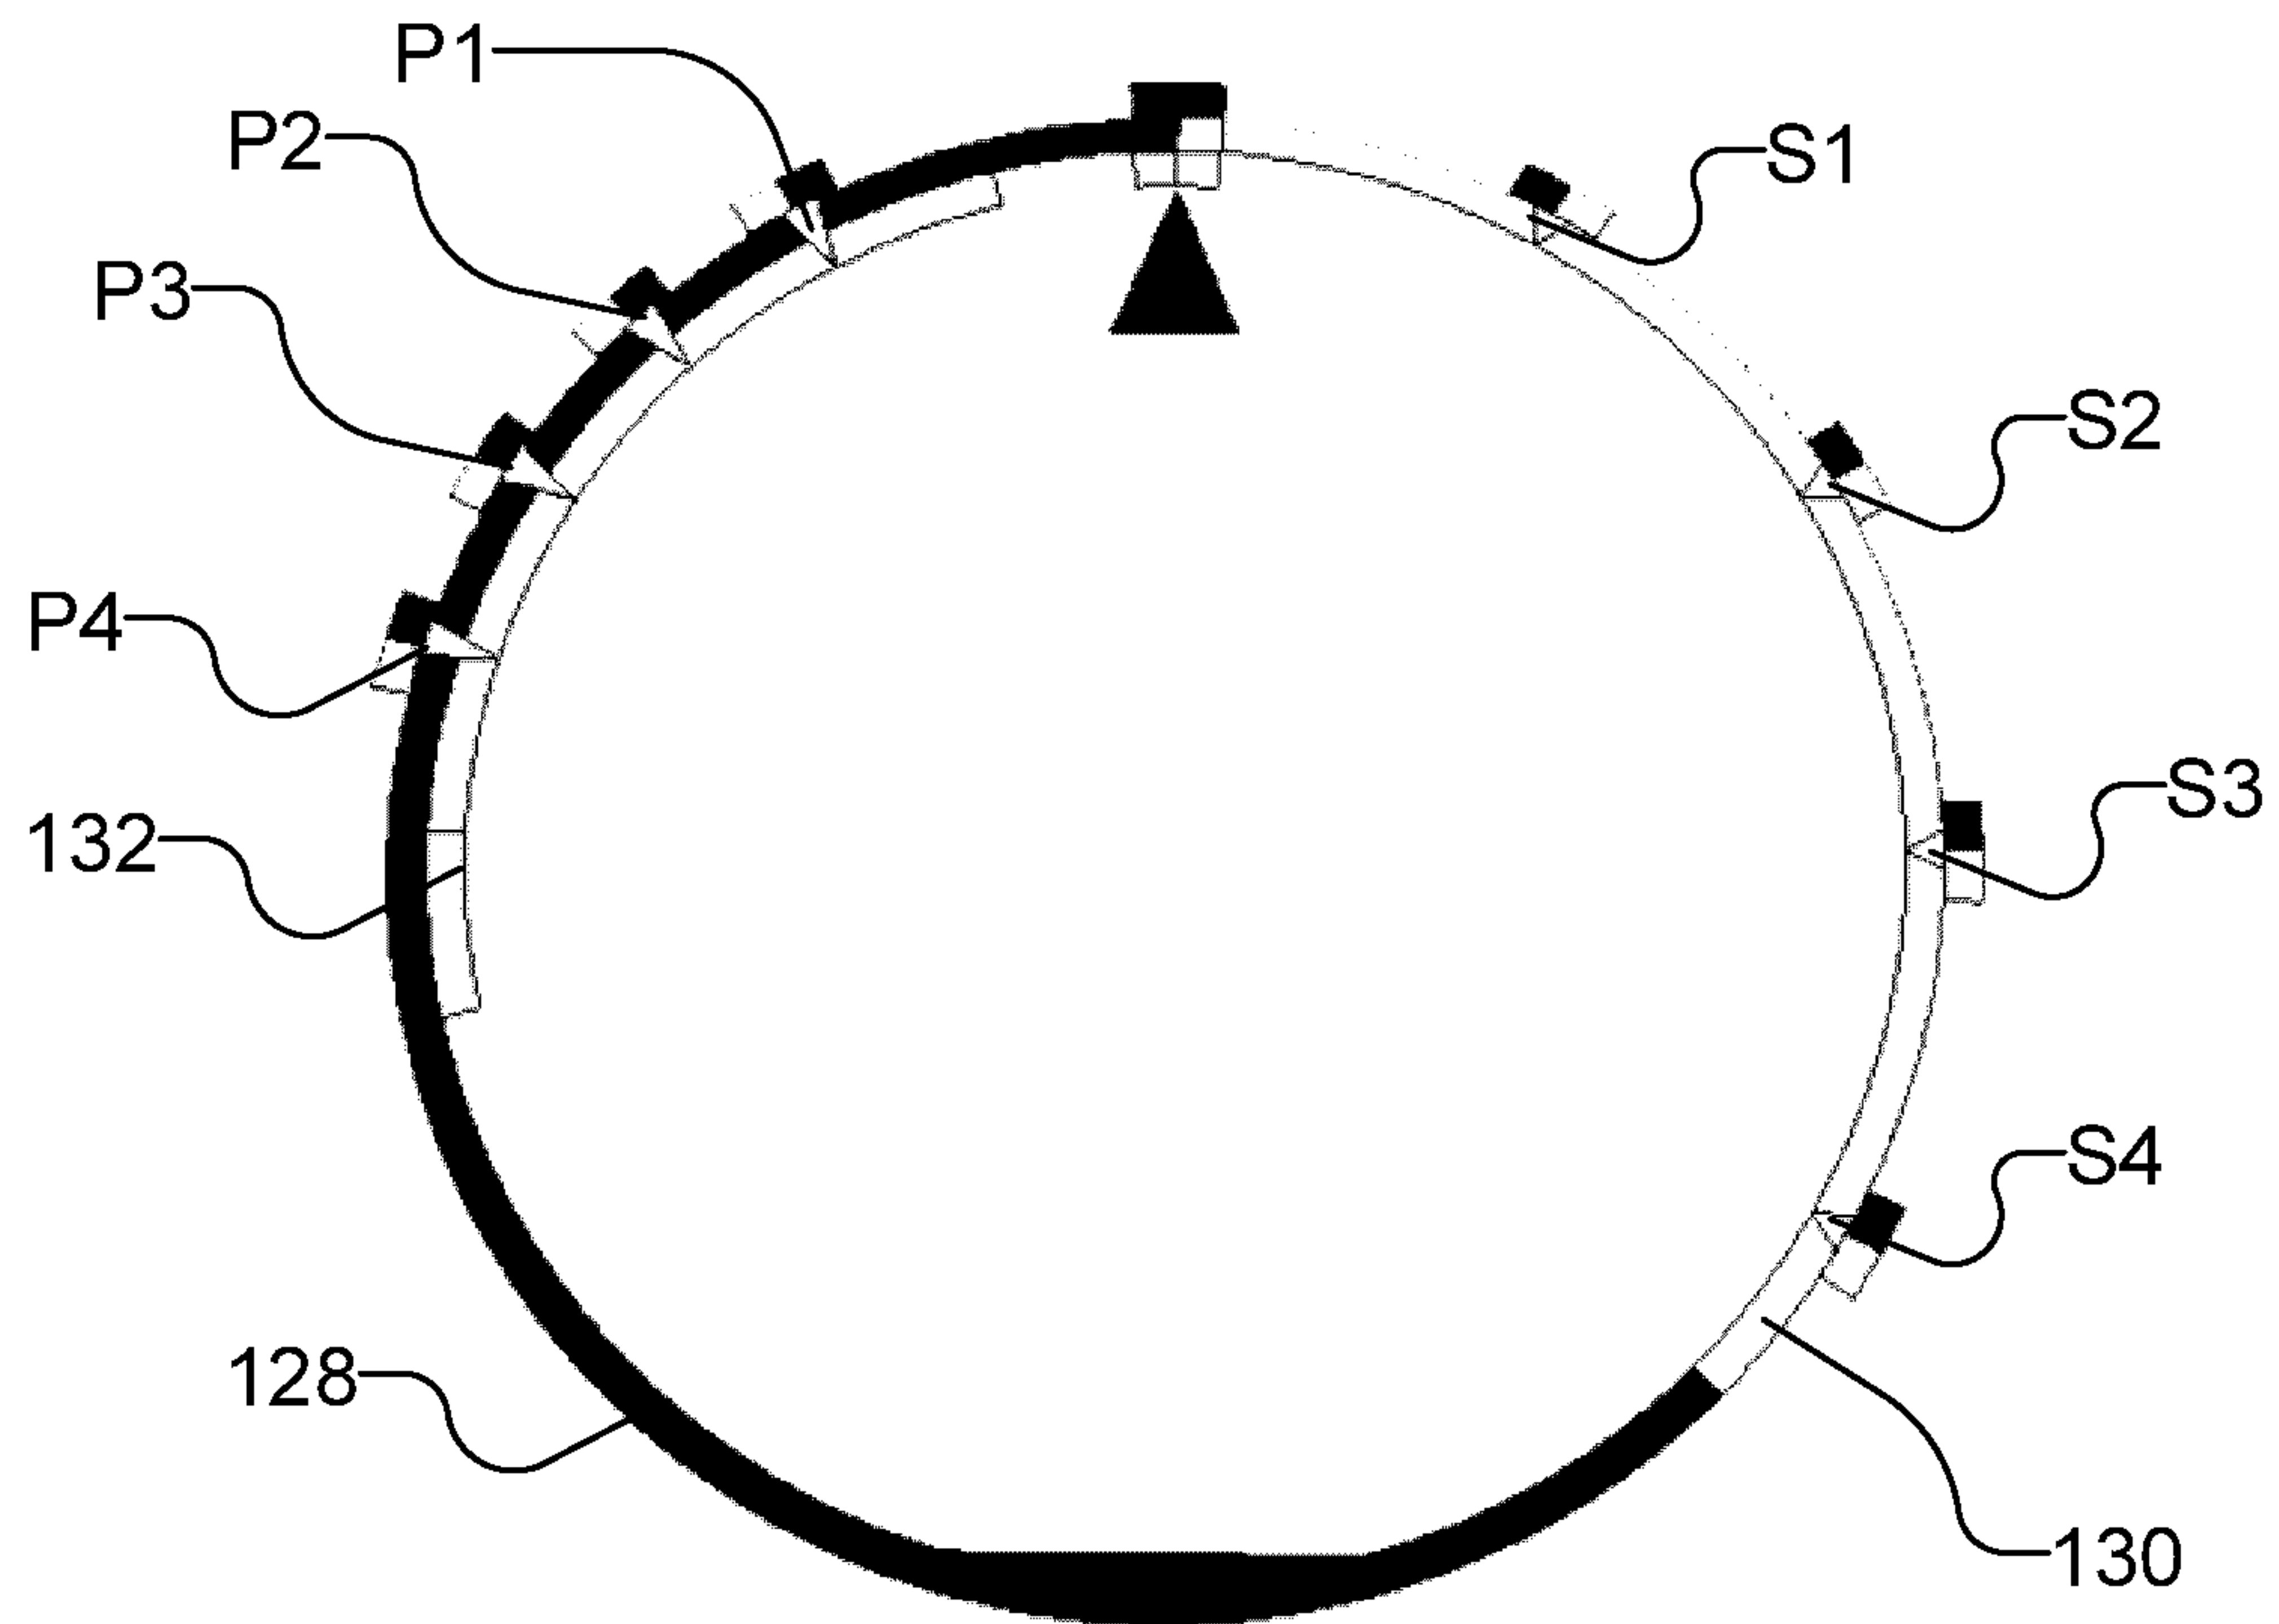


FIG. 14

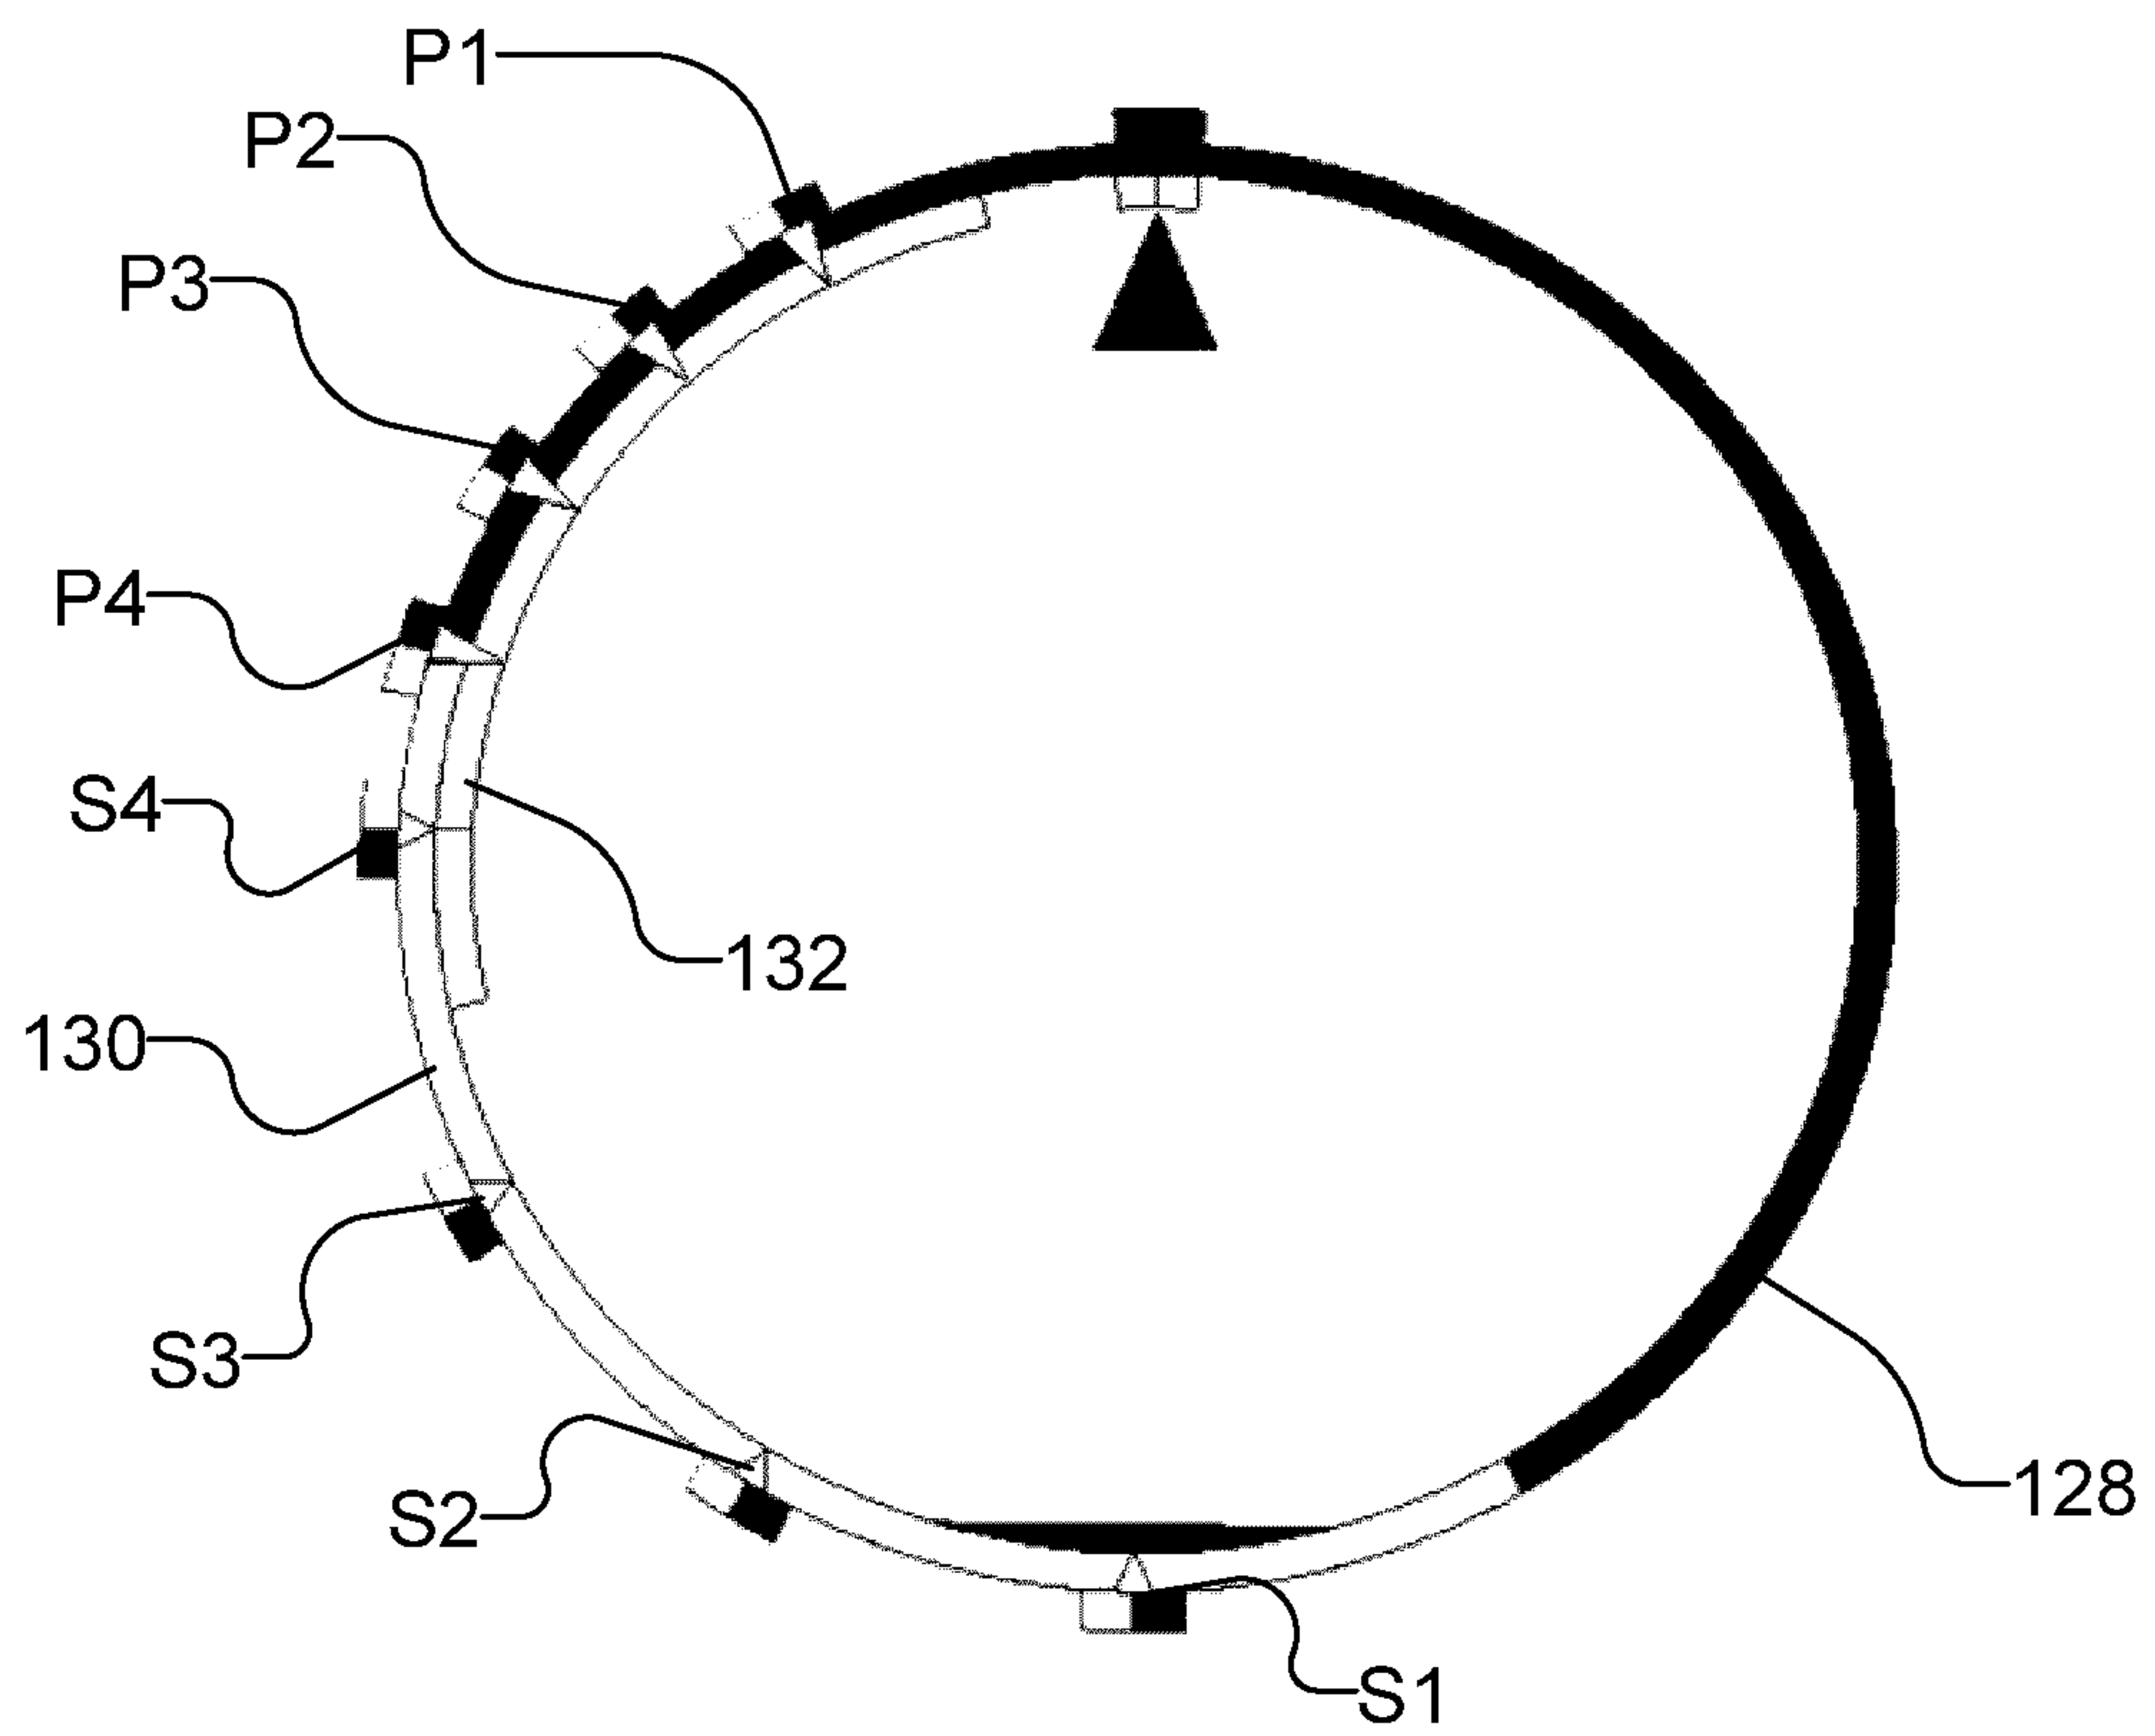


FIG. 15

8/19

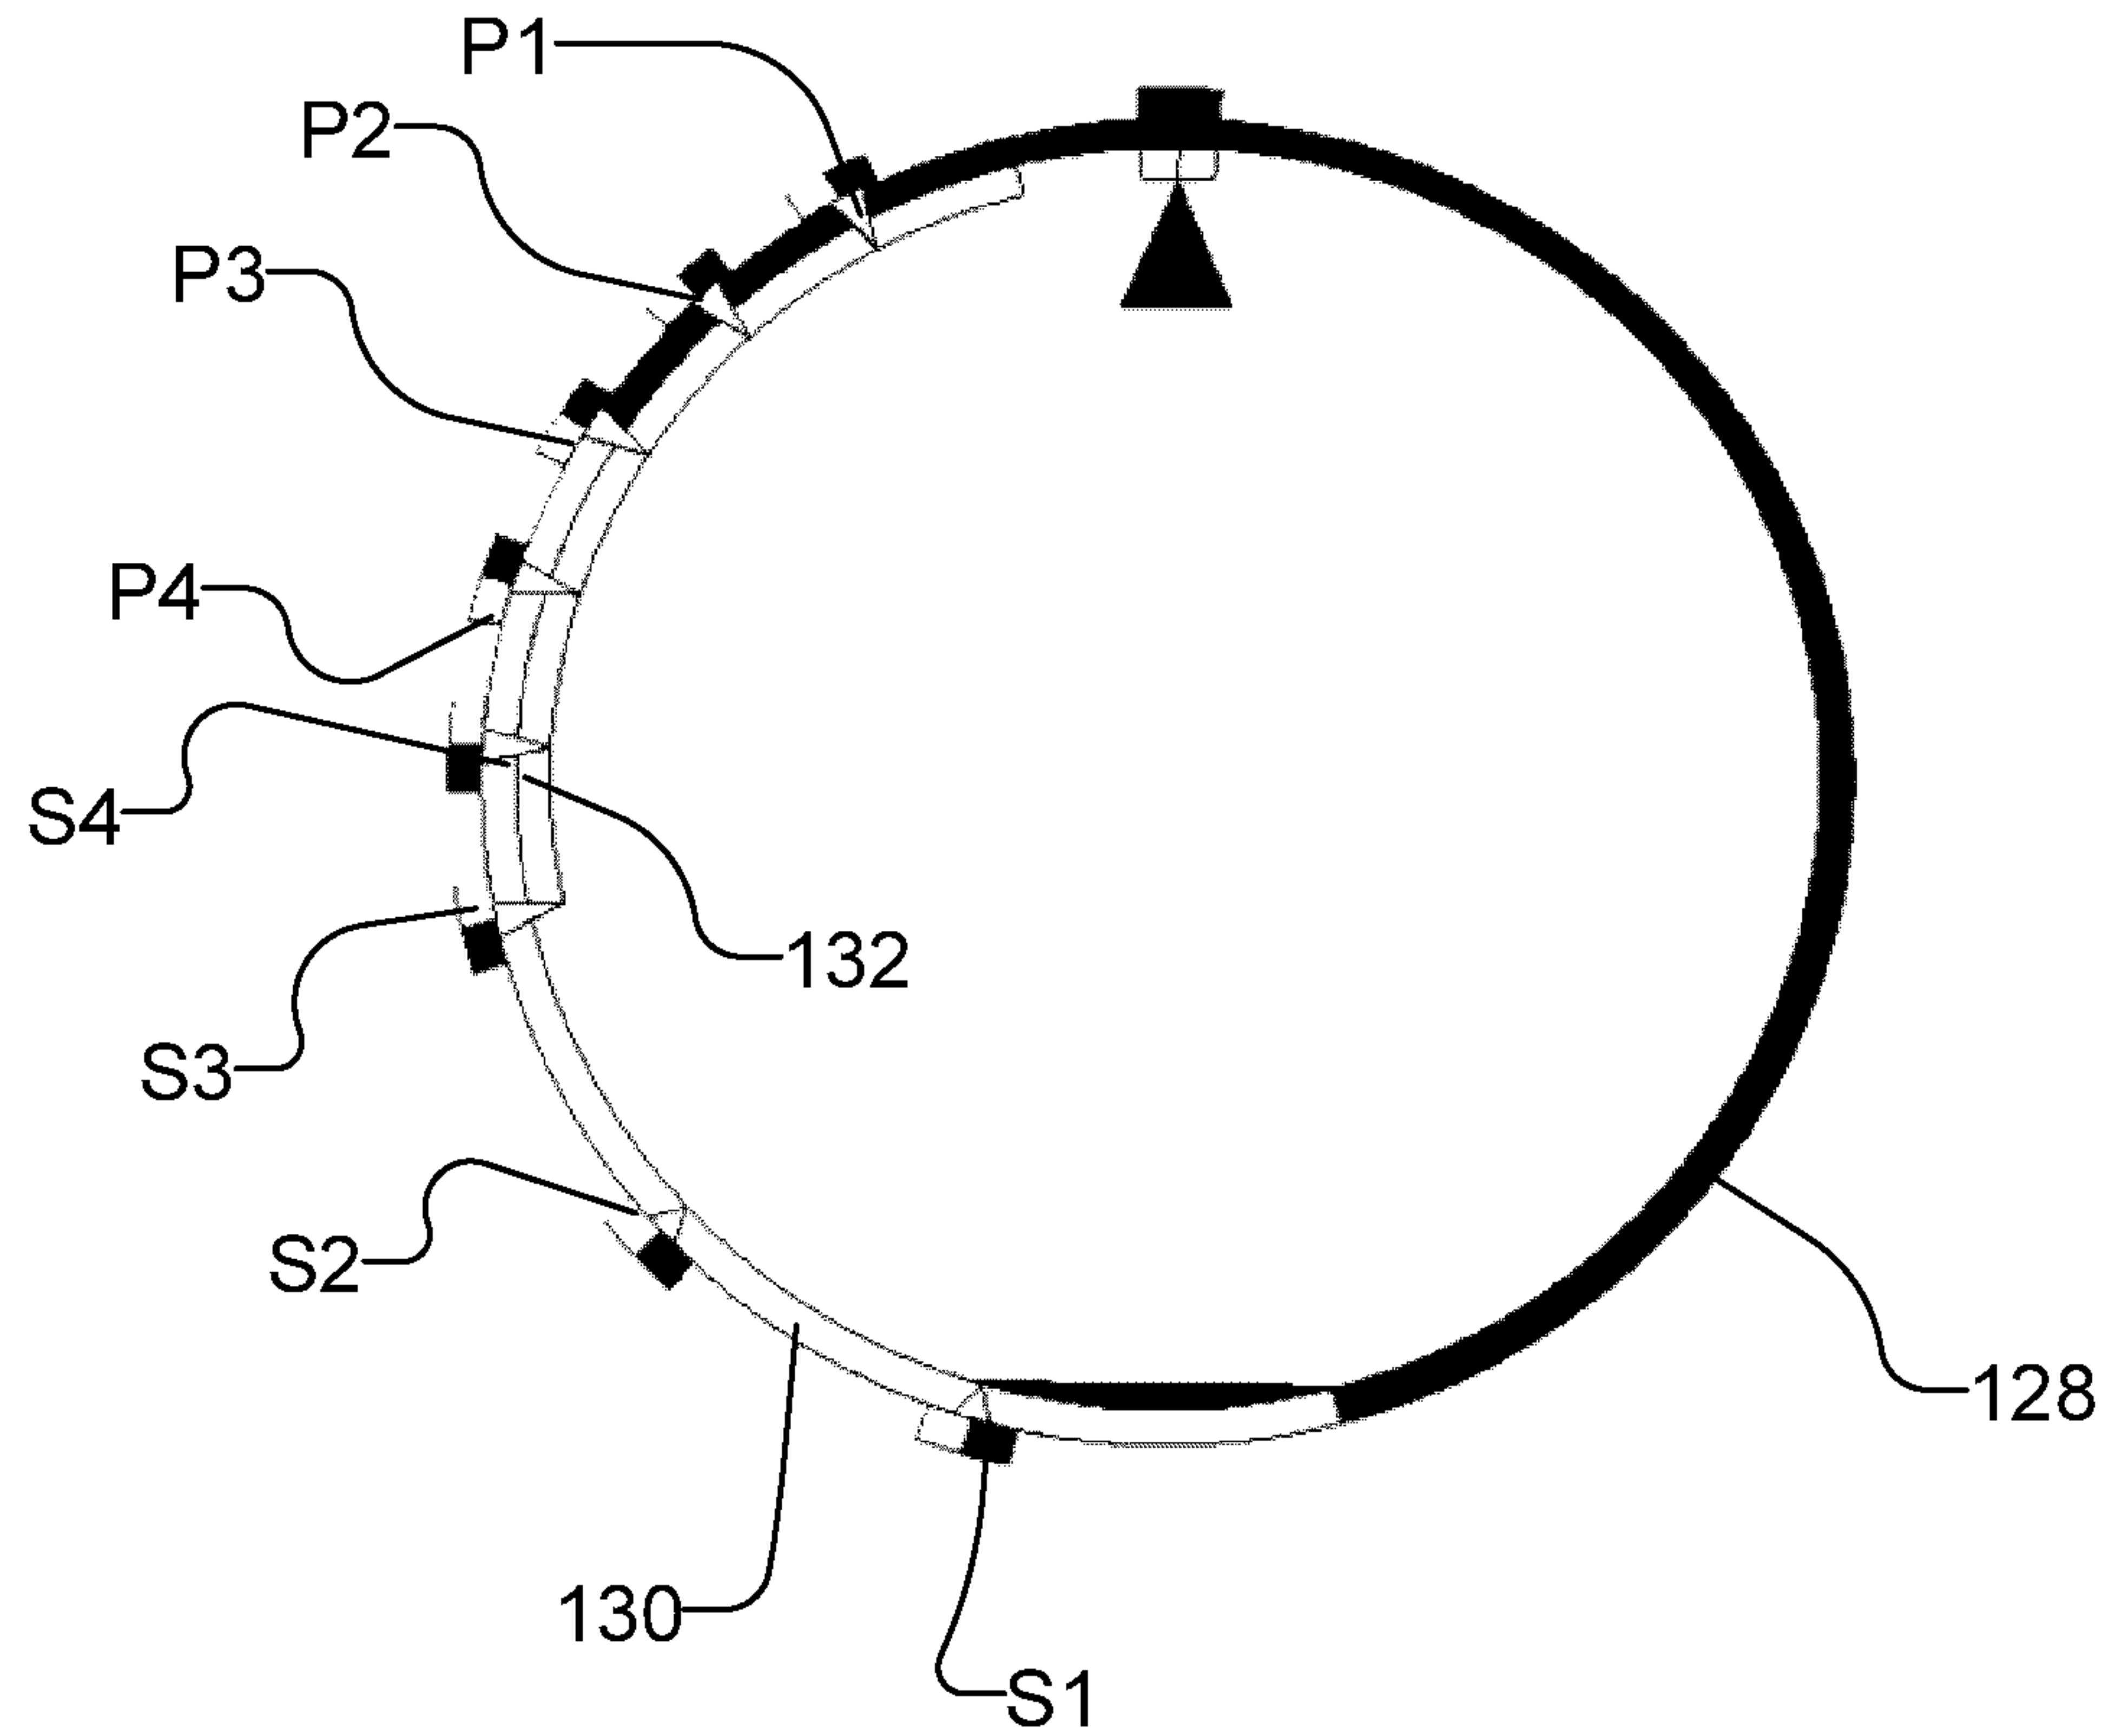


FIG. 16



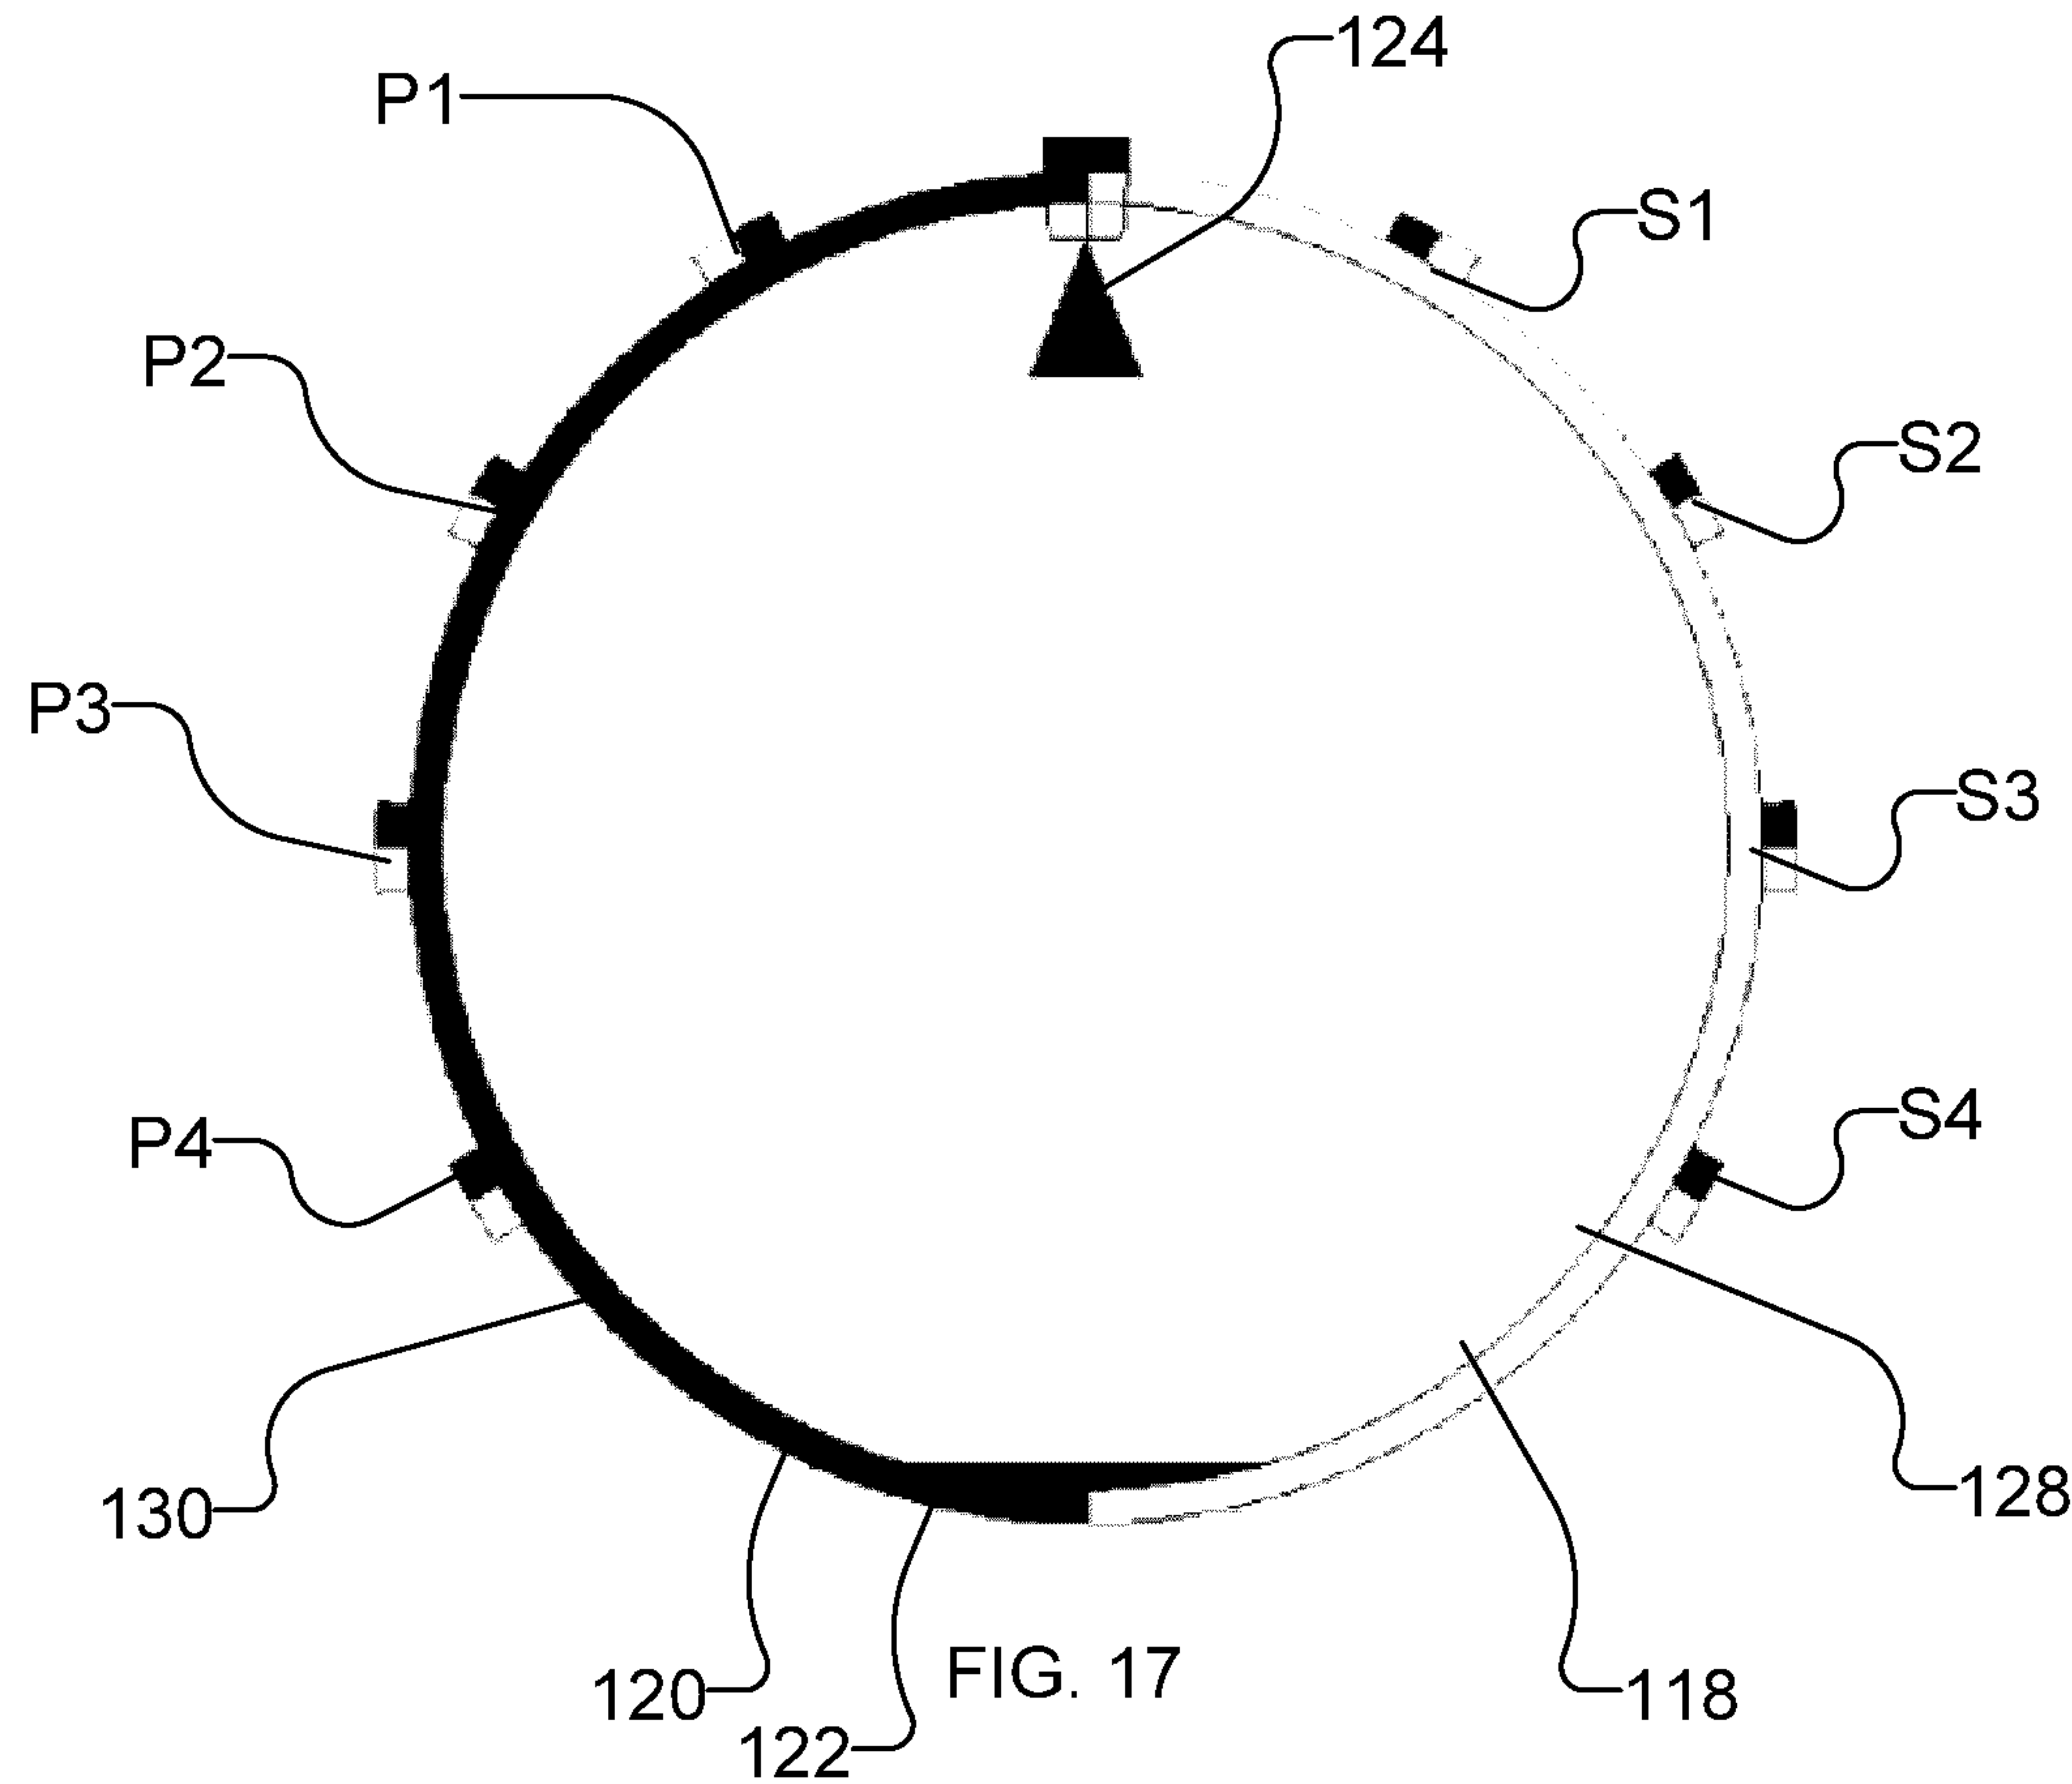


FIG. 17

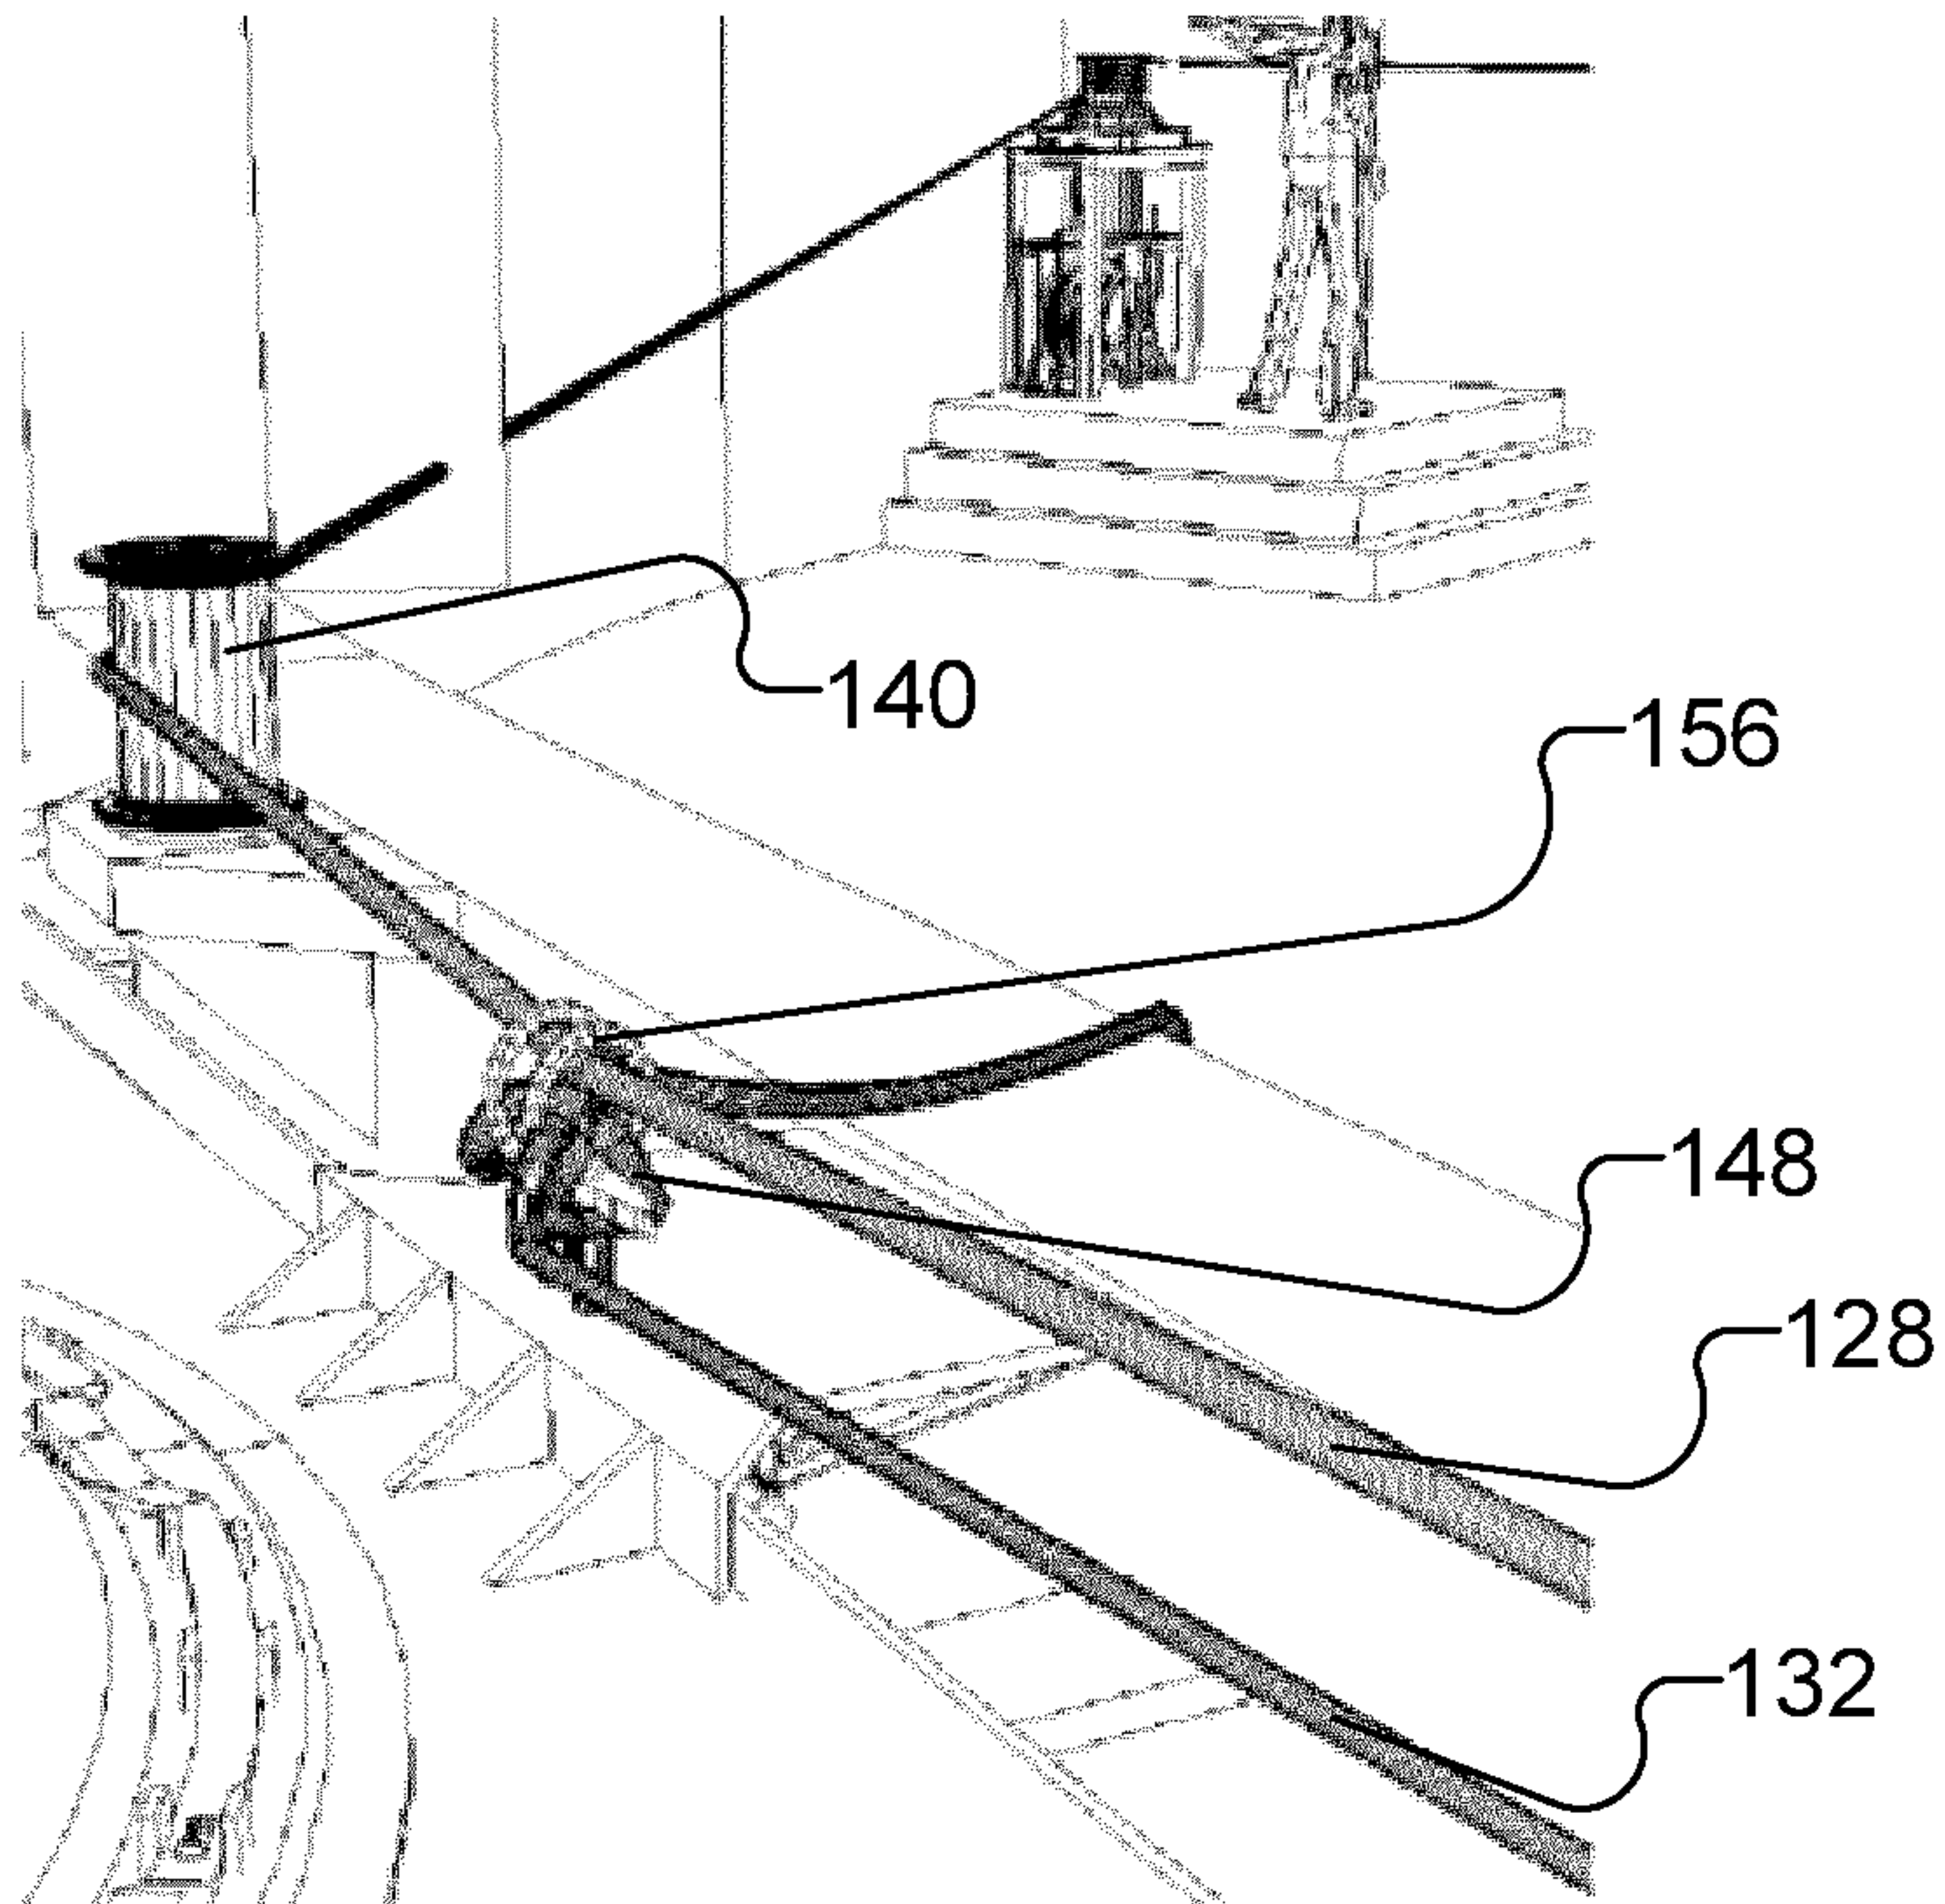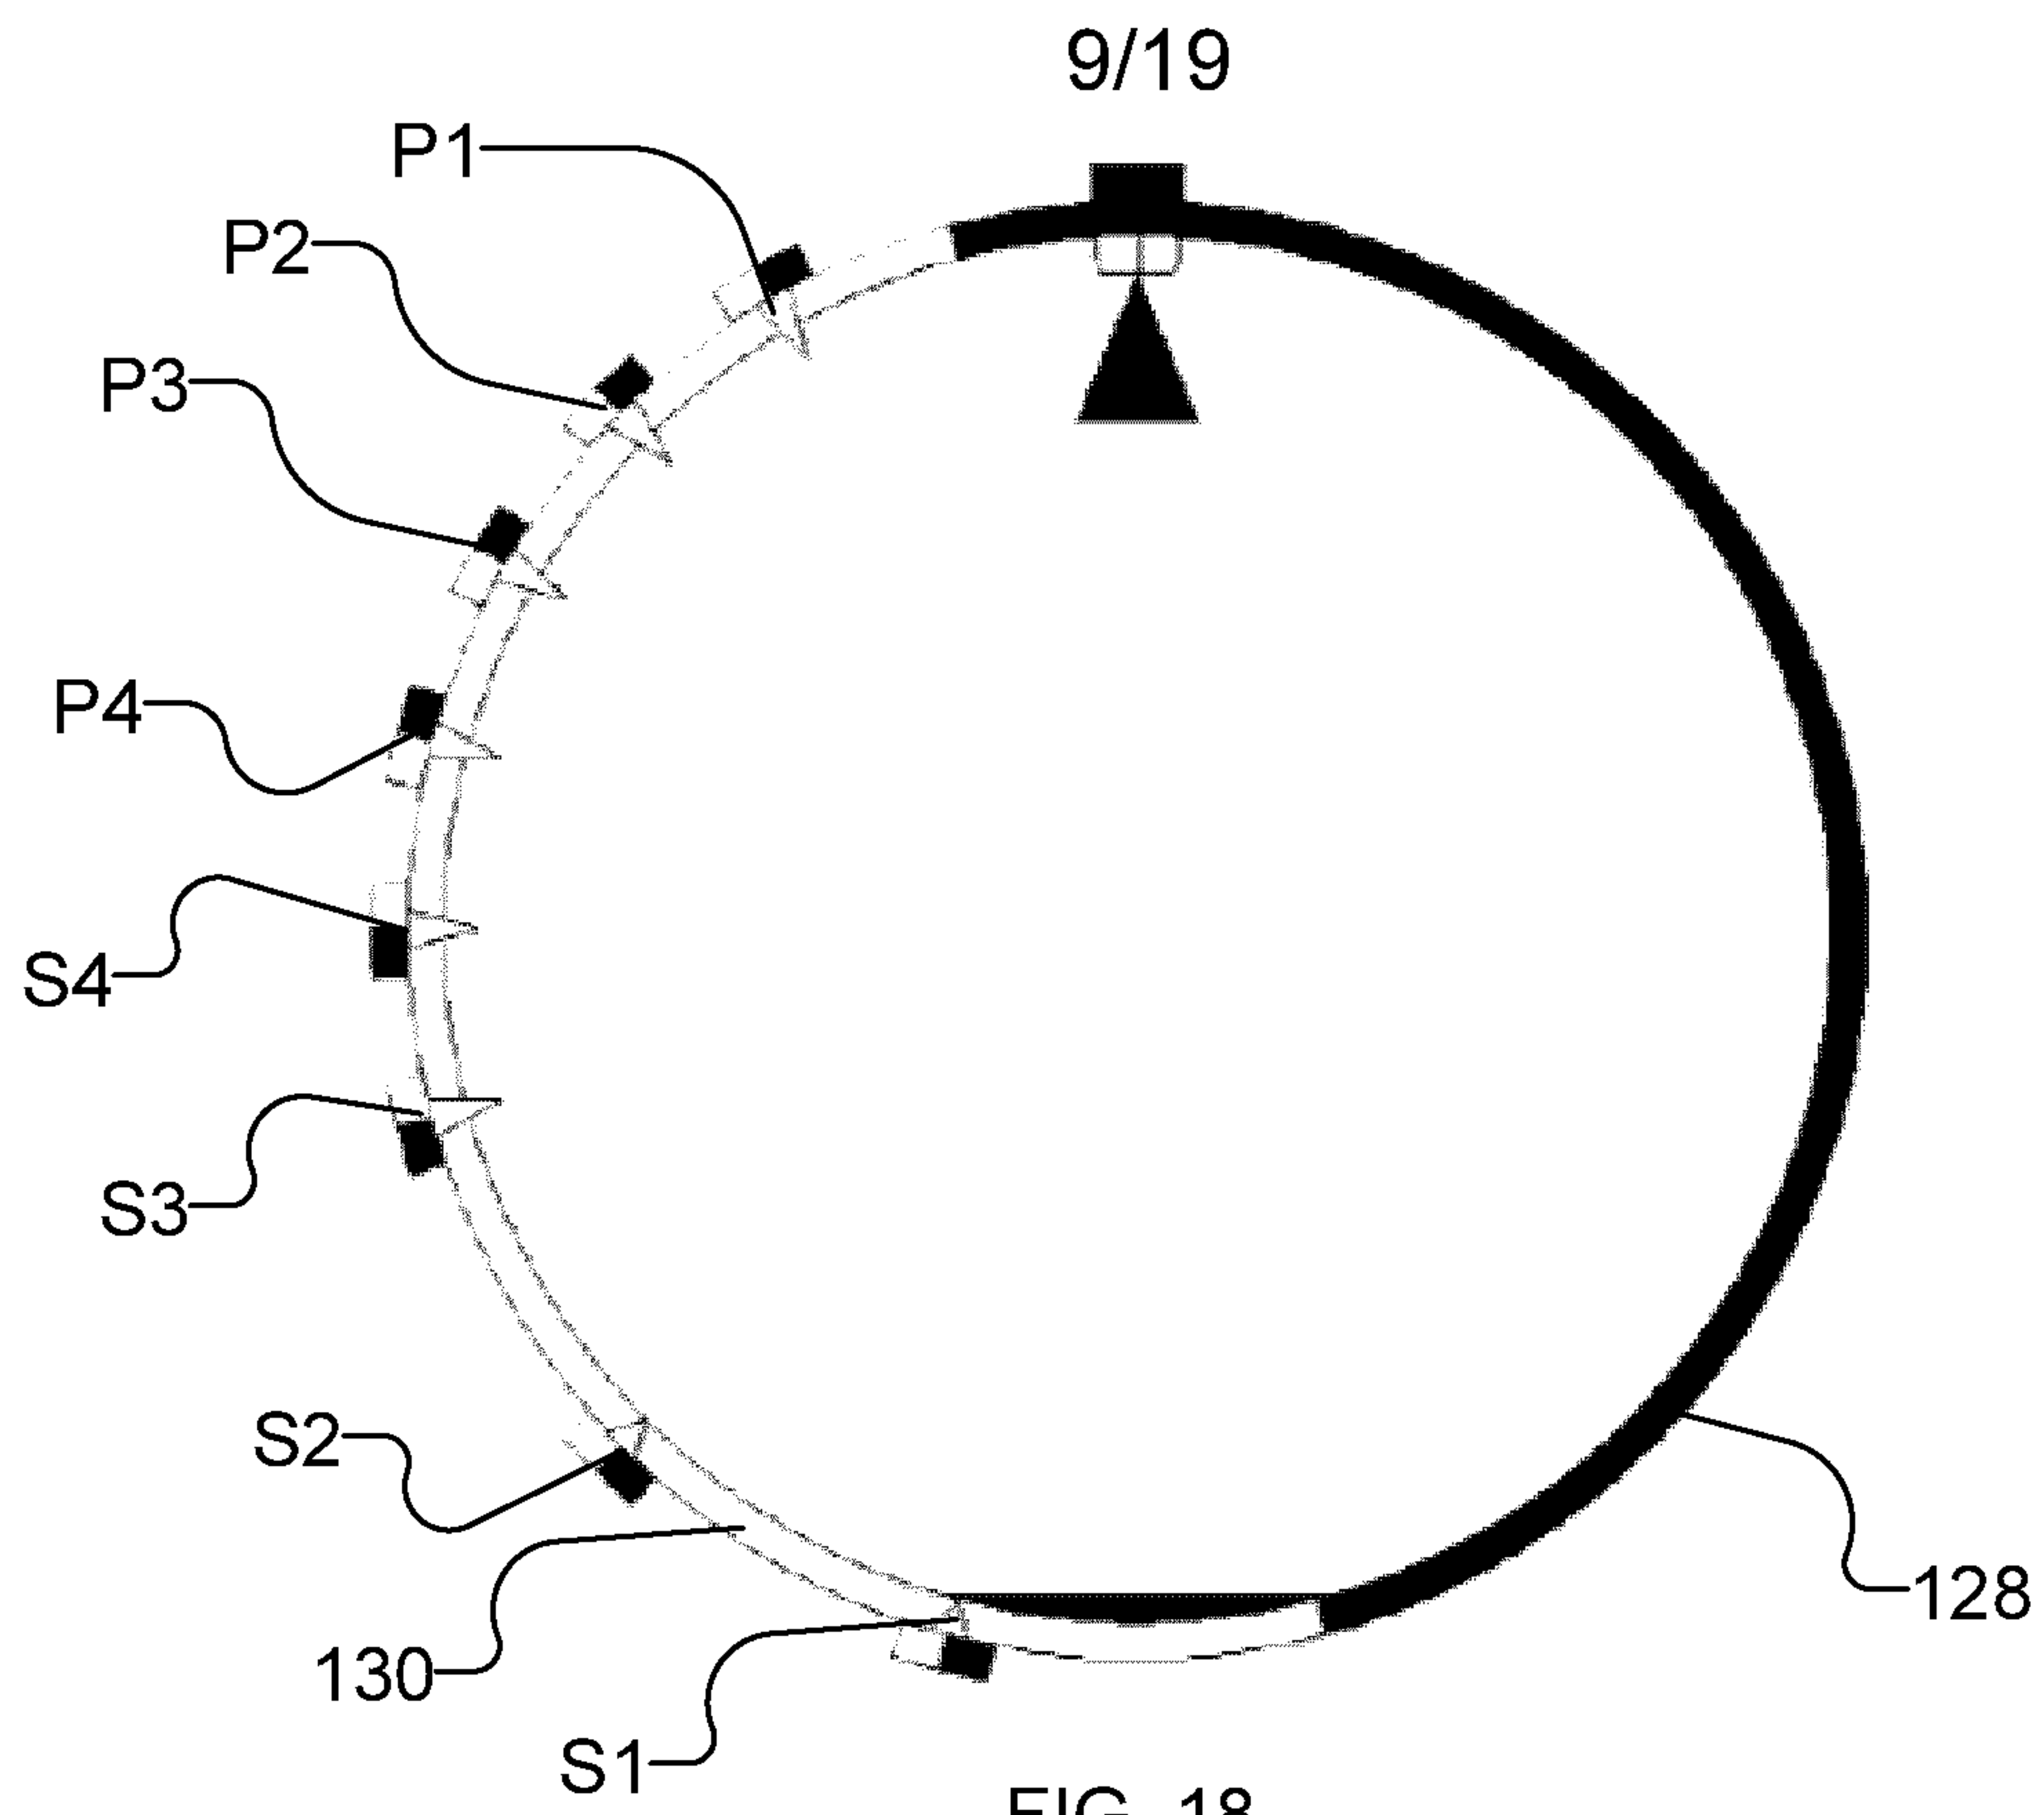

10/19

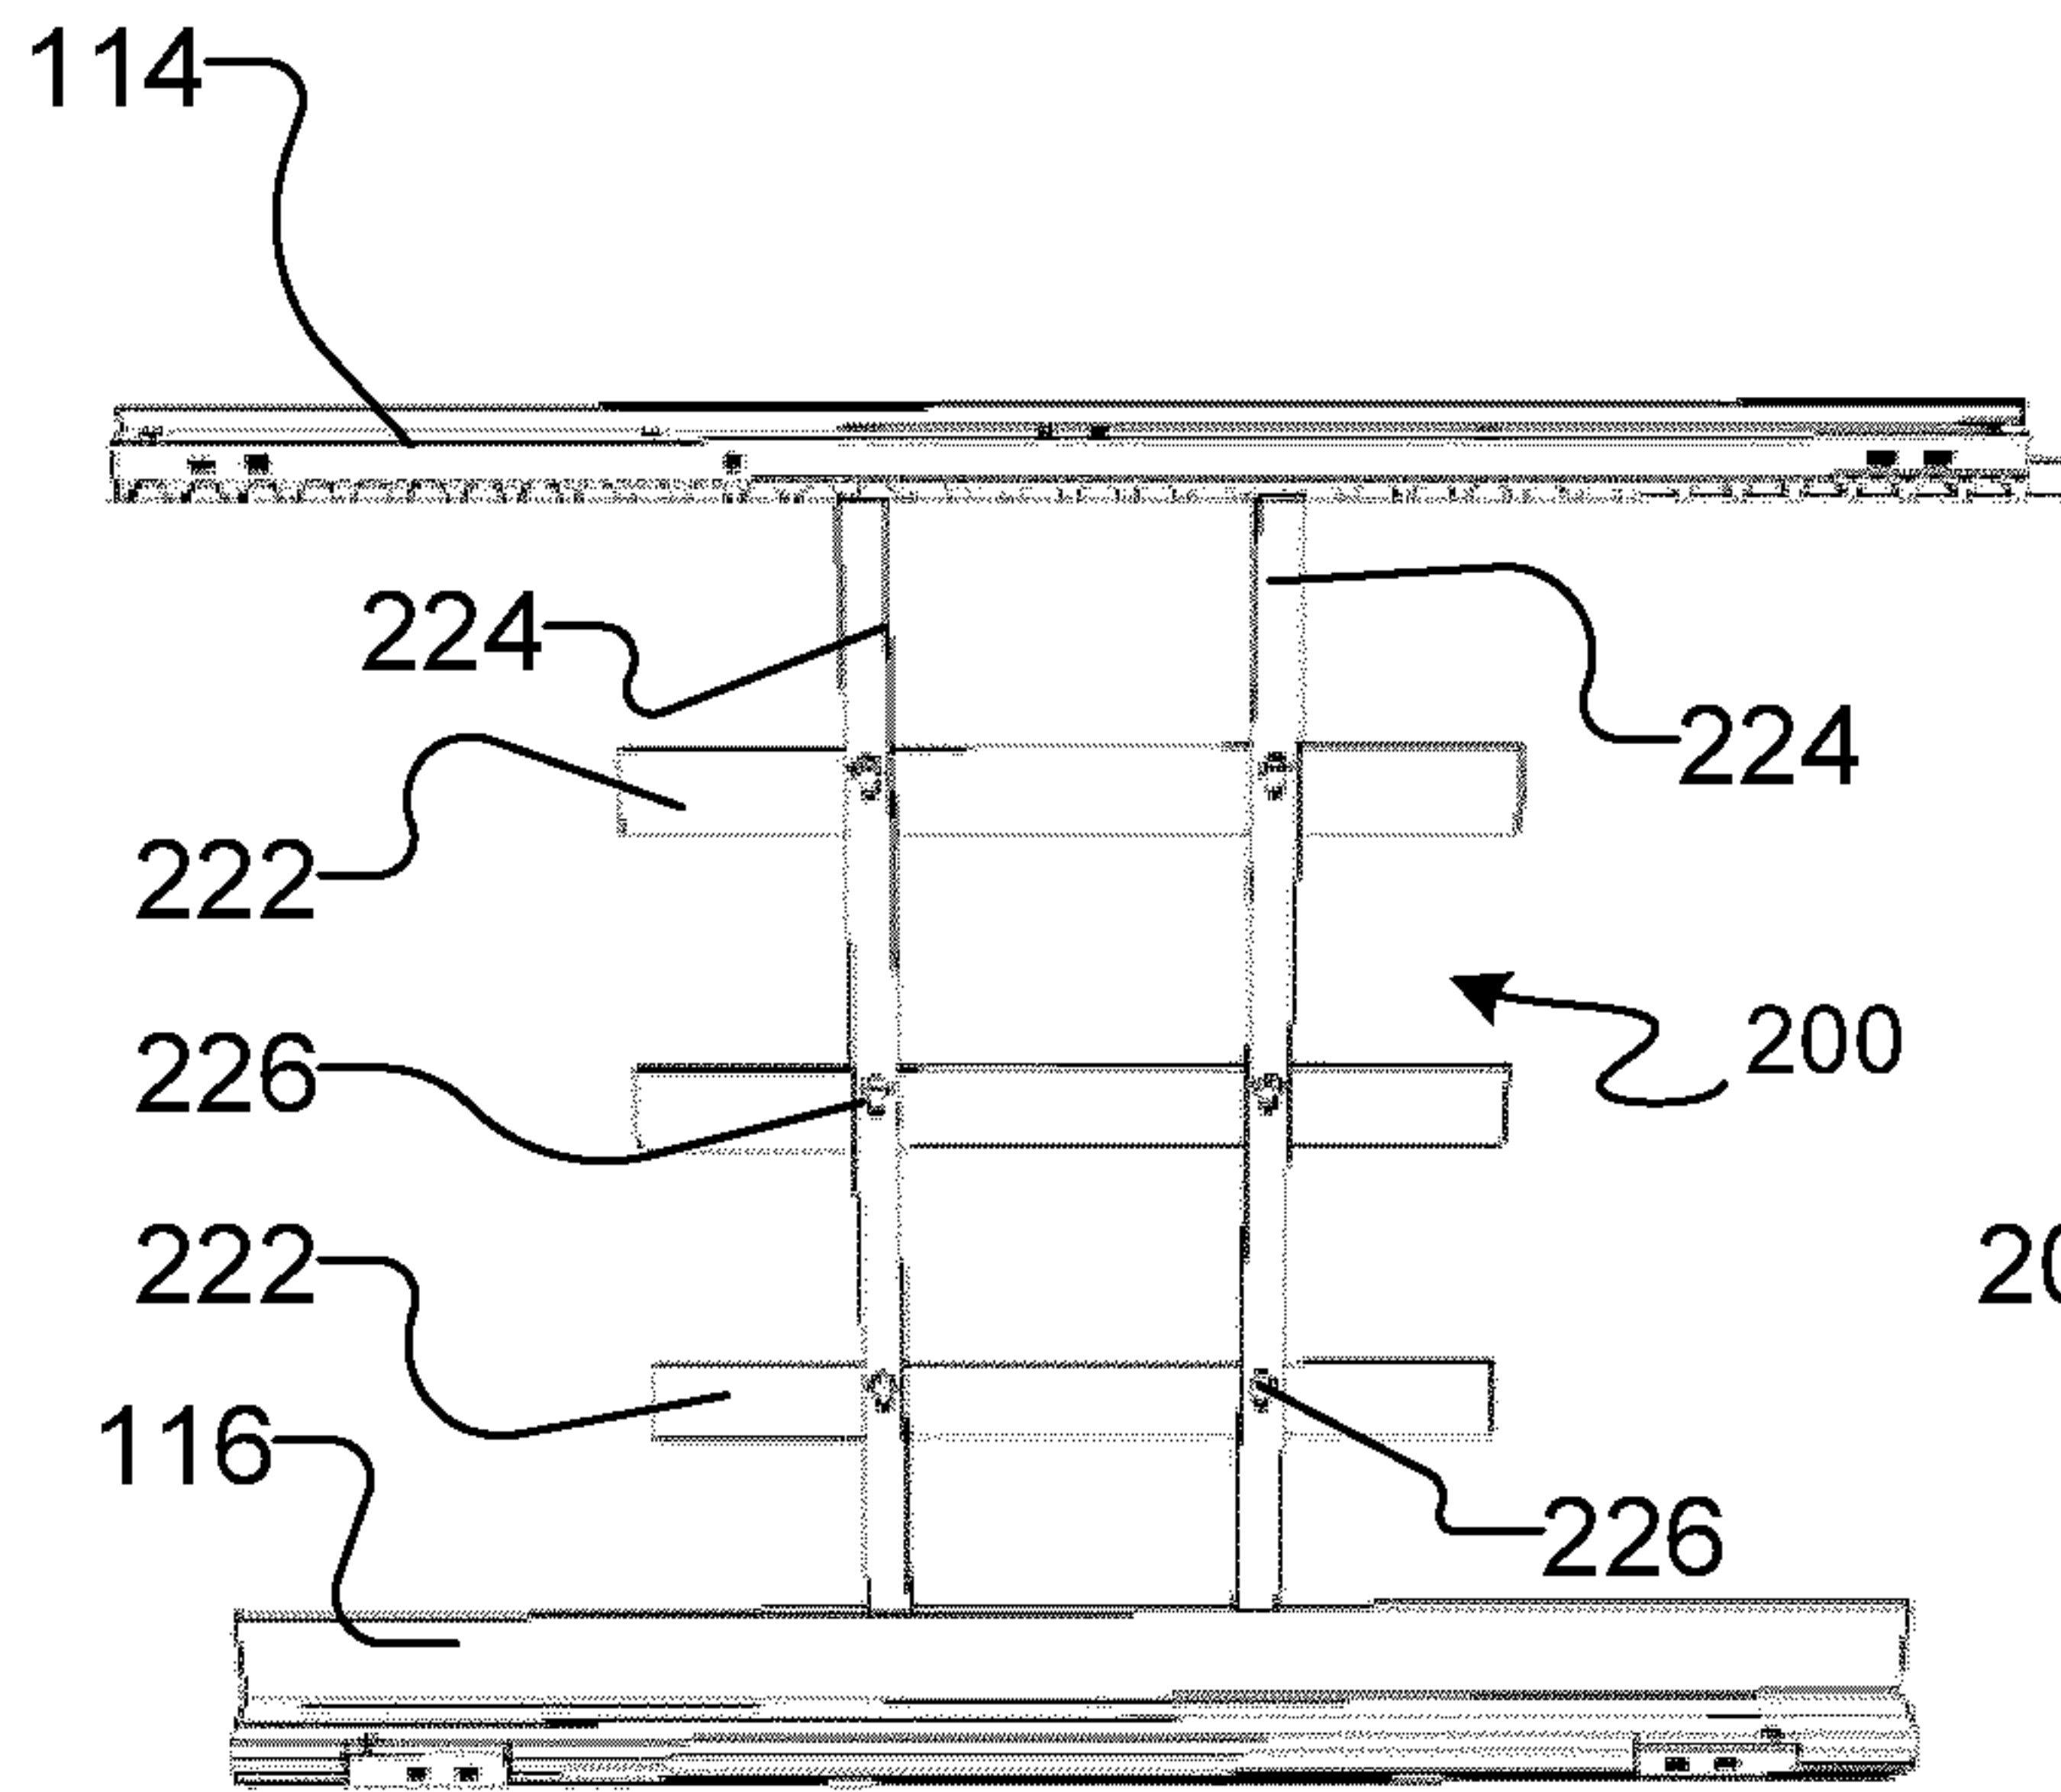


FIG. 20

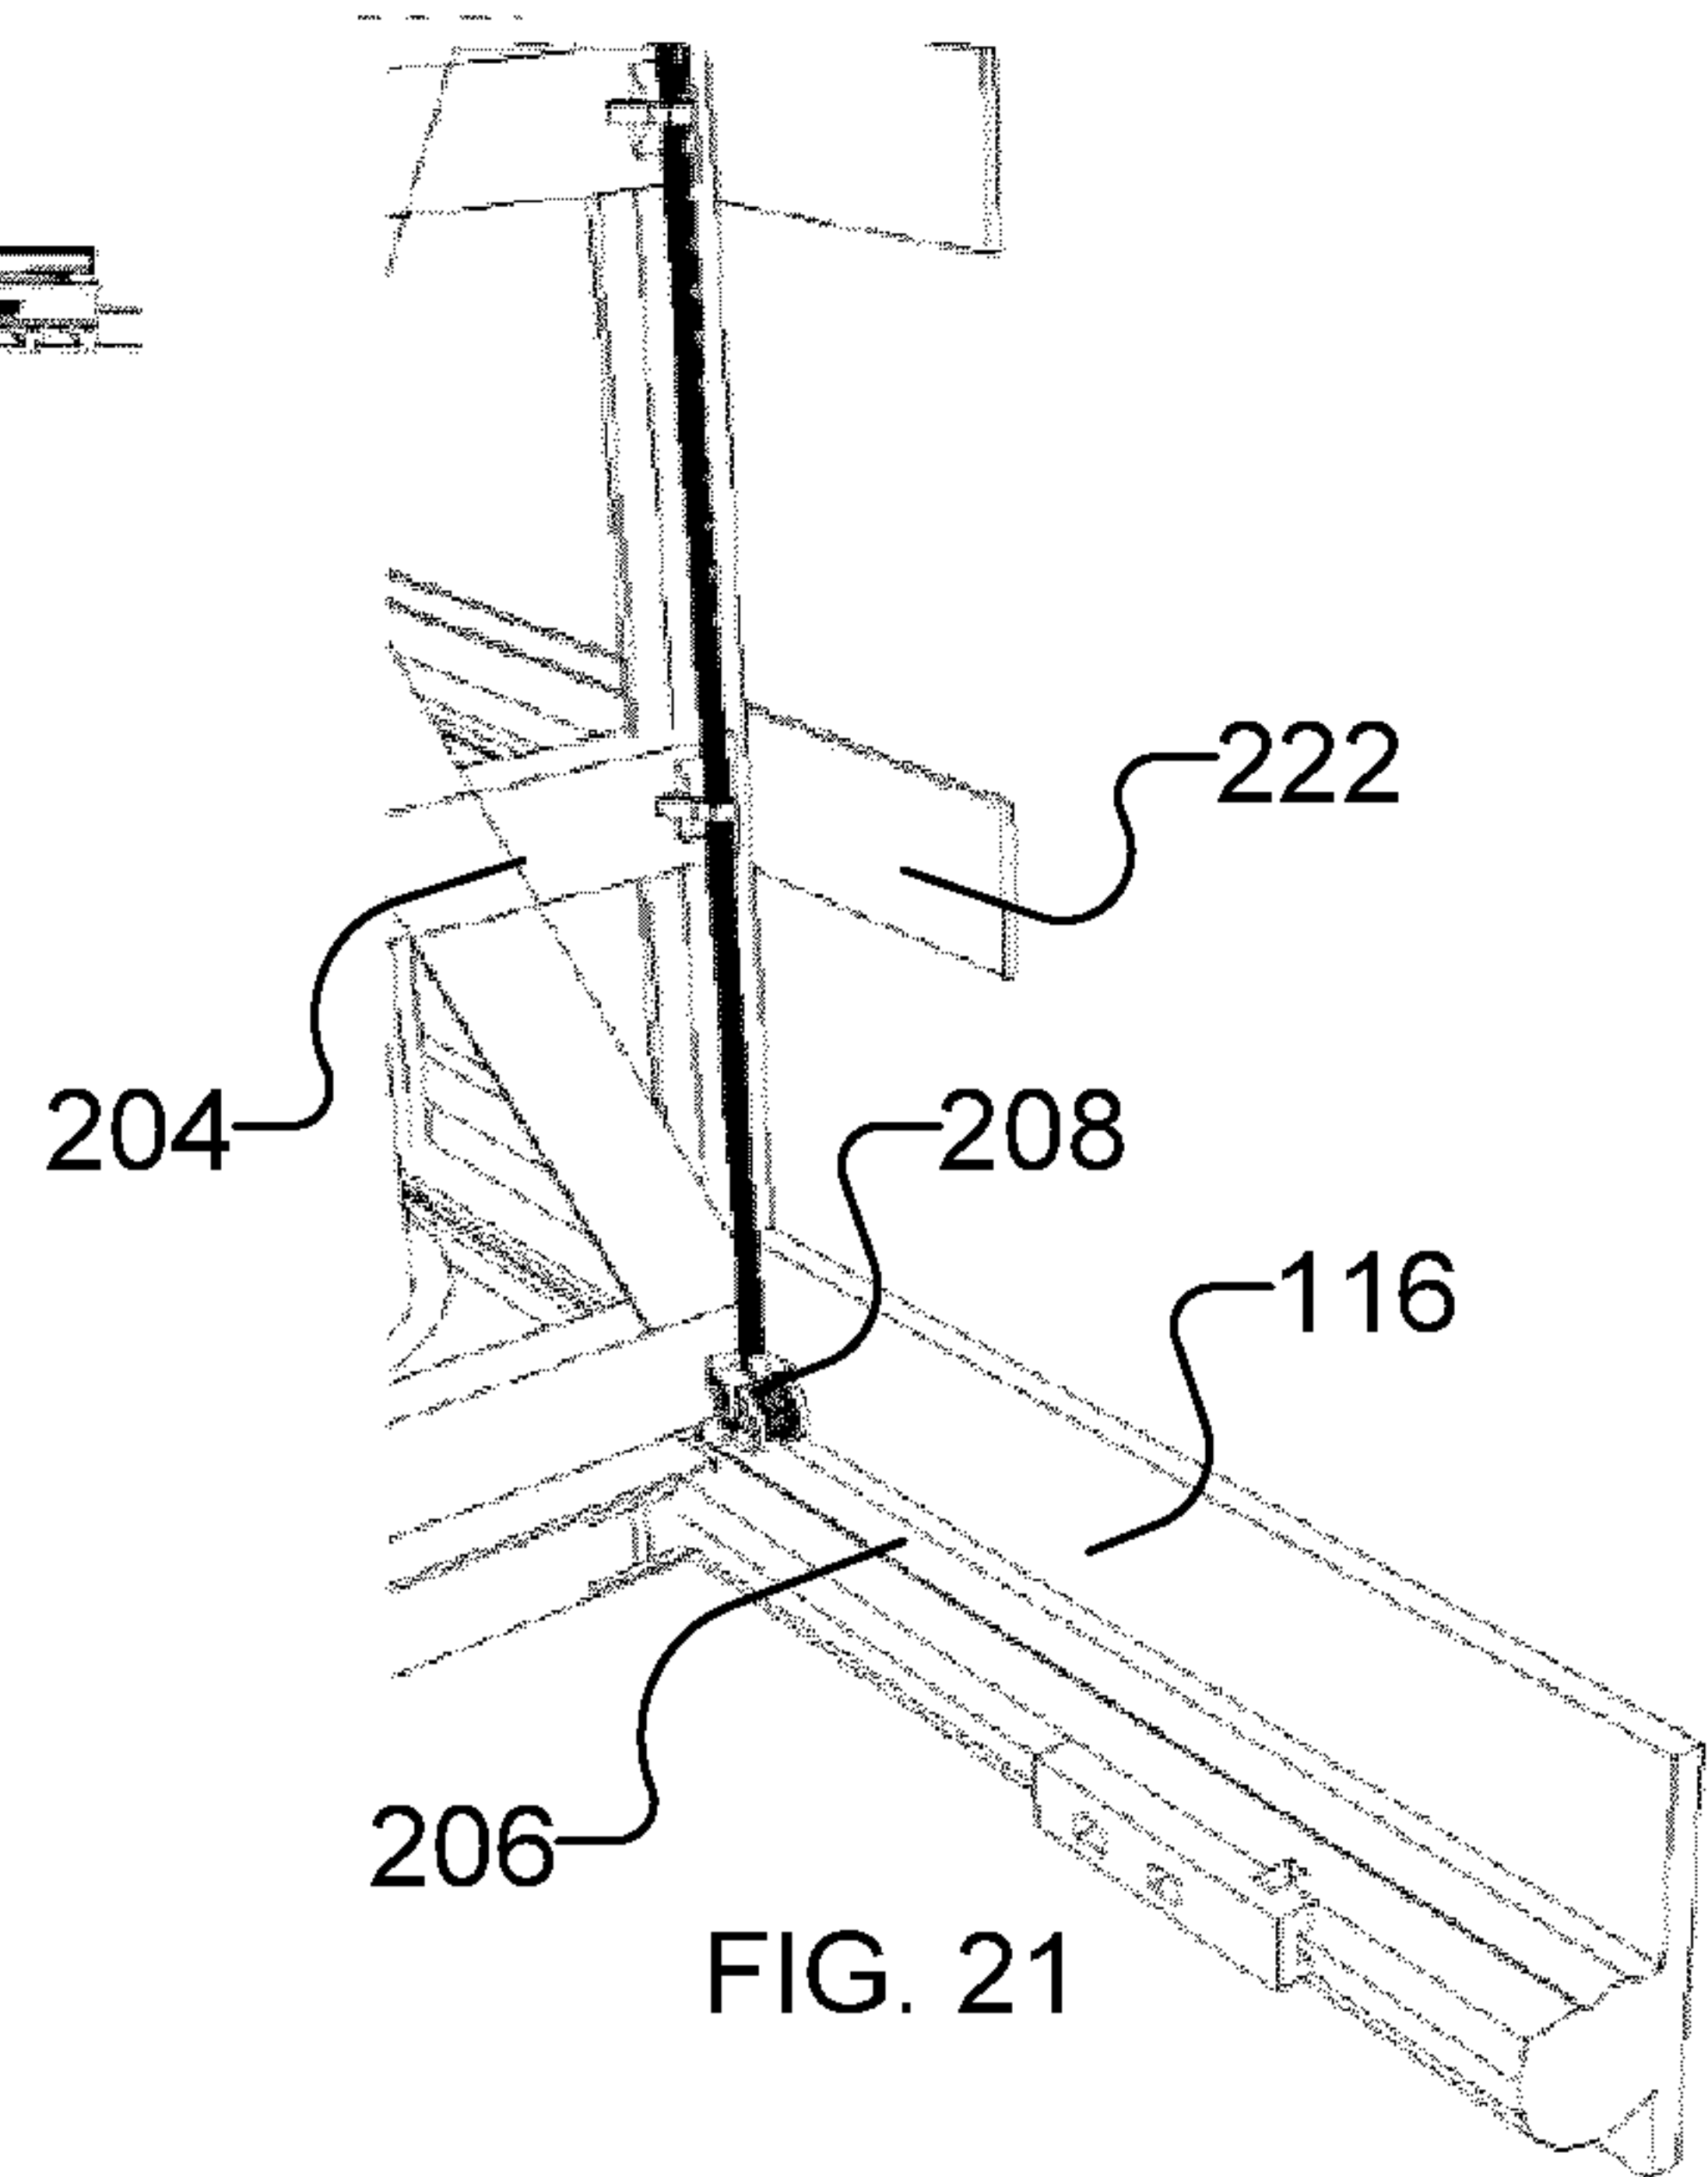


FIG. 21

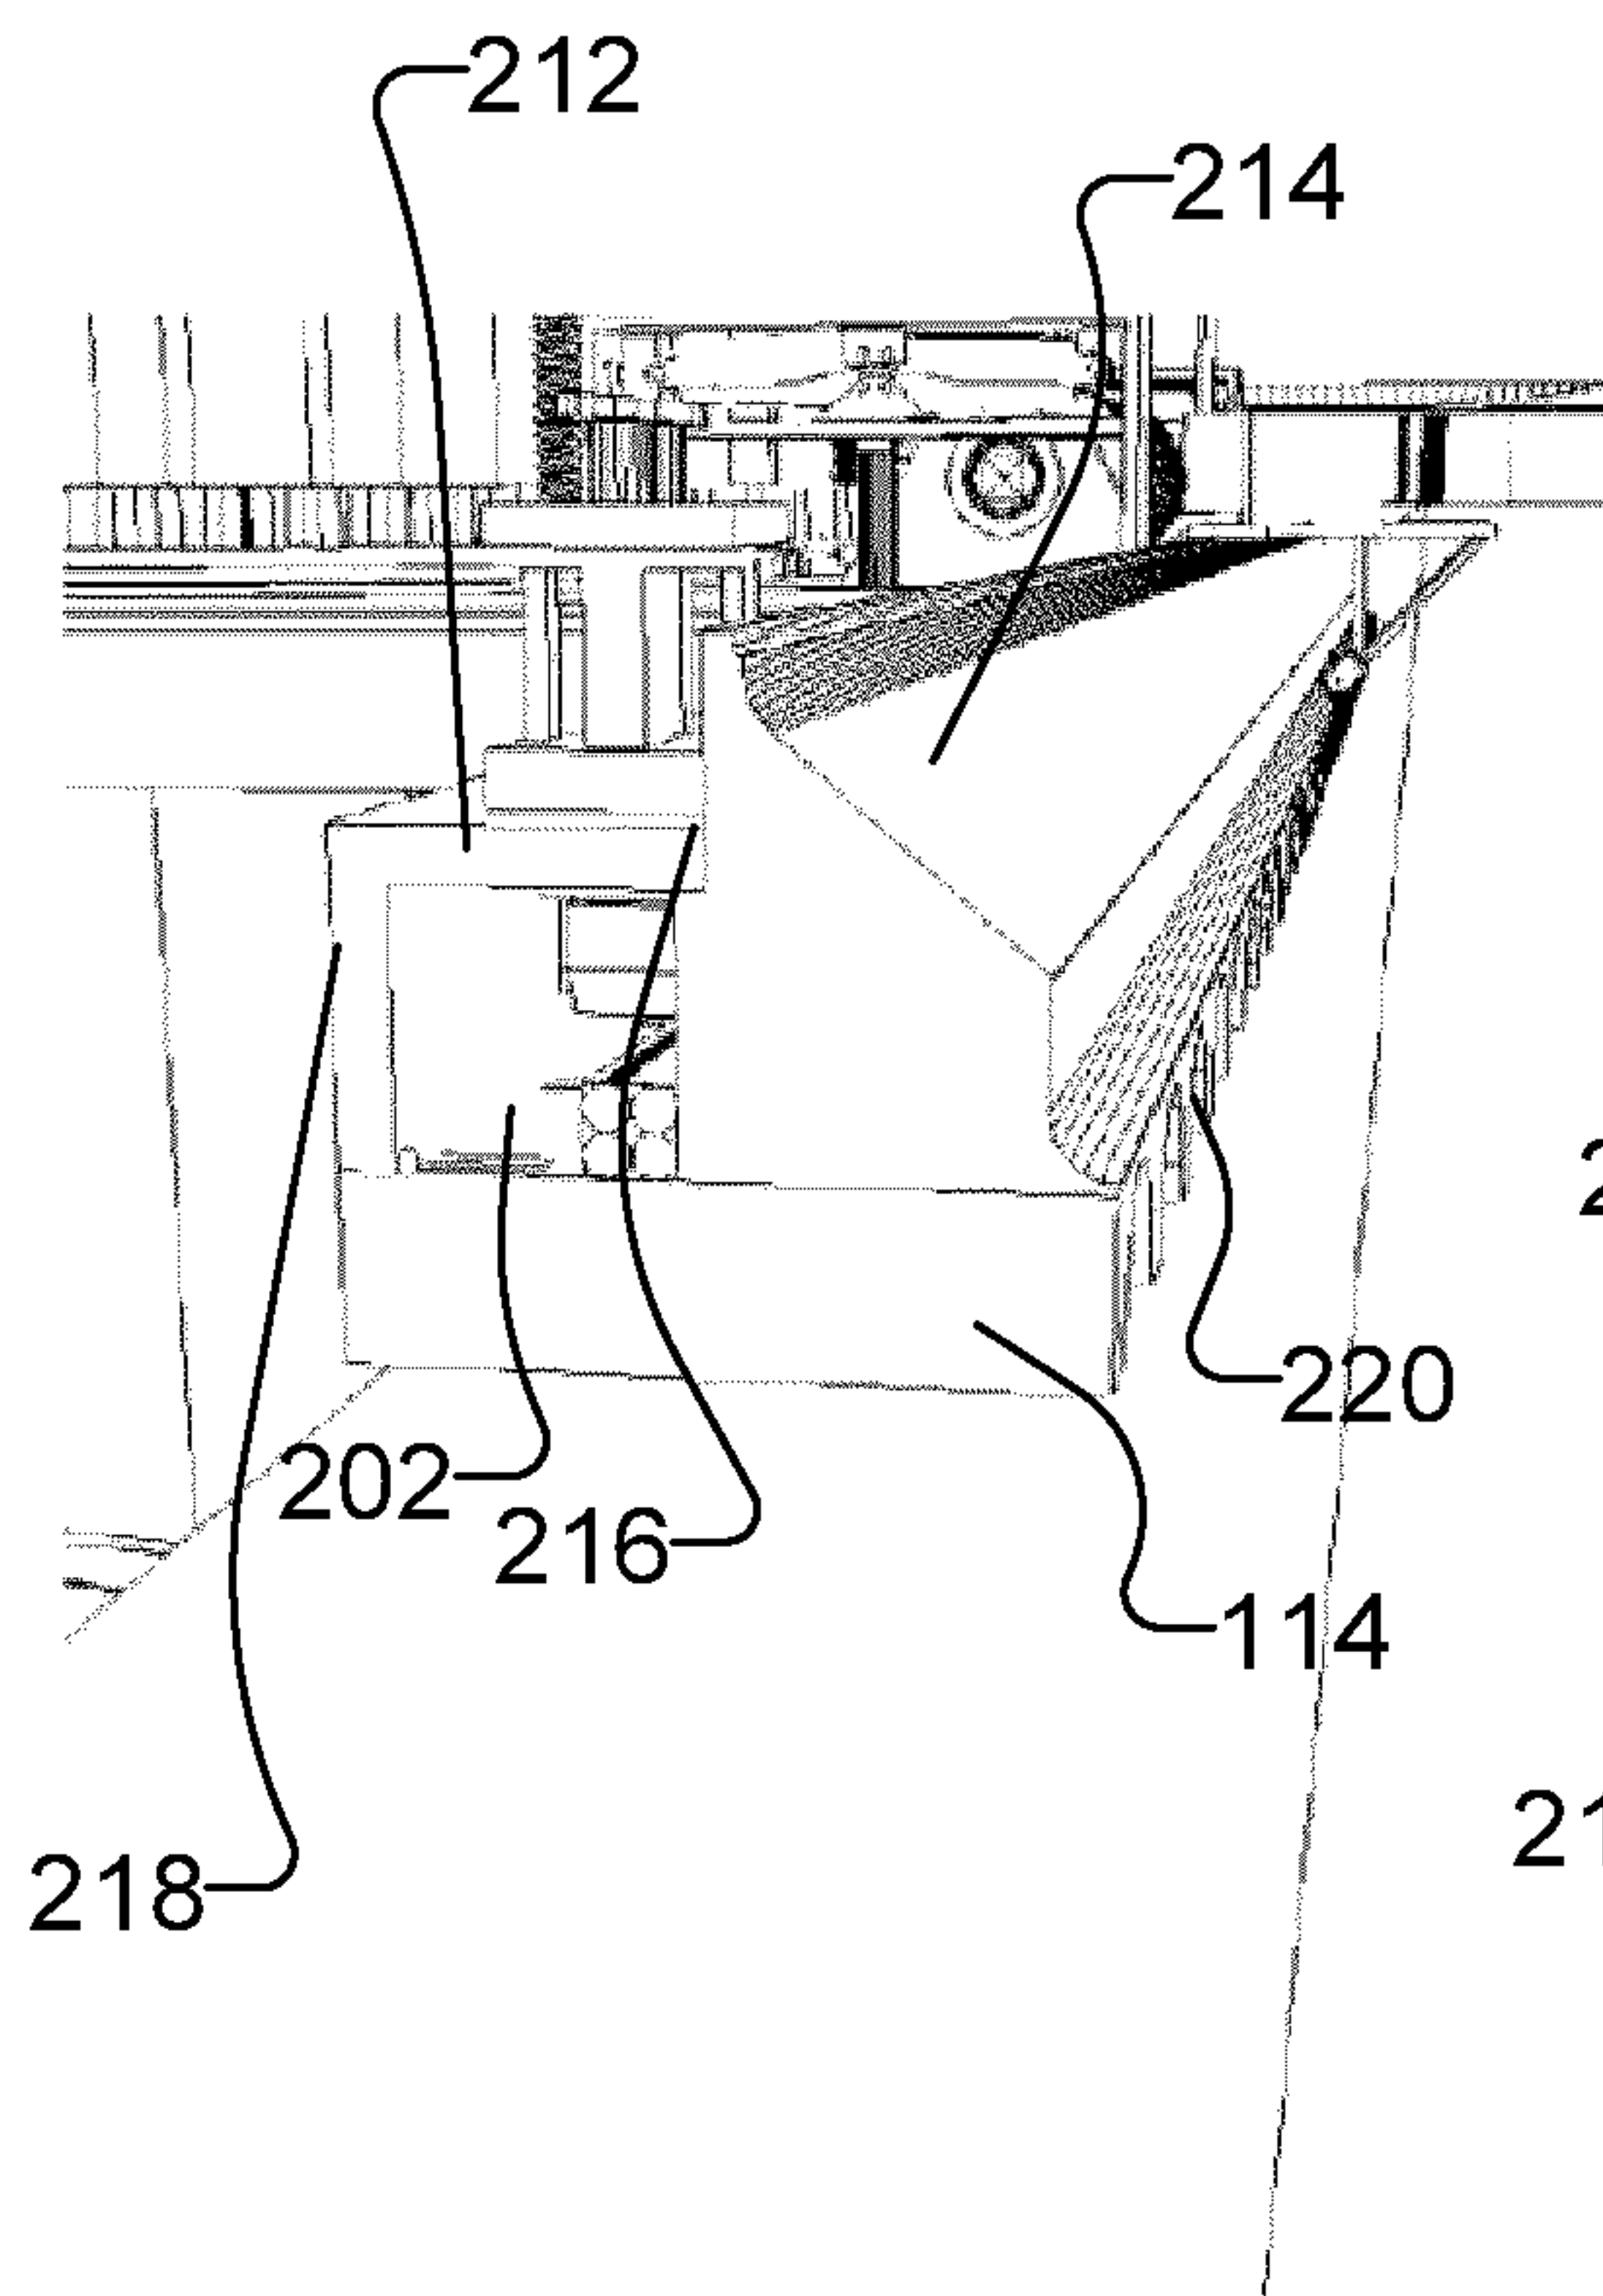


FIG. 22





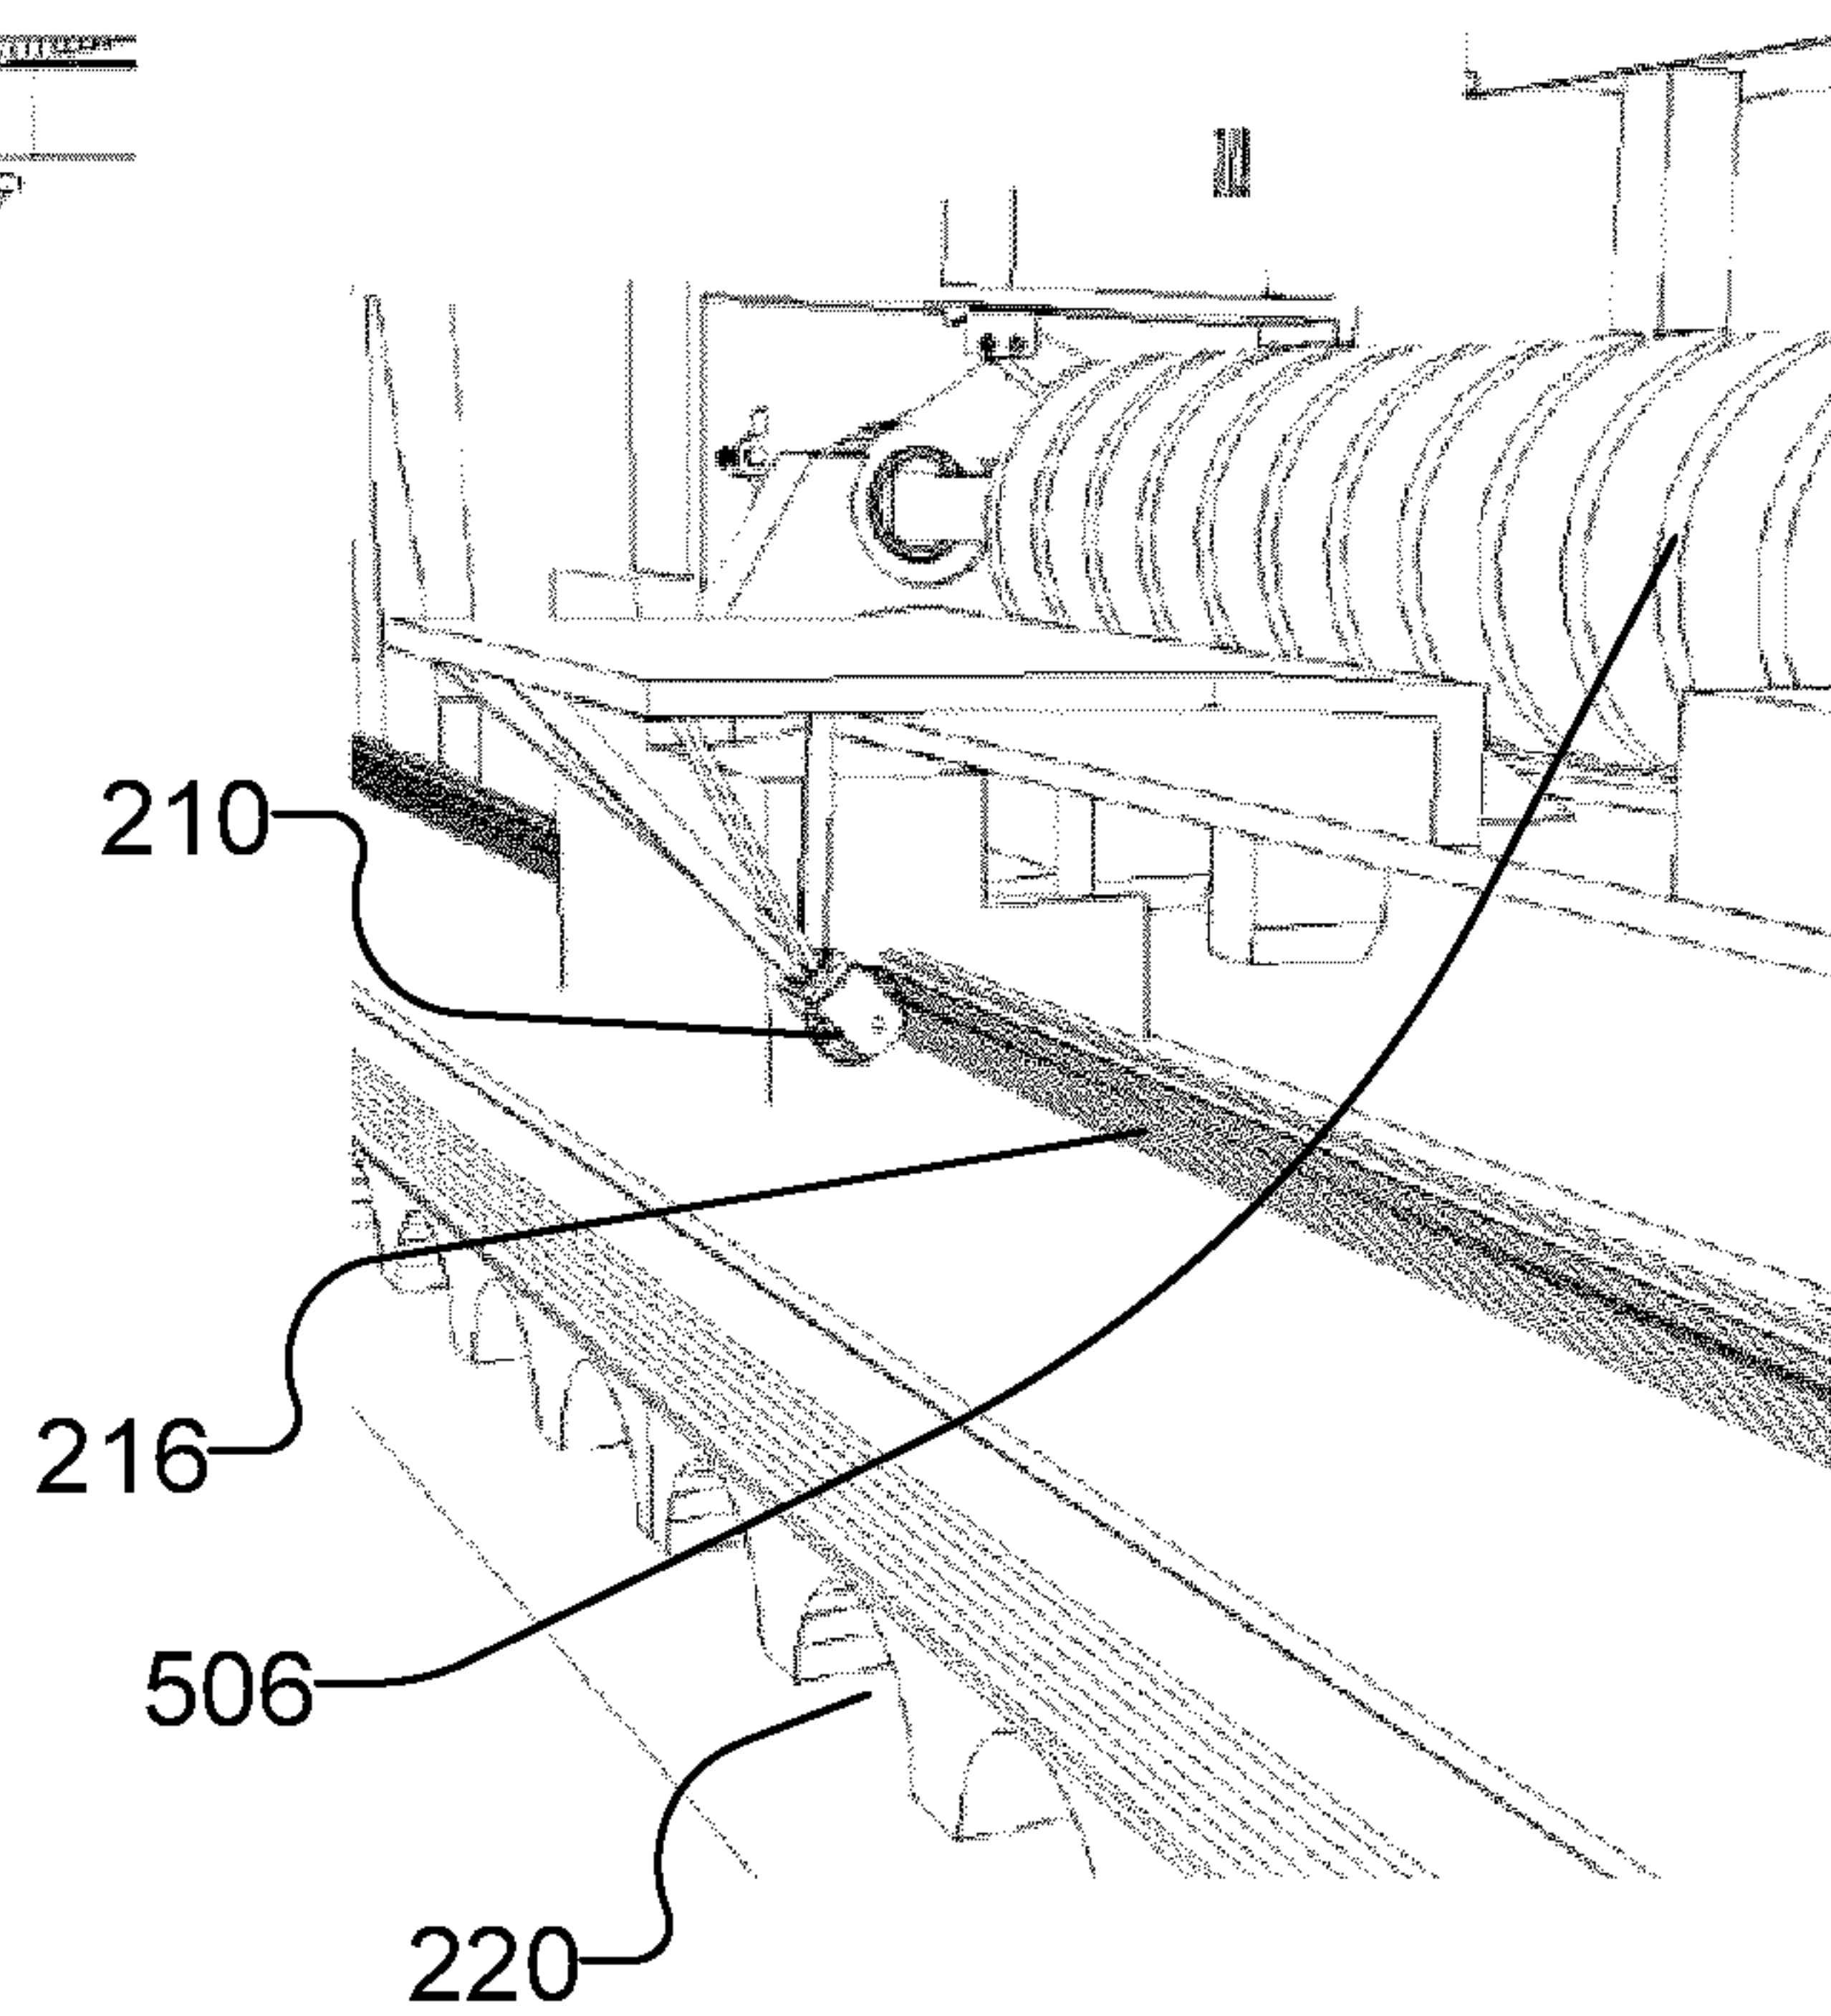


FIG. 23

11/19

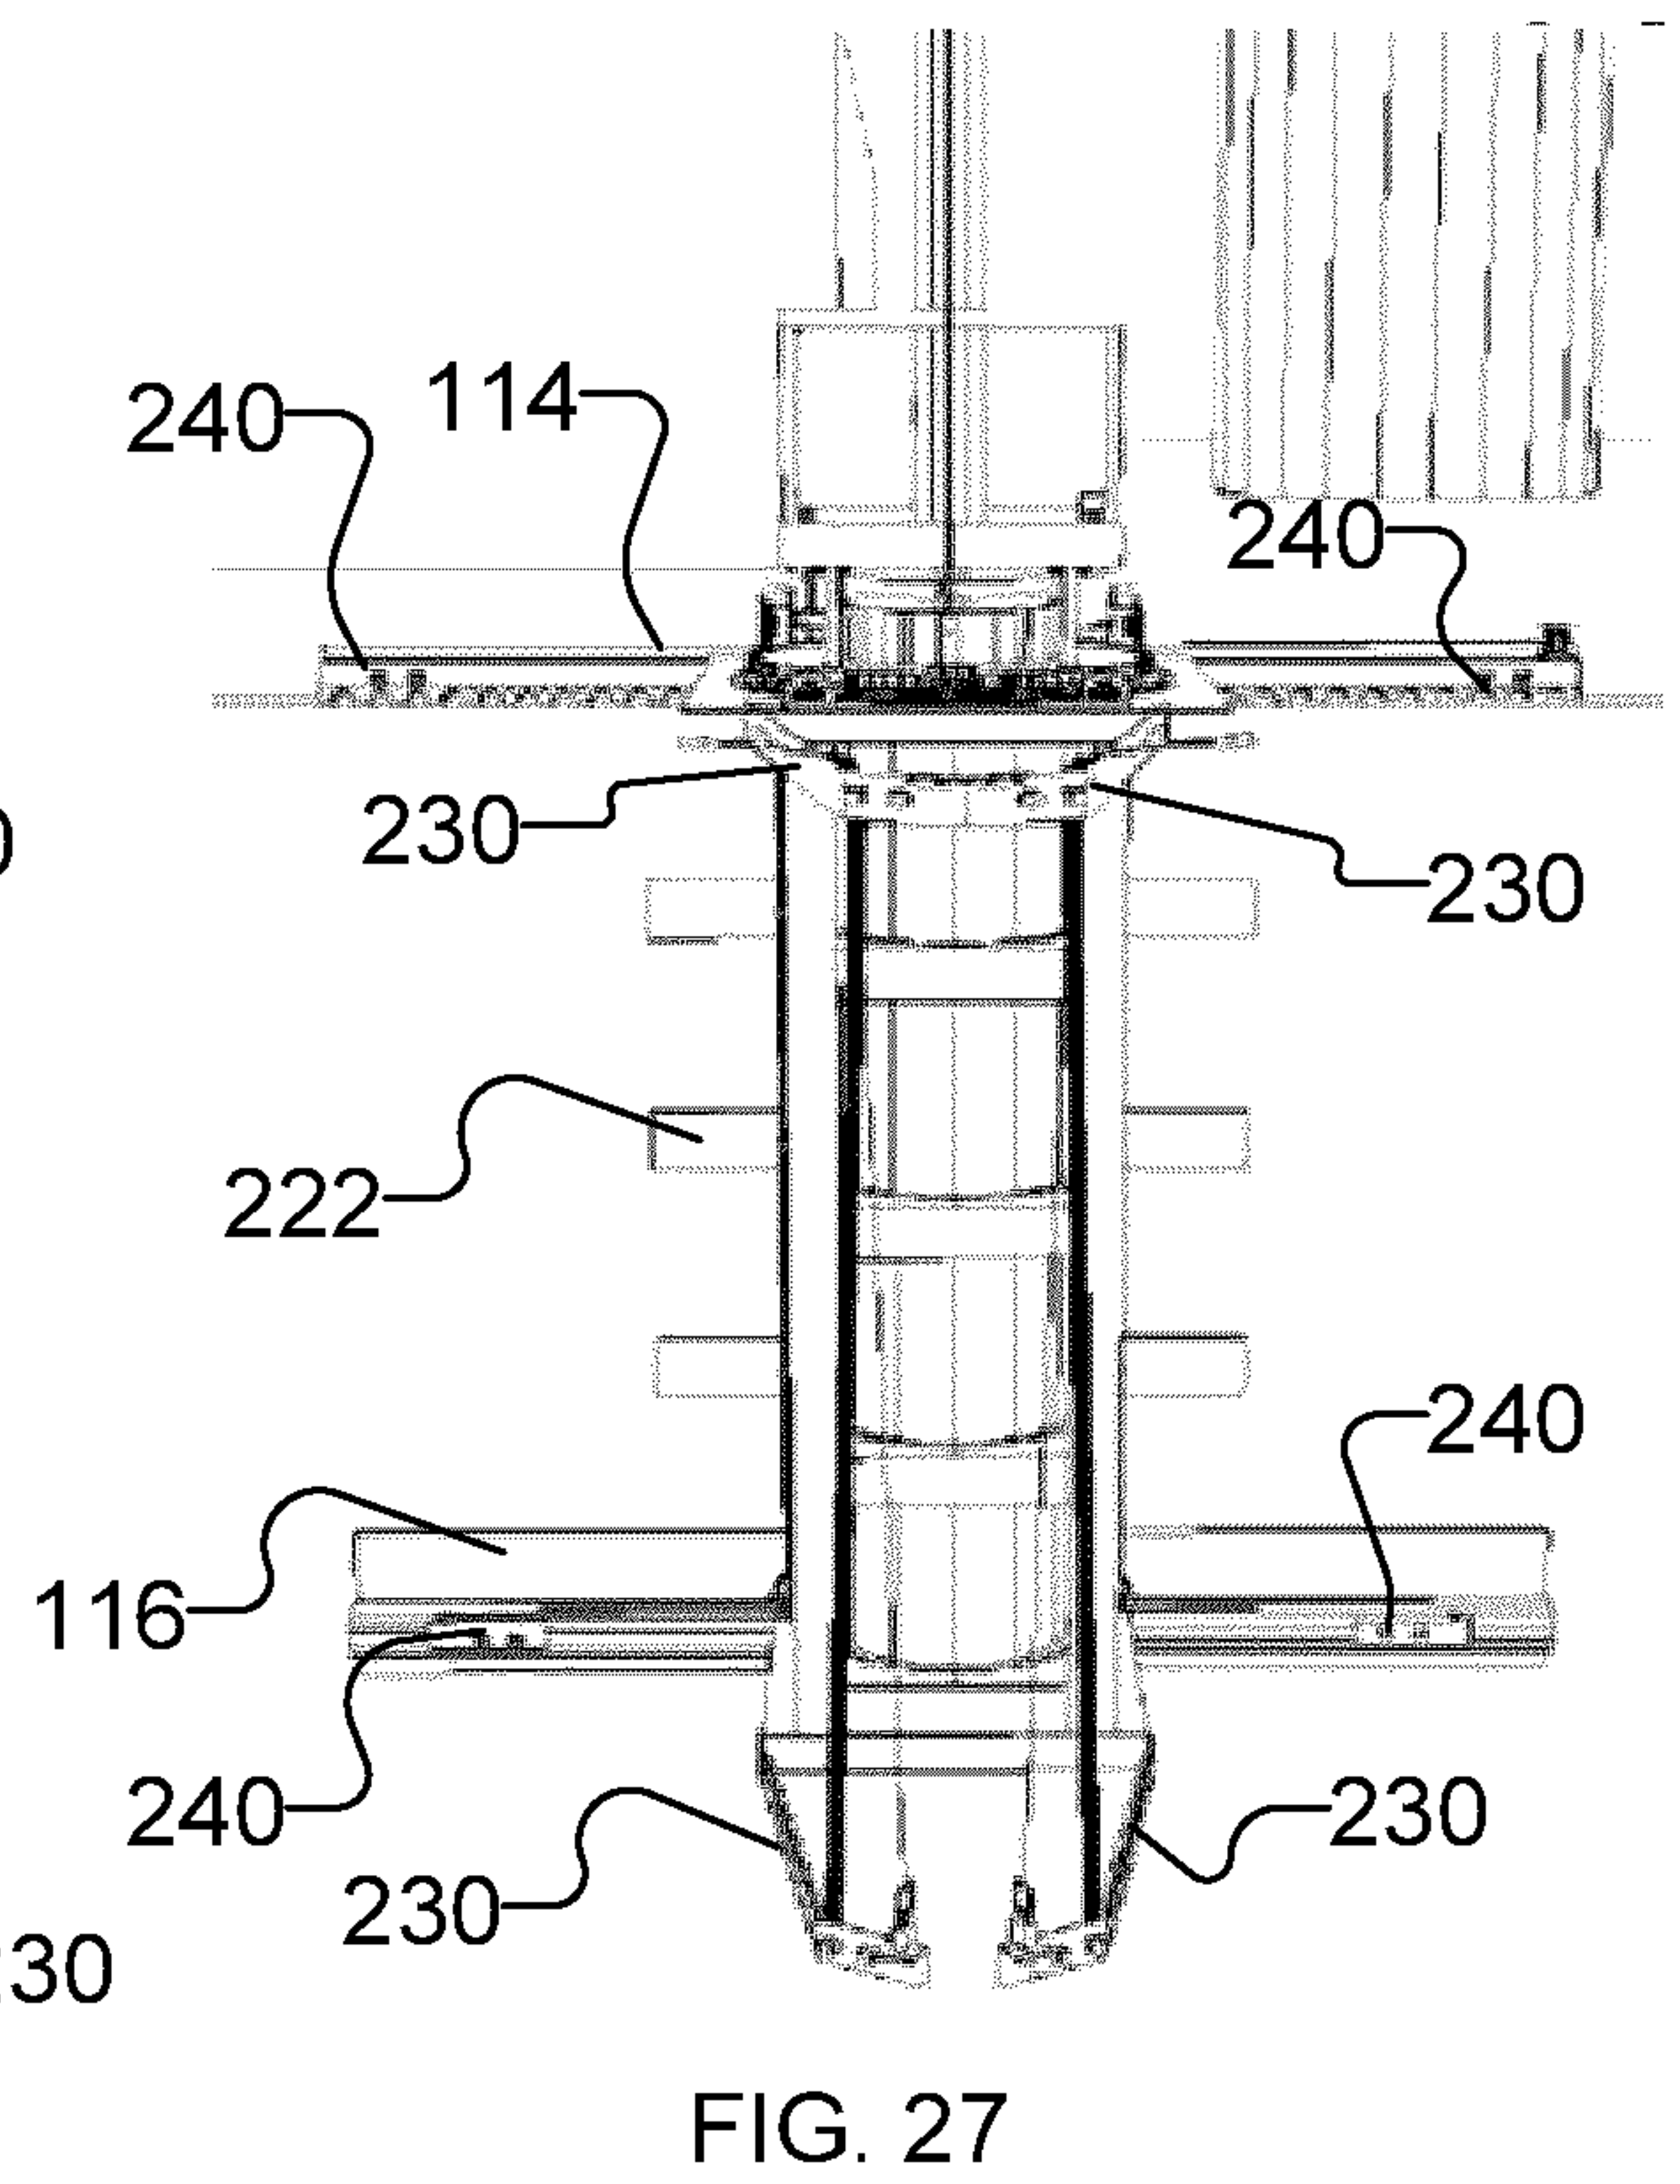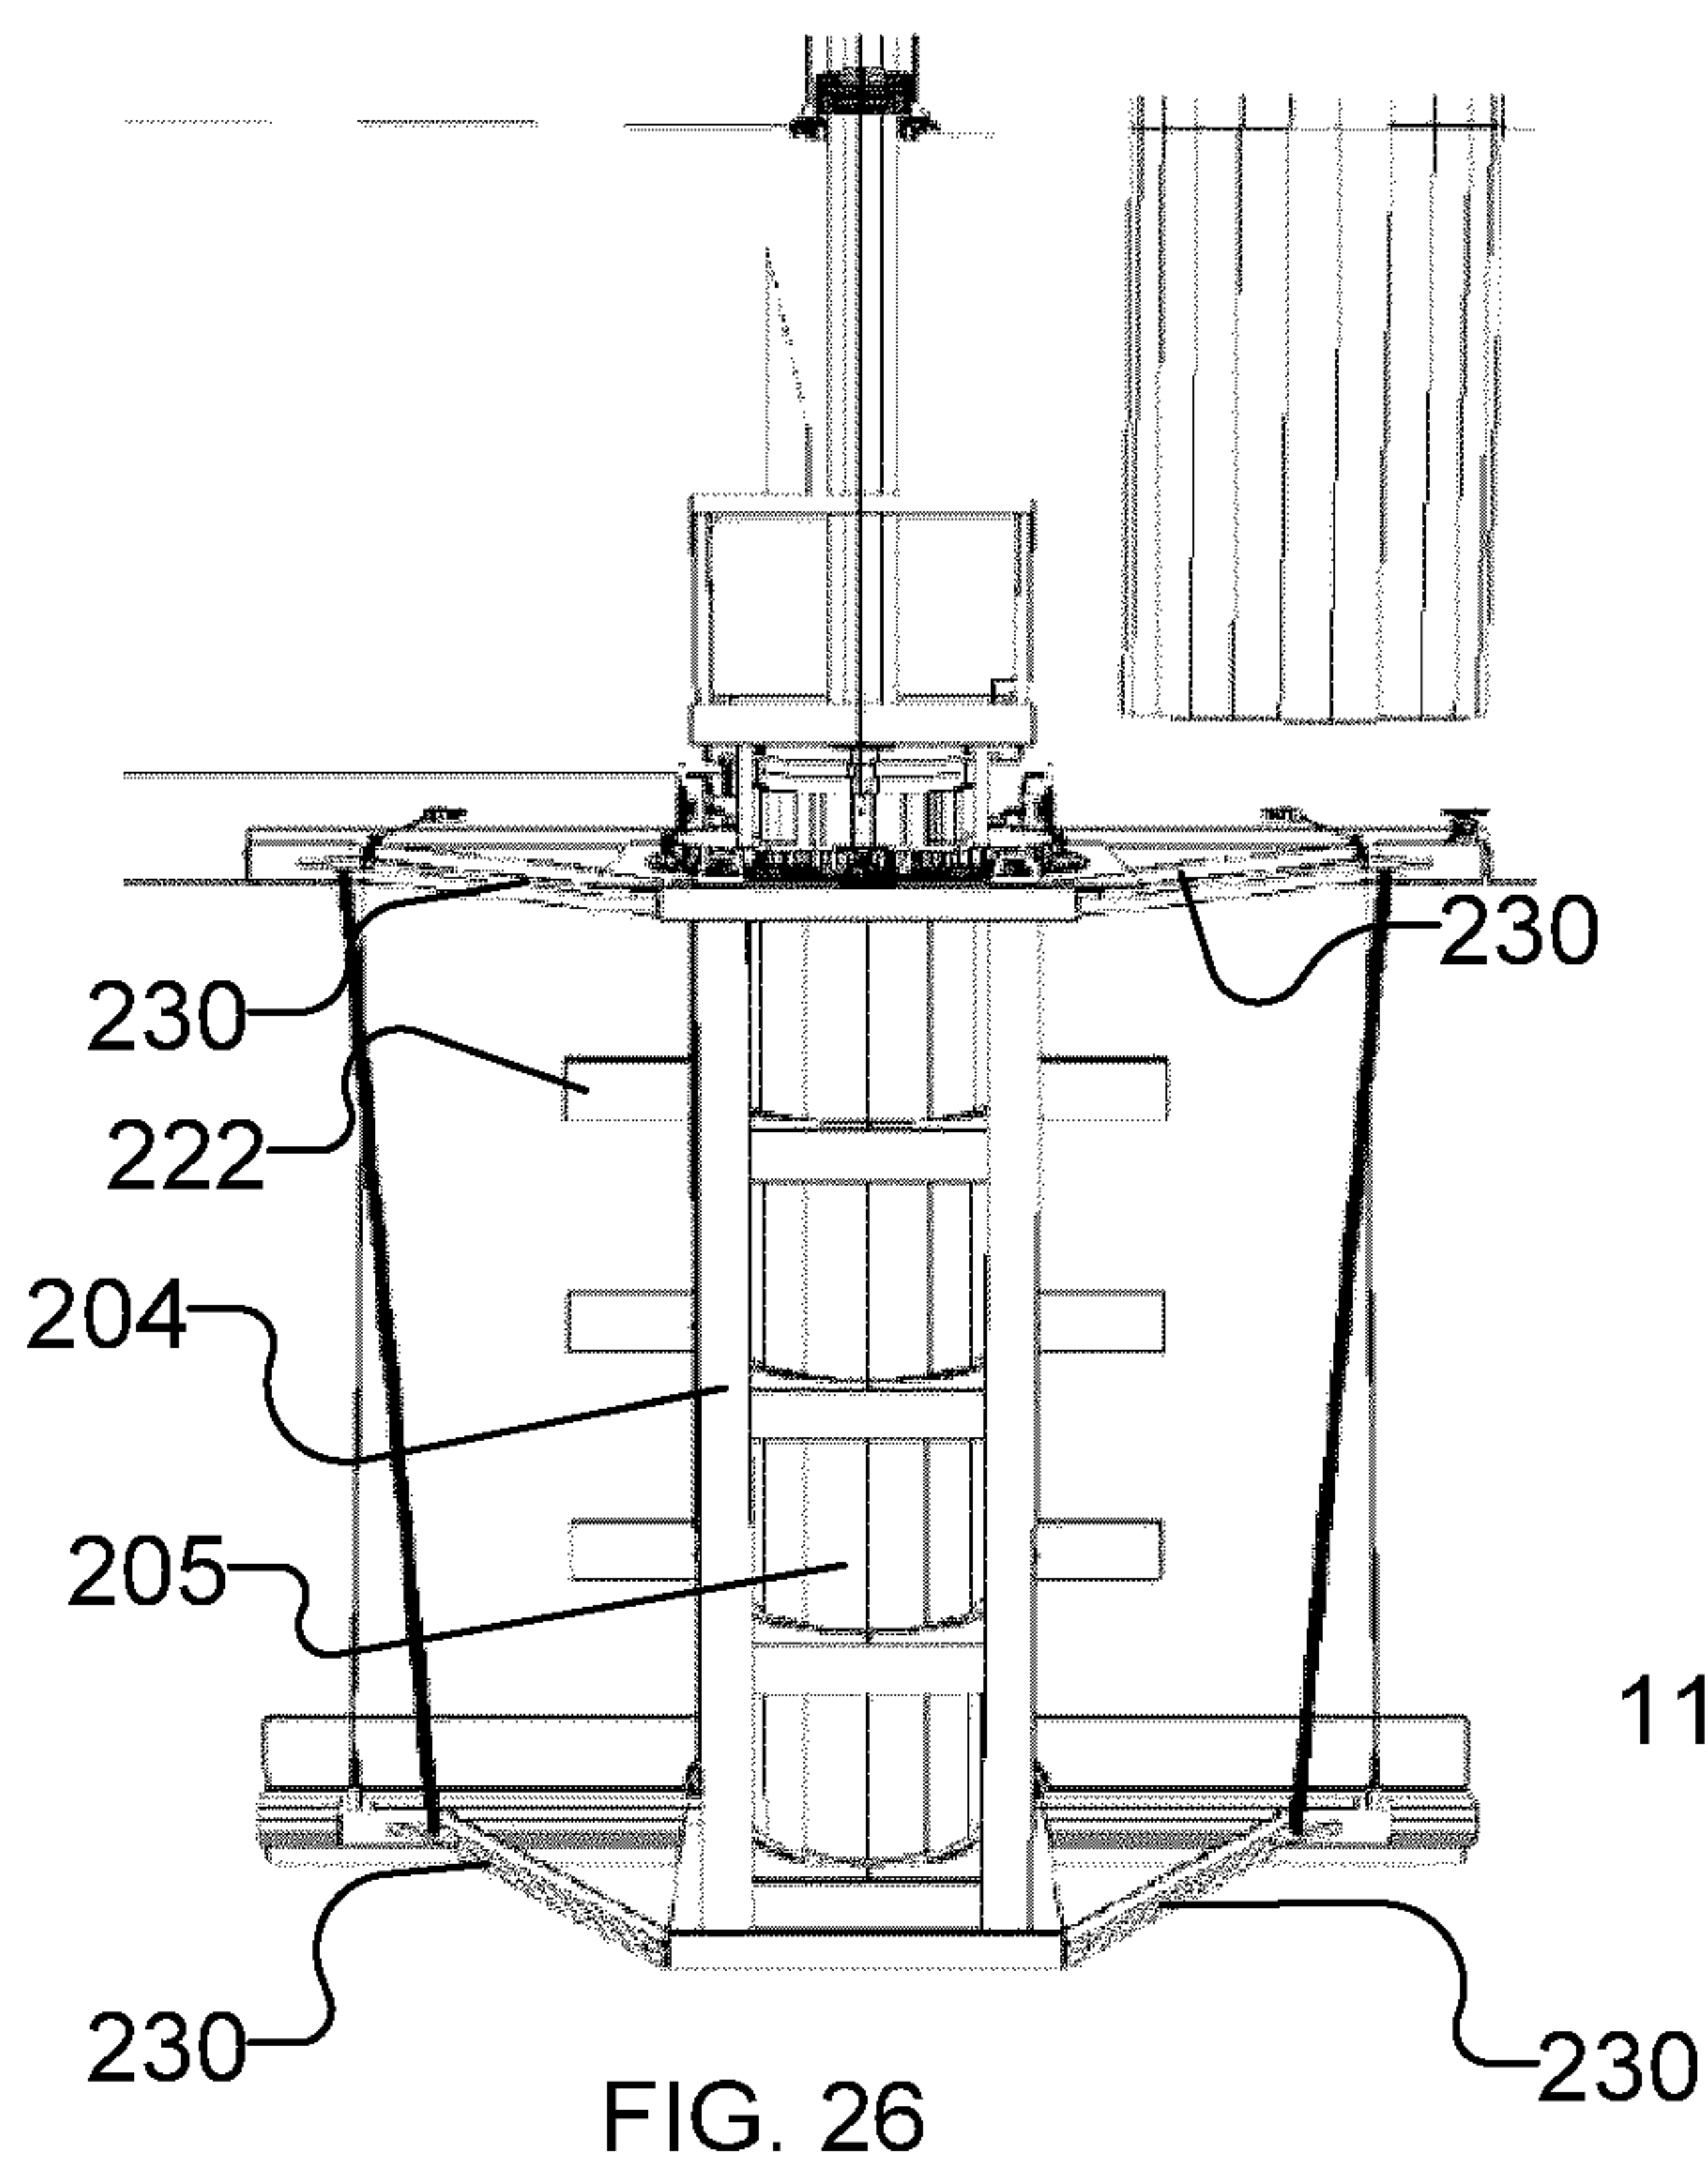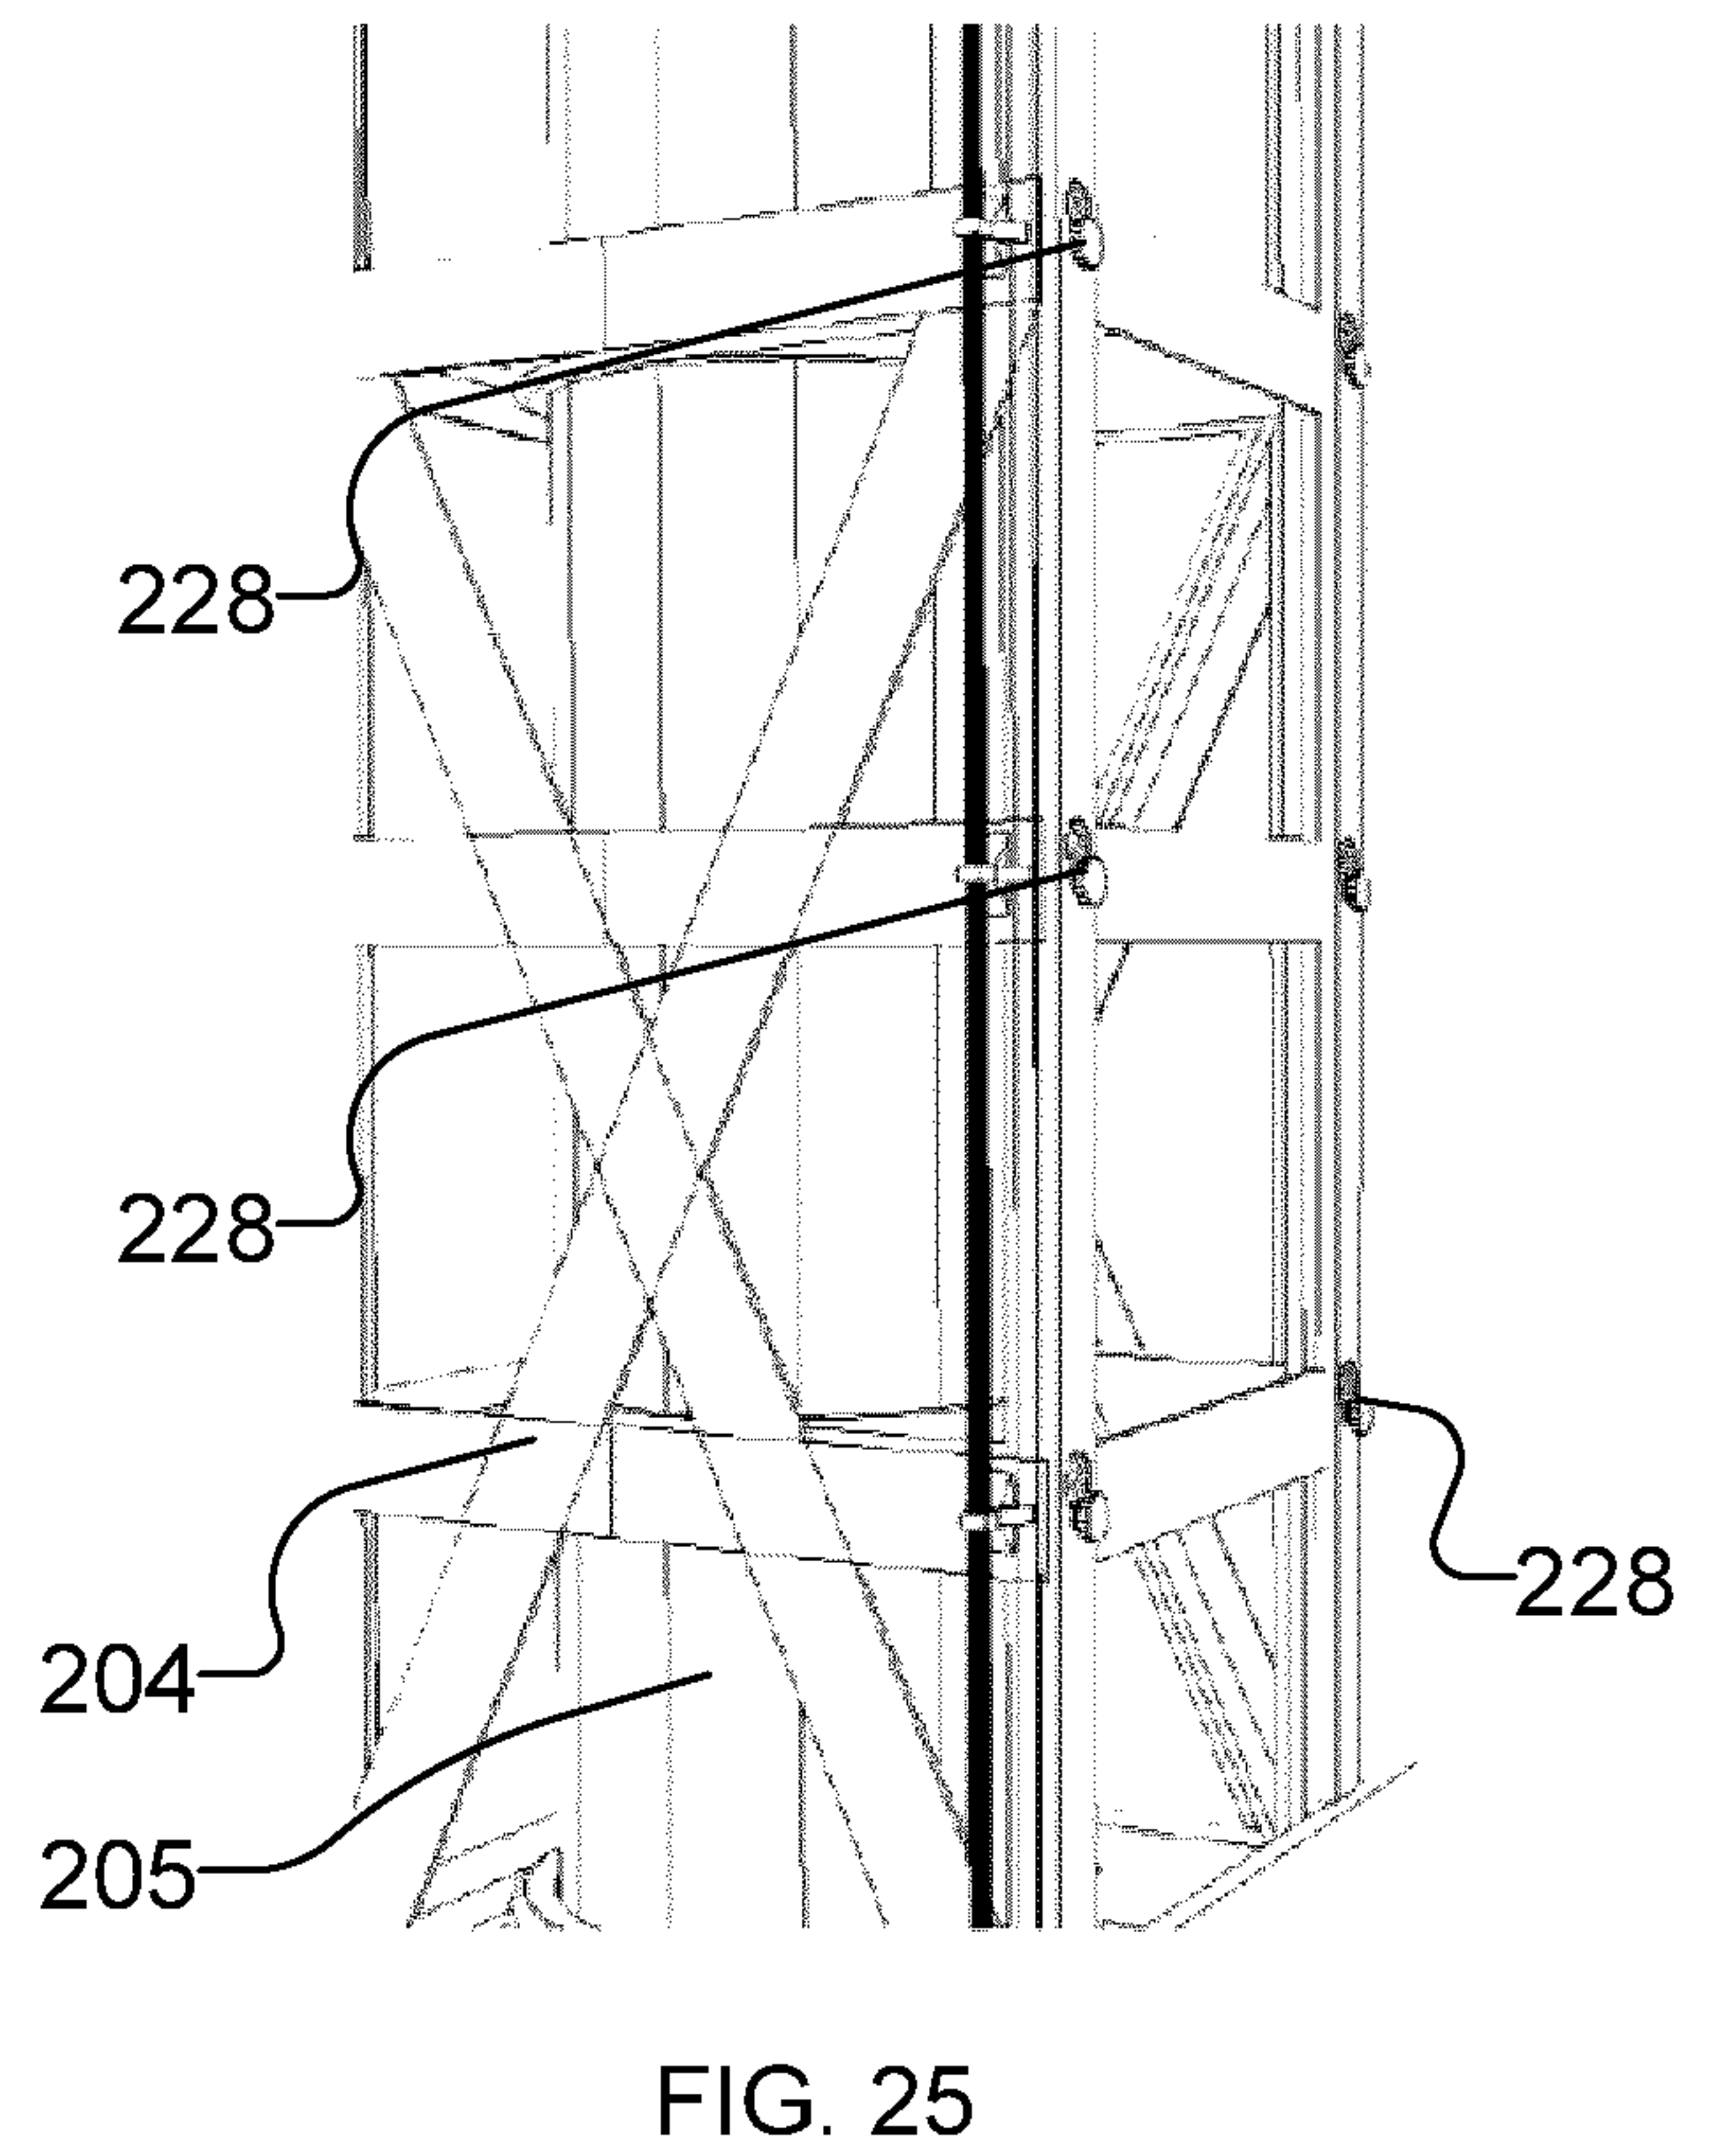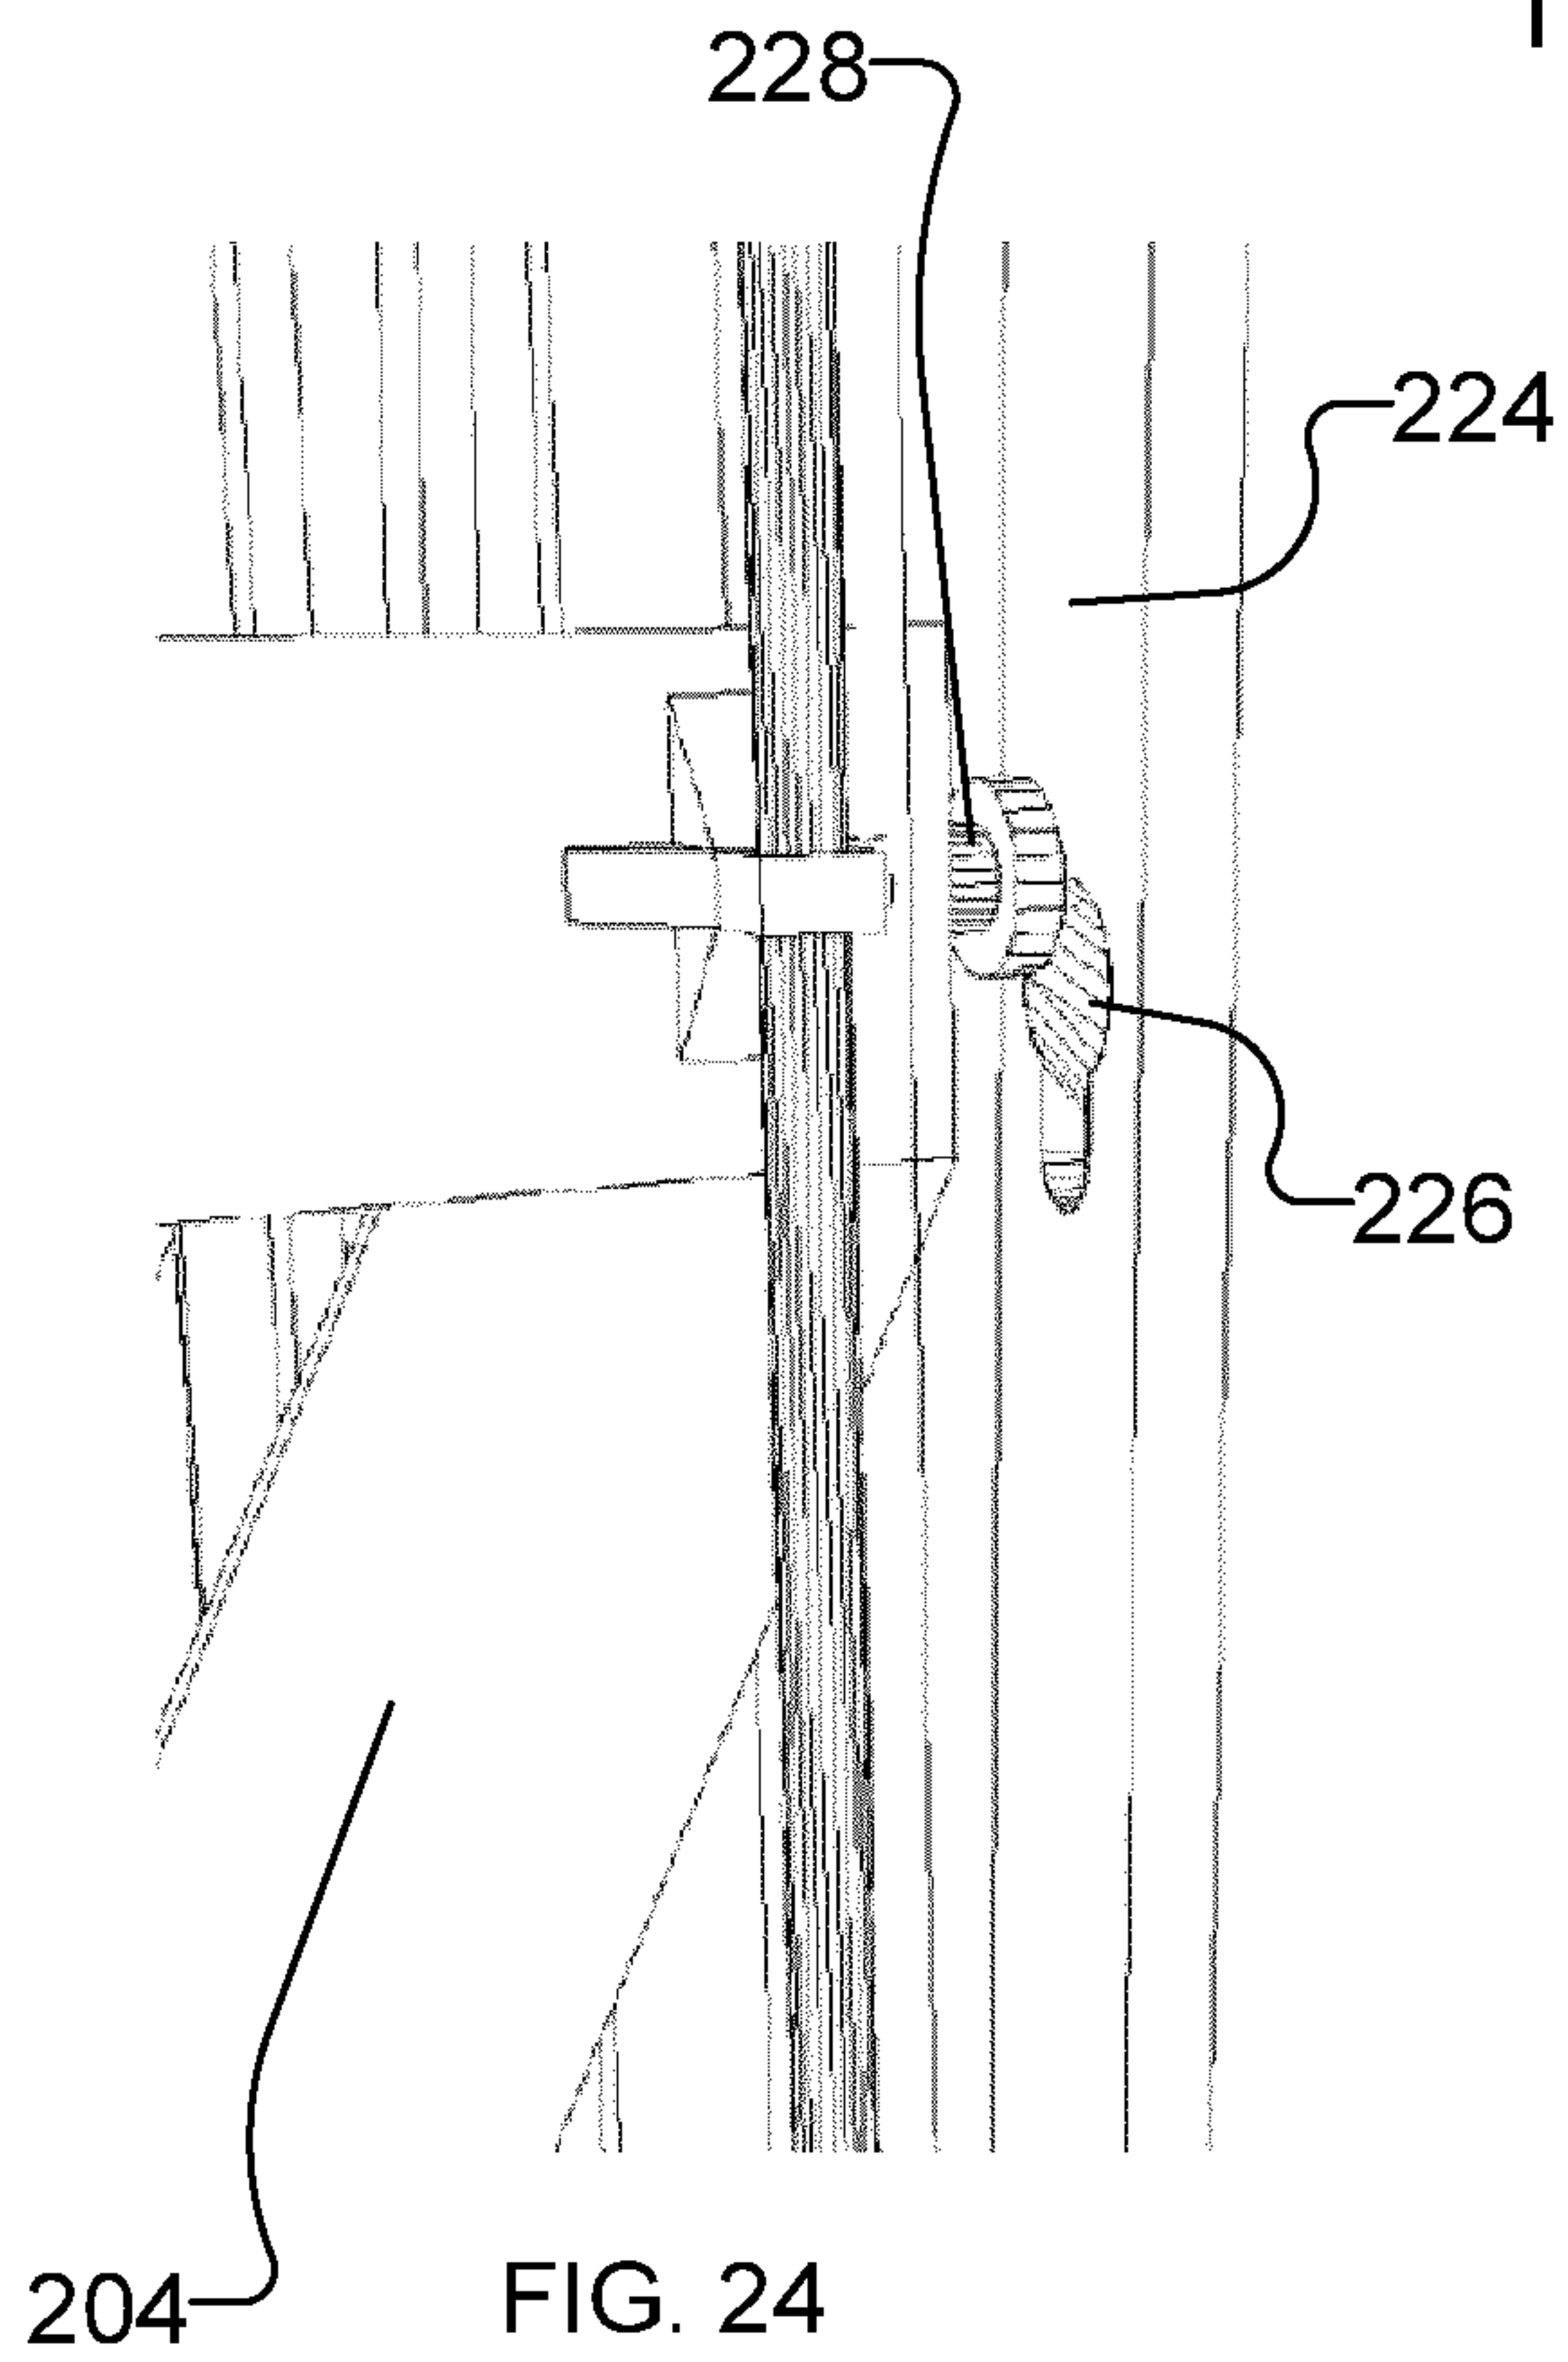

12/19

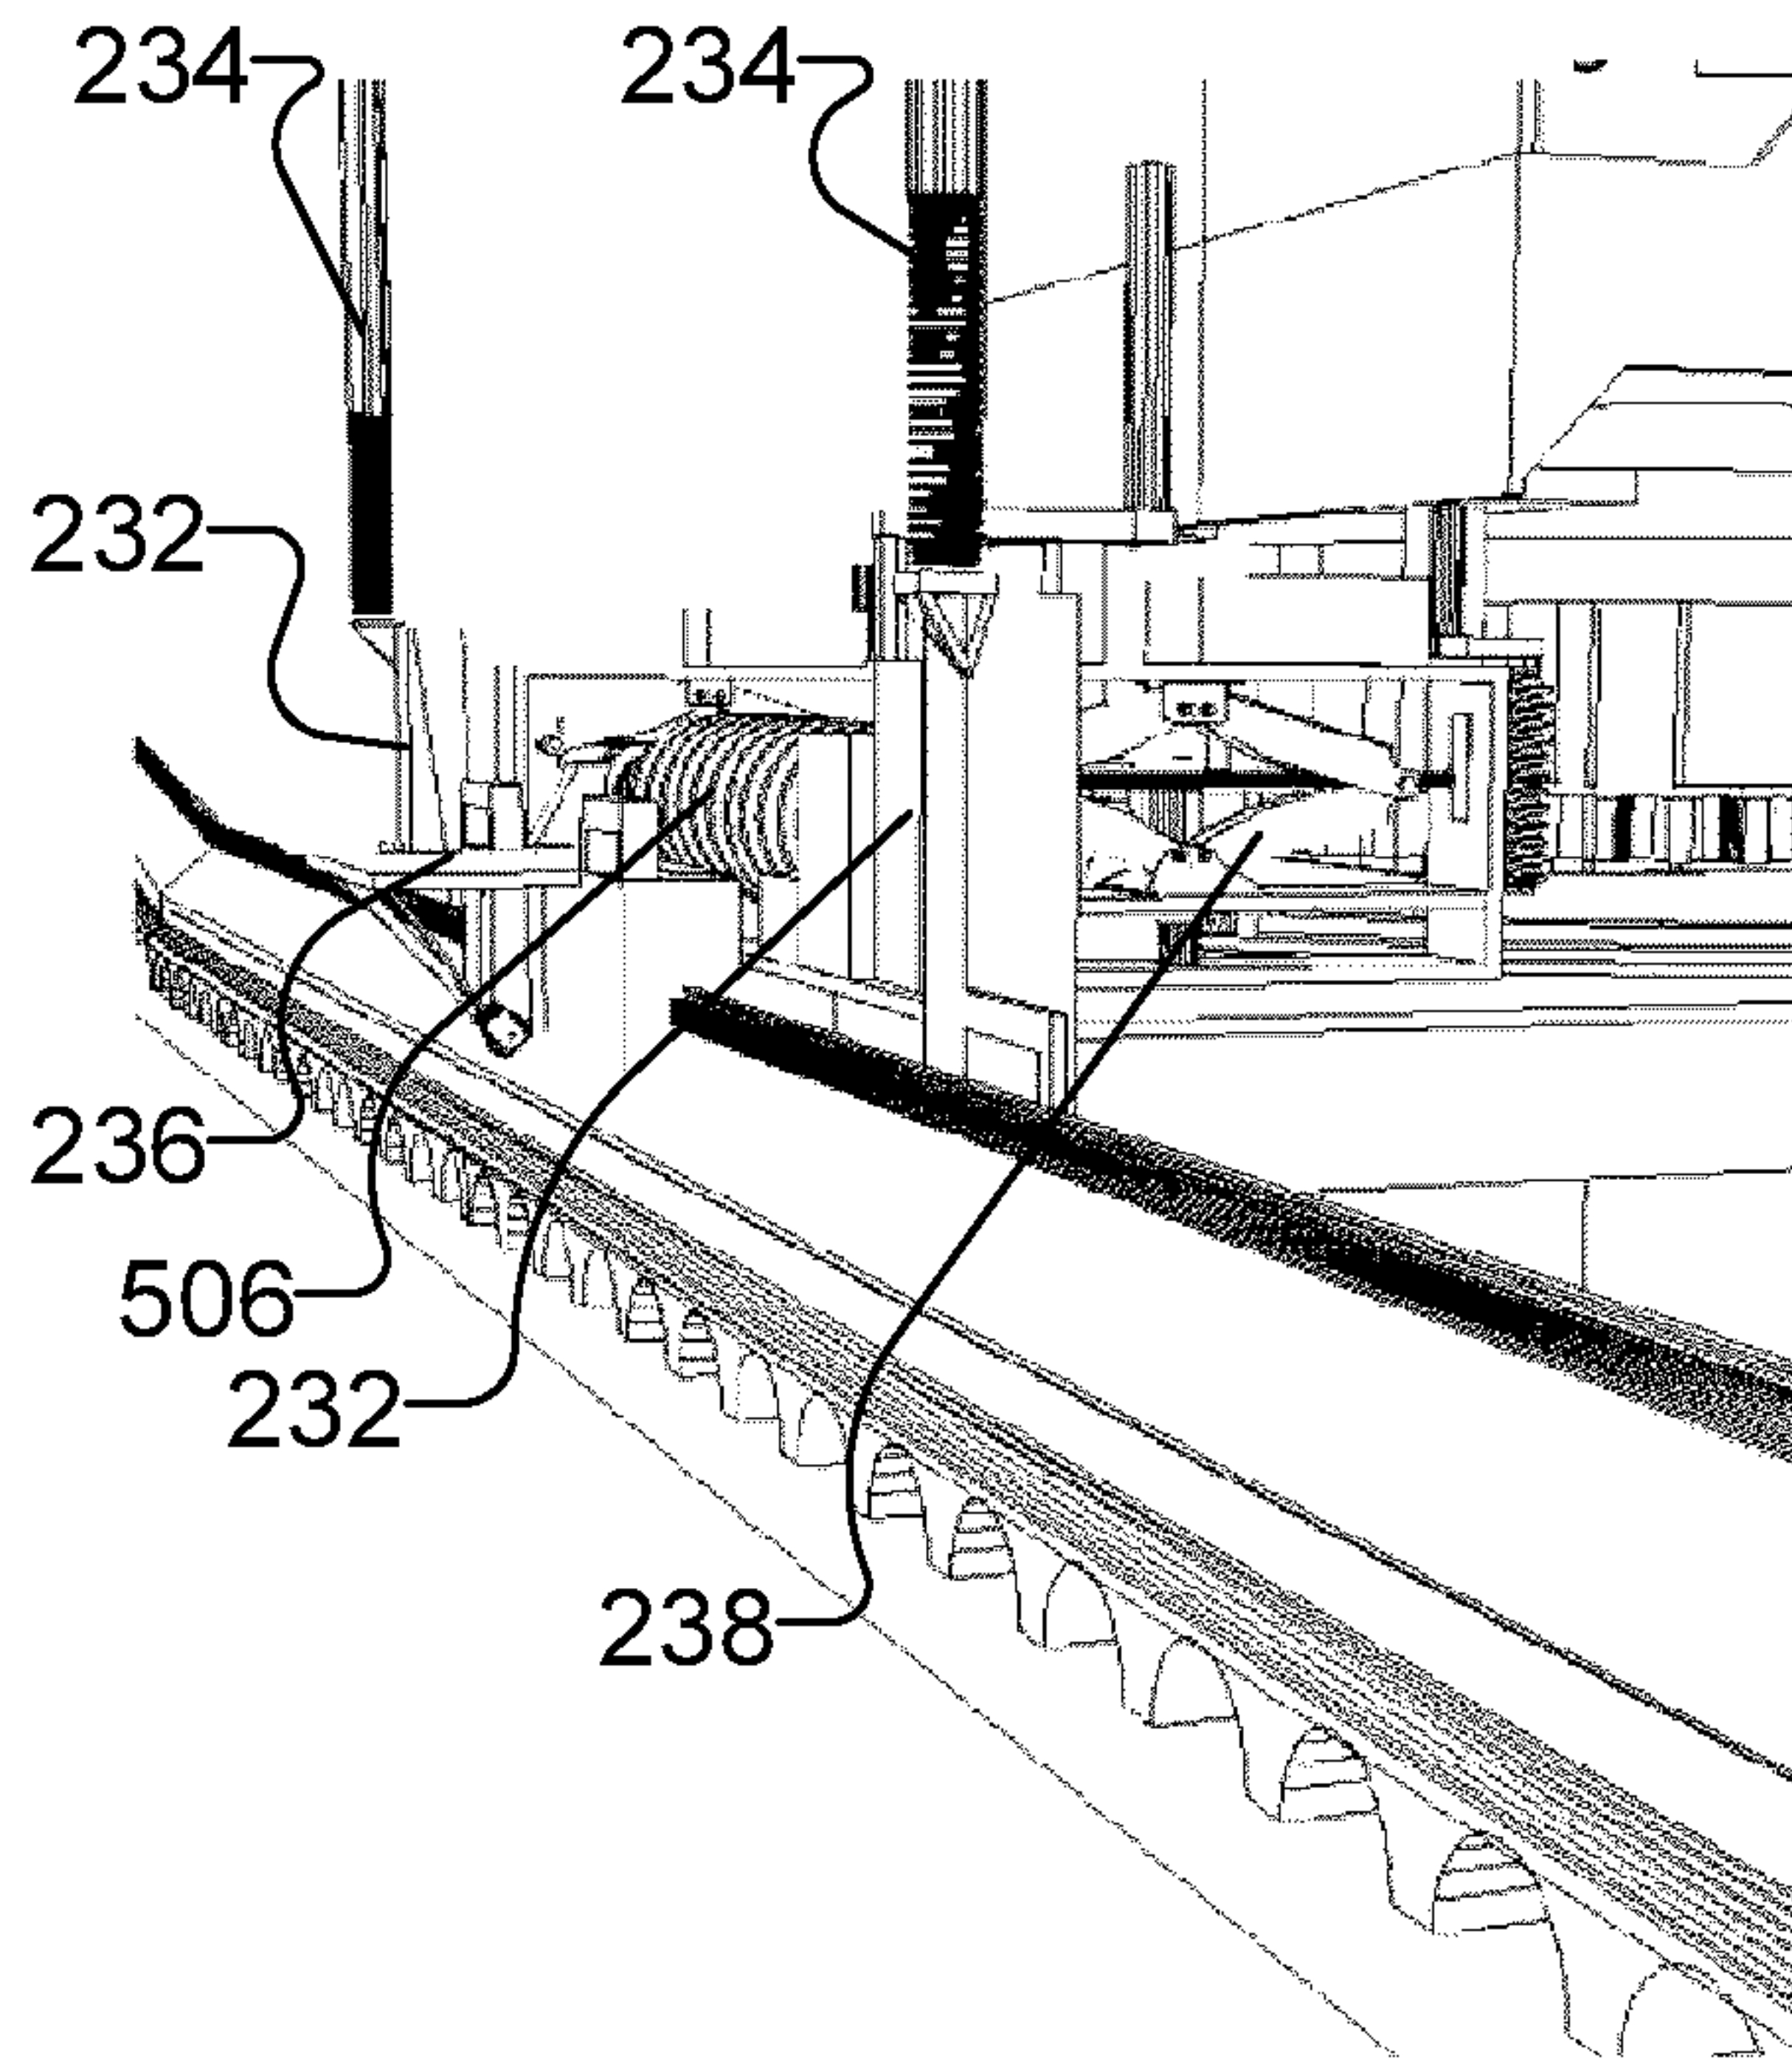


FIG. 28

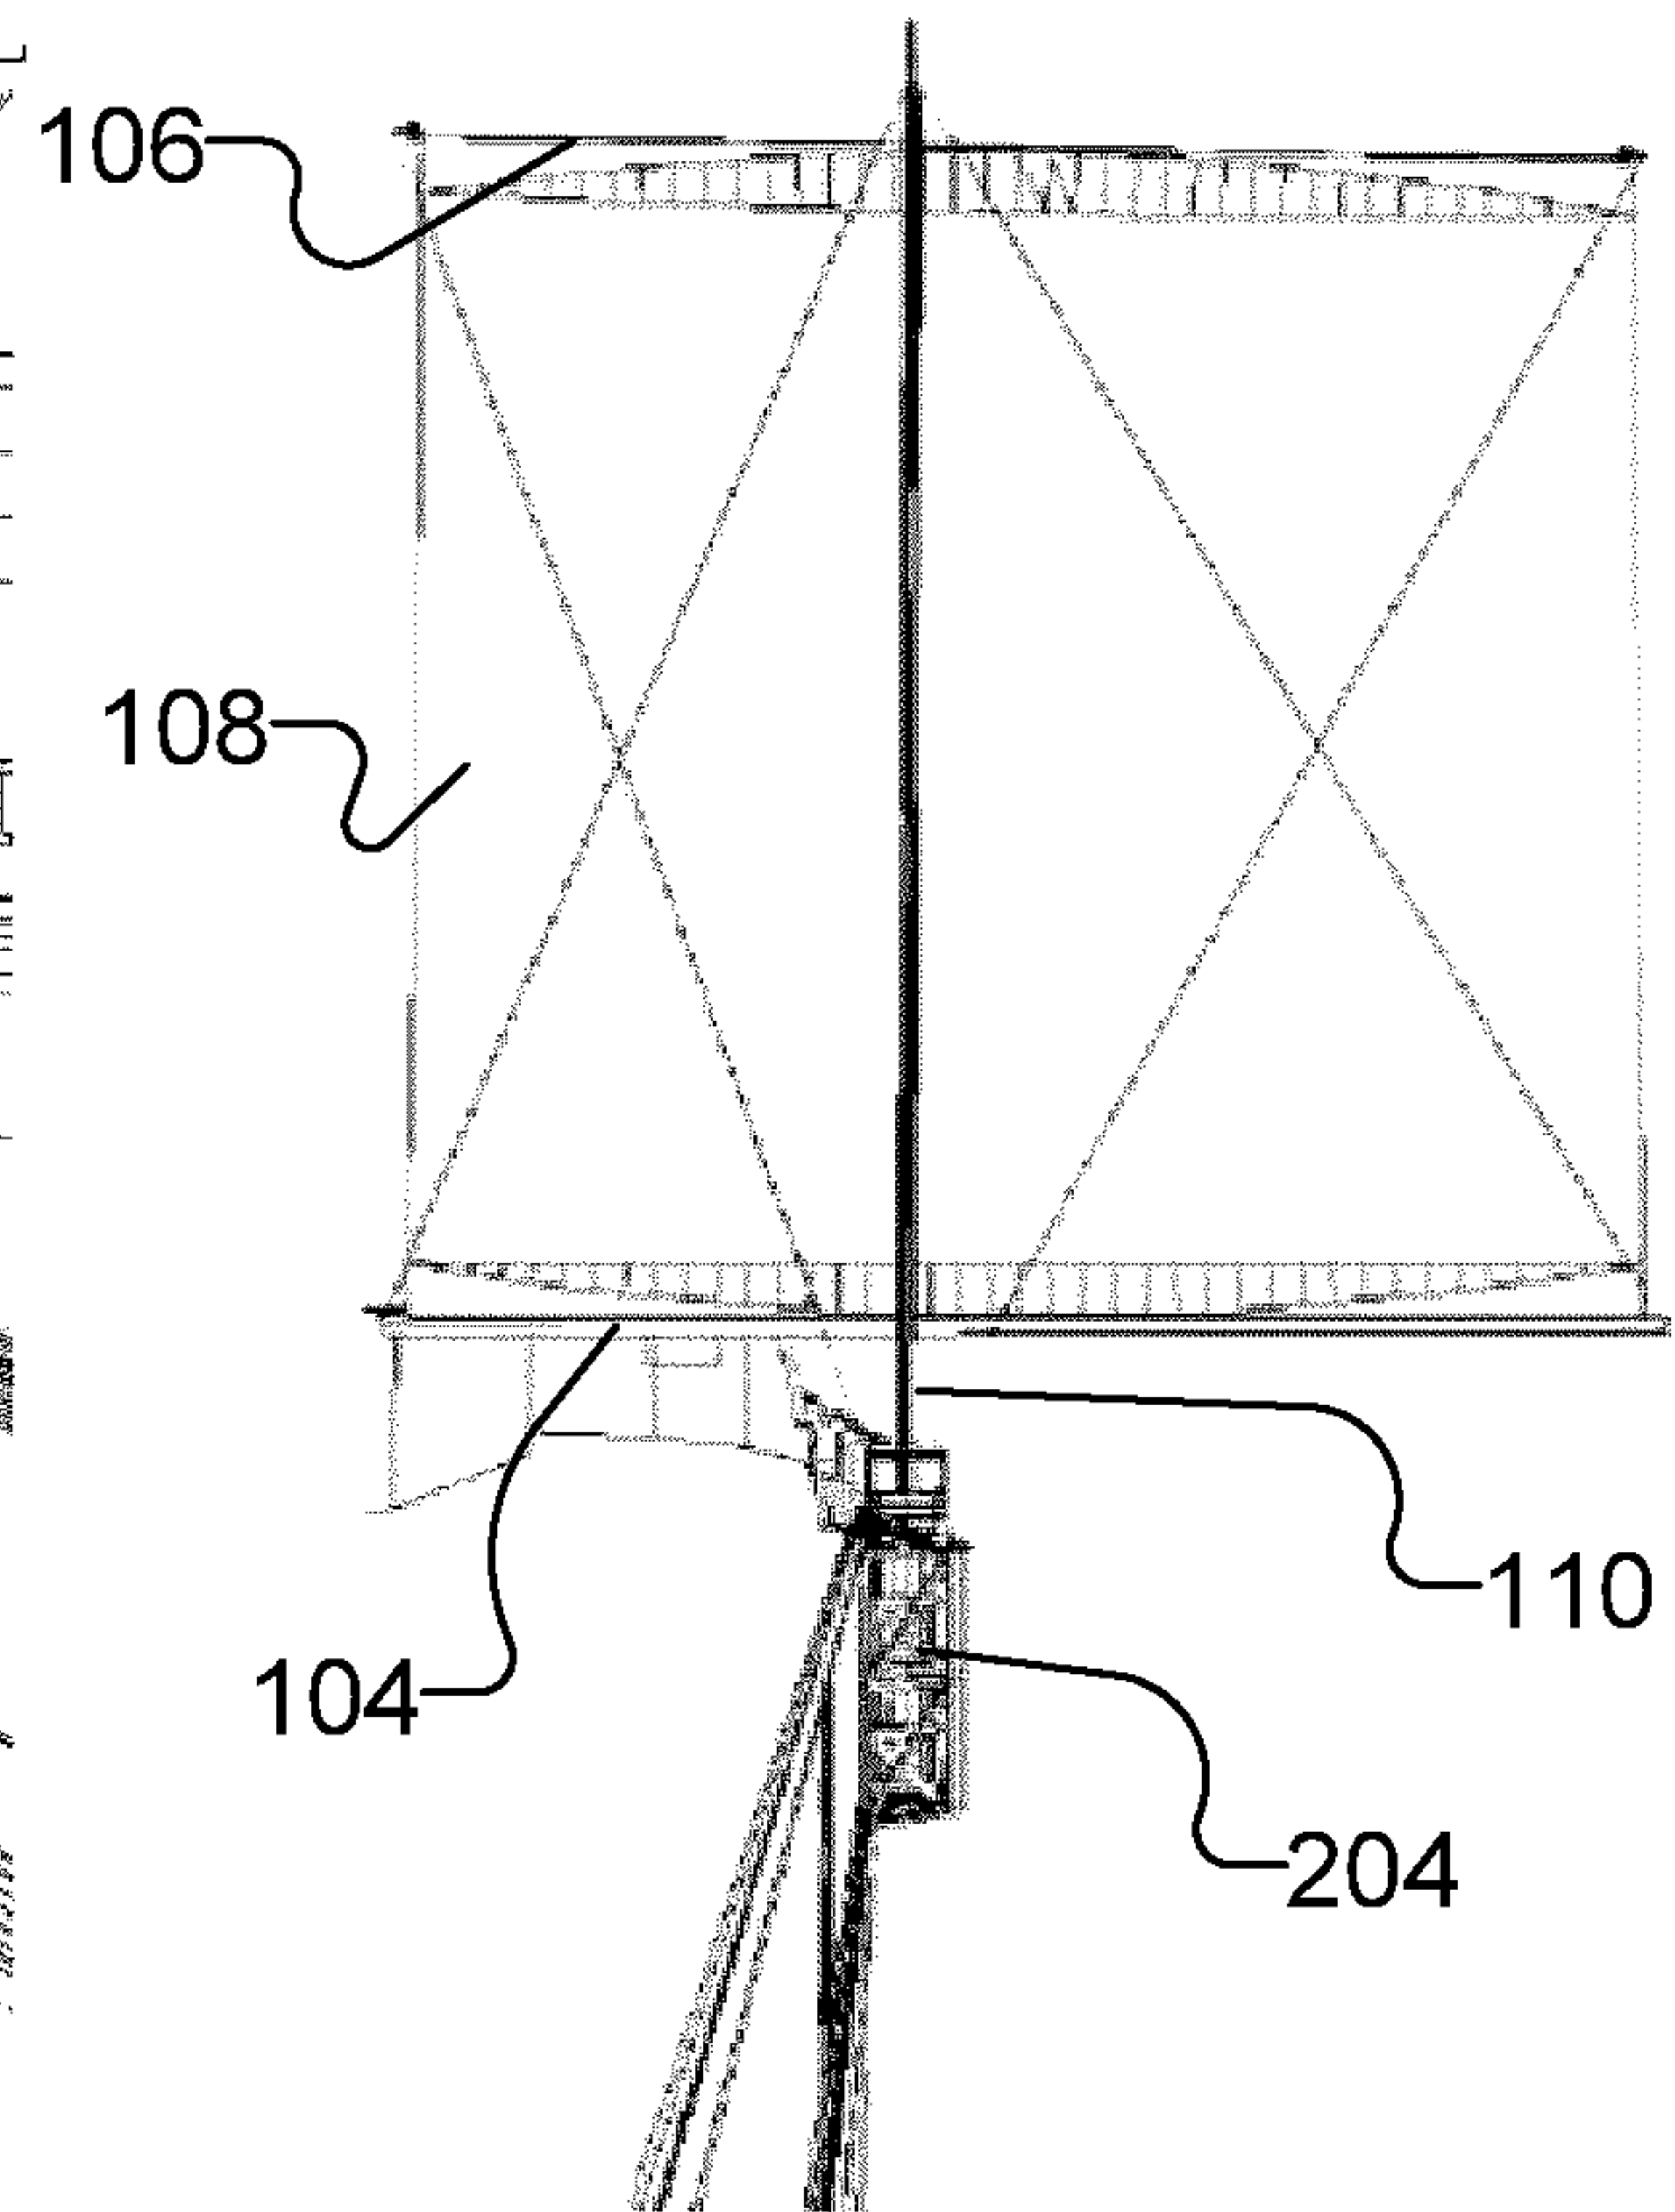


FIG. 29

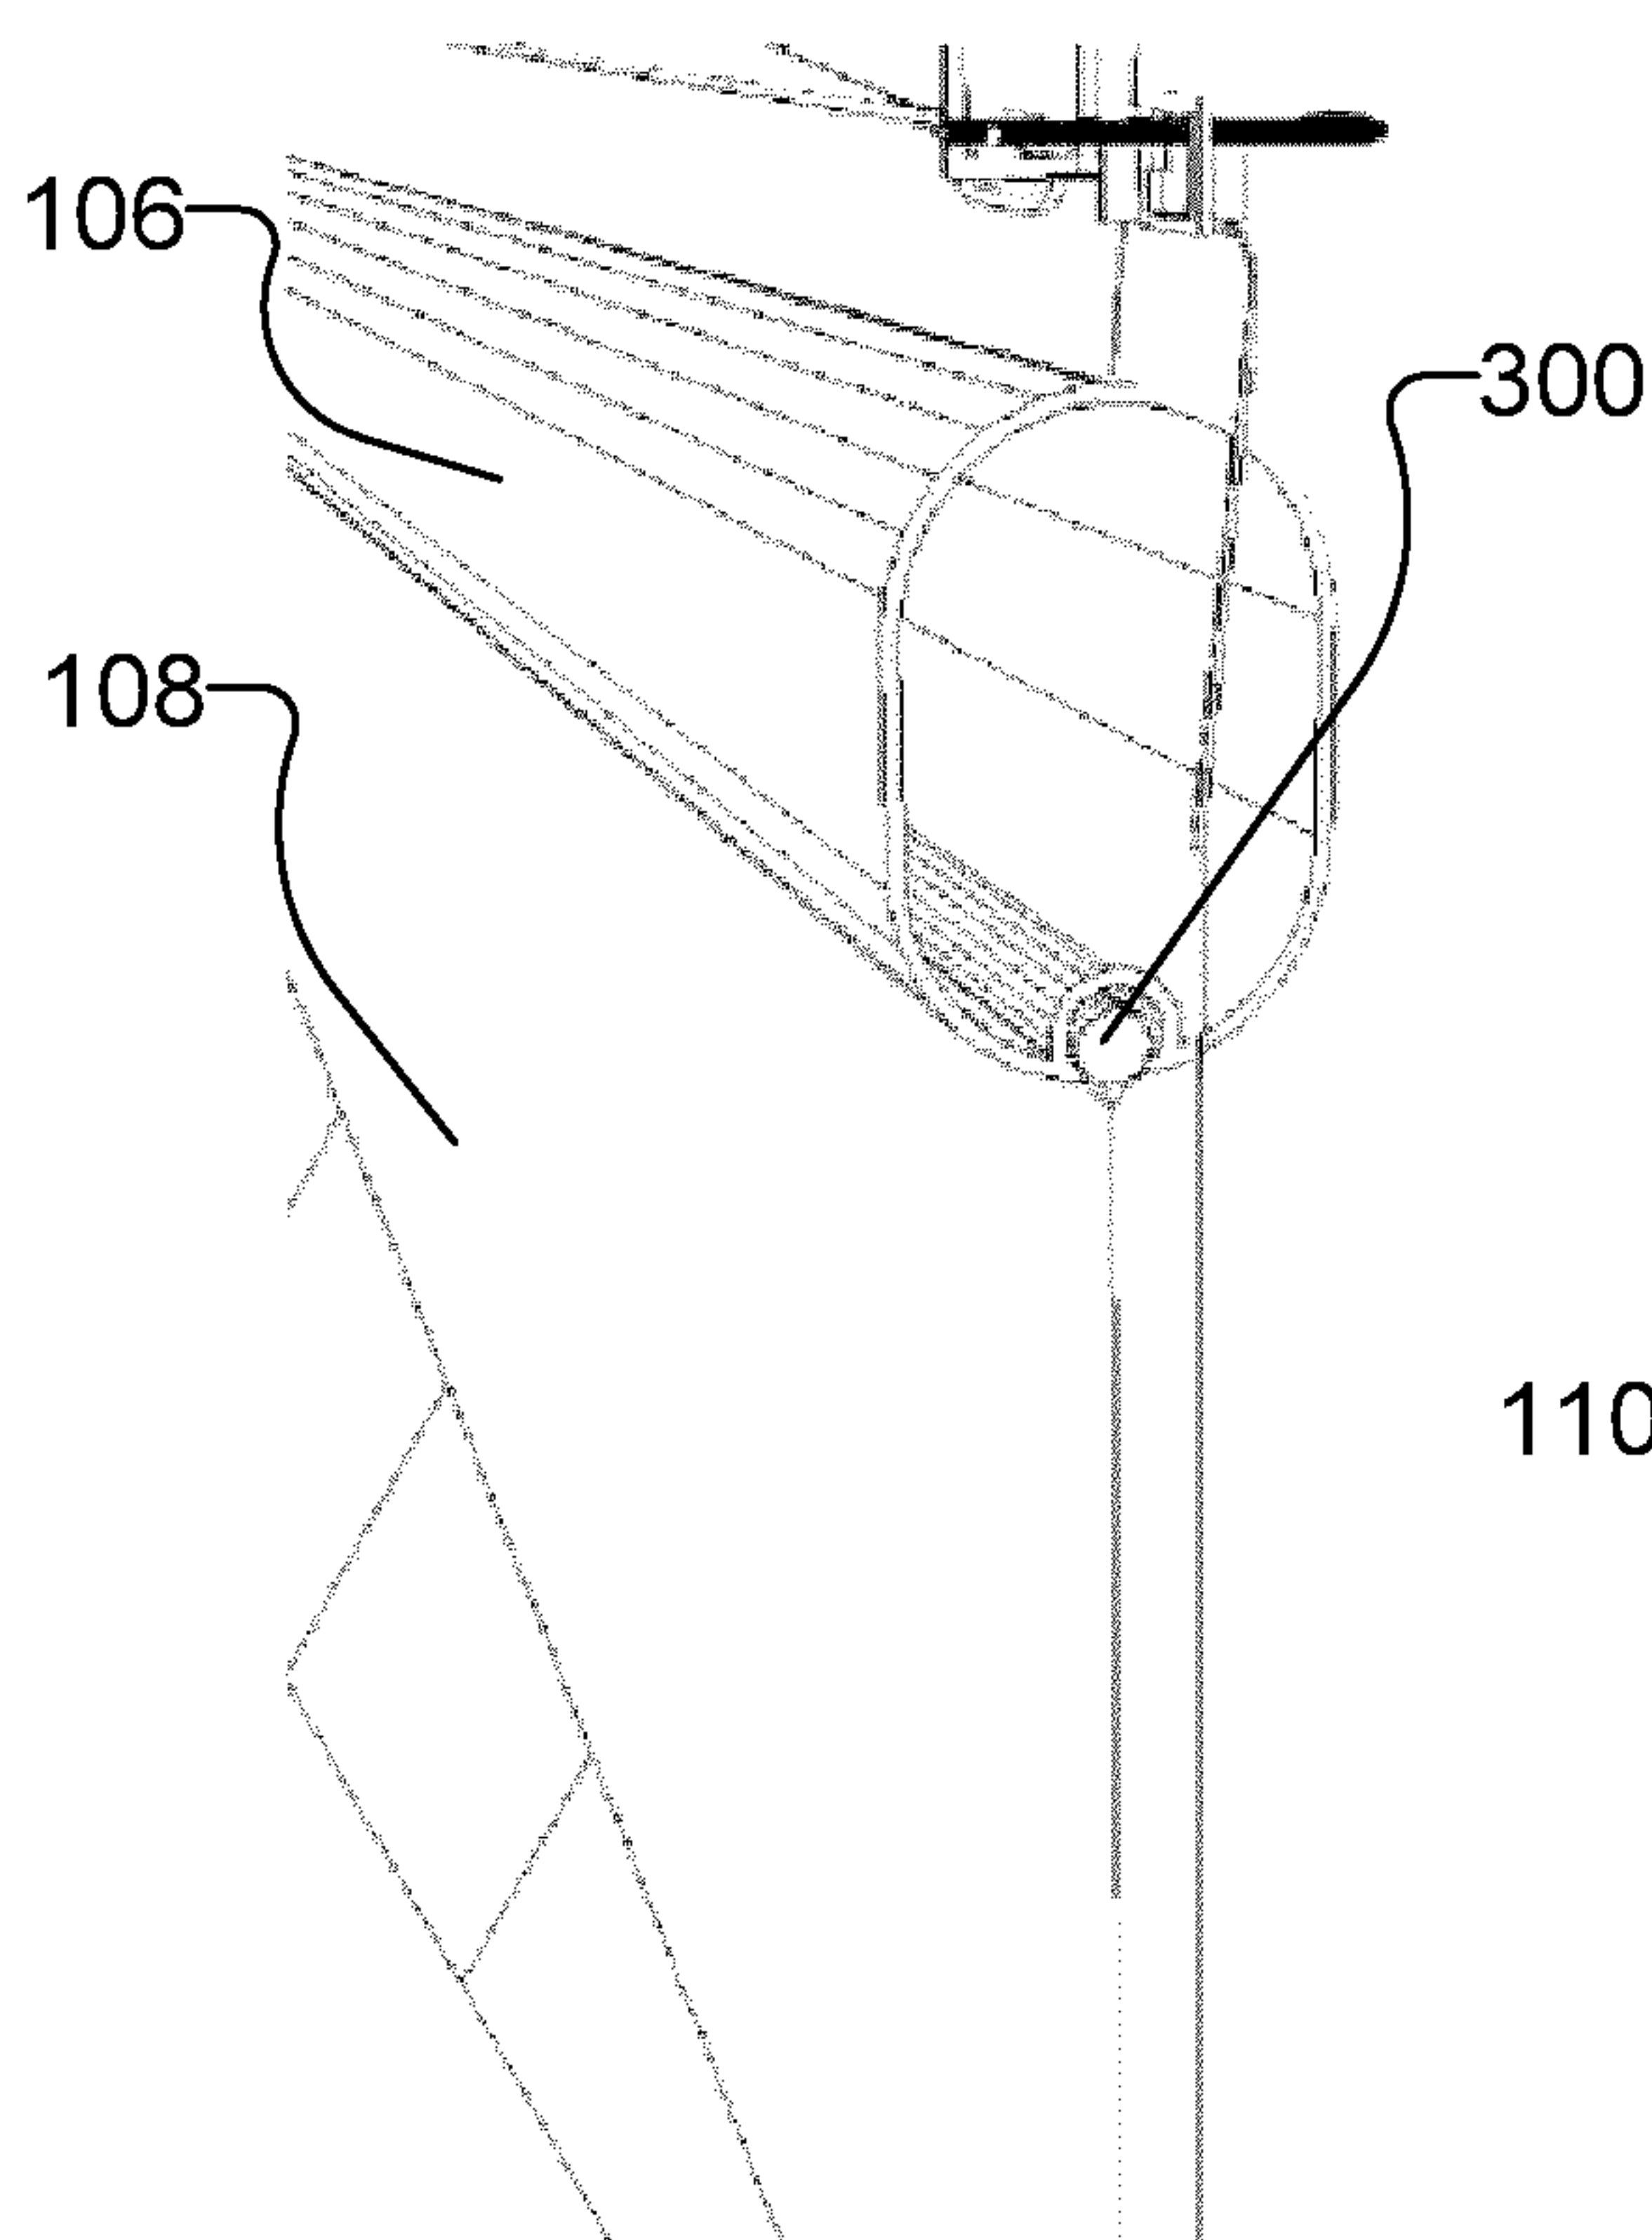


FIG. 30



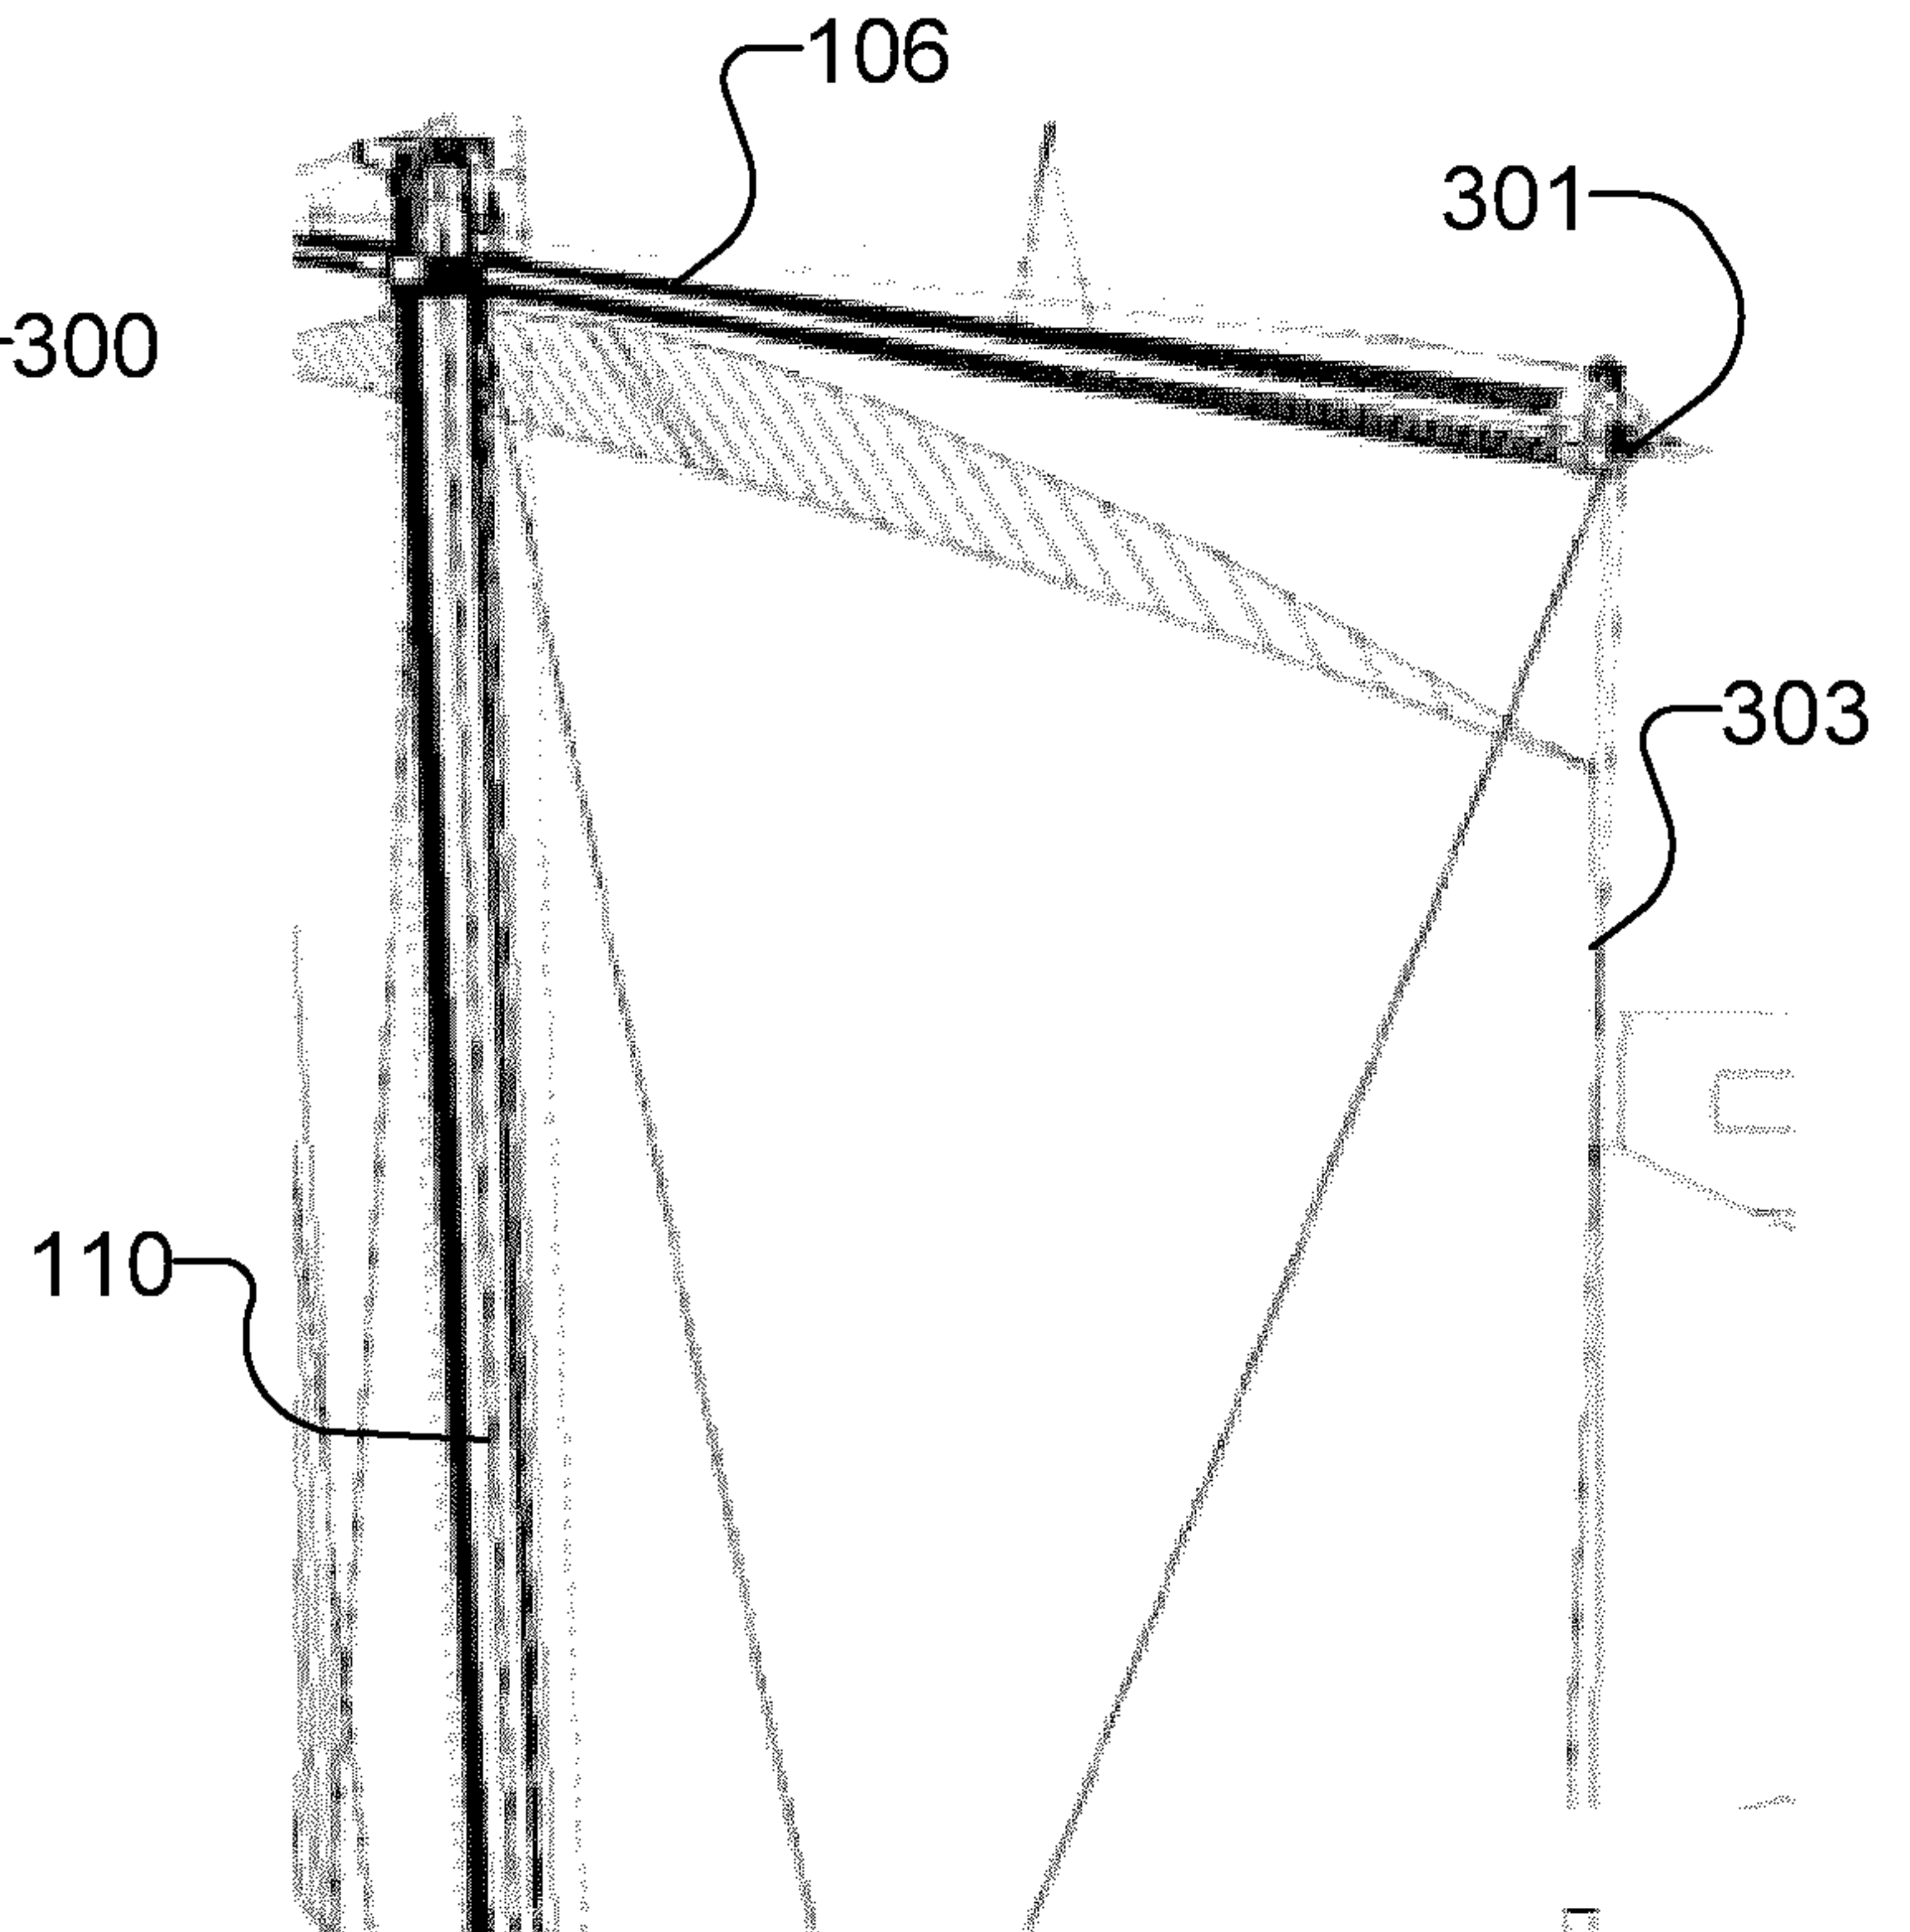


FIG. 31

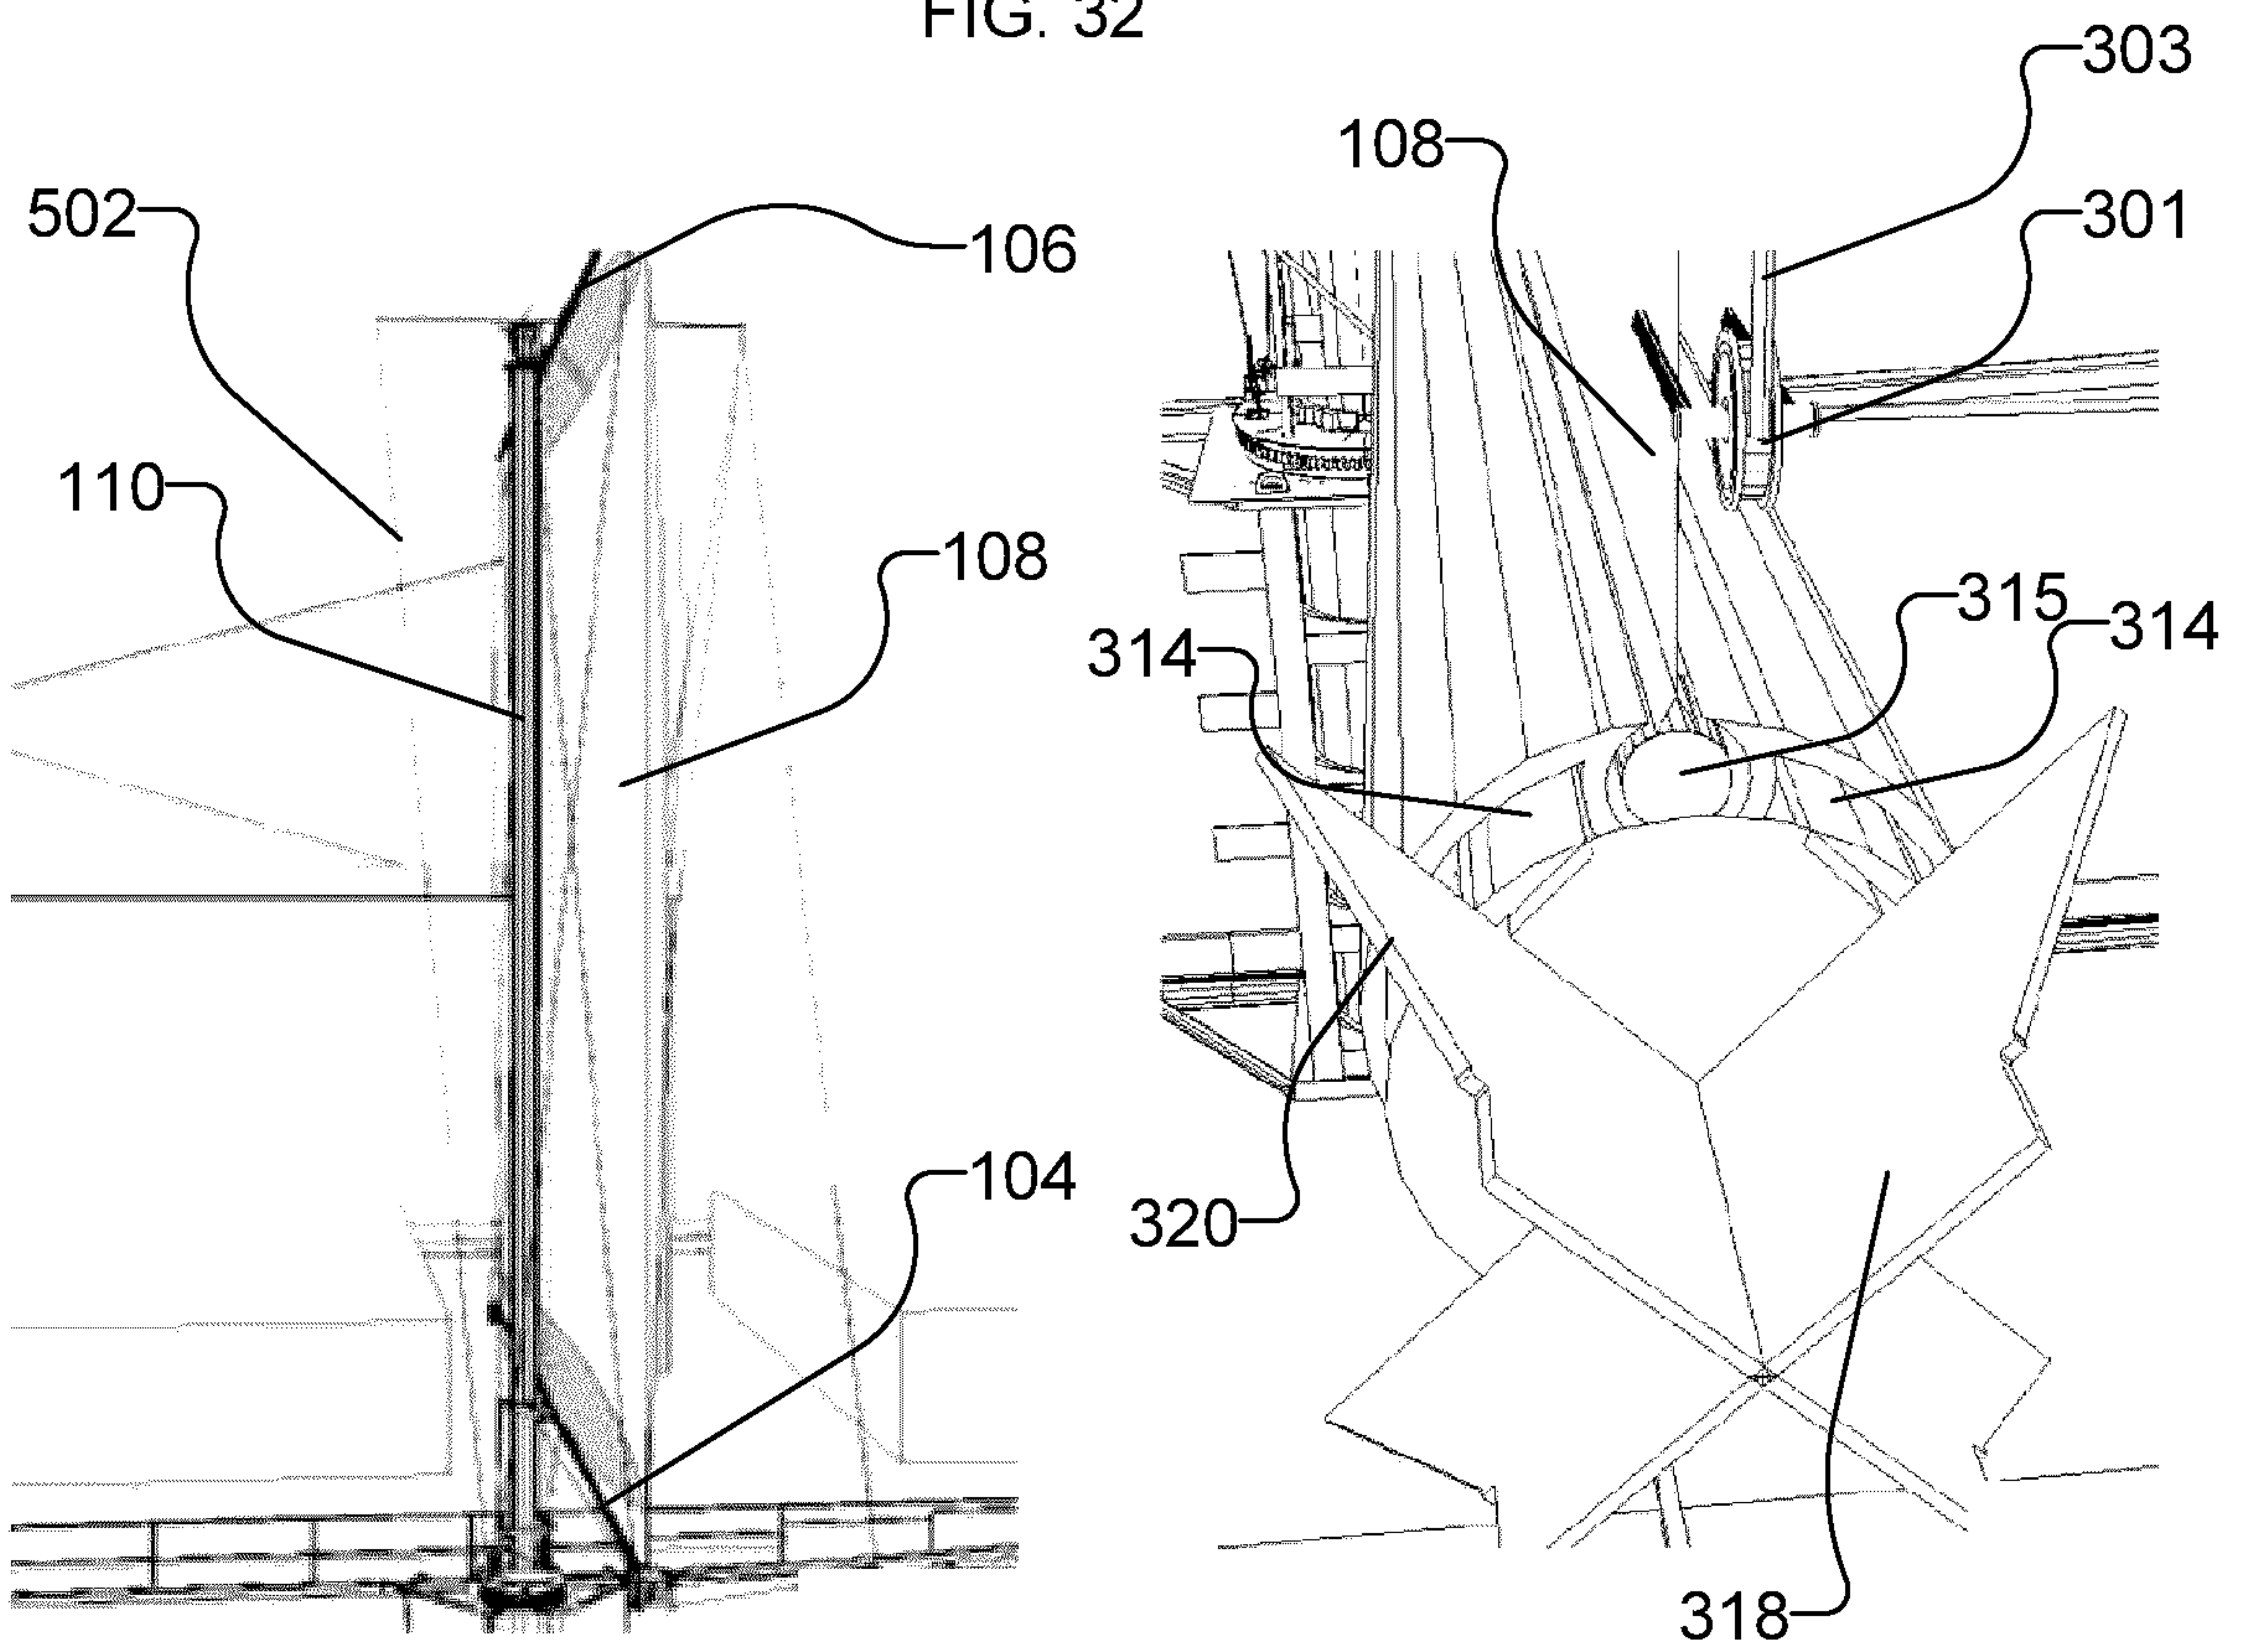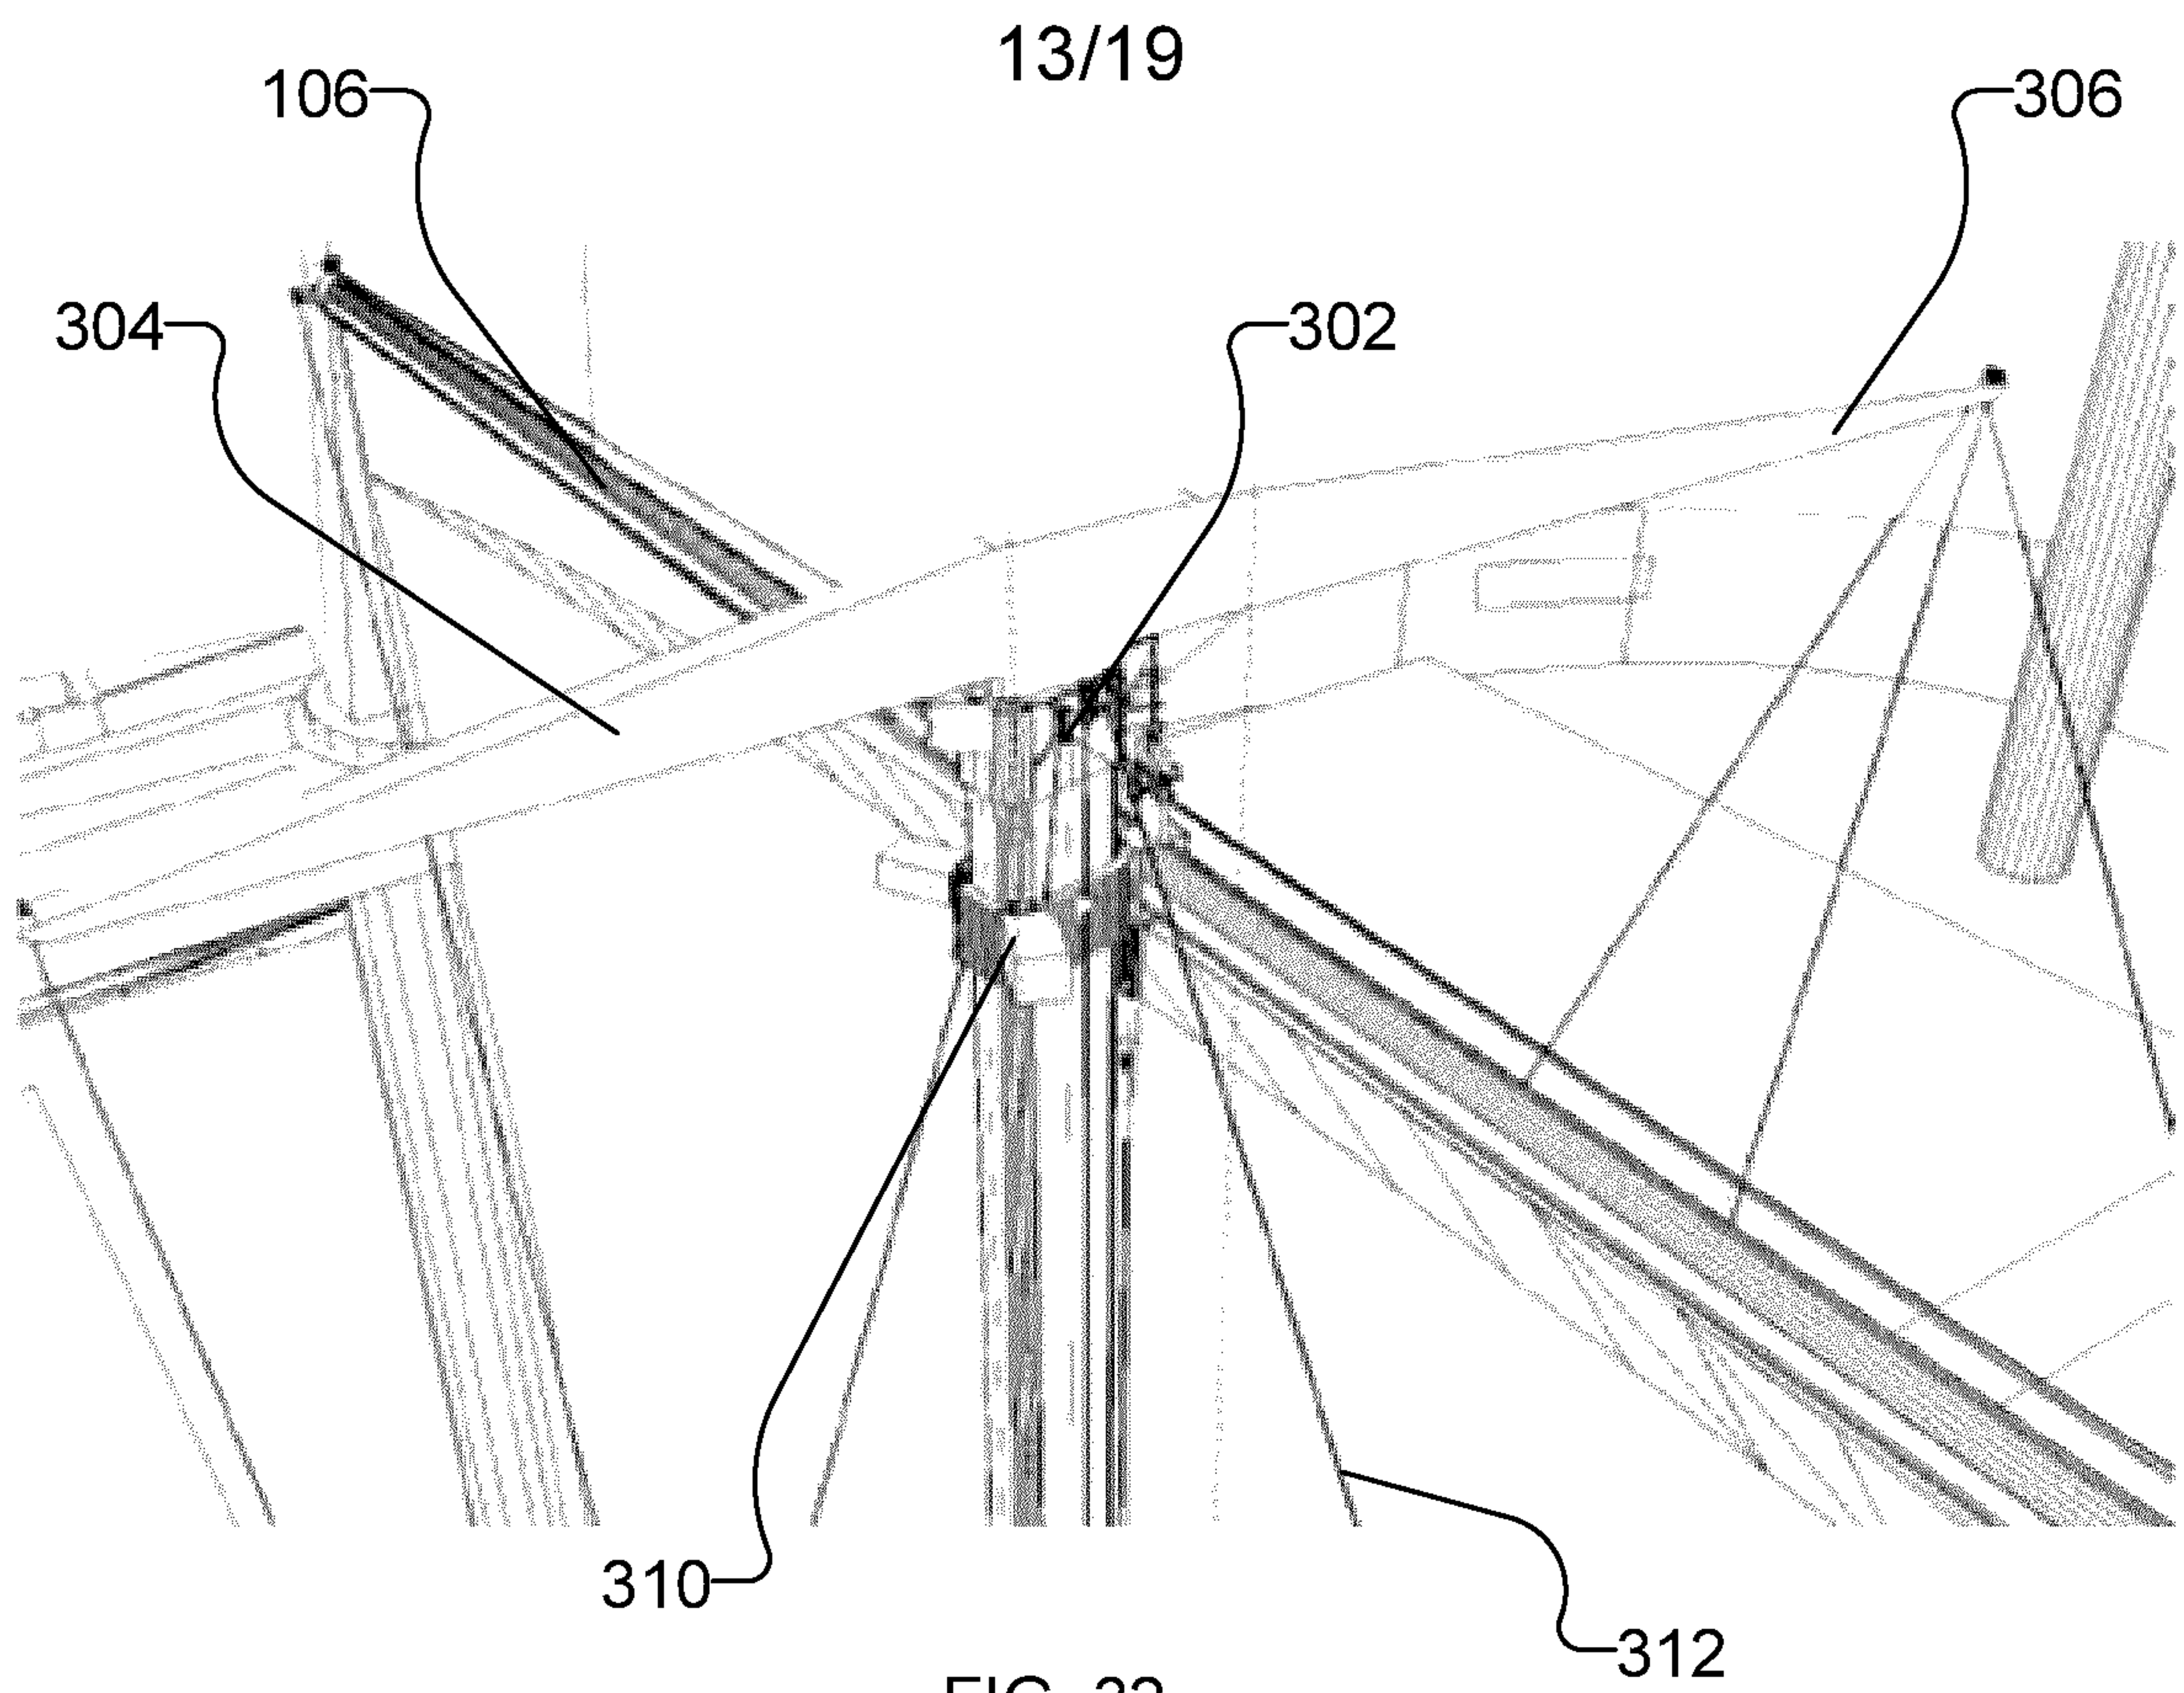

14/19

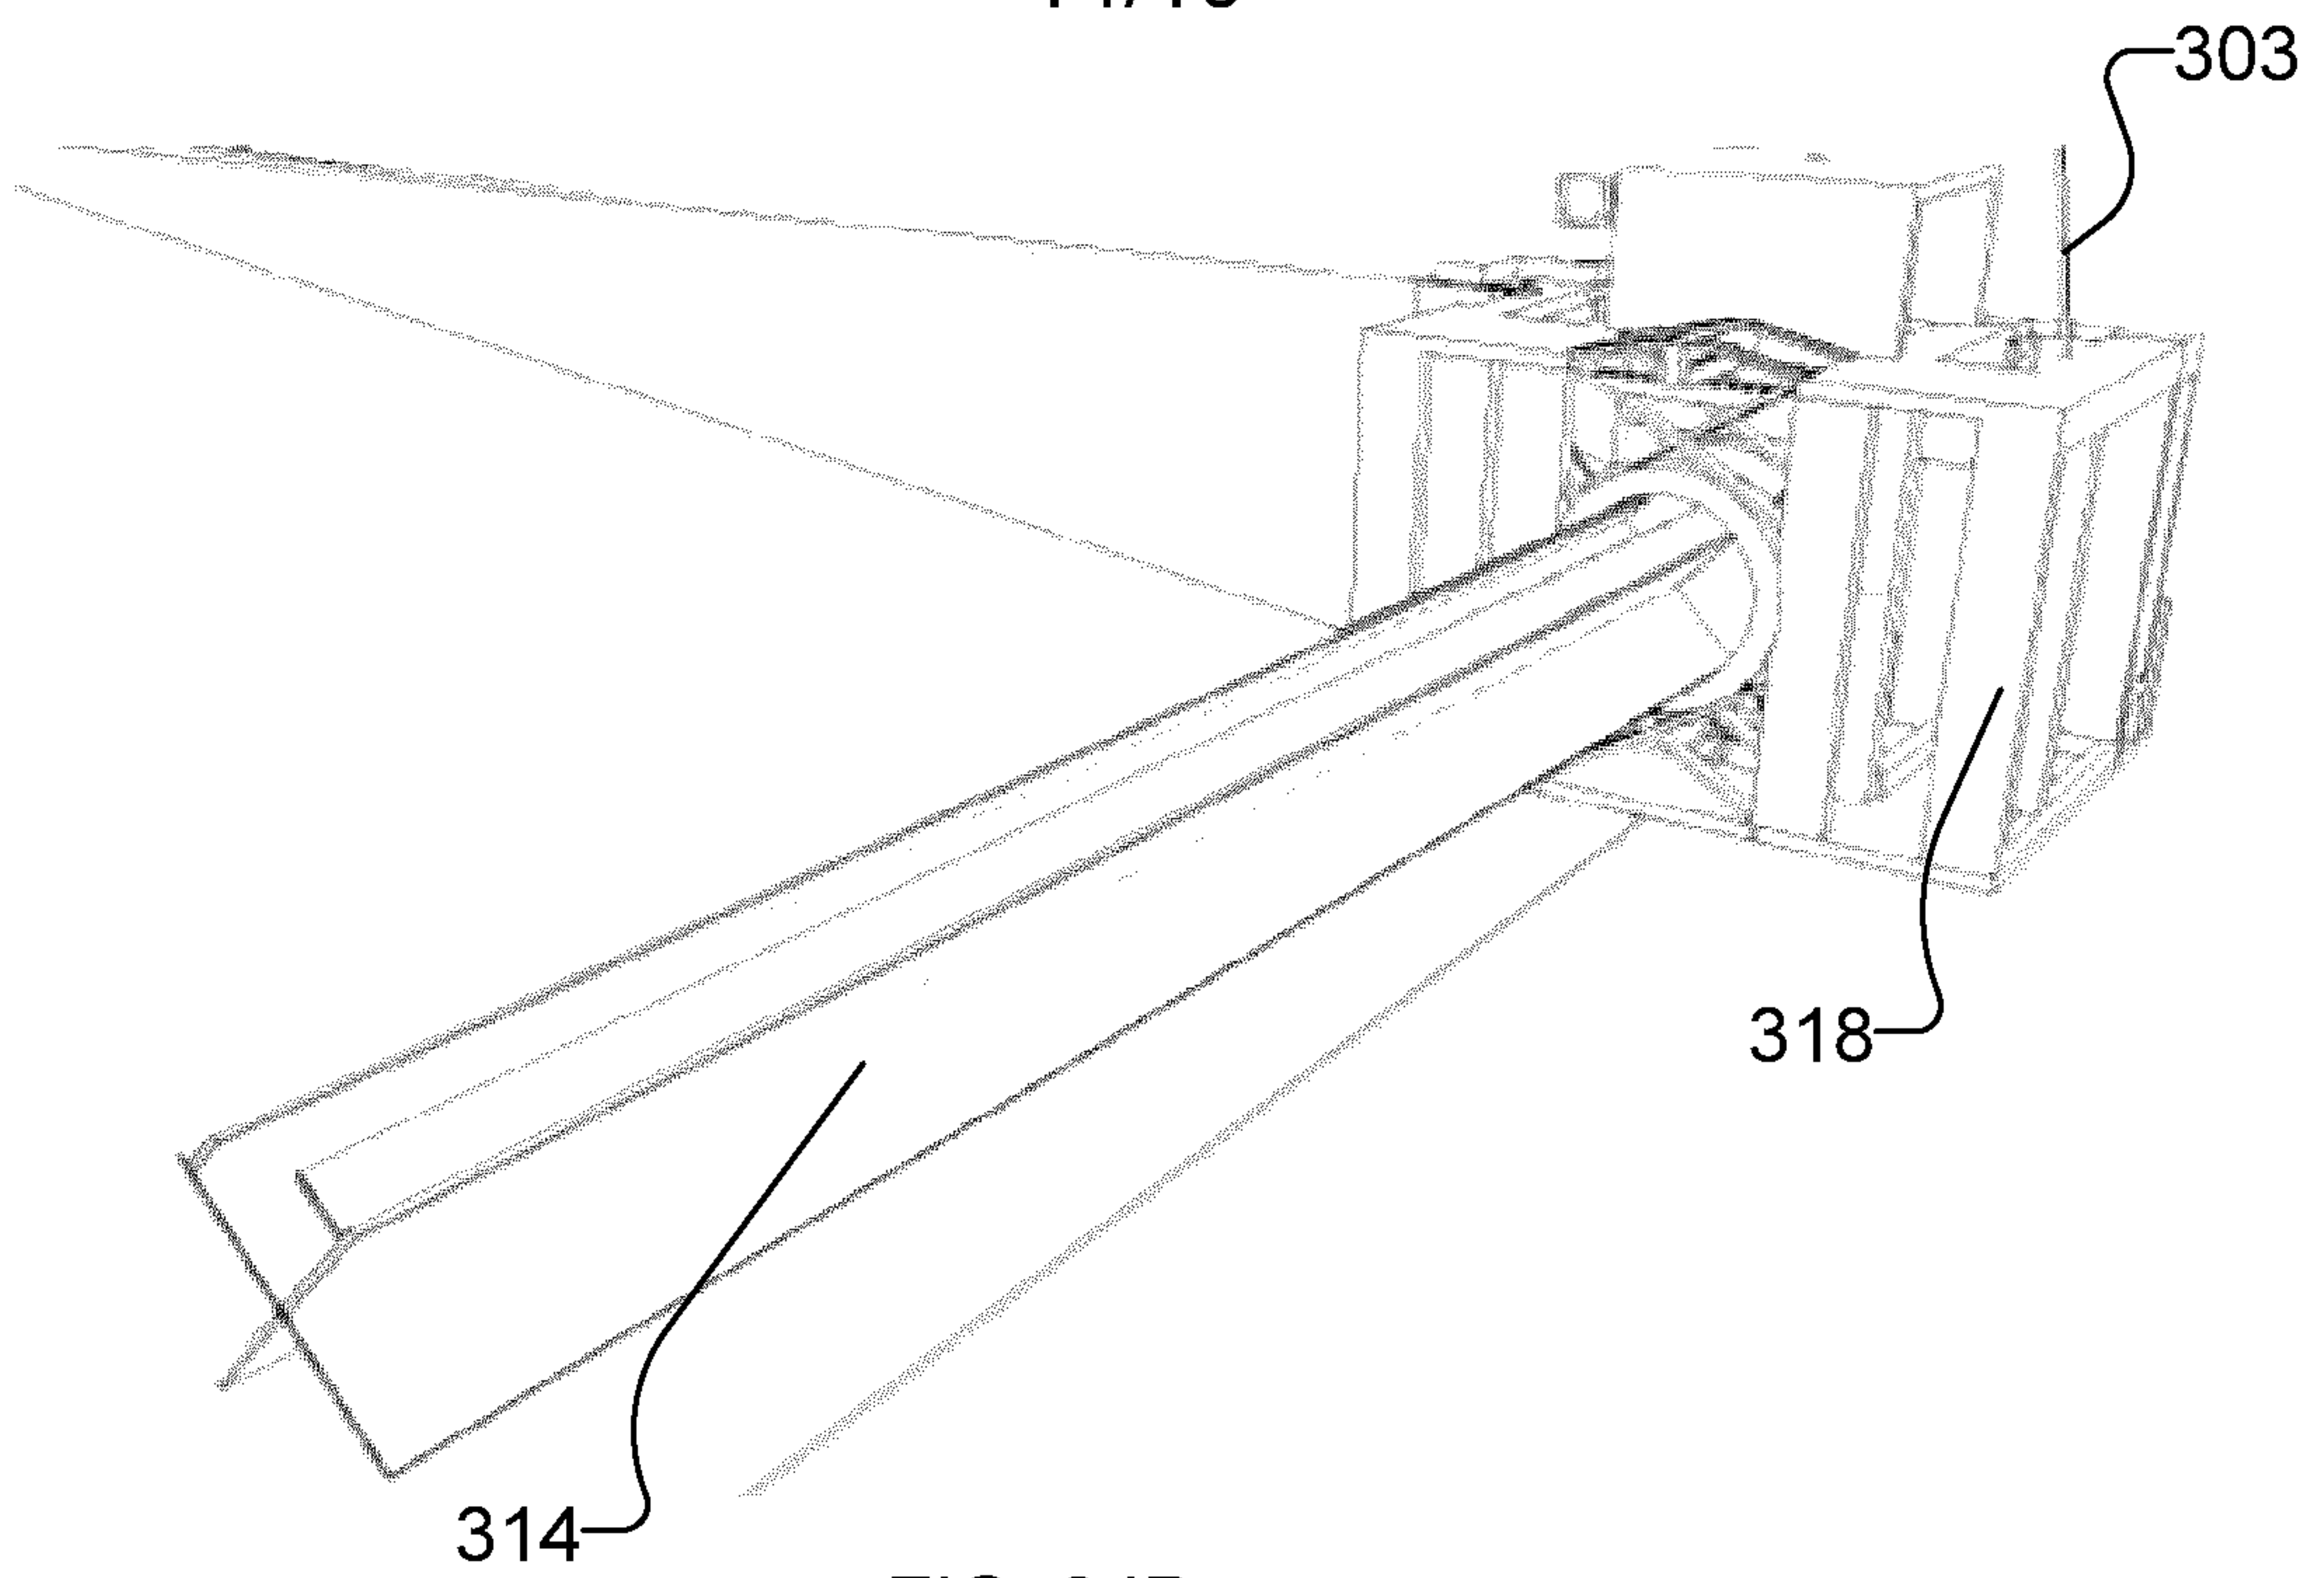


FIG. 34B

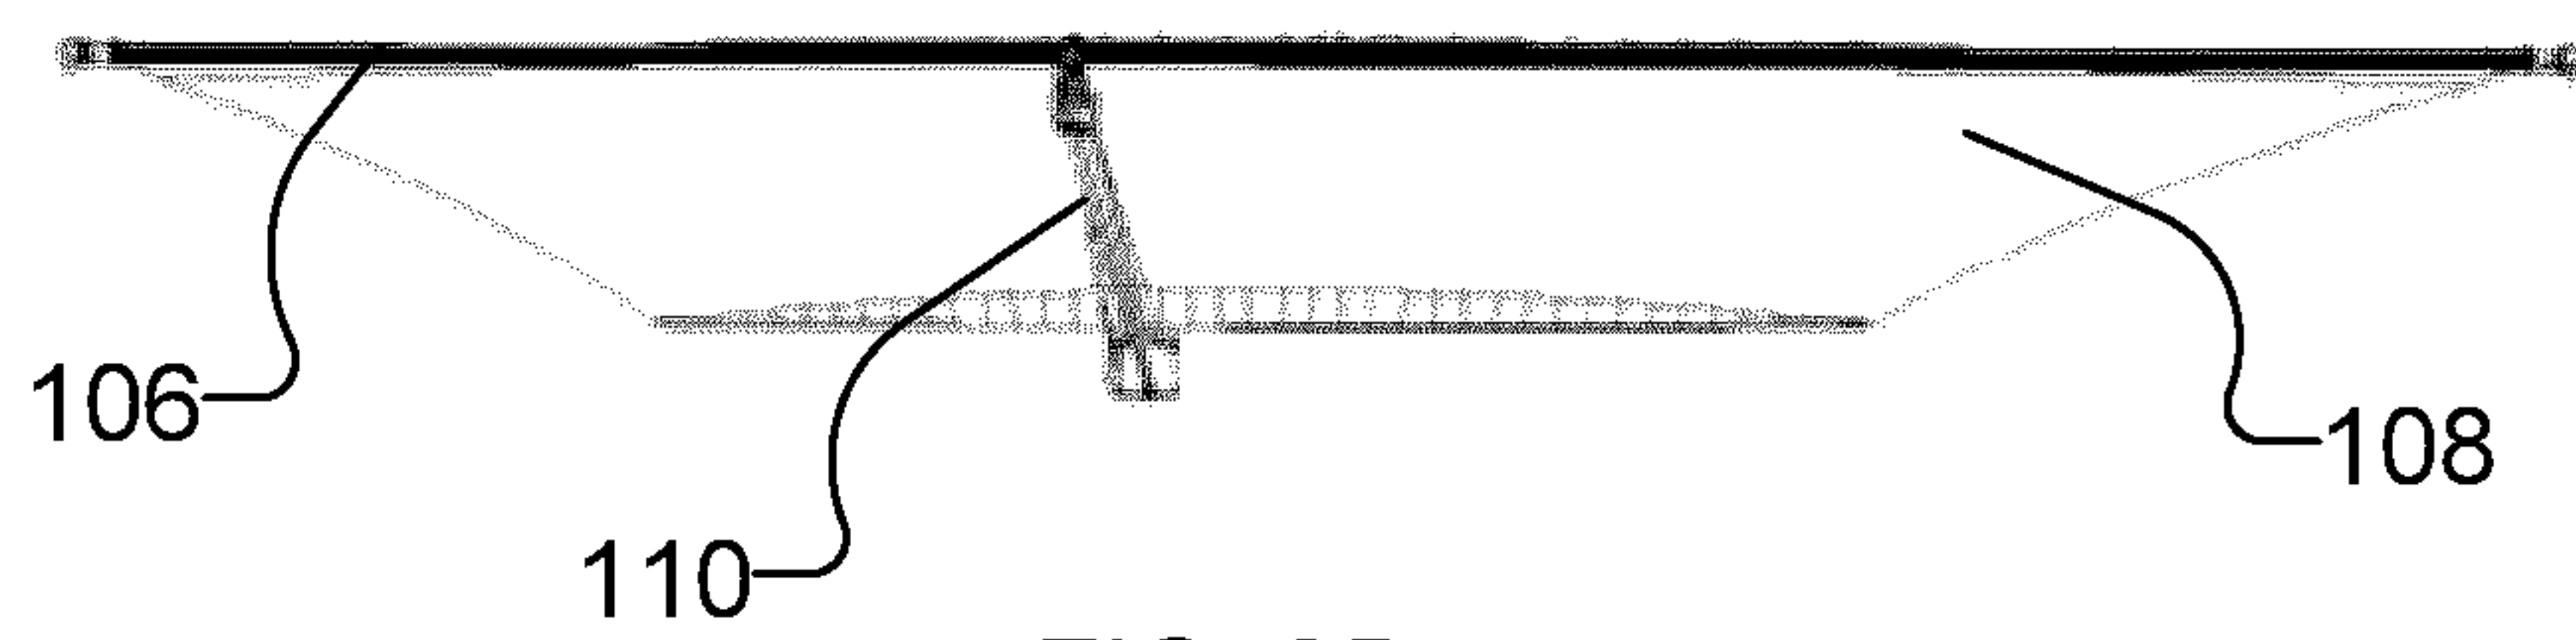


FIG. 35

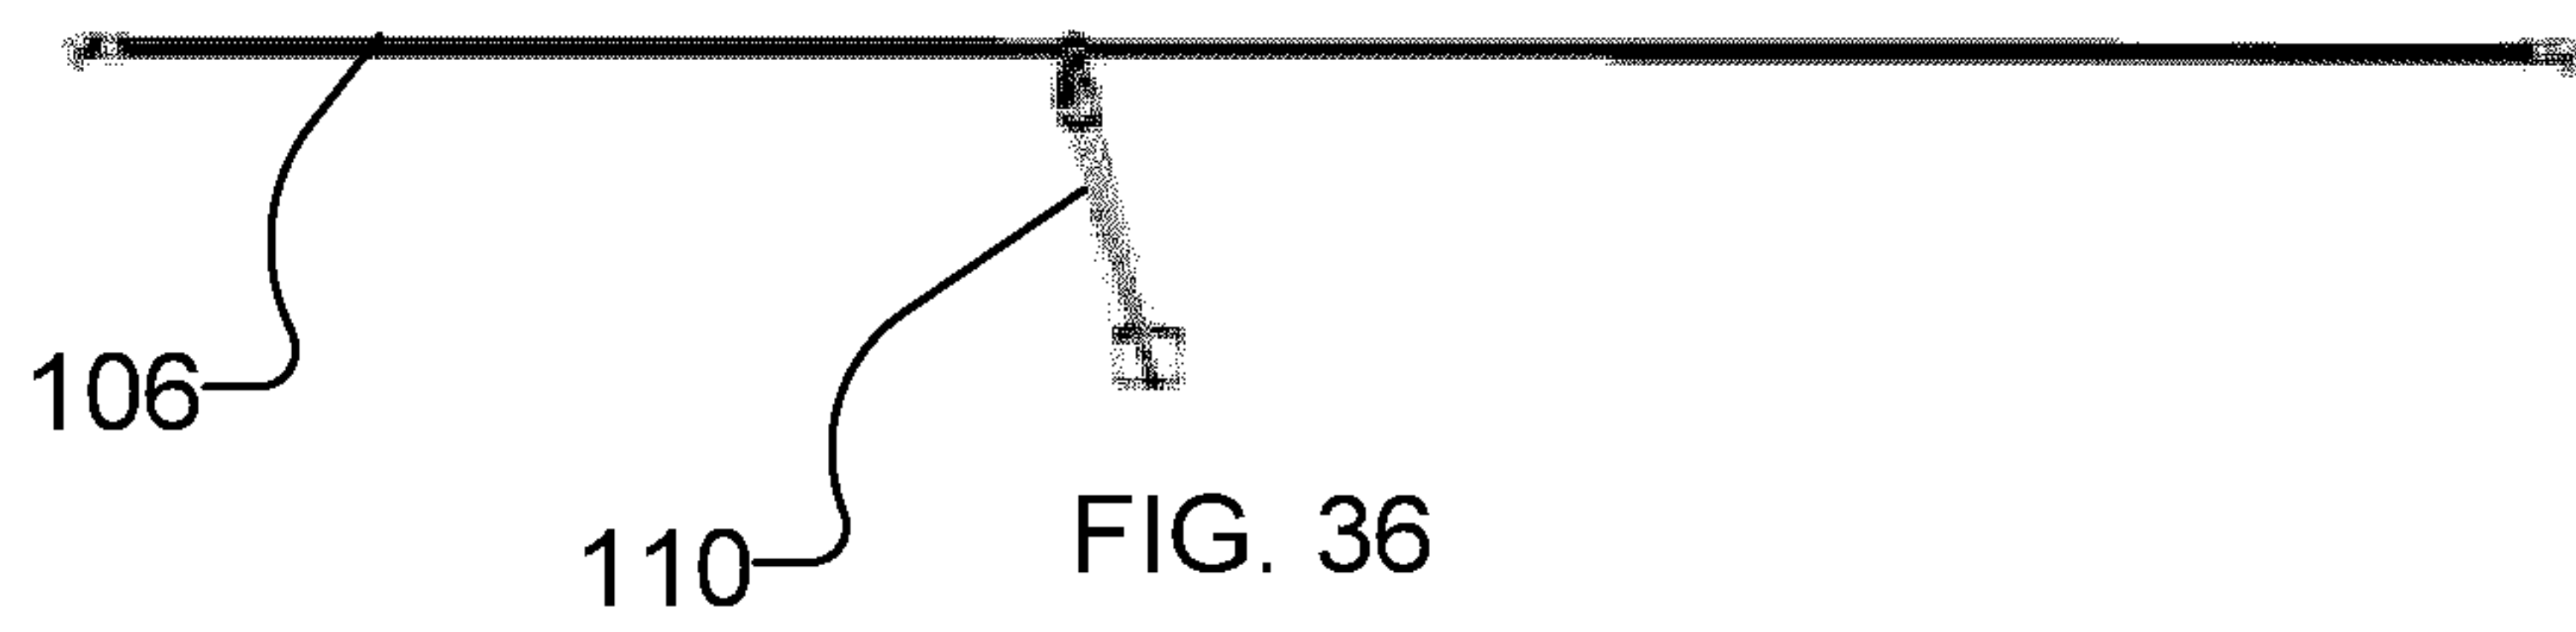


FIG. 36





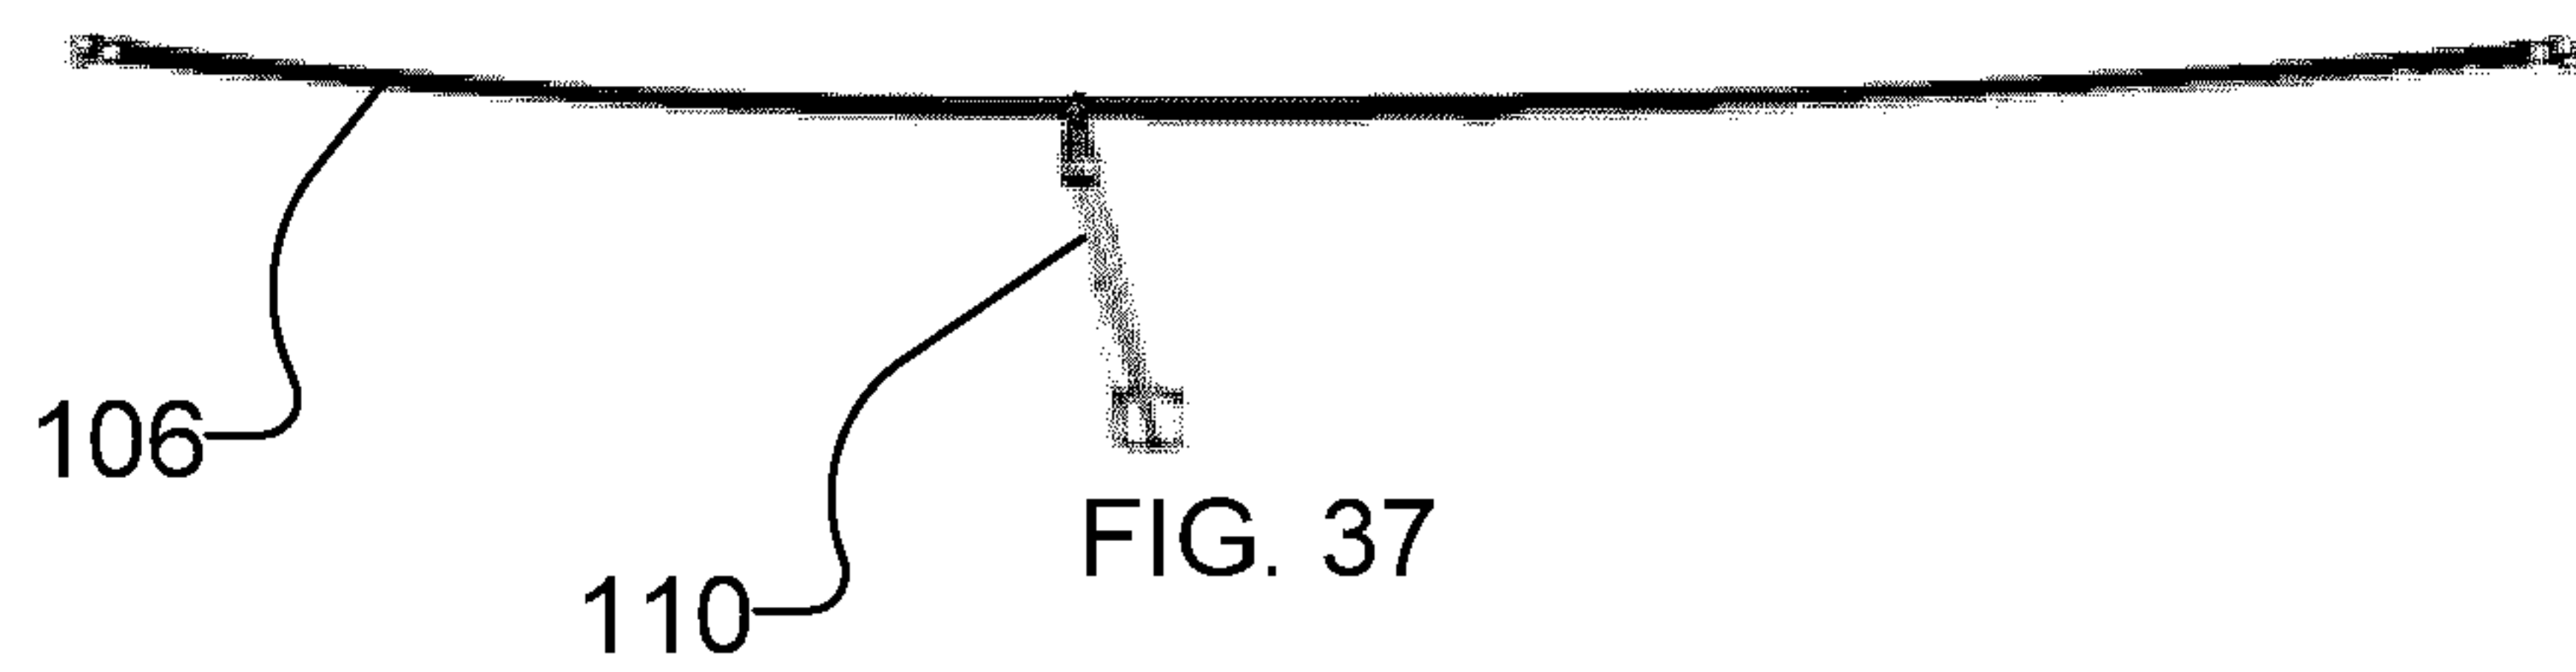


FIG. 37

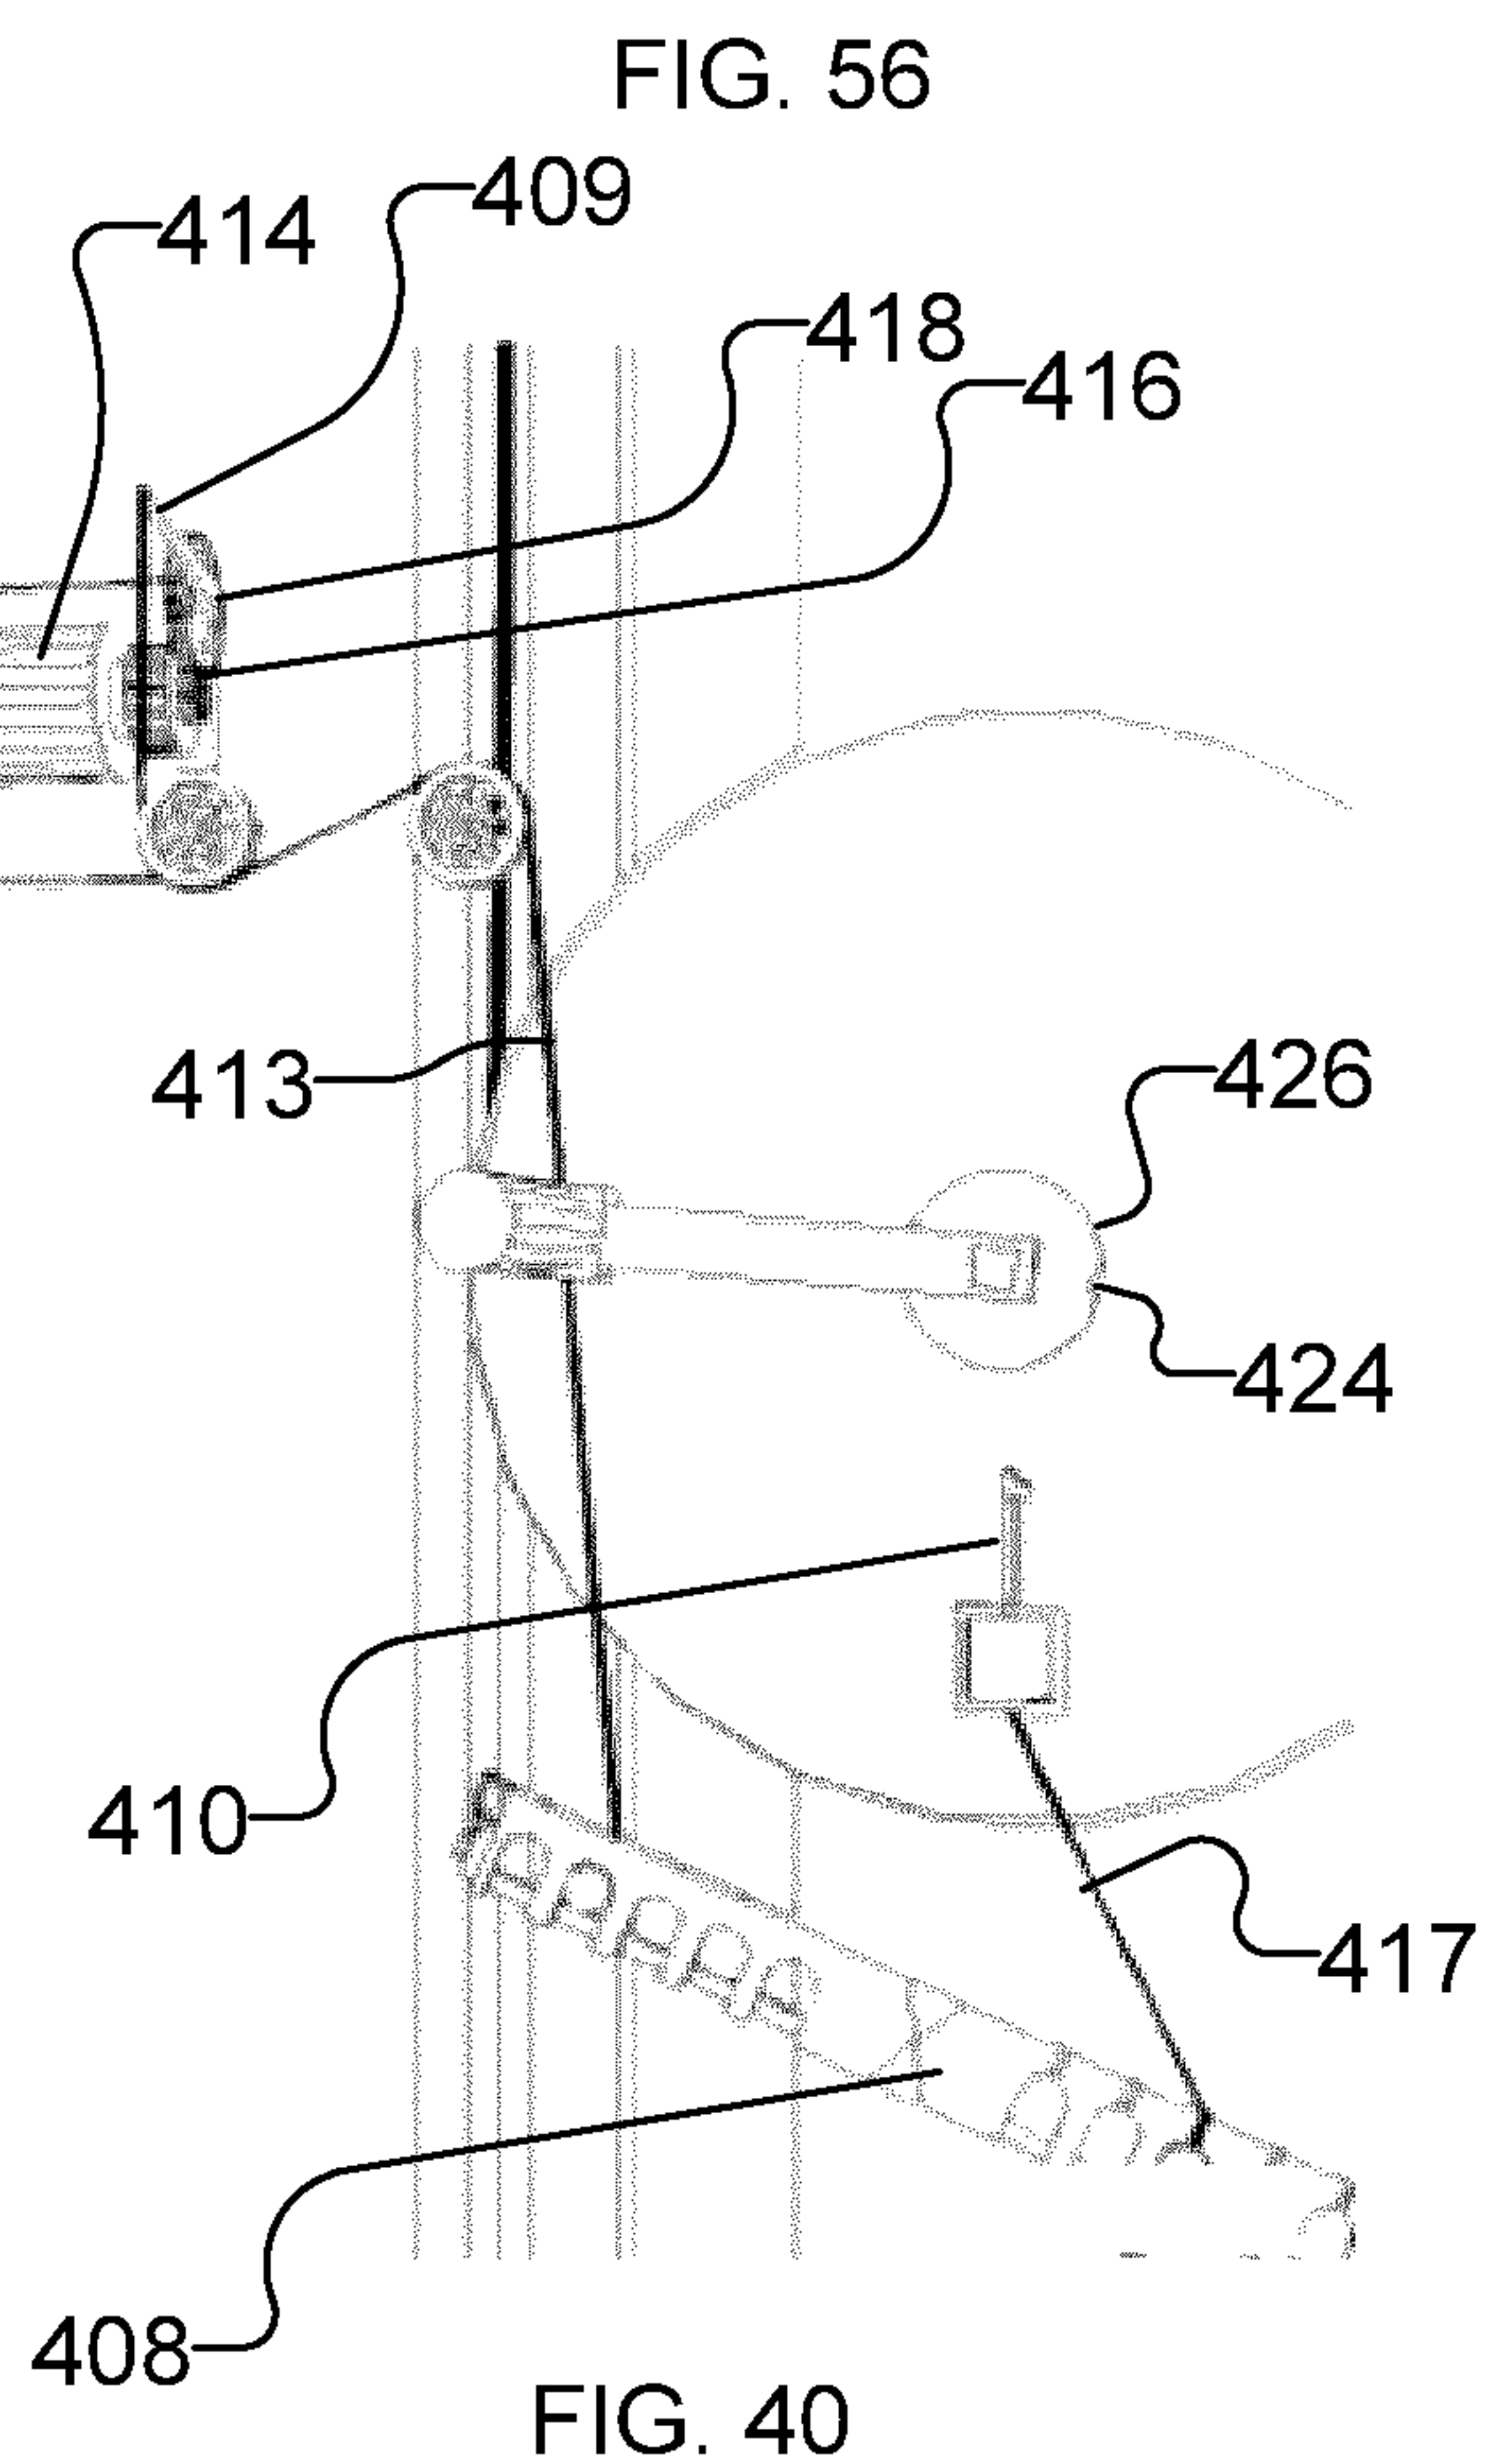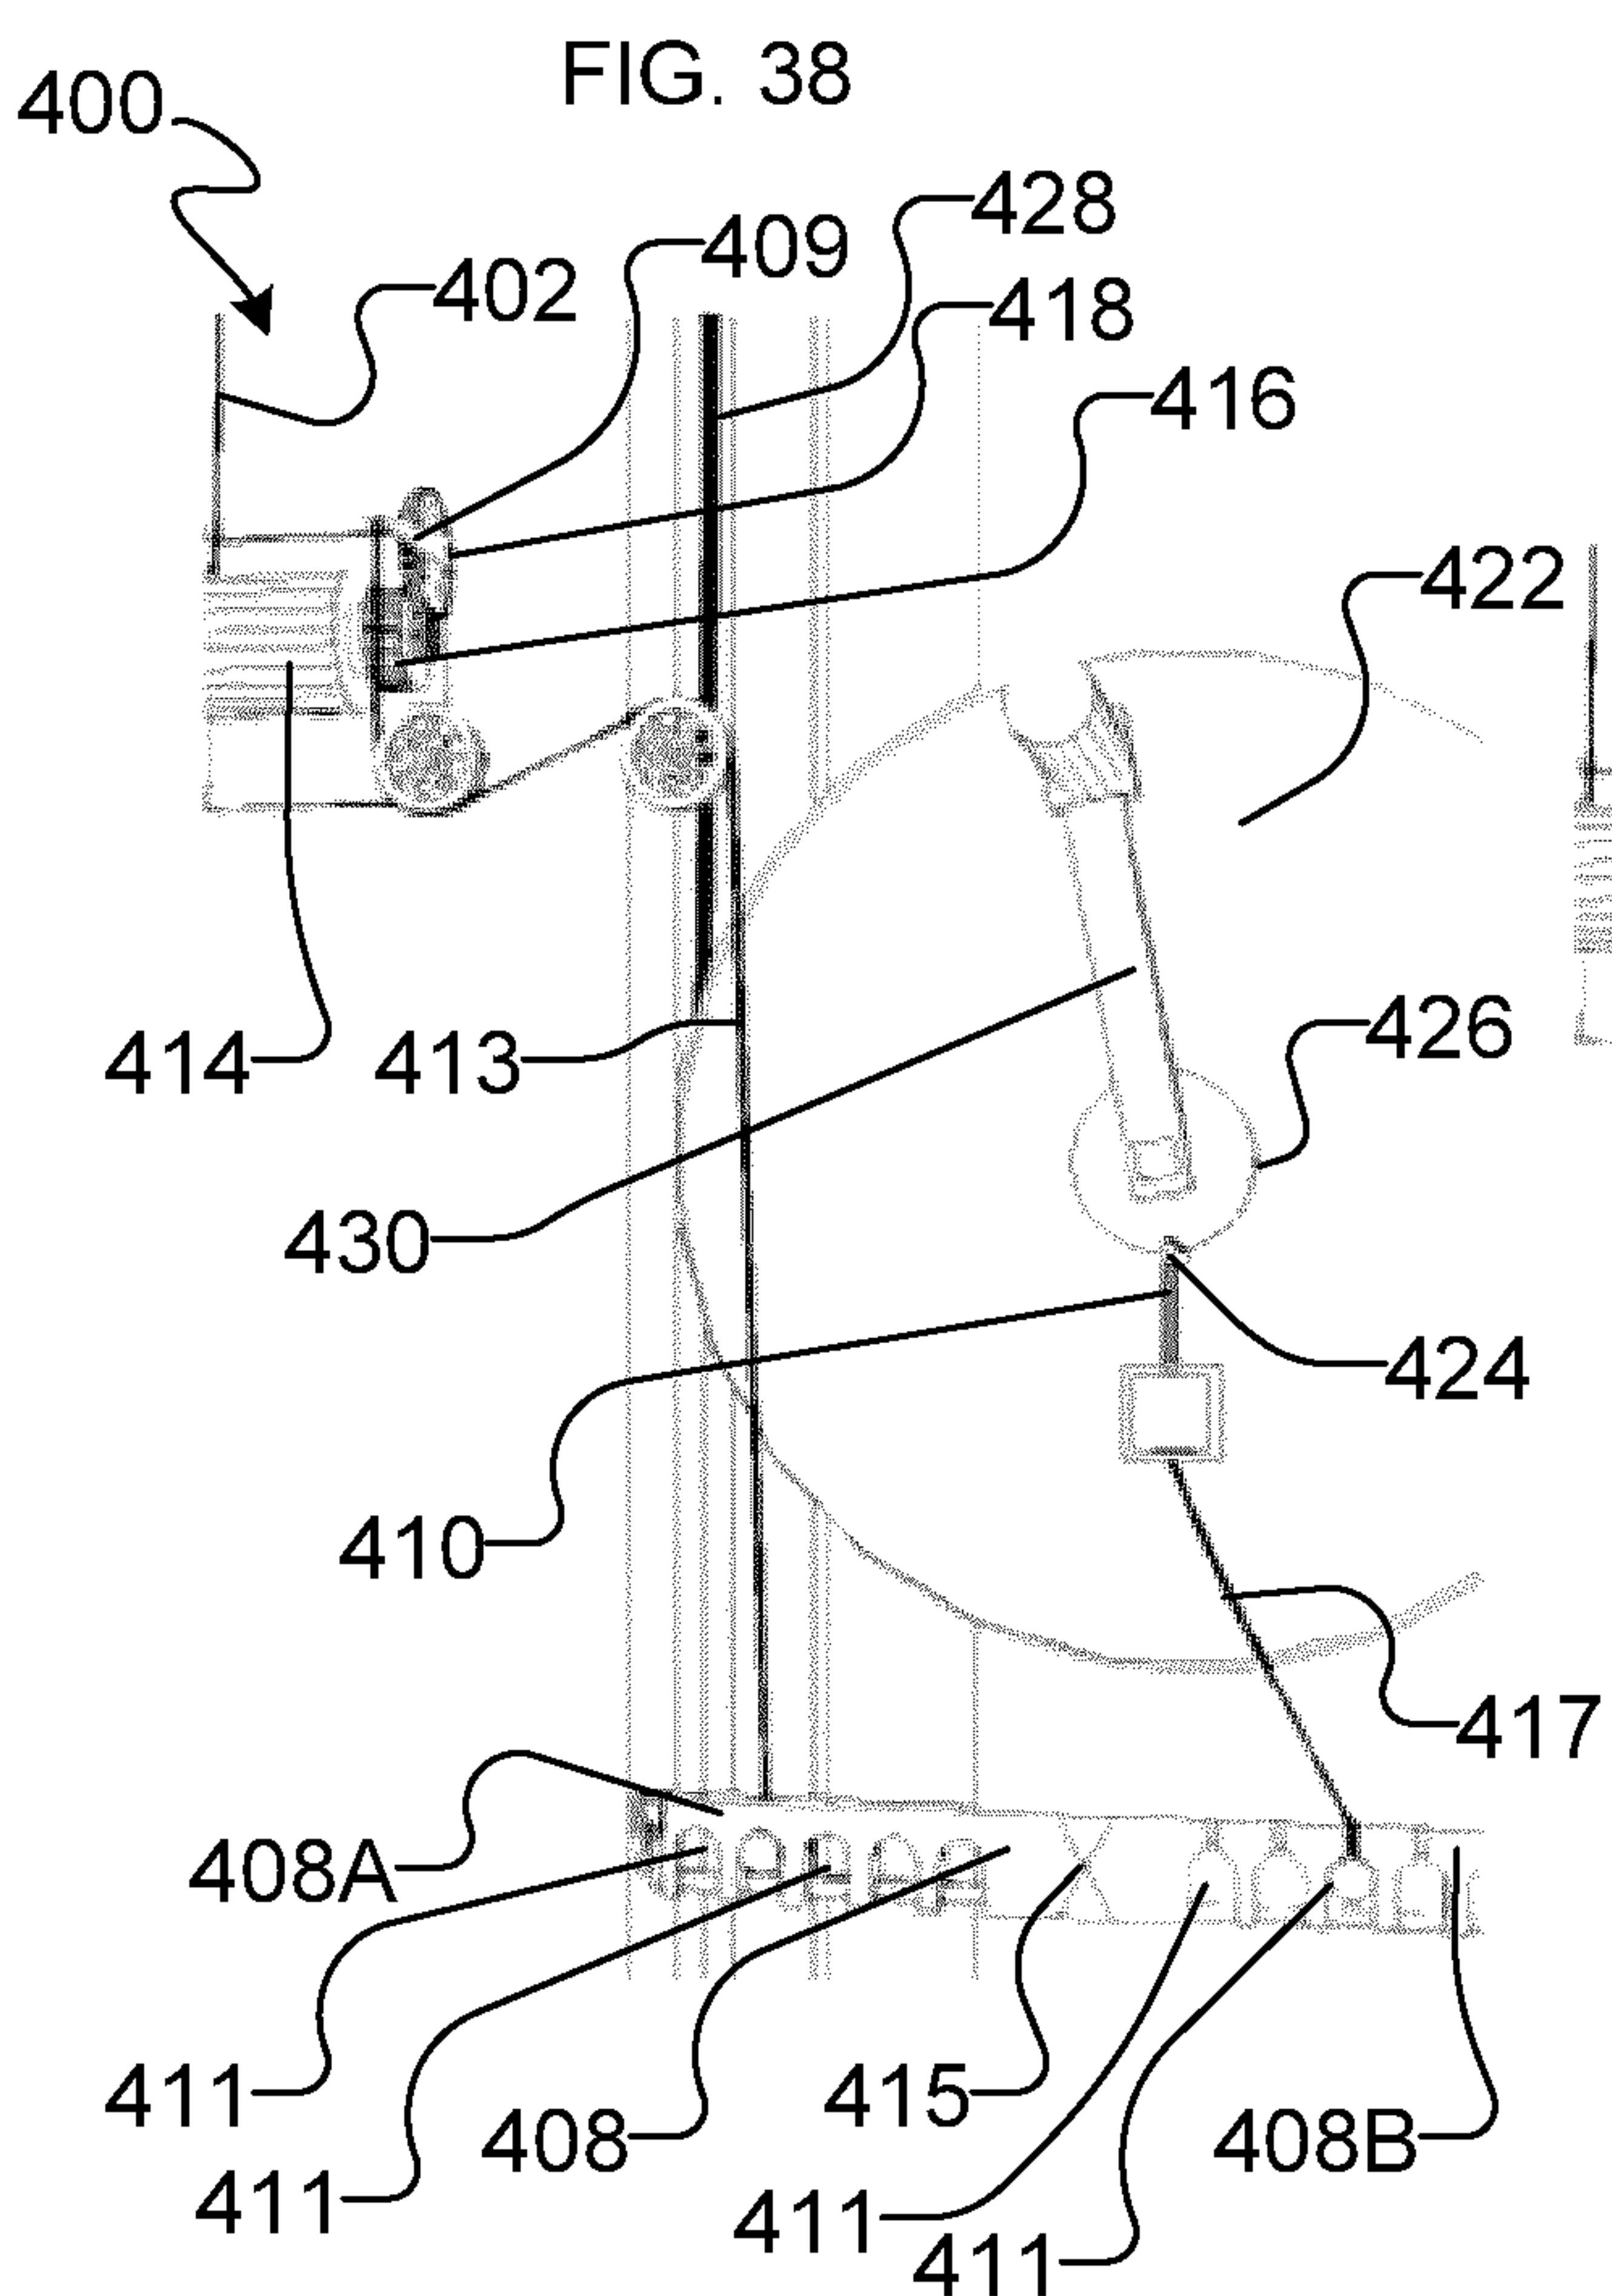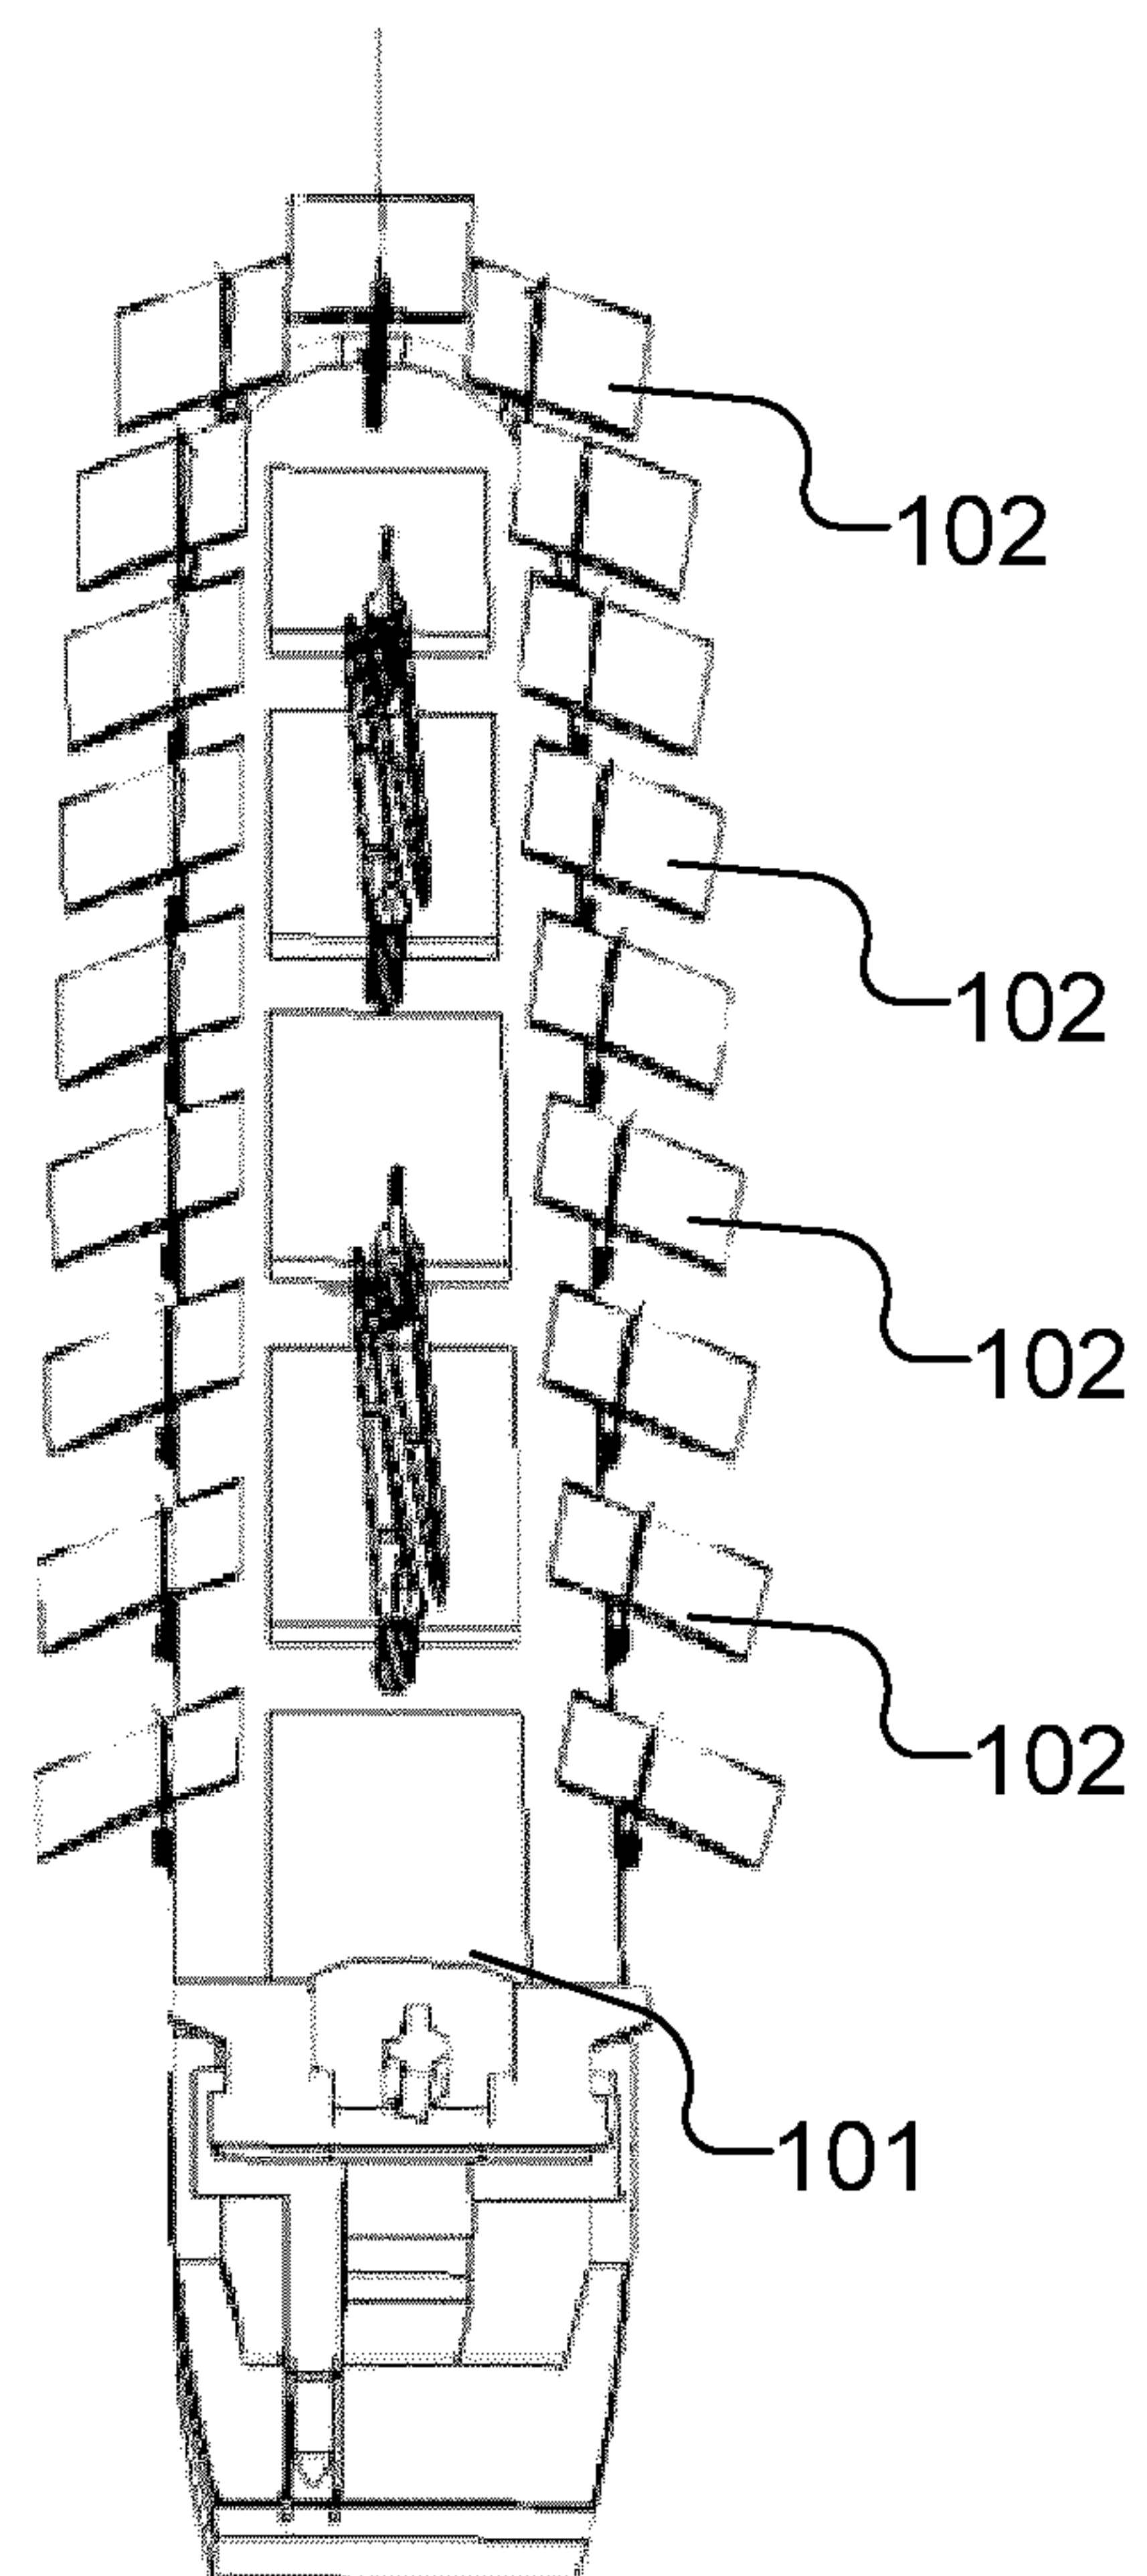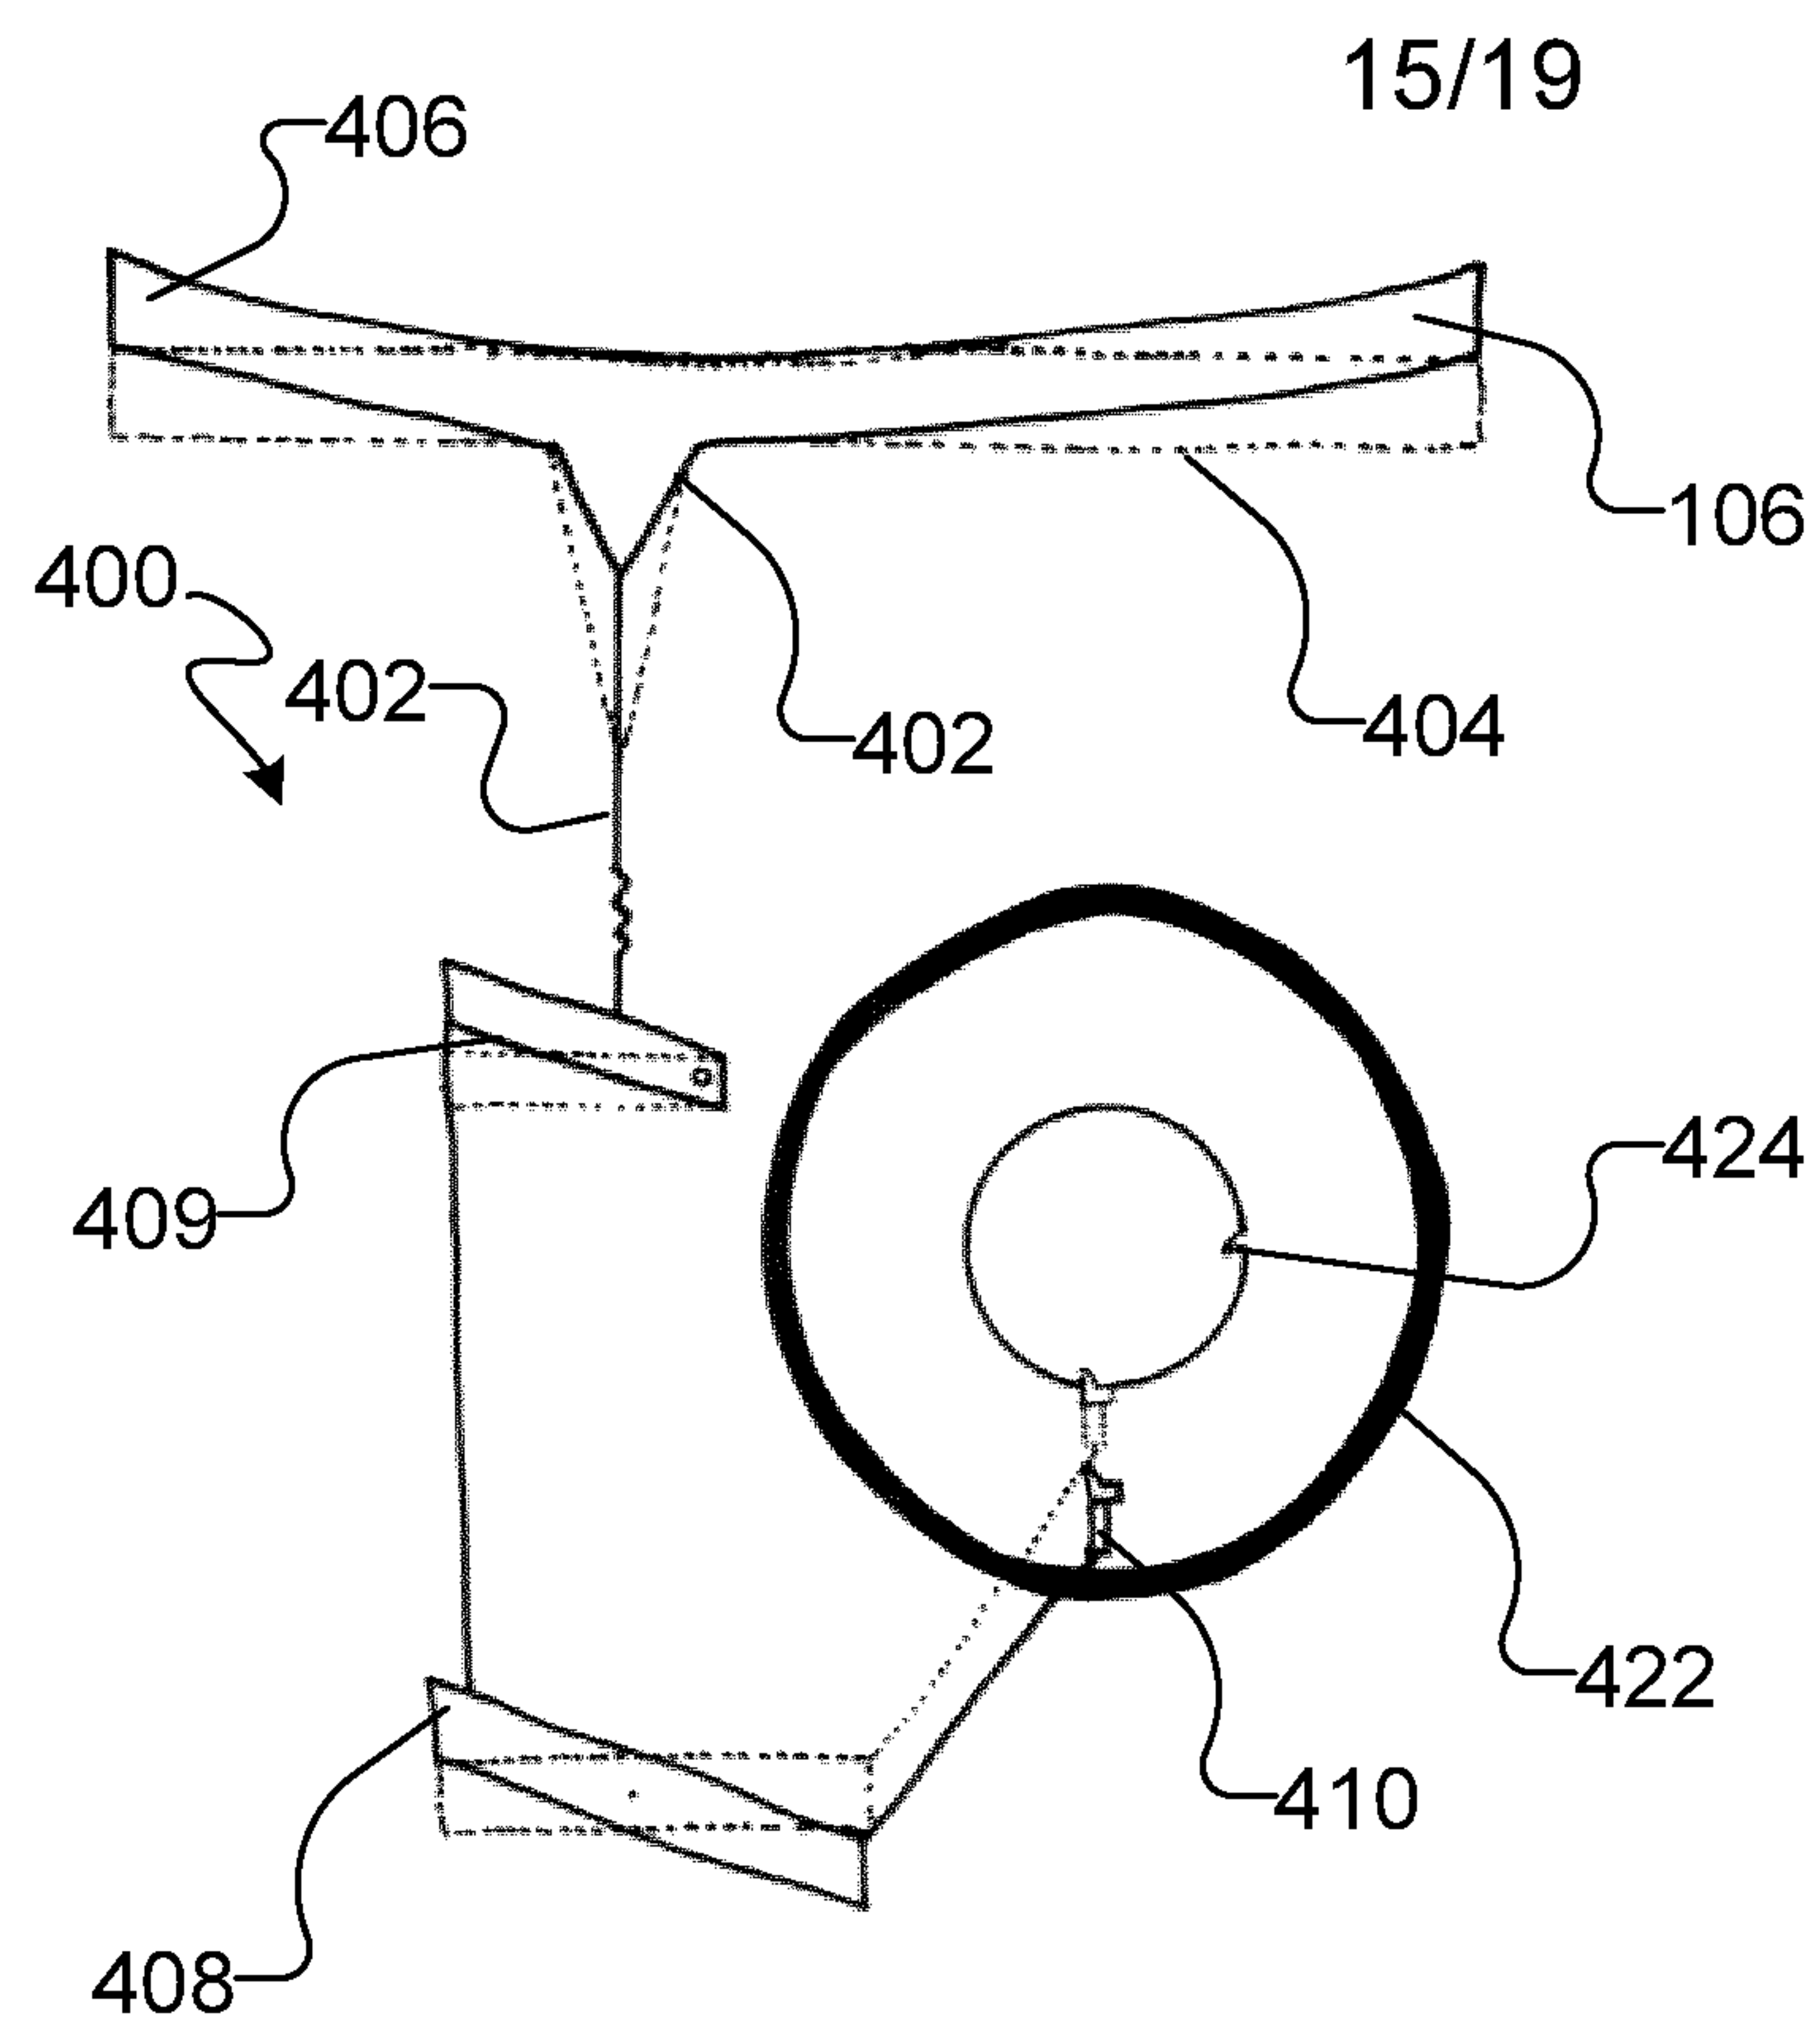

16/19

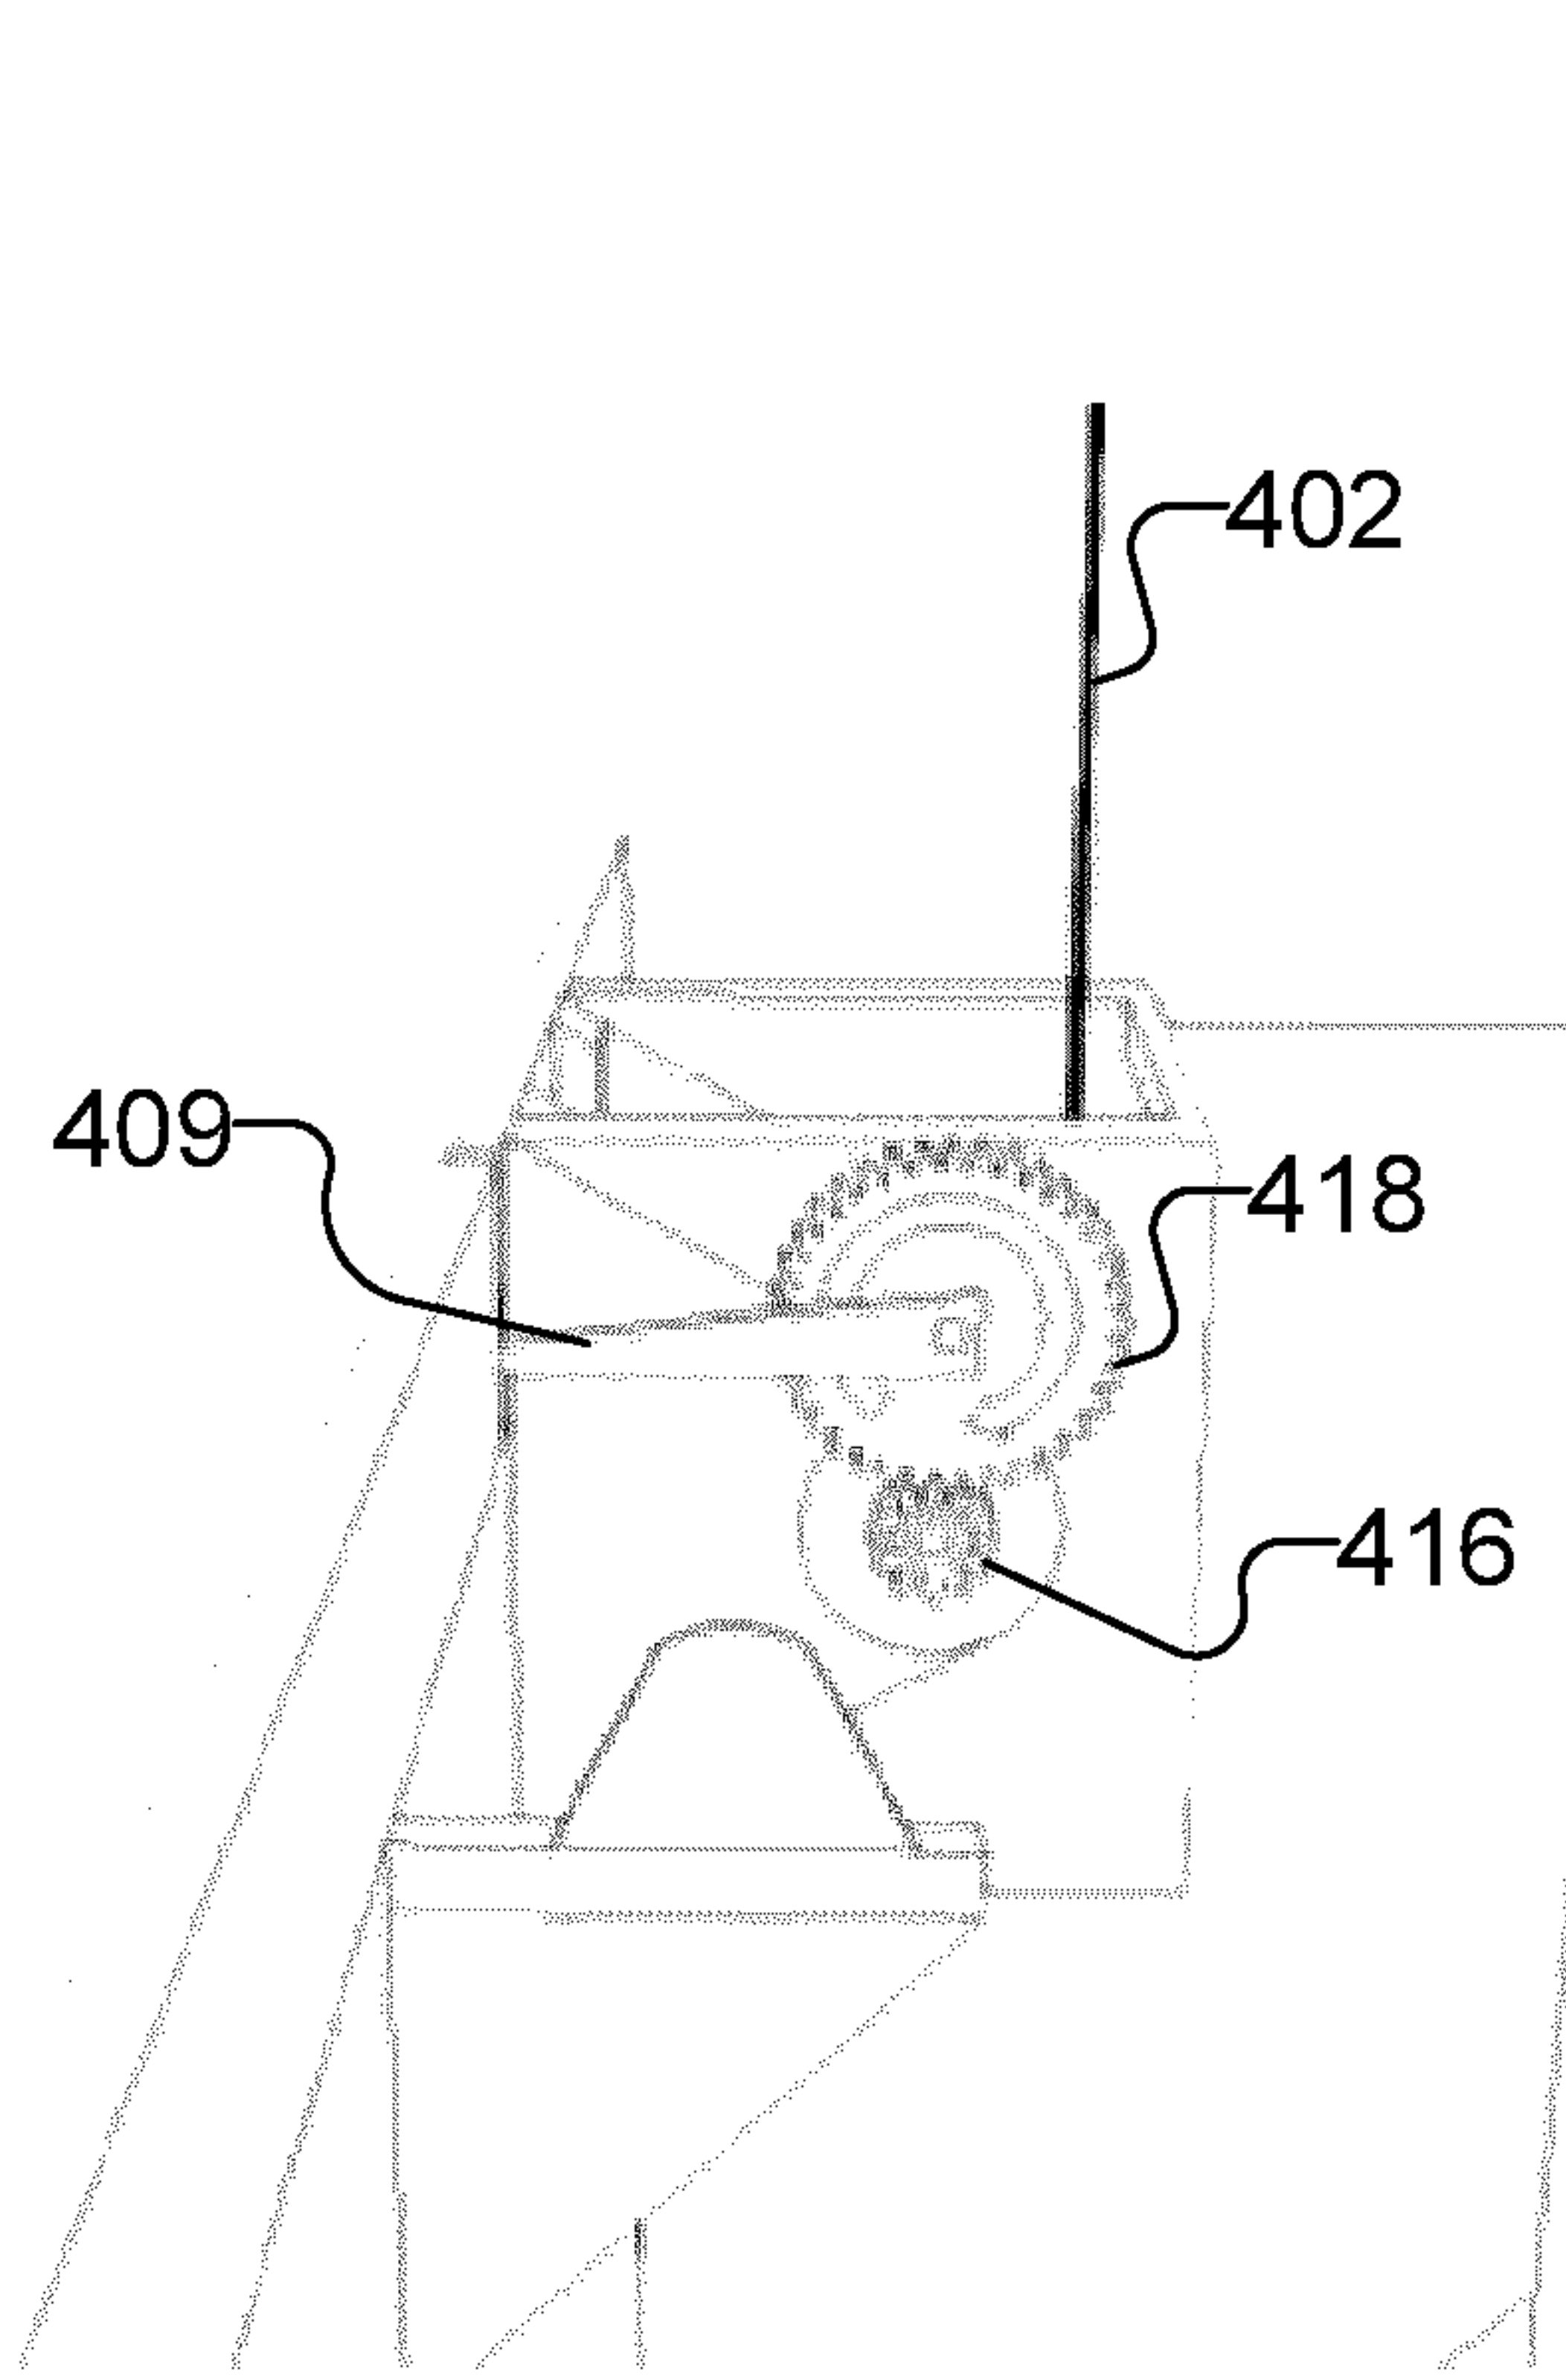


FIG. 41

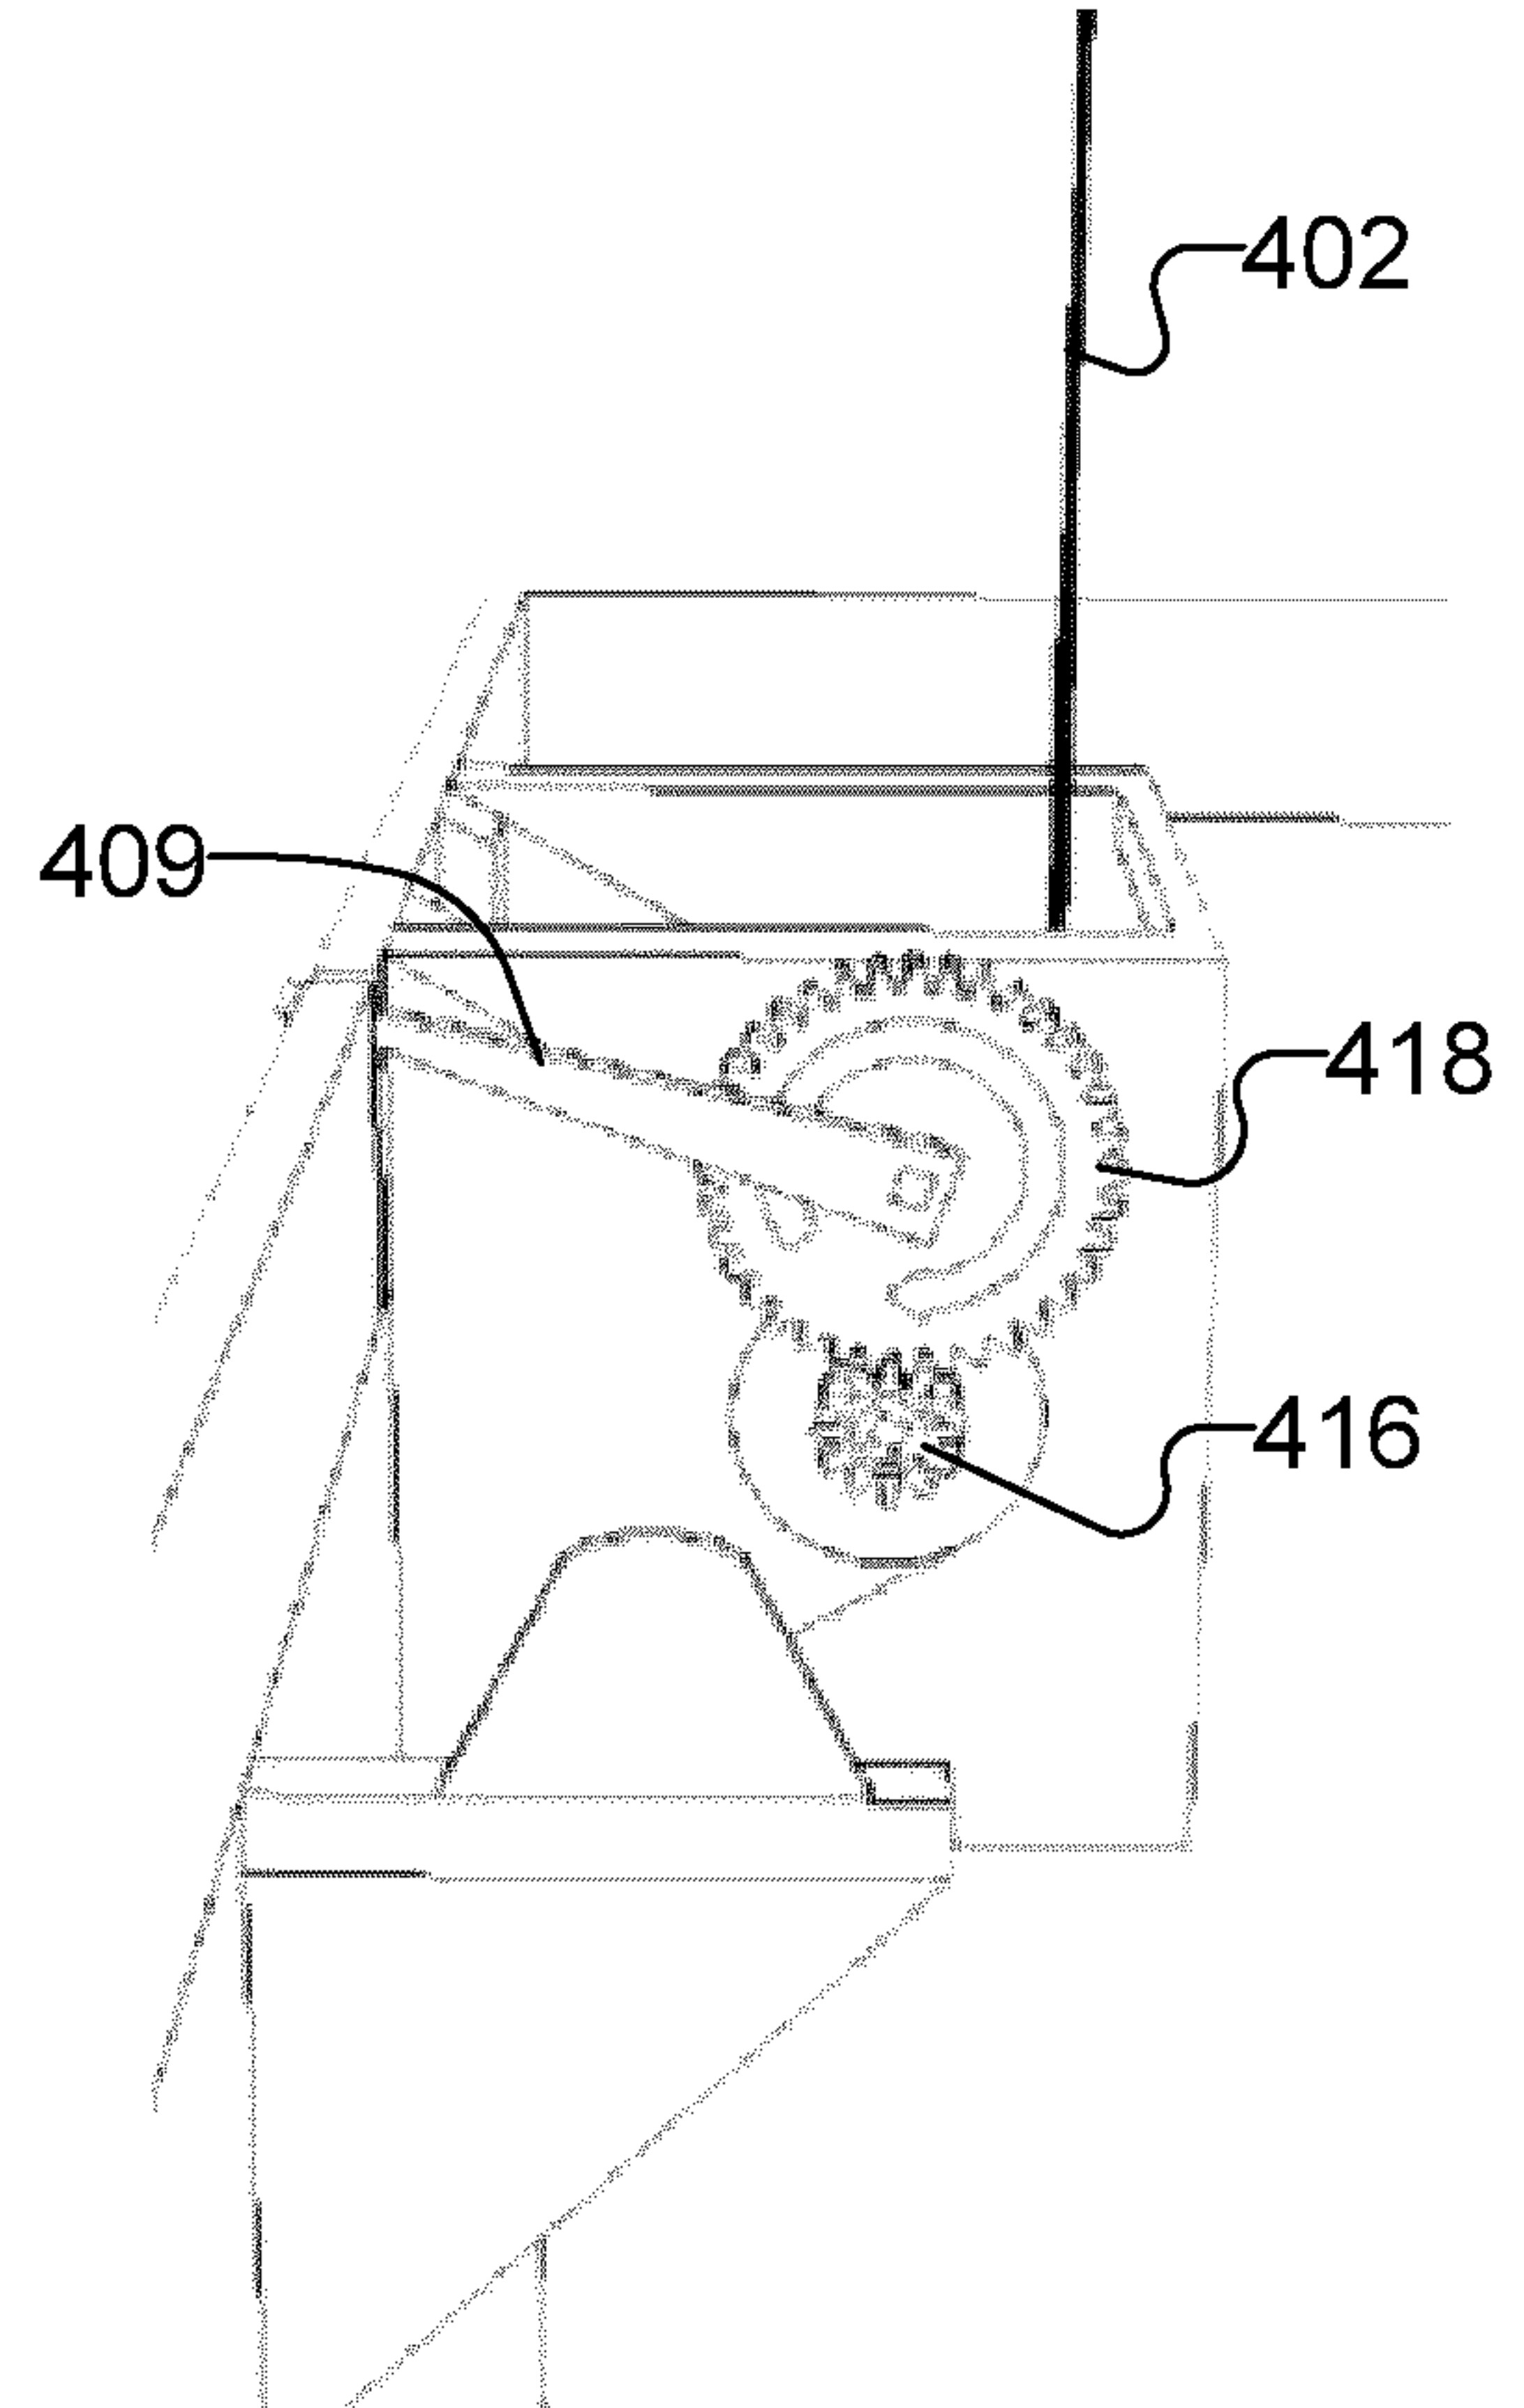


FIG. 42

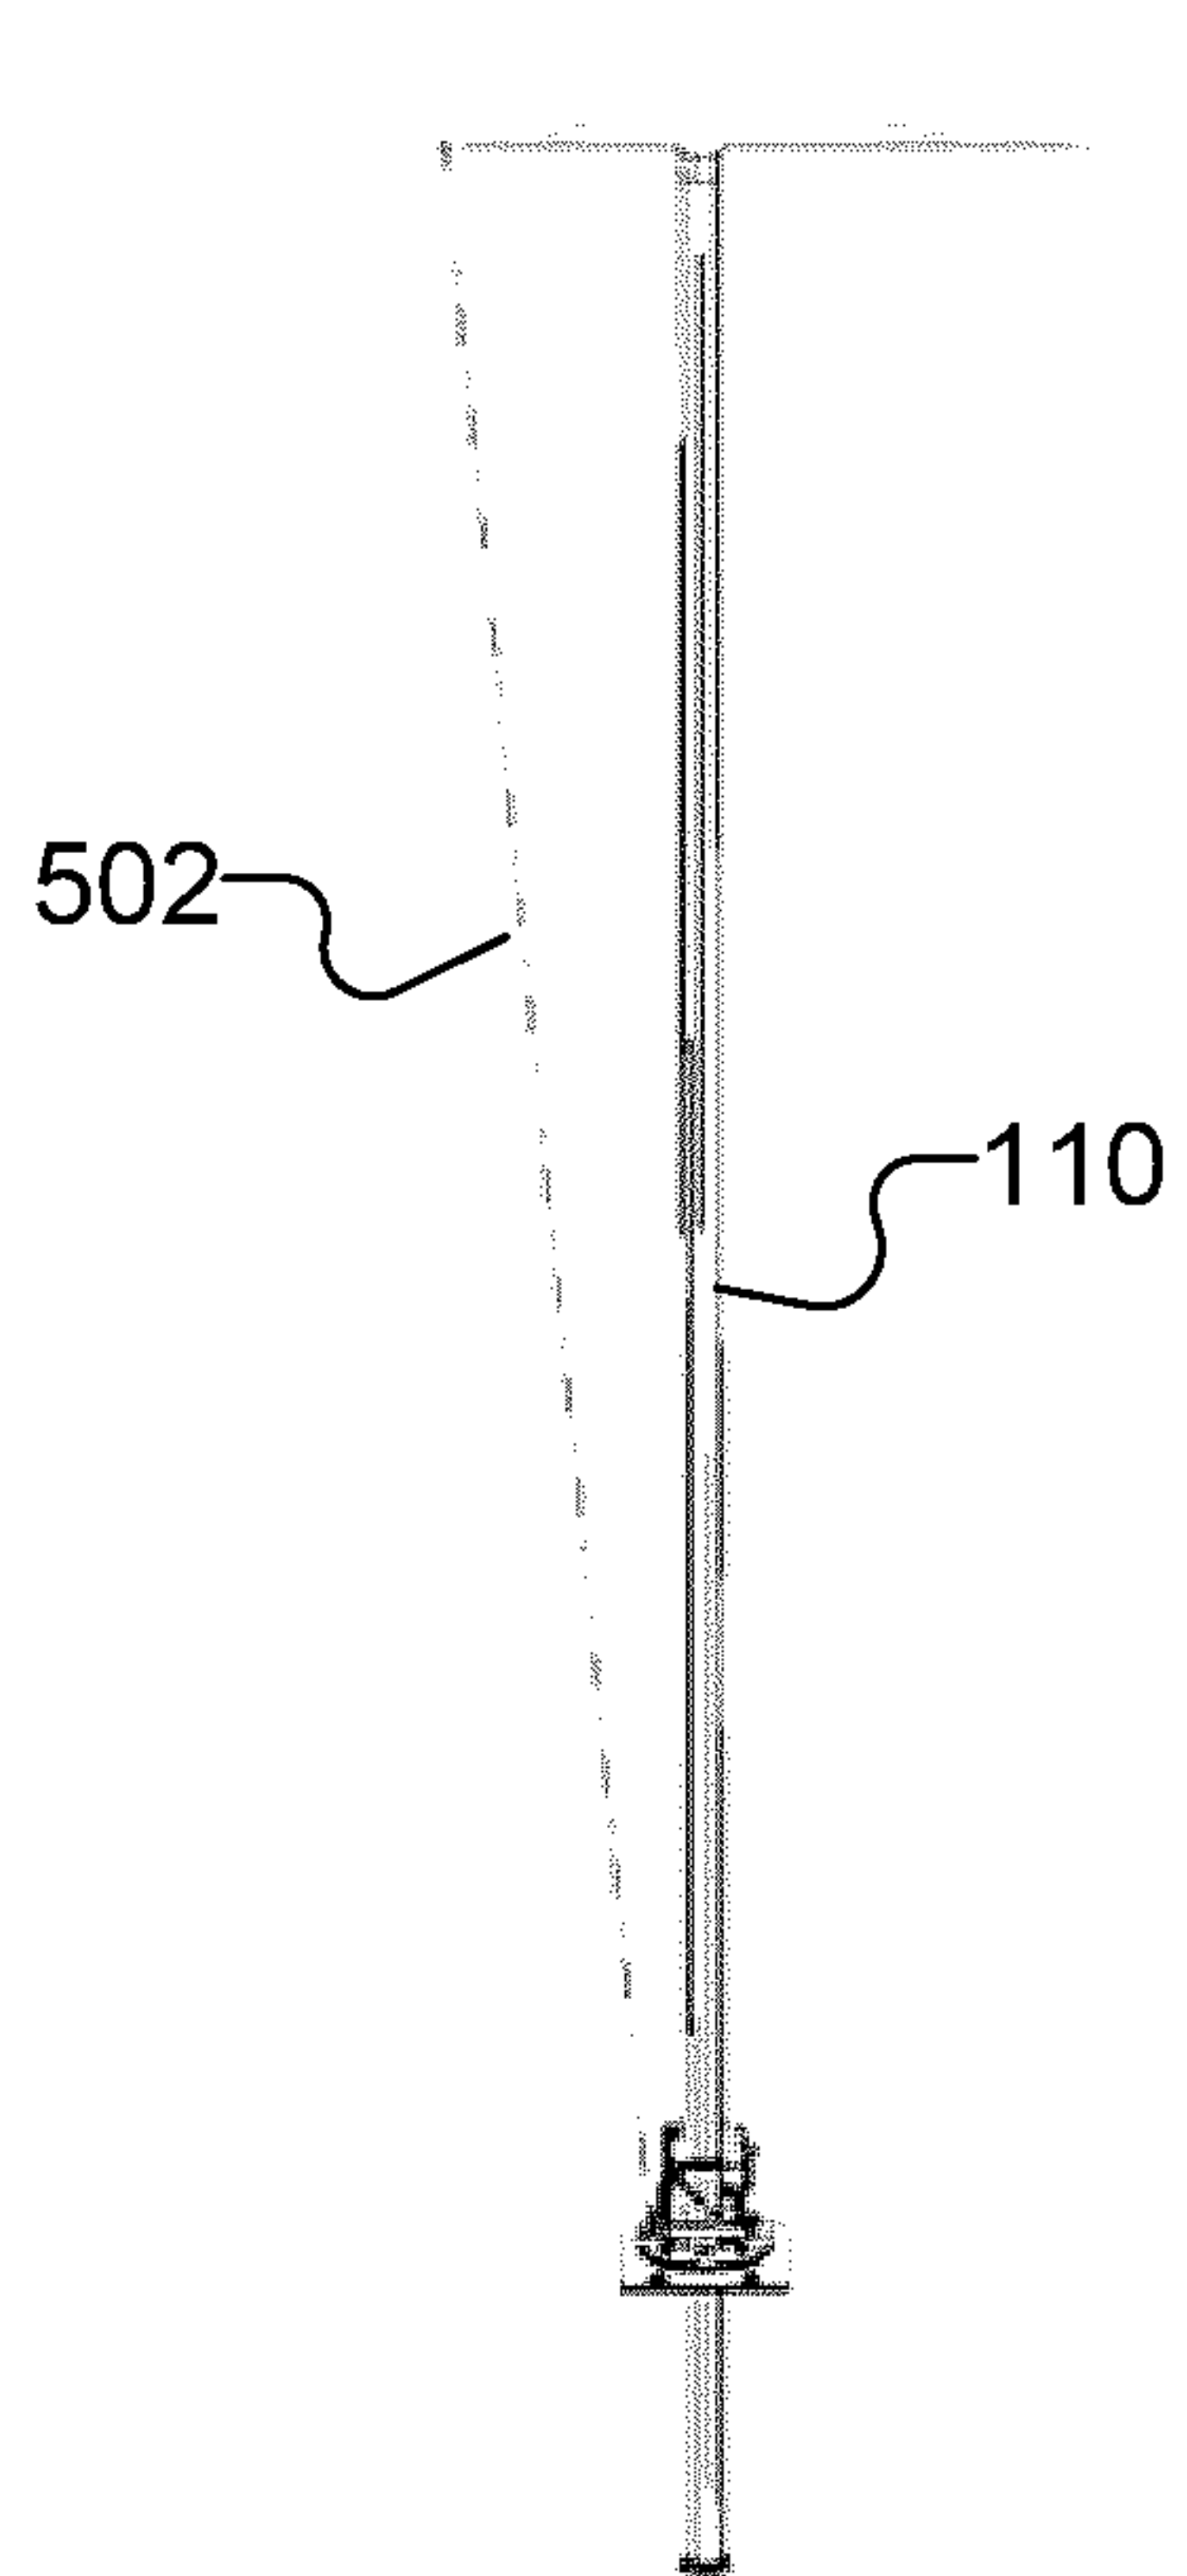


FIG. 43

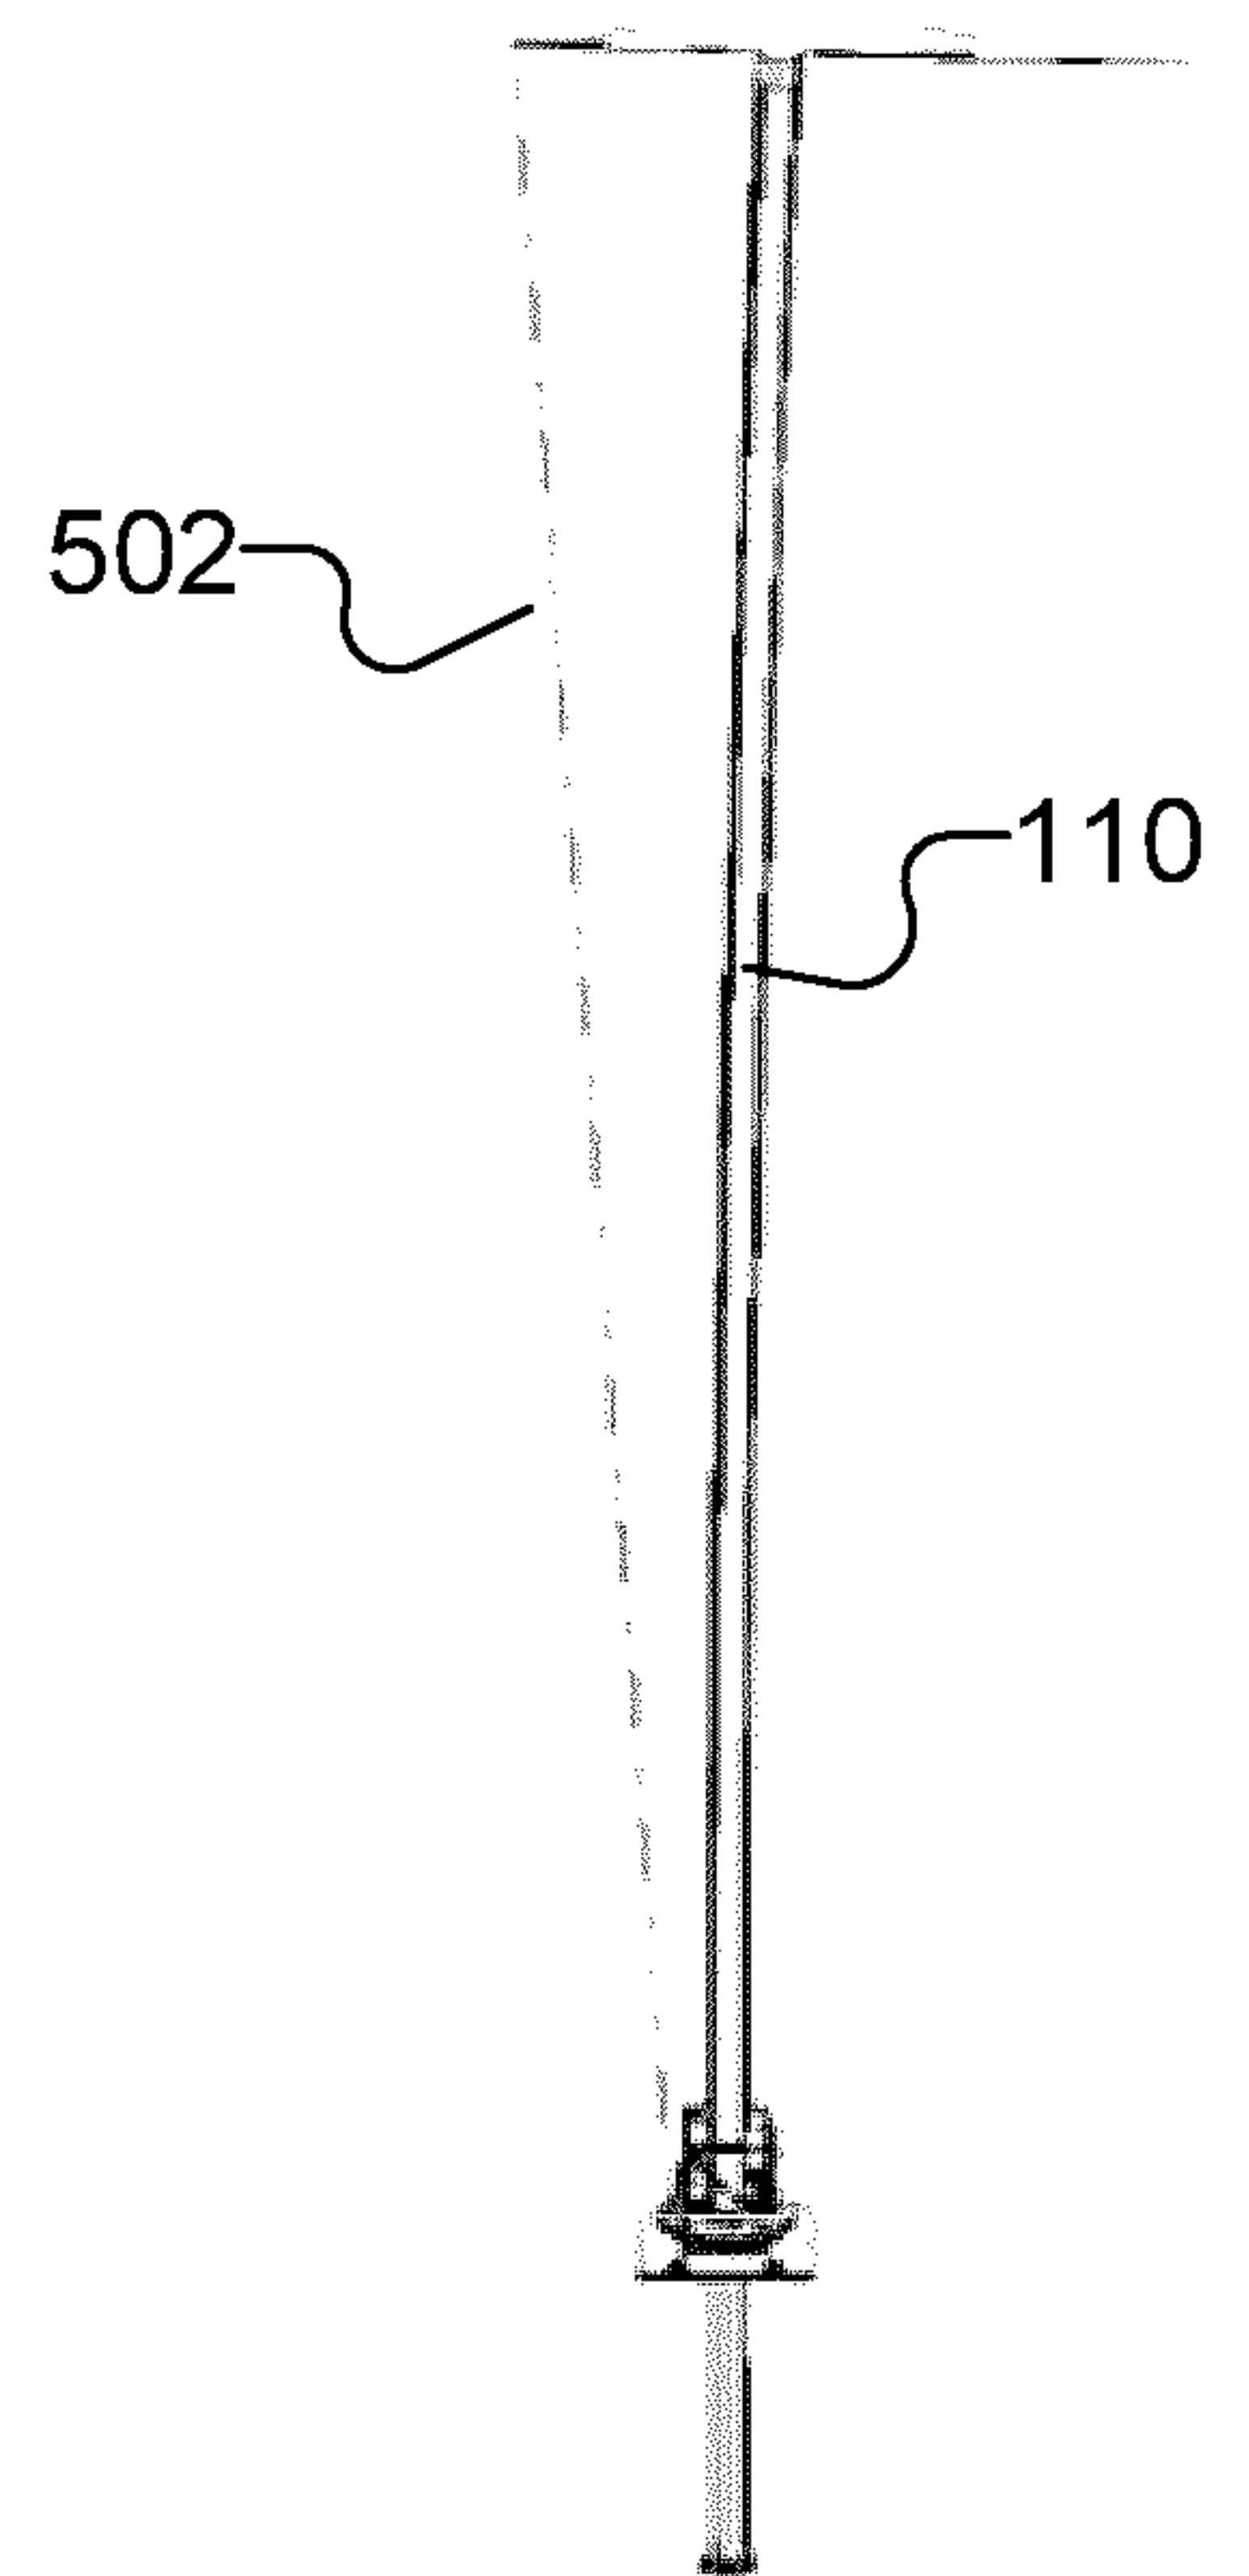


FIG. 44

17/19

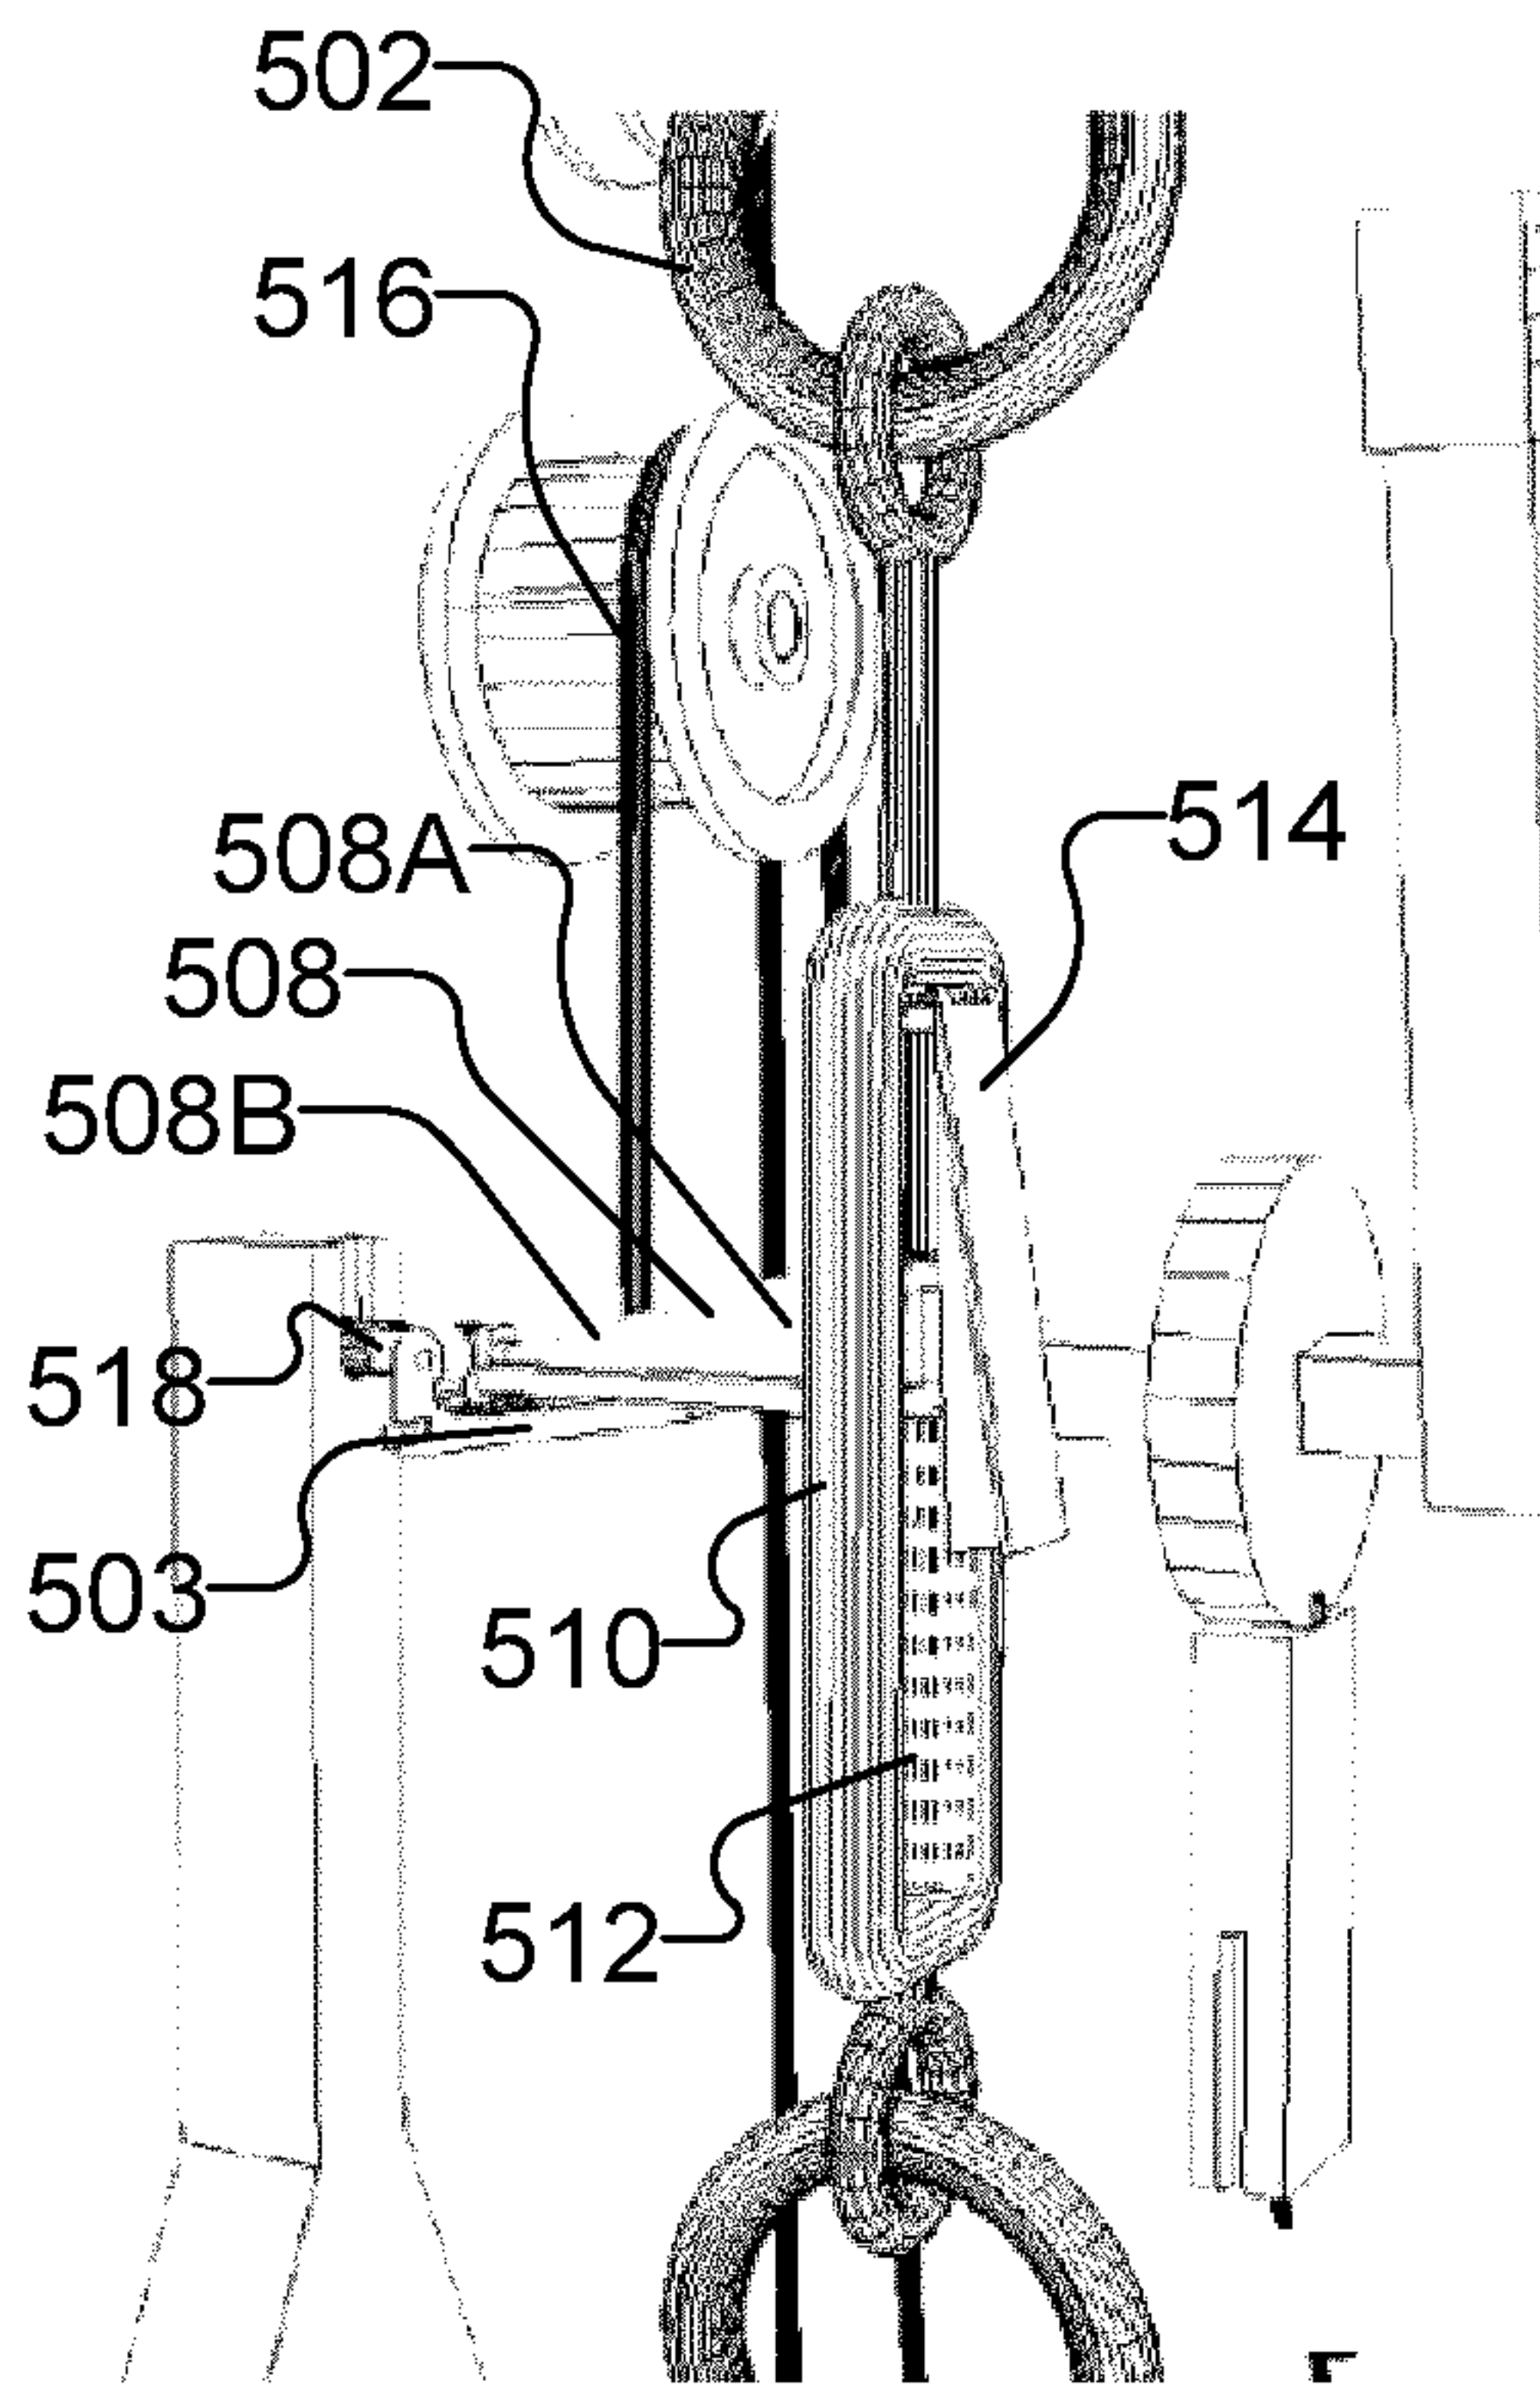


FIG. 45

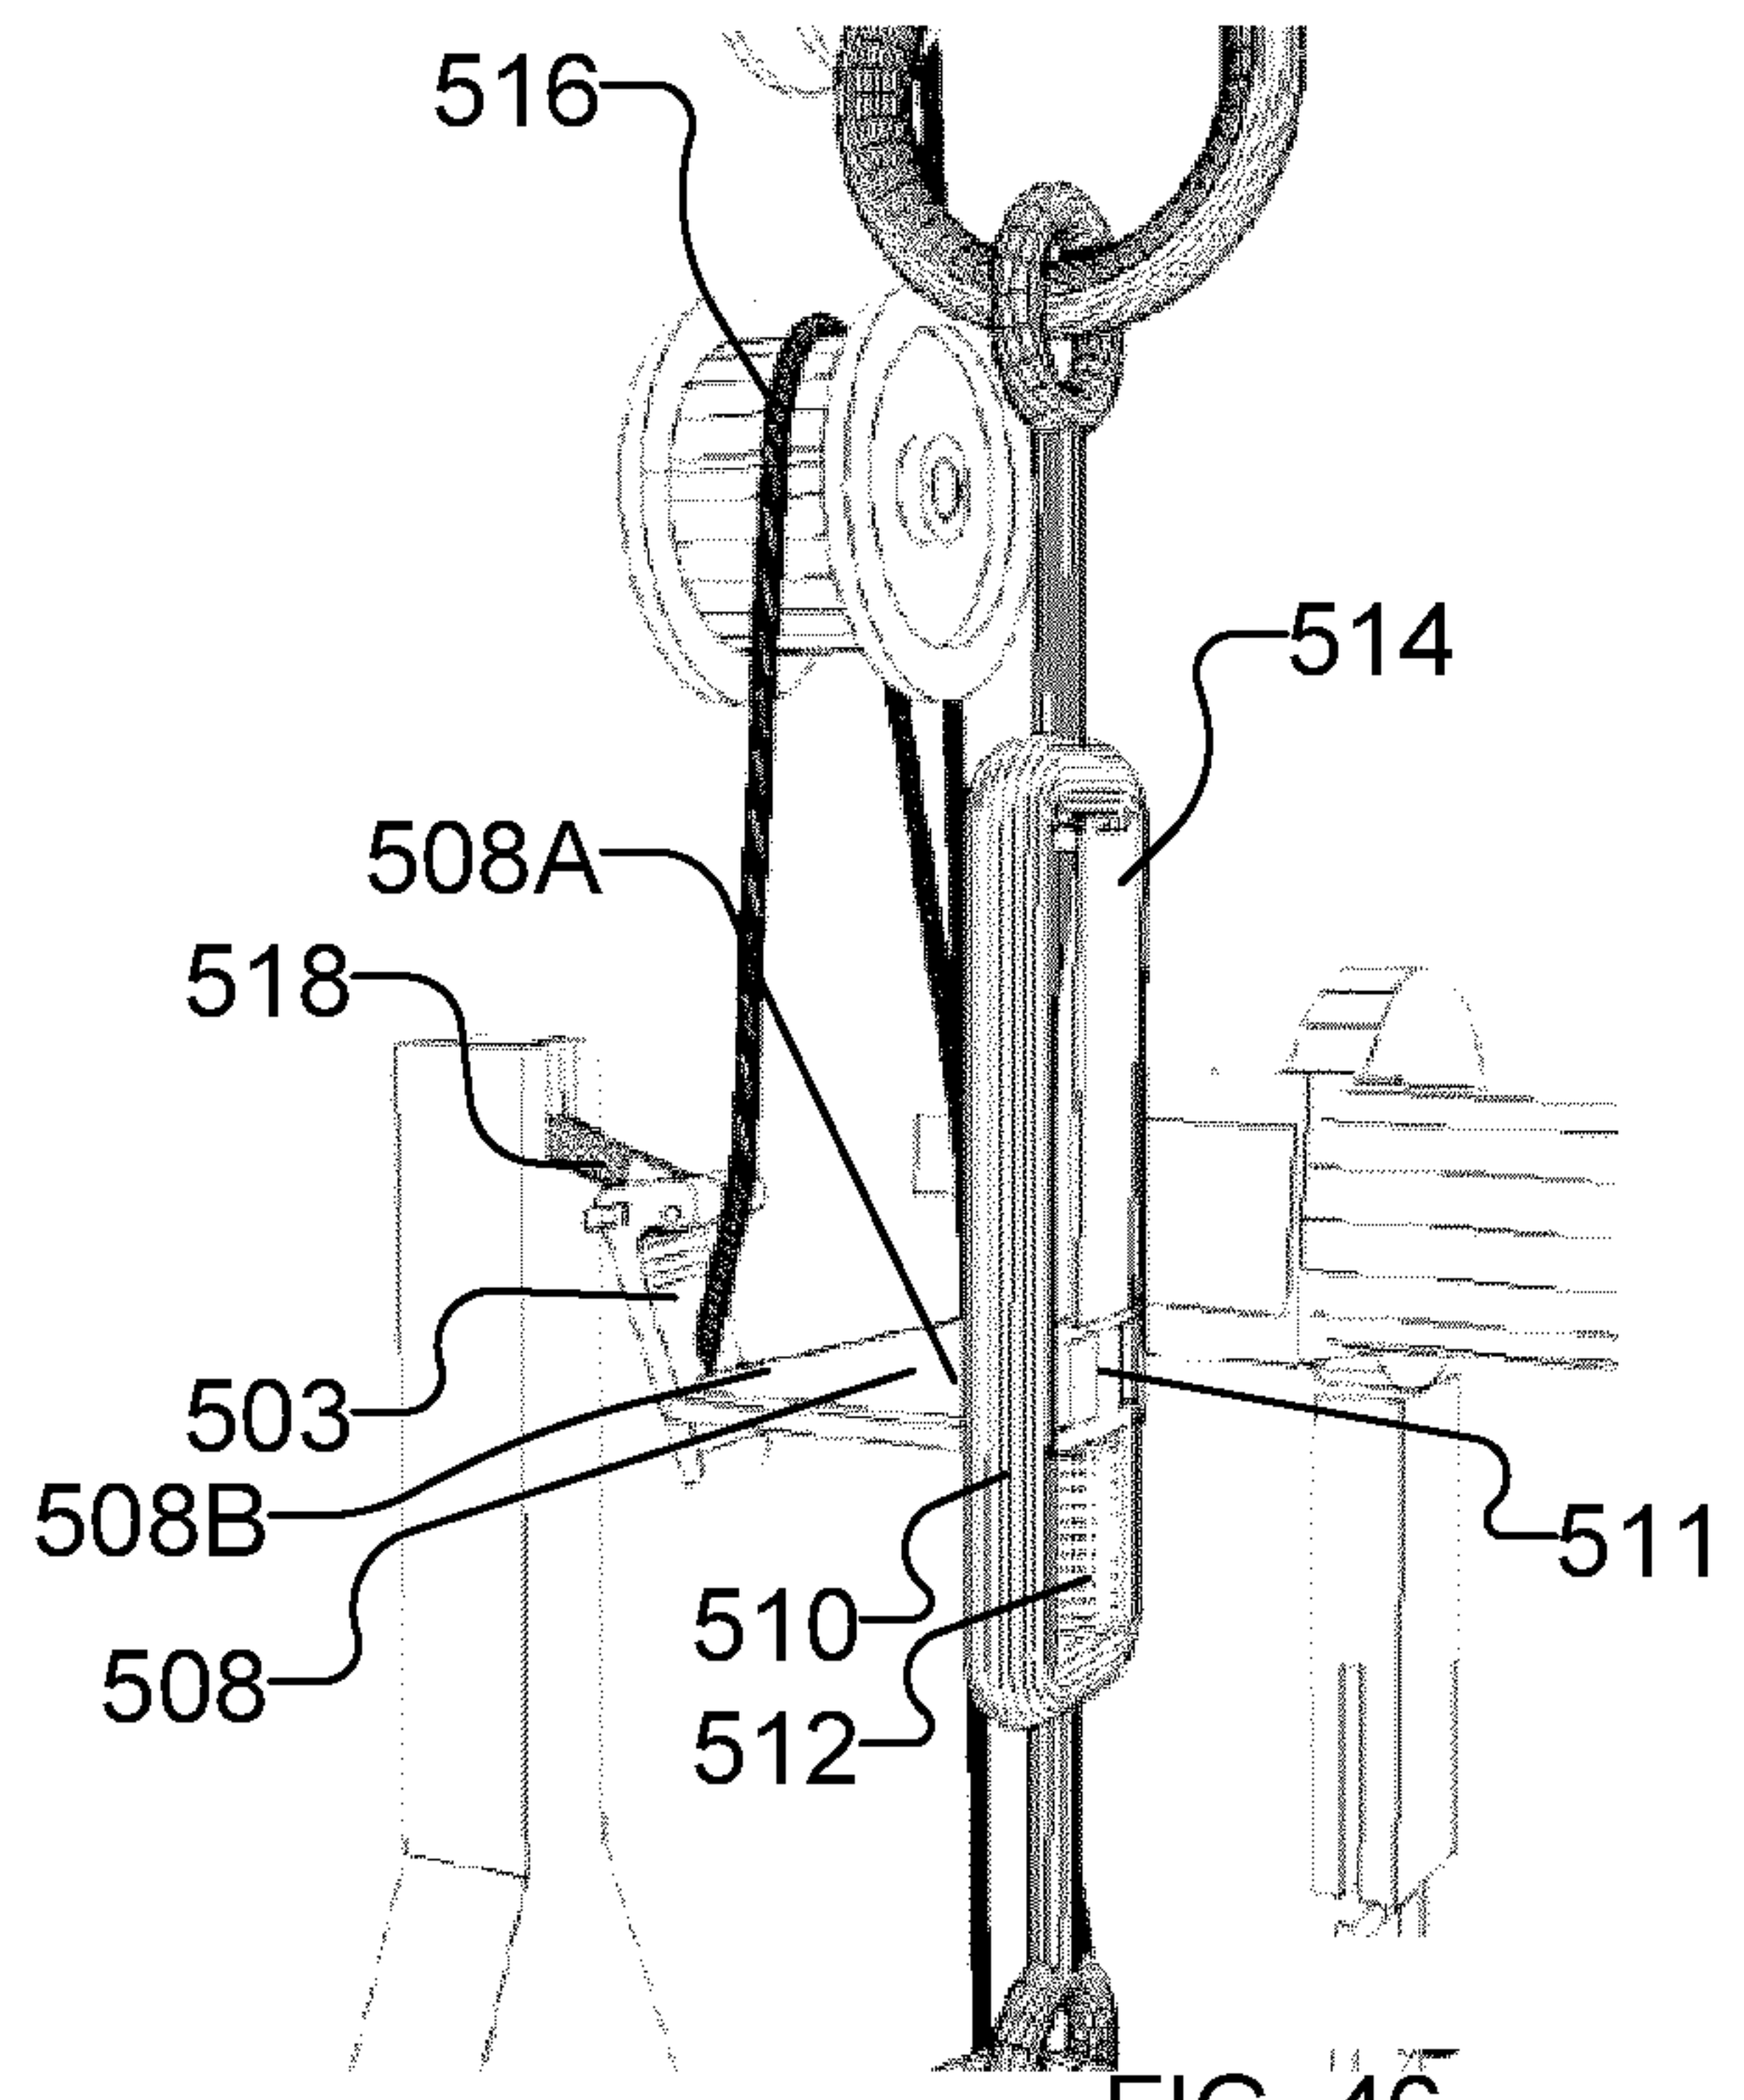


FIG. 46

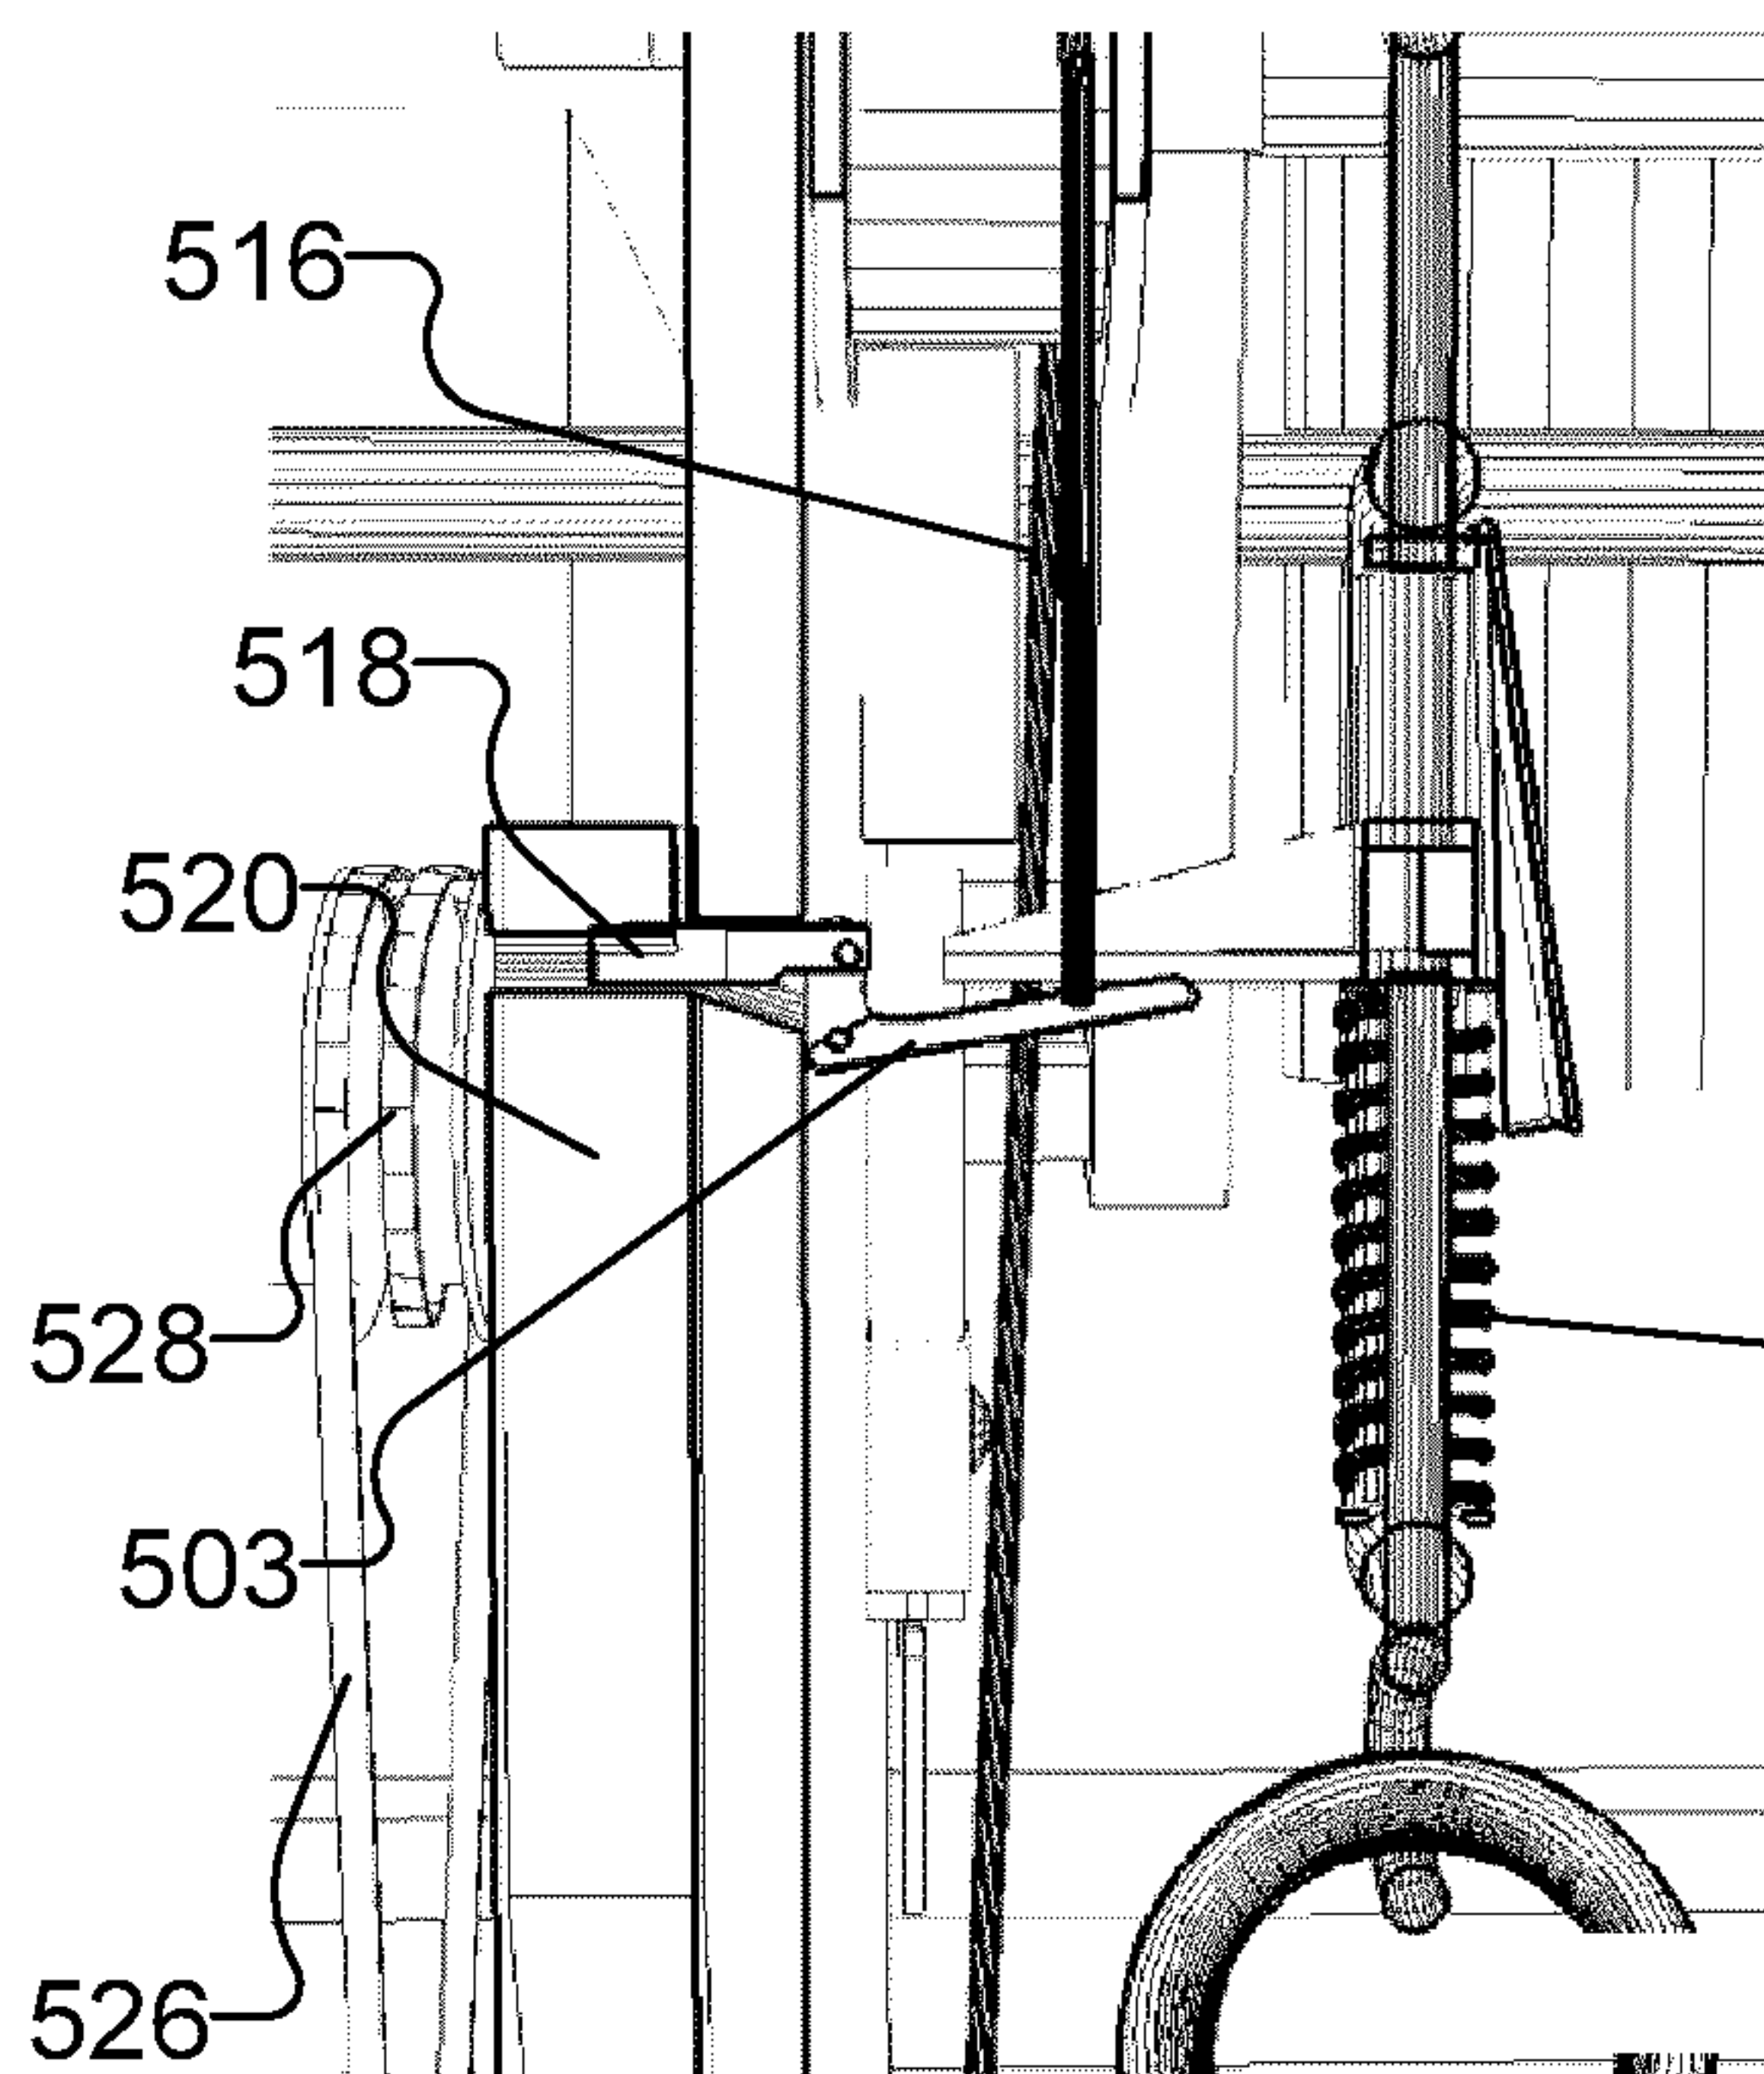


FIG. 47

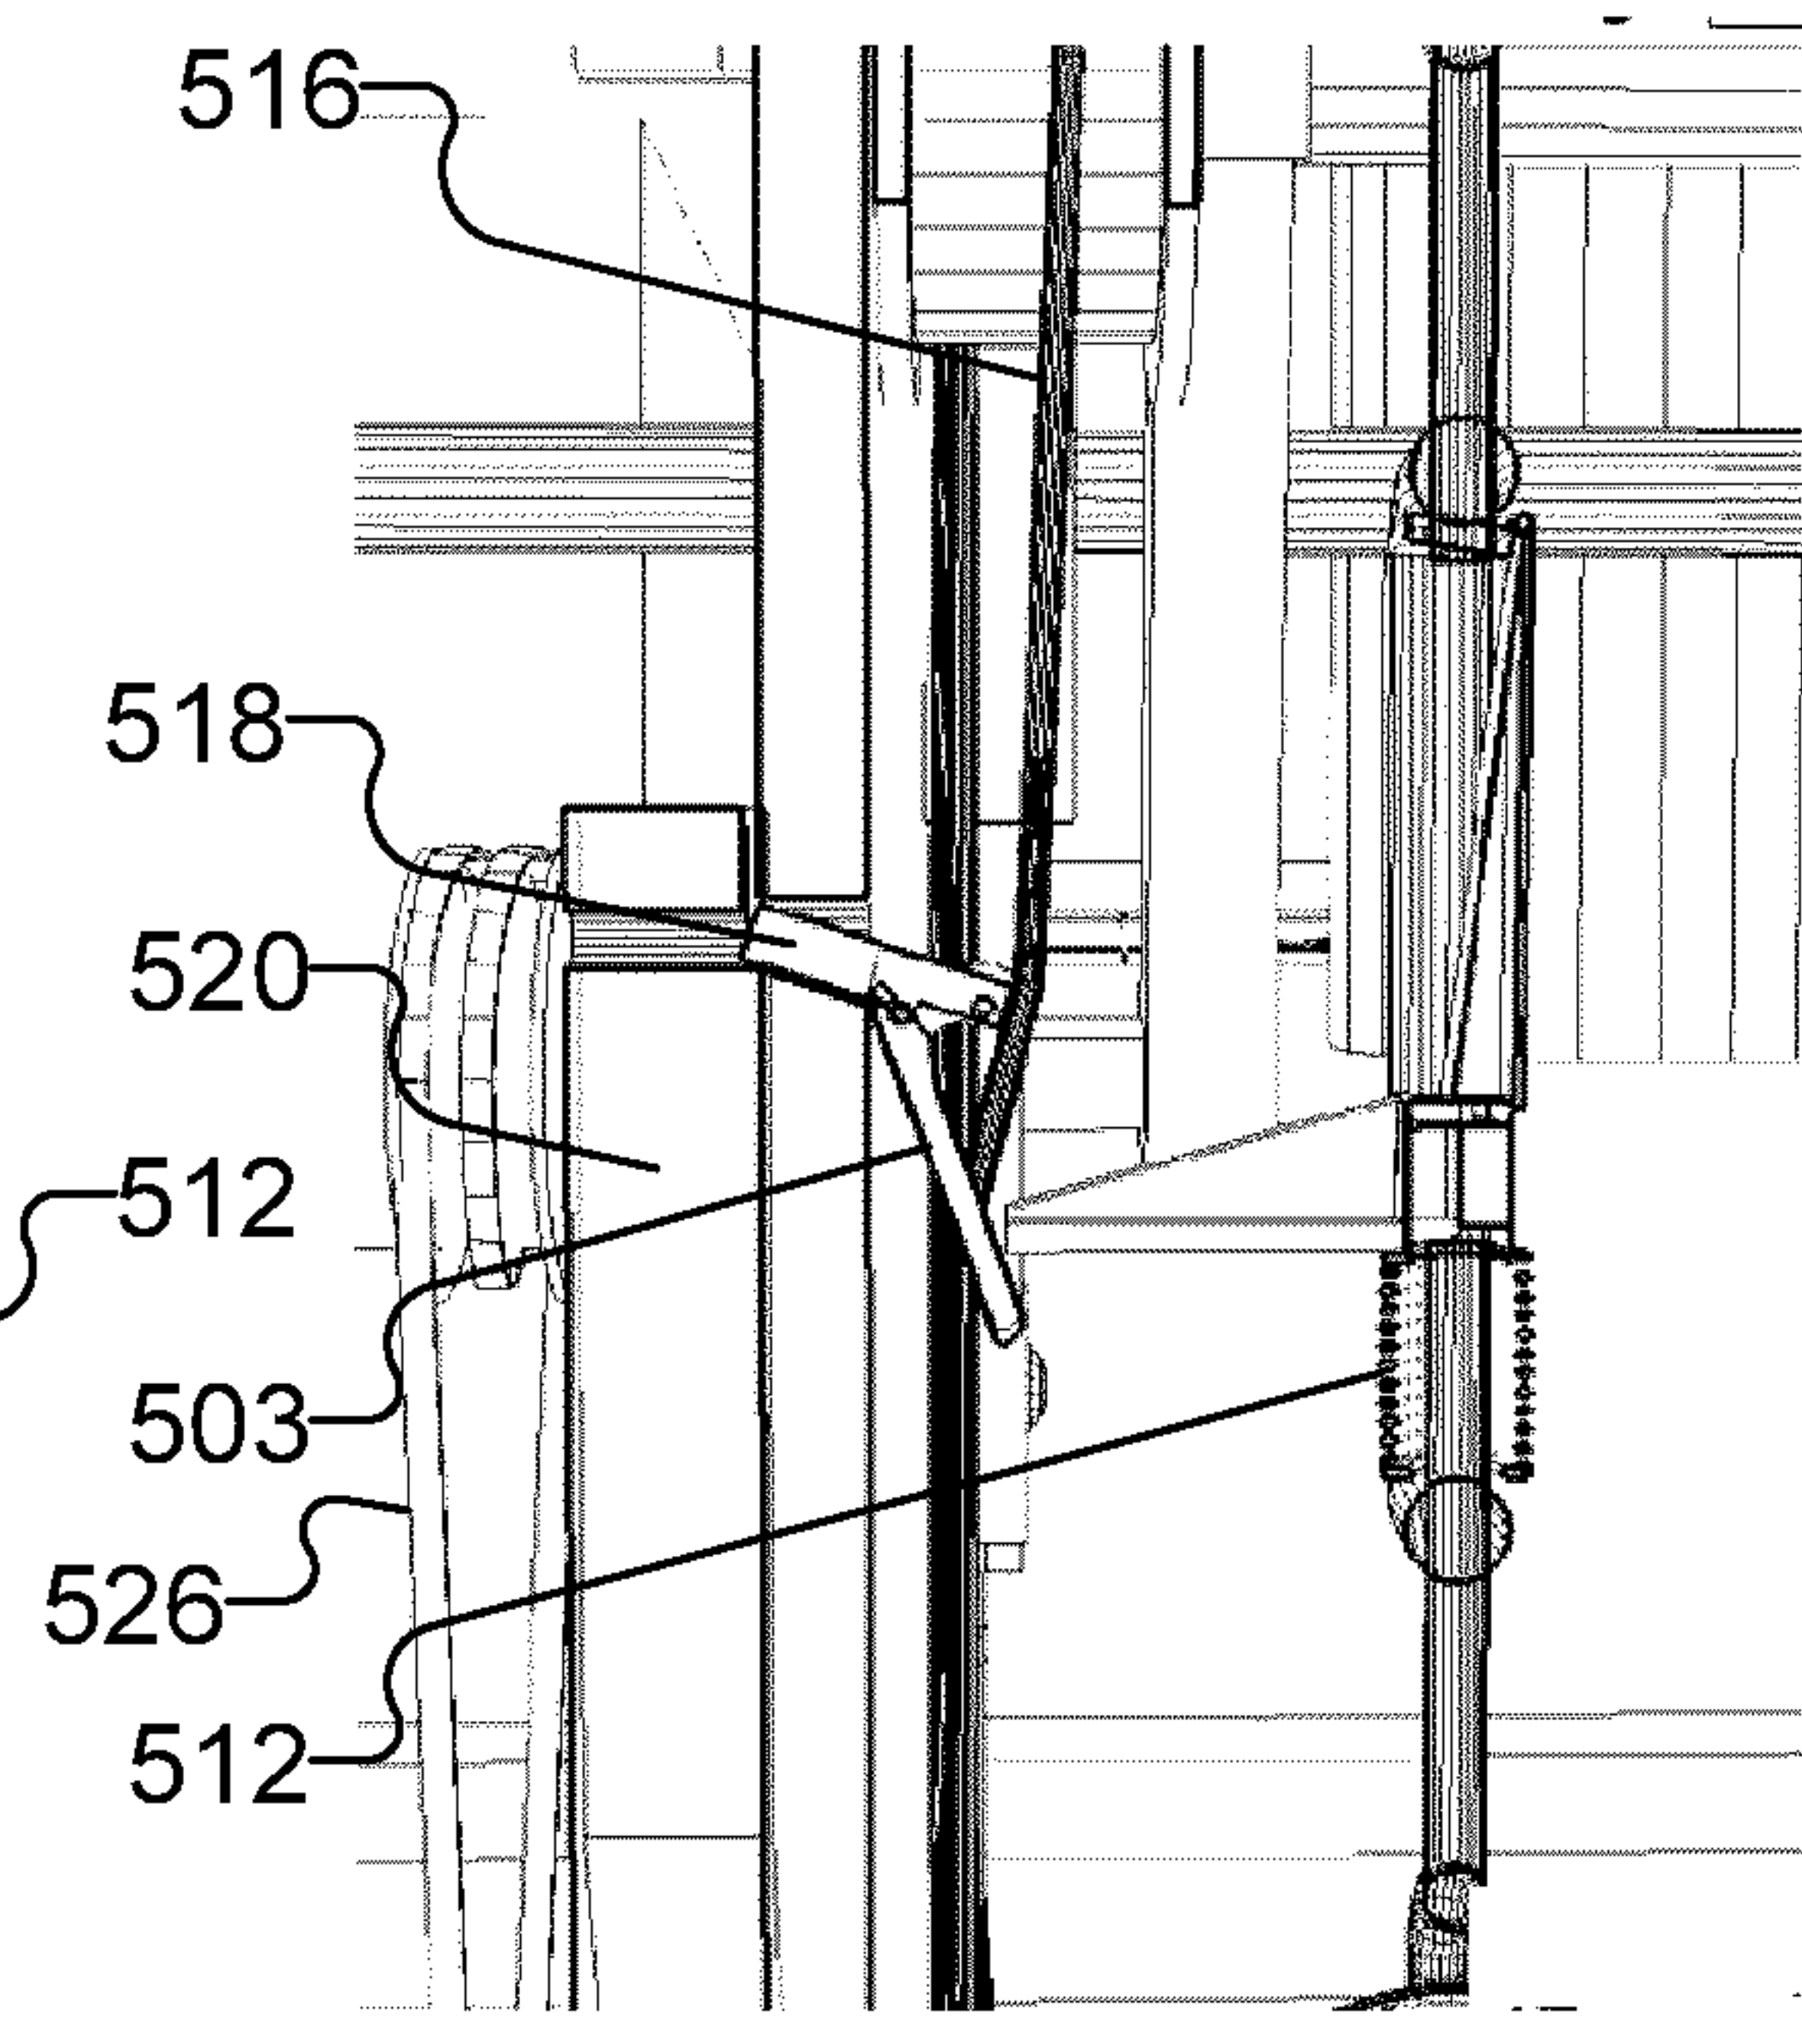


FIG. 48

18/19

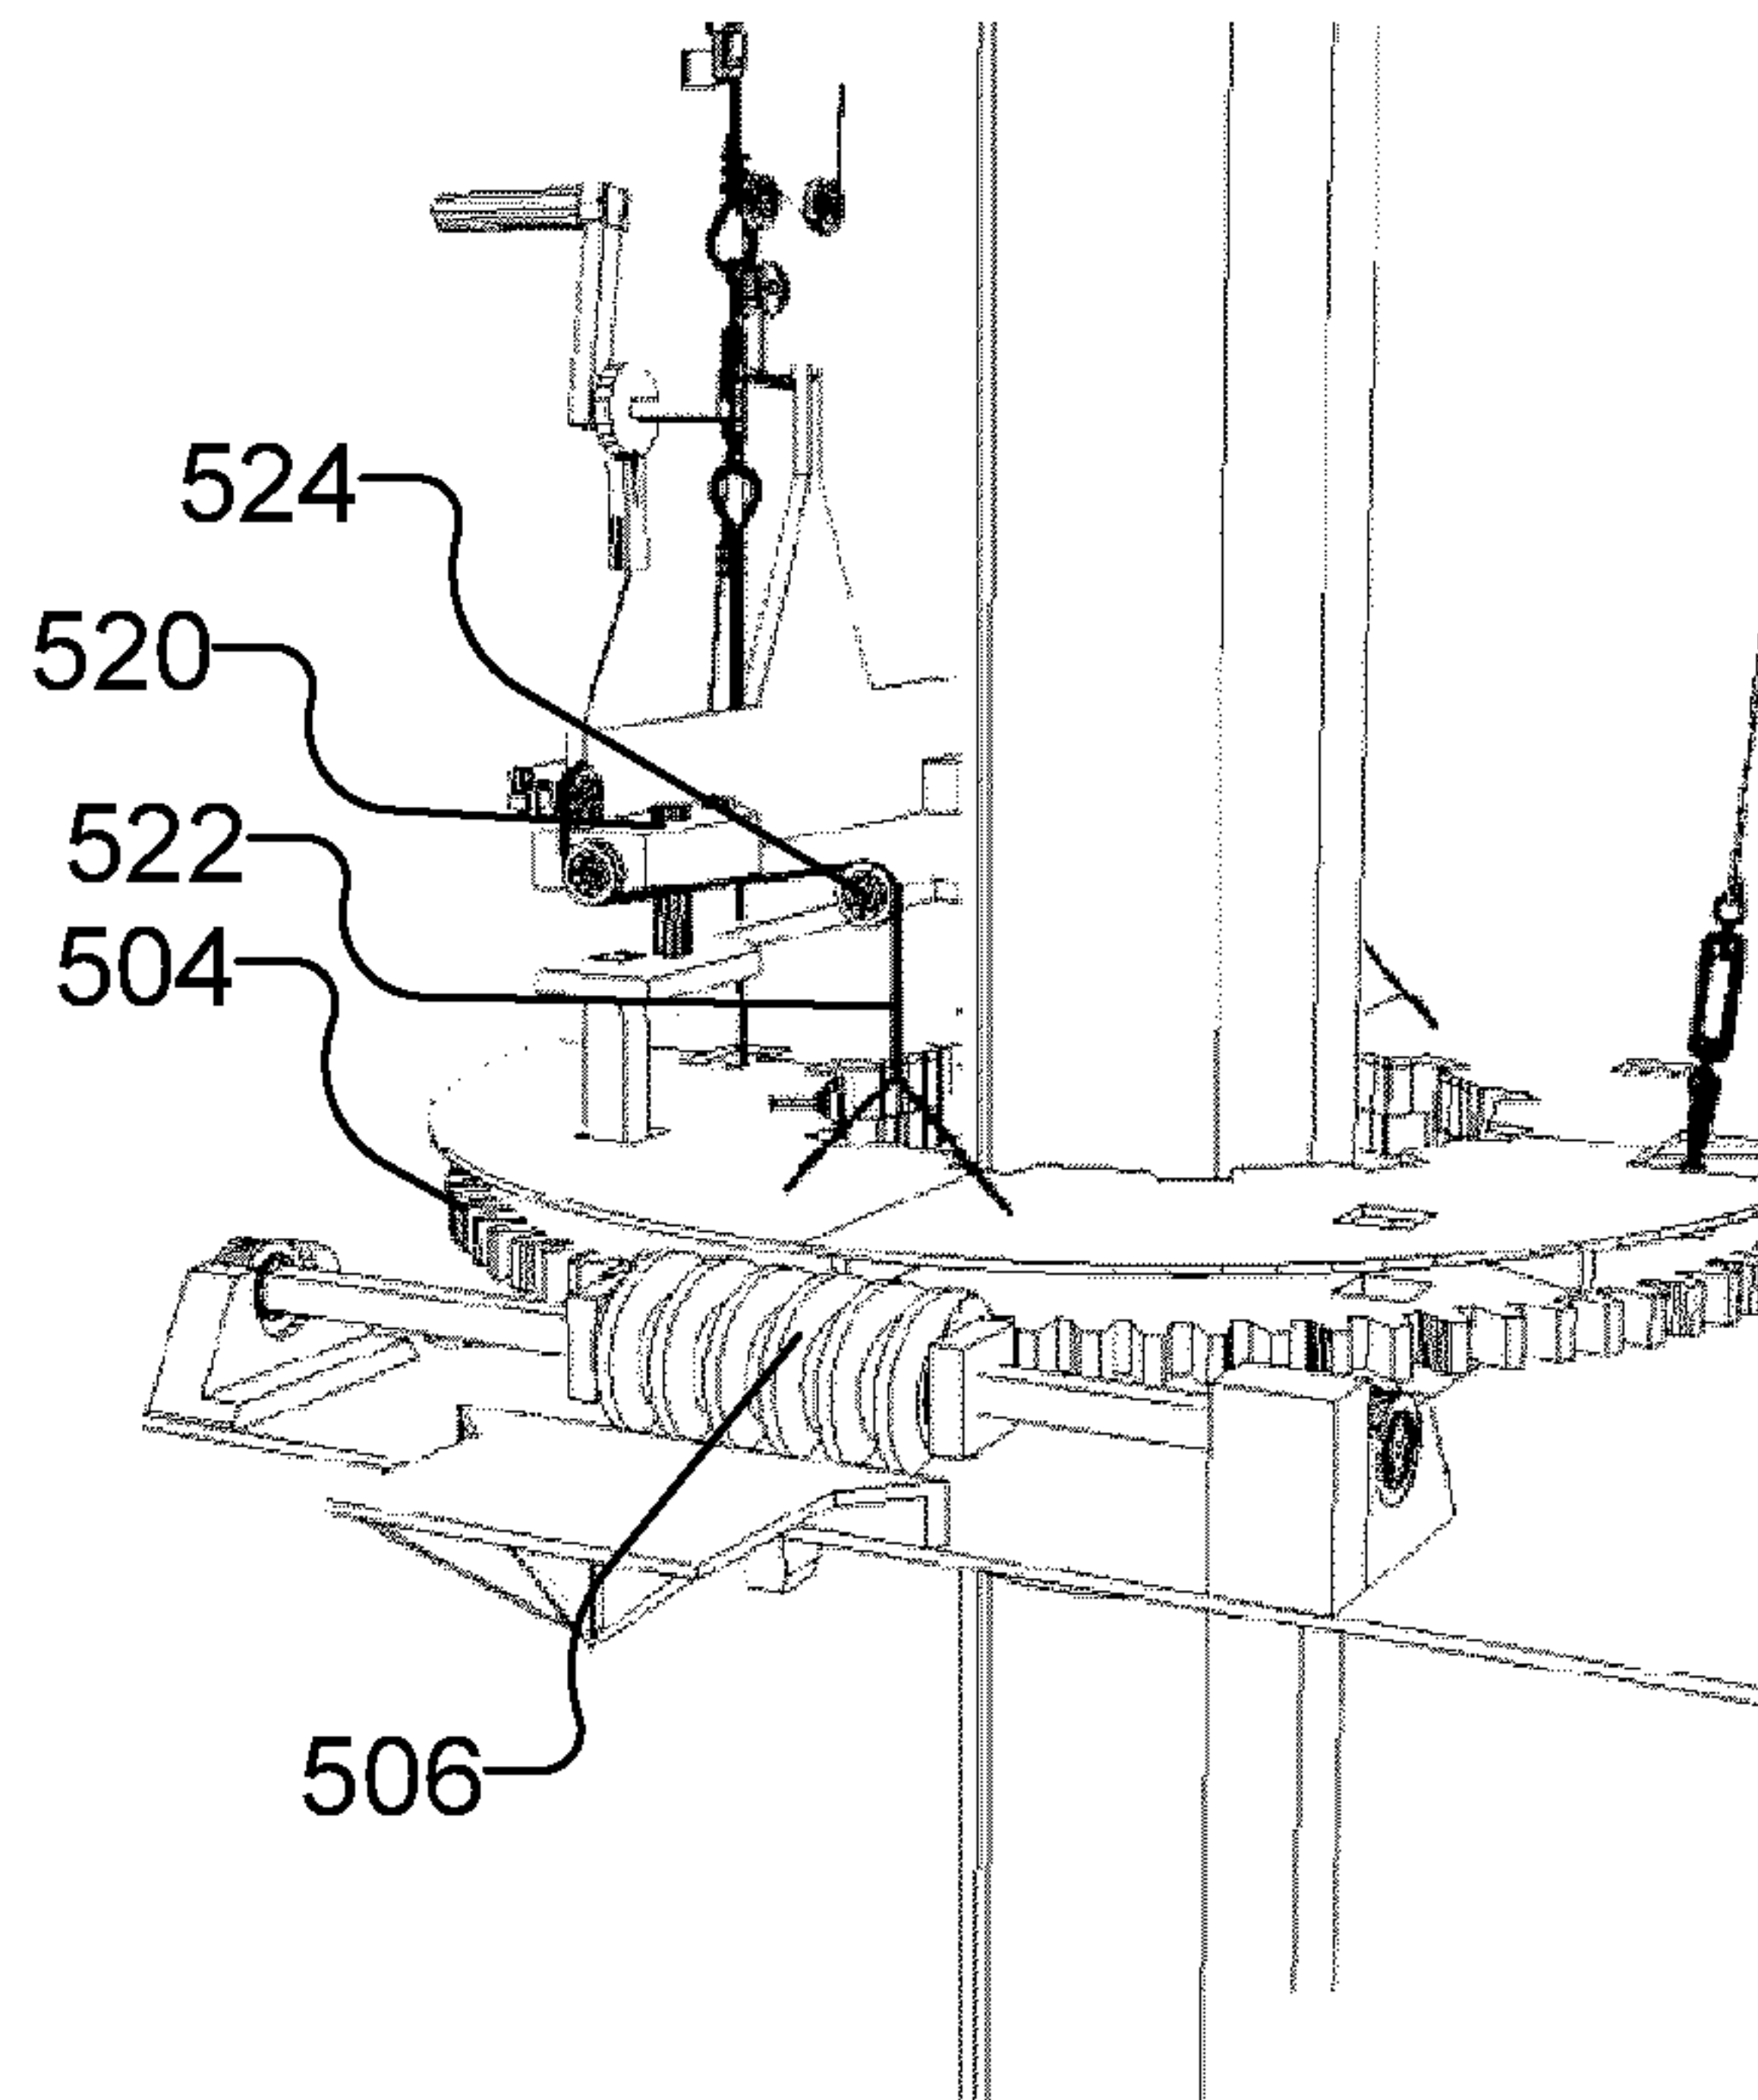


FIG. 49

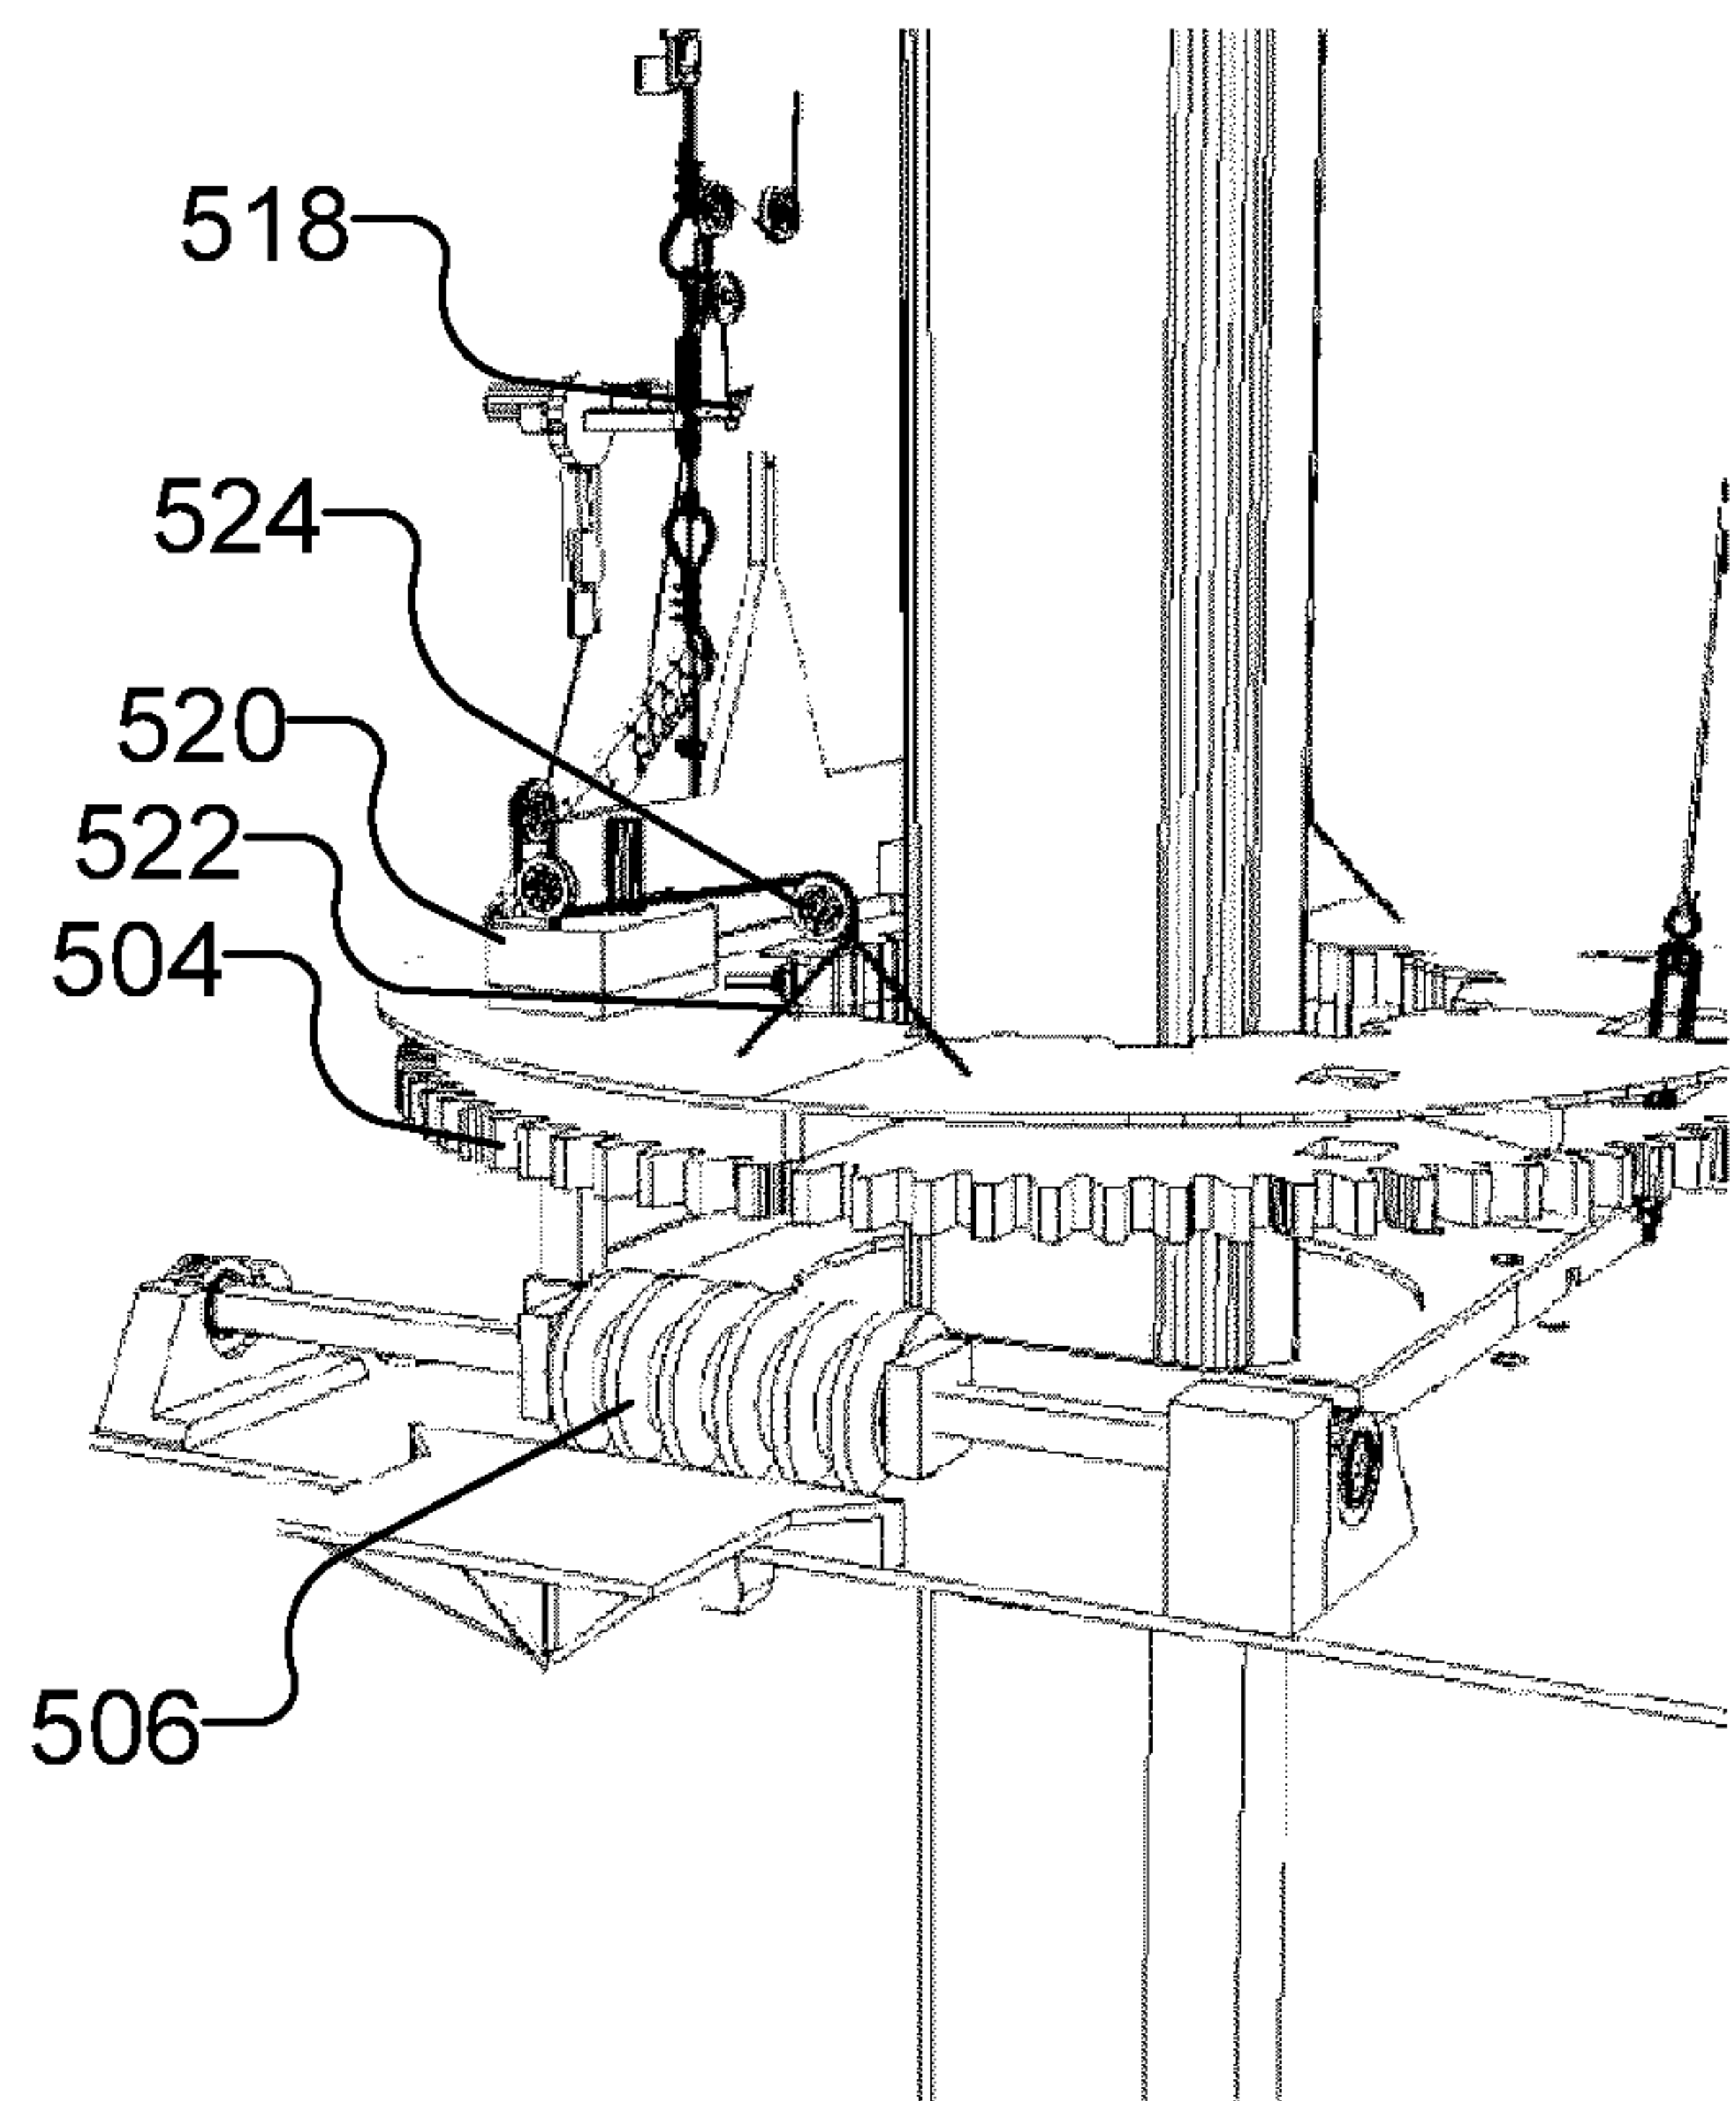


FIG. 50

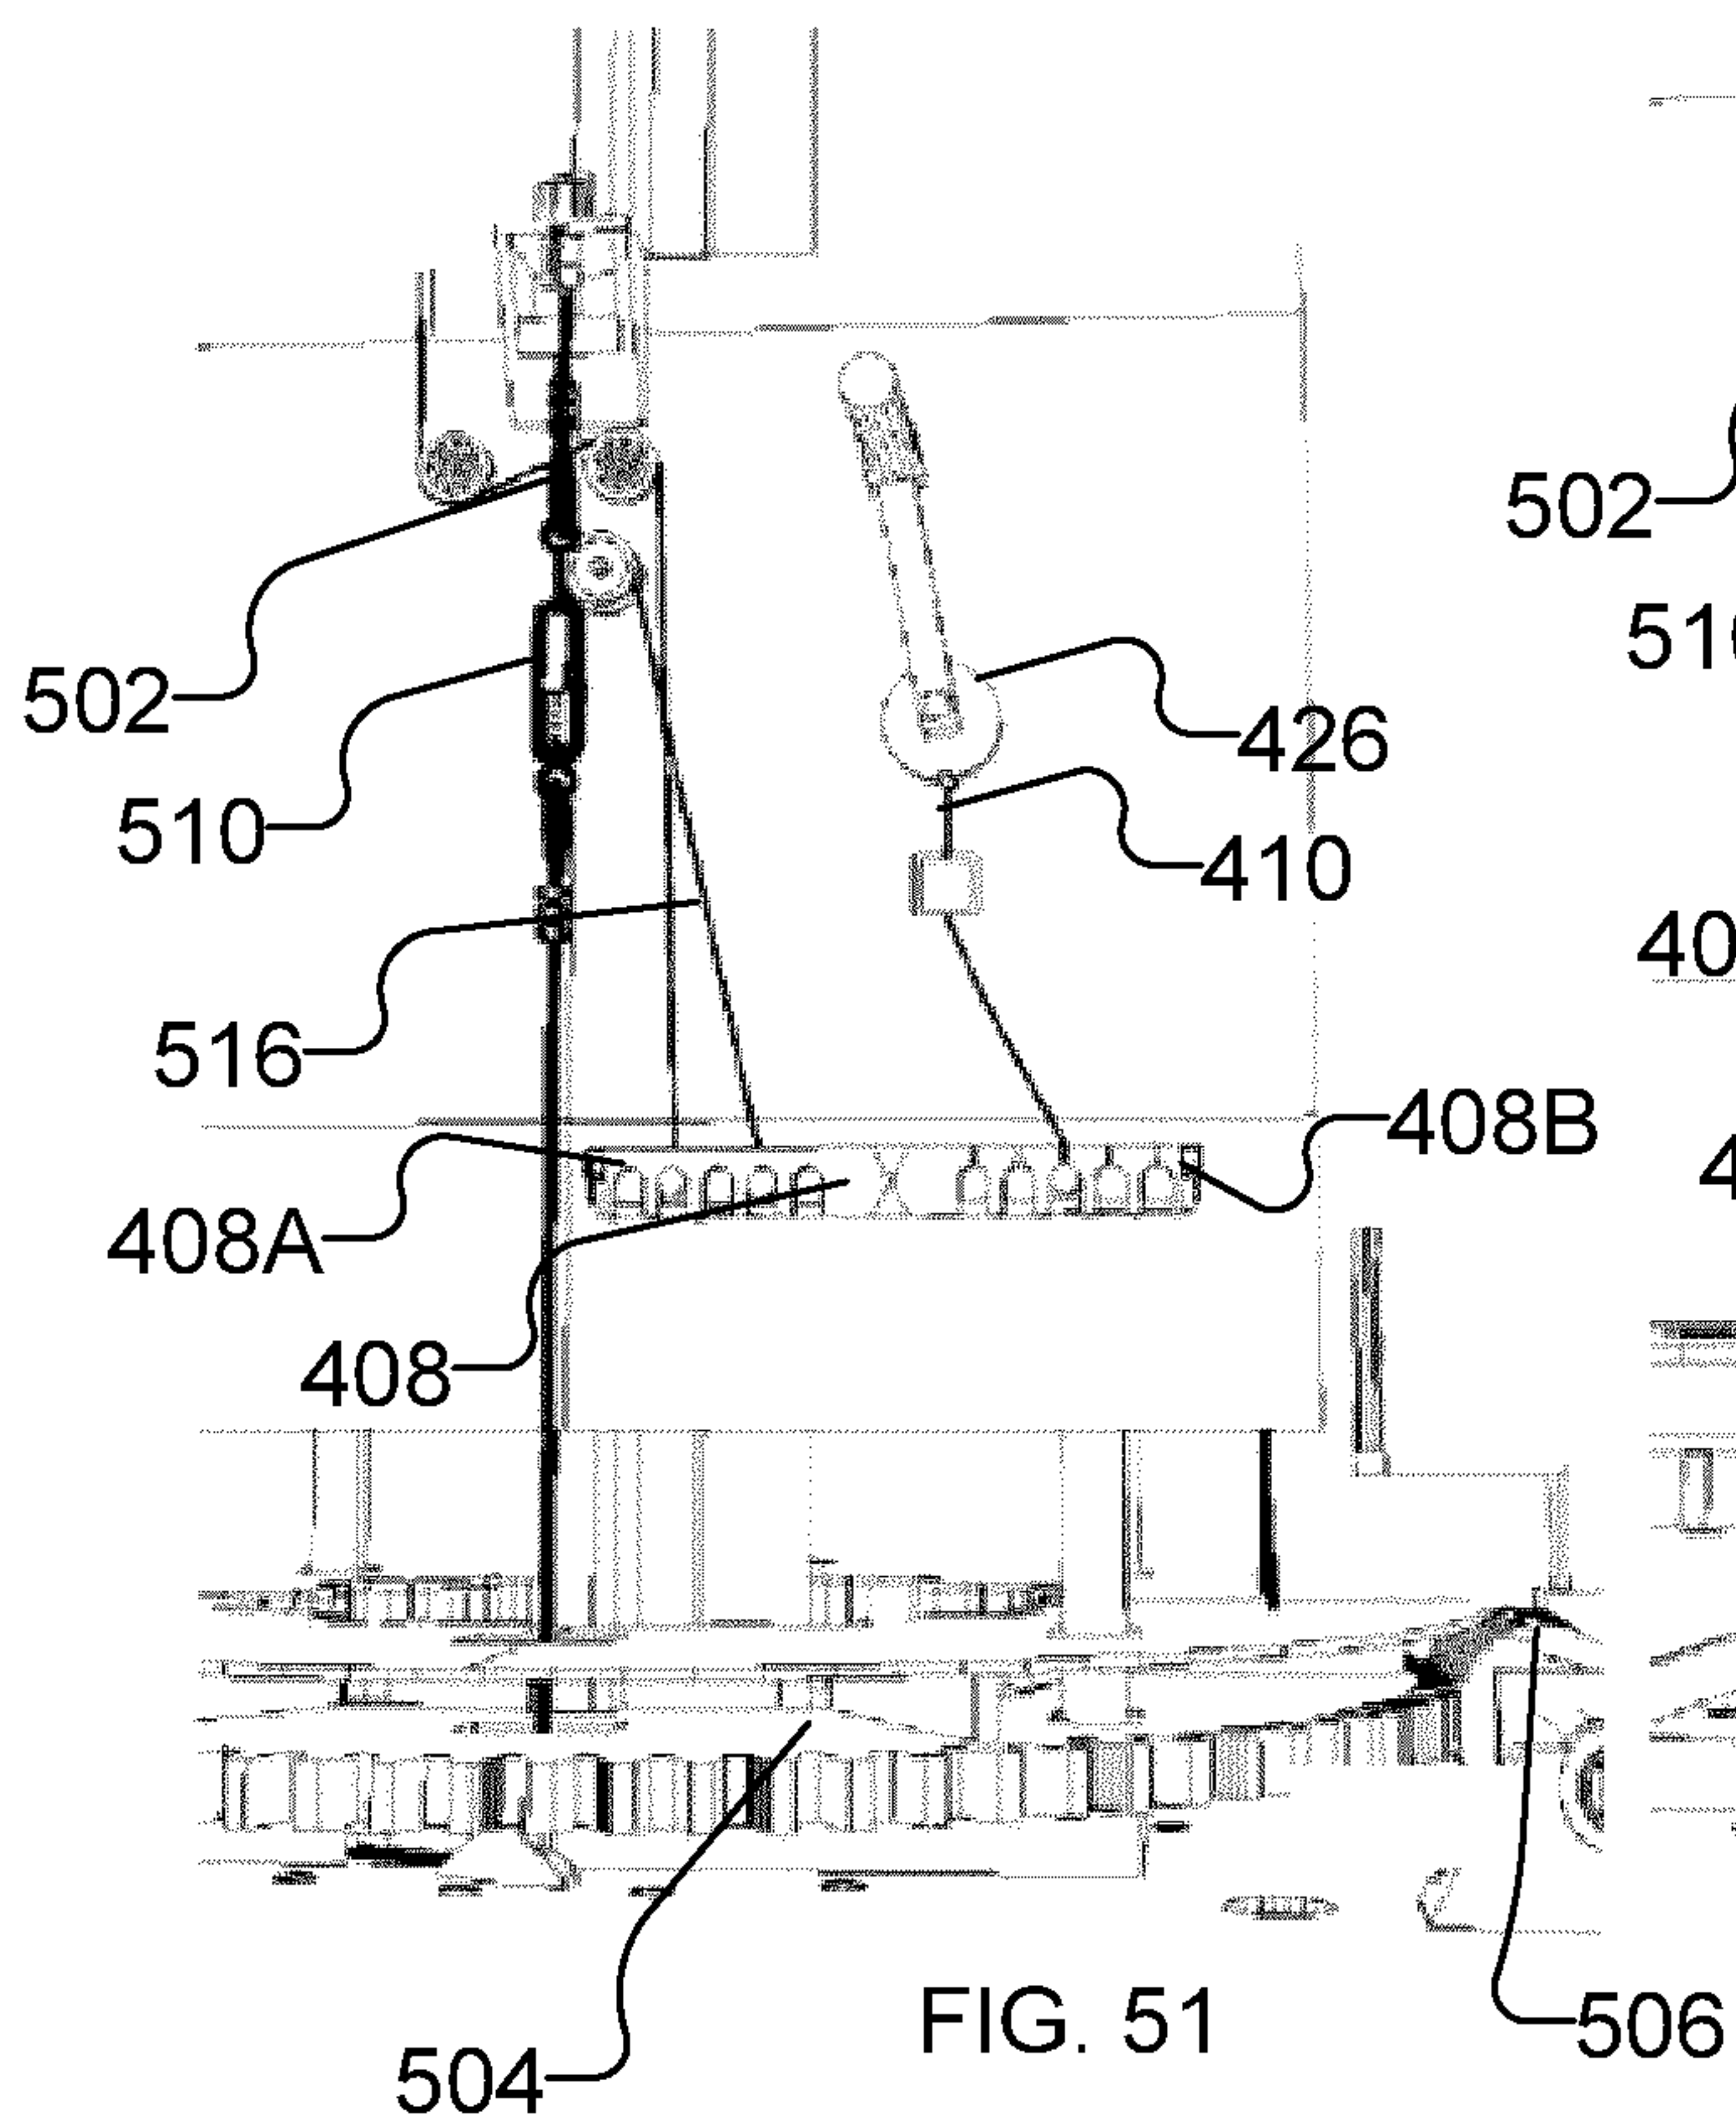


FIG. 51

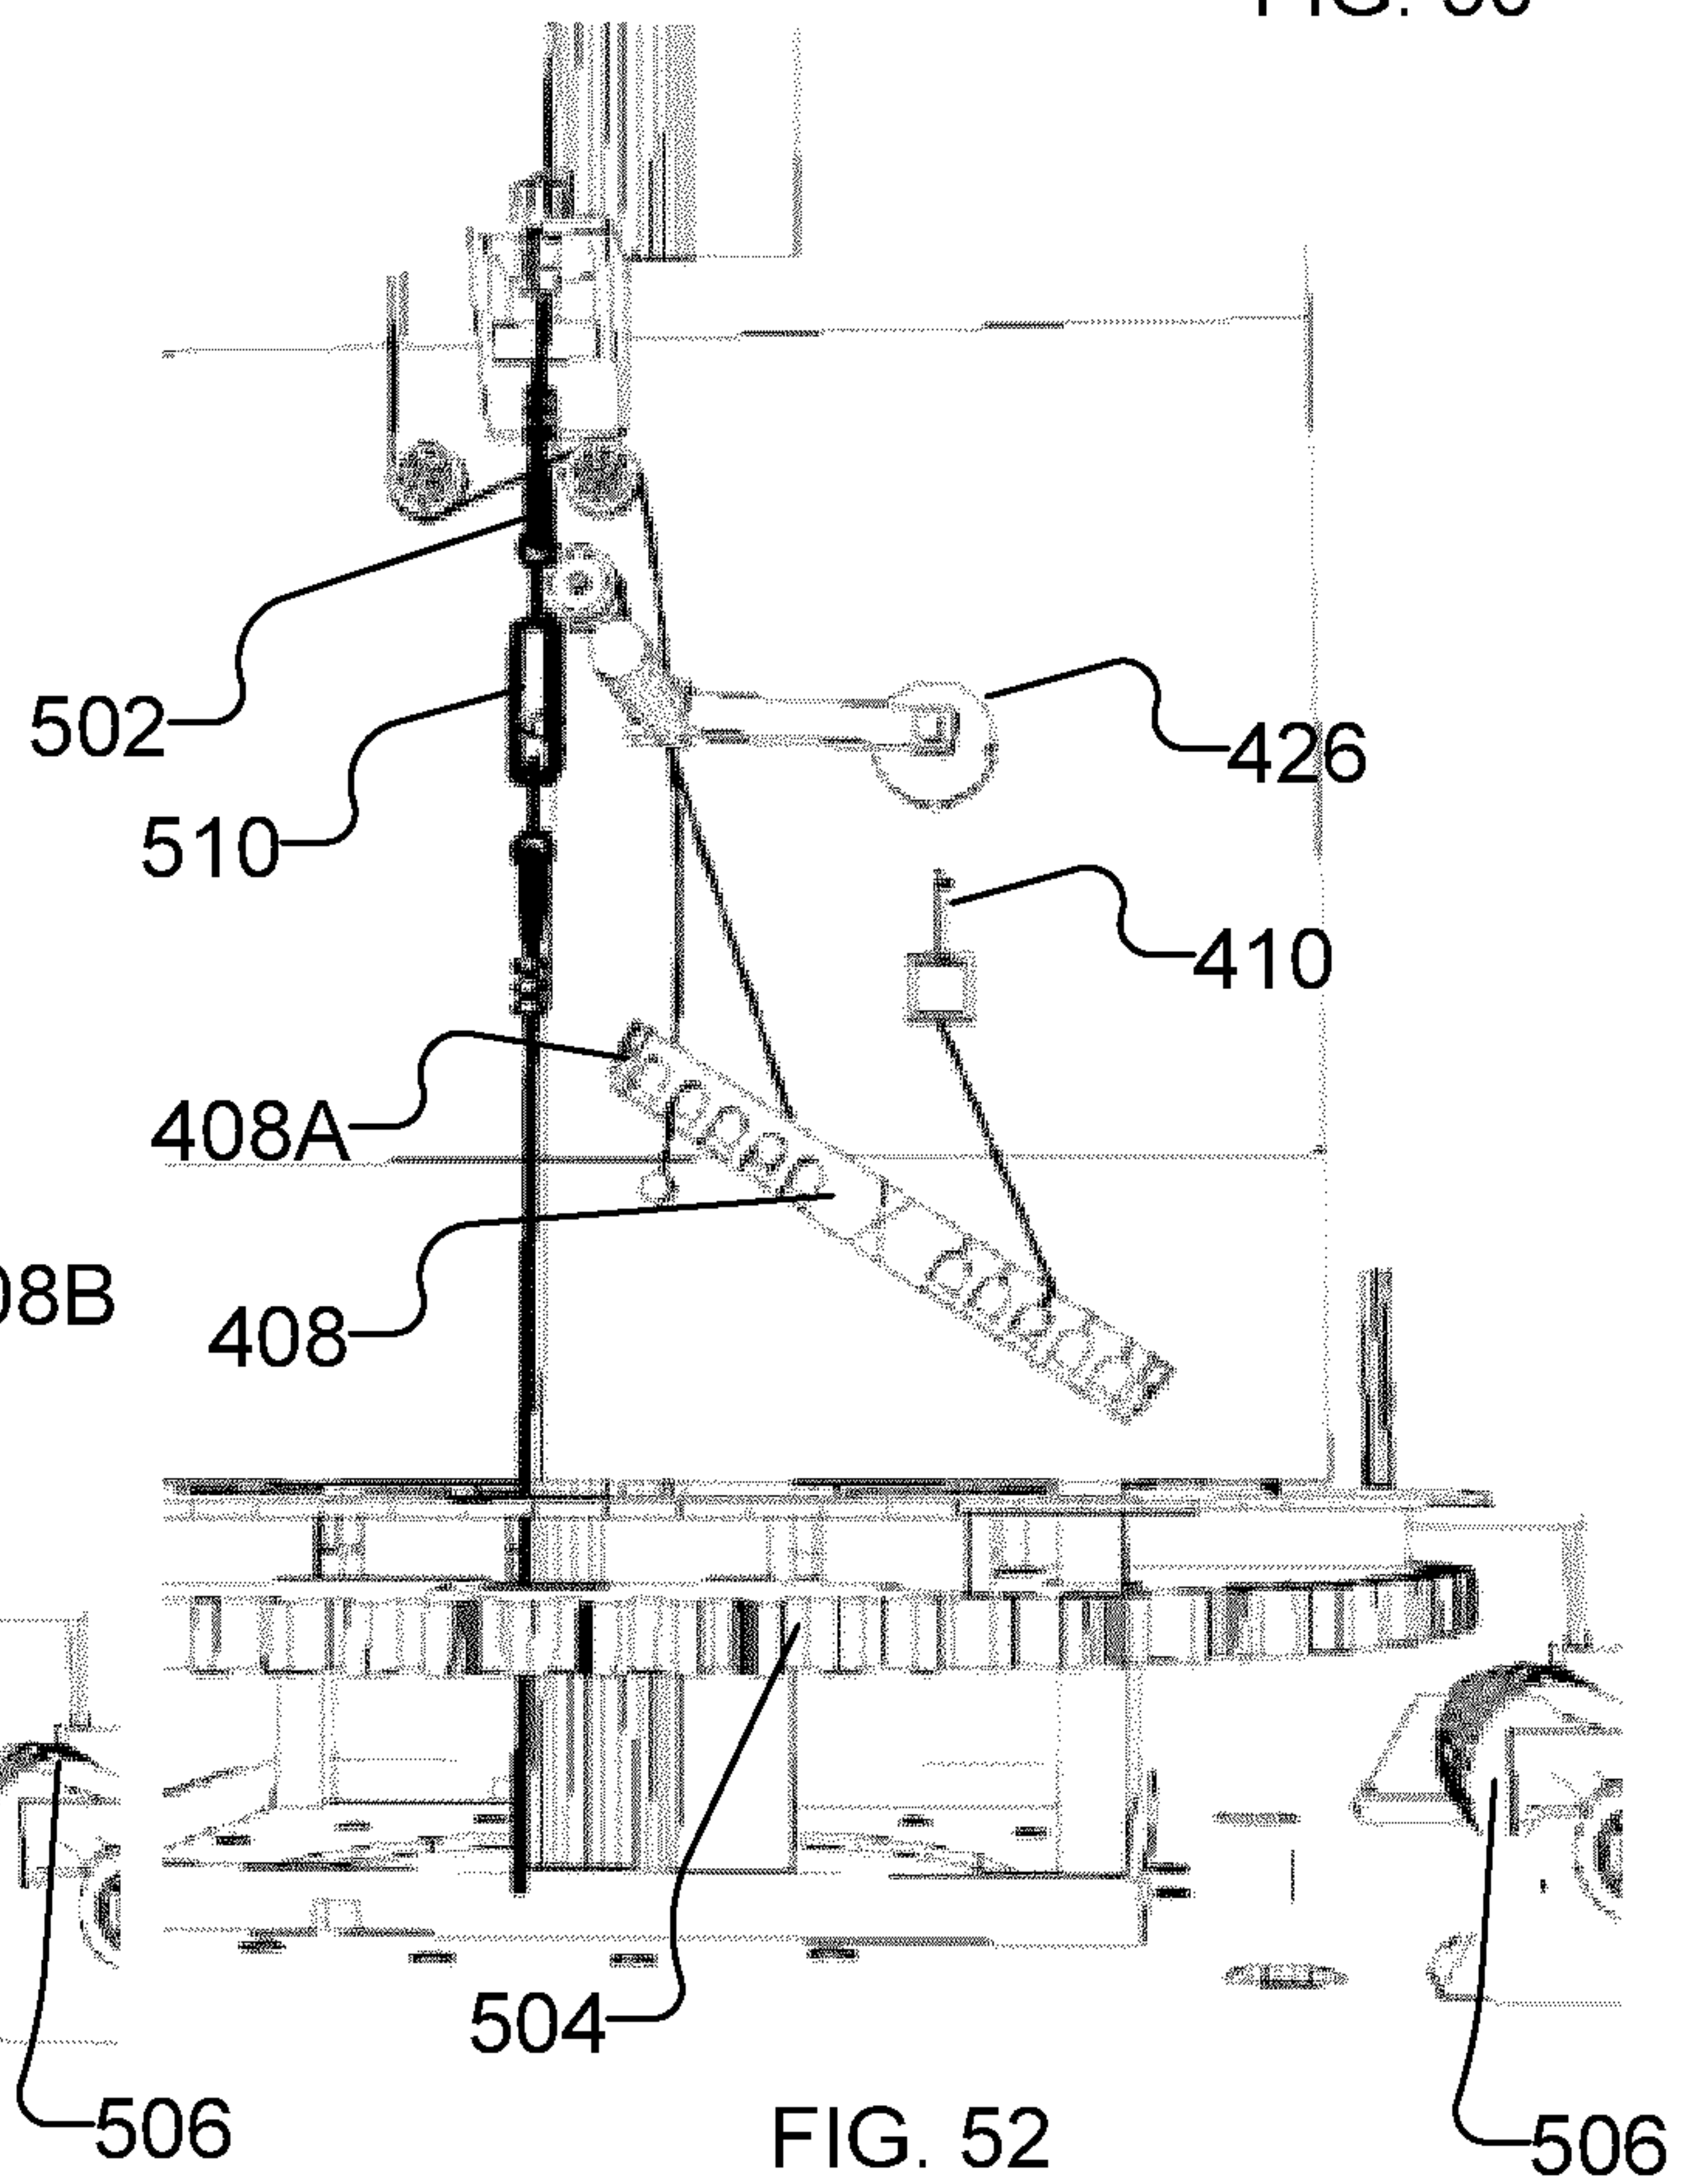


FIG. 52

19/19

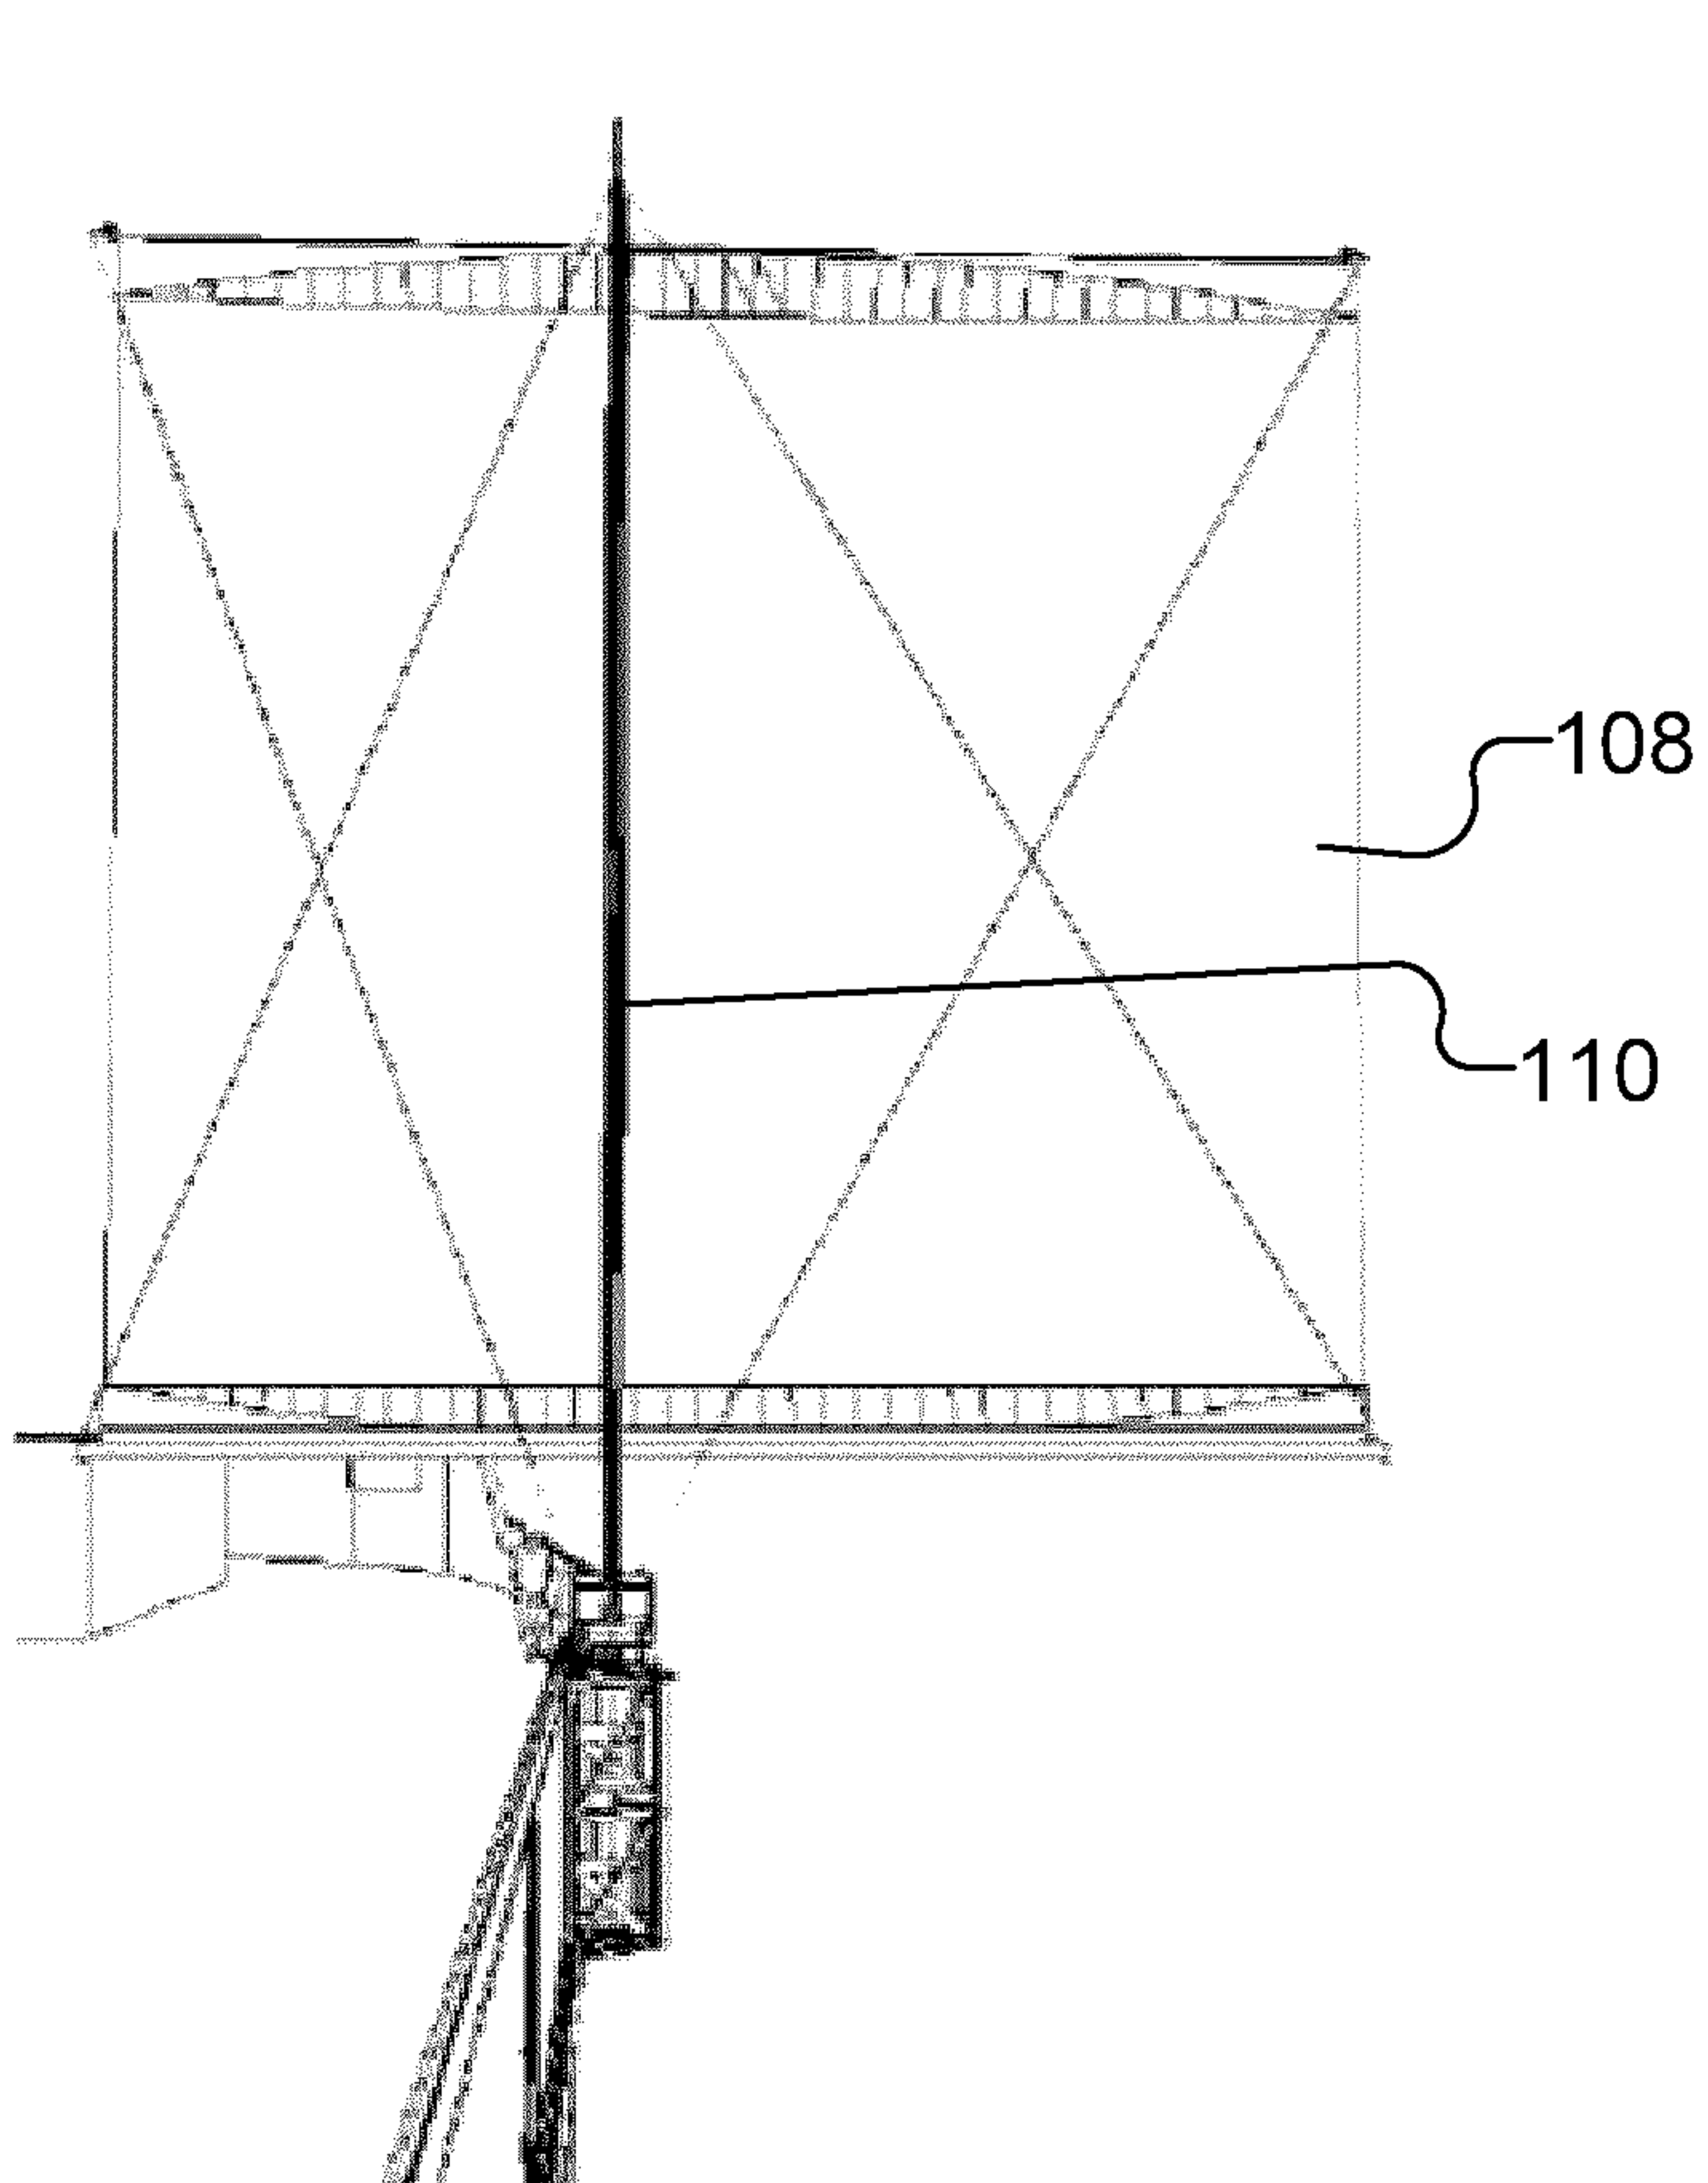


FIG. 53

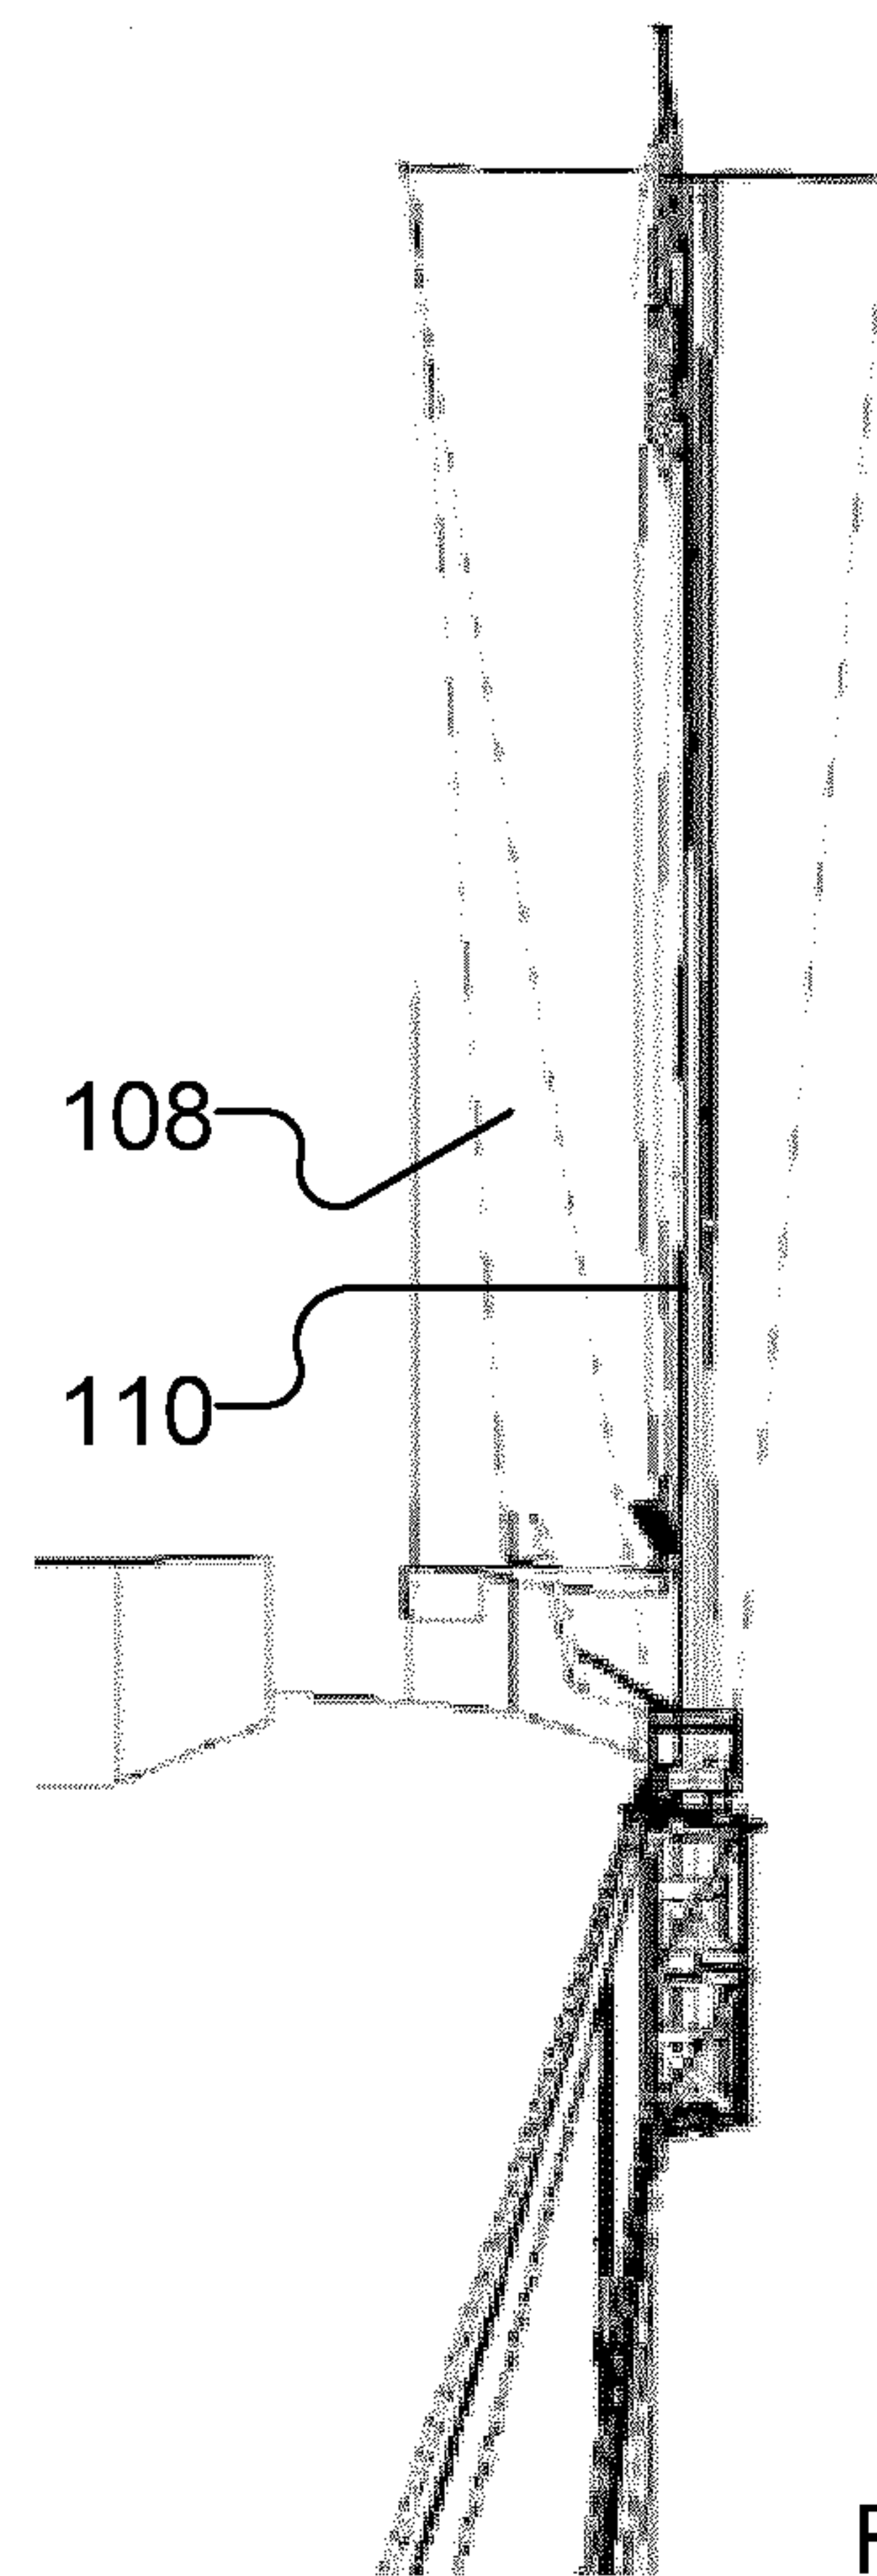


FIG. 54

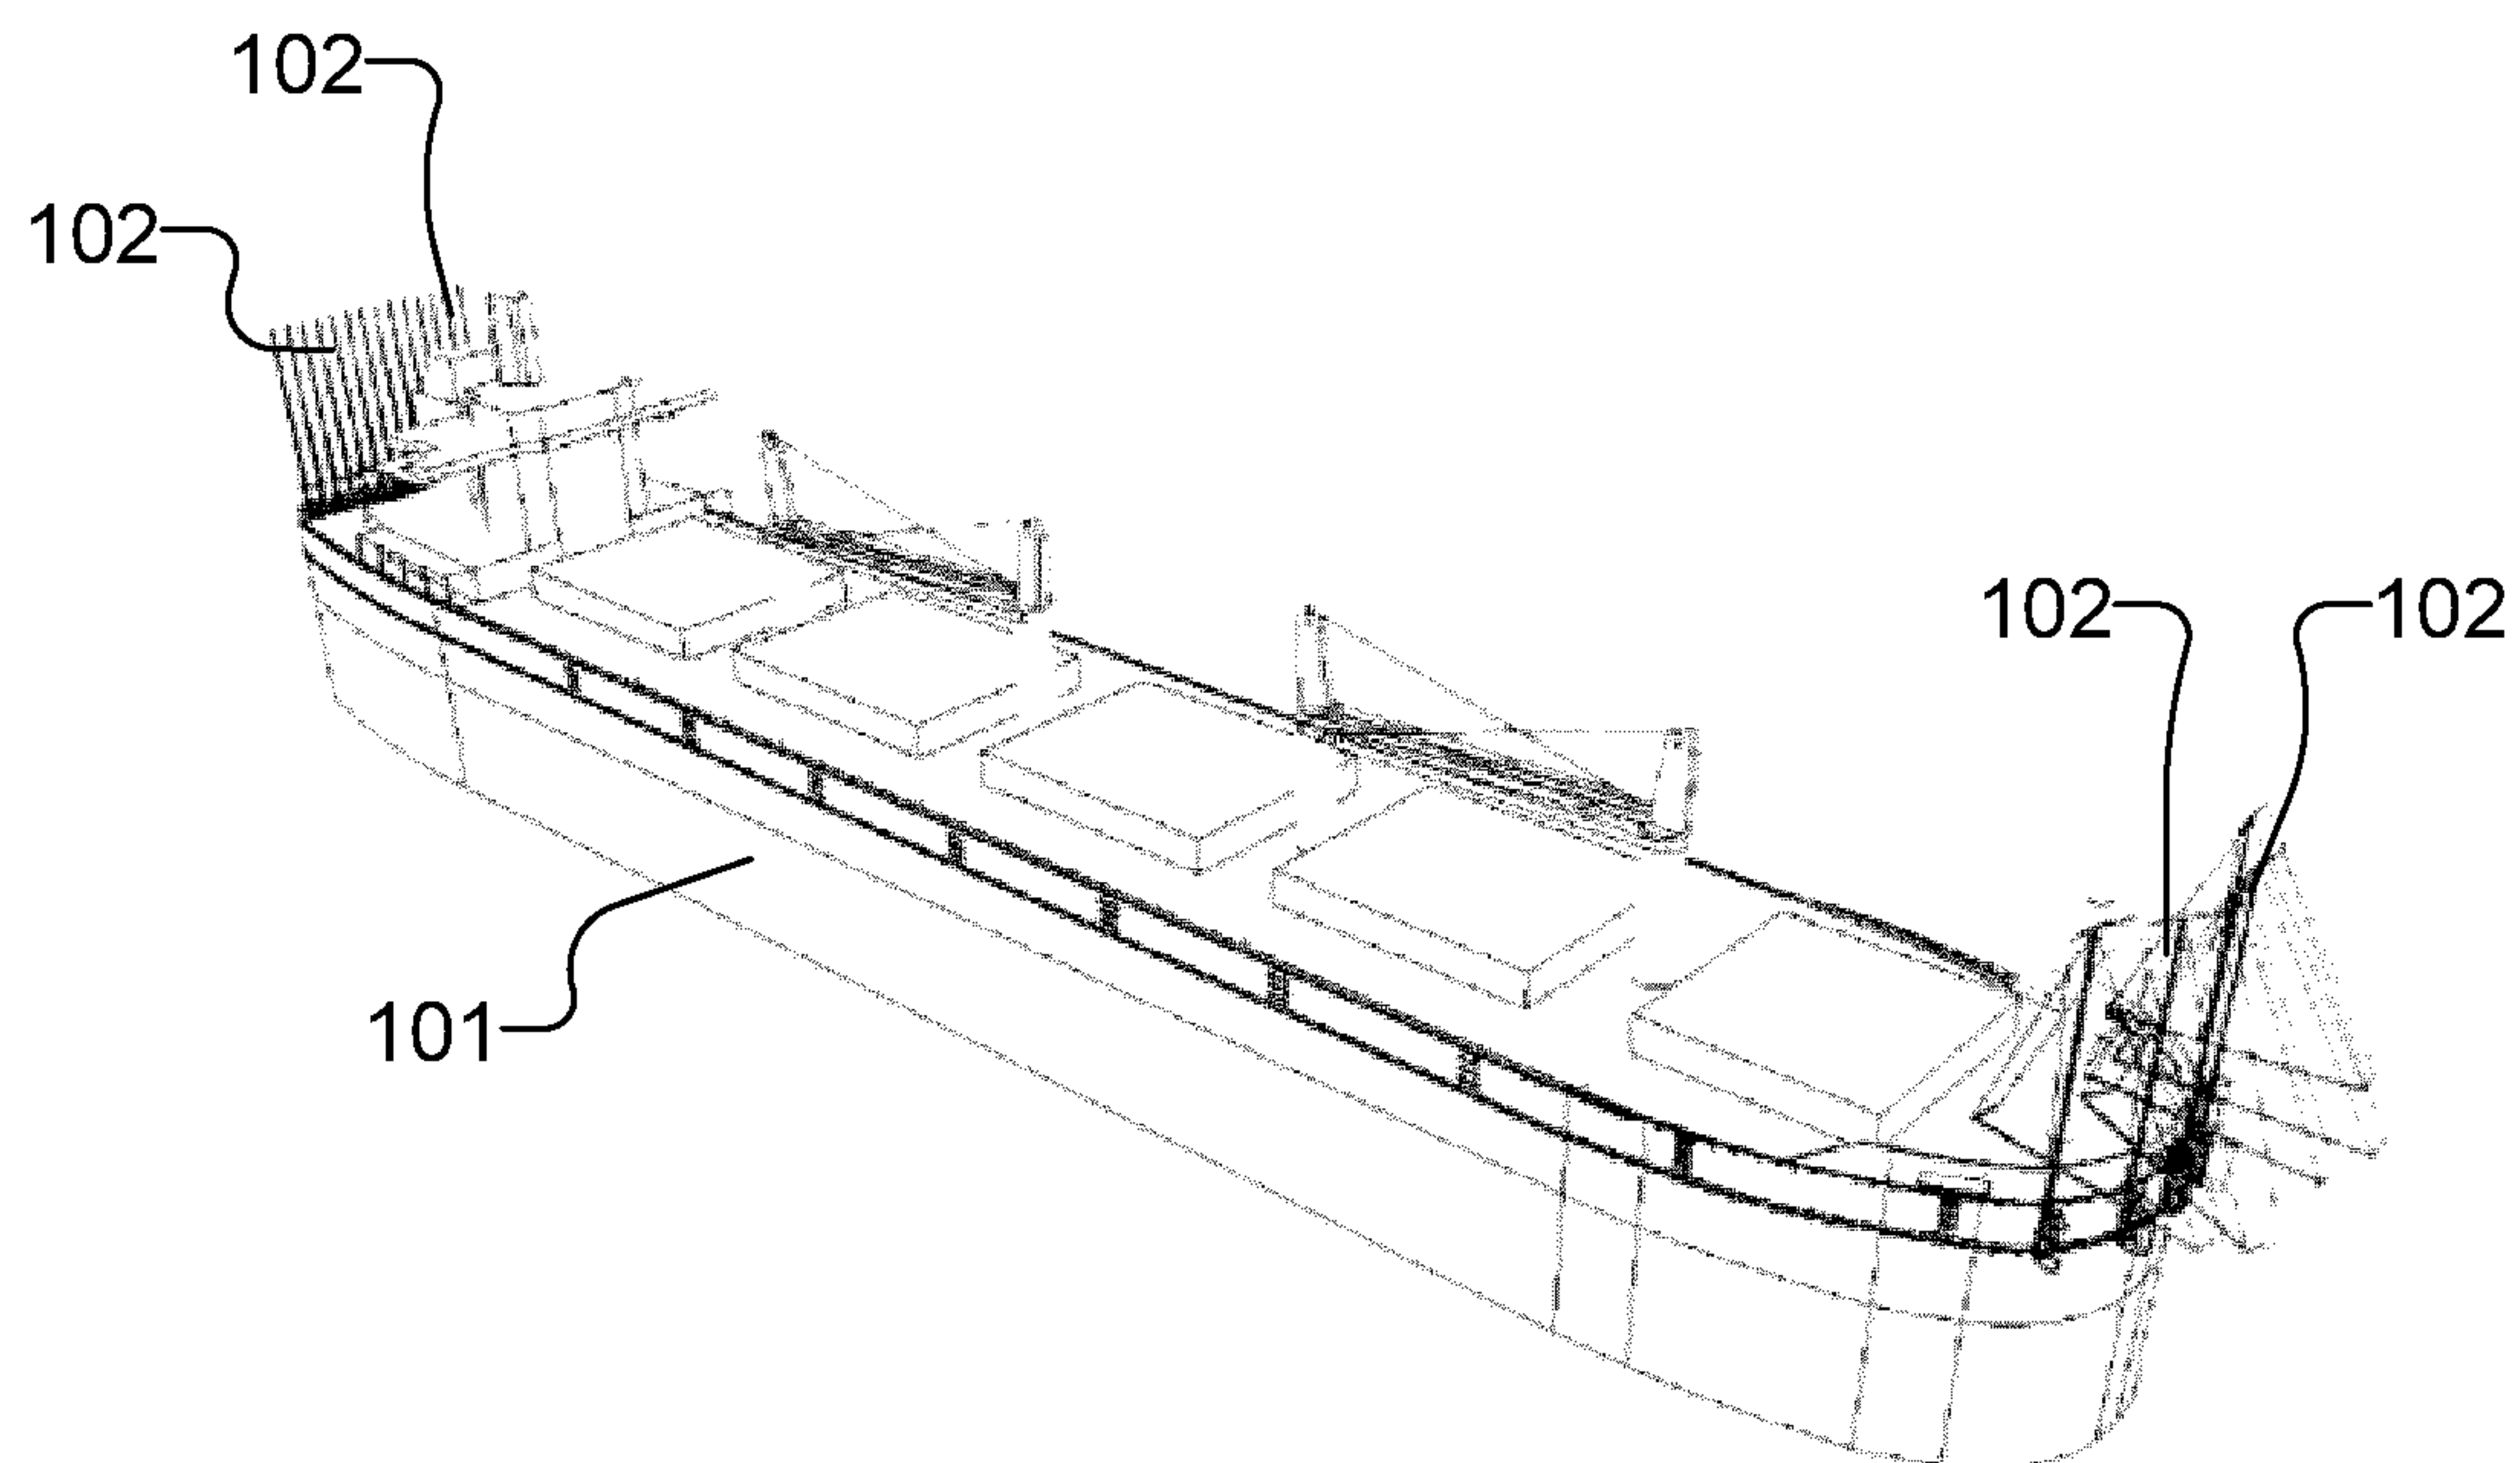


FIG. 55

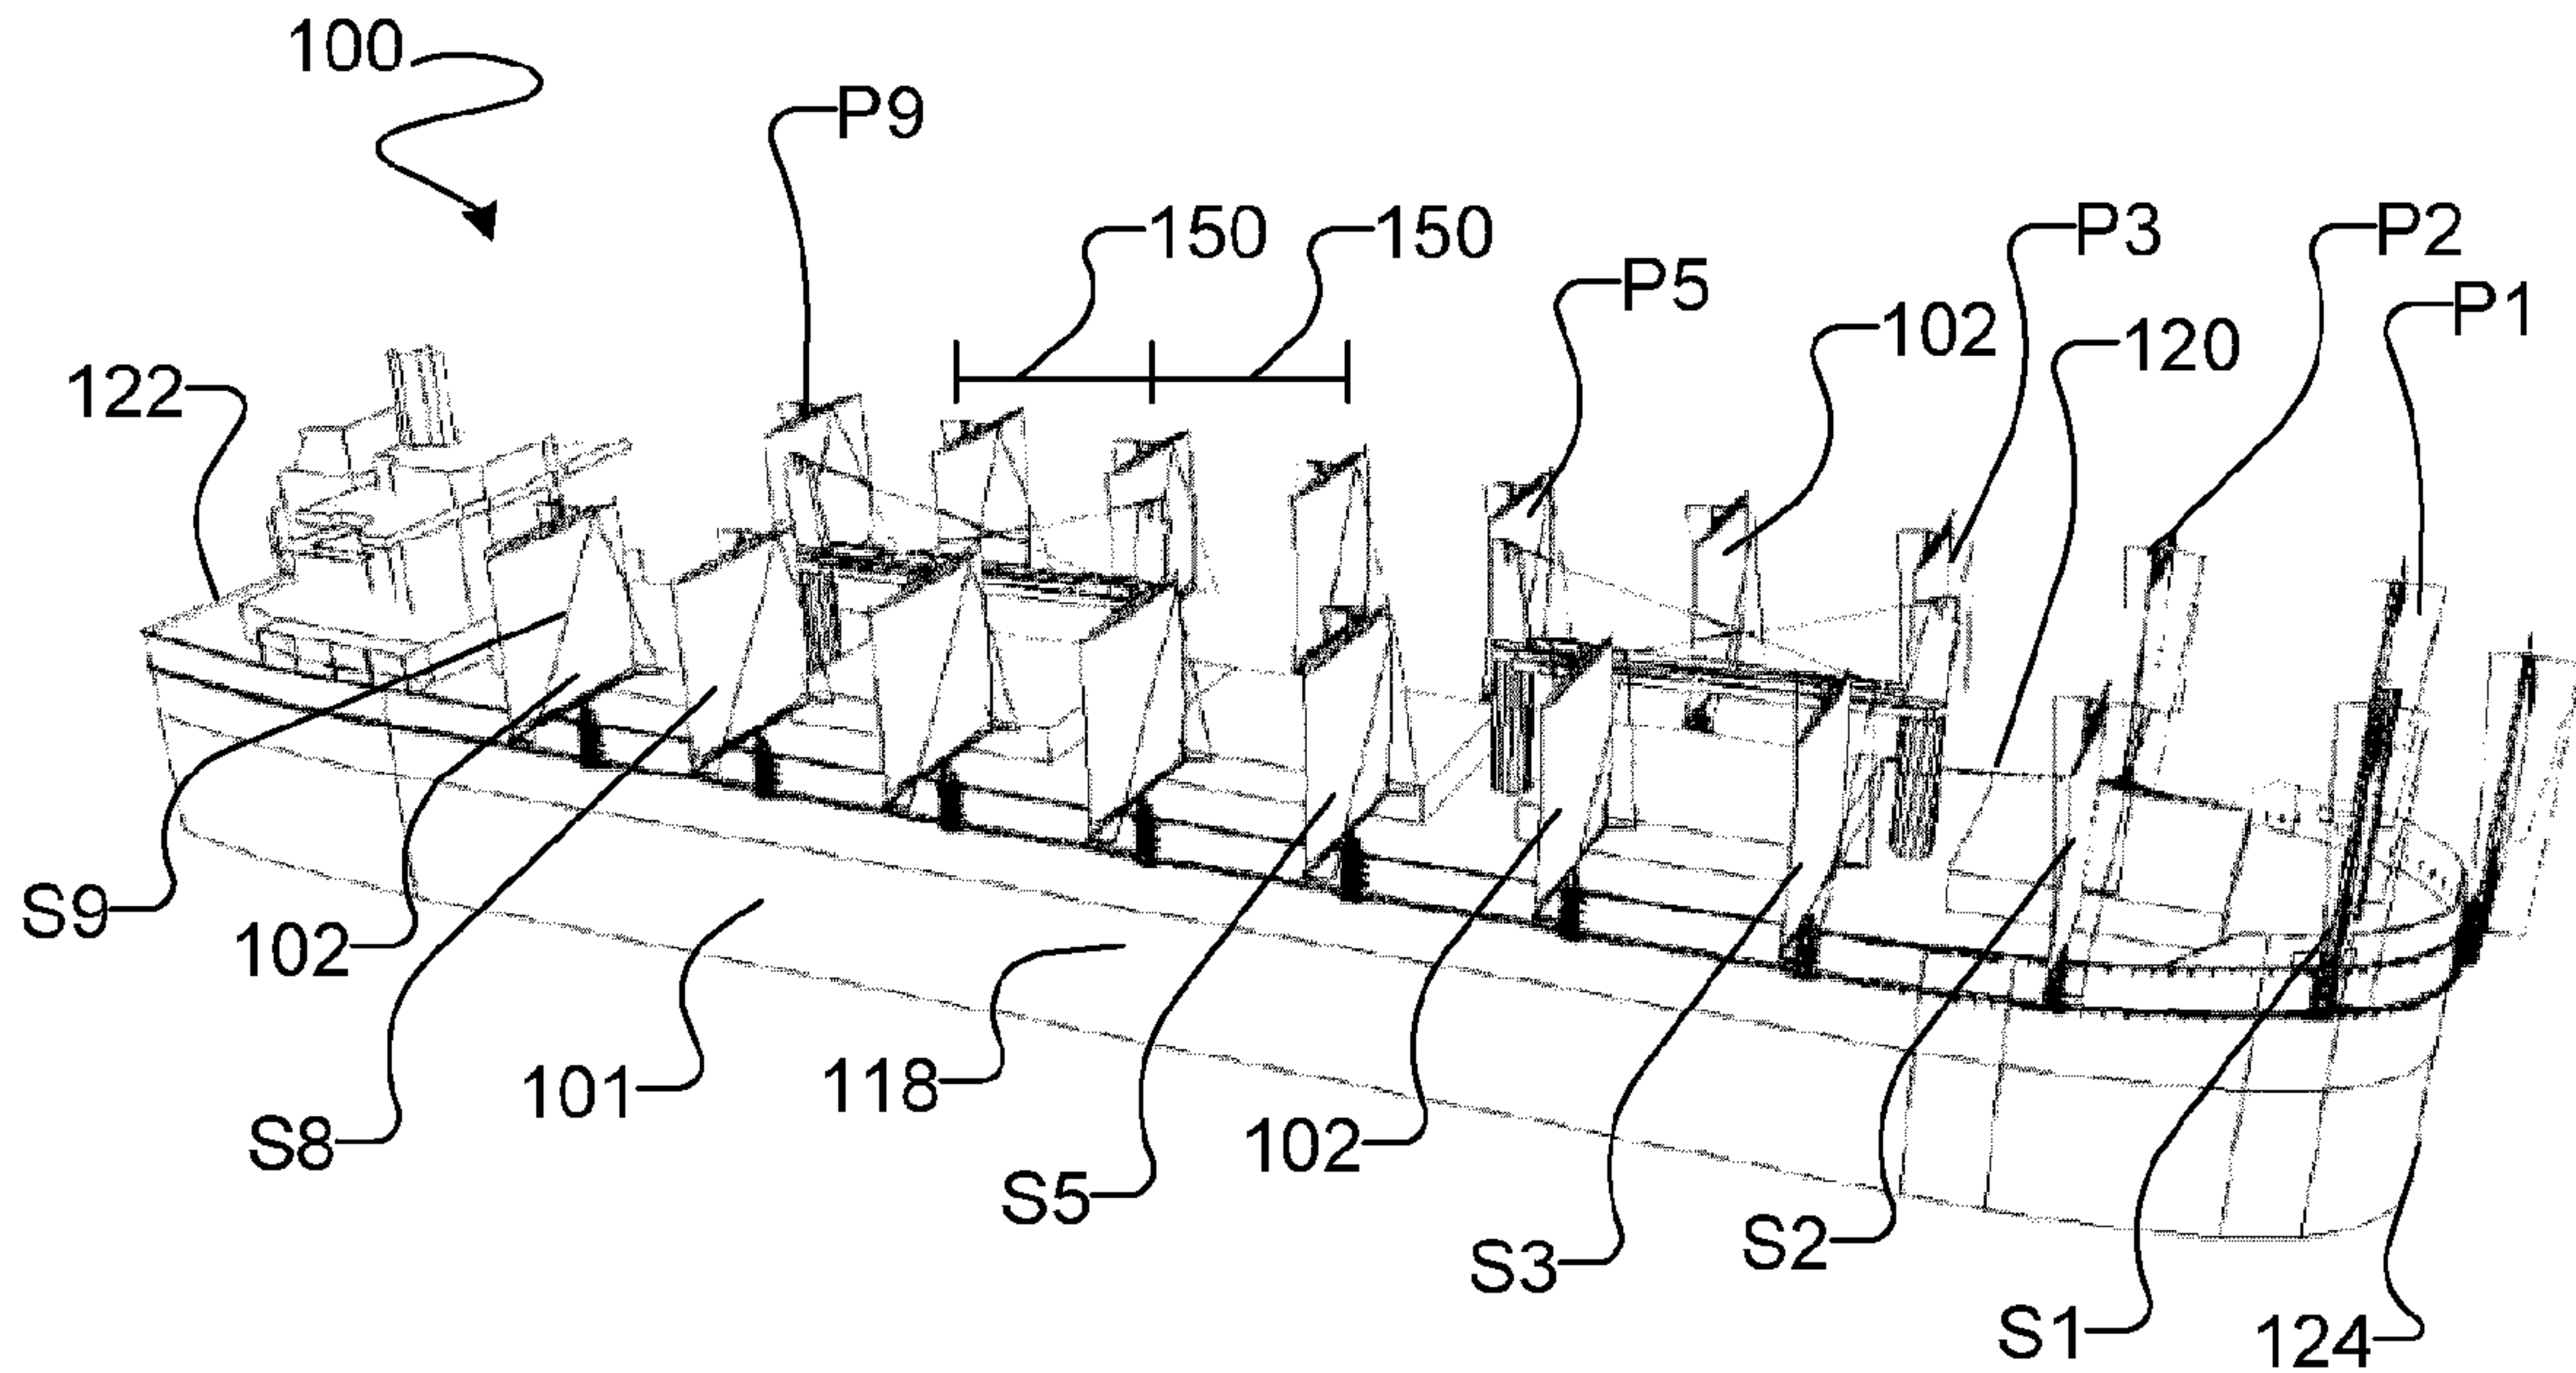


FIG. 3