



(51) International Patent Classification:
F16F 9/19 (2006.01)

(21) International Application Number:
PCT/CN2012/078182

(22) International Filing Date:
4 July 2012 (04.07.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/653,104 30 May 2012 (30.05.2012) US

(71) Applicant (for all designated States except US):
BEIJINGWEST INDUSTRIES CO., LTD. [CN/CN];
No. 1, Jiao Dao Dong Xi Da Jie, Doudian Town, Fangshan
District, Beijing 102402 (CN).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LUN, Saiman**
[US/US]; 10582 Willow Brook Dr., Centerville, Ohio
45458 (US).

(74) Agent: **KING & WOOD MALLESONS LAWYERS**;
20th Floor, East Tower, World Financial Center, No. 1
Dongsanhuan Zhonglu, Chaoyang District, Beijing 100020
(CN).


(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

[Continued on next page]

(54) Title: A SUSPENSION DAMPER ASSEMBLY

FIG. 1

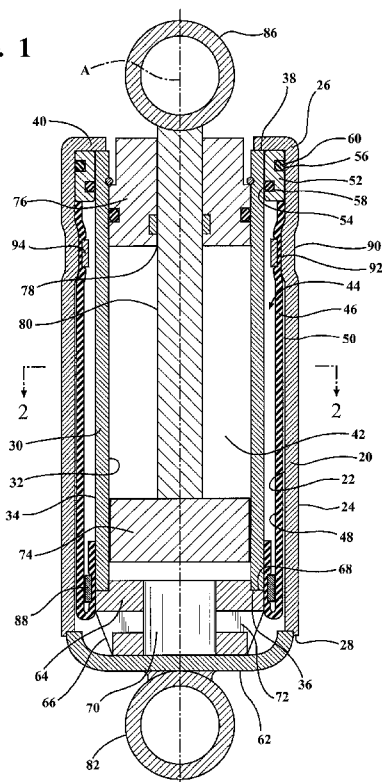

(57) Abstract: The present invention provides a damping device and a method for assembling the damping device. The damping device includes an outer tube and an inner tube disposed concentrically along a center axis defining a chamber, with a diaphragm located between the inner tube and outer tube dividing the chamber. A gas charge seal is secured over the chamber between the outer tube and inner tube. An inner clamp is in a sealing engagement with the inner tube and holds the diaphragm in place. A waist defines a sealing surface adjacent to outer tube. The diaphragm extends from under the inner clamp and through a "U" shaped turn back towards the waist. An upper clamp axially aligns with the waist and holds the diaphragm into the waist of the outer tube, sealing the diaphragm to the outer tube.



MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, **Published:**
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, — *with international search report (Art. 21(3))*
GW, ML, MR, NE, SN, TD, TG).

A SUSPENSION DAMPER ASSEMBLY

BACKGROUND OF THE INVENTION

Field of the Invention

5 [0001] The present invention relates generally to a suspension damper assembly for use in an automotive shock absorber and a method for assembling the suspension damper.

Description of the Prior Art

 [0002] A suspension damper of the type to which the subject invention pertains is illustrated in U.S. Pat. App. No. 2003/0019701 filed by Hodgson wherein an outer tube of
10 cylindrical shape defines an outer tube inner wall and an outer tube outer wall and the outer tube extends concentrically about a center axis between an open end and a closed end. An inner tube of cylindrical shape defines an inner tube inner wall and an inner tube outer wall, the inner tube being disposed concentrically about the center axis and within the outer tube along the center axis between a first end and a second end. An annular flange disposed on the open end of the
15 outer tube extends radially inwardly toward and perpendicular to the center axis to define an opening to the inner tube at the first end thereof.

 [0003] The application further discloses the inner tube inner wall being spaced radially from the center axis to define a hydraulic chamber of cylindrical shape, and the inner tube outer wall being spaced radially from the outer tube inner wall to define a diaphragm
20 chamber of cylindrical shape between the inner tube outer wall and the outer tube inner wall. A diaphragm of cylindrical shape is disposed concentrically between the inner tube outer wall and the outer tube inner wall along the center axis to divide the diaphragm chamber into a high pressure gas chamber disposed between the diaphragm and the inner tube outer wall and a fluid

chamber disposed between the diaphragm and the outer tube inner wall. A gas charge seal is disposed annularly in the high pressure gas chamber to engage the inner tube outer wall and the outer tube inner wall at the second end of the inner tube.

[0004] The application further discloses a cap engaging the closed end of the
5 outer tube to seal the closed end and an inner tube base of cylindrical shape defines an outer periphery disposed in the first end of the inner tube to engage the cap at the closed end of the outer tube. The inner tube base defines a central cavity of hollow cylindrical shape disposed concentrically in the inner tube base and open to the hydraulic chamber and closed by the cap. The inner tube base further defines a plurality of radially disposed channels extending
10 perpendicular to the center axis between the central cavity and the fluid chamber for establishing fluid communication between the hydraulic chamber and the fluid chamber.

[0005] The application further discloses a piston disposed in sliding and sealing engagement with the inner tube inner wall in the hydraulic chamber, a rod guide of cylindrical shape defining an axial bore is disposed in the open end and in sealing engagement with the
15 inner tube inner wall, and a piston rod extends along the center axis and through the bore in the rod guide and connects to the piston for movement therewith. The U.S. Patent No. 7,226,045 to Brookes discloses an inner clamp of annular shape holding the diaphragm radially inwardly into sealing engagement with the inner tube outer wall.

[0006] The U.S. Pat. No. 4,392,293 to Yamaguchi et al. discloses a method of
20 assembly of a diaphragm apparatus comprising the steps of disposing one end of the diaphragm over the first end of the inner tube, sealing the diaphragm to the inner tube outer wall adjacent the first end thereof to define an inner seal, rolling the diaphragm over the inner seal and towards

the second end of the inner tube, and finally inserting the inner tube and the diaphragm into the open end of the outer tube.

SUMMARY OF THE INVENTION AND ADVANTAGES

5 **[0007]** The subject invention provides such an assembly wherein the diaphragm extends from under the inner clamp and through a 'U' shaped turn back toward the open end along outer tube inner wall and an upper clamp of annular shape holds the diaphragm into the outer tube inner wall to seal the diaphragm to the outer tube inner wall. The invention also provides a method of assembling such a damper by sealing the diaphragm to the outer tube inner
10 wall adjacent to the second end of the inner tube.

[0008] The subject invention provides for a damper assembly having improved packaging and without any remote reservoir. Additionally, the high pressure gas chamber can be filled after the damper apparatus has been assembled.

15 BRIEF DESCRIPTION OF THE DRAWINGS

[0009] Other advantages of the present invention will be readily appreciated, as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings wherein:

[0010] FIG. 1 is a front elevational view showing the suspension damper
20 assembly of the subject invention;

[0011] FIG. 2 is a cross-sectional top view of the suspension damper assembly of the subject invention along line 2--2; and

[0012] FIG. 3 is a top cross-sectional view of the gas charge seal.

DETAILED DESCRIPTION OF THE ENABLING EMBODIMENTS

[0013] Referring to the Figures, wherein like numerals indicate corresponding

5 parts throughout the several views, a suspension damper assembly for an automotive shock absorber constructed in accordance with the subject invention is shown generally in FIGS. 1 and 2.

[0014] A suspension damper for an automotive shock absorber includes an outer tube 20 generally having a cylindrical shape defining an outer tube inner wall 22 and an outer tube outer wall 24. The outer tube 20 extends concentrically about a center axis A between an open end 26 and a closed end 28. An inner tube 30 generally having a cylindrical shape defining an inner tube inner wall 32 and an inner tube outer wall 34 is disposed concentrically inside the outer tube 20 along the center axis A between a first end 36 and a second end 38. The outer tube 20 has an annular flange 40 disposed on the open end 26, and the annular flange 40 extends
10 radially inwardly toward and perpendicular to the center axis A to define an opening to the inner tube 30 at the first end 36 thereof.

[0015] The inner tube inner wall 32 is spaced radially from the center axis A defining a hydraulic chamber 42 generally having a cylindrical shape. The inner tube outer wall 34 is spaced radially from the outer tube inner wall 22 defining a diaphragm chamber 44 of
20 cylindrical shape. A diaphragm 46 generally having a cylindrical shape is disposed concentrically between the inner tube outer wall 34 and the outer tube inner wall 22 along the center axis A inside the diaphragm chamber 44. The diaphragm 46 divides the diaphragm chamber 44 into two separate chambers, a high pressure gas chamber 48 disposed between the

diaphragm 46 and the inner tube outer wall 34 and a fluid chamber 50 disposed between the diaphragm 46 and the outer tube inner wall 22. Alternatively, instead of rubber, the diaphragm 46 could be made of any other gas impermeable elastomer.

[0016] A gas charge seal 52 generally having a 'S' shape is disposed annularly in
5 the high pressure gas chamber 48 and abuts the annular flange 40. In an embodiment, the gas charge seal is an o-ring or other seal ring. The gas charge seal 52 engages the inner tube outer wall 34 and the outer tube inner wall 22 at the second end 38 of the inner tube 30. The 'S' shape of the gas charge seal 52 defines an inward groove 54 opening annularly to the inner tube outer wall 34 as well as an outward groove 56 opening annularly to the outer tube inner wall 22. A
10 first annular seal 58 is disposed in the inward groove 54 in sealing engagement with the inner tube outer wall 34, and a second annular seal 60 is disposed in the outward groove 56 in sealing engagement with the inner tube outer wall 34.

[0017] A cap 62 engages the closed end 28 of the outer tube 20, sealing the closed end 28 of the outer tube 20. An inner tube base 64 of cylindrical shape defines an outer
15 periphery 66 being disposed in the first end 36 of the inner tube 30 and engages the cap 62 at the closed end 28 of the outer tube 20. The inner tube base 64 defines an annular shoulder 68 receiving and abutting the first end 36 of the inner tube 30 with the outer periphery 66 of the inner tube base 64 being concentric with the inner tube outer wall 34. The inner tube base 64 further defines a central cavity 70 of hollow cylindrical shape being disposed concentrically in
20 the inner tube base 64. The inner tube base 64 allows fluid communication between the hydraulic chamber 42 and the fluid chamber 50 by use of a plurality of radially disposed channels 72 extending perpendicular to the center axis A between the central cavity 70 and the

fluid chamber 50. The inner tube base 64 is closed and sealed by the cap 62. Alternatively, instead of using the cap 62, a base cup could be used.

[0018] A piston 74 is disposed in sliding and sealing engagement with the inner tube inner wall 32 within the hydraulic chamber 42, and a rod guide 76 of cylindrical shape defines an axial bore 78 being disposed in the open end 26. The rod guide 76 is in a sealing engagement with the inner tube inner wall 32, with a piston rod 80 connected to the piston 74 and extending along the center axis A and through the bore in the rod guide 76.

[0019] A lower mounting member 82 with a ring shape is disposed along the center axis A on the closed end 28 of the outer tube 20 and connected to the cap 62. The lower mounting member 82 receives a mounting device. An upper mounting member 86 with a ring shape is disposed along the center axis A on the piston rod 80 receiving a mounting device. In an embodiment, the upper mounting member 86 can be secured to the piston rod 80 by screwing or welding the upper mounting member 86 to the piston rod 80.

[0020] The diaphragm 46 is held in place radially inwardly by an inner clamp 88 of annular shape in a sealing engagement with the inner tube outer wall 34. The inner clamp 88 axially overlaps the first end 36 of the inner tube 30 and the tube base at the shoulder 68 of the inner tube base 64. A radially inwardly disposed waist 90 defines an annular projection of the outer tube 20 extending radially inwardly to define a sealing surface 92 adjacent to the open end 26 of the outer tube 20. The diaphragm 46 extends from under the inner clamp 88 and through a 'U' shaped turn back toward the open end 26 along outer tube inner wall 22 and over the waist 90. An upper clamp 94 of annular shape axially aligns with the waist 90 and holds the diaphragm 46 into the waist 90 of the outer tube inner wall 22, sealing the diaphragm 46 to the outer tube inner wall 22.

[0021] The subject invention also includes a method for assembling a suspension damper for an automotive shock absorber comprising a first step of pressing the inner tube 30 onto the inner tube base 64 containing the central cavity 70 about the first end 36 of the inner tube 30, fitting one end of the diaphragm 46 over the inner tube outer wall 34 about the first end 36 of the inner tube 30. The fabrication continues by sealing the diaphragm 46 to the inner tube outer wall 34 adjacent the first end 36 by use of an inner clamp 88 defining an inner seal placed on the shoulder 68 between the inner tube 30 and the inner tube base 64. This seals the high pressure gas chamber 48 about the first end 36 of the inner tube 30.

[0022] The diaphragm 46 is then pulled or rolled up the inner tube outer wall 34 over the inner clamp 88 and towards the second end 38 of the inner tube 30. The inner tube 30 the inner tube base 64 and the secured diaphragm 46 are inserted into the open end 26 of the outer tube 20. The closed end 28 of the outer tube 20 engages the cap 62, sealing the closed end 28 of the outer tube 20.

[0023] The upper clamp 94 is lowered into the diaphragm chamber 44 from the open end 26 of the outer tube 20 between the diaphragm 46 and the inner tube outer wall 34. The upper clamp 94 is fitted to the diaphragm 46, separating the high pressure gas chamber 48 from the fluid chamber 50 inside the diaphragm chamber 44. A crimp force is applied to the outer tube outer wall 24 compressing the outer tube 20 and diaphragm 46 against the upper clamp 94 sealing the high pressure chamber at the open end 26. The crimp force creates the waist 90 in the outer tube 20 about the open end 26.

[0024] The piston 74 and piston rod 80 are installed in the inner tube inner wall 32 and the hydraulic chamber 42 is filled with a hydraulic fluid. The rod guide 76 is installed over the piston rod 80 and encloses the hydraulic chamber 42. The high pressure gas chamber 48

is charged with a high pressure fluid then sealed by securing a gas charge seal 52 to the open end 26 of the diaphragm chamber 44. In an embodiment, the high pressure fluid is nitrogen. The diaphragm chamber 44 is then closed by rolling the annular flange 40 of the outer tube 20 inwardly to abut the inner tube 30 and the gas charge seal 52.

5 [0025] Obviously, many modifications and variations of the present invention are possible in light of the above teachings and may be practiced otherwise than as specifically described while within the scope of the appended claims. The use of the word "said" in the apparatus claims refers to an antecedent that is a positive recitation meant to be included in the coverage of the claims whereas the word "the" precedes a word not meant to be included in the
10 coverage of the claims.

ELEMENT LIST

Element Symbol	Element Name
A	center axis
20	outer tube
22	outer tube inner wall
24	outer tube outer wall
26	open end
28	closed end
30	inner tube
32	inner tube inner wall
34	inner tube outer wall
36	first end
38	second end
40	annular flange
42	hydraulic chamber
44	diaphragm chamber
46	diaphragm
48	high pressure gas chamber
50	fluid chamber
52	gas charge seal

54	inward groove
56	outward groove
58	first annular seal
60	second annular seal
62	cap
64	inner tube base
66	outer periphery
68	shoulder
70	central cavity
72	channels
74	piston
76	rod guide
78	axial bore
80	piston rod
82	lower mounting member
86	upper mounting member
88	inner clamp
90	waist
92	sealing surface
94	upper clamp

WHAT IS CLAIMED IS:

1. A suspension damper assembly for an automotive shock absorber comprising;

an outer tube of cylindrical shape having an outer tube inner wall and an outer tube outer wall and extending concentrically about a center axis between an open end and a closed end,

an inner tube of cylindrical shape having an inner tube inner wall and an inner tube outer wall and disposed concentrically about said center axis and disposed concentrically in said outer tube along said center axis between a first end and a second end,

an annular flange disposed on said open end of said outer tube extending radially inwardly toward and perpendicular to said center axis to define an opening to said inner tube at said first end thereof,

said inner tube inner wall being spaced radially from said center axis to define a hydraulic chamber of cylindrical shape,

said inner tube outer wall being spaced radially from said outer tube inner wall to define a diaphragm chamber of cylindrical shape between said inner tube outer wall and said outer tube inner wall,

a diaphragm of cylindrical shape disposed concentrically between said inner tube outer wall and said outer tube inner wall along said center axis for dividing said diaphragm chamber into a high pressure gas chamber disposed between said diaphragm and said inner tube outer wall and a fluid chamber disposed between said diaphragm and said outer tube inner wall,

a gas charge seal disposed annularly in said high pressure gas chamber engaging said inner tube outer wall and said outer tube inner wall at said second end of said inner tube,

a cap engaging said closed end of said outer tube for sealing said closed end,

an inner tube base of cylindrical shape defining an outer periphery disposed in said first end of said inner tube and engaging said cap at said closed end of said outer tube,

said inner tube base defining a central cavity of hollow cylindrical shape disposed concentrically in said inner tube base and open to said hydraulic chamber and closed by said cap
5 and defining a plurality of radially disposed channels extending perpendicular to said center axis between said central cavity and said fluid chamber for establishing fluid communication between said hydraulic chamber and said fluid chamber,

a piston disposed in sliding and sealing engagement with said inner tube inner wall in said hydraulic chamber,

10 a rod guide of cylindrical shape defining an axial bore and disposed in said open end and in sealing engagement with said inner tube inner wall,

a piston rod extending along said center axis and through said bore in said rod guide and connected to said piston for movement therewith,

an inner clamp of annular shape holding said diaphragm radially inwardly into
15 sealing engagement with said inner tube outer wall,

said diaphragm extending from under said inner clamp and through a 'U' shaped turn back toward said open end along outer tube inner wall,

an upper clamp of annular shape for holding said diaphragm into said outer tube inner wall for sealing said diaphragm to said outer tube inner wall.

20

2. An assembly as set forth in claim 1 further including a radially inwardly disposed waist defining an annular projection of said outer tube extending radially inwardly to define a

sealing surface adjacent to said open end of said outer tube and said upper clamp being axially aligned with said waist for holding said diaphragm into said waist.

3. An assembly as set forth in claim 1 further including an annular shoulder
5 receiving and abutting said first end of said inner tube with said outer periphery of said inner tube base being concentric with said inner tube outer wall.

4. A suspension damper assembly for an automotive shock absorber comprising;
an outer tube of cylindrical shape having an outer tube inner wall and an outer
10 tube outer wall and extending concentrically about a center axis between an open end and a closed end,

an inner tube of cylindrical shape having an inner tube inner wall and an inner tube outer wall and disposed concentrically about said center axis and disposed concentrically in said outer tube along said center axis between a first end and a second end,

15 an annular flange disposed on said open end of said outer tube extending radially inwardly toward and perpendicular to said center axis to define an opening to said inner tube at said first end thereof,

said inner tube inner wall being spaced radially from said center axis to define a hydraulic chamber of cylindrical shape,

20 said inner tube outer wall being spaced radially from said outer tube inner wall to define a diaphragm chamber of cylindrical shape between said inner tube outer wall and said outer tube inner wall,

a diaphragm of cylindrical shape disposed concentrically between said inner tube outer wall and said outer tube inner wall along said center axis for dividing said diaphragm chamber into a high pressure gas chamber disposed between said diaphragm and said inner tube outer wall and a fluid chamber disposed between said diaphragm and said outer tube inner wall,

5 a gas charge seal disposed annularly in said high pressure gas chamber and having an 'S' shape abutting said annular flange and engaging said inner tube outer wall and said outer tube inner wall at said second end of said inner tube,

said 'S' shape of said gas charge seal defining an inward groove opening annularly to said inner tube outer wall and an outward groove opening annularly to said outer
10 tube inner wall,

a first annular seal disposed in said inward groove in sealing engagement with said inner tube outer wall,

a second annular seal disposed in said outward groove in sealing engagement with said inner tube outer wall,

15 a cap engaging said closed end of said outer tube for sealing said closed end,

an inner tube base of cylindrical shape defining an outer periphery disposed in said first end of said inner tube and engaging said cap at said closed end of said outer tube and defining an annular shoulder receiving and abutting said first end of said inner tube with said outer periphery of said inner tube base being concentric with said inner tube outer wall,

20 said inner tube base defining a central cavity of hollow cylindrical shape disposed concentrically in said inner tube base and open to said hydraulic chamber and closed by said cap and defining a plurality of radially disposed channels extending perpendicular to said center axis

between said central cavity and said fluid chamber for establishing fluid communication between said hydraulic chamber and said fluid chamber,

a piston disposed in sliding and sealing engagement with said inner tube inner wall in said hydraulic chamber,

5 a rod guide of cylindrical shape defining an axial bore and disposed in said open end and in sealing engagement with said inner tube inner wall,

a piston rod extending along said center axis and through said bore in said rod guide and connected to said piston for movement therewith,

10 a lower mounting member having a ring shape disposed along center axis on said closed end connected to said cap for receiving a mounting device,

an upper mounting member having a ring shape disposed along center axis on said piston rod for receiving a mounting device,

an inner clamp of annular shape holding said diaphragm radially inwardly into sealing engagement with said inner tube outer wall,

15 said inner clamp axially overlapping said first end of said inner tube and said tube base at said shoulder,

a radially inwardly disposed waist defining an annular projection of said outer tube extending radially inwardly to define a sealing surface adjacent to said open end of said outer tube,

20 said diaphragm extending from under said inner clamp and through a 'U' shaped turn back toward said open end along outer tube inner wall and over said waist,

an upper clamp of annular shape axially aligned with said waist for holding said diaphragm into said waist of said outer tube inner wall for sealing said diaphragm to said outer tube inner wall.

5 5. A method for assembling a suspension damper utilizing an inner tube, an outer tube, a diaphragm chamber disposed between the inner tube and the outer tube, a diaphragm disposed in the diaphragm chamber separating the diaphragm chamber into a high pressure gas chamber and a fluid chamber, said method comprising the steps of;

 disposing one end of the diaphragm over a first end of the inner tube,
10 sealing the diaphragm to the exterior of the inner tube adjacent the first end thereof to define an inner seal,

 rolling the diaphragm over the inner seal and towards a second end of the inner tube,

 inserting the inner tube and the diaphragm into the open end of the outer tube,
15 sealing the diaphragm to the interior of the outer tube adjacent to the second end of the inner tube.

 6. A method as set forth in claim 5 including applying a crimp force to the outer tube outer wall compressing the outer tube and the diaphragm against the upper clamp sealing the
20 high pressure gas chamber about the open end and creating a waist in the outer tube outer wall.

7. A method as set forth in claim 5 including sealing the diaphragm to the inner tube outer wall adjacent the first end thereof to define an inner seal placed on the shoulder between the inner tube and the inner tube base sealing the high pressure gas chamber about the closed end.

5 8. A method for assembling a suspension damper for an automotive shock absorber utilizing an inner tube defining a hydraulic chamber and an inner tube inner wall and an inner tube outer wall, an outer tube defining an outer tube inner wall and an outer tube outer wall, the inner tube having a first end and a second end and the outer tube having an open end and a closed end, the outer tube having an annular flange, a diaphragm chamber disposed between the
10 inner tube outer wall and the outer tube inner wall, a diaphragm disposed in the diaphragm chamber and separating the diaphragm chamber into a high pressure gas chamber and a fluid chamber, an inner tube base containing a central cavity and a shoulder, a waist in the outer tube outer wall, a gas charge seal and a rod guide, a piston and a piston rod disposed in the hydraulic chamber, a cap and a lower mounting bracket and an upper mounting bracket, and an inner
15 clamp and an upper clamp, said method comprising the steps of;

pressing the inner tube onto the inner tube base containing the central cavity about the first end of the inner tube,

disposing one end of the diaphragm over the first end of the inner tube outer wall about the first end of the inner tube,

20 sealing the diaphragm to the inner tube outer wall adjacent the first end thereof to define an inner seal placed on the shoulder between the inner tube and the inner tube base sealing the high pressure gas chamber about the closed end,

rolling the diaphragm over the inner seal and towards the second end of the inner tube,

inserting the inner tube and the inner tube base and the diaphragm into the open end of the outer tube,

5 installing the cap and the lower mounting bracket to the closed end of the outer tube over the inner tube base sealing the closed end of the outer tube,

lowering the upper clamp into the diaphragm chamber from the open end of the outer tube between the diaphragm and the inner tube outer wall,

10 fitting the upper clamp to the diaphragm separating the high pressure gas chamber from the fluid chamber inside the diaphragm chamber,

applying a crimp force to the outer tube outer wall compressing the outer tube and the diaphragm against the upper clamp sealing the high pressure gas chamber about the open end and creating a waist in the outer tube outer wall,

15 installing the piston and the piston rod in the inner tube inner wall,

filling the hydraulic chamber with a hydraulic fluid,

charging the high pressure gas chamber with a compressed fluid,

sealing the high pressure gas chamber by disposing the gas charge seal in the diaphragm chamber,

20 closing the diaphragm chamber by rolling the annular flange of the outer tube inwardly to abut the inner tube and the gas charge seal,

installing the upper mounting bracket to the piston rod on the open end, and

filling the high pressure gas chamber with a compressed fluid.

FIG. 1

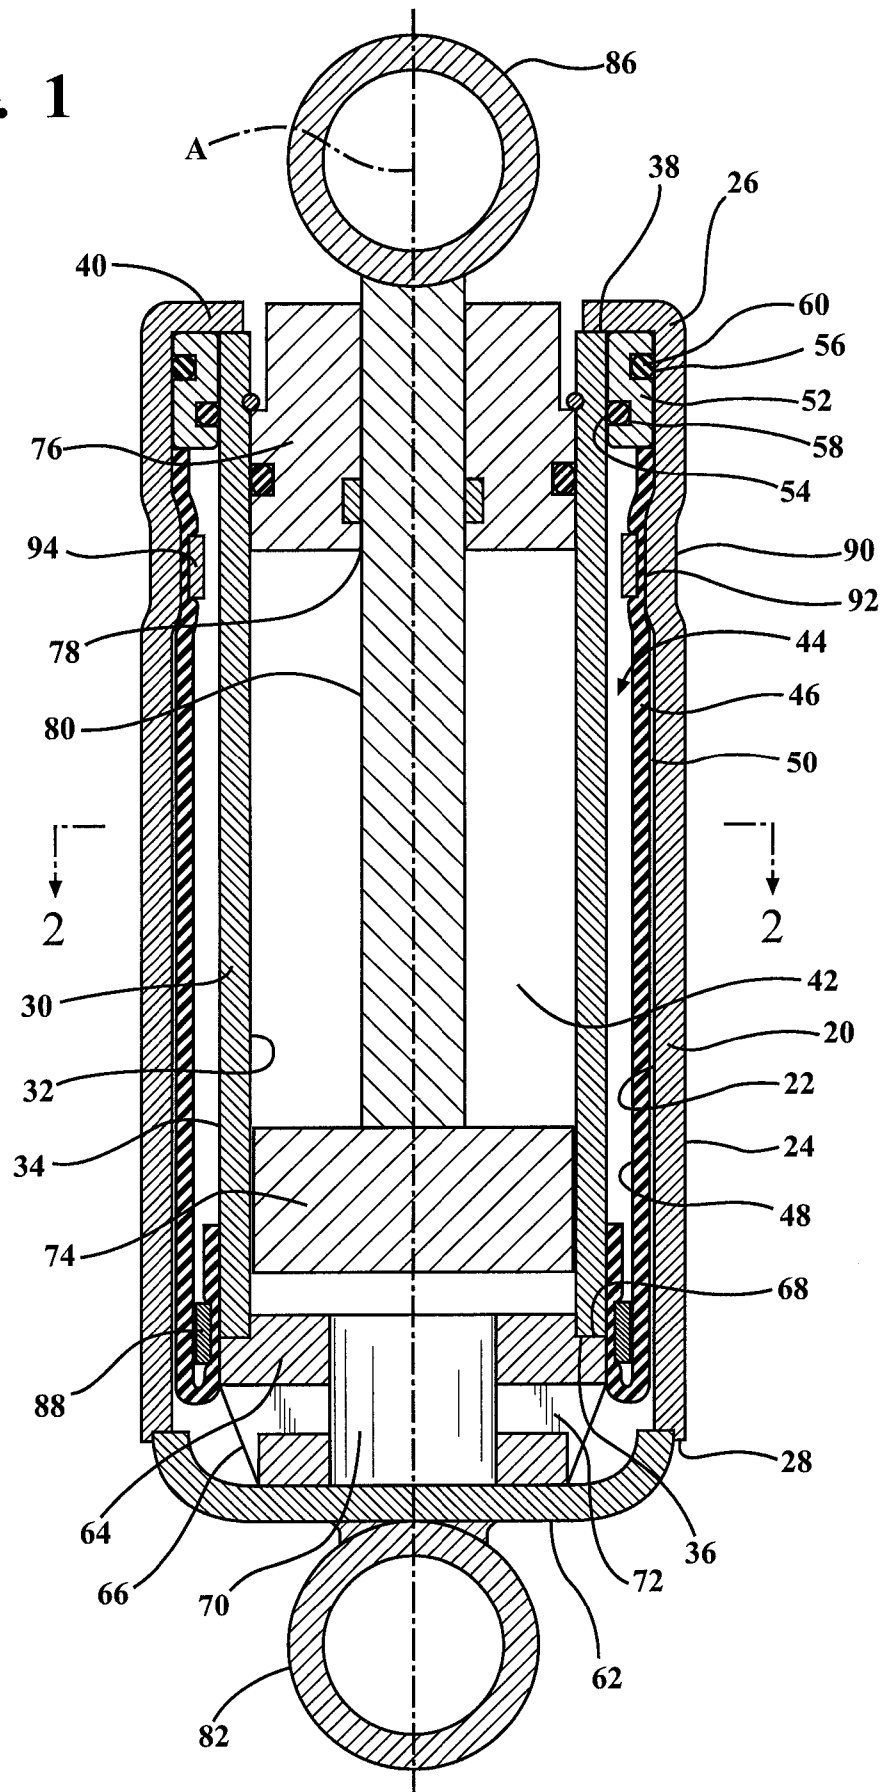
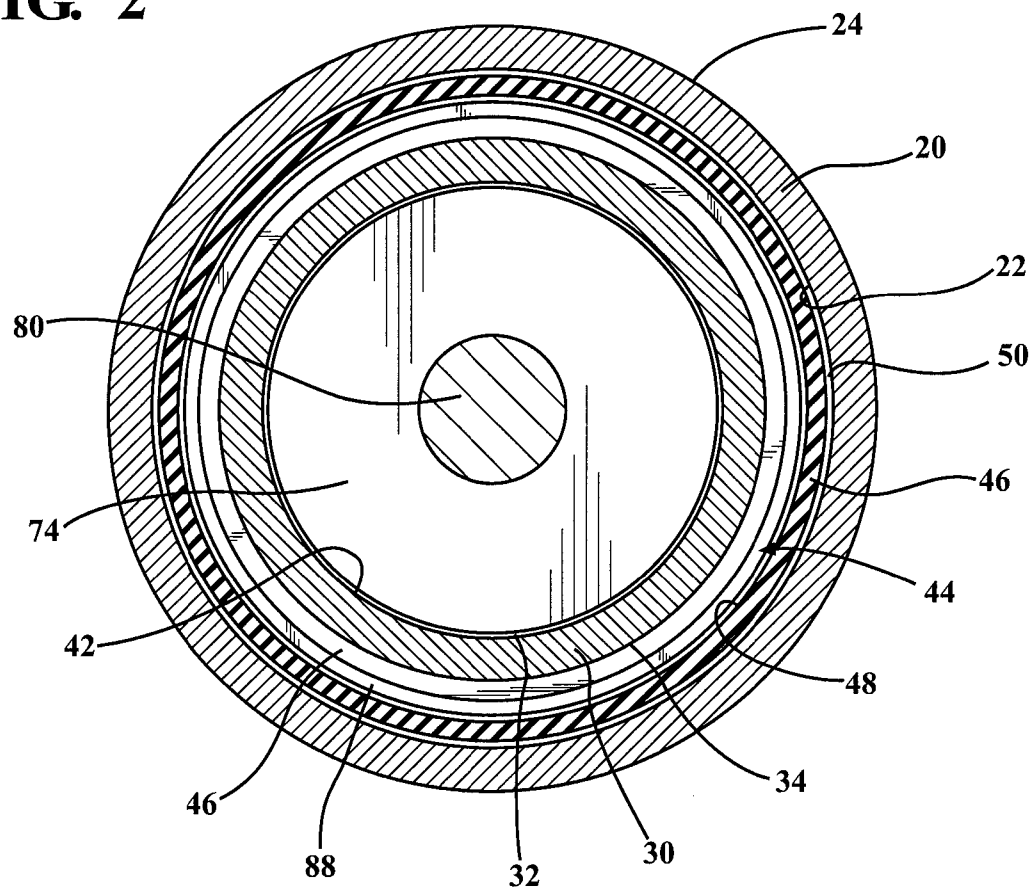
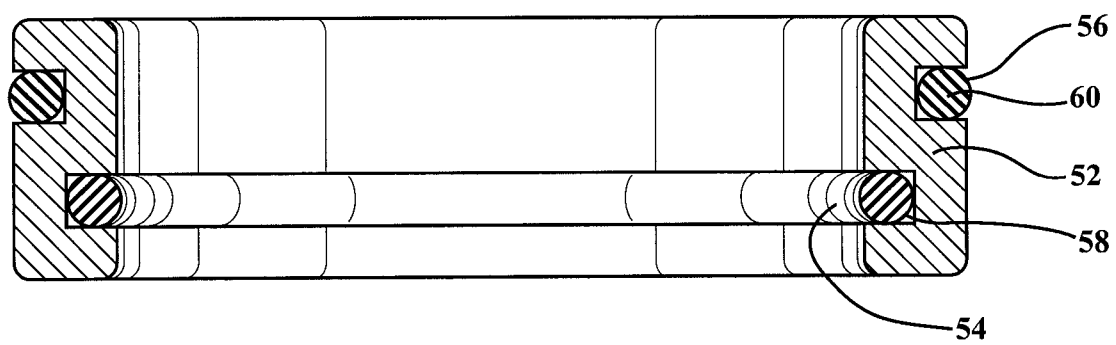


FIG. 2**FIG. 3**

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2012/078182

A. CLASSIFICATION OF SUBJECT MATTER

F16F 9/19 (2006.01) i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: F16F 9/19; F16F 9/18; F16F 9/16; F16F 9/14; F16F 9/10; F16F 9/00; B60G 17/08; B60G 17/06; B60G 17/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

VEN, CNABS, CNKI: damp, shock, absorb, tube, pipe, cylinder, chamber, diaphragm, piston, seal, gas, hydraulic, oil, fluid, liquid

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US2008185244A1 (HITACHI LTD) 07 Aug. 2008 (07.08.2008) see the whole document	1-8
A	US3371751A (ARMSTRONG PATENTS CO LTD) 05 Mar. 1968 (05.03.1968) see the whole document	1-8
A	DE20115980U1 (PATEC FAHRWERKTECHNIK GMBH) 06 Dec. 2001 (06.12.2001) see the whole document	1-8
A	JP2011027255A (SHOWA CORP) 10 Feb. 2011 (10.02.2011) see the whole document	1-8
A	CN102155513A (BWI CO LTD SA) 17 Aug. 2011 (17.08.2011) see the whole document	1-8

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:	“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
“A” document defining the general state of the art which is not considered to be of particular relevance	“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
“E” earlier application or patent but published on or after the international filing date	“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
“L” document which may throw doubts on priority claim (S) or which is cited to establish the publication date of another citation or other special reason (as specified)	“&” document member of the same patent family
“O” document referring to an oral disclosure, use, exhibition or other means	
“P” document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
19 Feb. 2013 (19.02.2013)

Date of mailing of the international search report
07 Mar. 2013 (07.03.2013)

Name and mailing address of the ISA/CN
The State Intellectual Property Office, the P.R.China
6 Xitucheng Rd., Jimen Bridge, Haidian District, Beijing, China
100088
Facsimile No. 86-10-62019451

Authorized officer
SUN, Li
Telephone No. (86-10)62085456

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CN2012/078182

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
US2008185244A1	07.08.2008	JP2008190691A	21.08.2008
		CN101240830A	13.08.2008
		KR20080074015A	12.08.2008
US3371751A	05.03.1968	ES318670A1	16.05.1966
		FR1450262A	06.05.1966
		GB1084575A	27.09.1967
DE20115980U1	06.12.2001	None	
JP2011027255A	10.02.2011	US2010326780A1	30.12.2010
		JP2011012806A	20.01.2011
		CN101936361A	05.01.2011
CN102155513A	17.08.2011	EP2360389A2	24.08.2011
		US2011198787A1	18.08.2011
		US8240642B2	14.08.2012