

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 October 2010 (28.10.2010)

PCT

(10) International Publication Number
WO 2010/123598 A1

(51) International Patent Classification:
C10L 3/10 (2006.01) **B01D 3/32** (2006.01)

(21) International Application Number:
PCT/US2010/021785

(22) International Filing Date:
22 January 2010 (22.01.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/170,919 20 April 2009 (20.04.2009) US

(71) Applicant (for all designated States except US): **Exxon-Mobil Upstream Research Company** [US/US]; CORP-URC-SW-359, P.O. Box 2189, Houston, TX 77252-2189 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **NORTHROP, Paul, Scott** [US/US]; 134 W. Stockbridge Landing, Spring, TX 77382 (US). **KELLEY, Bruce, T.** [US/US];

5619 Rocky Brook, Kingwood, TX 77345 (US). **MART, Charles, J.** [US/US]; 1633 Lichester Drive, Baton Rouge, LA 70810 (US).

(74) Agents: **MARSH, Timothy, J.** et al.; ExxonMobil Upstream Research Company, CORP-URC-SW-359, P.O. Box 2189, Houston, TX 77252-2189 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PI, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: CRYOGENIC SYSTEM FOR REMOVING ACID GASES FROM A HYDROCARBON GAS STREAM, AND METHOD OF REMOVING ACID GASES

(57) Abstract: A system for removing acid gases from a raw gas stream the system includes a cryogenic distillation tower. The tower receives and separates the raw gas stream into an overhead methane stream and a bottom liquefied acid gas stream. Refrigeration equipment downstream of the cryogenic distillation tower cools the overhead methane stream and returns a portion of the overhead methane stream to the cryogenic distillation tower as liquid reflux. The system also may include a first molecular sieve bed upstream of the distillation tower and a second molecular sieve bed downstream of the distillation tower. The first molecular sieve bed adsorbs water while the second molecular sieve bed adsorbs additional acid gases from the cooled overhead methane stream.

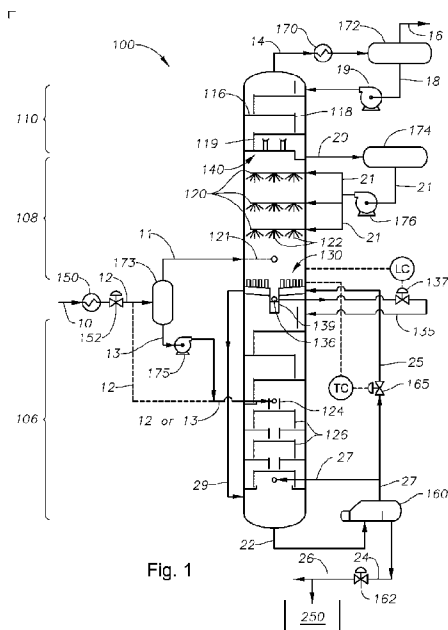


Fig. 1



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

— *with international search report (Art. 21(3))*

Declarations under Rule 4.17:

- 1 -

**CRYOGENIC SYSTEM FOR REMOVING ACID GASES FROM A
HYDROCARBON GAS STREAM, AND METHOD OF REMOVING ACID GASES**

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U. S. Provisional Application No. 61/170,919
5 filed April 20, 2009.

BACKGROUND OF THE INVENTION

[0002] This section is intended to introduce various aspects of the art, which may be associated with exemplary embodiments of the present disclosure. This discussion is believed to assist in providing a framework to facilitate a better understanding of particular
10 aspects of the present disclosure. Accordingly, it should be understood that this section should be read in this light, and not necessarily as admissions of prior art.

Field of the Invention

[0003] The present invention relates to the field of fluid separation. More specifically, the present invention relates to the separation of carbon dioxide and other acid gases from a
15 hydrocarbon fluid stream.

Discussion of Technology

[0004] The production of hydrocarbons from a reservoir oftentimes carries with it the incidental production of non-hydrocarbon gases. Such gases include contaminants such as hydrogen sulfide (H₂S) and carbon dioxide (CO₂). When H₂S and CO₂ are produced as part
20 of a hydrocarbon gas stream (such as methane or ethane), the gas stream is sometimes referred to as "sour gas."

[0005] Sour gas is usually treated to remove CO₂, H₂S, and other contaminants before it is sent downstream for further processing or sale. The separation process creates an issue as to the disposal of the separated contaminants. In some cases, the concentrated acid gas
25 (consisting primarily of H₂S and CO₂) is sent to a sulfur recovery unit ("SRU"). The SRU converts the H₂S into benign elemental sulfur. However, in some areas (such as the Caspian Sea region), additional elemental sulfur production is undesirable because there is a limited market. Consequently, millions of tons of sulfur have been stored in large, above-ground blocks in some areas of the world, most notably Canada and Kazakhstan.

30 [0006] While the sulfur is stored on land, the carbon dioxide gas is oftentimes vented to the atmosphere. However, the practice of venting CO₂ is sometimes undesirable. One proposal to minimizing CO₂ emissions is a process called acid gas injection ("AGI"). AGI means that unwanted sour gases are re-injected into a subterranean formation under pressure

- 2 -

and sequestered for potential later use. Alternatively, the sour gases are used to create artificial reservoir pressure for enhanced oil recovery operations.

[0007] For AGI, it is necessary to have a gas processing facility that separates out the acid gas components from the hydrocarbon gases. However, for "highly sour" streams, that is, production streams containing greater than about 15% CO₂ and H₂S, it can be particularly challenging to design, construct, and operate a facility that can economically separate contaminants from the desired hydrocarbons. Many natural gas reservoirs contain relatively low percentages of hydrocarbons (less than 40%, for example) and high percentages of acid gases, principally carbon dioxide, but also hydrogen sulfide, carbonyl sulfide, carbon disulfide and various mercaptans. In these instances, cryogenic gas processing may be beneficially employed.

[0008] Cryogenic gas processing is a distillation process sometimes used for gas separation. Cryogenic gas separation generates a cooled and liquefied gas stream at moderate pressures (e.g., 350-600 pounds per square inch gauge (psig)). In the case of cryogenic distillation of sour gas, liquefied acid gas is generated as a "bottoms" product. Since liquefied acid gas has a relatively high density, hydrostatic head can be beneficially used in an AGI well to assist in the injection process. This means that the energy required to pump the liquefied acid gas into the formation is lower than the energy required to compress low-pressure acid gases to reservoir pressure. Thus, cryogenic gas processing is particularly suitable for AGI.

[0009] Challenges also exist with respect to cryogenic distillation of sour gases. When CO₂ is present at concentrations greater than about 5 mol. percent in the gas to be processed, it will freeze out as a solid in a standard cryogenic distillation unit. The formation of CO₂ as a solid disrupts the cryogenic distillation process. To circumvent this problem, the assignee has previously designed various "Controlled Freeze ZoneTM" (CFZTM) processes. The CFZTM process takes advantage of the propensity of carbon dioxide to form solid particles by allowing frozen CO₂ particles to form within an open portion of the distillation tower, and then capturing the particles on a melt tray. As a result, a clean methane stream (along with any nitrogen or helium present in the raw gas) is generated at the top of the tower, while a liquid CO₂/H₂S stream is generated at the bottom of the tower.

[0010] Certain aspects of the CFZTM process and associated equipment are described in U.S. Pat. No. 4,533,372; U.S. Pat. No. 4,923,493; U.S. Pat. No. 5,062,270; U.S. Pat. No. 5,120,338; and U.S. Pat. No. 6,053,007.

- 3 -

[0011] As generally described in the above U.S. patents, the distillation tower, or column, used for cryogenic gas processing includes a lower distillation zone and an intermediate controlled freezing zone. Preferably, an upper rectification zone is also included. The column operates to create solid CO₂ particles by providing a portion of the column having a temperature range below the freezing point of carbon dioxide, but above the boiling temperature of methane at that pressure. More preferably, the controlled freezing zone is operated at a temperature and pressure that permits methane and other light hydrocarbon gases to vaporize, while causing CO₂ to form frozen (solid) particles.

[0012] As the gas feed stream moves up the column, frozen CO₂ particles break out of the feed stream and gravitationally descend from the controlled freezing zone onto a melt tray. There, the particles liquefy. A carbon dioxide-rich liquid stream then flows from the melt tray down to the lower distillation zone at the bottom of the column. The lower distillation zone is maintained at a temperature and pressure at which substantially no carbon dioxide solids are formed, but dissolved methane boils out. In one aspect, a bottom acid gas stream is created at 30° to 40° F.

[0013] The controlled freeze zone includes a cold liquid spray. This is a methane-enriched liquid stream known as "reflux." As the vapor stream of light hydrocarbon gases and entrained sour gases moves upward through the column, the vapor stream encounters the liquid spray. The cold liquid spray aids in breaking out solid CO₂ particles while permitting methane gas to evaporate and flow upward in the column.

[0014] In the upper rectification zone, the methane (or overhead gas) is captured and piped away for sale or made available for fuel. In one aspect, the overhead methane stream is released at about -130° F. The overhead gas may be partially liquefied by additional cooling, and the liquid returned to the column as "reflux." The reflux liquid is injected as the cold spray into the spray section of the controlled freezing zone.

[0015] The methane produced in the upper distillation zone meets most specifications for pipeline delivery. For example, the methane can meet a pipeline CO₂ specification of less than 2 mol. percent, as well as a 4 ppm H₂S specification, if sufficient reflux is generated. However, more stringent CO₂ specifications for natural gas exist for applications such as helium recovery, cryogenic natural gas liquids recovery, conversion to liquid natural gas (LNG), and nitrogen rejection.

[0016] The more stringent CO₂ specifications may be met by increasing the quantity of liquid methane reflux. This, in turn, requires more and/or larger refrigeration equipment. In

- 4 -

this respect, the process of generating cold liquid methane for the spray section requires equipment ancillary to the CFZ tower. This equipment includes pipes, nozzles, compressors, separators, pumps, and expansion valves. The more vigorously the operator wishes to remove CO₂, the greater the refrigeration requirements become.

- 5 [0017] There is a need to reduce the refrigeration requirements of the CFZ process while still reducing the CO₂ content down to very low levels. There is also a need for a cryogenic gas separation system and accompanying processes that are augmented by other CO₂ removal techniques. Further, there is a need for a cryogenic gas separation process that is able to reduce the CO₂ and H₂S content of the gas down to levels acceptable for downstream
10 liquefaction processes without increasing refrigeration equipment capacity.

SUMMARY OF THE INVENTION

- [0018] A system for removing acid gases from a raw gas stream is provided. In one embodiment, the system includes a cryogenic distillation tower. The distillation tower may have a lower distillation zone and an intermediate controlled freezing zone. The intermediate
15 controlled freezing zone, or spray section, receives a cold liquid spray comprised primarily of methane. The cold spray is a liquid reflux generated from an overhead loop downstream of the distillation tower.

- [0019] The distillation tower operates to remove acid gases. In this respect, the distillation tower receives and then separates the raw gas stream into an overhead methane stream and a
20 bottom acid gas stream. The system also includes refrigeration equipment. Some of the refrigeration equipment may be used to pre-chill the feed gas, while the remainder of the refrigeration equipment resides downstream of the cryogenic distillation tower for cooling the overhead methane stream. A portion of the overhead methane stream is returned to the cryogenic distillation tower as the liquid reflux.

- 25 [0020] The distillation tower also includes a solid adsorbent bed downstream of the cryogenic distillation tower. The solid adsorbent bed operates to adsorb at least some remaining acid gases from the cooled overhead methane stream.

- [0021] In the present system, the refrigeration equipment is designed to generate liquid reflux in a sufficient quantity to remove acid gases from the raw gas stream within the
30 cryogenic distillation tower down to a first selected composition. This means that some percentage or amount of acid gas composition is intentionally released within the overhead methane stream. The overhead methane stream is delivered to the solid adsorbent bed downstream of the cryogenic distillation tower to remove remaining acid gases down to a

- 5 -

second lower composition. Thus, the solid adsorbent bed downstream of the cryogenic distillation tower provides post-polishing of the methane stream. It further allows a reduction in refrigeration equipment or capacity that might otherwise need to be devoted to generating liquid reflux.

5 [0022] In one aspect, the acid gases comprise carbon dioxide. The quantity of the generated liquid reflux is sufficient to remove carbon dioxide from the raw gas stream down to a first composition of about 1 to 4 mol. percent. At the same time, the solid adsorbent bed downstream of the cryogenic distillation tower removes additional carbon dioxide from the overhead methane stream down to a second composition. For example, the second
10 composition may be about 0.2 to 3.0 mol. percent.

[0023] In another aspect, the quantity of the generated liquid reflux is sufficient to remove carbon dioxide from the raw gas stream down to a first composition that meets pipeline specifications. At the same time, the solid adsorbent bed downstream of the cryogenic distillation tower removes carbon dioxide from the overhead methane stream down to a
15 second composition that meets LNG specifications. For example, the solid adsorbent bed downstream of the cryogenic distillation tower may remove carbon dioxide from the overhead methane stream down to a composition less than about 100 parts per million ("ppm") or, more preferably, down to a composition less than about 50 ppm.

[0024] In yet another aspect, the acid gases further comprise hydrogen sulfide. In this
20 instance, the solid adsorbent bed downstream of the cryogenic distillation tower may remove hydrogen sulfide from the overhead methane stream down to a composition less than about 10 ppm or, more preferably, down to a composition less than about 4 ppm.

[0025] In one arrangement, at least one solid adsorbent bed downstream of the cryogenic distillation tower is configured to replace at least one solid adsorbent bed upstream of the
25 cryogenic distillation tower in a regeneration cycle.

[0026] A method for removing acid gases from a raw gas stream is also provided herein. In one aspect the method includes providing a cryogenic distillation tower. The tower has a lower distillation zone and an intermediate controlled freezing zone that receives a cold liquid spray comprised primarily of methane. The method also includes receiving the raw gas
30 stream into the cryogenic distillation tower.

[0027] After receiving the raw gas stream, the method includes separating the raw gas stream in the cryogenic distillation tower into an overhead methane stream and a bottom acid gas stream. The method then includes passing the overhead methane stream through a

- 6 -

refrigeration system downstream of the cryogenic distillation tower. The refrigeration system cools the overhead methane stream.

[0028] The method further includes returning a first portion of the cooled overhead methane stream to the cryogenic distillation tower as liquid reflux. The liquid reflux serves
5 as the cold liquid spray within the tower. The method also includes passing a second portion of the cooled overhead methane stream through a solid adsorbent bed downstream of the cryogenic distillation tower. This serves to remove additional acid gases and to generate a polished gas stream. Preferably, the solid adsorbent bed is a molecular sieve bed.

[0029] The method also includes designing the refrigeration system to produce liquid
10 reflux at a sufficient quantity as to remove acid gases from the raw gas stream within the cryogenic distillation tower down to a first selected composition, and deliver the overhead methane stream to the solid adsorbent bed downstream of the cryogenic distillation tower to remove additional acid gases down to a second lower composition.

[0030] In one aspect, the acid gases comprise carbon dioxide. In this instance, the quantity
15 of the generated liquid reflux is sufficient to remove carbon dioxide from the raw gas stream down to a first composition of about 1 to 4 mol. percent. In addition, the solid adsorbent bed downstream of the cryogenic distillation tower removes additional carbon dioxide from the overhead methane stream down to a second composition of about 0.2 to 3.0 mol. percent.

[0031] In one arrangement, the quantity of the generated liquid reflux is sufficient to
20 remove carbon dioxide from the raw gas stream down to a first composition that meets pipeline specifications. For example, the pipeline specifications may require a carbon dioxide content that is less than about 3.0 mol. percent. The solid adsorbent bed downstream of the cryogenic distillation tower then removes carbon dioxide from the overhead methane stream down to a second composition that meets LNG specifications. For example, the LNG
25 specifications may require a carbon dioxide content that is less than about 100 ppm or even about 50 ppm.

[0032] In another embodiment of the method, the acid gases further comprise hydrogen sulfide. In this instance, the solid adsorbent bed downstream of the cryogenic distillation tower may remove hydrogen sulfide from the overhead methane stream down to a
30 composition less than about 10 ppm. Preferably, the solid adsorbent bed downstream of the cryogenic distillation tower is a molecular sieve bed, and the molecular sieve bed removes hydrogen sulfide from the overhead methane stream down to a composition less than about 4 ppm.

- 7 -

[0033] In one aspect, the method further includes the step of at least partially dehydrating the raw gas stream by passing the raw gas stream through a solid adsorbent bed upstream of the cryogenic distillation tower. Preferably, the solid adsorbent bed upstream of the cryogenic distillation tower is also a molecular sieve bed. The method may then further include replacing the molecular sieve bed upstream of the cryogenic distillation tower when the molecular sieve bed upstream of the cryogenic distillation tower becomes substantially saturated with water. When the molecular sieve bed upstream of the cryogenic distillation tower becomes substantially saturated with water, the molecular sieve bed upstream of the cryogenic distillation tower is replaced with a molecular sieve bed that was previously used to adsorb carbon dioxide downstream of the cryogenic distillation tower.

[0034] The method may further include regenerating the molecular sieve bed upstream of the cryogenic distillation tower after the molecular sieve bed upstream of the cryogenic distillation tower becomes substantially saturated with water. Regenerating the molecular sieve bed upstream of the cryogenic distillation tower may involve either thermal swing adsorption or pressure swing adsorption. When the molecular sieve bed downstream of the cryogenic distillation tower becomes substantially saturated with carbon dioxide, the molecular sieve bed may be replaced with a regenerated bed previously in service for dehydration upstream of the cryogenic distillation tower.

BRIEF DESCRIPTION OF THE DRAWINGS

[0035] So that the manner in which the present inventions can be better understood, certain illustrations, charts and/or flow charts are appended hereto. It is to be noted, however, that the drawings illustrate only selected embodiments of the inventions and are therefore not to be considered limiting of scope, for the inventions may admit to other equally effective embodiments and applications.

[0036] Figure 1 is a side view of a CFZ distillation tower, in one embodiment. An initial raw gas stream is seen being injected into the intermediate controlled freeze zone of the tower.

[0037] Figure 2A is a plan view of a melt tray, in one embodiment. The melt tray resides within the tower below the controlled freeze zone.

[0038] Figure 2B is a cross-sectional view of the melt tray of Figure 2A, taken across line 2B-2B.

[0039] Figure 2C is a cross-sectional view of the melt tray of Figure 2A, taken across line 2C-2C.

- 8 -

[0040] Figure 3 is an enlarged side view of stripping trays in the lower distillation section of the distillation tower, in one embodiment.

[0041] Figure 4A is perspective view of a jet tray as may be used in either the lower distillation section or in the upper rectification section of the distillation tower, in one
5 embodiment.

[0042] Figure 4B is a side view of one of the openings in the jet tray of Figure 4A.

[0043] Figure 5 is a side view of the intermediate controlled freeze zone of the distillation tower of Figure 1. In this view, two illustrative baffles have been added to the intermediate controlled freeze zone.

10 [0044] Figure 6 is a schematic diagram showing a gas processing facility for removing acid gases from a gas stream in accordance with the present invention, in one embodiment.

[0045] Figures 7A, 7B and 7C together present a flowchart for a method of removing acid gases from a gas stream in accordance with the present invention, in one embodiment.

[0046] Figure 8A is a schematic diagram of a control system that uses feed-forward
15 control. The illustrative control system is used to control cycle times for a solid adsorbent upstream of a cryogenic gas processing system.

[0047] Figure 8B provides a schematic diagram of a control system that uses a direct feed control. The illustrative control system is used to control cycle times for a solid adsorbent upstream of a cryogenic gas processing system.

20 DETAILED DESCRIPTION OF CERTAIN EMBODIMENTS

Definitions

[0048] As used herein, the term "hydrocarbon" refers to an organic compound that includes primarily, if not exclusively, the elements hydrogen and carbon. Hydrocarbons generally fall into two classes: aliphatic, or straight chain hydrocarbons, and cyclic, or closed
25 ring hydrocarbons, including cyclic terpenes. Examples of hydrocarbon-containing materials include any form of natural gas, oil, coal, and bitumen that can be used as a fuel or upgraded into a fuel.

[0049] As used herein, the term "hydrocarbon fluids" refers to a hydrocarbon or mixtures of hydrocarbons that are gases or liquids. For example, hydrocarbon fluids may include a
30 hydrocarbon or mixtures of hydrocarbons that are gases or liquids at formation conditions, at processing conditions or at ambient conditions (15° C and 1 atm pressure). Hydrocarbon fluids may include, for example, oil, natural gas, coal bed methane, shale oil, pyrolysis oil,

- 9 -

pyrolysis gas, a pyrolysis product of coal, and other hydrocarbons that are in a gaseous or liquid state.

[0050] The term “mass transfer device” refers to any object that receives fluids to be contacted, and passes those fluids to other objects, such as through gravitational flow. One non-limiting example is a tray for stripping out certain fluids. A grid packing is another example.

[0051] As used herein, the term “fluid” refers to gases, liquids, and combinations of gases and liquids, as well as to combinations of gases and solids, and combinations of liquids and solids.

10 [0052] As used herein, the term “condensable hydrocarbons” means those hydrocarbons that condense at about 15° C and one atmosphere absolute pressure. Condensable hydrocarbons may include, for example, a mixture of hydrocarbons having carbon numbers greater than 4.

15 [0053] As used herein, the term “closed loop refrigeration system” means any refrigeration system wherein an external working fluid such as propane or ethylene is used as a coolant to chill an overhead methane stream. This is in contrast to an “open loop refrigeration system” wherein a portion of the overhead methane stream itself is used as the working fluid.

[0054] As used herein, the term “subsurface” refers to geologic strata occurring below the earth's surface.

20 **Description of Specific Embodiments**

[0055] **Figure 1** presents a schematic view of a cryogenic distillation tower **100** as may be used in connection with the present inventions, in one embodiment. The cryogenic distillation tower **100** may be interchangeably referred to herein as a “cryogenic distillation tower,” a “column,” a “CFZ column,” or a “splitter tower.”

25 [0056] The cryogenic distillation tower **100** of **Figure 1** receives an initial fluid stream **10**. The fluid stream **10** is comprised primarily of production gases. Typically, the fluid stream represents a dried gas stream from a wellhead (not shown), and contains about 65% to about 95% methane. However, the fluid stream **10** may contain a lower percentage of methane, such as about 30% to 65%, or even 20% to 30%.

30 [0057] The methane may be present along with trace elements of other light hydrocarbon gases such as ethane. In addition, trace amounts of helium and nitrogen may be present. In the present application, the fluid stream **10** will also include certain contaminants. These are acid gases such as CO₂ and H₂S.

- 10 -

[0058] The initial fluid stream **10** may be at a post-production pressure of approximately 600 pounds per square inch (psi). In some instances, the pressure of the initial fluid stream **10** may be up to about 750 psi or even 1,000 psi.

[0059] The fluid stream **10** is typically chilled before entering the distillation tower **100**. A
5 heat exchanger **150**, such as a shell-and-tube exchanger, is provided for the initial fluid stream **10**. A refrigeration unit (not shown) provides cooling fluid (such as liquid propane) to heat exchanger **150** to bring the temperature of the initial fluid stream **10** down to about -30° to -40° F. The chilled fluid stream may then be moved through an expansion device **152**. The expansion device **152** may be, for example, a Joule-Thompson (“J-T”) valve.

10 [0060] The expansion device **152** serves as an expander to obtain additional cooling of the fluid stream **10**. Preferably, partial liquefaction of the fluid stream **10** is also created. A Joule-Thompson (or “J-T”) valve is preferred for gas feed streams that are prone to forming solids. The expansion device **152** is preferably mounted close to the cryogenic distillation tower **100** to minimize heat loss in the feed piping.

15 [0061] As an alternative to a J-T valve, the expander device **152** may be a turbo-expander. A turbo-expander provides greater cooling and creates a source of shaft work for processes like the refrigeration unit mentioned above. The refrigeration unit is part of the heat exchanger **150**. In this manner, the operator may minimize the overall energy requirements for the distillation process. However, the turbo-expander may not handle frozen particles as
20 well as the J-T valve.

[0062] In either instance, the heat exchanger **150** and the expander device **152** convert the raw gas in the initial fluid stream **10** into a chilled fluid stream **12**. Preferably, the temperature of the chilled fluid stream **12** is around -40° to -70° F. In one aspect, the cryogenic distillation tower **100** is operated at a pressure of about 550 psi, and the chilled
25 fluid stream **12** is at approximately -62° F. At these conditions, the chilled fluid stream **12** is in a substantially liquid phase, although some vapor phase may inevitably be entrained into the chilled fluid stream **12**. Most likely, no solids formation has arisen from the presence of CO₂.

[0063] The cryogenic distillation tower **100** is divided into three primary sections. These
30 are a lower distillation zone, or “stripping section” **106**, an intermediate controlled freezing zone, or “spray section” **108**, and an upper distillation section, or “rectification section” **110**. In the tower arrangement of **Figure 1**, the chilled fluid stream **12** is introduced into the

- 11 -

distillation tower **100** the spray section **108**. However, the chilled fluid stream **12** may alternatively be introduced into near the top of the stripping section **106**.

[0064] It is noted in the arrangement of **Figure 1** that the stripping section **106**, the intermediate spray section **108**, the rectification section **110**, and all the components are housed within a single vessel **100**. However, for offshore applications in which height of the tower **100** and motion considerations may need to be considered, or for remote locations in which transportation limitations are an issue, the tower **110** may optionally be split into two separate pressure vessels (not shown). For example, the stripping section **106** and the spray section **108** may be located in one vessel, while the rectification section **108** is in another section. External piping would then be used to interconnect the two vessels.

[0065] In either embodiment, the temperature of the stripping section **106** is higher than the feed temperature of the chilled fluid stream **12**. The temperature of the stripping section **106** is designed to be well above the boiling point of the methane in the chilled fluid stream **12** at the operating pressure of the column **100**. In this manner, methane is preferentially stripped from the heavier hydrocarbon and liquid acid gas components. Of course, those of ordinary skill in the art will understand that the liquid within the distillation tower **100** is a mixture, meaning that the liquid will “boil” at some intermediate temperature between pure methane and pure CO₂. Further, in the event that there are heavier hydrocarbons present in the mixture, this will increase the boiling temperature of the mixture. These factors become design considerations for the operating temperatures within the distillation tower **100**.

[0066] In the stripping section **106**, the CO₂ and any other liquid-phase fluids gravitationally fall towards the bottom of the cryogenic distillation tower **100**. At the same time, methane and other vapor-phase fluids break out and rise upwards towards the top of the tower **100**. This separation is accomplished primarily through the density differential between the gas and liquid phases. However, the separation process is optionally aided by internal components within the distillation tower **100**. As described below, these include a melt tray **130**, a plurality of advantageously-configured mass transfer devices **126**, and an optional heater line **25**. Side reboilers (not shown) may likewise be added to the stripping section **106** to facilitate removal of CO₂ and heat transfer.

[0067] Referring again to **Figure 1**, the chilled fluid stream **12** may be introduced into the column **100** near the top of the stripping section **106**. Alternatively, it may be desirable to introduce the feed stream **12** into the intermediate spray section **108** above the melt tray **130**.

- 12 -

The point of injection of the chilled fluid stream **12** is a design issue dictated by the composition of the initial fluid stream **10**.

[0068] Where the temperature of the fluid stream **10** is high enough (such as greater than -70° C) such that solids are not expected, it may be preferable to inject the chilled fluid stream **12** directly into the stripping section **106** through a two-phase flashbox type device (or vapor distributor) **124** in the column **100**. The use of a flashbox **124** serves to separate the two-phase vapor-liquid mixture in the chilled fluid stream **12**. The flashbox **124** may be slotted such that the two-phase fluid impinges against baffles in the flashbox **124**.

[0069] If solids are anticipated due to a low inlet temperature, the chilled fluid stream **12** may need to be partially separated in a vessel **173** prior to feeding the column **100** as described above. In this case, the chilled feed stream **12** may be separated in a two phase vessel **173** to minimize the possibility of solids plugging the inlet line and internal components of the column **100**. Gas vapor leaves the two phase vessel **173** through a vessel inlet line **11**, where it enters the column **100** through an inlet distributor **121**. The gas then travels upward through the column **100**. A liquid/solid slurry **13** is discharged from the two phase vessel **173**. The liquid/solid slurry is directed into the column **100** through the vapor distributor **124** and to the melt tray **130**. The liquid/solid slurry **13** can be fed to the column **100** by gravity or by a pump **175**.

[0070] In either arrangement, that is, with or without the two phase vessel **173**, the chilled fluid stream **12** (or **11**) enters the column **100**. The liquid component leaves the flashbox **124** and travels down a collection of stripping trays **126** within the stripping section **106**. The stripping trays **126** include a series of downcomers **129** and weirs **128**. These are described more fully below in connection with **Figure 3**. The stripping trays **126**, in combination with the warmer temperature in the stripping section **106**, cause methane and other light gases to break out of solution. The resulting vapor carries the methane and light gases along with carbon dioxide molecules that have boiled off.

[0071] The vapor further proceeds upward through risers **131** of the melt tray **130** and into the freeze zone **108**. The melt tray risers **131** act as a vapor distributor for uniform distribution through the freeze zone **108**. The vapor will then contact cold liquid from spray headers **120** to “freeze out” the CO₂. Stated another way, CO₂ will freeze and then “snow” back onto the melt tray **130**. The solid CO₂ then melts and gravitationally flows in liquid form down the melt tray **130** and through the stripping section **106** there below.

- 13 -

[0072] As will be discussed more fully below, the spray section **108** is an intermediate freeze zone of the cryogenic distillation tower **100**. With the alternate configuration in which the chilled fluid stream **12** is separated in vessel **173** prior to entering the tower **100**, the separated liquid/solid slurry **13** is introduced into the tower **100** on to the melt tray **130**.

5 Thus, a liquid-solid mixture of sour gas and heavier hydrocarbon components will flow from the distributor **121**, with solids and liquids falling down onto the melt tray **130**.

[0073] The melt tray **130** is configured to gravitationally receive liquid and solid materials, primarily CO₂ and H₂S, from the intermediate spray section **108**. The melt tray **130** serves to warm the liquid and solid materials and direct them downward through the stripping section **106** in liquid form for further purification. The melt tray **130** collects and warms the solid-liquid mixture from the intermediate spray section **108** in a pool of liquid. The melt tray **130** is designed to release vapor flow back to the intermediate spray section **108**, to provide adequate heat transfer to melt the solid CO₂, and to facilitate liquid/slurry drainage to the lower distillation or stripping section **106** of the column **100** below the melt tray **130**.

15 [0074] **Figure 2A** provides a plan view of the melt tray **130**, in one embodiment. **Figure 2B** provides a cross-sectional view of the melt tray **130**, taken across line B-B of **Figure 2A**. **Figure 2C** shows a cross-sectional view of the melt tray **130**, taken across line C-C. The melt tray **130** will be described with reference to these three drawings collectively.

[0075] First, the melt tray **130** includes a base **134**. The base **134** may be a substantially planar body. However, in the preferred embodiment shown in **Figures 2A, 2B and 2C**, the base **134** employs a substantially non-planar profile. The non-planar configuration provides an increased surface area for contacting liquids and solids landing on the melt tray **130** from the intermediate spray section **108**. This serves to increase heat transfer from the vapors passing up from the stripping section **106** of the column **100** to the liquids and thawing solids.

20 In one aspect, the base **134** is corrugated. In another aspect, the base **134** is substantially sinusoidal. This aspect of the tray design is shown in **Figure 2B**. It is understood that other non-planar geometries may alternatively be used to increase the heat transfer area of the melt tray **130**.

[0076] The melt tray base **134** is preferably inclined. The incline is demonstrated in the side view of **Figure 2C**. Although most solids should be melted, the incline serves to ensure that any unmelted solids in the liquid mixture drain off of the melt tray **130** and into the stripping section **106** there below.

30

- 14 -

[0077] In the view of **Figure 2C**, a sump or “downcomer” **138** is seen central to the melt tray **130**. The melt tray base **134** slopes inwardly towards the downcomer **138** to deliver the solid-liquid mixture. The base **134** may be sloped in any manner to facilitate gravitational liquid draw-off.

5 [0078] As described in U.S. Pat. No. 4,533,372, the melt tray was referred to as a “chimney tray.” This was due to the presence of a single venting chimney. The chimney provided an opening through which vapors may move upward through the chimney tray. However, the presence of a single chimney meant that all gases moving upward through the chimney tray had to egress through the single opening. On the other hand, in the melt tray
10 **130** of **Figures 2A, 2B and 2C**, a plurality of chimneys **131** (or “risers”) is provided. The use of multiple chimneys **131** provides improved vapor distribution. This contributes to better heat/mass transfer in the intermediate spray section **108**.

[0079] The chimneys **131** may be of any profile. For instance, the chimneys **131** may be round, rectangular, or any other shape that allows vapor to pass through the melt tray **130**.
15 The chimneys **131** may also be narrow and extend upwards into the intermediate spray section **108**. This enables a beneficial pressure drop to distribute the vapor evenly as it rises into the CFZ intermediate spray section **108**. The chimneys **131** are preferably located on peaks of the corrugated base **134** to provide additional heat transfer area.

[0080] The top openings of the chimneys **131** are preferably covered with hats or caps **132**.
20 This minimizes the chance that solids dropping from the spray section **108** can avoid falling onto the melt tray **130**. In **Figures 2A, 2B and 2C**, caps **132** are seen above each of the chimneys **131**.

[0081] The melt tray **130** may also be designed with bubble caps. The bubble caps define convex indentations in the base **134** rising from underneath the melt tray **130**. The bubble
25 caps further increase surface area in the melt tray **130** to provide additional heat transfer to the CO₂-rich liquid. With this design, a suitable liquid draw off, such as an increased incline angle, should be provided to insure that liquid is directed to the stripping trays **126** below.

[0082] Referring again to **Figure 1**, the melt tray **130** may also be designed with an external liquid transfer system. The transfer system serves to ensure that all liquid is
30 substantially free of solids and that sufficient heat transfer has been provided. The transfer system first includes a draw-off nozzle **136**. In one embodiment, the draw-off nozzle **136** resides within the draw-off sump, or downcomer **138**. Fluids collected in downcomer **138** are delivered to a transfer line **135**. Flow through transfer line **135** is controlled by a control

- 15 -

valve **137** and a level controller “**LC**” (seen in **Fig. 1**). Fluids are returned to the stripping section **106** via the transfer line **135**. If the liquid level is too high, the control valve **137** opens; if the level is too low, the control valve **137** closes. If the operator chooses not to employ the transfer system in the stripping section **106**, then the control valve **137** is closed
5 and fluids are directed immediately to the mass transfer devices, or “stripping trays” **126** below the melt tray **130** for stripping via an overflow downcomer **139**.

[0083] Whether or not an external transfer system is used, solid CO₂ is warmed on the melt tray **130** and converted to a CO₂-rich liquid. The melt tray **130** is heated from below by vapors from the stripping section **106**. Supplemental heat may optionally be added to the
10 melt tray **130** or just above the melt tray base **134** by various means such as heater line **25**. The heater line **25** utilizes thermal energy already available from a bottom reboiler **160** to facilitate thawing of the solids.

[0084] The CO₂-rich liquid is drawn off from the melt tray **130** under liquid level control and gravitationally introduced to the stripping section **106**. As noted, a plurality of stripping
15 trays **126** are provided in the stripping section **106** below the melt tray **130**. The stripping trays **126** are preferably in a substantially parallel relation, one above the other. Each of the stripping trays **126** may optionally be positioned at a very slight incline, with a weir such that a liquid level is maintained on the tray. Fluids gravitationally flow along each tray, over the weir, and then flow down onto the next tray via a downcomer.

20 [0085] The stripping trays **126** may be in a variety of arrangements. The stripping trays **126** may be arranged in generally horizontal relation to form a sinusoidal, cascading liquid flow. However, it is preferred that the stripping trays **126** be arranged to create a cascading liquid flow that is divided by separate stripping trays substantially along the same horizontal plane. This is shown in the arrangement of **Figure 3**, where the liquid flow is split at least
25 once so that liquid falls into two opposing downcomers **129**.

[0086] **Figure 3** provides a side view of a stripping tray **126** arrangement, in one embodiment. Each of the stripping trays **126** receives and collects fluids from above. Each stripping tray **126** preferably has a weir **128** that serves as a dam to enable the collection of a small pool of fluid on each of the stripping trays **126**. The buildup may be ½ to 1 inch,
30 though any height may be employed. A waterfall effect is created by the weirs **128** as fluid falls from one tray **126** on to a next lower tray **126**. In one aspect, no incline is provided to the stripping trays **126**, but the waterfall effect is created through a higher weir **128** configuration. The fluid is contacted with upcoming vapor rich in lighter hydrocarbons that

- 16 -

strip out the methane from the cross flowing liquid in this “contact area” of the trays **126**. The weirs **128** serve to dynamically seal the downcomers **129** to prevent vapor bypassing through the downcomers **129** and to further facilitate the breakout of hydrocarbon gases.

[0087] The percentage of methane in the liquid becomes increasingly small as the liquid
5 moves downward through the stripping section **106**. The extent of distillation depends on the number of trays **126** in the stripping section **106**. In the upper part of the stripping section **106**, the methane content of the liquid may be as high as 25 mol percent, while at the bottom stripping tray the methane content may be as low as 0.04 mol percent. The methane content flashes out quickly along the stripping trays **126** (or other mass transfer devices). The
10 number of mass transfer devices used in the stripping section **106** is a matter of design choice based on the composition of the raw gas stream **10**. However, only a few levels of stripping trays **126** need be utilized to remove methane to a desired level of 1% or less in the liquefied acid gas, for example.

[0088] Various individual stripping tray **126** configurations that facilitate methane
15 breakout may be employed. The stripping tray **126** may simply be a panel with sieve holes or bubble caps. However, to provide further heat transfer to the fluid and to prevent unwanted blockage due to solids, so called “jet trays” may be employed below the melt tray. In lieu of trays, random or structured packing may also be employed.

[0089] **Figure 4A** provides a plan view of an illustrative jet tray **426**, in one embodiment.
20 **Figure 4B** provides a cross-sectional view of a jet tab **422** from the jet tray **426**. As shown, each jet tray **426** has a body **424**, with a plurality of jet tabs **422** formed within the body **424**. Each jet tab **422** includes an inclined tab member **428** covering an opening **425**. Thus, a jet tray **426** has a plurality of small openings **425**.

[0090] In operation, one or more jet trays **426** may be located in the stripping **106** and/or
25 rectification **110** sections of the tower **100**. The trays **426** may be arranged with multiple passes such as the pattern of stripping trays **126** in **Figure 3**. However, any tray or packing arrangement may be utilized that facilitates the breakout of methane gas. Fluid cascades down upon each jet tray **426**. The fluids then flow along the body **424**. The fluid is then contacted with the vapor exiting the openings **425**. The tabs **422** are optimally oriented to
30 move the fluid quickly and efficiently across the tray **426**. An adjoining downcomer (not shown) may optionally be provided to move the liquid to the subsequent tray **426**. The openings **425** also permit gas vapors released during the fluid movement process in the

- 17 -

stripping section **106** to travel upwards more efficiently to the melt tray **130** and through the chimneys **131**.

- [0091]** In one aspect, the trays **126** or **426** may be fabricated from fouling-resistant materials, that is, materials that prevent solids-buildup. Fouling-resistant materials are utilized in some processing equipment to prevent the buildup of metal particles, polymers, salts, hydrates, catalyst fines, or other chemical solids compounds. In the case of the cryogenic distillation tower **100**, fouling resistant materials may be used in the trays **126** or **426** to limit sticking of CO₂ solids. For example, a Teflon™ coating may be applied to the surface of the trays **126** or **426**.
- [0092]** Alternatively, a physical design may be provided to ensure that the CO₂ does not start to build up in solid form along the inner diameter of the column **100**. In this respect, the jet tabs **422** may be oriented to push liquid along the wall of the column **100**, thereby preventing solids accumulation along the wall of the column **100** and ensuring good vapor-liquid contact.
- [0093]** In any of the tray arrangements, as the down-flowing liquid hits the stripping trays **126**, separation of components occurs. Methane gas breaks out of solution and moves upward in vapor form. The CO₂, however, is cold enough and in high enough concentration that it remains in its liquid form and travels down to the bottom of the stripping section **106**. The liquid is then moved out of the cryogenic distillation tower **100** in an exit line as an exit fluid stream **22**.
- [0094]** Upon exiting the distillation tower **100**, the exit fluid stream **22** enters a reboiler **160**. In **Figure 1**, the reboiler **160** is a kettle type that provides reboiled vapor to the bottom of the stripping trays. A reboiled vapor line is seen at **27**. In addition, reboiled vapor may be delivered through a heater line **25** to provide supplemental heat to the melt tray **130**. The supplemental heat is controlled through a valve **165** and temperature controller **TC**. Alternately, a heat exchanger, such as a thermosyphon heat exchanger (not shown) may be used for the initial fluid stream **10** to economize energy. In this respect, the liquids entering the reboiler **160** remain at a relatively low temperature, for example, about 30° to 40° F. By heat integrating with the initial fluid stream **10**, the operator may warm the cold exit fluid stream **22** from the distillation tower **100** while cooling the production fluid stream **10**. For this case, the fluid providing supplemental heat through line **25** is a mixed phase return from the reboiler **160**.

- 18 -

[0095] It is contemplated that under some conditions, the melt tray **130** may operate without heater line **25**. In these instances, the melt tray **130** may be designed with an internal heating feature such as an electric heater. However, it is preferred that a heat system be offered that employs the heat energy available in exit fluid stream **22**. The warm fluids in heater line **25** after exiting reboiler **160** exist in one aspect at 30° to 40° F, so they contain relative heat energy. Thus, in **Figure 1**, vapor stream **25** is shown being directed to the melt tray **130** through a heating coil (not shown) on the melt tray **130**. The vapor stream **25** may alternatively be tied to the transfer line **135**.

[0096] In operation, the reboiled vapor stream is introduced at the bottom of the column through line **27**, above the bottom liquid level and below the last stripping tray **126**. As the reboiled vapor passes through each tray **126**, residual methane is stripped out of the liquid. This vapor cools off as it travels up the tower. By the time the stripping vapors of stream **27** reach the corrugated melt tray **130**, the temperature may have dropped to about -20° F to 0° F. However, this remains quite warm compared to the melting solid on the melt tray **130**, which may be around -50° F to -80° F. The vapor still has enough enthalpy to melt the solids CO₂ as it comes in contact with the melt tray **130** to warm the melt tray **130**.

[0097] Referring back to reboiler **160**, fluids in a bottom stream **24** that exit the reboiler **160** in liquid form may optionally pass through an expander valve **162**. The expander valve **162** reduces the pressure of the bottom liquid product, effectively providing a refrigeration effect. Thus, a chilled bottom stream **26** is provided. This also creates hydrostatic head. In this respect, the CO₂-rich liquid exiting the reboiler **160** may be pumped downhole through one or more AGI wells (seen schematically at **250** in **Figure 1**). In some situations, the liquid CO₂ may be pumped into a partially recovered oil reservoir as part of an enhanced oil recovery process. Thus, the CO₂ could be a miscible injectant. As an alternative, the CO₂ may be used as a miscible flood agent for enhanced oil recovery.

[0098] Referring again to the stripping section **106** of the column **100**, gas moves up through the stripping section **106**, through the chimneys **131** in the melt tray **130**, and into the intermediate spray section **108**. The spray section **108** is an open chamber having a plurality of spray nozzles **122**. As the vapor moves upward through the spray section **108**, the temperature of the vapor becomes much colder. The vapor is contacted by liquid methane coming from the spray nozzles **122**. This liquid methane is colder than the upwardly-moving vapor, having been chilled by an external refrigeration unit **170**. In one arrangement, the liquid methane exists from spray nozzles **122** at a temperature of approximately -120° F to

- 19 -

-130° F. However, as the liquid methane evaporates, it absorbs heat from its surroundings, thereby reducing the temperature of the upwardly-moving vapor. The vaporized methane also flows upward due to its reduced density (relative to liquid methane) and the pressure gradient within the column **100**.

- 5 **[0099]** As the methane vapors move further up the cryogenic distillation tower **100**, they leave the intermediate spray section **108** and enter the rectification section **110**. The vapors continue to move upward along with other light gases broken out from the original chilled fluid stream **12**. The combined hydrocarbon vapors move out of the top of the cryogenic distillation tower **100**, becoming an overhead methane stream **14**.
- 10 **[0100]** The hydrocarbon gas in the overhead methane stream **14** is moved into the external refrigeration unit **170**. In one aspect, the refrigeration unit **170** uses an ethylene refrigerant or other refrigerant capable of chilling the overhead methane stream **14** down to -135° to -45° F. This serves to at least partially liquefy the overhead methane stream **14**. The chilled methane stream **14** is then moved to a reflux condenser or separation chamber **172**.
- 15 **[0101]** Separation chamber **172** is used to separate gas **16** from liquid reflux **18**. The gas **16** represents the lighter hydrocarbon gases, primarily methane, from the original raw gas stream **10**. Nitrogen and helium may also be present. The methane gas **16** is, of course, the “product” ultimately sought to be captured and sold commercially, along with any ethane.
- 20 **[0102]** A portion of the overhead methane stream **14** exiting the refrigeration unit **170** remains condensed. This portion becomes liquid reflux **18** that is separated in the separation chamber **172** and returned to the column **100**. A pump **19** may be used to move the liquid reflux **18** back into the column **100**. Alternatively, the separation chamber **172** is mounted above the column **100** to provide a gravity feed of the liquid reflux **18**. The liquid reflux **18** will include any carbon dioxide that escaped from the upper rectification section **110**.
- 25 However, most of the reflux liquid **18** is methane, typically 95% or more, with nitrogen (if present in the initial fluid stream **10**) and traces of carbon dioxide and hydrogen sulfide (also if present in the initial fluid stream **10**).
- 30 **[0103]** In one cooling arrangement, the overhead methane stream **14** is taken through an open-loop refrigeration system, such as the refrigeration system shown in and described in connection with **Figure 6**. In this arrangement, the overhead methane stream **14** is taken through a cross-exchanger to chill a return portion of the overhead methane stream used as the liquid reflux **18**. Thereafter, the overhead methane stream **14** is pressurized to about 1,000 psi to 1,400 psi, and then cooled using ambient air and possibly an external propane

- 20 -

refrigerant. The pressurized and chilled gas stream is then directed through an expander for further cooling. A turbo expander may be used to recover even more liquid as well as some shaft work. U.S. Pat. No. 6,053,007 entitled "Process For Separating a Multi-Component Gas Stream Containing at Least One Freezable Component," describes the cooling of an overhead methane stream, and is incorporated herein in its entirety by reference.

[0104] It is understood here that the present inventions are not limited by the cooling method for the overhead methane stream **14**. It is also understood that the degree of cooling between refrigeration unit **170** and the initial refrigeration unit **150** may be varied. In some instances, it may be desirable to operate the refrigeration unit **150** at a higher temperature, but then be more aggressive with cooling the overhead methane stream **14** in the refrigeration unit **170**. Again, the present inventions are not limited to these types of design choices.

[0105] Returning to **Figure 1**, the reflux liquid **18** is returned into the rectification section **110**. The reflux liquid **18** is then gravitationally carried through one or more mass transfer devices **116** in the rectification section **110**. In one embodiment, the mass transfer devices **116** are rectification trays that provide a cascading series of weirs **118** and downcomers **119**, similar to trays **126** described above.

[0106] As fluids from reflux liquid stream **18** move downward through the rectification trays **116**, additional methane vaporizes out of the rectification section **110**. The methane gases rejoin the overhead methane stream **14** to become part of the gas product stream **16**. However, the remaining liquid phase of reflux liquid **18** falls onto a collector tray **140**. As it does so, the reflux liquid stream **18** unavoidably will pick up a small percentage of hydrocarbon and residual acid gases moving upward from the spray section **108**. The liquid mixture of methane and carbon dioxide is collected at collector tray **140**.

[0107] The collector tray **140** preferably defines a substantially planar body for collecting liquids. However, as with melt tray **130**, collector tray **140** also has one, and preferably a plurality of chimneys for venting gases coming up from the spray section **108**. A chimney and cap arrangement such as that presented by components **131** and **132** in **Figures 2B** and **2C** may be used. Chimneys **141** and caps **142** for collector tray **140** are shown in the enlarged view of **Figure 5**, discussed further below.

[0108] It is noted here that in the rectification section **110**, any H₂S present has a preference towards being dissolved in the liquid versus being in the gas at the processing temperature. In this respect, the H₂S has a comparatively low relative volatility. By contacting the remaining vapor with more liquid, the cryogenic distillation tower **100** drives

- 21 -

the H₂S concentration down to within the desired parts-per-million (ppm) limit, such as a 10 or even 4 ppm specification. As fluid moves through the mass transfer devices **116** in the rectification section **110**, the H₂S contacts the liquid methane and is pulled out of the vapor phase and becomes a part of the liquid stream **20**. From there, the H₂S moves in liquid form
5 downward through the stripping section **106** and ultimately exits the cryogenic distillation tower **100** as part of the liquefied acid gas stream **22**.

[0109] In cryogenic distillation tower **100**, the liquid captured at collector tray **140** is drawn out of the rectification section **110** as a liquid stream **20**. The liquid stream **20** is comprised primarily of methane. In one aspect, the liquid stream **20** is comprised of about 93
10 mol. percent methane, 3% CO₂, 0.5% H₂S, and 3.5% N₂. At this point, the liquid stream **20** is at about -125° F to -130° F. This is only slightly warmer than the reflux fluid stream **18**. The liquid stream **20** is directed into a reflux drum **174**. The purpose of the reflux drum **174** is to provide surge capacity for a pump **176**. Upon exiting the reflux drum **174**, a spray stream **21** is created. Spray stream **21** is pressurized in a pump **176** for a second reintroduction into the
15 cryogenic distillation tower **100**. In this instance, the spray stream **21** is pumped into the intermediate spray section **108** and emitted through nozzles **122**.

[0110] Some portion of the spray stream **21**, particularly the methane, vaporizes and evaporates upon exiting the nozzles **122**. From there, the methane rises through the intermediate spray section **108**, through the chimneys in the collector tray **140**, and through
20 the mass transfer devices **116** in the rectification section **110**. The methane leaves the distillation tower **100** as the overhead methane stream **14** and ultimately become commercial product in gas stream **16**.

[0111] The spray stream **21** from the nozzles **122** also causes carbon dioxide to desublime from the gas phase. In this respect, some CO₂ momentarily enters the gas phase and moves
25 upward with the methane. However, because of the cold temperature within the intermediate spray section **108**, the gaseous carbon dioxide quickly turns into a solid phase and begins to "snow." This phenomenon is referred to as desublimation. In this way, some CO₂ never re-enters the liquid phase until it hits the melt tray **130**. This carbon dioxide "snows" upon the melt tray **130**, and melts into the liquid phase. From there, the CO₂-rich liquid cascades
30 down the mass transfer devices or trays **126** in the stripping section **106**, along with liquid CO₂ from the chilled fluid stream **12** as described above. At that point, any remaining methane from the spray stream **21** of the nozzles **122** should quickly break out into vapor.

- 22 -

These vapors move upwards in the cryogenic distillation tower **100** and re-enter the rectification section **110**.

[0112] It is desirable to have chilled liquid contacting as much of the gas that is moving up the column as possible. If vapor bypasses the spray stream **21** emanating from the nozzles **122**, higher levels of CO₂ could reach the rectification section **110** of the tower **100**. To improve the efficiency of gas/liquid contact in the intermediate spray section **108**, a plurality of nozzles **122** having a designed configuration may be employed. Thus, rather than employing a single spray source at one or more levels in a reflux fluid stream **21**, several spray headers **120** optionally designed with multiple spray nozzles **122** may be used. Thus, the configuration of the spray nozzles **122** has an impact on the mass transfer taking place within the intermediate spray section **108**.

[0113] The assignee herein has previously proposed various nozzle arrangements in co-pending WO Pat. Publ. No. 2008/091316 having an international filing date of November 20, 2007. That application and **Figures 6A** and **6B** are incorporated herein by reference for teachings of the nozzle configurations. The nozzles seek to ensure 360° and full radial coverage within the spray section **108** and provide good vapor-liquid contact and heat/mass transfer. This, in turn, more effectively chills any gaseous carbon dioxide moving upward through the cryogenic distillation tower **100**.

[0114] The use of multiple headers **120** and a corresponding overlapping nozzle **122** arrangement for complete coverage minimizes back-mixing as well. In this respect, complete coverage prevents the fine, low-mass CO₂ particles from moving back up the column and re-entering the rectification section **110**. These particles would then remix with methane and re-enter the overhead methane stream **14**, only to be recycled again.

[0115] It can be seen that the process of cycling vapors through the cryogenic distillation tower **100** ultimately produces a hydrocarbon product comprised of a commercial methane product **16**. The gas product **16** is sent down a pipeline for sale. The gas product stream **16** preferably meets a pipeline CO₂ specification of 1 to 4 mol. percent, as well as a 4 ppm H₂S specification, if sufficient reflux is generated. At the same time, acid gases are removed through exit fluid stream **22**.

[0116] Should nitrogen be present in quantities of, for example, greater than 3 mol. percent, a separate nitrogen rejection process may be used. Pipeline specifications generally require a total inert gas composition of less than 3 mol. percent. One option for removing excessive nitrogen is to use a solid adsorbent bed (not shown). The solid adsorbent may be a

- 23 -

zeolite material that forms a molecular sieve having a selected pore size. The molecular sieve is placed along the overhead methane stream to remove nitrogen from the overhead stream. Preferably, this occurs prior to chilling.

[0117] Once this molecular sieve is fully adsorbed with nitrogen, it may be regenerated using either pressure swing adsorption or thermal swing adsorption. The molecular sieve generally cannot be regenerated using water adsorption upstream of the cryogenic tower as the nitrogen will end up back in the column and, thus, is not eliminated from the system.

[0118] While the above system described in connection with **Figure 1** is beneficial for producing a substantially acid-free pipeline gas product **16**, it is acknowledged that in some applications, supplemental refrigeration may be required. For example, LNG specifications can be as low as 50 ppm for CO₂. Using the system described above, significant reflux refrigeration from external refrigeration unit **170** (or other refrigeration system) is required. In addition, additional refrigeration may be required prior to reflux injection from pump **19** or pump **176**. Still further, significant heat removal may be needed from the initial heat exchanger **150** to partially liquefy the feed stream **10**. These refrigerators demand capacity for liquid reflux generation and energy for horsepower.

[0119] As an alternative, a “polishing” process is proposed herein. The “polishing” is applied to the overhead methane stream **14** as a post-CFZ process. This means that the overhead methane stream **14** released from the cryogenic distillation tower **100** is further polished downstream of the tower **100** to meet, for example, liquefied natural gas (LNG) specifications without increasing the quantity of liquid reflux injected through the spray nozzles **122**.

[0120] **Figure 6** is a schematic diagram showing a gas processing facility **600** for removing acid gases from a gas stream, in one embodiment. A production gas stream is shown at **612**. The gas stream **612** originates from hydrocarbon production activities that take place in a reservoir development area or “field” **610**.

[0121] It is understood that the field **610** may represent any location where compressible hydrocarbons are produced. The field **610** may be onshore, near shore or offshore. The field **610** may be operating from original reservoir pressure or may be undergoing enhanced recovery procedures. The systems and methods claimed herein are not limited to the type of field that is under development so long as it is producing compressible hydrocarbons contaminated with acid gas.

- 24 -

[0122] The production gas stream **612** may be directed through a dehydration process such as a glycol dehydration process. A dehydration vessel is shown schematically at **620**. As a result of passing the production gas stream **612** through the dehydration vessel **620**, a stream of removed water **622** is generated. The water **622** may be sent to a water treatment facility.

5 Alternatively, the water **622** may be re-injected into a subsurface formation, indicated at block **630**. Alternatively still, the water may be treated and then injected back into the subsurface formation **630** associated with field **610**.

[0123] Also, as a result of passing the production gas stream **612** through the dehydration vessel **620**, a substantially dehydrated raw gas stream **624** is produced. The raw gas stream
10 **624** preferably contains methane and, possibly, trace amounts of ethane, nitrogen, helium and other light gases.

[0124] The raw gas stream **624** may be passed through a pipeline, for example, from an offshore treating facility to an onshore treating facility. The gas may then be passed through a solid adsorbent bed **625** to further dehydrate the gas in the gas stream **624**. Removing water
15 from the raw gas stream **624** helps ensure that neither hydrates nor ice form in the subsequent chilling or cryogenic facilities.

[0125] The solid adsorbent bed **625** may be a molecular sieve bed. A "molecular sieve" refers to a material containing tiny pores of a precise and substantially uniform size. In the present context, such sieves are used as an adsorbent for gases and/or liquids. Molecular
20 sieves often consist of solid materials and not polymeric materials. Exemplary materials include alumino-silicate minerals, clays, porous glasses, micro-porous charcoals, zeolites, active carbons, or synthetic compounds that have open structures through which small molecules, such as nitrogen and water, can diffuse. Polar molecules (such as water molecules) that are small enough to pass into the pores are adsorbed, while slightly
25 polarizable molecules (such as methane and nitrogen), as well as larger molecules (e.g., propane and butane) flow around the particles and crystallites, and are thus passed downstream. In the present case, the molecular sieve bed **625** adsorbs water molecules and allows light gases to pass through.

[0126] The raw gas stream **624** next passes through a refrigeration unit **626**. The
30 refrigeration unit **626** chills the dehydrated raw gas stream **624** down to a temperature of about -30° F to -40° F. The refrigeration unit **626** may be, for example, an ethylene or a propane refrigerator.

- 25 -

[0127] The raw gas stream **624** is next preferably moved through an expansion device **628**. The expansion device **628** may be, for example, a Joule-Thompson ("J-T") valve. The expansion device **628** serves as an expander to obtain further cooling of the raw gas stream **624**. The expansion device **628** further reduces the temperature of the dehydrated raw gas stream **624** down to, for example, about -70° F to -80° F. Preferably, at least partial liquefaction of the gas stream **624** is also accomplished.

[0128] The chilled raw gas stream **624** next enters a cryogenic distillation tower **640**. The cryogenic distillation tower may be any tower that operates to distill methane from acid gases through a process that intentionally freezes CO₂ particles. The cryogenic distillation tower may be, for example, tower **100** of **Figure 1**. The chilled raw gas stream **624** enters the vessel at about 500 to 600 psig.

[0129] The distillation tower **640** includes a lower stripping section (seen as section **106** in **Figure 1**). The distillation tower **640** also includes a controlled freezing zone (seen as section **108** in **Figure 1**) where vapor is contacted with cold reflux liquid (primarily methane). This causes CO₂ to freeze out of the gas phase. The remaining methane and other gas phase components vaporize and rise upward towards an upper rectification section (seen as section **110** of **Figure 1**). There, residual H₂S and CO₂ are further removed from the gas phase. In one aspect (not seen), a "split tower" is used in which the rectification section **110** is in a separate vessel from the stripping section **106** and the controlled freezing zone **108**.

[0130] As explained in connection with **Figure 1**, the acid gases are removed from the distillation tower **640** as a bottom liquefied acid gas stream **642**. This liquid stream **642** may optionally be sent through a reboiler **643** where gas containing trace amounts of methane is redirected back into the tower as gas stream **644**. The remaining liquid comprised primarily of acid gases is released through acid gas line **646**. The liquefied acid gas in line **646** may be vaporized, depressured, and then sent to a sulfur recovery unit (not shown). Alternatively, the liquefied acid gas may be injected into a subsurface formation through one or more acid gas injection (AGI) wells as indicated by block **650**. In this instance, the acid gas in line **646** is preferably passed through a pressure booster **648**.

[0131] Methane is released from the distillation tower **640** as an overhead methane stream **662**. The overhead methane stream **662** will preferably comprise no more than about 2% carbon dioxide. At this percentage, the overhead methane stream **662** may be used as fuel gas or may be sold into certain markets as natural gas. However, in accordance with certain

- 26 -

methods herein, it is desirable that the overhead methane stream **662** undergo further processing.

[0132] As indicated above, the overhead methane stream **662** is passed through an open loop refrigeration system. First, the overhead methane stream **662** is passed through a heat exchanger **664**. This serves to pre-cool a reflux stream **680** that is reintroduced into the cryogenic distillation tower **640**. The overhead methane stream **662** is then sent through a compressor **666** to increase its pressure.

[0133] Next, the pressurized methane stream **662**, heated by compression, is cooled. This may be done through, for example, passing the methane stream **662** through an aerial cooler **668**. A cool and pressurized methane stream is produced.

[0134] A part of the cooled and pressurized methane stream leaving the cooler **668** is split into a reflux stream **680**. The reflux stream **680** is further cooled in cross-exchanger **664**, then expanded through device **682** to generate liquid reflux stream **684**. The liquid reflux stream **684** enters the distillation tower **640** where it is used as reflux, and ultimately in the sprays to freeze out CO₂ and other acid gas particles from the dehydrated gas stream **624**. Sufficient reflux is generated such that a CO₂ or H₂S specification is partially met at the top of the tower **640**. The liquid reflux stream **684** from expander **682** may be injected directly into the spray nozzles in the controlled freezing zone. More preferably, the liquid reflux stream **684** is first routed to the rectification section of the distillation tower **640** in order to further reduce the CO₂ concentration in the overhead gas. In either instance, the chilled reflux stream **680** preferably passes through an expansion valve or turboexpander **682** to generate liquid.

[0135] Returning to the overhead methane stream **662**, the overhead methane stream **662** may be passed through one or more expansion valves or turboexpanders. An expansion valve is shown at **670** in **Figure 6**. The expansion valve or (turboexpander) **670** decreases the pressure of the gas stream **662** and cools it further in preparation of liquefaction to generate LNG. A cooled gas stream **672** is thus created.

[0136] It is understood that specifications for liquefied natural gas, or LNG, may require that the acid gas concentration be lower than 2 mol. percent. LNG-specifications typically permit no more than 50 ppm CO₂ and 4 ppm H₂S. Accordingly, in accordance with the present methods, the pre-LNG stream **672** is sent to a solid adsorbent bed **674** as a post-processor for further acid gas removal. Preferably, the solid adsorbent bed **674** is a molecular sieve bed. Certain molecular sieves such as 4-Angstrom and 5-Angstrom beds can be used to

- 27 -

remove CO₂ as well as H₂O from a methane gas stream. Mercaptans may also be removed. The overhead methane stream **672** is at high pressure and relatively cool, which helps facilitate the adsorption of CO₂ on the solid adsorbent bed **674**.

[0137] The solid adsorbent bed **674** may be a molecular sieve bed that employs pressure swing adsorption. Pressure swing adsorption, or PSA, refers to a process wherein a contaminant is adsorbed onto a solid adsorbent, then removed from the adsorbent by decreasing the pressure. In the case of acid gas removal, CO₂ may be removed from a sour gas. In one aspect, the pressure swing adsorption bed is a rapid-cycle, pressure swing adsorption, or RCPSA, bed. An RCPSA vessel is particularly advantageous as it is compact relative to a standard PSA device. PSA's are used for a variety of gas separations, for example, for removal of impurities from hydrogen streams in refinery service. Such systems are manufactured, for example, by QuestAir of British Columbia, Canada.

[0138] The solid adsorbent used in a molecular sieve bed may be fabricated from any one of several materials. Preferably, zeolites are used. Zeolites are crystalline materials composed of silicon and aluminum. Alternatively, the post-processor may be a vessel that uses an adsorbent that relies on the rate at which certain species are adsorbed relative to other species. This is known as adsorptive kinetic separation (AKS). After CO₂ saturation, the zeolite or other bed material may be regenerated or cleaned. This may be done, for example, by lowering pressure on the bed and releasing acid gases, or by passing a hot gas through it. The hot gas may be, for example, a hot methane gas or heated nitrogen. The hot methane gas may be captured and then used as process fuel such as for operating refrigeration equipment, assuming that the H₂S content is sufficiently low.

[0139] Molecular sieve beds are ideal for post-processing inasmuch as the overhead methane stream **662** is already quite clean. No additional pretreatment is required for reaching an LNG-specification gas stream **672**. Further, there is no need for a sacrificial layer of material in the packed bed.

[0140] In lieu of a molecular sieve bed, other types of post-processors (not shown) may also be employed in connection with the gas processing system **600**. For example, one or more vessels that applies chemical solvents to absorb acid gases may be used. Alternatively, the post-processor may be one or more vessels that apply physical solvents or ionic solvents to remove residual CO₂. An advantage to these solvents is that they are not aqueous-based, so no further dehydration should be required of the overhead methane stream **662**. Of course,

- 28 -

the addition of a solvent-based system as the post-processor will add significantly to the equipment count and is therefore not preferred.

[0141] It can be seen that the post-processor allows for optimization of a cryogenic acid gas removal system by trading reduced liquid reflux (that is, reducing refrigeration capacity and horsepower) with a downstream molecular sieve bed **674** or other post-processor to pick up additional CO₂, as well as H₂S. Thus, the overhead methane stream **662** may exceed a 50 ppm LNG specification for LNG, and a 4 ppm H₂S specification for LNG, knowing that the downstream post-processor **674**, e.g., molecular sieve bed, will remove additional acid gas to bring the final gas product into compliance with specifications.

10 [0142] In whatever form, the post-processor generates a final sales gas stream **676**. The final sales gas stream is suitable for a downstream liquefaction process, ultimately resulting in the sale of liquefied natural gas, or LNG.

[0143] **Figures 7A, 7B and 7C** together present a flow chart. The flow chart presents a method **700** for removing acid gases from a raw gas stream using an acid gas removal system in accordance with the present inventions, in one embodiment.

[0144] The method **700** first includes receiving a raw gas stream. This step is shown at Box **705**. The raw gas stream is received as a result of hydrocarbon producing activities. Stated another way, the raw gas stream has been produced from a subsurface reservoir and brought to the surface for processing.

20 [0145] In accordance with the method **700**, the raw gas stream contains compressible hydrocarbons. These primarily represent methane. However, trace amounts of ethane, nitrogen, helium and other light gases may also be present. The raw gas stream further contains acid gases. The acid gases may comprise carbon dioxide, hydrogen sulfide, mercaptans, or other contaminants. The acid gas content of the raw gas stream may represent, for example, anywhere from about 5 to 60 mol. percent of the total gas stream.

[0146] In its produced form, the raw gas stream most likely also contains water or brine. Therefore, as part of the method **700** the raw gas stream is taken through a dehydration process. In one aspect, the raw gas stream is optionally passed through a first molecular sieve bed. This step is shown at Box **710**.

30 [0147] In the present application, the molecular sieve bed adsorbs water molecules from the raw gas stream. Thus, the molecular sieve bed in step **710** acts as a desiccant. Molecular sieve beds for adsorbing water are available from various sources such as Texas Technologies, Inc. of Cedar Park, Texas and Eurecat U.S. of Houston, Texas.

- 29 -

[0148] After dehydration, the raw gas stream may be passed through a refrigeration system. This step is shown at Box 715. This may be done, for example, by moving the gas stream through a chiller such as refrigeration unit 150 of Figure 1. This may optionally be followed by passing the raw gas stream through an expander such as expansion device 152.

5 The expander provides further cooling of the raw gas stream.

[0149] In accordance with the method 700, the raw gas stream is next scrubbed of acid gases. This is accomplished by passing the raw gas stream through a cryogenic distillation tower. The step of passing the raw gas stream through a cryogenic distillation tower is shown in Box 720.

10 [0150] The cryogenic distillation tower may be any tower that operates to distill methane or other light hydrocarbon gases from acid gases through a process that involves intentionally freezing CO₂ particles. The cryogenic distillation tower may be, for example, tower 100 of Figure 1. The frozen CO₂ particles are preferably collected on a melt tray at the bottom of the spray section of the distillation tower. As the particles melt and turn to liquid, the liquid
15 may cascade down through a series of trays or downcomers. This causes additional methane to break out of solution and to move upward through the tower as a vapor, as described above. The remaining CO₂-enriched liquid is then captured as a bottom liquefied acid gas stream including any hydrogen sulfide.

[0151] As a result of processing the raw gas stream through the cryogenic distillation
20 tower, an overhead methane stream is produced. The overhead methane stream will preferably comprise no more than 5 mol. percent and, more preferably, no more than about 2 mol. percent carbon dioxide.

[0152] The method 700 next includes refrigerating the overhead methane stream. The step of refrigerating the overhead methane stream is shown in Box 725 of Figure 7A. The
25 purpose of cooling the overhead methane stream is to at least partially liquefy the methane therein.

[0153] The overhead methane stream is cooled using a refrigeration system. The system may be, for example, an external, closed-loop refrigeration unit such as an ethylene or propane refrigeration unit 170 in Figure 1. Another example of a closed loop refrigeration
30 system is a series of propane and ethylene-cascaded chillers. Alternatively, the refrigeration system may be an open loop refrigeration system such as any of the open loop refrigeration systems shown in U.S. Pat. No. 6,053,007. In one aspect, an open loop refrigeration system is used wherein the overhead methane stream 14 takes heat from the returning liquid stream

- 30 -

through a heat-exchanger, and is then compressed. The compressed gas is then cooled to near ambient temperatures using aerial coolers or, possibly, a seawater cooler. The gas may be further cooled to sub-ambient temperatures using a propane chiller, for example. An open loop refrigeration system is shown in and described in connection with **Figure 6**.

5 [0154] The method **700** next includes separating out at least a portion of the overhead methane stream to generate liquid reflux. This step is provided in **Box 730** of **Figure 7B**. The process of separating out part of the overhead methane stream is preferably done after the methane stream has been at least partially liquefied. In another aspect, the partially liquefied overhead methane stream (such as stream **14**) is carried through a separator (such as
10 reflux condenser or separator **172**). The separator creates a gas stream **16** and a liquid stream **18**. Some or all of the liquid stream **18** is reintroduced into the tower **100** as the liquid reflux.

[0155] In connection with refrigerating the overhead methane stream, and as implied above, a refrigeration system is operated. The step of operating the refrigeration system is shown at **Box 735**. One purpose for operating the refrigeration system is to generate a
15 quantity of liquid reflux that will remove a desired percentage of the acid gases from the raw gas stream. Those of ordinary skill in the art will understand that a correlation exists between the quantity of the liquid reflux injected back into the cryogenic distillation tower and the efficiency with which carbon dioxide solids are precipitated out of the vapor stream within the cryogenic distillation tower. The more vigorously the liquid methane is refrigerated and
20 the greater the quantity of liquid reflux **18** is generated, the more effective the cryogenic distillation tower will precipitate out carbon dioxide and other acid gases. However, refrigeration equipment is expensive, and the lower the temperature of the liquid reflux and the more liquid reflux generated, the more energy and equipment are required.

[0156] Under step **735**, the operator or process designer intentionally does not generate so
25 much liquid reflux as to remove all of the acid gases. Stated another way, a quantity of liquid reflux is set to remove most but not all of the carbon dioxide. For example, the quantity of the liquid reflux may be set to bring the carbon dioxide content of the raw gas stream down to about 2 to 5 mol. percent. Alternatively, the temperature of the liquid reflux may be set to bring the carbon dioxide content down to pipeline specifications. It is understood that the
30 temperature will be set by the operating pressure. More specifically, temperature is set based upon an optimization between operating pressure, the number of trays in the upper distillation section, or "rectification section," and the amount of reflux liquid used. In any event, energy

- 31 -

otherwise required of the refrigeration system to bring the overhead methane stream into LNG specifications is conserved.

[0157] In one embodiment of the method **700**, sufficient refrigeration is provided in step **735** to provide a quantity of liquid reflux that will remove carbon dioxide from the overhead methane stream down to a percentage of about 0.5 to 2.0 mol. percent. This represents a first selected composition. Thereafter, the post-processor removes carbon dioxide from the overhead methane stream down to a level of about 50 to 200 ppm. This represents a second selected composition.

[0158] In one potential embodiment, CFZ refrigeration is minimized by utilizing only enough liquid reflux (generated by either external refrigeration, or via the open-loop process, or from an LNG plant) to freeze the inlet concentration of CO₂ down to about 2% CO₂ at the top of the spray section. The post-processor then removes additional CO₂ below 2% to, for example, LNG requirements. Thus, the refrigeration step **735** provides a trade-off of refrigeration requirements with molecular sieve equipment during normal operations.

[0159] The method **700** next includes injecting at least a portion of the liquid reflux back into the cryogenic distillation tower. This step is shown at Box **740** of **Figure 7B**. The step **740** of injecting liquid reflux into the cryogenic distillation tower is presented, for example, through line **21** of **Figure 1** and line **680** of **Figure 6**. The purpose for injecting the liquid reflux back into the cryogenic distillation tower is to provide very cold fluid within the tower that causes carbon dioxide to precipitate out of methane vapor as a solid.

[0160] In one aspect, the separated liquid reflux **18** drops down through trays and ultimately becomes cold liquid spray **21**. In another embodiment, the portion of the overhead methane stream that becomes liquid reflux may be directly injected into the distillation tower such as through liquid line **680** from gas processing system **600**. In either instance, the liquid stream **21** or **680** preferably undergoes pressure boosting, such as through booster **176** of **Figure 1**.

[0161] In one arrangement, the liquid methane is re-injected into the column **640** at a temperature of, for example, about -120° F to -140° F. However, the operating conditions under which an acid gas component of the raw gas stream will freeze out is a function of a number of variables. These include, for example, the raw gas stream composition, the chemical character of the freezable acid gas component, and the separation system's temperature and pressure. Beneficially, the solid forming conditions for any freezable

- 32 -

component of the raw gas stream may be determined through the use of commercially available process simulation software.

[0162] Next, the portion of the overhead methane stream that is not separated out as liquid reflux is passed through a non-cryogenic post-processor. This step is shown in Box 745. The purpose of passing the remaining overhead methane stream through the molecular sieve bed 674 is to further remove acid gases. The result is a final gas stream that has less than about 200 ppm carbon dioxide. More preferably, the CO₂ content is less than about 50 ppm.

[0163] In one aspect, the carbon dioxide content meets pipeline specifications. Alternatively, the carbon dioxide content meets liquefied natural gas (LNG) standards, that is, less than 50 ppm CO₂ and less than about 4 ppm H₂S. The LNG may be imported from another country and offloaded in the United States at an import terminal.

[0164] The non-cryogenic post-processor may be one of a number of different types of vessels or acid gas removal systems for removing carbon dioxide from a methane gas stream. Preferably, the pre-processor is a molecular sieve bed. The molecular sieve bed may be, for example, a 4-Angstrom or a 5-Angstrom bed that is capable of removing carbon dioxide from a methane gas stream. However, the post-processor may alternatively be one or more vessels that employs chemical solvents to strip acid gas from the methane stream. Alternatively, the post-processor may be one or more vessels that contacts ionic liquids or physical solvents with the methane to remove residual carbon dioxide.

[0165] When a molecular sieve bed is used as the post-processor, it is preferably introduced to the acid gas removal system in a substantially clean state. During the course of operation the sieve bed becomes saturated with carbon dioxide. Of interest, in the present method 700, the molecular sieve bed that has become saturated with carbon dioxide may serve as a second molecular sieve bed to replace the first molecular sieve bed from step 710. This takes place when the first molecular sieve bed has become saturated with water. The step of replacing the first molecular sieve bed with the second molecular sieve bed is demonstrated in Box 750.

[0166] It is noted that a molecular sieve bed will preferentially displace carbon dioxide by adsorbing water vapor. This is because water is more strongly adsorbed than CO₂. Consequently, water vapor will displace or desorb CO₂ that has been previously adsorbed on a molecular sieve bed. This means that the second molecular sieve bed (saturated with adsorbed carbon dioxide) may be installed as the first molecular sieve bed for dehydration purposes, without undergoing a prior regeneration process. The second molecular sieve bed

- 33 -

will now dehydrate the raw gas stream and pass displaced carbon dioxide into the cryogenic distillation tower. Since the amount of CO₂ released from the second molecular sieve bed into the tower is relatively small, the distillation tower can process it with little or no loss in capacity. Thus, an inherent synergy is created between molecular sieve beds used upstream
5 and downstream with the method 700.

[0167] It is understood that the first molecular sieve bed from step 710 that has now become saturated with water must undergo a dedicated regeneration process. The regeneration step is indicated at Box 755 in Figure 7C. Regeneration of a hydrated sieve bed typically involves directing a heated gas through and across the molecular sieve bed. The
10 heated gas may be methane gas from, for example, sales gas stream 676, or heated nitrogen. Thereafter, the molecular sieve bed is cooled and set aside for later service. In the present method 700, later service means CO₂ removal downstream of the distillation tower, e.g., a post-processor or post-polishing bed.

[0168] The method 700 may also include the step of replacing the second molecular sieve
15 bed (used downstream of the cryogenic distillation tower) with a third molecular sieve bed. This step is shown at Box 760. The third molecular sieve bed may be a new sieve bed. Alternatively, the third molecular sieve bed may be a bed that has been regenerated from a previous service, such as a bed regenerated from step 755.

[0169] It is understood that the rate of saturation for a molecular sieve bed may be
20 different when adsorbing water than when adsorbing acid gases such as CO₂ and H₂S. The rate of saturation for any molecular sieve bed depends on such variables as the fluid flow rates, the respective concentrations of contaminants within the fluids, and the capacity for adsorbing the different contaminants. In the present context, this means that the first molecular sieve bed (which adsorbs primarily water in connection with step 710), and the
25 second molecular sieve bed (which adsorbs primarily CO₂ in connection with step 740), may not become saturated at the same time. In general, a molecular sieve bed's capacity is substantially lower for H₂S and CO₂ than for water vapor. However, there may be a greater quantity of water than CO₂, for example. In any case, more than two molecular sieve beds are to be included in a rotation for continuous operation.

30 [0170] In one mode of operation, three molecular sieve beds are placed into service. One bed would be in dehydration service; another would be in post-polishing service; and a third bed would be undergoing regeneration. Regeneration would, of course, include heating, followed by cooling, followed by placement in standby mode. This process of using three

- 34 -

molecular sieve beds advantageously compares with the known use of a minimum of four sieve beds wherein the dehydration and polishing services are kept separate.

[0171] **Figure 7C** shows a step **765** of placing the regenerated first molecular sieve bed in waiting to replace the third molecular sieve bed. Replacement takes place when the third
5 molecular sieve bed becomes saturated with carbon dioxide, or when some subsequent replacement sieve bed becomes saturated with carbon dioxide. Alternatively, replacement may be driven by saturation of the sorbent bed in desiccation service.

[0172] In one aspect, four molecular sieve beds are employed in a rotation. A first sieve bed is employed for CO₂ removal service for the overhead methane stream. A second sieve
10 bed, which was previously in CO₂ removal service for the overhead gas, is now in dehydration service for the raw gas stream. The third sieve bed is being regenerated. This is typically done by heating the third bed with a purge gas. The purge gas is usually passed through the third bed in a counter-flow direction at a lower pressure. The fourth bed is in cool-down mode after having been in regeneration. Cooling is typically done by flowing a
15 cool gas across the fourth bed. The fourth molecular sieve bed will be switched to CO₂-removal service as soon as the first sieve bed is substantially saturated with carbon dioxide. In this way the rotation continues.

[0173] In connection with the method **700** for removing acid gases from a raw gas stream, the cycle times related to steps **750** and **760** may be set. The operator should have an
20 understanding as to how long it takes the solid adsorbent bed upstream of the distillation tower to become hydrated, that is, saturated with water, and how long it takes the solid adsorbent bed downstream of the distillation tower to become saturated with CO₂. The cycle times should be set to prevent a "breakthrough" of water or acid gases from the respective beds, even in the most extreme feed conditions. This means that some part of the respective
25 beds may not be fully utilized for adsorption.

[0174] It is also noted that material such as zeolite that is used in solid adsorbent beds tends to become less active or less adsorptive over time. The adsorptive material will be more effective at the start of a run ("SOR") than at the end of a run ("EOR"). This means that the solid adsorbent beds may need to be cycled more frequently as time goes on. Thus, in one
30 aspect, cycle times related to steps **750** and **760** are progressively shortened.

[0175] Fixed cycle-time control is applicable whether the solid adsorbent bed (such as dehydration bed **625**) is a molecular sieve bed or a pressure swing adsorption bed. It is understood that for pressure swing adsorption processes, cycle times will be much shorter.

- 35 -

For example, cycle times for pressure swing adsorption beds tend to be on the order of minutes or even seconds rather than hours.

[0176] It is preferred that the cycle times be controlled through a control system. Thus, in one aspect the gas processing system **600** includes a control system. The control system may, for example, control regeneration of the solid adsorbent bed **625** used for dehydration to ensure that measurable "breakthrough" of water does not occur during the dehydration process. The control may be done based on fixed time schedules. For example, the second bed described above may be in dehydration service for 12 hours, while the third bed undergoes regeneration for 6 hours. The fourth bed may undergo cooling for three hours, and then be placed in standby for three hours. The regenerated and cooled fourth bed is then put into service while the first bed is taken out of service and put into dehydration service.

[0177] In one aspect, the control system employs a "feed-forward" control scheme. **Figure 8A** provides a schematic diagram of a control system **800A** that uses feed-forward control. In **Figure 8A**, the solid adsorbent bed **625** from system **600** used for dehydration is seen. In addition, the partially dehydrated raw gas stream **624** is indicated. The raw gas stream **624** is being directed into the bed **625** for further dehydration. The raw gas stream **624** is ultimately processed in an acid gas removal system having a cryogenic distillation tower. An acid gas removal system is shown schematically at **850** receiving a further dehydrated acid gas stream **820** from the bed **625**.

[0178] The control system **800A** may first include a flow meter **805**. The flow meter **805** is placed along the raw gas stream **624**. The flow meter **805** measures the flow rate of the raw gas stream **624** into the solid adsorbent bed **625**. The control system **800A** also includes a measurement device **810**. The measurement device **810** is used to measure the concentration of water in the raw gas stream **624**. The measurement device **810** may be, for example, one where the change in dielectric constant of alumina is measured as a function of the moisture adsorbed thereon. Note that the measurement device **810** is optional. In this respect, the concentration of water vapor may be known indirectly. For example, if the water content upstream is controlled by cooling the gas, it may be assumed that the gas is saturated with water at the cooler's temperature.

[0179] Using the detected flow rate of the acid gas stream **624** and the measured or known water vapor concentration, the operator may multiply these values to determine the total quantity of contaminant, i.e., water, that has gone to the solid adsorbent bed **625** over a period of time. By comparing this quantity to a model calculation of the bed capacity (optionally

- 36 -

taking its age into account), it is possible to determine a more optimal cycle time. This may be done automatically by using a distributed control unit **811**.

[0180] An alternative means of modifying the cycle is to provide a measurement device capable of on-line measurement of the water content near the effluent of the solid adsorbent bed **625** used for dehydration. A control system **800B** that uses such a measurement device is provided in **Figure 8B**. The control system **800B** uses a direct feedback control.

[0181] **Figure 8B** provides a schematic diagram of a control system **800B** that uses a direct feedback control. In **Figure 8B**, the solid adsorbent bed **625** from system **600** used for dehydration is again seen. In addition, partially dehydrated raw gas stream **624** is indicated. The raw gas stream **624** is being directed into the bed **625** for further dehydration. The raw gas stream **624** is ultimately processed (after further dehydration using bed **625**) in the acid gas removal system **850**.

[0182] Unlike control system **800A**, the control system **800B** does not include a flow meter. However, the control system **800B** does include a measurement device **810'**. Instead of measuring the concentration of acid gases in the raw gas stream **624**, the measurement device **810'** measures the concentration of water above the exit to the solid adsorbent bed **625**. The measurement device **810'** samples effluent immediately inside the bed **625** or just above an outlet **815**. In this way, the adsorbent can be switched before any contaminant, i.e., water, passes the outlet **815**. Preferably, the measurement device **810'** is placed about a foot above a bottom of the solid adsorbent bed **625** to avoid any leakage of water vapor into the treated gas.

[0183] The measurements taken by the measurement device **810'** are sent to a control unit **811**. The control unit **811** comprises a central processing unit, or CPU. The CPU may be implemented as any type of processor including commercially available microprocessors from companies such as Intel, AMD, Motorola, Hitachi and NEC. The control unit **811** receives water measurements from the measurement device **810'** and determines if the bed **625** is close to water breakthrough. If the bed **625** is close to full capacity, the control unit **811** sends the appropriate signal to end the dehydration service cycle for that bed. The next solid adsorbent bed (that is, a bed that has been in acid gas removal service) is then placed into dehydration service.

[0184] The control systems **800A** and **800B** are demonstrated in the context of measuring water concentrations in connection with the operation of a solid adsorbent bed used for dehydration. Such a solid adsorbent bed is used in the present context upstream of a

- 37 -

cryogenic distillation tower. However, the control systems **800A** and **800B** may likewise be used in connection with the operation of a solid adsorbent bed used for removal of CO₂ from an overhead methane stream. Such a solid adsorbent bed is used in the present context downstream of the cryogenic distillation tower.

5 [0185] The use of molecular sieve equipment downstream from a cryogenic distillation tower is not only advantageous for reducing acid gas concentrations to meet LNG specifications during normal operations, but may also be utilized to initially remove CO₂ from the raw gas stream during “dirty” startup. Such a system is described more fully in connection with U.S. Pat. No. 5,062,270. Figure 1 of that patent and the accompanying
10 textual description are referred to and incorporated herein by reference.

[0186] In operation, the raw gas stream is initially fed into a dehydration vessel (such as dehydration vessel **620**). Prior to entering the distillation tower, the gas stream is next passed through refrigeration equipment in order to generate a chilled raw gas stream. The refrigeration equipment may comprise a propane chiller that lowers the temperature of the
15 raw gas stream to about -35° F. The refrigeration equipment may also include an inlet chiller that further reduces the temperature of the raw gas stream to about -40° F to -65° F. The refrigeration equipment may also include an expansion device to provide still further cooling of the dehydrated gas. The expansion device may be a turbo expander, a hydraulic turbine or a Joule-Thompson valve. The expansion device further reduces the temperature of the raw
20 gas stream to about -112° F to -123° F.

[0187] The dehydrated and chilled gas stream is next fed into the distillation tower. The distillation tower operates to separate the raw gas stream into an overhead methane stream and a bottom acid gas stream, as discussed above in connection with either of towers **100** or **640**. The entire reflux plus sales stream is treated with the downstream molecular sieve bed.

25 [0188] The distillation column (such as tower **640**), including the rectification section and the cross-exchanger (such as cross-exchanger **664**) are cooled by initiating the refrigeration systems upstream of the column, but not making them so cold as to generate solid CO₂ on heat transfer surfaces within the chillers. During this time, sweetened methane gas is released from the column overhead and then flowed through the solid adsorbent bed downstream of
30 the column in order to remove CO₂. The gas is then recycled to the inlet of the column such that a progressively lower CO₂ content is achieved. Once the CO₂ content is low enough to meet initial pipeline specifications, the refrigeration can be adjusted to normal levels, as there

- 38 -

will not be sufficient CO₂ in the gas to freeze out on the heat transfer surfaces within the heat exchangers.

[0189] It is noted that no gas goes to the sales pipeline (or LNG plant) while gas is being recycled through the column. Post-polishing removes just enough CO₂ so that inlet piping
5 and internal components of the distillation tower do not accumulate solids during the latter stages of start-up. Stated another way, gas containing high levels of CO₂ is not initially exposed to cold surfaces within the distillation tower or the cross-exchanger where CO₂ may freeze and cause plugging. Once appropriate CO₂ concentration profiles are established, the sweetened gas can be processed through the refrigeration system and the molecular sieve bed
10 downstream of the column, with a substantial portion of the overhead methane product going to sales or to an LNG process.

[0190] It is also noted that during start-up, a portion of the polished gas is delivered to the distillation tower as liquid reflux. The molecular sieve bed removes CO₂ to low levels so that the distillation tower will not freeze out significant CO₂ as the liquid reflux is sprayed down
15 through the rectification section.

[0191] While it will be apparent that the inventions herein described are well calculated to achieve the benefits and advantages set forth above, it will be appreciated that the inventions are susceptible to modification, variation and change without departing from the spirit thereof. Improvements to the operation of an acid gas removal process using a controlled
20 freezing zone are provided. The improvements provide a design for the removal of CO₂ down to very low levels in the product gas. The inventions herein also reduce the refrigeration requirements of cryogenic distillation towers while meeting LNG specifications for maximum allowable CO₂

CLAIMS

What is claimed is:

1. A system for removing acid gases from a raw gas stream, comprising:
 - a cryogenic distillation tower, the tower having a lower distillation zone and an
 - 5 intermediate controlled freezing zone that receives a cold liquid spray comprised primarily of methane, the tower receiving and then separating the raw gas stream into an overhead methane stream and a bottom liquefied acid gas stream;
 - refrigeration equipment downstream of the cryogenic distillation tower for cooling the overhead methane stream and returning a portion of the overhead methane stream to the
 - 10 cryogenic distillation tower as liquid reflux;
 - at least one solid adsorbent bed upstream of the cryogenic distillation tower for at least partially dehydrating the raw gas stream;
 - a solid adsorbent bed downstream of the cryogenic distillation tower for adsorbing at least some remaining acid gases from the cooled overhead methane stream; and
 - 15 at least one regenerated solid adsorbent bed to replace the at least one solid adsorbent bed downstream of the cryogenic distillation tower when the at least one solid adsorbent bed downstream of the cryogenic distillation tower becomes substantially saturated with carbon dioxide; and
 - wherein the refrigeration equipment is designed to generate liquid reflux in a
 - 20 sufficient quantity to remove acid gases from the raw gas stream within the cryogenic distillation tower down to a first selected composition, and deliver the overhead methane stream to the solid adsorbent bed downstream of the cryogenic distillation tower to remove the remaining acid gases down to a second selected composition.
- 25 2. The system of claim 1, wherein:
 - the acid gases comprise carbon dioxide;
 - the quantity of the generated liquid reflux is sufficient to remove carbon dioxide from the raw gas stream down to a first composition of about 1 to 4 mol. percent; and
 - the solid adsorbent bed downstream of the cryogenic distillation tower removes
 - 30 additional carbon dioxide from the overhead methane stream down to a second composition of about 0.2 to 3.0 mol. percent.
3. The system of claim 1, further comprising a control system for controlling cycle times of the at least one solid adsorbent bed upstream of the distillation tower.

- 40 -

4. The system of claim 3, wherein the control system comprises:
a measurement device for measuring the composition of water in the raw gas stream upstream of the at least one solid adsorbent bed upstream of the distillation tower; and
5 a flow meter for measuring the rate of flow of the raw gas stream into the solid adsorbent bed upstream of the distillation tower.
5. The system of claim 3, wherein the control system comprises:
a measurement device for measuring the composition of water above the effluent of
10 the at least one solid adsorbent bed upstream of the distillation tower; and
the control system is configured to shut off the flow of fluids through the solid adsorbent bed upstream of the distillation tower when the measurement device senses a predetermined level of water.
- 15 6. The system of claim 1, wherein:
the quantity of the generated liquid reflux is sufficient to remove carbon dioxide from the raw gas stream down to a first composition that meets pipeline specifications; and
the solid adsorbent bed downstream of the cryogenic distillation tower removes carbon dioxide from the overhead methane stream down to the second selected acid gas
20 composition that meets LNG specifications.
7. The system of claim 2, wherein the solid adsorbent bed downstream of the cryogenic distillation tower removes carbon dioxide from the overhead methane stream down to a composition less than about 100 ppm.
25
8. The system of claim 7, wherein the solid adsorbent bed downstream of the cryogenic distillation tower removes carbon dioxide from the overhead methane stream down to a composition less than about 50 ppm.
- 30 9. The system of claim 2, wherein the solid adsorbent bed downstream of the cryogenic distillation tower is a molecular sieve bed.

- 41 -

10. The system of claim 9, wherein:
the acid gases further comprises hydrogen sulfide; and
the molecular sieve bed downstream of the cryogenic distillation tower removes hydrogen sulfide from the overhead methane stream down to a composition less than about
5 10 ppm.
11. The system of claim 10, wherein the molecular sieve bed downstream of the cryogenic distillation tower removes hydrogen sulfide from the overhead methane stream down to a composition less than about 4 ppm.
10
12. The system of claim 2, further comprising:
one or more vessels downstream of the cryogenic distillation tower for further separating carbon dioxide from methane using either (i) ionic liquids, (ii) physical solvents, or (iii) chemical solvents.
15
13. The system of claim 9, wherein:
the at least one solid adsorbent bed upstream of the cryogenic distillation tower is a molecular sieve bed; and
the at least one additional solid adsorbent bed in reserve is also a molecular sieve bed.
20
14. The system of claim 1, wherein the refrigeration equipment comprises:
an open loop refrigeration system, or
a closed loop refrigeration system.
- 25 15. The system of claim 1, wherein:
the raw gas stream further comprises nitrogen; and
the system further comprises a solid adsorbent bed downstream of the cryogenic distillation tower for adsorbing at least some nitrogen from the cooled overhead methane stream.
30
16. The system of claim 1, wherein the at least one solid adsorbent bed downstream of the cryogenic distillation tower is configured to replace the at least one solid adsorbent bed upstream of the cryogenic distillation tower in a regeneration cycle.

- 42 -

17. A method for removing acid gases from a raw gas stream, comprising:
providing a cryogenic distillation tower, the tower having a lower distillation zone
and an intermediate controlled freezing zone that receives a cold liquid spray comprised
5 primarily of methane;
receiving the raw gas stream into the cryogenic distillation tower;
separating the raw gas stream in the cryogenic distillation tower into an overhead
methane stream and a bottom acid gas stream;
passing the overhead methane stream through a refrigeration system downstream of
10 the cryogenic distillation tower, the refrigeration system cooling the overhead methane
stream;
returning a first portion of the cooled overhead methane stream to the cryogenic
distillation tower as liquid reflux to serve as the cold liquid spray;
passing a second portion of the cooled overhead methane stream through a solid
15 adsorbent bed downstream of the cryogenic distillation tower so as to remove additional acid
gases and to generate a polished gas stream; and
designing the refrigeration system to produce liquid reflux at a sufficient quantity as
to remove acid gases from the raw gas stream within the cryogenic distillation tower down to
a first selected composition, and deliver the overhead methane stream to the solid adsorbent
20 bed downstream of the cryogenic distillation tower to remove additional acid gases down to a
second selected composition.
18. The method of claim 17, wherein:
the acid gases comprise carbon dioxide;
25 the quantity of the generated liquid reflux is sufficient to remove carbon dioxide from
the raw gas stream down to a first composition of about 1 to 4 mol. percent; and
the solid adsorbent bed downstream of the cryogenic distillation tower removes
additional carbon dioxide from the overhead methane stream down to a second composition
of about 0.2 to 3.0 mol. percent.
30
19. The method of claim 17, wherein:
the quantity of the generated liquid reflux is sufficient to remove carbon dioxide from
the raw gas stream down to the first composition that meets pipeline specifications; and

- 43 -

the solid adsorbent bed downstream of the cryogenic distillation tower removes carbon dioxide from the overhead methane stream down to the second selected composition that meets LNG specifications.

5 20. The method of claim 19, wherein the pipeline specifications require a carbon dioxide content that is less than about 3.0 mol. percent.

21. The method of claim 19, wherein the LNG specifications require a carbon dioxide content that is less than about 50 ppm.

10

22. The method of claim 19, wherein the solid adsorbent bed downstream of the cryogenic distillation tower removes carbon dioxide from the overhead methane stream down to a composition less than about 100 ppm.

15 23. The method of claim 22, wherein the solid adsorbent bed downstream of the cryogenic distillation tower is a molecular sieve bed

24. The method of claim 18, wherein:
the acid gases further comprise hydrogen sulfide; and

20 the solid adsorbent bed downstream of the cryogenic distillation tower removes hydrogen sulfide from the overhead methane stream down to a composition less than about 10 ppm.

25. The method of claim 24, wherein:

25 the solid adsorbent bed downstream of the cryogenic distillation tower is a molecular sieve bed; and

the molecular sieve bed removes hydrogen sulfide from the overhead methane stream down to a composition less than about 4 ppm.

30 26. The method of claim 18, further comprising:

providing one or more vessels downstream of the cryogenic distillation tower for further separating carbon dioxide from methane using either (i) ionic liquids, (ii) physical solvents, or (iii) chemical solvents.

27. The method of claim 18, further comprising:

at least partially dehydrating the raw gas stream by passing the raw gas stream through a solid adsorbent bed upstream of the cryogenic distillation tower.

5

28. The method of claim 27, further comprising:

replacing the solid adsorbent bed upstream of the cryogenic distillation tower when the molecular sieve bed upstream of the cryogenic distillation tower becomes substantially saturated with water.

10

29. The method of claim 28, wherein the solid adsorbent bed downstream of the cryogenic distillation tower and the solid adsorbent bed upstream of the cryogenic distillation tower are each molecular sieve beds.

15 30. The method of claim 29, further comprising:

saturating the bed upstream of the cryogenic distillation tower with adsorbed water and replacing the bed upstream of the cryogenic distillation tower with a molecular sieve bed that has become saturated with acid gas through use as a solid adsorbent bed downstream of the cryogenic distillation tower.

20

31. The method of claim 30, further comprising:

regenerating the molecular sieve bed upstream of the cryogenic distillation tower after the molecular sieve bed upstream of the cryogenic distillation tower becomes substantially saturated with water.

25

32. The method of claim 31, wherein regenerating the molecular sieve bed upstream of the cryogenic distillation tower uses either thermal swing adsorption or pressure swing adsorption.

30 33. The method of claim 31, further comprising:

replacing the molecular sieve bed downstream of the cryogenic distillation tower when the molecular sieve bed downstream of the cryogenic distillation tower becomes

- 45 -

substantially saturated with carbon dioxide with a regenerated molecular sieve bed previously in service for dehydration upstream of the cryogenic distillation tower.

34. The method of claim 18, further comprising:

5 injecting at least a portion of the bottom acid gas stream into a subsurface formation through at least one acid gas injection well.

35. A method for removing acid gases from a raw gas stream, comprising:

10 passing a raw gas stream through a first molecular sieve bed to generate an input gas stream that is at least partially dehydrated;

moving the input gas stream into a cryogenic distillation tower, the tower having a lower distillation zone and an intermediate controlled freezing zone that receives a cold liquid spray comprised primarily of methane;

releasing an overhead methane stream from the cryogenic distillation tower;

15 passing the overhead methane stream through a second molecular sieve bed downstream of the cryogenic distillation tower so as to remove additional acid gases and to generate a polished gas stream;

20 removing the first molecular sieve bed upstream of the cryogenic distillation tower when the molecular sieve bed upstream of the cryogenic distillation tower becomes substantially saturated with water; and

replacing the molecular sieve bed upstream of the cryogenic distillation tower with a molecular sieve bed that has previously become substantially saturated with carbon dioxide as a result of use as the second molecular sieve bed downstream of the cryogenic distillation tower.

25

36. The method of claim 35, further comprising:

regenerating the molecular sieve bed upstream of the cryogenic distillation tower after the molecular sieve bed upstream of the cryogenic distillation tower has become substantially saturated with water.

30

- 46 -

37. The method of claim 36, further comprising:

passing the overhead methane stream through a refrigeration system downstream of the cryogenic distillation tower in order to cool the overhead methane stream before the overhead methane stream is passed through the second molecular sieve bed.

5

38. The method of claim 37, further comprising:

returning a portion of the cooled overhead methane stream to the cryogenic distillation tower as liquid reflux.

10 39. The method of claim 36, wherein the refrigeration system is designed to produce liquid reflux at a sufficient quantity as to remove acid gases from the input gas stream within the cryogenic distillation tower down to a first selected composition, and to deliver the overhead methane stream to the molecular sieve bed downstream of the cryogenic distillation tower to remove the additional acid gases down to a second lower composition.

15

40. The method of claim 39, wherein:

the acid gases comprise carbon dioxide;

the quantity of the generated liquid reflux is sufficient to remove carbon dioxide from the input gas stream down to a first composition of about 1 to 4 mol. percent; and

20 the molecular sieve bed downstream of the cryogenic distillation tower removes additional carbon dioxide from the overhead methane stream down to a second composition of about 0.2 to 3.0 mol. percent.

41. The method of claim 39, wherein:

25 the quantity of the generated liquid reflux is sufficient to remove carbon dioxide from the input gas stream down to a first composition that meets pipeline specifications; and

the molecular sieve bed downstream of the cryogenic distillation tower removes carbon dioxide from the overhead methane stream down to a second composition that meets LNG specifications.

30

42. The method of claim 41, wherein the pipeline specifications require a carbon dioxide content that is less than about 3.0 mol. percent.

- 47 -

43. The method of claim 42, wherein the LNG specifications require a carbon dioxide content that is less than about 100 ppm.

44. The method of claim 38, wherein the molecular sieve bed downstream of the
5 cryogenic distillation tower removes carbon dioxide from the overhead methane stream down to a composition less than about 50 ppm.

45. The method of claim 36, wherein:
the acid gases further comprises hydrogen sulfide; and
10 the molecular sieve bed downstream of the cryogenic distillation tower removes hydrogen sulfide from the overhead methane stream down to a composition less than about 10 ppm.

46. The method of claim 36, further comprising:
15 replacing the molecular sieve bed downstream of the cryogenic distillation tower when the molecular sieve bed downstream of the cryogenic distillation tower becomes substantially saturated with carbon dioxide with a regenerated molecular sieve bed that was previously in service upstream of the cryogenic distillation tower.

20 47. The method of claim 39, wherein:
the acid gases comprise carbon dioxide;
the raw gas stream comprises nitrogen; and
the method further comprises passing the overhead methane stream through a third
molecular sieve bed downstream of the cryogenic distillation tower so as to remove nitrogen
25 from the overhead methane stream below an amount of about 3 mol. percent.

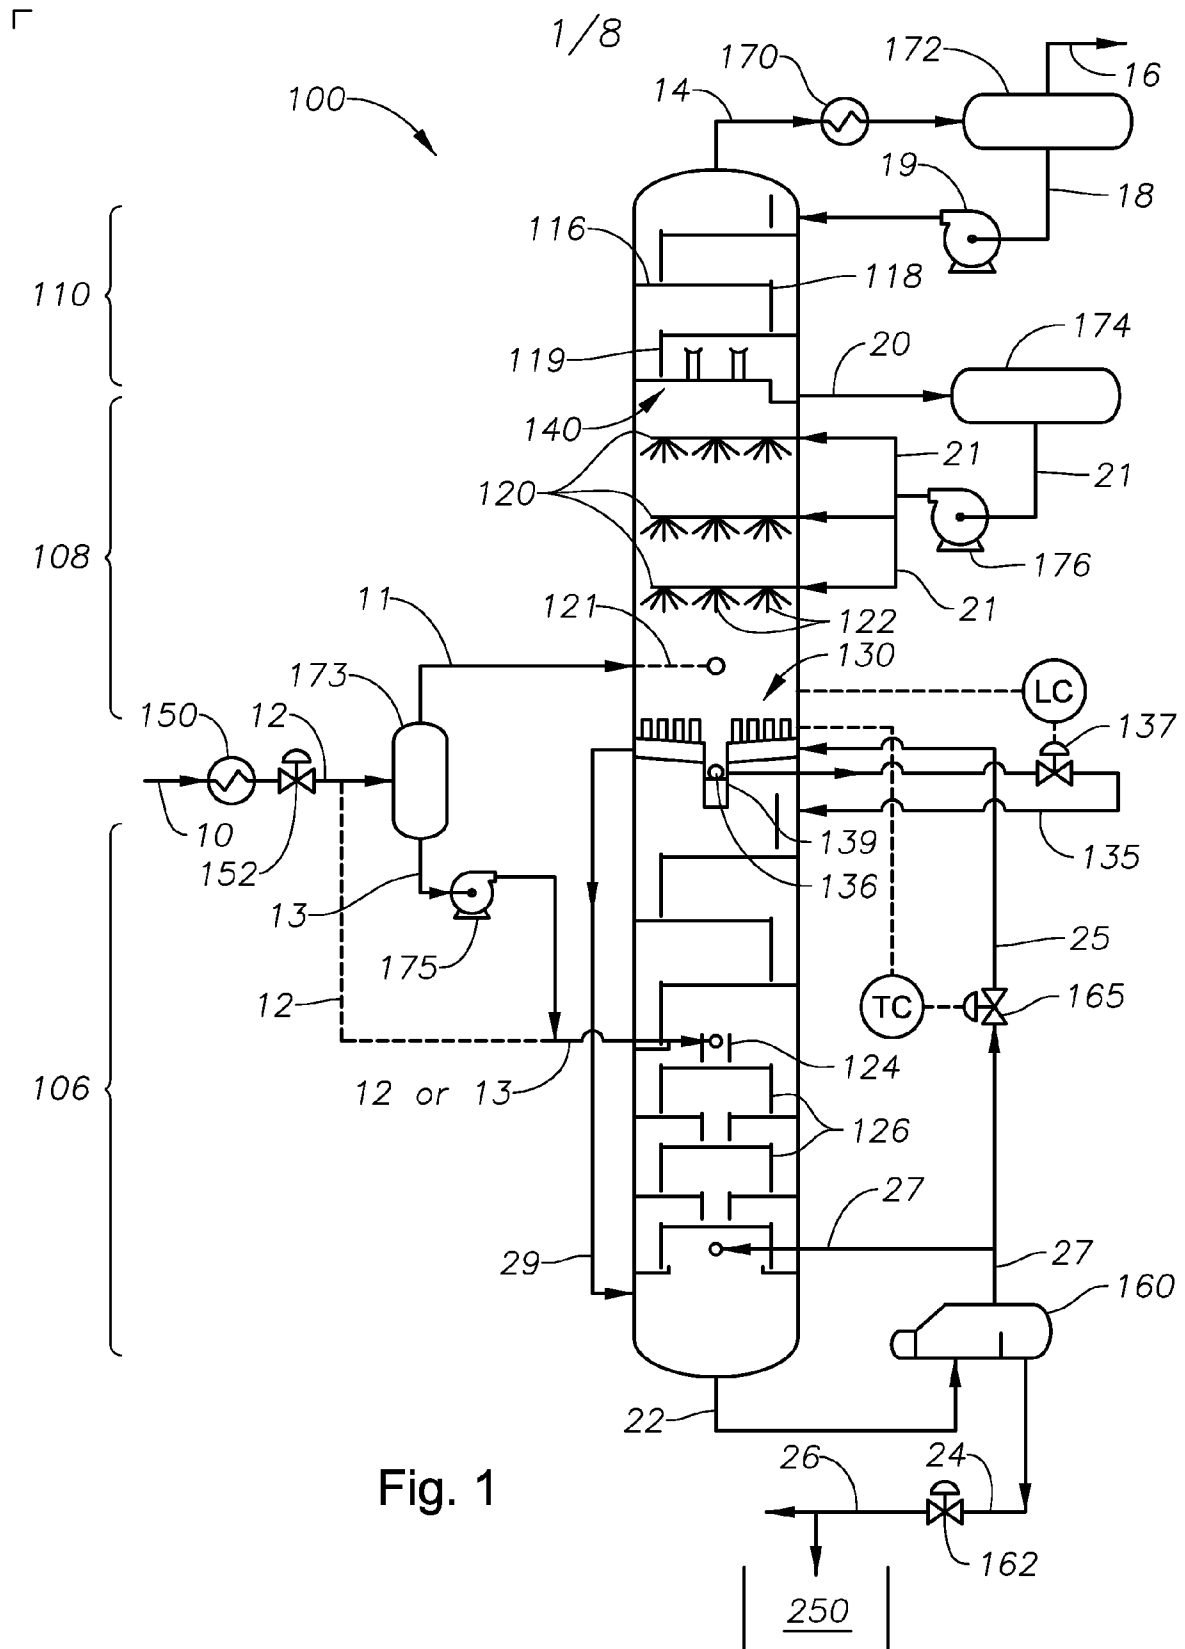


Fig. 1

┌

2/8

Fig. 2A

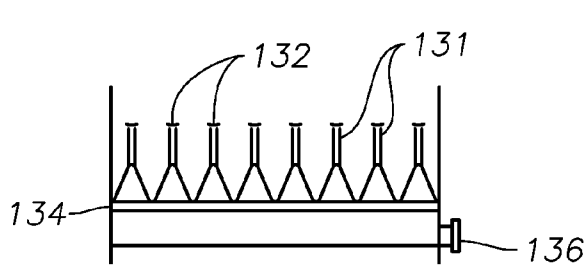
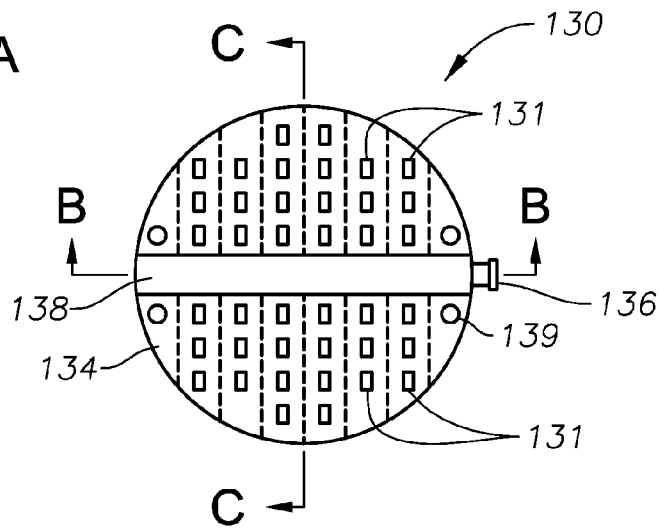


Fig. 2B

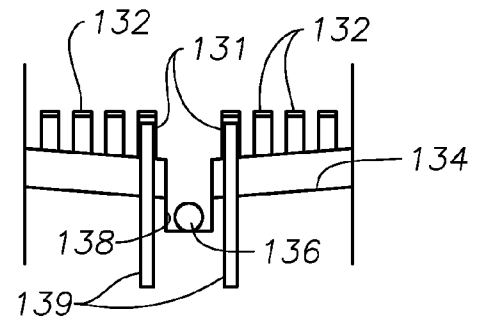


Fig. 2C




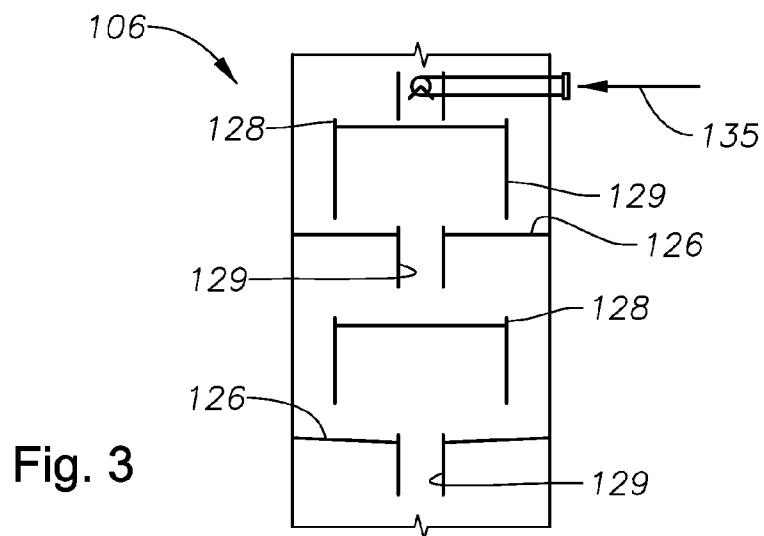


Fig. 3

└


┌

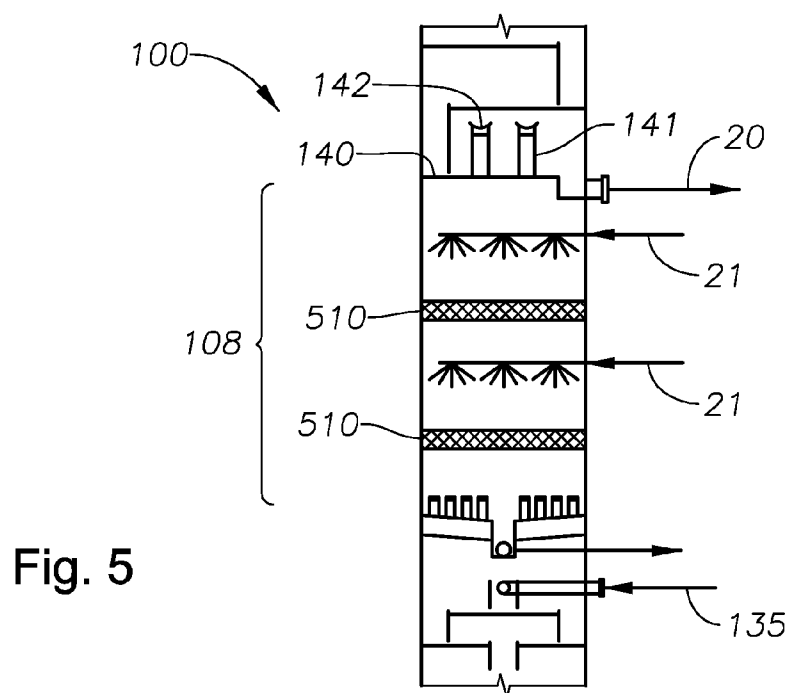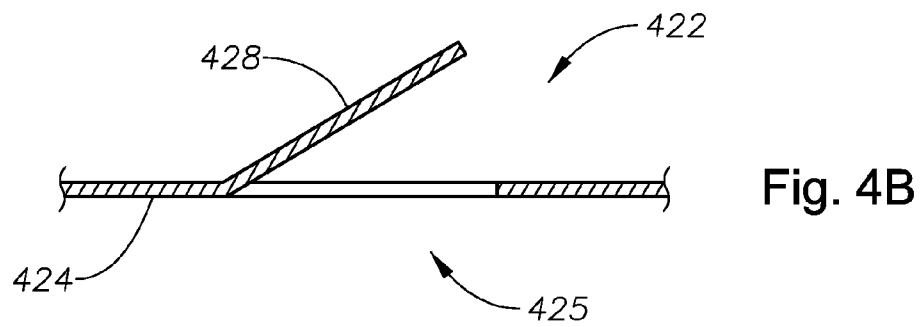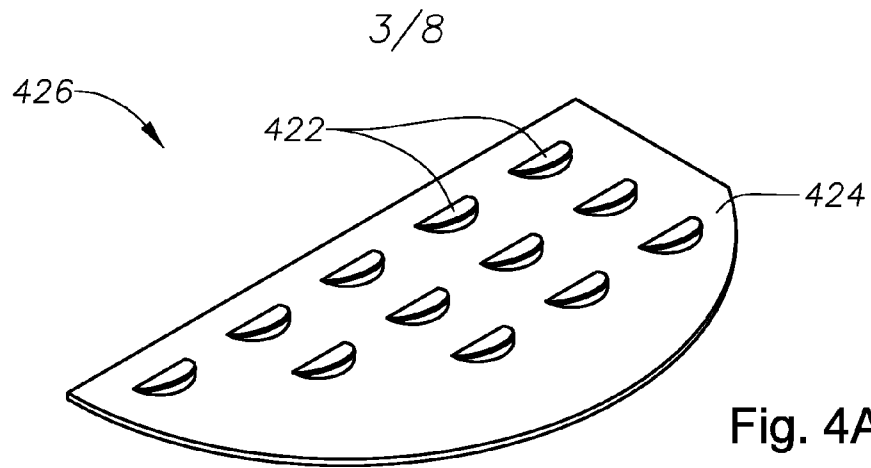

└

┐


Fig. 6

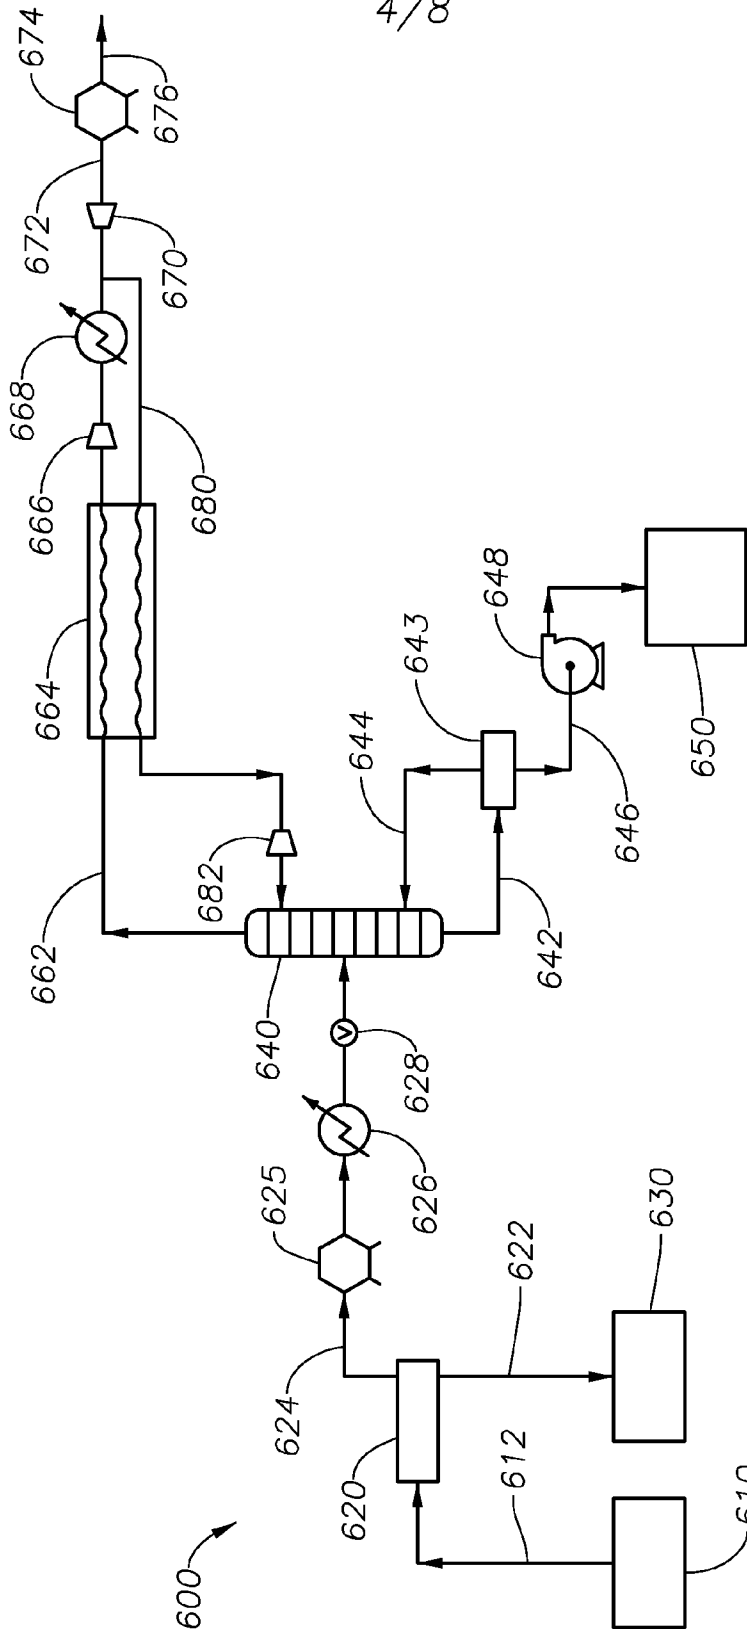

└


5/8

Fig. 7A

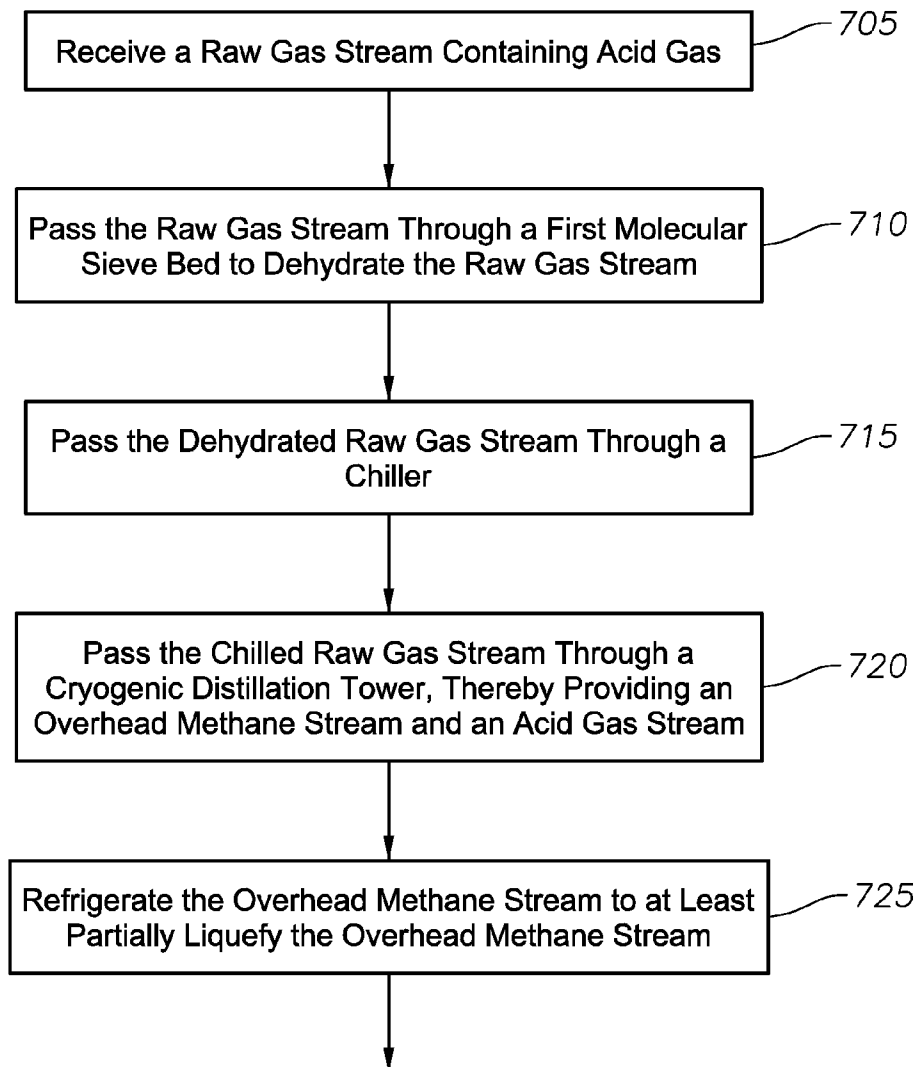700
↓


6/8

Fig. 7B

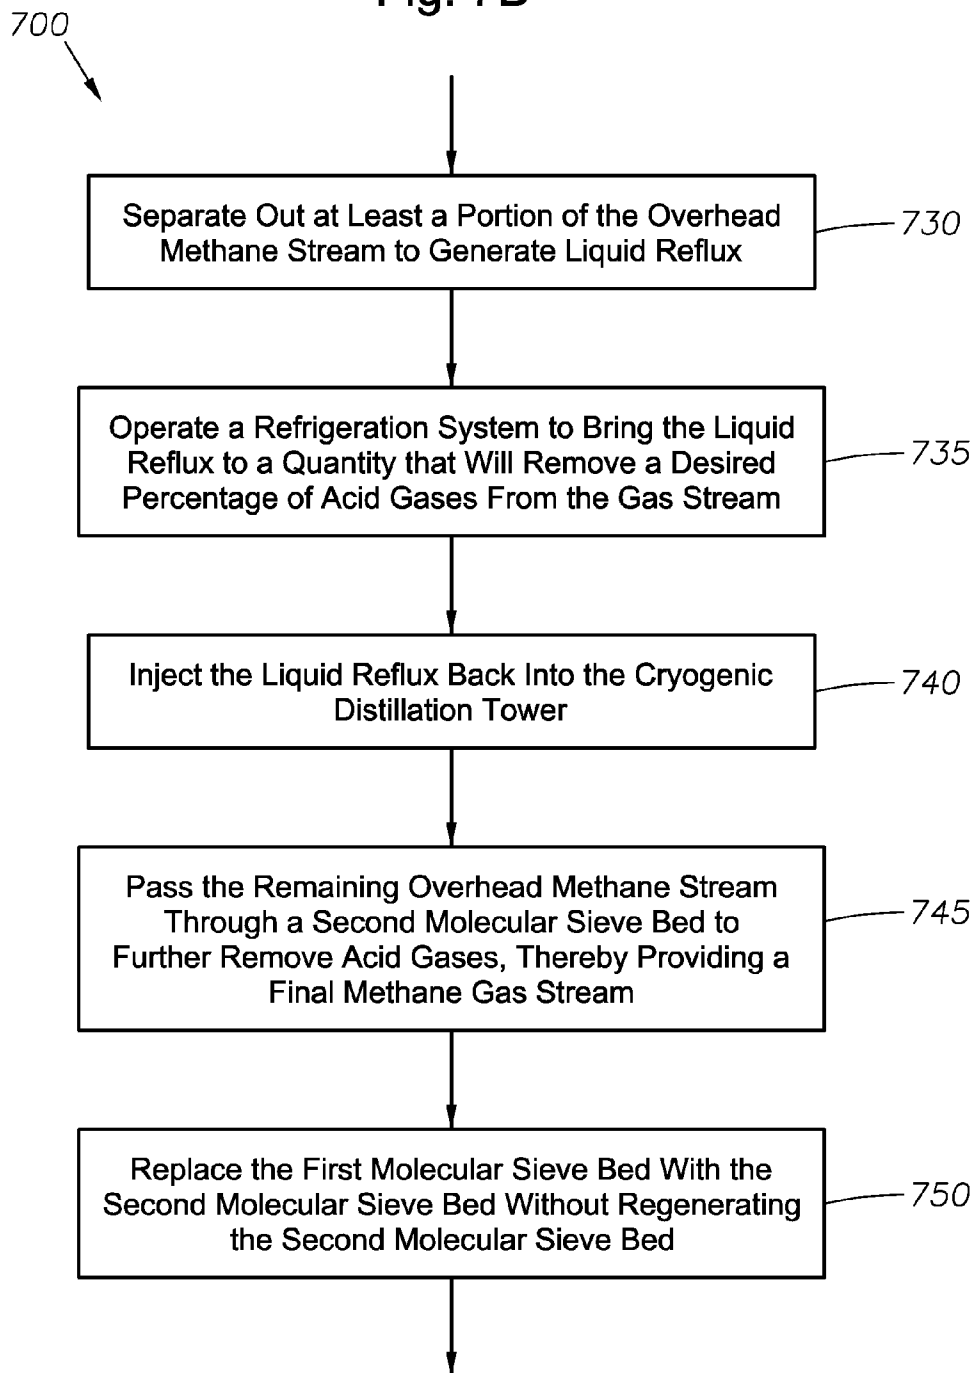

7/8

Fig. 7C

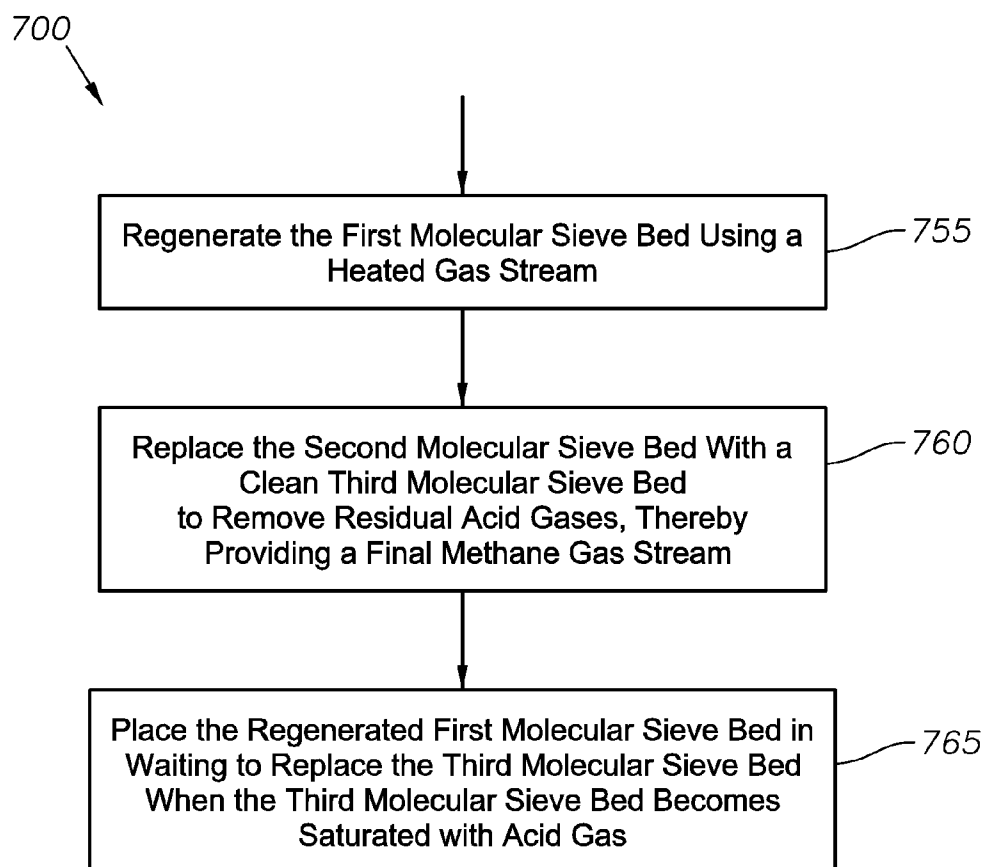

8/8

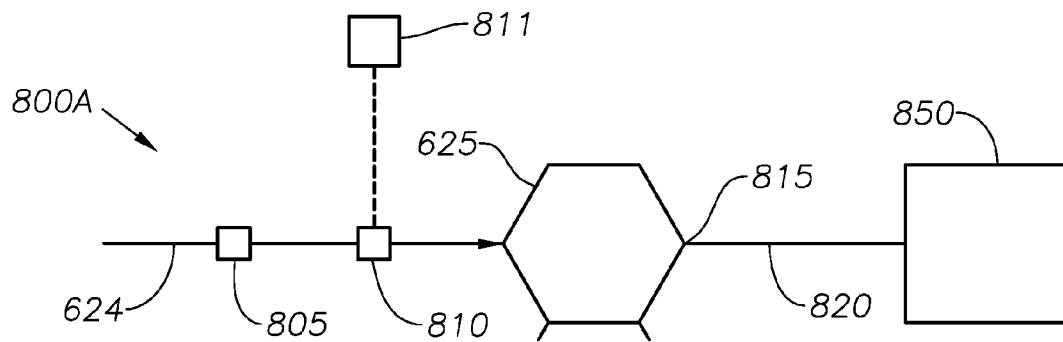


Fig. 8A

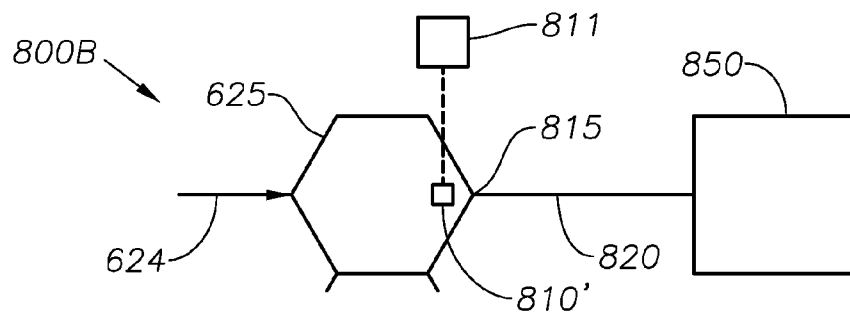


Fig. 8B