

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 November 2007 (08.11.2007)

PCT

(10) International Publication Number
WO 2007/126676 A2

(51) International Patent Classification:
E21B 41/02 (2006.01) *E21B 43/00* (2006.01)

(74) Agents: COLLINS, Douglas, J. et al.; EXXONMOBIL
UPSTREAM RESEARCH COMPANY, P.O. Box 2189
(CORP-URC-SW 337), Houston, TX 77252-2189 (US).

(21) International Application Number:
PCT/US2007/007133

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH,
CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES,
FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN,
IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR,
LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY,
MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS,
RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 22 March 2007 (22.03.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/793,841 21 April 2006 (21.04.2006) US

(71) Applicant (for all designated States except US): EXXON-
MOBIL UPSTREAM RESEARCH COMPANY
[US/US]; P.o. Box 2189 (CORP-URC-SW 337), Houston,
TX 77252-2189 (US).

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL,
PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and


(75) Inventors/Applicants (for US only): KAMINSKY,
Robert, D. [US/US]; 3749 Wakeforest Street, Houston,
TX 77098 (US). SYMINGTON, William, A. [US/US];
1714 Cottage Landing Lane, Houston, TX 77077 (US).
YEADEL, Jesse, D. [US/US]; 3022 La Quinta Drive,
Missouri City, TX 77459 (US). THOMAS, Michele, M.
[US/US]; 6429 Rutgers, Houston, TX 77005 (US).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))

[Continued on next page]

(54) Title: *IN SITU* CO-DEVELOPMENT OF OIL SHALE WITH MINERAL RECOVERY

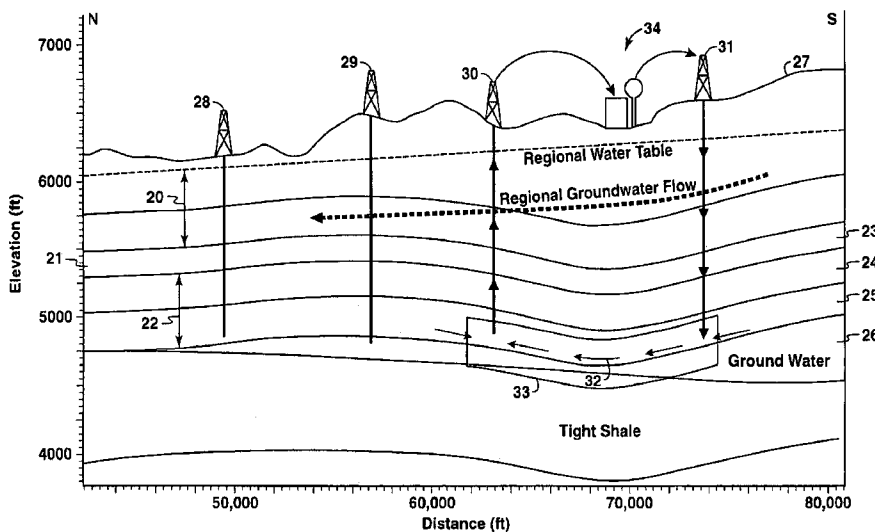

(57) Abstract: A method of producing hydrocarbon fluids from a subsurface organic-rich rock formation, for example an oil shale formation, in which the oil shale formation contains water-soluble minerals, for example nahcolite, is provided. In one embodiment, the method includes the step of heating the organic-rich rock formation *in situ*. Optionally, this heating step may be performed prior to any substantial removal of water-soluble minerals from the organic-rich rock formation. In accordance with the method, the heating of the organic-rich rock formation both pyrolyzes at least a portion of the formation hydrocarbons, for example kerogen, to create hydrocarbon fluids, and converts at least a portion of the water-soluble minerals, for example, converts nahcolite to soda ash. Thereafter, the hydrocarbon fluids are produced from the formation.

WO 2007/126676 A2



— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**IN SITU CO-DEVELOPMENT OF OIL SHALE
WITH MINERAL RECOVERY**

[0001] This application claims the benefit of U.S. Provisional Patent Application
5 Number 60/793,841 filed on April 21, 2006.

BACKGROUND OF THE INVENTION

Field of the Invention

[0002] The present invention relates to the field of hydrocarbon recovery. More
specifically, the present invention relates to the production of hydrocarbon fluids and
10 the recovery of water-soluble minerals, such as nahcolite and/or soda ash, from an
organic-rich rock formation, such as an oil shale formation.

Background of the Invention

[0003] Certain geological formations are known to contain an organic matter
known as "kerogen." Kerogen is a solid, carbonaceous material. When kerogen is
15 imbedded in mineral formations, the mixture may be referred to as oil shale. This is
true whether or not the mineral is, in fact, technically shale, that is, a rock formed
from compacted clay. Upon heating, kerogen produces oil, gas and some water. Oil
shale formations are typically found at relatively shallow depths (< about 3,000 feet)
in various areas world-wide and of the United States, including for example
20 Wyoming, Colorado and Utah. Many such formations are known to have extremely
limited permeability.

[0004] Kerogen may be converted to mobile hydrocarbons by heating the oil shale
to temperatures generally in excess of 270° C (518° F). The rate of conversion
increases sharply with increasing temperature. When kerogen is heated, chemical
25 reactions break the larger molecules forming the solid kerogen into smaller molecules
of oil and gas. The thermal conversion process is referred to as pyrolysis or retorting.

[0005] Attempts have been made for many years to extract oil from oil shale
formations. Near-surface oil shales have been mined and retorted at the surface for
over a century. In 1862, James Young began processing Scottish oil shales. The

- 2 -

industry lasted for about 100 years. Commercial oil shale retorting has also been conducted in other countries such as Australia, Brazil, China, Estonia, France, Russia, South Africa, Spain, and Sweden. However, the practice has been mostly discontinued in recent years because it proved to be uneconomical or because of environmental constraints on spent shale disposal. (T.F. Yen, and G.V. Chilingarian, "Oil Shale," Amsterdam, Elsevier, p. 292). The entire disclosure of which is incorporated herein by reference. Further, surface retorting requires mining of the oil shale, which limits application to shallow formations.

[0006] Research on oil shale production was generally carried out through the 1900's. In 1947, U.S. Pat. No. 2,732,195 issued to Ljungstrom, the entire disclosure of which is incorporated herein by reference. That patent, entitled "Method of Treating Oil Shale and Recovery of Oil and Other Mineral Products Therefrom," proposed the application of heat at high temperatures to the oil shale formation *in situ*. Ljungstrom coined the phrase "heat supply channels" to describe bore holes drilled into the formation. The bore holes received an electrical heat conductor which transferred heat to the surrounding oil shale. Thus, the heat supply channels served as heat injection wells.

[0007] The heat injection wells were equipped with electrical heating elements. The elements, in turn, were surrounded by sand or cement or other heat-conductive material. Each heat injection well transmitted heat into the surrounding oil shale while preventing any inflow of fluid. Along with the heat injection wells, fluid producing wells were also completed in near proximity to the heat injection wells. As kerogen was pyrolyzed upon heat conduction into the rock matrix, the resulting oil and gas would be recovered through the adjacent production wells.

[0008] Ljungstrom applied his approach of thermal conduction from heated wellbores through the Swedish Shale Oil Company. A full-scale plant was developed that operated from 1944 into the 1950's. (G. Salamonsson, "The Ljungstrom *In Situ* Method for Shale-Oil Recovery," 2nd Oil Shale and Cannel Coal Conference, v. 2, Glasgow, Scotland, Institute of Petroleum, London, p. 260-280 (1951)). The entire disclosure of which is incorporated herein by reference.

[0009] Since 1947, various patents have been issued offering modifications and improvements to Ljungstrom's ideas. For instance, U.S. Pat. No. 3,468,376 issued to Slusser, *et al.* in 1969 entitled "Thermal Conversion of Oil Shale into Recoverable Hydrocarbons", the entire disclosure of which is incorporated herein by reference.
5 The '376 Slusser, *et al.* patent suggested a process for circulating a heated pyrolyzing fluid through a flow channel. Abrasive particles were added to the circulating fluid to erode a layer of pyrolyzed oil shale being formed adjacent to the flow channel. This provided a channel for the flow of converted kerogen.

[0010] It was recognized in the Slusser, *et al.* patent that "[t]here are two
10 mechanisms involved in the transport of heat through the oil shale." First, heat is transferred through the solid mass of oil shale by conduction. Second, heat is transferred by convection through fluid flow of pyrolyzed kerogen within the oil shale." Slusser, *et al.* noted that typically the transfer of heat by conduction is a relatively slow process due to the oil shale being an inherently poor conductor of heat.
15 If significant permeability does exist or is created, convective heat transfer by fluids traveling through fine channels in the oil shale can contribute to the overall rate of heat transfer.

[0011] Various means for heating the rock matrix and imbedded kerogen have been proposed. U.S. Pat. No. 4,140,180, assigned to the ITT Research Institute in
20 Chicago, Illinois and issued in 1979, suggested the application of *in situ* heat using radio frequency (RF) electrical energy. The entire disclosure of which is incorporated herein by reference. In doing so, the '180 patent listed and described other methodologies for applying pyrolyzing heat using electrical energy. The patent stated that, as of that time, "there is no . . . acceptable economical way to extract the
25 hydrocarbon constituents."

[0012] Techniques for *in situ* retorting of oil shale were developed and pilot tested with the Green River oil shale in the United States in the 1970's and 1980's. *In situ* processing offers advantages because it reduces costs associated with material handling and disposal of spent shale. In a number of the *in situ* pilots, the oil shale
30 was first rubblized. Thereafter, combustion was carried out by air injection. A rubble

- 4 -

bed with substantially uniform fragment size and substantially uniform distribution of void volume was a key success factor in combustion sweep efficiency. Fragment size was of the order of several inches.

[0013] Nevertheless, attempts to economically extract shale oil continued. In 5 1989, U.S. Pat. No. 4,886,118 issued to Shell Oil Company, the entire disclosure of which is incorporated herein by reference. That patent, entitled "Conductively Heating a Subterranean Oil Shale to Create Permeability and Subsequently Produce Oil," declared that "[c]ontrary to the implications of . . . prior teachings and beliefs ... the presently described conductive heating process is economically feasible for use 10 even in a substantially impermeable subterranean oil shale." (col. 6, ln. 50-54). The '118 patent proposed controlling the rate of heat conduction within the rock surrounding each heat injection well to provide a uniform heat front. The process was limited to formations having a specified grade and thickness.

[0014] Additional history behind shale oil retorting and recovery can be found in 15 patent publication WO 2005/010320 entitled "Methods of Treating a Subterranean Formation to Convert Organic Matter into Producing Hydrocarbons," and in WO 2005/045192 entitled "Hydrocarbon Recovery from Impermeable Oil Shales." The Background and technical disclosures of these two patent publications are incorporated herein by reference.

[0015] The WO 2005/010320 process involves the use of electrically conductive 20 fractures to heat the oil shale. A heat source is constructed using wellbores and then hydraulically fracturing the oil shale. The fractures are filled with an electrically conductive material which forms a heating element. Calcined petroleum coke is a suitable conductant material. Preferably, the fractures are created in a vertical 25 orientation along longitudinal, horizontal planes formed by horizontal wellbores. Electricity is conducted through the conductive fractures from the heel to the toe of each well. The electrical circuit is completed by an additional horizontal well that intersects one or more of the vertical fractures near the toe to supply the opposite polarity. Modeling suggests that temperatures in the immediate vicinity of the

- 5 -

fracture exceed 600° C. Thermal conduction heats and artificially matures the oil shale to conversion temperatures in excess of 300° C.


[0016] The WO 2005/045192 process involves the circulation of supercritical naphtha through fractures. This means that the oil shale is heated by circulating a
5 dense, hot hydrocarbon vapor through sets of closely-spaced hydraulic fractures. In this instance, the fractures are horizontally formed and conventionally propped. Fracture temperatures of 320° – 400° C are maintained for five to ten years. Vaporized naphtha is typically the preferred heating medium due to its high volumetric heat capacity, ready availability and relatively low degradation rate at the
10 heating temperature. In the WO 2005/045192 process, as the kerogen matures, fluid pressure will drive the generated oil to the heated fractures, where it will be produced with the cycling hydrocarbon vapor.

[0017] In some oil shale formations, additional minerals of commercial value are present within the rock. One such mineral is nahcolite. Nahcolite is a natural mineral
15 (NaHCO_3), and is commonly known as baking soda or sodium bicarbonate. The mineral can be associated with oil shale deposits such as those located in parts of the Piceance Basin in Colorado. Nahcolite resources in the Piceance Basin are estimated by the United States Geological Survey at over 29 billion metric tons. (J.R. Dyni, "Stratigraphy and Nahcolite Resources of the Saline Facies of the Green River
20 Formation in Northwest Colorado," in D.K. Murray (ed.), Guidebook to the Energy Resources of the Piceance Creek Basin Colorado, Rocky Mountain Association of Geologists - 1974 Guidebook, pp. 111-122 (1974)). The entire disclosure of which is incorporated herein by reference.

[0018] Nahcolite typically occurs as finely disseminated crystals and nodules
25 within oil shale beds. It also occurs in several discrete beds mixed with variable amounts of oil shale and sometimes associated with halite. Much of the nahcolite in the Piceance Basin occurs as either non-bedded crystalline aggregates scattered through the oil shale, or as laterally continuous units of fine crystals disseminated in the oil shale. The sodium bicarbonate processed from nahcolite has value for use in

food (as baking soda), in pharmaceutical products, in flue gas clean-up (such as SO₂ removal), and in fire extinguishers.

[0019] Sodium bicarbonate can be converted to sodium carbonate (Na₂CO₃; also known as soda ash). The conversion takes place in the presence of heat according to
5 the following chemical reaction:



Sodium carbonate, or soda ash, is a large-scale commodity chemical. Soda ash is used in glass making, chemical manufacture, and the manufacture of detergents.
10 Much of the sodium bicarbonate produced via mining is converted in surface facilities to soda ash.

[0020] Nahcolite can be recovered from oil shale via solution mining. (M. Prats, P. J. Closmann, A. T. Ireson, and G. Drinkard, "Soluble-Salt Processes for *In-Situ* Recovery of Hydrocarbons from Oil Shale," Journal of Petroleum Technology, pp.
15 1078-1088 (September 1977)). The entire disclosure of which is incorporated herein by reference. The process involves injecting hot water under pressure into the subsurface. Sodium bicarbonate is fairly soluble in water.

[0021] American Soda previously developed a facility in the Piceance region of Colorado for solution mining of Nahcolite. The facility was operational in 2000.
20 American Soda's production operations are described in the 2004 publication M. Ramey and M. Hardy, "The History and Performance of Vertical Well Solution Mining of Nahcolite (NaHCO₃) in the Piceance Basin, Northwestern, Colorado, USA", Solution Mining Research Institute: Fall 2004 Technical Meeting (Berlin, Germany) (2004). The entire disclosure of which is incorporated herein by reference.
25 American Soda's solution mining technology is also discussed in U.S. Pat. No. 6,609,761 issued in 2003. The entire disclosure of which is incorporated herein by reference. According to the paper, the well field included 26 solution mining wells which produced nahcolite brine to a processing facility. Water at 350-420° F was injected into the formation to remove the nahcolite at a depth of 2,200 to 2,600 feet.

- 7 -

[0022] By late 2004, the American Soda facility had produced 2.6 million tons of nahcolite. The facility converted the sodium bicarbonate to sodium carbonate, produced liquid CO₂, and concentrated the sodium carbonate solution via evaporation. The solution was then pumped to a second facility 44 miles away. The conversion of sodium bicarbonate to sodium carbonate was necessary to prevent solid precipitation in the pipeline as the solution cooled during transit. Sodium carbonate is much more soluble than sodium bicarbonate at the flow temperatures. The solution at the second facility was then reconverted back to sodium bicarbonate via contacting the solution with CO₂ to precipitate the sodium bicarbonate. The sodium bicarbonate was then sold and shipped from the facility.

[0023] Other companies such as White River Nahcolite Minerals and American Alkali have studied Nahcolite solution mining and processing. (R.L. Day, "Solution Mining of Colorado Nahcolite," Wyoming State Geological Survey Public Information Circular 40, Proceedings of the First International Soda Ash Conference, Volume II (Rock Springs, Wyoming, June 10-12, 1997) pp. 121-130 (1998); K.R. Nielsen, "Colorado Nahcolite: A Low Cost Source of Sodium Chemicals," Seventh Annual Canadian Conference on Markets for Industrial Minerals (Vancouver, Canada, October 17-18, 1995) 1-9). The entire disclosures of which are incorporated herein by reference. In the disclosed processes, the produced sodium bicarbonate solution is processed through a facility in order to generate three dry products: sodium bicarbonate, light soda ash, and dense soda ash. The processes start by crystallizing sodium bicarbonate out of solution via cooling. Light soda ash is produced by drying wet sodium bicarbonate at 600-800° F. This results in decomposition to a low bulk density (30-35 lbs/ft³) powder. Dense soda ash is formed by crystallizing soda ash out of a supersaturated solution. This results in granules with a bulk density of about 63 lbs/ft³. The benefit of producing three products is that each has a different market. The facility can shift the distribution of products based on current market conditions. Typically, sodium bicarbonate and light soda ash command higher prices, but the markets are more limited than for dense soda ash.

[0024] Another company involved in Nahcolite mining operations is NaTec, Ltd. NaTec is the listed assignee of U.S. Pat. No. 4,815,790 which issued in 1989, the

- 8 -

entire disclosure of which is incorporated herein by reference. The patent is entitled “Nahcolite Solution Mining Process.” The patent discloses a process for creating sodium bicarbonate using a “hot aqueous liquor.” This process also produced sodium bicarbonate solution which was then processed through a facility to generate three dry products: sodium bicarbonate, light soda ash, and dense soda ash. It is noted that much of the nahcolite was converted to a soda ash product at the surface facilities.

[0025] Because nahcolite and oil shale occur together in certain oil shale deposits such as the Piceance Basin, the recovery of either mineral impacts the fate of the other. It has been proposed that nahcolite can be removed through solution mining prior to the *in situ* production of shale oil. This was discussed by Prats, M., *et al.* in the 1977 article cited above. This was also proposed by Shell as early as 1972 in U.S. Pat. No. 3,700,280, entitled “Method of Producing Oil from an Oil Shale Formation Containing Nahcolite¹ and Dawsonite”, the entire disclosure of which is incorporated herein by reference. *See also* U.S. Pat. No. 3,759,574 entitled “Method of Producing Hydrocarbons from an Oil Shale Formation”, the entire disclosure of which is incorporated herein by reference. The concept of nahcolite removal involves leaching the nahcolite (and other water-soluble minerals such as halite and, to a lesser degree, dawsonite) to create permeability in the otherwise fairly impermeable oil shale. After the permeability is created, hot steam is injected into the formation to convert the kerogen bound in the oil shale to liquid (oil) and hydrocarbon gas. The oil and gas is then recovered via production wells.

[0026] Recently, U.S. Pat. No. 6,997,518 issued to Vinegar, *et al.* in 2006, the entire disclosure of which is incorporated herein by reference. This patent is entitled “*In Situ* Thermal Processing and Solution Mining of an Oil Shale Formation.” The ‘518 patent proposes developing nahcolite prior to *in situ* conversion of the oil shale using downhole heat sources. Such heat sources include electric heaters and downhole flameless combustors. Vinegar argues that removing the nahcolite prior to shale oil production is beneficial since it reduces the energy needed to convert the kerogen. The decomposition reaction of nahcolite is endothermic plus the nahcolite has thermal capacity and, hence, drains energy otherwise useable for heating the oil

shale. Additionally, in certain areas regulatory conditions require that the oil shale be developed in such a way as to preserve the value of the nahcolite.

[0027] The '518 patent lists a variety of other perceived advantages to removing nahcolite (and dawsonite) prior to kerogen retorting. For instance, Vinegar states that
5 removing the nahcolite "may reduce mass within the formation and increase a permeability of the formation. Reducing the mass within the formation may reduce the heat required to heat to temperatures needed for the *in situ* conversion process. Reducing the mass within the formation may also increase a speed at which a heat front within the formation moves. Increasing the speed of the heat front may reduce a
10 time needed for production to begin." (See col. 324, ln. 40-48).

[0028] A need exists for improved processes for the production of shale oil which preserves the value of the nahcolite in-place. In addition, a need exists for improved methods for co-developing shale oil and nahcolite in soda ash form. Still further, a need exists for a process by which the nahcolite may be recovered after heating an oil
15 shale zone and producing the shale oil.

SUMMARY OF THE INVENTION

[0029] In one embodiment, the invention includes an *in situ* method of recovering natural resources. The method includes (a) heating *in situ* an organic-rich rock formation that contains both formation hydrocarbons and one or more formation
20 water-soluble minerals, wherein the heating of the organic-rich rock formation both pyrolyzes at least a portion of the formation hydrocarbons to create hydrocarbon fluids and makes available one or more migratory contaminant species previously bound in the organic-rich rock formation. The method may further include producing at least a portion of the hydrocarbon fluids from the organic-rich rock formation, but
25 wherein at least a portion of the one or more migratory contaminant species remain in the organic-rich rock formation. The method may further include injecting an aqueous fluid into the organic-rich rock formation, wherein the injected aqueous fluid dissolves at least a portion of one or more water-soluble minerals and the one or more migratory contaminant species to form a first aqueous solution. The method may
30 further include producing the first aqueous solution from the organic-rich rock

formation. The method may further include processing the first aqueous solution in a surface facility to remove a portion of the one or more water-soluble minerals and processing the first aqueous solution in the surface facility to remove at least some of the one or more migratory contaminant species.

5 **[0030]** Another embodiment of the invention includes an *in situ* method of recovering natural resources. The method includes heating an organic-rich rock formation *in situ*. The organic-rich rock formation (i) is substantially impermeable to fluid flow initially, (ii) contains formation hydrocarbons, and (iii) contains one or more formation water-soluble minerals. The heating (i) pyrolyzes at least a portion of
10 the formation hydrocarbons in a matured organic-rich rock zone of the organic-rich rock formation to create hydrocarbon fluids, thereby creating permeability within the matured organic-rich rock zone, (ii) leaves a second portion of the formation hydrocarbons substantially unpyrolyzed, thereby preserving an unmatured organic-rich rock zone, and (iii) converts at least a portion of the one or more formation water-
15 soluble minerals to one or more first water-soluble minerals. The method may further include producing the hydrocarbon fluids from the matured organic-rich rock zone. The method may further include flushing the matured organic-rich rock zone and the unmatured organic-rich rock zone with an aqueous fluid after a substantial portion of the hydrocarbon fluids have been produced from the matured organic-rich rock zone,
20 thereby dissolving the one or more first water-soluble minerals in the aqueous fluid to form a first aqueous solution and producing the first aqueous solution to the surface.

[0031] Another embodiment of the invention includes an *in situ* method of recovering natural resources. The method includes heating the organic-rich rock formation *in situ*. The organic-rich rock formation (i) contains formation
25 hydrocarbons and (ii) contains one or more formation water-soluble minerals. The heating (i) pyrolyzes at least a portion of the formation hydrocarbons to create hydrocarbon fluids and (ii) generates water which migrates and at least partially dissolves the one or more formation water-soluble minerals *in situ* to form a first aqueous fluid. The method may further include producing a production fluid from the
30 organic-rich rock formation with the production fluid containing the hydrocarbon fluids and the first aqueous fluid. The method may further include separating the

- 11 -

production fluid into a hydrocarbon stream and a first aqueous stream at a surface facility and recovering one or more first water-soluble minerals from the first aqueous stream.

[0032] Another embodiment of the invention includes an *in situ* method of recovering natural resources. The method includes assessing the market price for a water-soluble mineral. The method may further include comparing the market price for the water-soluble mineral to a cost-to-produce criterion. The method may further include determining that the market price of the water-soluble-mineral is less than the cost-to-produce criterion. The method may further include heating an organic-rich rock formation *in situ*. The organic-rich rock formation (i) contains formation hydrocarbons and (ii) contains one or more formation water-soluble minerals. The heating (i) occurs prior to substantial removal of the one or more formation water-soluble minerals, (ii) pyrolyzes at least a portion of the formation hydrocarbons to create hydrocarbon fluids, and (iii) converts at least a portion of the one or more formation water-soluble minerals to first water-soluble minerals. The method may further include producing the hydrocarbon fluids from the organic-rich rock formation.

[0033] Another embodiment of the invention includes an *in situ* method of recovering natural resources. The method includes providing produced fluid processing facilities which are sized to process a first hydrocarbon fluid production rate produced during an initial production period together with a first CO₂ production rate produced during the initial production period, wherein the first CO₂ production rate includes CO₂ generated from dissociation of nahcolite to form soda ash. The method may further include heating an organic-rich rock formation *in situ* to form hydrocarbon fluids and CO₂ with the organic-rich rock formation containing nahcolite. The method may further include producing a production fluid containing the hydrocarbon fluids and the CO₂ from the organic-rich rock formation. The method may further include processing the production fluid in the produced fluid processing facilities.

BRIEF DESCRIPTION OF THE DRAWINGS

[0034] So that the features of the present invention can be better understood, certain drawings, graphs and flow charts are appended hereto. It is to be noted, however, that the drawings illustrate only selected embodiments of the inventions and
5 are therefore not to be considered limiting of scope, for the inventions may admit to other equally effective embodiments and applications.

[0035] Figure 1 is a perspective view of an illustrative oil shale development area. A plurality of wellbores is shown completed in an oil shale formation. A fluid processing area is also shown schematically.

10 [0036] Figure 2 is a flow chart showing a series of steps that may be undertaken in the production of hydrocarbon fluids and the recovery of nahcolite from an oil shale formation, in accordance with one aspect of the present methods.

[0037] Figure 3 is a bar chart comparing the volume of an oil shale sample before and after an *in situ*, retorting process.

15 [0038] Figure 4 is a schematic diagram of a solution mining and/or groundwater clean-up operation.

DETAILED DESCRIPTION OF CERTAIN EMBODIMENTS

Definitions

20 [0039] As used herein, the term "hydrocarbon(s)" refers to organic material with molecular structures containing carbon and hydrogen. Hydrocarbons may also include other elements, such as, but not limited to, halogens, metallic elements, nitrogen, oxygen, and/or sulfur.

[0040] As used herein, the term "hydrocarbon fluids" refers to hydrocarbons that are gases or liquids. Hydrocarbon fluids may include, for example, shale oil,
25 pyrolysis oil, pyrolysis gas, a pyrolysis product of coal, and other hydrocarbons that are in a gaseous or liquid state.

[0041] As used herein, the terms "produced fluids" and "production fluid" refer to liquids and/or gases removed from an organic-rich rock formation and may include hydrocarbon fluids, shale oil, pyrolysis oil, pyrolysis gas, a pyrolysis product of coal, synthesis gas, and water (steam). Produced fluids may include hydrocarbon fluids as well as non-hydrocarbon fluids.

[0042] As used herein, the term "heavy hydrocarbons" refers to hydrocarbon fluids that are highly viscous at ambient conditions (15°C and 1 atm pressure). Heavy hydrocarbons may include highly viscous hydrocarbon fluids such as heavy oil, tar, and/or asphalt. Heavy hydrocarbons may include carbon and hydrogen, as well as smaller concentrations of sulfur, oxygen, and nitrogen. Additional elements may also be present in heavy hydrocarbons in trace amounts. Heavy hydrocarbons may be classified by API gravity. Heavy hydrocarbons generally have an API gravity below about 20 degrees. Heavy oil, for example, generally has an API gravity of about 10-20 degrees, whereas tar generally has an API gravity below about 10 degrees. The viscosity of heavy hydrocarbons is generally greater than about 100 centipoise at 15°C. Heavy hydrocarbons may also include aromatics or other complex ring hydrocarbons.

[0043] As used herein, the term "solid hydrocarbons" refers to any hydrocarbon material that is found naturally in substantially solid form at formation conditions. Non-limiting examples include kerogen, coal, shungites, asphaltites, and natural mineral waxes.

[0044] As used herein, the term "formation hydrocarbons" refers to both heavy hydrocarbons and solid hydrocarbons that are contained in a formation. Formation hydrocarbons may be, but are not limited to, kerogen, coal, bitumen, natural mineral waxes, and asphaltites.

[0045] As used herein, the term "tar" refers to a viscous hydrocarbon that generally has a viscosity greater than about 10,000 centipoise at 15°C. The specific gravity of tar generally is greater than 1.000. Tar may have an API gravity less than 10 degrees.

[0046] As used herein, the term "kerogen" refers to a solid, insoluble hydrocarbon that principally contains carbon, hydrogen, nitrogen, oxygen, and sulfur. Oil shale contains kerogen.

5 [0047] As used herein, the term "bitumen" refers to a non-crystalline solid or viscous hydrocarbon material that is substantially soluble in carbon disulfide.

[0048] As used herein, the term "oil" refers to a fluid containing a mixture of condensable hydrocarbons.

[0049] As used herein, the term "organic-rich rock" refers to any rock matrix holding formation hydrocarbons (i.e. solid hydrocarbons and/or heavy hydrocarbons).
10 Rock matrices may include, but are not limited to, sedimentary rocks, shales, stone silt, sands, silicilytes, carbonates, and diatomites.

[0050] As used herein, the term "formation" refers to one or more hydrocarbon containing layers, one or more non-hydrocarbon layers, an overburden, and/or an underburden of any subsurface geologic formation. An "overburden" and/or an
15 "underburden" includes one or more different types of substantially impermeable materials. For example, overburden and/or underburden may include rock, shale, mudstone, or wet/tight carbonate (i.e., an impermeable carbonate without hydrocarbons). In some embodiments of *in situ* conversion processes, an overburden and/or an underburden may include a hydrocarbon containing layer or hydrocarbon
20 containing layers that are relatively impermeable and are not subjected to temperatures during *in situ* conversion processing that result in significant characteristic changes of the hydrocarbon containing layers of the overburden and/or underburden. For example, an underburden may contain shale or mudstone. In some cases, the overburden and/or underburden may be somewhat permeable.

25 [0051] As used herein, the term "organic-rich rock formation" refers to any formation containing organic-rich rock.

[0052] As used herein, the term "water-soluble minerals" refers to minerals that are soluble in water. Water-soluble minerals include, for example, nahcolite (sodium

bicarbonate), soda ash (sodium carbonate), dawsonite ($\text{NaAl}(\text{CO}_3)(\text{OH})_2$), or combinations thereof.

[0053] As used herein, the term "formation water-soluble minerals" refers to water-soluble minerals that are found naturally in a formation.

5 **[0054]** As used herein, the term "migratory contaminant species" refers to species that are both soluble or moveable in water or an aqueous fluid and are considered to be harmful or of concern to human health or the environment. Migratory contaminant species may include inorganic and organic contaminants. Organic contaminants may include saturated hydrocarbons, aromatic hydrocarbons, and oxygenated
10 hydrocarbons. Inorganic contaminants may include metal contaminants, and ionic contaminants of various types that may significantly alter pH or the formation fluid chemistry. Aromatic hydrocarbons may include, for example, benzene, toluene, xylene, ethylbenzene, and tri-methylbenzene, and various types of polyaromatic hydrocarbons such as anthracenes, naphthalenes, chrysenes and pyrenes. Oxygenated
15 hydrocarbons may include, for example, alcohols, ketones, phenols, and organic acids such as carboxylic acid. Metal contaminants may include, for example, arsenic, boron, chromium, cobalt, molybdenum, mercury, selenium, lead, vanadium, nickel or zinc. Ionic contaminants include, for example, sulfides, sulfates, chlorides, fluorides, ammonia, nitrates, calcium, iron, magnesium, potassium, lithium, boron, and
20 strontium.

[0055] As used herein, the term "wellbore" refers to a hole in a formation made by drilling or insertion of a conduit into the formation. A wellbore may have a substantially circular cross section, or other cross-sectional shapes (e.g., circles, ovals, squares, rectangles, triangles, slits, or other regular or irregular shapes). As used
25 herein, the term "well", when referring to an opening in the formation, may be used interchangeably with the term "wellbore."

[0056] As used herein, the term "pyrolysis" refers to the breaking of chemical bonds due to the application of heat. For example, pyrolysis may include transforming a compound into one or more other substances by heat alone or by heat

in combination with an oxidant. Pyrolysis may include modifying the nature of the compound by addition of hydrogen, water, carbon dioxide, or carbon monoxide. Heat may be transferred to a section of the formation to cause pyrolysis.

5 [0057] As used herein, the term "cracking" refers to a process involving decomposition and molecular recombination of organic compounds to produce a greater number of molecules than were initially present. In cracking, a series of reactions take place accompanied by a transfer of hydrogen atoms between molecules. For example, naphtha may undergo a thermal cracking reaction to form ethene and H₂ among other molecules.

10 [0058] As used herein, the term "sequestration" refers to storing a fluid that is a by-product of a process rather than discharging the fluid to the atmosphere or open environment.

[0059] As used herein, the term "subsidence" refers to a downward movement of a portion of a formation relative to an initial elevation of the surface.

15 [0060] As used herein, the term "thickness" of a layer refers to the thickness of a cross section of a layer, wherein the cross section is normal to a face of the layer.

20 [0061] As used herein, the term "thermal fracture" refers to fractures created in a formation caused directly or indirectly by expansion or contraction of a formation and/or fluids within the formation, which is in turn caused by increasing/decreasing the temperature of the formation and/or fluids within the formation, and/or by increasing/decreasing a pressure of fluids within the formation due to heating. Thermal fractures may propagate into or form in neighboring regions significantly cooler than the heated zone.

25 [0062] As used herein, the term "hydraulic fracture" refers to a fracture at least partially propagated along a plane in a formation, wherein the fracture is created through injection of fluids into a formation. The fracture may include proppant material.

Description of Specific Embodiments

[0063] The inventions are described herein in connection with certain specific embodiments. However, to the extent that the following detailed description is specific to a particular embodiment or a particular use, this is intended to be illustrative only, and is not to be construed as limiting the scope of the invention.

[0064] The present invention provides an *in situ* method for generating and recovering both hydrocarbon fluids and water-soluble minerals (e.g., sodium minerals) from an organic-rich rock formation (e.g., oil shale formations). In some oil shale formations such as the Parachute Creek Member of the Green River Formation located in the Piceance Basin in Colorado, the oil shale holds both kerogen and nahcolite. It may be desirable in multi-mineral leasing areas, such as those managed by the United States Bureau of Land Management, that the production of shale oil from kerogen does not squander or waste the value of the *in situ* nahcolite. Thus, in one aspect, the present invention provides for the production of shale oil, followed by the recovery of water-soluble minerals, particularly nahcolite or decomposition products of nahcolite, for example, soda ash. In another aspect, shale oil and nahcolite (or nahcolite derivatives) are co-produced. In either aspect, the value of the water-soluble minerals is preserved.

[0065] Sodium bicarbonate can be converted to sodium carbonate (Na_2CO_3 ; also known as soda ash). The conversion takes place in the presence of heat according to the following chemical reaction formula:



[0066] The water generated via nahcolite decomposition may be in the vapor state but can condense to liquid water as it migrates away from the heated region. Water may also be generated via decomposition of other minerals, such as dawsonite, decomposition of kerogen, and expulsion of bound water from clays.

[0067] Sodium carbonate, or soda ash, is a large-scale commodity chemical. Soda ash is used in glass making, chemical manufacture, and the manufacture of detergents. Much of the sodium bicarbonate produced via mining is converted in surface facilities

- 18 -

to soda ash. The decomposition of sodium bicarbonate to sodium carbonate can occur at relatively low temperatures; however, the process is pressure sensitive. As pressure increases, the concentration of carbon dioxide in the vapor phase increases and retards the decomposition. Templeton studied this effect and found that the decomposition temperature increases as follows:

from ~ 200° F at atmospheric pressure, to
~ 360° F at 1000 psia, to
~ 385° F at 2000 psia, and to
~ 405° F at 3000 psia.

- 10 (Templeton, C.C., "Pressure-Temperature Relationship for Decomposition of Sodium Bicarbonate from 200 to 600° F," Journal of Chemical and Engineering Data, 23(1), pp. 7-11 (1978)). The entire disclosure of which is incorporated herein by reference.

[0068] Dawsonite decomposes via the following reaction:



- 15 **[0069]** Nahcolite can be recovered from oil shale via solution mining. The process involves injecting hot water under pressure into the subsurface. Sodium bicarbonate is fairly soluble in water. Solubility increases with temperature as follows:

~0.1 lb NaHCO₃/lb water at 100° F,
20 ~0.2 lb NaHCO₃/lb water at 200° F,
~0.4 lb NaHCO₃/lb water 300° F, and
~0.8 lb NaHCO₃/lb water 400° F.


- [0070]** Applicant believes that certain *in situ* oil shale retorting processes, including the WO 2005/045192 and WO 2005/010320 processes disclosed in the
25 above-referenced international patent publications, will materially improve the

accessibility of the nahcolite and therefore increase the value derived from solution mining.

[0071] It is noted that at very high temperatures, soda ash will decompose to sodium oxide according to the following reaction:



[0072] In a swept atmosphere this will occur at about 800° C. In a CO₂ atmosphere the decomposition is strongly suppressed even at 1000° C. (Newkirk, A.E. and Aliferis, I., "Drying and Decomposition of Sodium Carbonate," Analytical
10 Chemistry, 30(5), pp. 982-984 (1958)). The entire disclosure of which is incorporated herein by reference. In solution sodium carbonate can decompose at much lower temperatures to sodium hydroxide:



15 **[0073]** This reaction, however, is very much an equilibrium reaction and unless the CO₂ is continually removed, the conversion is limited. (Thomas, A.M., "Thermal Decomposition of Sodium Carbonate Solutions", Journal of Chemical and Engineering Data, 8(1), pp. 51-54 (1963)). The entire disclosure of which is incorporated herein by reference. Indeed, sodium hydroxide reacts readily with acid
20 gases (such as CO₂, H₂S and SO₂) to produce Na₂CO₃. This reverse reaction is commonly used in the chemical industry for scrubbing CO₂ from gas streams. (Encyclopedia of Chemical Technology (4th ed.), "Alkali and Chlorine Products," pp. 1025-1039). The entire disclosure of which is incorporated herein by reference:

[0074] **Figure 1** presents a perspective view of an illustrative oil shale
25 development area **10**. A surface **12** of the development area **10** is indicated. Below the surface is an organic-rich rock formation **16**. The illustrative formation **16** contains formation hydrocarbons (such as, for example, kerogen) and valuable water-soluble minerals (such as, for example, nahcolite). It is understood that the representative formation **16** may be any organic-rich rock formation, including a rock
30 matrix containing coal or tar sands, for example. In addition, the rock matrix making up the formation may be permeable, semi-permeable or non-permeable. Preferably,

- 20 -

the present inventions may be practiced in oil shale development areas initially having very limited or effectively no fluid permeability.

[0075] In order to access formation 16 and recover natural resources therefrom, a plurality of wellbores is formed. Wellbores are shown at 14 in Figure 1. The
5 representative wellbores 14 are essentially vertical in orientation relative to the surface 12. However, it is understood that some or all of the wellbores 14 could deviate into an obtuse or even horizontal orientation. In the arrangement of Figure 1, each of the wellbores 14 is completed in the oil shale formation 16. The completions may be either open or cased hole. The well completions may also include propped or
10 unpropped hydraulic fractures.

[0076] In the view of Figure 1, only seven wellbores 14 are shown. However, it is understood that in an oil shale development project, numerous additional wellbores 14 will most likely be drilled. The wellbores 14 may be located in relatively close proximity, being from 10 feet to up to 300 feet in separation. Alternatively, the
15 wellbores may be spaced from 30 to 200 feet or 50 to 100 feet. Typically, the wellbores 14 are also completed at shallow depths, being from 200 to 5,000 feet at total depth. Alternatively, the wellbores may be completed at depths from 1,000 to 4,000 feet, or 1,500 to 3,500 feet. In some embodiments the oil shale formation targeted for *in situ* retorting is at a depth greater than 200 feet below the surface. In
20 alternative embodiments, the oil shale formation targeted for *in situ* retorting is at a depth greater than 1000, 1100, 1200, 1300 or 1500 feet below the surface. In alternative embodiments, the oil shale formation targeted for *in situ* retorting is at a depth between 200 and 5,000 feet, alternatively between 1,000 and 4,000 ft, 1,200 and 3,700 feet, or 1,500 and 3,500 feet below the surface.

[0077] The wellbores 14 will be selected for certain functions and may be designated as heat injection wells, water injection wells, oil production wells or water-soluble mineral solution production wells. In one aspect, the wellbores 14 are dimensioned to serve two, three, or all four of these purposes. Suitable tools and equipment may be sequentially run into and removed from the wellbores 14 to serve
25 the various purposes.
30

[0078] A fluid processing facility **20** is also shown schematically. The fluid processing facility **20** is equipped to receive fluids produced from the organic-rich rock formation **16** through one or more pipelines or flow lines **22**. The fluid processing facility **20** may include equipment suitable for receiving and separating oil, gas, and water produced from the heated formation. The fluid processing facility **20** may further include equipment for separating out dissolved water-soluble minerals and/or migratory contaminant species, including, for example, dissolved organic contaminants, metal contaminants, or ionic contaminants in the produced water recovered from the organic-rich rock formation **16**. The contaminants may include, for example, aromatic hydrocarbons such as benzene, toluene, xylene, trimethylbenzene, and polyaromatic hydrocarbons such as anthracene, naphthalene, chrysene and pyrene. Metal contaminants may include species containing arsenic, boron, chromium, mercury, selenium, lead, vanadium, nickel, cobalt, molybdenum, or zinc. Ionic contaminant species may include, for example, sulfates, chlorides, fluorides, lithium, potassium, aluminum, ammonia, and nitrates.

[0079] The contaminants may be removed in surface facilities by various means. One such method is via an adsorbent material such as activated carbon, activated alumina, silica gel, clay, or fuller's earth. Another such method is to employ bio-oxidation to treat the organic contaminants. Because of the potential for ground water contaminants, one optional step in the method is to assess the hydrological connectivity of the oil shale zone with aquifers to determine the risk to ground water.

[0080] The dissolved water-soluble minerals removed from the oil shale formation are preferably ones with chemical compositions that include sodium. Examples of sodium minerals include nahcolite (sodium bicarbonate), soda ash (sodium carbonate), or dawsonite ($\text{NaAl}(\text{CO}_3)(\text{OH})_2$), or combinations thereof. In some instances, the soluble minerals are generated via decomposition of other minerals due to the oil shale heating. Preferably, the original soluble mineral is nahcolite, and the decomposed mineral is soda ash.

[0081] The dissolved water-soluble minerals may be removed from the produced fluid in one aspect by precipitation caused by altering the temperature of the solution.

The soda ash (sodium carbonate) may be converted back to nahcolite (sodium bicarbonate) in surface facilities via reaction with CO₂.

[0082] Alternatively, the equipment for separating out water dissolved minerals and contaminants are in other facilities.

- 5 [0083] In order to recover oil, gas, and sodium (or other) water-soluble minerals, a series of steps are undertaken. Figure 2 presents a flow chart demonstrating a method of *in situ* thermal recovery of oil and gas from an organic-rich rock formation 100, in one embodiment. It is understood that the order of some of the steps from Figure 2 may be changed, and that the sequence of steps is merely for illustration.
- 10 [0084] First, the oil shale (or other organic-rich rock) formation 16 is identified within the development area 10. This step is shown in box 110. The targeted development area within the oil shale formation may be identified by measuring or modeling the depth, thickness and organic richness of the oil shale as well as evaluating the position of the organic-rich rock formation relative to other rock types,
- 15 structural features (e.g. faults, anticlines or synclines), or hydrogeological units (i.e. aquifers). This is accomplished by creating and interpreting maps and/or models of depth, thickness, organic richness and other data from available tests and sources. This may involve performing geological surface surveys, studying outcrops, performing seismic surveys, and/or drilling boreholes to obtain subsurface rock
- 20 samples. Rock samples may be analyzed to assess kerogen content and fluid hydrocarbon generating capability. The richness of the organic-rich rock formation may be ascertained from well or outcrop samples using a variety of data including but not limited to organic carbon content, hydrogen index, or modified Fischer assay analyses. Subsurface permeability may also be assessed via rock samples, outcrops,
- 25 or studies of ground water flow. Furthermore the connectivity of the development area to ground water sources may be assessed.

[0085] Next, a plurality of wellbores 14 is formed across the targeted development area 10. This step is shown schematically in box 115. The purposes of the wellbores 14 are set forth above and need not be repeated. However, it is noted

that for purposes of the wellbore formation step of box 115, only a portion of the total initial heat injection wells and hydrocarbon production wells need be completed.

5 [0086] It is understood that petroleum engineers will develop a strategy for the best depth and arrangement for the wellbores 14, depending upon anticipated reservoir characteristics, economic constraints, and work scheduling constraints. In addition, engineering staff will determine what wellbores 14 shall be used for initial formation 16 heating. This selection step is represented by box 120. In one aspect, wellbores are placed in a pattern such that untreated pillars of oil shale are left to support the overburden and prevent subsidence.

10 [0087] There are various methods for applying heat to the organic-rich rock formation 16. One such method involves the use of electrical resistive heating elements in a cased or uncased wellbore. Other methods include the use of circulated hot fluids, downhole combustors, *in situ* combustion, radio-frequency (RF) electrical energy, or microwave energy. Still others include injecting a hot fluid into the oil shale formation to directly heat it. The present methods are not limited to the heating technique employed. The heating step is represented generally by box 130. Preferably, for *in situ* processes the heating of a production zone takes place over a period of months, or even four or more years. Alternatively, the formation may be heated for one to fifteen years, alternatively, 3 to 10 years, 1.5 to 7 years or 2 to 5 years. The bulk of the target zone of the formation may be heated to between 270 to 800 °C. Alternatively, the bulk of the target zone of the formation may be heated to between 300 to 400 °C. Preferably, the bulk of the target zone is ultimately heated to a temperature below 400° C (752° F).

25 [0088] In connection with the heating step 130, the rock formation 16 may optionally be fractured to aid heat transfer or hydrocarbon fluid production. The optional fracturing step is shown in box 125. Fracturing may also be accomplished by creating thermal fractures within the formation through application of heating. Alternatively, a process known as hydraulic fracturing may be used. By heating the organic-rich rock and transforming the kerogen to oil and gas, the permeability is increased via thermal fracture formation and subsequent production of a portion of the

30

- 24 -

hydrocarbon fluids generated from the kerogen. Thermal fracture formation is caused by thermal expansion of the rock and fluids and by chemical expansion of the transforming kerogen into oil and gas. Thermal fracturing can occur both in the immediate region undergoing heating, and in cooler neighboring regions. The thermal fracturing in the neighboring regions is due to propagation of fractures and tension stresses developed due to the expansion in the hotter zones. Thermal fractures increase permeability and aid fluid flow within the formation. Hydraulic fracturing is a process known in the art of oil and gas recovery where a fracture fluid is pressurized within the wellbore above the fracture pressure of the formation, thus developing fracture planes within the formation to relieve the pressure generated within the wellbore. Hydraulic fractures may be used to create additional permeability and/or be used to provide an extended geometry for an extended heat source, such as in the WO 2005/010320 method.

[0089] Any *in situ* method that effectively produces oil and gas from oil shale will create permeability in what was originally a very low permeability rock. The extent to which this will occur is illustrated by the large amount of expansion that must be accommodated if fluids generated from kerogen are unable to flow. The concept is illustrated in **Figure 3**.

[0090] **Figure 3** provides a bar chart comparing one ton of Green River oil shale before **50** and after **51** a simulated *in situ*, retorting process. The simulated process was carried out at 2,400 psi and 750° F. Before the conversion, a total of 15.3 ft³ of rock matrix **52** existed. This matrix comprised 7.2 ft³ of mineral **53**, i.e., shale, and 8.1 ft³ of kerogen **54** imbedded within the shale. As a result of the conversion the material expanded to 26.1 ft³ **55**. This represented 7.2 ft³ of mineral **56** (the same number as before the conversion), 6.6 ft³ of hydrocarbon liquid **57**, i.e., oil, 9.4 ft³ of hydrocarbon gas **58**, and 2.9 ft³ of coke **59**. It can be seen that substantial volume expansion occurred during the conversion process. This, in turn, increases permeability of the rock structure.

[0091] The formation **16** is heated to a temperature sufficient to pyrolyze at least a portion of the oil shale in order to pyrolyze the kerogen and to create hydrocarbon

- 25 -

fluids. The resulting liquids and hydrocarbon gases may be refined into products which resemble common commercial petroleum products. Such liquid products include transportation fuels such as diesel, jet fuel and naphtha. Generated gases include light alkanes, light alkenes, H₂, CO₂, CO, and NH₃. Conversion of the oil shale will create permeability in the oil shale section in rocks that were originally impermeable. Preferably, the heating process, shown by box 135, occurs over a lengthy period of time. In one aspect, the heating period is from three months to four or more years. Also as part of box 135, the formation 16 is heated to a temperature sufficient to convert at least a portion of nahcolite, if present, to soda ash. Heat used to mature the oil shale and recover oil and gas will also convert nahcolite to sodium carbonate (soda ash), a related sodium mineral. The process of converting nahcolite (sodium bicarbonate) to soda ash (sodium carbonate) has been described above.

[0092] As part of the hydrocarbon fluid production process 100, certain wells 14 may be designated as oil and gas production wells. This step is depicted by box 140. Oil and gas production might not be initiated until it is determined that the kerogen has been sufficiently retorted to allow maximum recovery of oil and gas from the formation 16. In some instances, dedicated production wells are not drilled until after heat injection wells (box 130) have been in operation for a period of several weeks or months. Thus, box 140 may include the formation of additional wellbores 14.

[0093] After certain wellbores 14 have been designated as oil and gas production wells, oil and/or gas is produced from the wellbores 14. The oil and/or gas production process is shown at box 145. At this stage (box 145), the water-soluble minerals, such as nahcolite and converted soda ash remain substantially trapped in the rock formation 16 as finely disseminated crystals or nodules within the oil shale beds, and are not produced. However, some nahcolite and/or soda ash may be dissolved in the water created during heating within the formation.

[0094] The impact of heating oil shale to produce oil and gas prior to producing nahcolite is to convert the nahcolite to a more recoverable form (soda ash), and provide permeability facilitating its subsequent recovery. Water-soluble mineral recovery may take place as soon as the retorted oil is produced, or it may be left for a

- 26 -

period of years for later recovery. If desired, the soda ash can be readily converted back to nahcolite on the surface. The ease with which this conversion can be accomplished makes the two minerals effectively interchangeable.

[0095] Box 150 presents a typical next step in the oil and gas recovery method
5 100. Here, certain wellbores 14 are designated as water or aqueous fluid injection wells. Aqueous fluids are solutions of water that may contain other species. The other species may be present to alter the pH. Alternatively, the other species may reflect the availability of brackish water not saturated in the species wished to be leached from the subsurface. As used herein, an aqueous fluid is meant to refer to
10 water including other species and water that does not include other species. Preferably, the water injection wells are selected from some or all of the wellbores used for heat injection or for oil and/or gas production. However, the scope of the step of box 150 may include the drilling of yet additional wellbores 14 for use as dedicated water injection wells. In this respect, it may be desirable to complete water
15 injection wells along a periphery of the development area 10 in order to create a boundary of high pressure.

[0096] Next, water or an aqueous fluid is injected through the water injection wells and into the oil shale formation 16. This step is shown at box 160. The water may be in the form of steam or pressurized hot water. Alternatively the injected water
20 may be cool and becomes heated as it contacts the previously heated formation. The injection process may further induce fracturing. This process may create fingered caverns and brecciated zones in the nahcolite-bearing intervals some distance, for example up to 200 feet out, from the water injection wellbores. In one aspect, a gas cap, such as nitrogen, may be maintained at the top of each "cavern" to prevent
25 vertical growth.

[0097] In some cases water injection wells may not be necessary if a sufficiently strong connected aquifer is present. In this case, drawing on production wells may allow existing subsurface waters to flow into the heated formation and serve the purpose of water injection.

- 27 -

[0098] The injection of water into the organic-rich rock formation **16** causes the water to contact water-soluble minerals and various migratory contaminant species. Preferably the water-soluble minerals are soda ash and any unconverted nahcolite. As the heated water sweeps through the rock formation **16**, a water-soluble mineral solution is formed. Sodium carbonate, or soda ash, is soluble in water and is readily recovered by solution mining. Saturated sodium carbonate solutions may have about 32 wt. % Na_2CO_3 in water at temperatures between 30° C and 140° C, about 23 wt. % at 200° C, and about 8.4 wt. % at 300° C.

[0099] Along with the designation of certain wellbores **14** as water injection wells, the design engineers may also designate certain wellbores **14** as water or water-soluble mineral solution production wells. These wells may be the same as wells used to previously produce hydrocarbons or inject heat. These recovery wells will produce an aqueous solution of dissolved water-soluble minerals and other species, including, for example, migratory contaminant species. For example, the solution may be one primarily of dissolved soda ash. This step is shown in box **165**. Alternatively, single wellbores may be used to both inject water and then to recover a sodium mineral solution. Thus, box **165** includes the option of using the same wellbores **14** for both water injection and solution production (box **165**).

[0100] It is also noted that producing hydrocarbons from pyrolyzed oil shale will generally leave behind some migratory contaminant species which are at least partially water-soluble. Depending on the hydrological connectivity of the pyrolyzed shale oil to shallower zones, these components may eventually migrate into ground water in concentrations which are environmentally unacceptable. The types of potential migratory contaminant species depend on the nature of the oil shale pyrolysis and the composition of the oil shale being converted. If the pyrolysis is performed in the absence of oxygen or air, the contaminant species may include aromatic hydrocarbons (e.g. benzene, toluene, ethylbenzene, xylenes), polyaromatic hydrocarbons (e.g. anthracene, pyrene, naphthalene, chrysene), metal contaminants (e.g. As, Co, Pb, Mo, Ni, and Zn), and other species such as sulfates, ammonia, Al, K, Mg, chlorides, fluorides and phenols. If oxygen or air is employed, contaminant species may also include ketones, alcohols, and cyanides.

- 28 -

[0101] Temporary control of the migration of the migratory contaminant species, especially during the pyrolysis process, can be obtained via placement of the injection and production wells **14** such that fluid flow out of the heated zone is minimized. Typically, this involves placing injection wells at the periphery of the heated zone so as to cause pressure gradients which prevent flow from inside the heated zone from leaving the zone.

[0102] **Figure 4** is a cross-sectional view of an illustrative oil shale formation that is within or connected to ground water aquifers and the formation leaching operation. Four separate oil shale formation zones are depicted (**23, 24, 25 & 26**) within the oil shale formation. The water aquifers are below the ground surface **27**, and are categorized as an upper aquifer **20** and a lower aquifer **22**. Intermediate between the upper and lower aquifers is an aquitard **21**. It can be seen that certain zones of the formation are both aquifers or aquitards and oil shale zones. A plurality of wells (**28, 29, 30, & 31**) is shown traversing vertically downward through the aquifers. One of the wells is serving as a water injection well **31**, while another is serving as a water production well **30**. In this way, water is circulated **32** through at least the lower aquifer **22**.

[0103] **Figure 4** shows diagrammatically the water circulation **32** through an oil shale volume that was heated **33**, that resides within or is connected to an aquifer **22**, and from which hydrocarbon fluids were previously recovered. Introduction of water via the water injection well **31** forces water into the previously heated oil shale **33** and water-soluble minerals and migratory contaminants species are swept to the water production well **30**. The water is then processed in a facility **34** wherein the water-soluble minerals (e.g. nahcolite or soda ash) and the migratory contaminants are substantially removed from the water stream. Water is then reinjected into the oil shale volume **33** and the formation leaching is repeated. This leaching with water is intended to continue until levels of migratory contaminant species are at environmentally acceptable levels within the previously heated oil shale zone **33**. This may require 1 cycle, 2 cycles, 5 cycles or 10 cycles of formation leaching, where a single cycle indicates injection and production of approximately one pore volume of water. It is understood that there may be numerous water injection and water

production wells in an actual oil shale development. Moreover, the system may include monitoring wells (28 & 29) which can be utilized during the oil shale heating phase, the shale oil production phase, the leaching phase, or during any combination of these phases to monitor for migratory contaminant species and/or water-soluble minerals.

5
[0104] Alternatively, physical barriers can be placed around the heated zone. These barriers may involve freeze walls or grout walls. Freeze walls involve circulating refrigerant through peripheral wells to freeze native water in the vicinity. Shell has discussed freeze walls for oil shale production in a number of patents, including U.S. Pat. No. 6,880,633. The entire disclosure of which is incorporated herein by reference. Grout walls involve injecting cement into the formation to fill permeable pathways.

15
[0105] As discussed herein, some embodiments of the invention include an *in situ* method of recovering natural resources. The natural resources may be recovered from an organic-rich rock formation, including, for example, an oil shale formation. The organic-rich rock formation may include formation hydrocarbons, including, for example, kerogen, coal, and heavy hydrocarbons. In some embodiments of the invention the natural resources may include hydrocarbon fluids, including, for example products of the pyrolysis of formation hydrocarbons such as shale oil. In some embodiments of the invention the natural resources may also include water-soluble minerals, including, for example, nahcolite (sodium bicarbonate), soda ash (sodium carbonate) and dawsonite ($\text{NaAl}(\text{CO}_3)(\text{OH})_2$).

25
[0106] Some embodiments of the invention include *in situ* heating an organic-rich rock formation that contains both formation hydrocarbons and formation water-soluble minerals prior to substantial removal of the formation water-soluble minerals from the organic-rich rock formation. In some embodiments of the invention there is no need to partially, substantially or completely remove the water-soluble minerals prior to *in situ* heating. For example, in an oil shale formation that contains naturally occurring nahcolite, the oil shale may be heated prior to substantial removal of the nahcolite by solution mining. Substantial removal of a water-soluble mineral means

30

the degree of removal of a water-soluble mineral that occurs from any commercial solution mining operation as known in the art. Substantial removal of a water-soluble mineral may be approximated as removal of greater than 5 weight percent of the total amount of a particular water-soluble mineral present in the zone targeted for hydrocarbon fluid production in the organic-rich rock formation. In alternative
5 embodiments, *in situ* heating of the organic-rich rock formation to pyrolyze formation hydrocarbons may be commenced prior to removal of greater than 3 weight percent, alternatively 7 weight percent, 10 weight percent or 13 weight percent of the formation water-soluble minerals from the organic-rich rock formation.

10 **[0107]** In some embodiments of the invention heating of the organic-rich rock formation pyrolyzes at least a portion of the formation hydrocarbons to create hydrocarbon fluids. The formation hydrocarbons may be pyrolyzed *in situ* by raising the organic-rich rock formation, or zones within the formation, to a pyrolyzation temperature. In alternative embodiments, the heating rate of the formation may be
15 slowly raised through the pyrolysis temperature range. For example, an *in situ* conversion process for formation hydrocarbons may include heating at least a portion of an organic-rich rock formation to raise the average temperature of the zone above about 270 °C by a rate less than a selected amount (e.g., about 10 °C, 5 °C, 3 °C, 1 °C, 0.5 °C, or 0.1 °C) per day. In a further embodiment the portion may be heated such
20 that an average temperature of the selected zone may be less than about 375 °C or, in some embodiments, less than about 400 °C. The formation may be heated such that a temperature within the formation reaches (at least) an initial pyrolyzation temperature (e.g., a temperature at the lower end of the temperature range where pyrolyzation occurs in a reasonable, e.g., days, weeks or months, period of time). The pyrolysis
25 temperature range may vary depending on the types of formation hydrocarbons within the formation, the heating methodology, and distribution of heating sources. For example, a pyrolysis temperature range may include temperatures between about 250 °C and about 900 °C. In an alternative embodiment, a pyrolysis temperature range may include temperatures between about 270 °C to about 400 °C.

30 **[0108]** In some embodiments, the hydrocarbon fluids may include a pyrolysis oil component (or condensable component) and a pyrolysis gas component (or non-

condensable component). Condensable hydrocarbons produced from the formation will typically include paraffins, cycloalkanes, mono-aromatics, and di-aromatics as major components. Such condensable hydrocarbons may also include other components such as tri-aromatics and other hydrocarbon species.

5 **[0109]** In certain embodiments, a majority of the hydrocarbons in the produced fluid may have a carbon number of less than approximately 25. Alternatively, less than about 15 weight % of the hydrocarbons in the fluid may have a carbon number greater than approximately 25. The non-condensable hydrocarbons may include, but are not limited to, hydrocarbons having carbon numbers less than 5.

10 **[0110]** In certain embodiments, the API gravity of the condensable hydrocarbons in the produced fluid may be approximately 20 or above (e.g., 25, 30, 40, 50, etc.). In certain embodiments, the hydrogen to carbon atomic ratio in produced fluid may be at least approximately 1.7 (e.g., 1.8, 1.9, etc.).

[0111] In some embodiments of the invention heating of the organic-rich rock
15 formation both pyrolyzes at least a portion of the formation hydrocarbons to create hydrocarbon fluids and makes available migratory contaminant species previously bound in the organic-rich rock formation. The migratory contaminant species may be formed through pyrolysis of the formation hydrocarbon, may be liberated from the formation itself upon heating, or may be made accessible through the creation of
20 increased permeability upon heating of the formation. The migratory contaminant species may be soluble in water or aqueous fluids present in or injected into the organic-rich rock formation.

[0112] Some embodiments include producing at least a portion of the hydrocarbon fluids from the organic-rich rock formation. The hydrocarbon fluids
25 may be produced through production wells. Production wells may be cased or uncased wells and drilled and completed through methods known in the art.

[0113] In some embodiments, at least a portion of the migratory contaminant species remain in the organic-rich rock formation after the hydrocarbon fluids are produced. In such case, it may be desirable to inject an aqueous fluid into the

- 32 -

organic-rich rock formation and have the injected aqueous fluid dissolve at least a portion of the water-soluble minerals and/or the migratory contaminant species to form an aqueous solution. The aqueous solution may then be produced from the organic-rich rock formation through, for example, solution production wells. The aqueous fluid may be adjusted to increase the solubility of the migratory contaminant species and/or the water-soluble minerals. The adjustment may include the addition of an acid or base to adjust the pH of the solution.

[0114] Some embodiments include processing the aqueous solution in a surface facility to remove at least some of the migratory contaminant species. The migratory contaminant species may be removed through use of, for example, an adsorbent material, reverse osmosis, chemical oxidation, bio-oxidation, and/or ion exchange. Examples of these processes are individually known in the art. Exemplary adsorbent materials may include activated carbon, clay, or fuller's earth.

[0115] In one embodiment, the migratory contaminant species include one or more of aromatic hydrocarbons, polyaromatic hydrocarbons, oxygenated hydrocarbons, metal contaminants, and ionic contaminants. In an alternative embodiment, the migratory contaminant species include one or more of benzene, toluene, xylene, ethylbenzene, tri-methylbenzene, and polyaromatic hydrocarbon species. In an alternative embodiment, the migratory contaminant species include one or more of metal contaminants containing arsenic, boron, chromium, mercury, selenium, lead, vanadium, nickel, cobalt, molybdenum and zinc.

[0116] Some embodiments of the invention include assessing the connectivity of the organic-rich rock formation to aquifers. This may be done to determine if, or to what extent, *in situ* pyrolysis of formation hydrocarbons in the organic-rich rock formation may create migratory species with the propensity to migrate into an aquifer. If the organic-rich rock formation is hydrologically connected to an aquifer, precautions may be taken to reduce or prevent species generated or liberated during pyrolysis from entering the aquifer. Alternatively, the organic-rich rock formation may be flushed with water or an aqueous fluid after pyrolysis as described herein to remove water-soluble minerals and/or migratory contaminant species. In other

embodiments, the organic-rich rock formation may be substantially hydrologically unconnected to any source of ground water. In such a case, flushing the organic-rich rock formation may not be desirable for removal of migratory contaminant species but may nevertheless be desirable for recovery of water-soluble minerals.

5 [0117] In certain embodiments a mass of at least a portion of the formation may be reduced due, for example, to pyrolysis of formation hydrocarbons and the production of hydrocarbon fluids from the formation. As such, the permeability and porosity of at least a portion of the formation may increase. In addition, removing water during the heating may also increase the permeability and porosity of at least a
10 portion of the formation.

[0118] Certain embodiments may include increasing the permeability of at least a portion of an organic-rich rock formation to greater than about 0.01, 0.1, 1, 10, 20 and/or 50 Darcy. In addition, certain embodiments may include substantially uniformly increasing the permeability of at least a portion of an organic-rich rock
15 formation. Some embodiments may include increasing the porosity of at least a portion of an organic-rich rock formation substantially uniformly.

[0119] Certain systems and methods described herein may be used to treat formation hydrocarbons in at least a portion of a relatively low permeability formation (e.g., in "tight" formations that contain formation hydrocarbons). Such formation
20 hydrocarbons may be heated to pyrolyze at least some of the formation hydrocarbons in a selected zone of the formation. Heating may also increase the permeability of at least a portion of the selected zone. Hydrocarbon fluids generated from pyrolysis may be produced from the formation, thereby further increasing the formation permeability.

25 [0120] In an embodiment, heating a portion of an organic-rich rock formation *in situ* to a temperature less than an upper pyrolysis temperature may increase permeability of the heated portion. For example, permeability may increase due to formation of fractures within the heated portion caused by application of heat. As the temperature of the heated portion increases, water may be removed due to

vaporization. The vaporized water may escape and/or be removed from the formation. Removal of water may also increase the permeability of the heated portion. In addition, permeability of the heated portion may also increase as a result of production of hydrocarbon fluids from pyrolysis of at least some of the formation hydrocarbons within the heated portion on a macroscopic scale. In an embodiment, the permeability of a selected zone within a heated portion of an organic-rich rock formation may be substantially uniform. For example, heating by conduction may be substantially uniform, and thus a permeability created by conductive heating may also be substantially uniform.

10 **[0121]** Permeability of a selected zone within the heated portion of the organic-rich rock formation may also rapidly increase while the selected zone is heated by conduction. For example, permeability of an impermeable organic-rich rock formation may be less than about 0.1 millidarcy before heating. In some embodiments, pyrolyzing at least a portion of organic-rich rock formation may increase a permeability within a selected zone of the portion to greater than about 15 millidarcies, 100 millidarcies, 1 Darcy, 10 Darcies, 20 Darcies, or 50 Darcies. Therefore, a permeability of a selected zone of the portion may increase by a factor of more than about 10, 100, 1,000, 10,000, or 100,000. In one embodiment, the organic-rich rock formation has an initial total permeability less than 1 millidarcy, 20 alternatively less than 0.1 or 0.01 millidarcies, before heating the organic-rich rock formation. In one embodiment, the organic-rich rock formation has a post heating total permeability of greater than 1 millidarcy, alternatively, greater than 10, 50 or 100 millidarcies, after heating the organic-rich rock formation.

25 **[0122]** In some embodiments, heating the organic-rich formation includes generating soda ash by decomposition of nahcolite. In some embodiments the method may include processing an aqueous solution containing water-soluble minerals in a surface facility to remove a portion of the water-soluble minerals. The processing step may include removing the water-soluble minerals by precipitation caused by altering the temperature of the aqueous solution. In some embodiments, the water-soluble minerals include sodium. 30 Alternatively, the water-soluble minerals may include nahcolite (sodium bicarbonate), soda ash (sodium carbonate), dawsonite

- 35 -

($\text{NaAl}(\text{CO}_3)(\text{OH})_2$), or combinations thereof. The surface processing may further include converting the soda ash back to sodium bicarbonate (nahcolite) in the surface facility by reaction with CO_2 . After partial or complete removal of the water-soluble minerals, the aqueous solution may be reinjected into a subsurface formation after a
5 portion of the water-soluble minerals and/or migratory contaminant species are removed and then the solution may be sequestered in the subsurface formation. The subsurface formation may be the same as or different from the organic-rich rock formation.

[0123] In some embodiments, heating the organic-rich rock formation includes
10 generating soda ash by decomposition of nahcolite present in the formation. In the decomposition process CO_2 is generated. Some embodiments include monitoring for the presence of the formed CO_2 and, alternatively, estimating the extent of the heating of the organic-rich rock formation from the CO_2 monitoring. The estimated extent may include estimating the distribution of heating in the formation, estimating the
15 overall volume which has reached a given temperature, or estimating the rate of progression of a heat front in the formation. Estimations may be calculated based on (i) measured or estimated stoichiometries, decomposition thermodynamics and/or kinetics of nahcolite, kerogen, and/or other carbonate minerals and (ii) measured or estimated distributions of nahcolite kerogen and/or other carbonates in the formation.
20 Additionally, heat transfer models and/or simulations may be employed based on the heat input rates to the formation and assumed heat transfer characteristics of the formation and then the models and/or simulations refined based on the measured CO_2 data and calculations. Alternatively, the CO_2 monitoring data may be correlated to the extent of heating through use of a computer model based on nahcolite conversion
25 to soda ash. The amount of the CO_2 formed may be tracked in a nahcolite conversion process to determine the extent to which soda ash is present. The estimates of the extent of heating based on CO_2 data and calculations may be used to refine heat transfer models of the organic-rich rock formation and/or simulations of the generation and production of hydrocarbon fluids from the organic-rich rock
30 formation. The heating estimates may be used to adjust the rate at which heat is input into the organic-rich rock formation at one or more locations or production fluids are

- 36 -

produced from the formation. The heating of the organic-rich rock formation may be accomplished through use of heater wells. The heater wells may include, for example, electrical resistance heating elements. The production of hydrocarbon fluids from the formation may be accomplished through use of production wells. The
5 adjustment of the rate at which heat is input into the organic-rich rock formation or adjusting the rate at which production fluids are produced from the formation may be accomplished through one or more of adjusting the heat input to a heater well, adjusting the flow rate from a production well, adjusting the back pressure of a production well, or combinations thereof.

10 **[0124]** There may be several different types of wells used in embodiments of the invention. For example, the heating of the organic-rich rock formation may be accomplished through use of heater wells. The heater wells may include, for example, electrical resistance heating elements. The production of hydrocarbon fluids from the formation may be accomplished through use of production wells. The
15 injecting of the aqueous fluid may be accomplished through use of injection wells. The production of the aqueous solution may be accomplished through use of solution production wells. The different types of wells may be used for multiple purposes. For example, the production wells may also be used as injection wells for injecting water into the organic-rich rock formation. Alternatively, the production wells may
20 also be used as solution production wells for producing the aqueous solution from the organic-rich rock formation. This method may be combined with any of the other aspects of the invention as discussed herein.

[0125] In one embodiment, the method includes an *in situ* method of recovering natural resources including heating an organic-rich rock formation *in situ*. The
25 formation may be substantially impermeable to fluid flow initially, contain formation hydrocarbons, and water-soluble minerals. In some embodiments the heating occurs prior to substantial removal of the formation water-soluble minerals. The heating pyrolyzes at least a portion of the formation hydrocarbons to create hydrocarbon fluids and thereby create permeability within a matured (pyrolyzed) organic-rich rock
30 zone in of the organic-rich rock formation. The hydrocarbon fluids may be produced from the formation. The method may include leaving a second portion of the

formation hydrocarbons substantially unpyrolyzed, thereby preserving an unmatu-
red organic-rich rock zone. In some embodiments, the unmatu-
red organic-rich rock zones may be shaped as pillars running substantially the entire thickness of the organic-rich
rock formation. The heating rate and distribution of heating of the formation may be
5 designed and implemented to leave sufficient unmatu-
red pillars to prevent subsidence. Further, the method may include converting at least a portion of the formation water-
soluble minerals to a different water-soluble mineral. For example, naturally
occurring nahcolite may be decomposed to soda ash through heating. This method
may be combined with any of the other aspects of the invention as discussed herein.

10 **[0126]** The method may include flushing the matured organic-rich rock zone and
the unmatu-
red organic-rich rock zone with an aqueous fluid. The aqueous fluid may
be used to dissolve water-soluble minerals and migratory contaminant species as
discussed herein. The flushing may optionally be completed after a substantial
portion of the hydrocarbon fluids have been produced from the matured organic-rich
15 rock zone. The resulting aqueous solution may then be produced from the organic-
rich rock formation to the surface for processing as discussed herein. In some
embodiments, the flushing step may be delayed after the hydrocarbon fluid production
step. The flushing may be delayed to allow heat generated from the heating step to
migrate deeper into surrounding unmatu-
red organic-rich rock zones to convert
20 nahcolite within the surrounding unmatu-
red organic-rich rock zones to soda ash. Alternatively, the flushing may be delayed to allow heat generated from the heating
step to generate permeability within the surrounding unmatu-
red organic-rich rock
zones. Further, the flushing may be delayed based on current and/or forecast market
prices of sodium bicarbonate, soda ash, or both as further discussed herein. This
25 method may be combined with any of the other aspects of the invention as discussed
herein.

[0127] One embodiment may include an *in situ* method of recovering natural
resources including heating the organic-rich rock formation *in situ*, where the
formation contains formation water-soluble minerals. The heating may occur prior to
30 substantial removal of the water-soluble minerals. The heating may both pyrolyze at
least a portion of the formation hydrocarbons to create hydrocarbon fluids and

- 38 -

generate water which migrates and at least partially dissolves the formation water-soluble minerals *in situ* to form an aqueous fluid within the formation. The generated water may be produced from one or more occurrences. For example, the generated water may be produced by decomposition of formation water-soluble minerals, pyrolyzation of formation hydrocarbons, dehydration of formation clays, or combinations thereof. This method may be combined with any of the other aspects of the invention as discussed herein.

[0128] Some embodiments further include producing a production fluid from the organic-rich rock formation where the production fluid contains the hydrocarbon fluids and the aqueous fluid. The aqueous fluid may contain water-soluble minerals and/or migratory contaminant species. In such case, the production fluid may be separated into a hydrocarbon stream and an aqueous stream at a surface facility. Thereafter the water-soluble minerals and/or migratory contaminant species may be recovered from the aqueous stream. This embodiment may be combined with any of the other aspects of the invention discussed herein.

[0129] One embodiment includes an *in situ* method of recovering natural resources, including assessing the market price for a water-soluble mineral and comparing the market price for the water-soluble mineral to a cost-to-produce criterion. For example, the method may utilize a market price that is representative of the current market price, the forecasted market price, or a combination thereof. There are many potential market prices that may be used in the method. For example, the market price may be a listed commodity price, the price used in an existing or potential contractual arrangement or another measure of the current or potential value of the water-soluble mineral or a commodity or consumer product containing the water-soluble mineral or derivatives thereof. The water-soluble mineral may be a sodium mineral, including, for example, nahcolite or soda ash. The cost-to-produce criterion may be any criterion that reflects a measurement of the cost to produce the water-soluble mineral of interest or derivatives thereof. For example, the cost-to-produce criterion may include the cost to solution mine the water-soluble mineral of interest. The cost-to-produce criterion may include a measure of the cost to produce the water-soluble mineral before heating the organic-rich rock formation to pyrolyze

formation hydrocarbons as compared to the cost to produce the water-soluble mineral after heating the organic-rich rock formation to pyrolyze formation hydrocarbons. The method may include determining that the market price of the water-soluble mineral is less than the cost-to-produce criterion. In such case, an operator may opt to
5 forego producing the water-soluble minerals before pyrolyzing the formation hydrocarbons in the organic-rich rock formation, thus delaying production of the water-soluble minerals to a later time. The resulting multi-mineral production scheme may be more economic than producing the water-soluble minerals before pyrolyzation. This embodiment may be combined with other embodiments and
10 aspects of the invention discussed herein.

[0130] An embodiment may include an *in situ* method of recovering natural resources, including providing produced fluid processing facilities which are sized to process a first hydrocarbon fluid production rate produced during an initial production period together with a first CO₂ production rate produced during the initial production
15 period. The first CO₂ production rate may include CO₂ generated from dissociation of nahcolite to form soda ash. Thus the method may be used to adequately size produced fluid processing facilities where the operator plans to pyrolyze formation hydrocarbons without removing the naturally occurring nahcolite before pyrolyzation. The method may enable one to economically produce hydrocarbon fluids from an
20 organic-rich rock formation without the necessity of removing the nahcolite beforehand, thus improving the overall project economics. This embodiment may also be practiced by designing and/or constructing a system that includes the produced fluid processing facilities. This method may be combined with any of the other aspects of the invention as discussed herein.

25 **[0131]** Methods to remove CO₂, as well as other so-called acid gases (such as H₂S), from produced hydrocarbon gas include the use of chemical reaction processes and of physical solvent processes. Chemical reaction processes typically involve contacting the gas stream with an aqueous amine solution at high pressure and/or low temperature. This causes the acid gas species to chemically react with the amines and
30 go into solution. By raising the temperature and/or lowering the pressure the chemical reaction can be reversed and a concentrated stream of acid gases can be

- 40 -

recovered. An alternative chemical reaction process involves hot carbonate solutions, typically potassium carbonate. The hot carbonate solution is regenerated and the concentrated stream of acid gases is recovered by contacting the solution with steam. Physical solvent processes typically involve contacting the gas stream with a glycol at
5 high pressure and/or low temperature. Like the amine processes, reducing the pressure or raising the temperature allows regeneration of the solvent and recovery of the acid gases. Certain amines or glycols may be more or less selective in the types of acid gas species removed. Sizing of any of these processes requires determining the amount of chemical to circulate, the rate of circulation, the energy input for
10 regeneration, and the size and type of gas-chemical contacting equipment. Contacting equipment typically involves packed or multi-tray countercurrent towers. Optimal sizing for each of these aspects is highly dependent on the rate at which gas is being produced from the formation and the concentration of the acid gases in the gas stream. Less commonly, cryogenic distillation is utilized to remove acid gases. This method
15 takes advantage of the differences in the boiling points of the gas components.

[0132] In different embodiments, the initial production period may include a one year period beginning from the point of the first heating of the organic-rich rock formation. Alternatively, the initial production period may include a two, three, four or a five year period beginning from the point of the first heating of the organic-rich
20 rock formation. In different embodiments, the first hydrocarbon fluid production rate may be the maximum daily hydrocarbon fluid production rate reached during the initial production period. Alternatively, the first hydrocarbon fluid production rate may be the maximum hourly, monthly or yearly hydrocarbon fluid production rate reached during the initial production period. In different embodiments, the first CO₂
25 production rate may be the maximum daily CO₂ production rate reached during the initial production period. Alternatively, the first CO₂ production rate may be the maximum hourly, monthly or yearly CO₂ production rate reached during the initial production period. This embodiment may be combined with other aspects of the invention discussed herein.

30 **[0133]** It can be seen that the current invention proposes to recover the value of the water-soluble minerals such as nahcolite after heating an oil shale zone and

producing at least some of the shale oil. There may be a one or more benefits to this approach, including:

5 [0134] (1) The shale oil can be significantly more valuable than the water-soluble mineral components. Thus, recovering the shale oil value earlier can improve the net present value of the development of a lease under development.

10 [0135] (2) Removing water-soluble minerals early in the process may disrupt the ability to produce the oil shale by certain methods. For instance, removal of the soluble minerals can hinder the ability to produce hydraulic fractures in the formation and make the shale more prone to cavern formation and subsidence. Subsidence can cause substantial stresses on the wellbore completions and lead to early and sudden failures.

15 [0136] (3) Solution mining after kerogen conversion can be combined with leaching of migratory contaminant species, including, for example, water-soluble organic components, heavy metal components and ionic species left over from producing the oil shale. The removal of such components may be environmentally necessary if the shale oil zone is connected to a ground water source. The alkali nature of sodium carbonate solutions can aid the washing of organics from the shale oil zone.

20 [0137] (4) Project and field coordination can be simplified by separating the oil shale and mineral removal activities. Moreover, certain wells and facilities can be reused from the *in situ* shale oil development for the mineral removal.

25 [0138] (5) The conversion of nahcolite to soda ash, with resultant CO₂ generation, during the oil shale heating can be used to monitor the progression of the oil shale maturation. As the nahcolite converts to soda ash, the production of generated CO₂ can be analyzed to help assess the position of the heat front and the nature of the generated permeability. At lower temperatures (<~250° C), the CO₂ generation in certain areas will be dominated by nahcolite decomposition. The heating behavior of oil shale can be correlated to the amount of CO₂ present in the produced fluid return stream based on estimates of the amount of nahcolite present *in*

situ. At higher temperatures, CO₂ concentrations may more greatly reflect generation from the kerogen converting to oil and gas and perhaps from dawsonite decomposition. At even higher temperatures (>400° C), the CO₂ generation also reflects other carbonate mineral dissociation. Analyzing the isotopic nature of the CO₂ (typically via mass spectrography) can be used to distinguish between CO₂ gas from organic and inorganic sources. Organic-sourced gas tends to be lighter (i.e., enriched in ¹²C vs. ¹³C) than inorganic-sourced gas. (See, for example, Laughrey, C.D. and Balassare, F.J., "Some Applications of Isotope Geochemistry for Determining Sources of Stray Carbon Dioxide Gas", Environmental Geosciences, 10(3), pp. 107-122, (2003)). The entire disclosure of which is incorporated herein by reference. CO₂ concentrations can be measured in a number of ways known in the art including gas chromatography, mass spectrography, infrared spectrography, Raman spectrography, photoacoustic spectrography, gas density measurements, and various chemical-specific reactions. Isotopic concentrations are typically measured via a combination of mass spectrography and gas chromatography.

[0139] (6) Extracting the water-soluble minerals after the oil shale maturation may increase their recovery since the maturation process increases permeability and connectivity in the formation. Thus, originally isolated concentrations of soluble minerals may become accessible to the injected water.

[0140] (7) The sodium minerals are produced as soda ash, rather than sodium bicarbonate. Produced nahcolite is often converted to soda ash in a facility and thus a step is saved with the *in situ* conversion.

[0141] (8) In addition to the benefits described above, if *in situ* conversion of the oil shale necessitates a ground water cleanup by intentional leaching, there may be additional synergies between cleanup operations and facilities and mineral solution mining operations and facilities.

[0142] The above-described processes may be of merit in connection with the recovery of hydrocarbons and nahcolite in the Piceance Basin of Colorado. Some have estimated that in some oil shale of the Western United States, up to 1 million

barrels of oil may be recoverable per surface acre. One study has estimated the oil shale resource within the nahcolite-bearing portions of the oil shale formations of the Piceance Basin to be 400 billion barrels of shale oil in place. Pitman, J.K., Pierce, F.W. and Grundy, W.D., "Thickness, Oil-Yield and Kriged Resource Estimates for the Eocene Green River Formation, Piceance Creek Basin, Colorado, United States Geological Survey Oil and Gas Investigations Chart OC-132, 6 sheets (1989)). The entire disclosure of which is incorporated herein by reference.

[0143] Dyni estimates the total nahcolite resource in the Piceance Basin at 32 billion short tons. This makes it the second largest sodium carbonate deposit in the world behind the trona deposits of southwest Wyoming (103 billion short tons). Resource density in the basin center areas varies from 170-490 million short tons per square mile.


[0144] As noted, it is preferred that thermal recovery of oil and gas be conducted before solution mining of nahcolite or other water-soluble minerals. In addition to the reasons discussed above, it is noted that solution mining can generate large voids in a rock formation and collapse breccias in an oil shale development unit. These voids and brecciated zones may pose problems for *in situ* and mining recovery of oil shale.

[0145] Also, when solution mining occurs first (as others have proposed), it becomes necessary to remove large amounts of water prior to oil shale heating. There are also inefficiencies associated with heating void filling water or gas.

[0146] In addition, heated fracture methods of *in situ* conversion of oil shale may not be possible within solution-mined areas. These recovery processes may require the construction of hydraulic fractures and the placement of a suitable proppant within those fractures. Voids and breccia may permit too much leak-off of fracture fluids, making pressure maintenance (required to form the fracture) and proppant placement difficult or impossible. In the virgin oil shale where nahcolite is present, the formation is tight and can maintain high pressure with minimal bleed off. Solution mining will probably change the fracturing behavior of the formation dramatically. At the least, solution mining may create the development of unpredictable fluid pathways resulting in lost production in the subsurface.

- 44 -

[0147] Finally, it is noted that, if heated to high enough temperature, sodium carbonate may further decompose into sodium oxide and CO₂, according to the following reaction.



5

[0148] One may track the amount of CO₂ generated in a nahcolite conversion process to determine the extent to which soda ash might be present or even sodium oxide. This is based upon a previously developed model which estimates the amount of nahcolite originally within the rock formation.

10 [0149] Certain features of the present invention are described in terms of a set of numerical upper limits and a set of numerical lower limits. It should be appreciated that ranges formed by any combination of these limits are within the scope of the invention unless otherwise indicated. Although some of the dependent claims have single dependencies in accordance with U.S. practice, each of the features in any of
15 such dependent claims can be combined with each of the features of one or more of the other dependent claims dependent upon the same independent claim or claims.

[0150] While it will be apparent that the invention herein described is well calculated to achieve the benefits and advantages set forth above, it will be appreciated that the invention is susceptible to modification, variation and change
20 without departing from the spirit thereof.

CLAIMS

What is claimed is:

1. An *in situ* method of recovering natural resources, comprising:
 - (a) heating *in situ* an organic-rich rock formation that contains both
5 formation hydrocarbons and one or more formation water-soluble minerals,
wherein the heating of the organic-rich rock formation both pyrolyzes
at least a portion of the formation hydrocarbons to create hydrocarbon fluids and
makes available one or more migratory contaminant species previously bound in the
organic-rich rock formation;
 - 10 (b) producing at least a portion of the hydrocarbon fluids from the organic-
rich rock formation, but wherein at least a portion of the one or more migratory
contaminant species remain in the organic-rich rock formation;
 - (c) injecting an aqueous fluid into the organic-rich rock formation,
wherein the injected aqueous fluid dissolves at least a portion of one or more water-
15 soluble minerals and the one or more migratory contaminant species to form a first
aqueous solution;
 - (d) producing the first aqueous solution from the organic-rich rock
formation;
 - (e) processing the first aqueous solution in a surface facility to remove a
20 portion of the one or more water-soluble minerals; and
 - (f) processing the first aqueous solution in the surface facility to remove at
least some of the one or more migratory contaminant species.
2. The method of Claim 1, wherein the heating step (a) results in at least a
25 portion of the organic-rich rock formation reaching a temperature of 270° C or greater.
3. The method of Claim 2, wherein the formation hydrocarbons include solid
hydrocarbons.
- 30 4. The method of Claim 3, wherein the solid hydrocarbons include kerogen.

- 46 -

5. The method of Claim 4, wherein the organic-rich rock formation is an oil shale formation.
6. The method of Claim 2, wherein the formation hydrocarbons include heavy hydrocarbons.
7. The method of Claim 5, wherein the organic-rich rock formation has an initial total permeability less than 1 millidarcy before the heating step (a).
8. The method of Claim 7, wherein the organic-rich rock formation has a post heating total permeability of greater than 10 millidarcies after the heating step (a) and before the injecting step (c).
9. The method of Claim 5, wherein the one or more migratory contaminant species include one or more of aromatic hydrocarbons, polyaromatic hydrocarbons, oxygenated hydrocarbons, metal contaminants, and ionic contaminants.
10. The method of Claim 9, wherein the one or more migratory contaminant species include one or more of benzene, toluene, xylene, ethylbenzene, trimethylbenzene, and polyaromatic hydrocarbon species.
11. The method of Claim 9, wherein the one or more migratory contaminant species include one or more of metal contaminants containing arsenic, boron, chromium, mercury, selenium, lead, vanadium, nickel, cobalt, molybdenum and zinc.
12. The method of Claim 5, wherein the one or more water-soluble minerals include sodium.
13. The method of Claim 12, wherein the one or more formation water-soluble minerals comprise nahcolite (sodium bicarbonate), soda ash (sodium carbonate), dawsonite ($\text{NaAl}(\text{CO}_3)(\text{OH})_2$), or combinations thereof.

14. The method of Claim 5, wherein the heating step (a) is initiated prior to substantial removal of the one or more formation water-soluble minerals from the organic-rich rock formation.
- 5 15. The method of Claim 5, wherein the heating step (a) is initiated prior to removal of greater than 7 weight percent of the initially present one or more formation water-soluble minerals from the organic-rich rock formation.
- 10 16. The method of Claim 5, wherein the processing step (e) includes removing the one or more water-soluble minerals by precipitation caused by altering the temperature of the first aqueous solution.
17. The method of Claim 16, further comprising:
(g) reinjecting the first aqueous solution in a subsurface formation after a
15 portion of the one or more water-soluble minerals are removed, wherein the first aqueous solution is then sequestered in the subsurface formation.
18. The method of Claim 16, wherein the one or more migratory contaminant species are removed through use of one or more of an adsorption, reverse osmosis,
20 chemical oxidation, bio-oxidation, and ion exchange.
19. The method of Claim 18, wherein the adsorbent material is activated carbon, activated alumina, silica gel, clay, or fuller's earth.
- 25 20. The method of Claim 5, wherein the one or more formation water-soluble minerals include nahcolite (sodium bicarbonate) and the one or more water-soluble minerals include soda ash (sodium carbonate).
- 30 21. The method of Claim 20, wherein the heating step (a) includes generating the soda ash by decomposition of the nahcolite.

22. The method of Claim 21, further including converting the soda ash back to sodium bicarbonate (nahcolite) in the surface facility by reaction with CO₂.

23. The method of Claim 21, wherein the heating step (a) further includes forming
5 CO₂ during the decomposition of nahcolite to soda ash, and the method further comprises:

(g) monitoring for the presence of the formed CO₂.

24. The method of Claim 23, further comprising:

10 (h) estimating the extent of the heating of the organic-rich rock formation from the CO₂ monitoring.

25. The method of Claim 24, further comprising:

15 (i) adjusting the rate at which heat is input into the organic-rich rock formation at one or more locations based upon the extent of heating estimated in step (f).

26. The method of Claim 23, wherein the heating step (a) is accomplished through use of heater wells and the step (i) of adjusting the rate at which heat is input into the
20 organic-rich rock formation includes adjusting the heat input to a heater well.

27. The method of Claim 24, wherein the estimating step (h) comprises correlating the CO₂ monitoring data to the extent of heating through use of a computer model based on nahcolite conversion to soda ash.

25

28. The method of Claim 5, further including assessing the connectivity of the organic-rich rock formation to aquifers.

29. The method of Claim 28, wherein the organic-rich rock formation is
30 determined to be substantially hydrologically connected to a source of ground water.

30. The method of Claim 5, wherein the heating step (a) is accomplished through use of heater wells, the producing step (b) is accomplished through use of production wells, the injecting step (c) is accomplished through use of injection wells, the producing step (d) is accomplished through use of solution production wells, and the production wells are also used as injection wells for injecting water into the organic-rich rock formation in step (c).

31. The method of Claim 5, wherein the heating step (a) is accomplished through use of heater wells, the producing step (b) is accomplished through use of production wells, the injecting step (c) is accomplished through use of injection wells, the producing step (d) is accomplished through use of solution production wells, and the production wells are also used as solution production wells for producing the first aqueous solution from the organic-rich rock formation in step (d).

32. The method of Claim 5, wherein the heating step (a) is accomplished through introducing heat into heater wells penetrating at least partially through the organic-rich rock formation.

33. The method of Claim 32, wherein the heater wells include electrical resistance heating elements.

34. An *in situ* method of recovering natural resources, comprising:
(a) heating an organic-rich rock formation *in situ*,
the organic-rich rock formation (i) being substantially impermeable to fluid flow initially, (ii) containing formation hydrocarbons, and (iii) containing one or more formation water-soluble minerals, the heating (i) pyrolyzing at least a portion of the formation hydrocarbons in a matured organic-rich rock zone of the organic-rich rock formation to create hydrocarbon fluids, thereby creating permeability within the matured organic-rich rock zone, (ii) leaving a second portion of the formation hydrocarbons substantially unpyrolyzed, thereby preserving an unmatured organic-rich rock zone, and (iii) converting at least a portion of the one or more formation water-soluble minerals to one or more first water-soluble minerals;

- 50 -

(b) producing the hydrocarbon fluids from the matured organic-rich rock zone;

(c) flushing the matured organic-rich rock zone and the unmatured organic-rich rock zone with an aqueous fluid after a substantial portion of the hydrocarbon fluids have been produced from the matured organic-rich rock zone, thereby dissolving the one or more first water-soluble minerals in the aqueous fluid to form a first aqueous solution; and

(d) producing the first aqueous solution to the surface.

10 35. The method of Claim 34, wherein the formation hydrocarbons include solid hydrocarbons.

36. The method of Claim 35, wherein the solid hydrocarbons include kerogen.

15 37. The method of Claim 36, wherein the organic-rich rock formation is an oil shale formation.

38. The method of Claim 34, wherein the formation hydrocarbons include heavy hydrocarbons.

20

39. The method of Claim 37, wherein the organic-rich rock formation has an initial total permeability less than 1 millidarcy before the heating step (a).

40. The method of Claim 39, wherein the organic-rich rock formation has a post heating total permeability of greater than 10 millidarcies after the heating step (a) and before the flushing step (c).

25

41. The method of Claim 39, wherein the one or more formation water-soluble minerals include sodium.

30

42. The method of Claim 41, wherein the one or more formation water-soluble minerals comprise nahcolite (sodium bicarbonate), dawsonite ($\text{NaAl}(\text{CO}_3)(\text{OH})_2$), or combinations thereof.

5 43. The method of Claim 42, wherein the one or more first water-soluble minerals comprise soda ash (sodium carbonate).

44. The method of Claim 43, wherein the heating step (a) results in at least a portion of the organic-rich rock formation reaching a temperature of 270°C or greater.

10

45. The method of Claim 44, further comprising:

(e) processing the first aqueous solution in a surface facility to remove a portion of the one or more first water-soluble minerals.

15 46. The method of Claim 45, wherein the processing step (e) includes removing the one or more first water-soluble minerals by precipitation caused by altering the temperature of the first aqueous solution.

47. The method of Claim 45, further comprising:

20 (f) reinjecting the first aqueous solution in a subsurface formation after a portion of the one or more first water-soluble minerals are removed, wherein the first aqueous solution is then sequestered in the subsurface formation.

25 48. The method of Claim 37, wherein the one or more formation water-soluble minerals include nahcolite (sodium bicarbonate) and the one or more first water-soluble minerals include soda ash (sodium carbonate).

49. The method of Claim 48, wherein the heating step (a) includes converting at least a portion of the nahcolite to soda ash.

30

50. The method of Claim 49, further including converting the soda ash back to sodium bicarbonate (nahcolite) in the surface facility by reaction with CO_2 .

51. The method of Claim 49, wherein the heating step (a) further includes forming CO₂ during the converting at least a portion of the nahcolite to soda ash, and the method further comprises:

5 (e) monitoring for the presence of the formed CO₂.

52. The method of Claim 51, further comprising:

(f) estimating the extent of the heating of the organic-rich rock formation from the CO₂ monitoring.

10

53. The method of Claim 52, wherein the estimating step (f) comprises correlating the CO₂ monitoring data to the extent of heating through use of a computer model based on nahcolite conversion to soda ash.

15 54. The method of Claim 52, further comprising:

(g) adjusting the rate at which heat is input into the organic-rich rock formation at one or more locations based upon the extent of heating estimated in step (f).

20 55. The method of Claim 54, wherein the heating step (a) is accomplished through use of heater wells and the step (g) of adjusting the rate at which heat is input into the organic-rich rock formation includes adjusting the heat input to a heater well.

25 56. The method of Claim 37, further including assessing the connectivity of the organic-rich rock formation to aquifers.

30 57. The method of Claim 37, wherein the heating step (a) is accomplished through use of heater wells, the producing step (b) is accomplished through use of production wells, the flushing step (c) is accomplished through use of injection wells, the producing step (d) is accomplished through use of solution production wells, and the production wells are also used as injection wells for injecting the aqueous fluid into the organic-rich rock formation in step (c).

58. The method of Claim 37, wherein the heating step (a) is accomplished through use of heater wells, the producing step (b) is accomplished through use of production wells, the flushing step (c) is accomplished through use of injection wells, the
5 producing step (d) is accomplished through use of solution production wells, and the production wells are also used as solution production wells for producing the first aqueous solution to the surface in step (d).

59. The method of Claim 37, wherein the heating step (a) is accomplished through
10 introducing heat into heater wells penetrating at least partially through the organic-rich rock formation.

60. The method of Claim 59, wherein the heater wells include electrical resistance heating elements.
15

61. The method of Claim 45, wherein the heating step (a) makes available one or more migratory contaminant species previously bound in the organic-rich rock formation, the method further comprising:
20 (f) processing the first aqueous solution in the surface facility to remove at least some of the one or more migratory contaminant species.

62. The method of Claim 61, wherein the organic-rich rock formation is substantially hydrologically connected to a source of ground water.

25 63. The method of Claim 62, wherein the one or more migratory contaminant species include one or more of aromatic hydrocarbons, polyaromatic hydrocarbons, oxygenated hydrocarbons, metal contaminants, and ionic contaminants.

30 64. The method of Claim 63, wherein the one or more migratory contaminant species include one or more of benzene, toluene, xylene, ethylbenzene, trimethylbenzene, and polyaromatic hydrocarbons.

65. The method of Claim 63, wherein the one or more migratory contaminant species include one or more of metal contaminants containing arsenic, boron, chromium, mercury, selenium, lead, vanadium, nickel, cobalt, molybdenum and zinc.

5 66. The method of Claim 62, wherein the one or more migratory contaminant species are removed through use of one or more of an adsorption, reverse osmosis, chemical oxidation, bio-oxidation and ion exchange.

67. The method of Claim 66, wherein the adsorbent material is activated carbon,
10 activated alumina, silica gel, clay, or fuller's earth.

68. The method of Claim 37, wherein the unmaturred organic-rich rock zones are shaped as pillars running substantially the entire thickness of the organic-rich rock formation.

15

69. The method of Claim 37, wherein the flushing step (c) is delayed after the producing step (b) to (1) allow heat generated from the heating step (a) to migrate deeper into surrounding unmaturred organic-rich rock zones to convert nahcolite within the surrounding unmaturred organic-rich rock zones to soda ash, (2) generate
20 permeability within the surrounding unmaturred organic-rich rock zones, or (3) both.

70. The method of Claim 37, wherein the flushing step (c) and subsequent recovery of one or more first water-soluble minerals is delayed based on current and/or forecast market prices of sodium bicarbonate, soda ash, or both.

25

71. An *in situ* method of recovering natural resources, comprising:

(a) heating the organic-rich rock formation *in situ*, the organic-rich rock formation (i) containing formation hydrocarbons, and (ii) containing one or more formation water-soluble minerals, the heating (i) pyrolyzing at least a portion of the
30 formation hydrocarbons to create hydrocarbon fluids, and (ii) generating water which migrates and at least partially dissolves the one or more formation water-soluble minerals *in situ* to form a first aqueous fluid;

- 55 -

(b) producing a production fluid from the organic-rich rock formation, the production fluid containing the hydrocarbon fluids and the first aqueous fluid;

(c) separating the production fluid into a hydrocarbon stream and a first aqueous stream at a surface facility; and

5 (d) recovering a first water-soluble mineral from the first aqueous stream.

72. The method of Claim 71, wherein at least some of the generated water is produced by decomposition of one or more formation water-soluble minerals, pyrolyzation of formation hydrocarbons, dehydration of formation clays, or
10 combinations thereof.

73. The method of Claim 71, wherein the recovered first water-soluble mineral includes sodium minerals.

15 74. The method of Claim 73, wherein the recovered first water-soluble mineral comprises one or more of nahcolite (sodium bicarbonate), soda ash (sodium carbonate), dawsonite ($\text{NaAl}(\text{CO}_3)(\text{OH})_2$), or combinations thereof.

75. The method of Claim 74, wherein the formation hydrocarbons include solid
20 hydrocarbons.

76. The method of Claim 75, wherein the solid hydrocarbons include kerogen.

77. The method of Claim 76, wherein the organic-rich rock formation is an oil
25 shale formation.

78. The method of Claim 74, wherein the formation hydrocarbons include heavy hydrocarbons.

30 79. The method of Claim 77, wherein the organic-rich rock formation has an initial total permeability less than 1 millidarcy before the heating step (a).

80. The method of Claim 79, wherein the organic-rich rock formation has a post heating total permeability of greater than 10 millidarcies.

81. The method of Claim 77, wherein the heating step (a) results in at least a
5 portion of the organic-rich rock formation reaching a temperature of 270° C or greater.

82. The method of Claim 77, wherein the recovering step (d) includes processing the first aqueous stream in a surface facility to remove a portion of the first water-soluble mineral.

10

83. The method of Claim 82, wherein the processing includes removing the first water-soluble mineral by precipitation caused by altering the temperature of the first aqueous stream.

15

84. The method of Claim 82, further comprising:

(e) reinjecting the first aqueous stream in a subsurface formation after a portion of the first water-soluble mineral is removed, wherein the first aqueous stream is then sequestered in the subsurface formation.

20

85. The method of Claim 77, wherein the one or more formation water-soluble minerals include nahcolite (sodium bicarbonate) and the first water-soluble mineral includes soda ash (sodium carbonate).

25

86. The method of Claim 85, wherein the heating step (a) includes converting at least a portion of the nahcolite to soda ash.

87. The method of Claim 86, further including converting the soda ash back to sodium bicarbonate (nahcolite) in a surface facility by reaction with CO₂.

30

88. The method of Claim 86, wherein the heating step (a) further includes forming CO₂ during the converting at least a portion of the nahcolite to soda ash, and the method further comprises:

- 57 -

(e) monitoring for the presence of the formed CO₂.

89. The method of Claim 88, further comprising:

5 (f) estimating the extent of the heating of the organic-rich rock formation from the CO₂ monitoring.

90. The method of Claim 89, wherein the estimating step (f) comprises correlating the CO₂ monitoring data to the extent of heating through use of a computer model based on nahcolite conversion to soda ash.

10

91. The method of Claim 90, further comprising:

(g) adjusting the rate at which heat is input into the organic-rich rock formation at one or more locations based upon the extent of heating estimated in step (f).

15

92. The method of Claim 91, wherein the heating step (a) is accomplished through use of heater wells and the step (g) of adjusting the rate at which heat is input into the organic-rich rock formation includes adjusting the heat input to a heater well.

20 93. The method of Claim 77, further including assessing the connectivity of the organic-rich rock formation to aquifers.

94. The method of Claim 93, wherein the organic-rich rock formation is substantially hydrologically connected to a source of ground water.

25

95. The method of Claim 77, wherein the heating step (a) is accomplished through introducing heat into heater wells penetrating at least partially through the organic-rich rock formation.

30 96. The method of Claim 95, wherein the heater wells include electrical resistance heating elements.

97. The method of Claim 77, wherein the heating step (a) makes available one or more migratory contaminant species previously bound in the organic-rich rock formation, wherein the generated water at least partially dissolves the one or more migratory contaminant species *in situ* within the first aqueous fluid, the method
5 further comprising:

(e) processing the first aqueous stream in a surface facility to remove at least some of the one or more migratory contaminant species.

98. The method of Claim 97, wherein the one or more migratory contaminant
10 species include one or more of aromatic hydrocarbons, polyaromatic hydrocarbons, oxygenated hydrocarbons, metal contaminants, and ionic contaminants.

99. The method of Claim 98, wherein the one or more migratory contaminant
15 species include one or more of benzene, toluene, xylene, ethylbenzene, tri-methylbenzene, and polyaromatic hydrocarbons.

100. The method of Claim 98, wherein the one or more migratory contaminant
species include one or more of metal contaminants containing arsenic, boron,
chromium, mercury, selenium, lead, vanadium, nickel, cobalt, molybdenum and zinc.
20

101. The method of Claim 98, wherein the one or more migratory contaminant
species are removed through use of an adsorption, reverse osmosis, chemical
oxidation, bio-oxidation, and ion exchange.

25 102. The method of Claim 101, wherein the adsorbent material is activated carbon, activated alumina, silica gel, clay, or fuller's earth.

103. An *in situ* method of recovering natural resources, comprising:

- 30 (a) assessing the market price for a water-soluble mineral;
(b) comparing the market price for the water-soluble mineral to a cost-to-produce criterion;

(c) determining that the market price of the water-soluble-mineral is less than the cost-to-produce criterion;

(d) heating an organic-rich rock formation *in situ*, the organic-rich rock formation (i) containing formation hydrocarbons and (ii) containing one or more
5 formation water-soluble minerals, the heating (i) occurring prior to substantial removal of the one or more formation water-soluble minerals, (ii) pyrolyzing at least a portion of the formation hydrocarbons to create hydrocarbon fluids, and (iii) converting at least a portion of the one or more formation water-soluble minerals to one or more first water-soluble minerals; and

10 (e) producing the hydrocarbon fluids from the organic-rich rock formation.

104. The method of Claim 103, wherein the heating step (d) results in at least a portion of the organic-rich rock formation reaching a temperature of 270° C or greater.

15

105. The method of Claim 103, wherein the formation hydrocarbons include solid hydrocarbons.

106. The method of Claim 105, wherein the solid hydrocarbons include kerogen.

20

107. The method of Claim 106, wherein the organic-rich rock formation is an oil shale formation.

108. The method of Claim 107, wherein the formation hydrocarbons include heavy
25 hydrocarbons.

109. The method of Claim 107, wherein the one or more formation water-soluble minerals and the water-soluble mineral both include sodium.

30 110. The method of Claim 109, wherein the one or more formation water-soluble minerals comprise nahcolite (sodium bicarbonate), dawsonite (NaAl(CO₃)(OH)₂), or combinations thereof.

111. The method of Claim 110, wherein the one or more formation water-soluble minerals include nahcolite and the one or more first water-soluble minerals includes soda ash.

5

112. The method of Claim 107, wherein the market price is the current market price, the forecasted market price, or a combination thereof.

113. The method of claim 107, further including:

10 (f) injecting an aqueous fluid into the organic-rich rock formation to dissolve at least a portion of the first water-soluble mineral to form a first water-soluble mineral solution; and

(g) producing the first water-soluble mineral solution from the organic-rich rock formation.

15

114. An *in situ* method of recovering natural resources, comprising:

(a) providing produced fluid processing facilities which are sized to process a first hydrocarbon fluid production rate produced during an initial production period together with a first CO₂ production rate produced during the initial production period, wherein the first CO₂ production rate includes CO₂ generated from dissociation of nahcolite to form soda ash;

(b) heating an organic-rich rock formation *in situ* to form hydrocarbon fluids and CO₂, the organic-rich rock formation containing nahcolite;

(c) producing a production fluid containing the hydrocarbon fluids and the CO₂ from the organic-rich rock formation; and

(d) processing the production fluid in the produced fluid processing facilities.

115. The method of Claim 114, wherein heating step (b) occurs prior to substantial removal of nahcolite from the organic-rich rock formation.

30

116. The method of Claim 115, wherein heating the organic-rich rock formation *in situ* pyrolyzes at least a portion of a formation hydrocarbons contained in the organic-rich rock to create the hydrocarbon fluids and the heating of the organic-rich rock formation converts at least a portion of the nahcolite to soda ash.

5

117. The method of Claim 116, wherein the formation hydrocarbons include solid hydrocarbons.

118. The method of Claim 117, wherein the solid hydrocarbons include kerogen.

10

119. The method of Claim 118, wherein the organic-rich rock formation is an oil shale formation.

120. The method of Claim 116, wherein the formation hydrocarbons include heavy hydrocarbons.

15

121. The method of Claim 119, wherein the organic-rich rock formation has an initial total permeability less than 1 millidarcy before the heating step (a).

122. The method of Claim 121, wherein the organic-rich rock formation has a post heating total permeability of greater than 10 millidarcies.

20

123. The method of Claim 119, wherein the heating step (a) results in at least a portion of the organic-rich rock formation reaching a temperature of 270° C or greater.

25

124. The method of Claim 119, wherein the initial production period includes a one year period beginning from the point of the first heating of the organic-rich rock formation.

125. The method of Claim 119, wherein the initial production period includes a five year period beginning from the point of the first heating of the organic-rich rock formation.

30

126. The method of Claim 124, wherein the first hydrocarbon fluid production rate is the maximum daily hydrocarbon fluid production rate reached during the initial production period.

5

127. The method of Claim 124, wherein the first CO₂ production rate is the maximum daily CO₂ production rate reached during the initial production period.

128. The method of Claim 34, wherein the heating step (a) is initiated prior to
10 substantial removal of the one or more formation water-soluble minerals from the organic-rich rock formation.

129. The method of Claim 71, wherein the heating step (a) is initiated prior to
15 substantial removal of the one or more formation water-soluble minerals from the organic-rich rock formation.

130. The method of Claim 34, wherein the heating step (a) is initiated prior to
removal of greater than 7 weight percent of the initially present one or more formation
water-soluble minerals from the organic-rich rock formation.

20

131. The method of Claim 71, wherein the heating step (a) is initiated prior to
removal of greater than 7 weight percent of the initially present one or more formation
water-soluble minerals from the organic-rich rock formation.

25 132. The method of Claim 34, wherein the heating step (a) is substantially
completed prior to substantial removal of the one or more formation water-soluble
minerals from the organic-rich rock formation.

30 133. The method of Claim 71, wherein the heating step (a) is substantially
completed prior to substantial removal of the one or more formation water-soluble
minerals from the organic-rich rock formation.

134. The method of Claim 34, wherein the heating step (a) is substantially completed prior to removal of greater than 7 weight percent of the initially present one or more formation water-soluble minerals from the organic-rich rock formation.

5 135. The method of Claim 71, wherein the heating step (a) is substantially completed prior to removal of greater than 7 weight percent of the initially present one or more formation water-soluble minerals from the organic-rich rock formation.

10 136. The method of Claim 23, further including (i) determining the isotopic composition of the CO₂, and (ii) estimating the fraction of the CO₂ produced from organic versus inorganic sources.

15 137. The method of Claim 51, further including (f) determining the isotopic composition of the CO₂, and (ii) estimating the fraction of the CO₂ produced from organic versus inorganic sources.

138. The method of Claim 88, further including (f) determining the isotopic composition of the CO₂, and (ii) estimating the fraction of the CO₂ produced from organic versus inorganic sources.

20

139. The method of Claim 1, wherein the heating step (a) is accomplished primarily through conductive heating of the organic-rich rock formation.

25 140. The method of Claim 34, wherein the heating step (a) is accomplished primarily through conductive heating of the organic-rich rock formation.

141. The method of Claim 71, wherein the heating step (a) is accomplished primarily through conductive heating of the organic-rich rock formation.

30 142. The method of Claim 1, wherein the heating step (a) is accomplished primarily through electrical resistance heating of the organic-rich rock formation.

143. The method of Claim 34, wherein the heating step (a) is accomplished primarily through electrical resistance heating of the organic-rich rock formation.

144. The method of Claim 71, wherein the heating step (a) is accomplished
5 primarily through electrical resistance heating of the organic-rich rock formation.

145. The method of Claim 52, further comprising:

(g) adjusting the rate at which hydrocarbon fluids are produced from the organic-rich rock formation at one or more locations based upon the extent of heating
10 estimated in step (f).

146. The method of Claim 89, further comprising:

(g) adjusting the rate at which hydrocarbon fluids are produced from the organic-rich rock formation at one or more locations based upon the extent of heating
15 estimated in step (f).

147. The method of Claim 145, wherein the producing step (b) is accomplished through use of production wells and the step (g) of adjusting the production rate from the organic-rich rock formation includes adjusting the flow rate from a production
20 well or adjusting the back pressure of a production well.

148. The method of Claim 23, wherein the amount of the CO₂ formed is tracked to determine the extent to which soda ash is present.

25 149. The method of Claim 51, wherein the amount of the CO₂ formed is tracked to determine the extent to which soda ash is present.

150. The method of Claim 88, wherein the amount of the CO₂ formed is tracked to determine the extent to which soda ash is present.
30

151. The method of Claim 24, wherein the estimating step (i) includes calculating the extent of heating based on one or more of measured decomposition

stoichiometries, estimated decomposition stoichiometries, thermodynamics, measured distributions, and estimated distributions of nahcolite, kerogen and/or other carbonates in the formation.

5 152. The method of Claim 52, wherein the estimating step (f) includes calculating the extent of heating based on one or more of measured decomposition stoichiometries, estimated decomposition stoichiometries, thermodynamics, measured distributions, and estimated distributions of nahcolite, kerogen and/or other carbonates in the formation.

10

153. The method of Claim 89, wherein the estimating step (f) includes calculating the extent of heating based on one or more of measured decomposition stoichiometries, estimated decomposition stoichiometries, thermodynamics, measured distributions, and estimated distributions of nahcolite, kerogen and/or other carbonates in the formation.

15

154. The method of Claim 151, further including refining heat transfer models of the organic-rich rock formation and/or simulations of the generation and production of hydrocarbon fluids from the organic-rich rock formation.

20

1/4

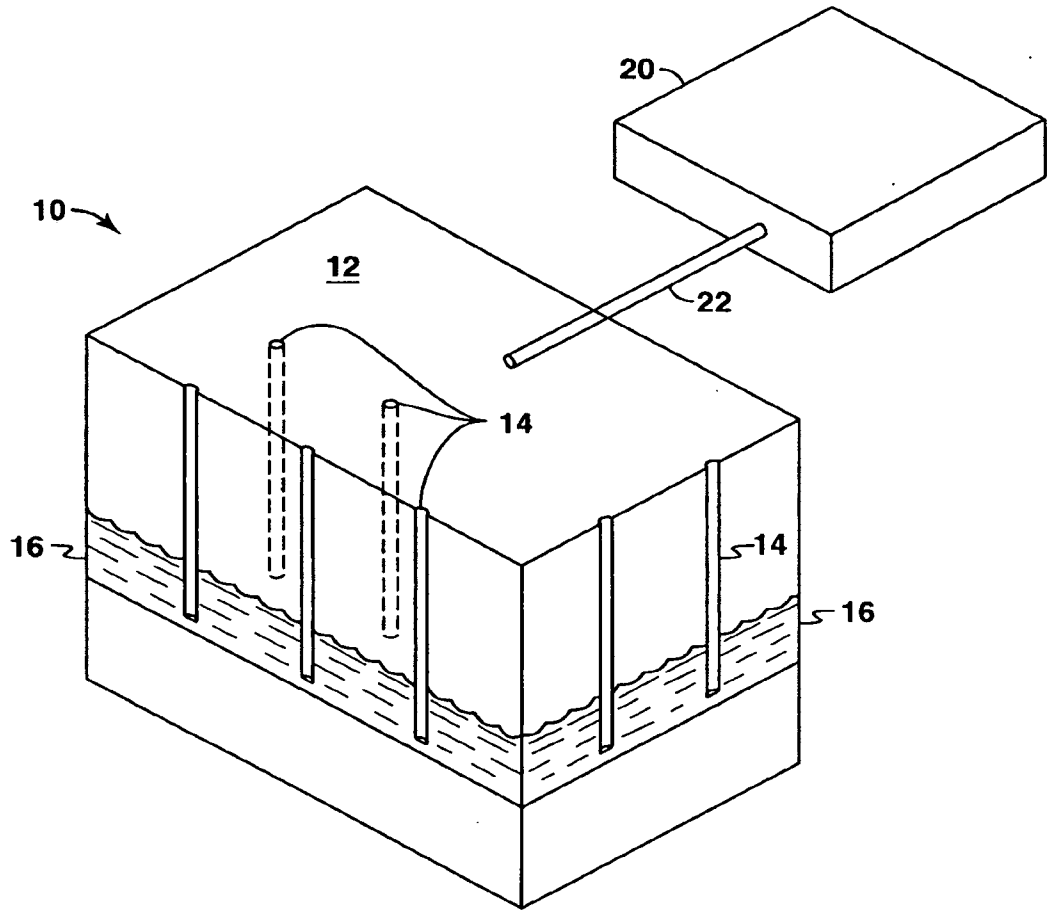


FIG. 1

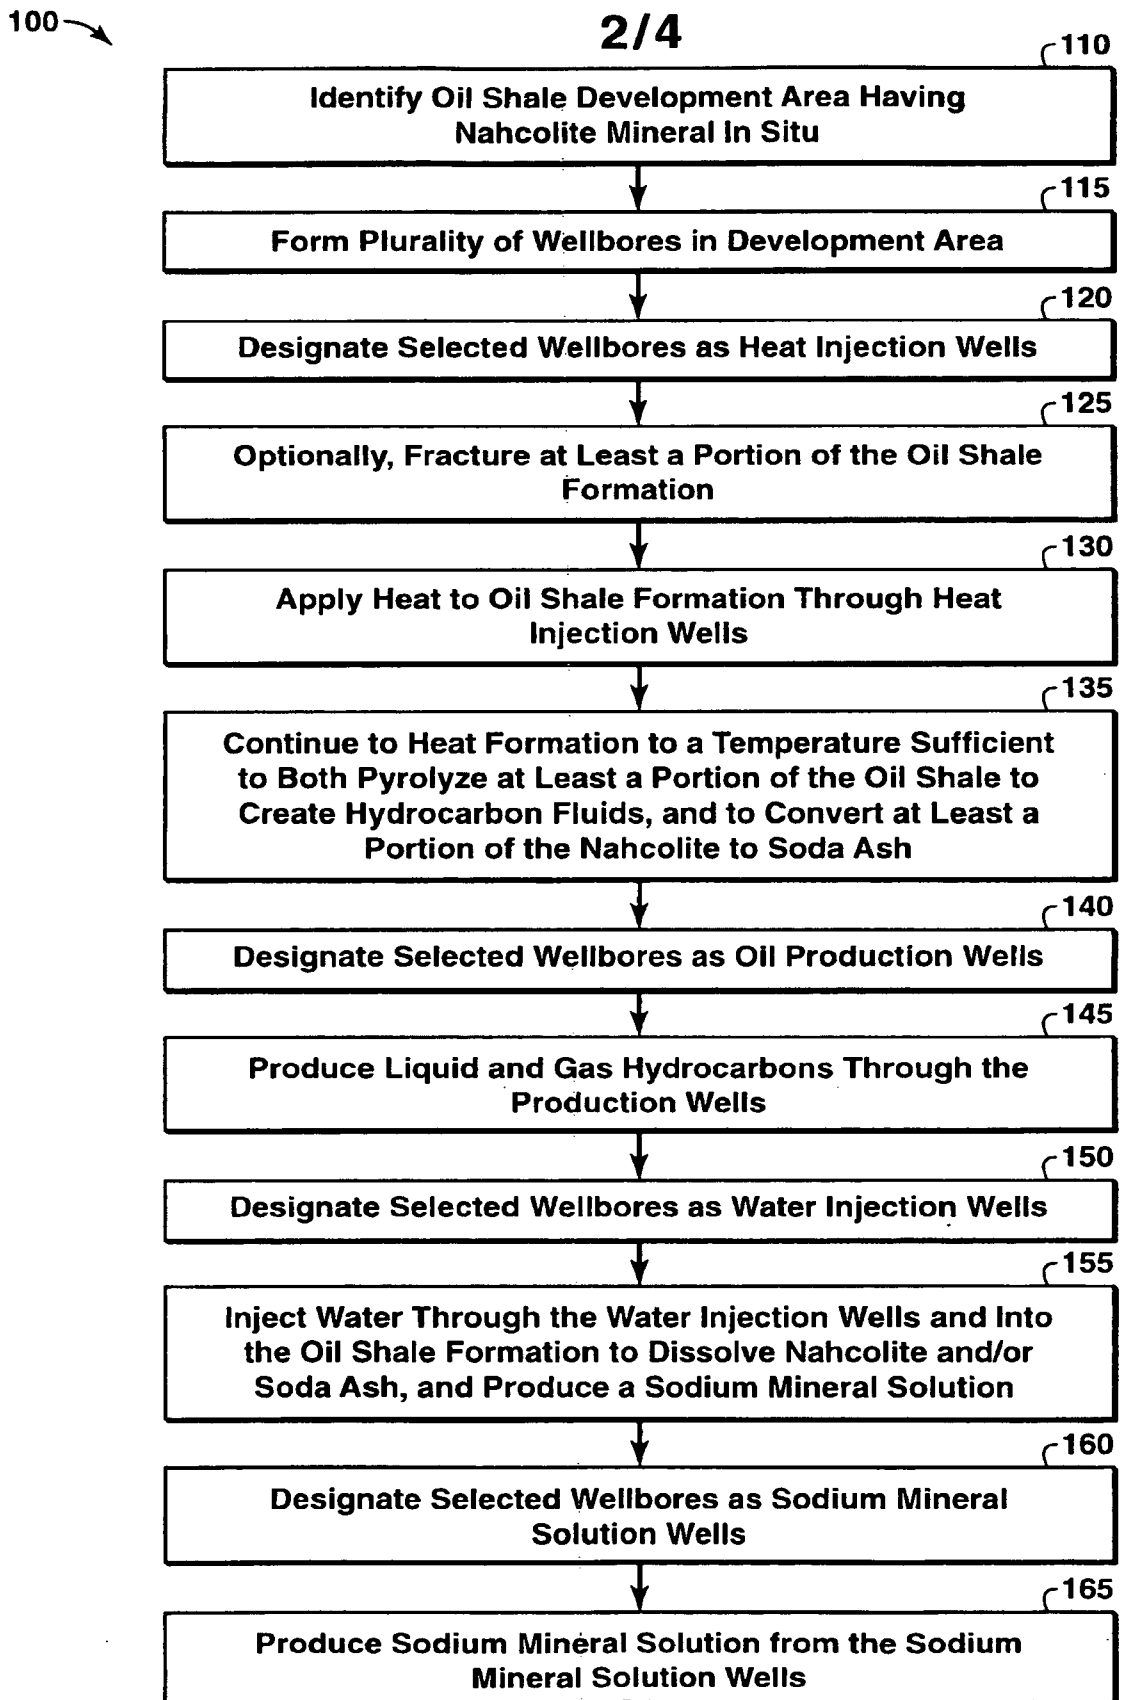


FIG. 2

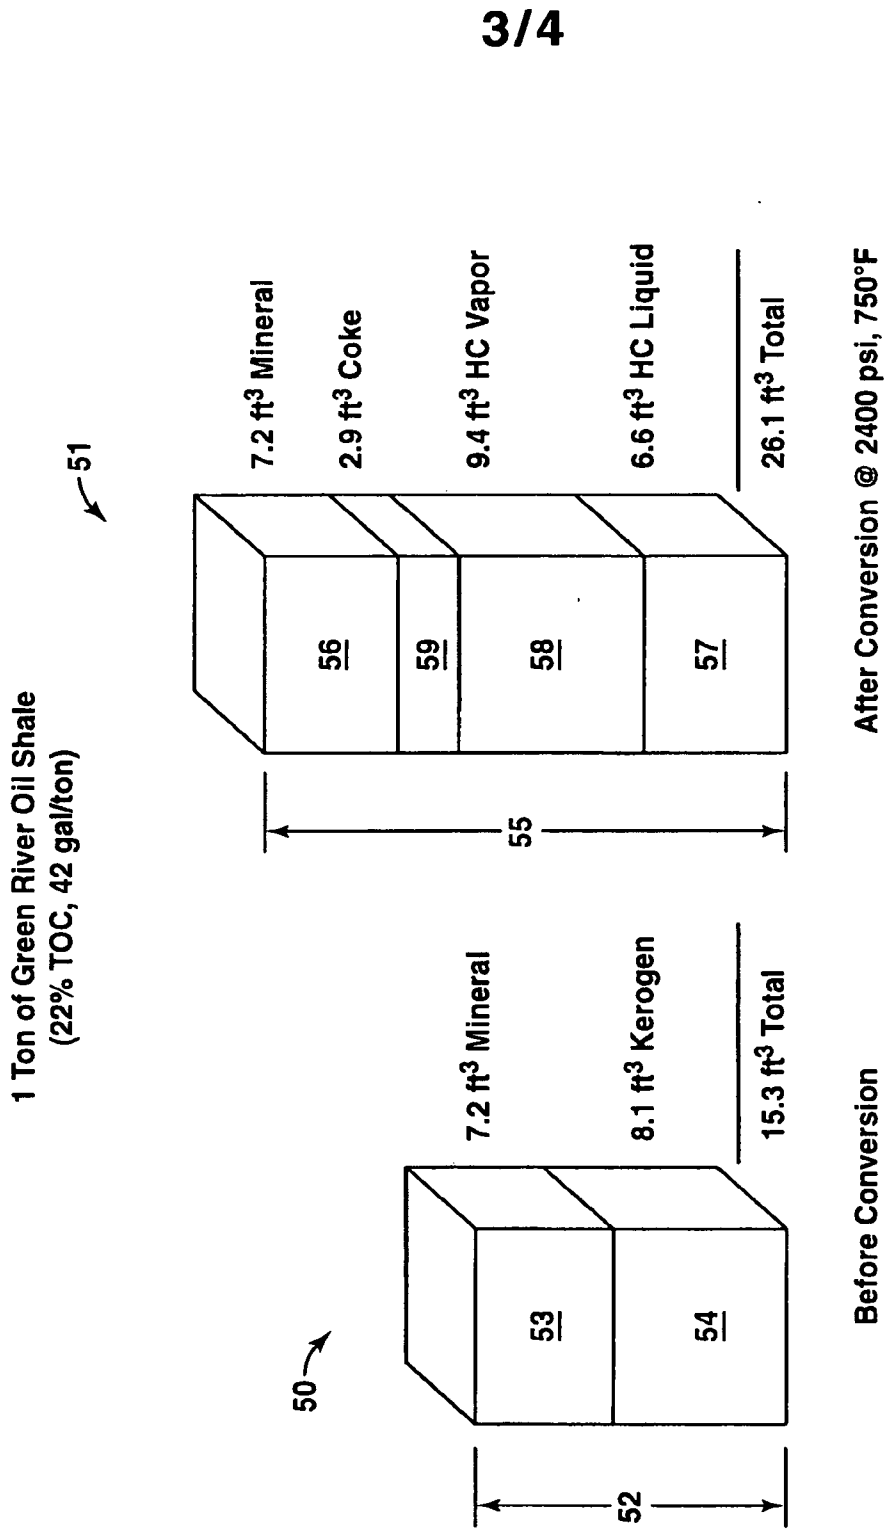


FIG. 3

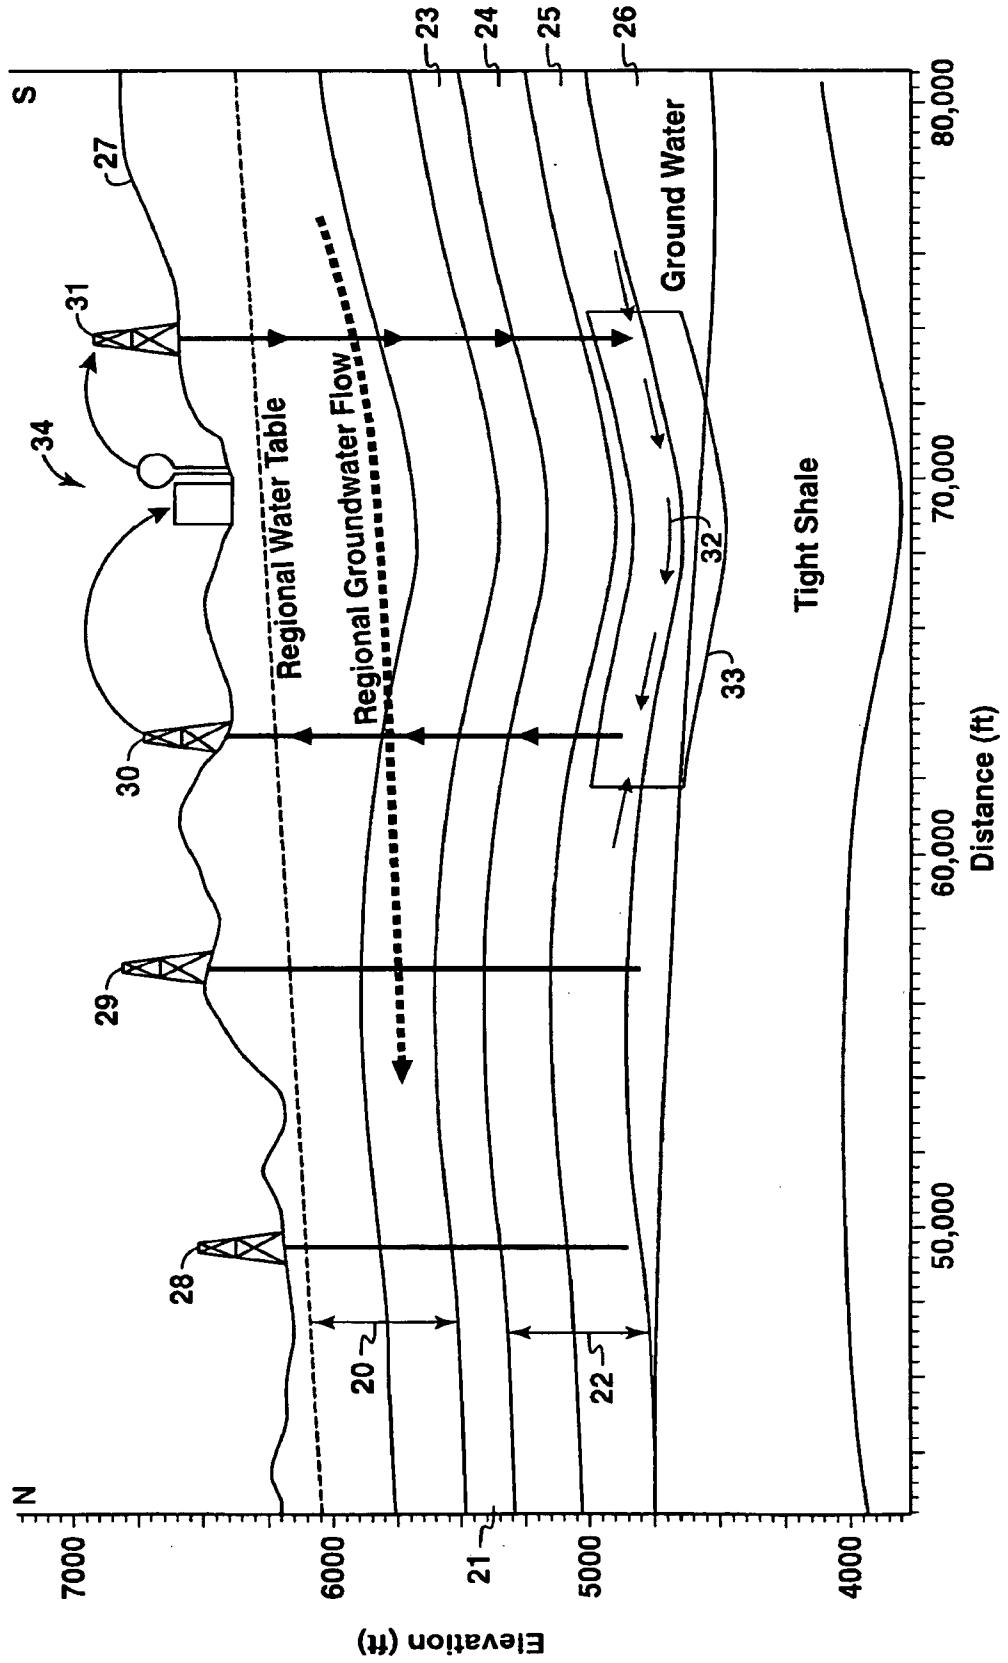


FIG. 4