



(51) International Patent Classification:
G03F 7/20 (2006.01)

(21) International Application Number:
PCT/EP2009/003504

(22) International Filing Date:
16 May 2009 (16.05.2009)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **CARL ZEISS SMT AG** [DE/DE]; Rudolf-Eber-Strasse 2, 73447 Oberkochen (DE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BLEIDISTEL, Sascha** [DE/DE]; Vorderer Kirchberg 31, 73432 Aalen (DE). **CONRADI, Olaf** [DE/DE]; Weidenstrasse 32, 73463 Westhausen (DE). **KAZI, Arif** [DE/DE]; Parkstrasse 2, 73430 Aalen (DE).

(74) Agent: **CARL ZEISS AG**; Patentabteilung, Carl-Zeiss-Strasse 22, 73447 Oberkochen (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))

(54) Title: PROJECTION EXPOSURE APPARATUS FOR SEMICONDUCTOR LITHOGRAPHY COMPRISING AN OPTICAL CORRECTION ARRANGEMENT

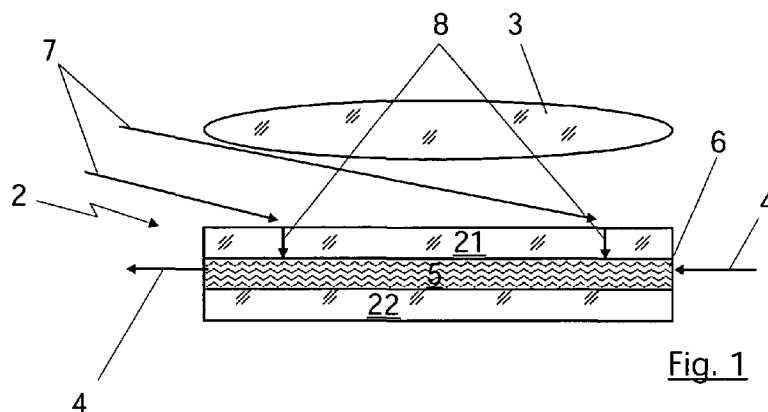


Fig. 1

(57) Abstract: The invention relates to an optical correction arrangement comprising at least one optical element (2), at least one irradiation means for the targeted local irradiation of the optical element (2) with electromagnetic heating radiation (7) for the targeted local heating of the optical element (2), wherein means for dissipating the thermal energy introduced into the optical element (2) by the at least one irradiation means are present. The invention furthermore relates to a projection exposure apparatus for semiconductor lithography comprising an optical correction arrangement according to the invention.

Description:

Projection exposure apparatus for semiconductor
lithography comprising an optical correction
5 arrangement

The present invention relates to a projection exposure
apparatus which contains a projection objective which,
in turn, contains an optical correction arrangement.

10

In modern projection objectives for microlithography,
use is made of a large number of wavefront manipulators
for the correction of optical aberrations. Most of
these manipulators bring about a wavefront correction
15 by means of mechanical manipulation of optical
elements. This is done either by means of a position
change and/or by means of a deformation of the optical
elements. These manipulators have correction
possibilities for low-order wavefront aberrations such
20 as typically occur when the objectives are used in
conjunction with so-called conventional settings and at
a throughput of approximately 120 wafers/hour.

However, constantly rising throughput requirements
25 necessitate ever higher light intensities in the
objective and hence a constantly rising thermal load
that acts on the optical elements. This thermal load
causes wavefront aberrations: in the case of lenses by
way of the temperature-dependent refractive index and
30 the surface deformation; in the case of mirrors
predominantly as a result of the surface deformation on
account of the thermal expansion of the mirror
substrate. In addition, in the development of
lithography, the trend is towards illumination
35 settings, such as the dipole settings, for example,
which entail a strong focusing of the light power
density on, in particular, lenses near the pupil and
therefore, on account of the resultant locally high
thermal load, can also cause radial and/or azimuthal

- 2 -

higher-order and highly localized wavefront aberrations. The latter can only be compensated for to a limited extent with the manipulators mentioned in the introduction. The same applies to wavefront aberrations
5 caused by light-induced lifetime effects such as compaction, which occurs to an increased extent on account of the higher optical power densities. These wavefront aberrations, too, cannot be efficiently compensated for by means of the manipulators known
10 heretofore.

One possibility of compensating for said wavefront aberrations caused by lifetime effects in a more efficient manner is currently the use of exchangeable
15 plates to which special correction aspheres are applied. Within the lifetime of the objective, these compensation plates can be exchanged repeatedly in order to cope appropriately with the changes in the wavefront aberrations during the lifetime of the
20 objective.

Although compensation plates with correction aspheres can compensate for aberrations, they are rather unsuitable for the compensation of dynamically rapidly
25 variable aberrations. Moreover, the aberration to be compensated for has to be known before the creation of the compensation plate, and in particular therefore before said compensation plate is incorporated into the projection objective. Since new wavefront aberrations
30 are in turn induced by the incorporation of the compensation plate, naturally complete compensation is not possible here.

The posed problem to be solved consists, then, in
35 finding a wavefront manipulator by means of which wavefront aberrations, or synonymously aberrations, and in this case in particular radially and/or azimuthally higher-order aberrations, can be compensated for as

- 3 -

flexibly as possible where this flexibility is understood to be as a high spatial resolution as well as a high temporal resolution. One preferred solution to this problem comprises controllable two-dimensional
5 correction aspheres which compensate in particular for the radially and/or azimuthally higher-order aberrations.

As already mentioned, established manipulators in the
10 sense above are in particular of mechanical type. Thus, DE 198 24 030 A1, for example, describes a catadioptric projection objective with adaptive mirrors, wherein mirrors can be deformed by means of actuating elements in such a way that specific image aberrations are
15 reduced.

EP 678 768 and DE 198 59 634 A1 likewise disclose projection exposure apparatuses in which lenses or mirrors are deformed by means of actuators for image
20 aberration correction.

Since mechanical elements in the optical beam path cause shading and scattered light, however, mechanical concepts, in the case of lenses to be manipulated, are
25 restricted to the manipulation of the lens edge. This restriction to the lens edge constitutes an inherent limitation of the possible correction profiles, and especially of the radial orders, which is unable to be circumvented even by complex mechanisms.

30 As an alternative to the mechanical manipulators, thermal manipulators are known, wherein the thermal manipulators are likewise arranged at the lens edge, such as in the US Patent Specification US 6,198,579 B1,
35 for example. However, the thermal manipulators proposed in the cited document exhibit the same limitations in the radial orders as their mechanical counterparts and additionally imply relatively long time constants given

- 4 -

by the propagation speed of the heat over the lens diameter. Edge-actuated thermal manipulators are therefore predominantly suitable for compensation of temporally steady-state wavefront aberrations. On
5 account of the long time constants, however, such manipulators are suitable only to a very limited extent for the compensation of transient wavefront aberrations.

10 Furthermore, a method for the correction of non-rotationally symmetrical image aberrations with Peltier elements arranged at the periphery of lenses is known from DE 198 27 602 A1, wherein the Peltier elements influence the thermal behavior of the optical element
15 in such a way that in the case of non-rotationally symmetrical passage of radiation through the element, resultant imaging aberrations can be corrected.

A device and a method for the correction of
20 asymmetrical thermal loads of an optical element such as a lens or a mirror are likewise known from DE 198 59 634 A1, wherein the optical element is likewise deformed by means of actuators; it is likewise known from US 6 081 388 to deform surfaces of lenses by
25 means of actuators or defined mechanical forces in such a way that the imaging aberrations are influenced.

Furthermore, it is known from US 6 521 877 B1 to influence the temperature of an optical element locally
30 by means of transparent resistive layers; an alternative solution is disclosed in US 6 466 382 B2, which proposes applying on a lens layers having absorbent properties which have a structure complementary to the footprint of the useful light.

35 The documents US2007/0019305 A1, US2003/0021040 A1, WO2006/128613 A1, JP2004/246343 A1, EP0678768 A2, US6198579B1 and DE 10 2005 062401 A1 disclose further

- 5 -

concepts for improving the imaging properties of optical systems such as e.g. projection objectives for semiconductor lithography.

5 WO 2004/036316 discloses a method for the correction of imaging aberrations of optical elements such as mirrors and lenses wherein, by means of additional irradiation, the temperature of the optical elements is altered in such a way that the imaging aberrations are reduced.
10 What is problematic in this case, however, is that the temperature of the optical elements is increased overall as a result of the additional irradiation, which has a negative effect on the possibilities for using the concept disclosed in the cited document; in
15 particular the disturbance of adjacent lenses and structures (mounts, manipulators, ...). The effect is significantly increased imaging/wavefront aberrations.

A further document that realizes the refractive index
20 and/or the shape of a lens by means of thermal influencing of the lens is US2006/0244940 A1, wherein infrared light is radiated laterally into the lens to be thermally influenced. What is disadvantageous here likewise is the constrained arrangement of the optical
25 waveguides outside the optically utilized area of the lens, and thus also the a priori far distance of the manipulator from the lens to be manipulated. In particular the indefinite heat dissipation of the lens manipulated in this way is disadvantageous.

30 It is an object of the present invention to provide a projection exposure apparatus for semiconductor lithography in which a controlled or regulated choice of the correction properties is possible in conjunction
35 with high flexibility and with minimum effects on the optical performance of the projection exposure apparatus.

- 6 -

This object is achieved by means of the projection exposure apparatus for semiconductor lithography comprising the features specified in claim 1. The dependent claims relate to advantageous variants and
5 embodiments of the invention.

The projection exposure apparatus according to the invention exhibits an arrangement comprising at least one optical element and at least one irradiation means
10 for the targeted local irradiation of the optical element with electromagnetic radiation for the targeted local heating of the optical element. This electromagnetic radiation for heating the optical element is also referred to hereinafter as heating
15 radiation, in order to distinguish it from the electromagnetic radiation that serves for imaging in the projection exposure apparatus. The latter radiation is also referred to as useful radiation. According to the invention, in this case means for dissipating the
20 thermal energy introduced into the optical element by the at least one irradiation means are present.

In this case, the means for dissipating the thermal energy can involve in particular means for forming a
25 fluid flow which passes at least one surface of the optical element.

For this purpose, the optical element can have two optical partial elements, in particular two plane-
30 parallel plates, which are arranged adjacent and between which is formed a channel through which the fluid flow can flow.

In this case, the fluid flow can be oriented parallel
35 to the surface of the optical element or alternatively have a direction component which is oriented perpendicular to the surface of the optical element.

- 7 -

The electromagnetic heating radiation can run through the fluid flow.

Furthermore, the electromagnetic heating radiation can
5 be directed onto the two channel-forming surfaces of the optical partial elements.

In an alternative embodiment of the invention, the optical element has at least two partial elements which
10 are in thermal contact with one another and of which the second has a higher thermal conductivity than the first. In this case, the second partial element is in thermal contact with a heat sink, which ultimately forms the means for dissipating the thermal energy
15 introduced; in this case, the first partial element can contain quartz glass and the second partial element can contain CaF_2 .

In this case, the heating radiation can be directed
20 onto that side of the first partial element which is removed from the second partial element, or else onto that surface of the first partial element which is thermally linked to the second partial element.

25 Furthermore an absorption layer for absorbing the heating radiation can be arranged on one of the optical partial elements; in particular, the absorption layer can be arranged between the first and the second optical partial element.

30

In a further embodiment of the invention, the projection exposure apparatus can be an EUV projection exposure apparatus; in this case, the optical element is embodied as a mirror of the projection exposure
35 apparatus. In this case, the desired correction effect is achieved by the additional thermal deformation of the mirror surface that is induced in the mirror by means of the heating radiation.

- 8 -

For dissipating the thermal energy, channels can be involved, for example, through which a cooling medium can flow and which are worked into the mirror substrate
5 of the mirror.

In addition, it is also conceivable for the means for dissipating the thermal energy to be thermally conductive solids which can be embodied for example as
10 additional elements such as fibers or heat conducting strips. In addition, it is also conceivable to supplement the solid components that are already present and that are linked to the mirror, such as kinematic elements, bearing elements or actuators, for
15 example, by the further functionality of heat dissipation or to utilize their thermally conductive properties for dissipating the thermal energy.

In addition, the energy can also be dissipated by
20 radiative elements or by a fluid flow which passes the mirror and which is formed for example by means of argon or hydrogen at a pressure of a plurality of pascals, in particular 3 to 4 pascals.

25 Possible embodiments for dissipating the thermal energy are disclosed in the German Patent Application DE 10 2008049556.5, in particular in figures 1-9 together with the associated description, the disclosure content of which is incorporated by
30 reference in the present application. In the case of discrepancies between the disclosure of the present application and that of the abovementioned application, the disclosure of the present application is applicable.

35

In a further variant of the invention, means for the further manipulation of those portions of the heating radiation which are not absorbed by the optical element

- 9 -

are present. In this case, the means for further manipulation can be embodied for example as an absorbent element, wherein the absorbent element can be arranged in one instance in the interior of a housing of the projection exposure apparatus. In addition, there is the possibility of arranging the absorbent element outside the housing of the projection exposure apparatus; in this case, it is advantageous to provide a window in the housing of the projection exposure apparatus which allows the non-absorbed heating radiation to pass in the direction of the absorbent element.

The non-absorbed heating radiation can additionally or alternatively also be manipulated by means of reflection. This can be effected for example by the virtue of the fact that reflective elements are present which reflect the non-absorbed portions of the heating radiation back onto the optical element or else direct them onto further optical elements.

In order to optimize the correction effect of the projection objective according to the invention, a control unit connected to an image sensor can furthermore be provided, by means of which the parameters of the heating radiation, such as direction and/or intensity, for example, or else the properties of the means for dissipating the energy introduced can be influenced, whereby the correction effect can be adapted and improved in a situation-dependent manner.

The invention is explained in more detail below on the basis of some exemplary embodiments.

In the figures:

figure 1 shows a first embodiment of the invention,

- 10 -

- figure 2 shows a variant of the invention which is suitable in particular when gaseous fluids are used,
- 5 figure 3 shows an embodiment of the invention in which the fluid flow has a component of its direction of movement toward a surface of an optical partial element,
- 10 figure 4 shows a variant of the invention in which the heating radiation impinges through the fluid flow on that surface of an optical partial element which faces the fluid flow,
- 15 figure 5 shows a modification with respect to figure 4 in which the heating radiation impinges on both surfaces of the partial elements that face the fluid flow,
- 20 figure 6 shows a further embodiment of the invention in which the optical element has two partial elements that are in thermal contact with another,
- 25 figure 7 shows a modification with respect to figure 6 in which the heating radiation is directed onto that surface of the first partial element which is thermally linked to the second partial element,
- 30 figure 8 shows a further embodiment of the invention in which an absorption layer for absorbing the heating radiation is arranged between the first partial element and the second partial element,
- 35 figure 9 shows a projection exposure apparatus for semiconductor lithography into which the

- 11 -

correction arrangement described is integrated,

5 figure 10 shows an embodiment of the invention in which a first possibility for the further manipulation of those portions of the heating radiation which are not absorbed by the optical element is realized,

10 figure 11 shows a further variant of the invention in which a reflector is used instead of the use of an absorber, with the construction otherwise changed; and

15 figure 12 shows a variant of the solution illustrated in figure 11.

Figure 1 shows a first embodiment of the invention, in which the optical element 2 is formed from the two
20 partial elements 21 and 22. In the present example, the two partial elements 21 and 22 are formed as plane-parallel plates composed of quartz glass.

A channel 6 through which a fluid flow of the cooling
25 fluid 5 can flow is formed between the two partial elements 21 and 22. In this case, the direction of the fluid flow is indicated by the arrows 4.

As an alternative to this, in a manner not illustrated
30 in figure 1, the two partial elements 21 and 22 can also be embodied in such a way that only the channel 6 is bounded by two plane surfaces. This has the advantage that the optical effects of the two optical partial elements 21 and 22 are freely selectable to a
35 certain degree. Thus, in particular the refractive powers of the optical partial elements can be freely selected in such a case.

- 12 -

In the present case, the heating radiation 7 is directed onto that side of the first partial element 21 which is remote from the second partial element 22. The heating radiation 7 is incident at a shallow angle (relative to the surface) on that surface of the first partial element 21 which is remote from the second partial element 22, such that the heating radiation 7 does not impinge on an optical element 3 which is adjacent to the first partial element 21. It becomes clear from figure 1 that the reflected portion (not illustrated in figure 1) of the radiation 7, on account of the shallow angle of incidence, which results in the same shallow angle as angle of reflection, is not incident on the adjacent optical element 3 either and therefore likewise causes no unintentional thermal influencing of the optical element 3. The regional absorption of the heating radiation 7 on the surface of the partial element 21 results in a first temperature gradient in the direction of the cooling fluid 5, said temperature gradient being indicated by the arrows 8.

In addition second thermal gradients result if the heating radiation is applied in a locally resolving manner. Those second gradients have non-vanishing components orthogonal to the above temperature gradient. In accordance with the above first temperature gradient, a heat flow takes place in the direction of the arrows 8; the heat conducted in the direction of the cooling fluid 5 is taken up by the cooling fluid and transported away with the fluid flow.

This affords the possibility of locally introducing temperature gradients into the partial element 21, whereby an optical correction effect of the plane-parallel plate 21 can be achieved. Moreover since the dissipated energy is transported away one can achieve a steady state of non-vanishing gradients. Since the thermal energy is introduced into the beam path of the projection exposure apparatus by heating radiation and not by heating elements arranged inside the beam path

- 13 -

of useful radiation, it can be assumed that any impairment of the optical performance of the projection exposure apparatus on account of the heating, which is not caused by the absorbtion of the heating radiation, is practically negligible.

The refractive index gradient caused by the temperature gradient influences the optical path length or the phase in partial element 21. The optical correction effect of the optical element 2 is achieved by this means.

By way of example, the cooling fluid 5 used can be a purge gas which is already used in the projection objective and by means of which the remaining components of the objective are also cooled. H₂, N₂, helium or dry, high-purity air could be mentioned here by way of example. It goes without saying that other gases or alternatively liquids such as water, in particular, are also appropriate for this.

In the present case, radiation having a wavelength of greater than 2 μm , in particular greater than 4 μm , can be used for the heating radiation 7. By way of example, a CO₂ laser having an emission wavelength in the region of approximately 10.6 μm is appropriate here as a radiation source. In addition, in the case of using an optical partial element composed of quartz glass, it is also possible to choose a wavelength of less than approximately 180 nm for the heating radiation 7 since the quartz glass also has absorbent properties in this wavelength range. The optical useful radiation in the case of using quartz glass for the partial element 21 can have a wavelength of greater than 190 nm. For the case where the glass used for the optical partial element 21 has an OH concentration of greater than 500 ppm, a heating radiation 7 having a wavelength within the range of between approximately 2.65 μm and

- 14 -

2.85 mm can also be employed, since an OH absorption peak is located in this range.

In case of CaF_2 is used for the optical element that
5 absorbs the heating radiation, it is recommended to use electromagnetic radiation having a wavelength of less than approximately 160 nm or greater than 9 μm for the heating radiation.

10 Furthermore, a heating radiation having a wavelength of less than 350 nm or greater than 2 μm , in particular greater than 2.5 μm , can advantageously be employed for optical elements composed of optical glasses for a useful wavelength of the projection exposure apparatus
15 (that is to say for that wavelength which is used for the exposure of the wafer) of greater than 350 nm.

Figure 2 illustrates a variant of the invention which is suitable in particular when gaseous fluids are used
20 as cooling fluids 5.

In the present case, the optical element 2 only has the first optical partial element 21, past which a gas flow as a fluid flow (once again indicated by the arrows 4)
25 is led substantially parallel to a surface of said partial element. The arrangement is otherwise unchanged with respect to the embodiment illustrated in figure 1. The already used purge gas of a projection objective can be used in the case illustrated in figure 2, said
30 gas being led with a preferably increased mass flow rate past the optical partial element 21 approximately parallel to the surface thereof.

The simpler construction of this arrangement by
35 comparison with the first exemplary embodiment is advantageous in this case.

- 15 -

In a variant of the embodiment illustrated in figure 2, the fluid flow can have a component of its direction of movement which is orthogonal to a surface of the partial element 21, as indicated by the arrows 4 in figure 3. Although figure 3 illustrates that the fluid flow 4 impinges on the entire side of the partial element 21 that is remote from the heating radiation 7, it is equally possible for the fluid flow 4 to impinge on a surface of the partial element 21 only locally (not illustrated). If this localness is configured in variable fashion, for example by local flowing with a gas as fluid flow 4, this results in further degrees of freedom with regard to the formation of a temperature gradient in the partial element 21.

Figure 4 shows an embodiment of the invention in which the electromagnetic heating radiation 7 is incident through the fluid flow on that surface of the partial element 21 which faces the fluid flow.

This measure has the effect that the temperature gradient induced by the optical heating radiation, said temperature gradient likewise being indicated in figure 4 by the arrows 8, does not necessarily reach that side of the partial element 21 which is remote from the fluid flow 4. In other words, the temperature distribution can be homogeneous on that side of the partial element 21 which is remote from the fluid channel, whereas it has the desired gradient on that surface of the partial element 21 which faces the fluid flow 4. The optical correction arrangement 1 is therefore thermally neutral toward the outside, whereby the disturbance potential of such a component in a projection objective is considerably reduced.

It is advantageous in this case if the cooling fluid 5 has a highest possible transmittance for the wavelength of the heating radiation 7. This is generally

- 16 -

applicable for the abovementioned purge gases that are used in projection objectives.

Figure 5 shows a variant with respect to figure 4 in which the heating radiation 7 impinges on both surfaces of the partial elements 21 and 22 that face the fluid flow.

This opens up the possibility of realizing an optical correction arrangement which is likewise thermally neutral toward the outside. For this purpose, by way of example, constant cooling can be effected by means of the fluid flow and the two optical partial elements 21 and 22 can be heated to the objective temperature with the aid of the heating radiation 7. The two partial elements 21 and 22 therefore appear thermally neutral toward the outside. Since both partial elements are now heated, firstly it is possible to obtain a higher number of degrees of freedom of manipulation, and secondly it is also possible to achieve an increase in the manipulator range, which rises with the energy of the heating radiation that can be input overall.

Figure 6 shows a further embodiment of the invention in which the optical element 2 has the two partial elements 23 and 24 that are in thermal contact with one another.

In the present example, the first partial element 23 is formed from an optical material that absorbs the heating radiation 7, such as quartz glass, for example, whereas the second optical partial element 24 is formed from optical material having better thermal conductivity relative to said quartz glass, such as CaF_2 , for example. This material pairing is suitable particularly for objectives having a useful wavelength ≥ 193 nm. In this case, too, a temperature gradient forms in the first partial element 23 and causes a

- 17 -

refractive index gradient that in turn influences the optical path length or the phase of the useful light.

In this case, the temperature gradient is once again indicated by the arrows 8. Said temperature gradient and with it the heat flow run from the first partial element 23 through the second partial element 24 into the mount 15, which serves as a heat sink. In this case, the mount 15 can be provided with a additional cooling device/thermal sink (not illustrated).

The heating radiation 7 locally impresses a heat flow that has a non-vanishing component that flows through the first partial element 23 in the axial direction in the direction of the second partial element 24 as indicated by the arrow 8. In this way, a large temperature increase arises locally in the first partial element 23 on account of the low thermal conductivity thereof. Since the second partial element 24 has a high thermal conductivity rate (CaF_2 has a thermal conductivity seven times higher than that of quartz), it conducts away the impressed heat flow in the direction of the arrow 8 radially to the heat sink 15 at the edge of the optical element 2. In this case, a temperature increase that arises in the partial element 24 is significantly smaller than that in the partial element 23.

The local temperature increase in the partial element 23 (lower thermal conductivity) leads there to a local change in the refractive index. This effect is also manifested in the second partial element 24, but it is manifested to a considerably smaller extent on account of this partial element being heated to a significantly smaller extent.

Figure 7 illustrates a variant of the invention in which the heating radiation 7 is directed on to that

- 18 -

surface of the first partial element 23 which is thermally linked to the second partial element; in other words, the heating radiation 7 is radiated to the second partial element 24. For this purpose, it is
5 advantageous to select a wavelength of the heating radiation 7 in the range $> 2 \mu\text{m}$, in particular $> 4 \mu\text{m}$ and $< 9 \mu\text{m}$.

A CO laser having an emission wavelength of $5.3 \mu\text{m}$ is
10 therefore particularly appropriate as a source for the heating radiation 7.

Figure 8 shows a further embodiment of the invention in which an absorption layer 17 for absorbing the heating
15 radiation 7 is arranged between the first partial element 23 and the second partial element 24.

The absorption layer 17 can be used in particular for heating radiation in wavelength ranges which are not
20 absorbed well enough by quartz glass, such that a significant alteration of the refractive index of the quartz glass would result, or for the case where the same material is used for the two optical partial elements 23 and 24. However, one requirement made of
25 the absorption layer 17 is that it must have a sufficiently good transmission for the useful wavelength of the projection exposure apparatus.

For the case where the useful wavelength is in the region of 193 nm , a wavelength of less than 180 nm
30 should be selected for the heating radiation. Thus, e.g. for an absorption layer 17 arranged between two partial elements composed of CaF_2 and quartz glass, the heating wavelength should be selected within the range
35 of approximately 155 nm to approximately 180 nm .

- 19 -

In addition, it is also conceivable to select the wavelength of the heating radiation within the range of the wavelength of the useful radiation.

- 5 In this case, however, there is the limitation that the absorption in the optical correction arrangement is comparatively low.

Figure 9 illustrates a projection exposure apparatus 31
10 for semiconductor lithography into which is integrated the described correction arrangement with the optical element 2. It serves for the exposure of structures onto a substrate coated with photosensitive materials, said substrate generally being composed predominantly
15 of silicon and being referred to as a wafer 32, for the production of semiconductor components, such as e.g. computer chips.

In this case, the projection exposure apparatus 31
20 essentially comprises an illumination device 33, a device 34 for receiving and exactly positioning a mask provided with a structure, a so-called reticle 35, which is used to determine the later structures on the wafer 32, a device 36 for retaining, moving and exactly
25 positioning precisely said wafer 32, and an imaging device, namely a projection objective 37, having a plurality of optical elements 38 that are borne by means of mounts 39 in an objective housing 40 of the projection objective 37. In this case, it is possible
30 to arrange a correction arrangement according to the invention with an optical element as illustrated at any desired location in the projection objective 37 or alternatively in the illumination device 33. Two locations in the projection objective 37 are
35 preferred to arrange the correction device: places near to pupil planes and near to field planes respectively. Here an optical device is understood to be near a pupil plane or field plane of the projection

- 20 -

objective 37 if there is no other optical device more near to that pupil plane or field plane respectively.

In this case, the basic functional principle provides
5 for the structures introduced into the reticle 35 being imaged onto the wafer 32; the imaging is generally performed in demagnifying fashion.

After an exposure has taken place, the wafer 32 is
10 moved further in the arrow direction, with the result that a multiplicity of individual fields each having the structure prescribed by the reticle 35 are exposed on the same wafer 32. On account of the step-by-step advancing movement of the wafer 32 in the projection
15 exposure apparatus 31, the latter is often also referred to as a stepper. In addition, so-called scanner systems, in which the reticle 35 is imaged during a joint movement with the wafer 32 in scanning fashion on the wafer 32, are also in widespread use.

20 The illumination device 33 provides a projection beam 41 required for the imaging of the reticle 35 on the wafer 32, for example light or a similar electromagnetic radiation. A laser or the like can be
25 used as a source for this radiation. The radiation is shaped in the illumination device 33 by means of optical elements in such a way that the projection beam 41, upon impinging on the reticle 35, has the desired properties with regard to diameter, polarization, shape
30 of the wavefront and the like.

By means of the beams 41, an image of the reticle 35 is generated and is transferred to the wafer 32 in correspondingly demagnified fashion by the projection
35 objective 37, as has already been explained above. The projection objective 37 has a multiplicity of individual refractive, diffractive and/or reflective

- 21 -

optical elements 38, such as e.g. lenses, mirrors, prisms, terminating plates and the like.

Figure 10 shows an embodiment of the invention which realizes a first possibility for the further manipulation of those portions of the radiation 7 which are not absorbed by the optical element 2. In this case, the incident radiation 7 impinges on the region 302 of the optical element 2. A specific portion of the radiation 7 is absorbed in the region 302 and thus contributes to the heating of the region 302. The desired correction effect of the optical element 2 is thereby achieved. It is usually the case, however, that the incident radiation 7 is not absorbed in its entirety in the region 302, but rather a specific portion of the radiation 7 is scattered or reflected. The ratio of the portions of the reflected radiation to the portions of the absorbed radiation depends in this case in particular on the angle of incidence, the polarization of the incident radiation and the surface constitution and material selection of the optical element 2. It is desirable to manipulate the non-absorbed portion of the incident radiation 7 to the effect that it does not lead to undesirable disturbances elsewhere. For this purpose, the non-absorbed portion of the radiation 7 can be absorbed by means of the absorber 301, which prevents the situation in which further reflection or scattering takes place in the system and the portion not absorbed in the optical element 2 is absorbed by other components of the optical system in an uncontrolled manner. In this case, the absorber 301 can be embodied as a baffle with tips or as material with a structured surface or as a body with an absorbent layer. The controlled absorption of that portion of the radiation 7 which is not absorbed in the optical element 2 has the effect that the radiation 7 can be incident on the optical element 2 at comparatively shallow angles. In this case the

- 22 -

non-absorbed part of the heating radiation extends in general the absorbed portion of the heating radiation and can be effectively neutralized by the absorber 301 and therefore does not lead to undesirable effects like being absorbed by optical devices different from the optical element 2. The shallower angle of incidence that can be realized in this way makes it possible to significantly reduce the additional structural space required in the objective in direction of useful radiation.

Figure 11 shows a further variant of the invention in which a reflector 304 is used instead of the use of an absorber, with the construction otherwise unchanged. The reflector 304 reflects that portion of the radiation 7 which is not absorbed in the optical element 2 back into the region 302, with the result that the optical element 2 is heated by the radiation 7 with an increased efficiency by comparison with a solution without a reflector.

The non-absorbed radiation need not necessarily be reflected back into the heated region 302 of the optical element 2 by the reflector 304. By correspondingly tilting the reflector 304, it is likewise possible for a further region 305 of the optical element 2 to be heated, as illustrated in figure 12. In this case, the regions 302 and 305 can spatially be separate from one another, adjoin one another or else overlap. The heat input at the different heated regions 302 and 305 can be influenced in a targeted manner by taking account of angle-dependent absorption properties of the optical element 2 in the design of the system.

In principle, the possibilities shown for the further manipulation of non-absorbed portions of the radiation 7 are not restricted to a shallow angle of incidence of

- 23 -

the radiation 7; rather, the solutions described in figures 10 to 12 can advantageously be employed for practically all conceivable angles of incidence.

- 24 -

Patent Claims:

1. A projection exposure apparatus for semiconductor lithography comprising an optical correction arrangement comprising at least one optical element (2), at least one irradiation means for the targeted local irradiation of the optical element (2) with electromagnetic heating radiation (7) for the targeted local heating of the optical element (2),
10 characterized in that
means for dissipating the thermal energy introduced into the optical element (2) by the at least one irradiation means are present.
- 15 2. The projection exposure apparatus as claimed in claim 1,
characterized in that
the means for dissipating the thermal energy involves means for forming a fluid flow, in particular a gas
20 flow, which passes at least one of the surfaces of the optical element (2).
3. The projection exposure apparatus as claimed in claim 2,
25 characterized in that
the optical element (2) comprises two optical partial elements (21, 22) which are arranged adjacent and between which is formed a channel through which the fluid flow can flow.
- 30 4. The projection exposure apparatus as claimed in claim 3,
characterized in that
the channel is bordered by plane surfaces of the
35 optical partial elements (21, 22), which are embodied in particular as plane-parallel plates.

- 25 -

5. The projection exposure apparatus as claimed in any of claims 2 to 4, characterized in that the electromagnetic heating radiation (7) runs through the fluid flow.

6. The projection exposure apparatus as claimed in any of claims 3 to 5, characterized in that the electromagnetic heating radiation (7) is directed onto the two channel-forming surfaces of the optical partial elements (21, 22).

7. The projection exposure apparatus as claimed in any of claims 2 to 6, characterized in that the direction of movement of the fluid flow is oriented parallel to a surface of the optical element (2), or has a component of its direction of movement which is oriented perpendicular to a surface of the optical element (2).

8. The projection exposure apparatus as claimed in any of the preceding claims, characterized in that the optical element (2) has at least two partial elements (23, 24) which are in thermal contact with one another and of which the second partial element (24), preferably containing CaF_2 , has a higher thermal conductivity than the first partial element (23), preferably containing quartz glass, and wherein the second partial element (24) in conjunction with a heat sink (15) in thermal contact with it forms the means for dissipating the thermal energy introduced.

9. The projection exposure apparatus as claimed in claim 8, characterized in that

- 26 -

the heating radiation (7) is directed onto that side of the first partial element (23) which is remote from the second partial element (24), or the heating radiation (7) is directed onto that surface of the first partial element (23) which is thermally linked to the second partial element (24).

10. The projection exposure apparatus as claimed in any of claims 8 to 9,
10 characterized in that
an absorption layer (17) for absorbing the heating radiation (7) is arranged on one of the optical partial elements (23, 24), preferably between the first (23) and the second (24) optical partial element.

15
11. The projection exposure apparatus as claimed in claim 1, characterized in that the optical element (2) is a mirror of the projection exposure apparatus and the projection exposure apparatus is preferably an EUV
20 projection exposure apparatus.

12. The projection exposure apparatus as claimed in claim 11, characterized in that
the means for dissipating the energy are channels in
25 the mirror substrate through which a cooling medium can flow or

the means for dissipating the energy are thermally conductive solids which preferably either are embodied as kinematic elements, bearing elements or as actuators
30 or

the means are embodied as additional elements, in particular fibers or heat conducting strips or
the means for dissipating the energy are emissive elements or a fluid flow, in particular a gas flow,
35 especially of hydrogen or argon at a pressure of a plurality of pascals, preferably 3 to 4 pascals passing the mirror.

- 27 -

13. The projection exposure apparatus as claimed in any of the preceding claims, characterized in that means for the further manipulation of those portions of the heating radiation (7) which are not absorbed by the optical element (2) are present, wherein these means are embodied in particular as absorbent elements suitable for absorbing radiation having the wavelength of the heating radiation (7).



10



14. The projection exposure apparatus as claimed in claim 13, characterized in that the absorbent element is arranged outside a housing of the projection exposure apparatus, and in that the housing has a window for the passage of non-absorbed portions of the heating radiation (7) in the direction of the absorbent element.

15

15. The projection exposure apparatus as claimed in claim 13 or claim 14, characterized in that the means for further manipulation are reflective elements by means of which non-absorbed portions of the radiation (7) can be directed onto the optical element (2) or different components of the projection exposure apparatus.

20
25

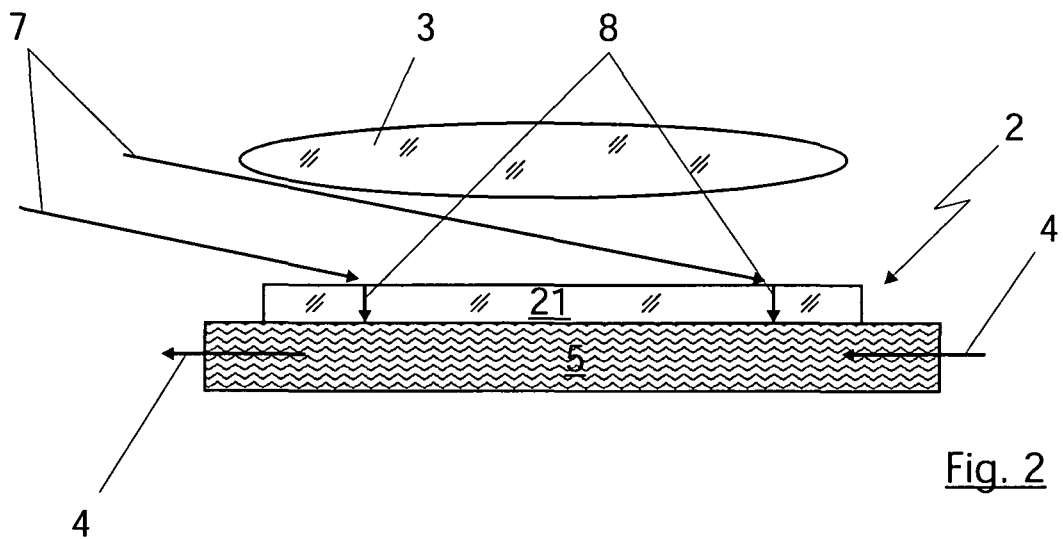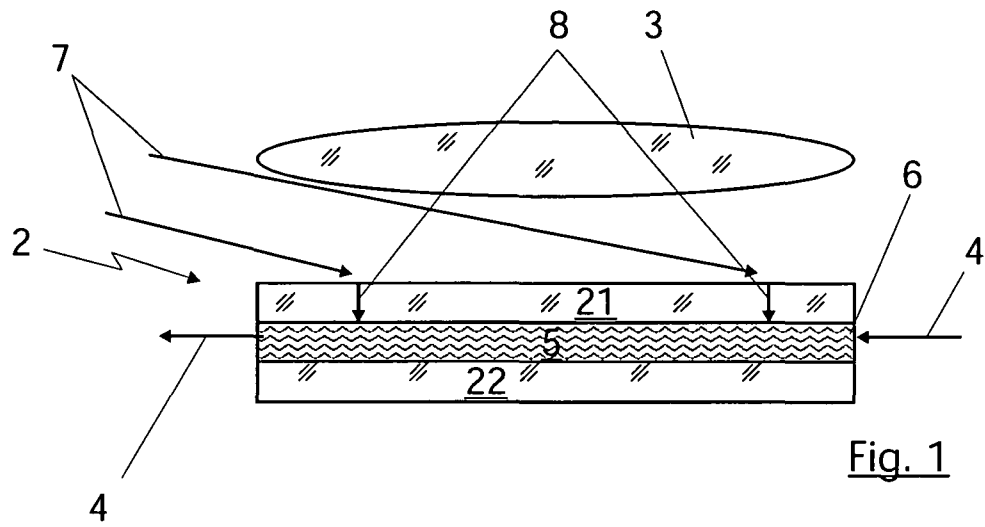

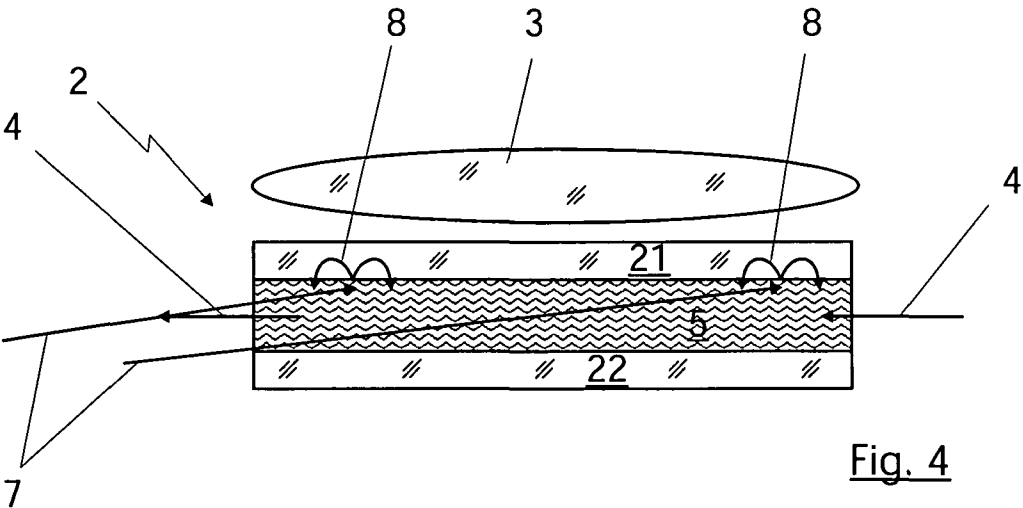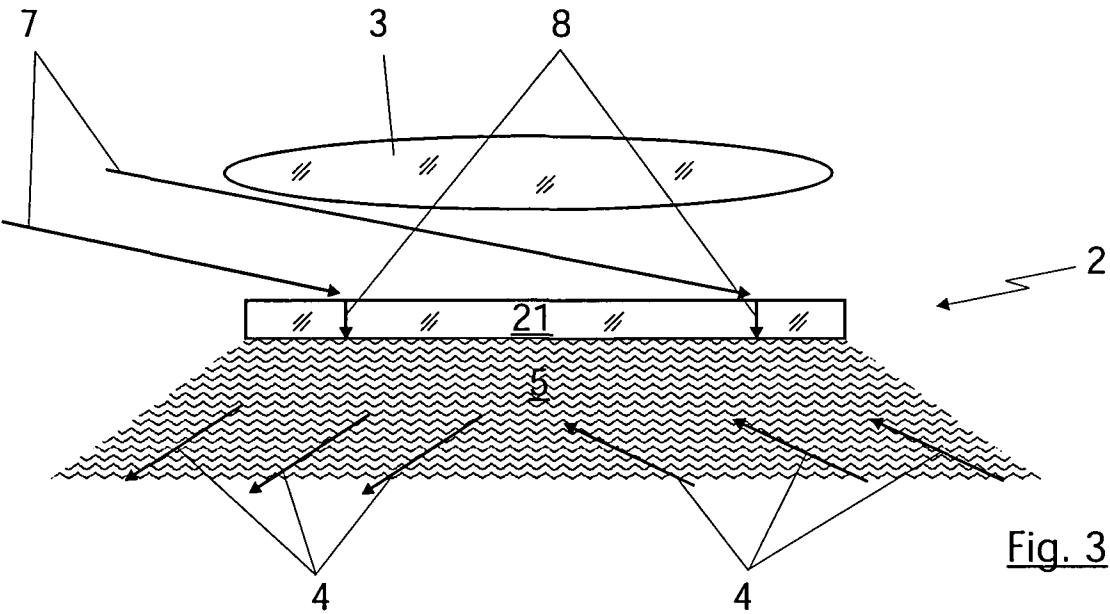

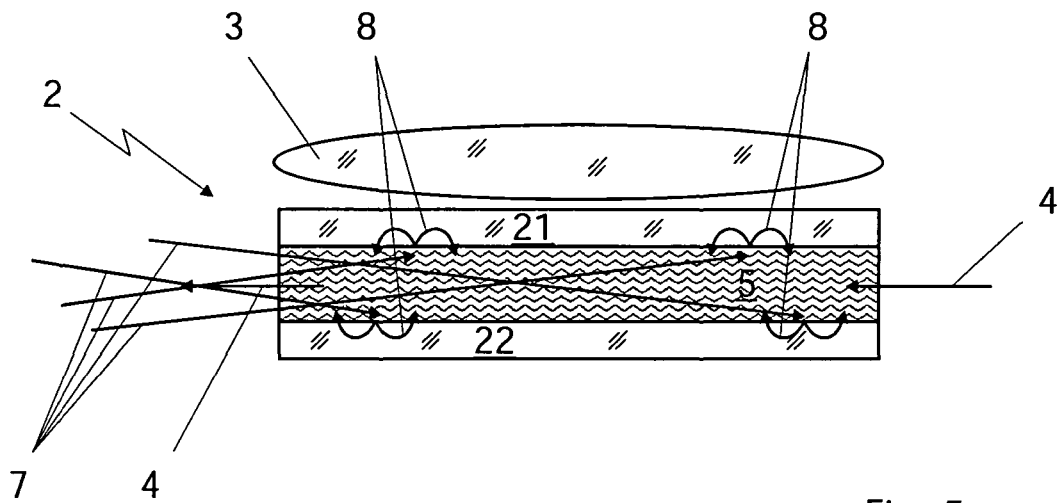


Fig. 5

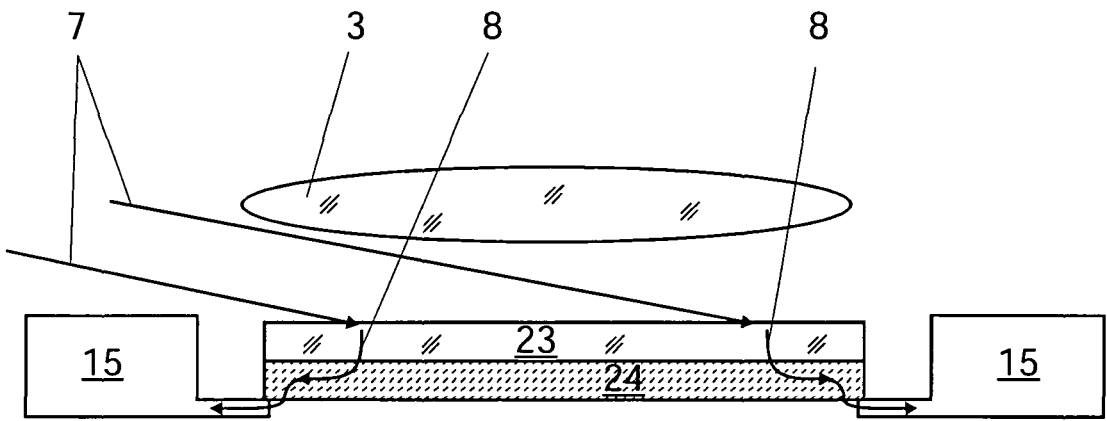
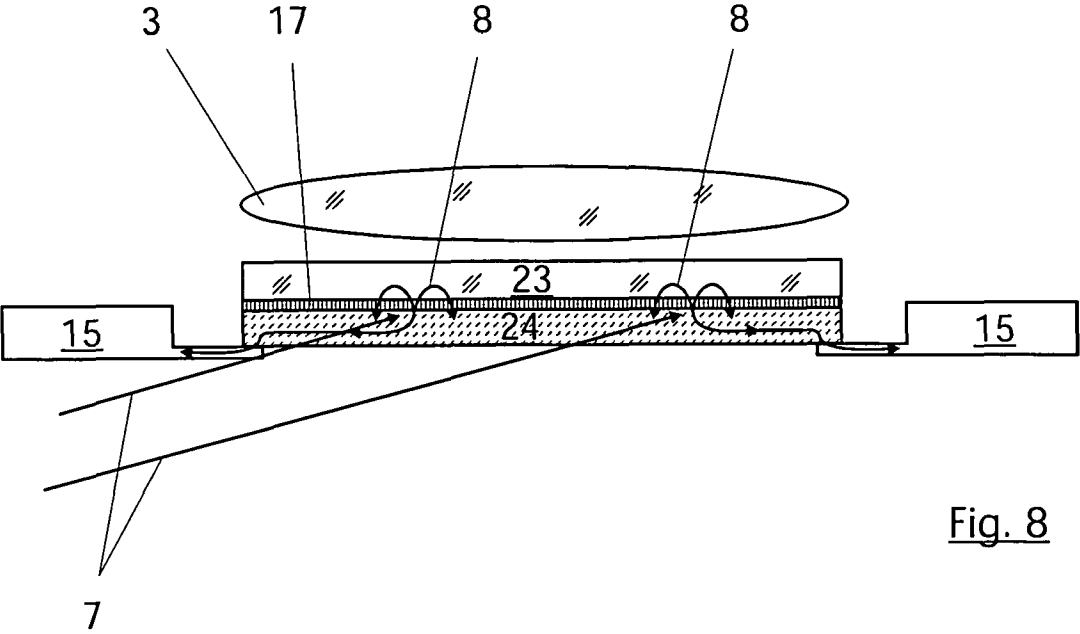
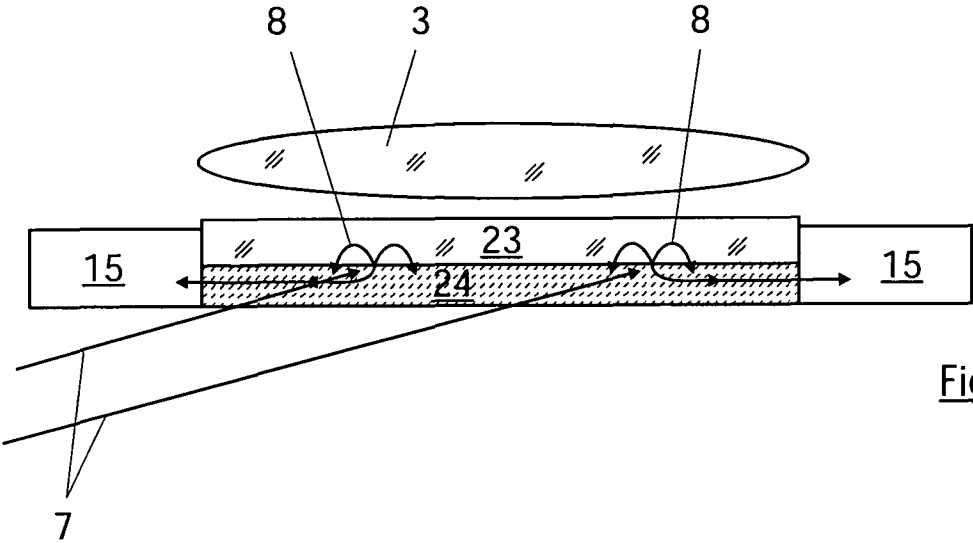


Fig. 6






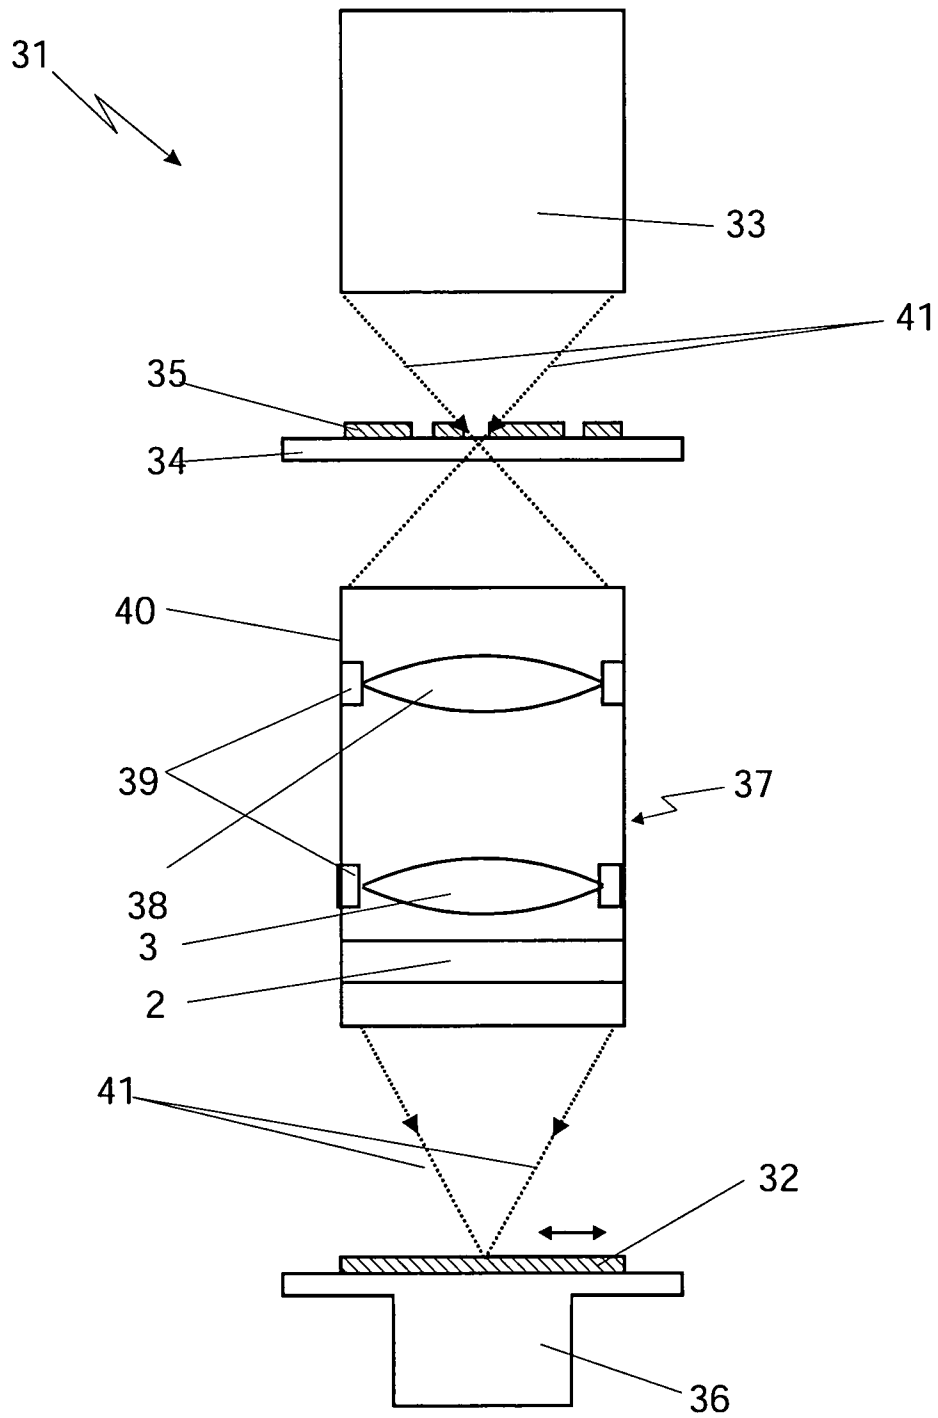


Fig. 9

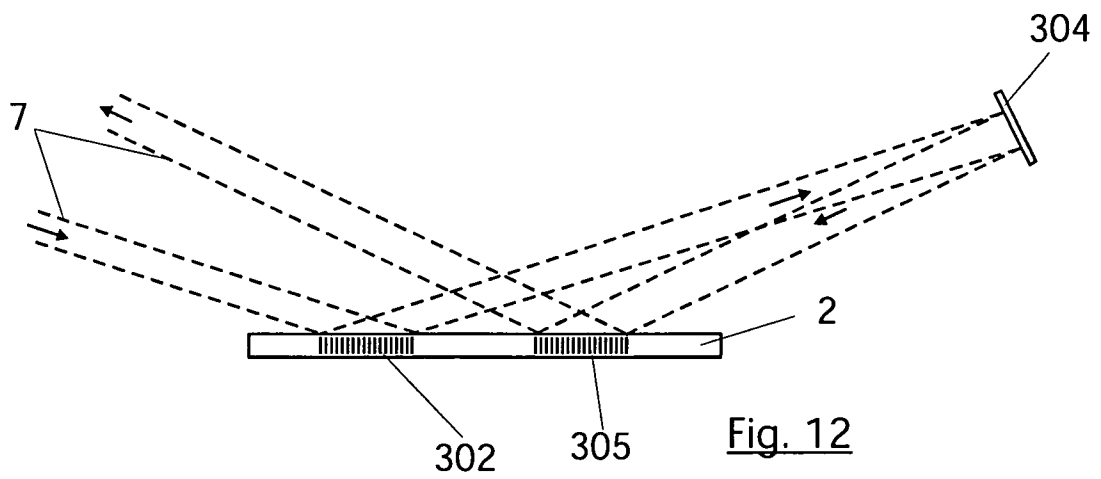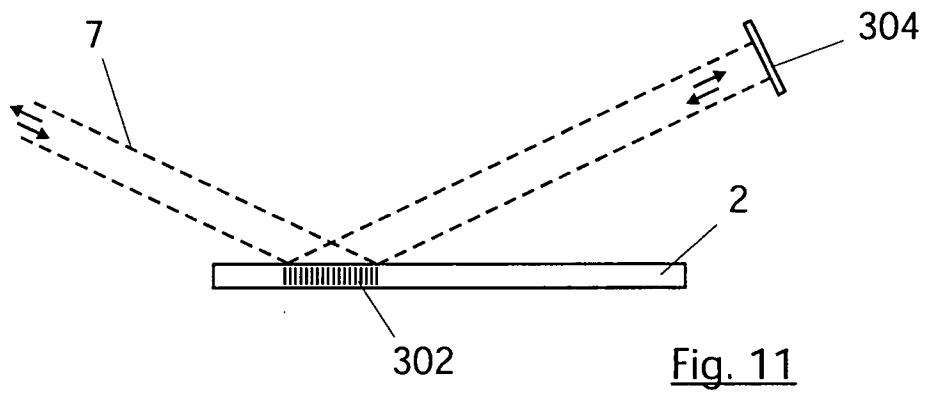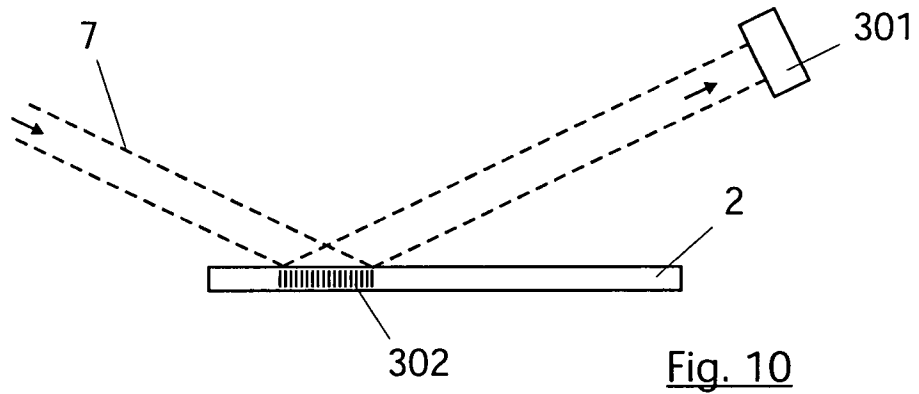

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2009/003504

A. CLASSIFICATION OF SUBJECT MATTER

INV. G03F7/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G03F G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 390 228 A (NIIBE MASAHIRO [JP] ET AL) 14 February 1995 (1995-02-14) columns 4-6	1,11,12
Y	-----	2-10,13
X	JP 09 232213 A (NIPPON KOGAKU KK) 5 September 1997 (1997-09-05) paragraphs [0022] - [0035]; figure 5	1
Y	-----	2-10,13
X	EP 1 376 092 A (NIPPON KOGAKU KK [JP]) 2 January 2004 (2004-01-02) paragraphs [0010] - [0019], [0035] - [0049]	1,11,12
Y	paragraphs [0077], [0078] -----	10
	-/--	

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

21 January 2010

Date of mailing of the international search report

01/02/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Roesch, Guillaume

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2009/003504

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2008/122410 A (ZEISS CARL SMT AG [DE]; KRAEHMER DANIEL [DE]; CONRADI OLAF [DE]; DODOC) 16 October 2008 (2008-10-16) pages 5,7,8,25,26claim 54; figures 11-13 -----	2-7
Y	US 2009/046260 A1 (JANSEN BASTIAAN STEPHANUS [NL]) 19 February 2009 (2009-02-19) paragraph [0038] -----	2-7
Y	WO 2009/026970 A (ZEISS CARL SMT AG [DE]; HAUF MARKUS [DE]; SCHOENHOFF ULRICH [DE]; TAYE) 5 March 2009 (2009-03-05) pages 7,10-14,35-37 -----	8-10
Y	JP 10 284390 A (NIPPON KOGAKU KK) 23 October 1998 (1998-10-23) paragraphs [0038] - [0045]; figures 3,5 -----	2,13
A	US 2006/244940 A1 (UEHARA YUSAKU [JP]) 2 November 2006 (2006-11-02) paragraphs [0084], [0187] -----	3,14
A	WO 2004/036316 A (ZEISS CARL SMT AG [DE]; FEHR JEAN-NOEL [CH]; FROMMEYER ANDREAS [DE]) 29 April 2004 (2004-04-29) cited in the application pages 3,11,12,23,24 -----	1,2, 11-14

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2009/003504

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5390228	A	14-02-1995	NONE	
JP 9232213	A	05-09-1997	NONE	
EP 1376092	A	02-01-2004	JP 2004031958 A US 2003235682 A1	29-01-2004 25-12-2003
WO 2008122410	A	16-10-2008	DE 102008000968 A1	09-10-2008
US 2009046260	A1	19-02-2009	JP 2009081419 A NL 1035770 A1	16-04-2009 17-02-2009
WO 2009026970	A	05-03-2009	NONE	
JP 10284390	A	23-10-1998	NONE	
US 2006244940	A1	02-11-2006	EP 1670041 A1 WO 2005022614 A1 KR 20060120629 A	14-06-2006 10-03-2005 27-11-2006
WO 2004036316	A	29-04-2004	AU 2002346911 A1	04-05-2004