



(86) Date de dépôt PCT/PCT Filing Date: 2014/08/07
(87) Date publication PCT/PCT Publication Date: 2015/02/12
(45) Date de délivrance/Issue Date: 2023/06/27
(85) Entrée phase nationale/National Entry: 2016/02/01
(86) N° demande PCT/PCT Application No.: JP 2014/070858
(87) N° publication PCT/PCT Publication No.: 2015/020146
(30) Priorité/Priority: 2013/08/08 (JP2013-165183)

(51) Cl.Int./Int.Cl. *H01M 8/02* (2016.01),
B29C 43/02 (2006.01)
(72) Inventeur/Inventor:
MATSUMOTO, NOBUYUKI, JP
(73) Propriétaire/Owner:
NISSHINBO CHEMICAL INC., JP
(74) Agent: SMART & BIGGAR LP

(54) Titre : SEPARATEUR SOUPLE DE PILE A COMBUSTIBLE
(54) Title: FLEXIBLE FUEL CELL SEPARATOR



(57) Abrégé/Abstract:

A fuel cell separator obtained by molding a composition containing a carbonaceous material and a resin binder incorporating a thermoset resin and a thermoplastic elastomer such as a styrene thermoplastic elastomer is flexible (not prone to cracking) and has excellent gas barrier properties and durability.



ABSTRACT

5 A fuel cell separator obtained by molding a composition containing a carbonaceous material and a resin binder incorporating a thermoset resin and a thermoplastic elastomer such as a styrene thermoplastic elastomer is flexible (not prone to cracking) and has excellent gas barrier properties and durability.

DESCRIPTIONTITLE OF THE INVENTION

FLEXIBLE FUEL CELL SEPARATOR

5

TECHNICAL FIELD

[0001]

This invention relates to a fuel cell separator.

10

BACKGROUND ART

[0002]

Fuel cell separators, along with imparting electrical conductivity to each unit cell and providing flow channels for the fuel and air (oxygen) supplied to the unit cells, also serve as boundary walls separating the unit cells.

Characteristics required of a separator thus include high electrical conductivity, gas barrier properties, chemical stability, heat resistance and hot water resistance.

20 [0003]

Fuel cell separator materials that have been used to date include glassy carbon, materials obtained by blending graphite with a thermoset resin, and metals. Such materials have a low elasticity and, with the slightest thickness variation or dimensional change, are unable to achieve sufficient sealability. As a result, not only are they required to have a high dimensional precision, adhesion of the contacting surfaces between stacked separators is poor, sometimes worsening the contact resistance.

30 In carbon separators, another problem is that cracks tend to develop from clamping with bolts and nuts during fuel cell

81793497

assembly, and gas leaks end up arising from the cracks. In
automotive applications, in particular, where separators of
reduced thinness are desired, the separators have a poor
handleability during thin-wall molding and are prone to
5 cracking.

[0004]

Separators that address such problems by using a
conductive material and a thermoplastic elastomer to impart
flexibility to the separator have been disclosed (see Patent
5 Documents 1 to 3). However, thermoplastic elastomers
inherently have a low density, and so drawbacks of separators
fabricated using a thermoplastic elastomer as the binder
include inadequate fuel gas barrier properties and, because
such elastomers are thermoplastic resins, inferior
10 compression creep properties in fuel cells that operate under
a fixed pressure. In addition, durability is also a problem.

To improve the properties diminished by the use of a
thermoplastic elastomer, some proposed solutions call for
compounding or modifying a conductive filler, but a direct
15 solution relating to the gas barrier properties has not been
found.

Hence, the fact of the matter is that there do not
exist any fuel cell separators which are satisfactory in
terms of flexibility, gas barrier properties, durability,
20 electrical conductivity and the like.

PRIOR ART DOCUMENTS

PATENT DOCUMENTS

[0005]

25 Patent Document 1: JP-A 2001-313045
Patent Document 2: JP-A 2005-18994
Patent Document 3: JP-A 2012-15118

SUMMARY OF THE INVENTION

PROBLEMS TO BE SOLVED BY THE INVENTION

30 [0006]

This invention was arrived at in view of the above
circumstances. The object of the invention is to provide a
fuel cell separator which is flexible (not prone to cracking)
35 and also has excellent gas barrier properties and durability.

69562-112

MEANS FOR SOLVING THE PROBLEMS

[0007]

The inventor has conducted extensive investigations in order to attain the above object, discovering as a result that, by using a thermoset resin and a thermoplastic elastomer together as the binder resin for a carbonaceous material, there can be obtained a fuel cell separator which, along with having both flexibility and gas barrier properties, also has an excellent durability and can be efficiently produced.

10 [0008]

Accordingly, the invention provides:

1. A fuel cell separator obtained by molding a composition which contains a carbonaceous material and a resin binder, wherein the resin
15 binder includes a thermoset resin and a thermoplastic elastomer;
2. The fuel cell separator of 1 above, wherein the resin binder further includes a compatibilizer;
3. The fuel cell separator of 1 or 2 above, wherein the
20 thermoplastic elastomer includes a styrene thermoplastic elastomer;
4. The fuel cell separator of 3 above, wherein the styrene thermoplastic elastomer is a hydrogenated styrene thermoplastic elastomer;
- 25 5. The fuel cell separator of 4 above, wherein the hydrogenated styrene thermoplastic elastomer is a side chain-bearing hydrogenated styrene thermoplastic elastomer;
6. The fuel cell separator of 5 above, wherein the side chain-bearing hydrogenated styrene thermoplastic elastomer is
30 a block copolymer containing a side-chain-bearing polyolefin polymer block and a styrene polymer block;
7. The fuel cell separator of any one of 2 to 6 above, wherein the compatibilizer is a thermoplastic elastomer;
8. The fuel cell separator of any one of 2 to 7 above,
35 wherein the compatibilizer is an acid-modified thermoplastic elastomer;

9. The fuel cell separator of 8 above, wherein the acid-modified thermoplastic elastomer is a maleic anhydride-modified hydrogenated styrene-ethylene-butylene-styrene block copolymer; and

10. A method for producing a fuel cell separator, comprising:
5 preparing a slurry by mixing together a carbonaceous material, a thermoset resin, a thermoplastic elastomer and a solvent; coating the slurry onto a surface; removing the solvent to form a sheet-like separator precursor; and molding the separator precursor.
[0008a]

10 In another aspect, the invention provides a fuel cell separator obtained by molding a composition comprising a carbonaceous material and a resin binder, the resin binder comprising a thermoset resin, a thermoplastic elastomer (A), and a compatibilizer, wherein the thermoset resin is at least one
15 selected from the group consisting of phenolic resins, epoxy resins, furan resins, urea resins, melamine resins, polycarbodiimide resins, silicone resins, and benzoxazine resins, and wherein the compatibilizer is an acid-modified thermoplastic elastomer that is different from the thermoplastic elastomer (A).

20 [0008b]

In another aspect, the invention provides a method for producing a fuel cell separator, the method comprising the steps of preparing a slurry by mixing together a carbonaceous material, a thermoset resin, a thermoplastic elastomer, a compatibilizer and a
25 solvent, wherein the thermoset resin is at least one selected from the group consisting of phenolic resins, epoxy resins, furan resins, urea resins, melamine resins, polycarbodiimide resins, silicone resins, and benzoxazine resins, and wherein the compatibilizer is an acid-

modified thermoplastic elastomer; coating the slurry onto a surface; removing the solvent to form a sheet-like separator precursor; and molding the separator precursor, and thermally curing the molded separator precursor, wherein the removing the solvent is performed by heating at a lower temperature than the temperature at which the thermoset resin begins to cure.

ADVANTAGEOUS EFFECTS OF THE INVENTION

[0009]

The fuel cell separator of the invention, because it possesses a suitable flexibility, is not prone to cracking and also has other good performance attributes, such as decreased contact resistance. In addition, the gas barrier properties and durability are also excellent.

The fuel cell separator of the invention is thus an outstanding product which retains the flexibility of an elastomer, yet possesses gas barrier properties, heat resistance and electrical characteristics comparable to those of conventional fuel cell separators made primarily of a thermoset resin.

Moreover, in the invention, a separator can be obtained by, for example, rendering a composition containing a carbonaceous material, a thermoset resin and a thermoplastic elastomer into a sheet-like precursor, then compression-molding the precursor. As a result, improved separator productivity by sheet feeding can also be expected.

BRIEF DESCRIPTION OF THE DIAGRAMS

[0010]

[Fig. 1] FIG. 1 shows, in a folded state, the fuel cell separator produced in Example 1.

- [Fig. 2] FIG. 2 shows, in a folded state, the fuel cell separator produced in Example 3.
- [Fig. 3] FIG. 3 shows, in a folded state, the fuel cell separator produced in Example 4.
- 5 [Fig. 4] FIG. 4 shows, in a folded state, the fuel cell separator produced in Comparative Example 1.

EMBODIMENT FOR CARRYING OUT THE INVENTION

[0011]

10 The invention is described more fully below.

The fuel cell separator of the invention (sometimes referred to below simply as the "separator") is obtainable by molding a composition containing a carbonaceous material and a resin binder, and is characterized in that the resin binder
15 contains a thermoset resin, a thermoplastic elastomer and, optionally, a compatibilizer.

The thermoset resin may be suitably selected from among those hitherto in general use as resin binders in carbon separators.

20 Exemplary thermoset resins include phenolic resins, epoxy resins, furan resins, unsaturated polyester resins, urea resins, melamine resins, diallyl phthalate resins, bismaleimide resins, polycarbodiimide resins, silicone resins, vinyl ester resins and benzoxazine resins. These may be used
25 singly, or two or more may be used in combination. Of these, because of their excellent heat resistance and mechanical strength, preferred use can be made of epoxy resins.

[0012]

The epoxy resin is not particularly limited, provided
30 it has epoxy groups. Illustrative examples include o-cresol novolak-type epoxy resins, phenol novolak-type epoxy resins, bisphenol A-type epoxy resins, hydrogenated bisphenol A-type epoxy resins, bisphenol F-type epoxy resins, hydrogenated
35 bisphenol F-type epoxy resins, biphenyl-type epoxy resins and brominated epoxy resins. These may be used singly, or two or more may be used in combination. Of these, o-cresol novolac-type epoxy resins are preferred.

Exemplary curing agents for when epoxy resins are used include phenolic resins and amine compounds, acid anhydrides, polyaminoamide compounds, dicyandiamide, imidazole compounds, polymercaptan compounds and isocyanate compounds. Of these,
 5 from the standpoint of raising the glass transition point so as to improve heat resistance, and enhancing the mechanical strength properties when hot, the use of a phenolic resin is preferred.

Examples of phenolic resins include novolak-type
 10 phenolic resins, cresol novolak-type phenolic resins, resole-type phenolic resins and aralkyl-modified phenolic resins. These may be used singly or two or more may be used in combination.

[0013]

15 A curing accelerator for the thermoset resin may be included in the invention. Illustrative examples of the curing accelerator include phosphine compounds such as triphenylphosphine (TPP) and tetraphenylphosphine; amine compounds such as diazabicycloundecene (DBU) and
 20 dimethylbenzylamine (BDMA); and imidazole compounds such as 2-methylimidazole, 2-methyl-4-imidazole, 2-undecylimidazole, 2-heptadecylimidazole, 2-phenylimidazole, 2-phenyl-4-methylimidazole, 1-(2-chlorophenyl)imidazole, 1-(3-chlorophenyl)imidazole, 1-(4-chlorophenyl)imidazole,
 25 1-(3-fluorophenyl)imidazole, 1-(4-fluorophenyl)imidazole, 1-(4-methoxyphenyl)imidazole, 1-o-tolylimidazole, 1-m-tolylimidazole, 1-(3,5-dimethylphenyl)imidazole, 2-(4-chlorophenyl)imidazole, 2-(4-fluorophenyl)imidazole, 5-phenylimidazole, 5-(2-chlorophenyl)imidazole,
 30 5-(3-chlorophenyl)imidazole, 5-(4-chlorophenyl)imidazole, 5-(2-fluorophenyl)imidazole, 5-(3-fluorophenyl)imidazole, 5-(4-fluorophenyl)imidazole, 5-(2-methoxyphenyl)imidazole, 5-(3-methoxyphenyl)imidazole, 5-(4-methoxyphenyl)imidazole, 5-o-tolylimidazole, 5-m-tolylimidazole, 5-p-tolylimidazole
 35 and 1-benzyl-2-methylimidazole. These may be used singly, or two or more may be used in combination.

[0014]

Of the foregoing compounds, to increase the thermal stability of the resin binder, to prevent the curing reaction from proceeding abruptly within the mold during molding of the separator, causing the melt viscosity and molding pressure to rise, and to provide a suitable activity as a curing accelerator, the use of an imidazole compound is preferred.

In order to have the curing reaction proceed efficiently and mildly, the amount of curing accelerator included is preferably from 0.65 to 2.0 parts by weight per 100 parts by weight of the resin binder.

[0015]

The thermoplastic elastomer is exemplified by, but not particularly limited to, styrene thermoplastic elastomers, olefin thermoplastic elastomers, urethane thermoplastic elastomers, polyester thermoplastic elastomers, polyamide thermoplastic elastomers, 1,2-polybutadiene thermoplastic elastomers and fluorinated thermoplastic elastomers. These may be used singly or in combinations of two or more. Of these, to obtain heat resistance and a good flexibility, the thermoplastic elastomer used in the invention preferably includes a styrene thermoplastic elastomer. From the standpoint of further increasing the heat resistance properties, it is more preferable to include a hydrogenated styrene thermoplastic elastomer.

[0016]

In order to retain the gas barrier properties of the resulting separator, the thermoplastic elastomer component used in the invention more preferably includes a side chain-bearing hydrogenated styrene thermoplastic elastomer, and even more preferably includes a block copolymer containing a side chain-bearing polyolefin polymer block and a styrene polymer block.

[0017]

Illustrative examples of styrene thermoplastic elastomers include styrene-butadiene-styrene block copolymers (SBS), hydrogenated styrene-ethylene-butylene-styrene block

copolymers (SEBS), styrene-isoprene-styrene block copolymers (SIS), styrene-ethylene-propylene-styrene block copolymers (SEPS), styrene-isobutylene-styrene block copolymers (SIBS) and styrene-ethylene-butylene-olefin crystalline block copolymers (SEBC). However, taking into account the various characteristics of the resulting above-described separator, of these, styrene-isobutylene-styrene block copolymers (SIBS) are most preferred.

[0018]

10 A thermoset resin and a thermoplastic elastomer, which are differing types of materials, are both included in the composition used in this invention. These differing types of materials, in terms of their affinity and thermal properties, are not inherently compatible. To obtain a separator having
15 a better performance, it is desirable for both ingredients to be miscible within the composition.

From this standpoint, it is preferable to include in the composition used in this invention, as one ingredient of the resin binder, a compatibilizer which renders these
20 differing materials compatible during mixing and molding.

Regarding the properties of the compatibilizer, a "phase-separated system" is preferred in which polymers of differing natures are present as discrete phases and the compatibilizer stabilizes the dispersed polymers by being
25 present at the interfaces.

By using this phase-separated system compatibilizer, there forms within the composition a structure having numerous island phases dispersed within a disperse phase, which enables the properties of both the thermoset resin and
30 the thermoplastic elastomer to be better manifested.

[0019]

Compatibilizers are classified as nonreactive compatibilizers which have no reactive groups within the molecular structure, and reactive compatibilizers which have
35 reactive groups. Either of these may be used.

Exemplary nonreactive compatibilizers include those having a structure in which the differing types of polymer

are chemically bonded (block, random, and graft polymers). Illustrative examples include thermoplastic elastomers such as styrene-butadiene-styrene block copolymers (SBS), hydrogenated styrene-ethylene-butylene-styrene block
5 copolymers (SEBS) and styrene-ethylene-propylene-styrene block copolymers (SEPS); and polypropylene-styrene graft copolymers.

Exemplary reactive compatibilizers include modified thermoplastic elastomers obtained by introducing polar
10 functional groups such as carboxyl groups, epoxy groups or hydroxyl groups into the above thermoplastic elastomer. Illustrative examples include acid-modified thermoplastic elastomers such as maleic anhydride-modified hydrogenated styrene-ethylene-butylene-styrene block copolymers
15 (acid-modified SEBS), and epoxy-modified thermoplastic elastomers such as epoxidized styrene-butadiene-styrene block copolymers (epoxidized SBS).

Other exemplary reactive compatibilizers are homopolymers (thermoplastic resins) having the above polar
20 functional groups introduced thereon, illustrative examples of which include maleic anhydride-modified polyolefins such as maleic anhydride-modified polypropylene.

Copolymeric (thermoplastic resin) compounds of a polar functional group-containing monomer such as an epoxy
25 group-containing (meth)acrylate compound or maleic anhydride with another polymerizable double bond-containing monomer can also be used as a reactive compatibilizer. Illustrative examples include ethylene-glycidyl methacrylate copolymers (EGMA) and styrene-maleic anhydride copolymers (SMA).

30 Of these, the use in this invention of a reactive compatibilizer is preferred because advantageous effects can readily be obtained on thermoset resins. Because a thermoplastic elastomer is used as the resin binder, the use of a thermoplastic elastomer-type compatibilizer is more
35 preferred. An acid-modified thermoplastic elastomer having an excellent compatibilizing performance is still more preferred, with a maleic anhydride-modified hydrogenated

styrene-ethylene-butylene-styrene block copolymer being most preferred.

[0020]

When a compatibilizer is used, the amount thereof is not particularly limited, although the weight ratio of thermoplastic elastomer to compatibilizer is preferably from about 1:9 to about 9:1, more preferably from about 3:7 to about 9:1, and even more preferably from 4:6 to 9:1.

[0021]

The thermoplastic elastomers used in the invention (including thermoplastic elastomers used as compatibilizers) may be commercial products, illustrative examples of which include the styrene-isobutylene-styrene block copolymers SIBSTAR™ 072T, 073T, 102T and 103T (available from Kaneka Corporation), the hydrogenated styrene-ethylene-butylene-styrene block copolymers Tuftec® H1041, H1043, H1051, H1052, H1053, H1062, H1221 and H1517 (available from Asahi Kasei Chemicals Corporation) and DYNARON® 8600P, 8601P, 8903P and 9901P (available from JSR Corporation), the maleic anhydride-modified hydrogenated styrene-ethylene-butylene-styrene block copolymers Tuftec® M1911, M1913 and M1943 (available from Asahi Kasei Chemicals Corporation), and the polar functional group-modified elastomers f-DYNARON® 4630P and 8630P (available from JSR Corporation).

[0022]

The relative proportions in which the thermoset resin, the thermoplastic elastomer and the optionally used compatibilizer are included in the resin binder are suitably set while taking into account, for example, the flexibility and gas barrier properties of the separator to be obtained, and therefore cannot be strictly specified. The amount of

thermoset resin may be set to generally from about 1 to about 100 parts by weight per 100 parts by weight of the combined amount of the thermoplastic elastomer and the optionally used compatibilizer. However, particularly from the standpoint of imparting flexibility while ensuring gas barrier properties, the amount of thermoset resin used per 100 parts by weight of the combined amount of the thermoset elastomer and the optionally used compatibilizer is preferably from 30 to 100 parts by weight, and more preferably from 50 to 100 parts by weight.

[0023]

Illustrative examples of carbonaceous materials that may be used in this invention include natural graphites such as earthy graphite, vein graphite and flake graphite, synthetic graphite, expanded graphite, kish graphite, amorphous graphite, carbon black, acetylene black and ketjen black™. These may be used singly, or two or more may be used in combination. In this invention, the use of a carbonaceous material containing at least a graphite material such as natural graphite, synthetic graphite, expanded graphite or kish graphite is preferred. To increase the gas barrier properties of the resulting separator, the use of a carbonaceous material containing flake graphite is preferred.

To increase the electrical conductivity of the resulting separator, the use of a material having excellent electric conductivity, such as carbon black, acetylene black or ketjen black (referred to below as a "highly conductive material"), together with a graphite material is more preferred, with a carbonaceous material containing flake graphite and carbon black being most preferred.

The relative proportions in which the graphite material and the highly conductive material are used is not particularly limited, although the amount of the highly conductive material is preferably from 1 to 50 parts by weight, more preferably
5 from 5 to 20 parts by weight, and even more preferably from 8 to 15 parts by weight, per 100 parts by weight of the graphite material.

[0024]

10 In this invention, the graphite material has an average particle size ($d = 50$) which, although not particularly limited, is preferably from 10 to 80 μm , more preferably from 20 to 60 μm , and even more preferably from 30 to 50 μm .

The average particle size ($d = 50$) is a value measured with a particle size analyzer (available from Nikkiso Co., Ltd.).

[0025]

5 With regard to the amounts of carbonaceous material and resin binder used in this invention, the amount of carbonaceous material used per 100 parts by weight of the resin binder may be set to from about 30 to about 5,000 parts by weight. However, taking into account the gas barrier
10 properties, electrical conductivity, flexibility and other characteristics of the separator to be obtained, the amount of carbonaceous material per 100 parts by weight of resin binder is preferably from 100 to 1,000 parts by weight, more preferably from 200 to 700 parts by weight, and even more
15 preferably from 400 to 600 parts by weight.

[0026]

 In the composition used in the invention, an internal mold release agent may be included for the purpose of enhancing mold releasability. Illustrative examples of
20 internal mold release agents include stearic acid wax, amide wax, montanic acid wax, carnauba wax and polyethylene wax. These may be used singly or two or more may be used in combination.

 The content of internal mold release agent in the
25 composition, although not particularly limited, is typically from 0.1 to 1.5 parts by weight, and preferably from 0.3 to 1.0 part by weight, per 100 parts by weight of the carbonaceous material.

[0027]

30 The separator of the invention is obtained by molding the composition into a desired separator shape. The method of preparing the composition and the method of molding the separator are not particularly limited. Use may be made of various hitherto known methods.

35 Preparation of the composition may be carried out by, for example, mixing each of the resins used in the resin binder and the carbonaceous powder in any order and in given

proportions. Examples of mixers that may be used for such mixing include planetary mixers, ribbon blenders, Loedige mixers, Henschel™ mixers, rocking mixers and Nauta mixers.

The method of molding the separator also is not particularly limited. For example, use can be made of an injection molding, transfer molding, compression molding or extrusion process. Of these, to obtain a separator of excellent precision and mechanical strength, the use of compression molding is preferred.

The compression molding conditions are a mold temperature of 80 to 200°C, a molding pressure of 1.0 MPa or more but less than 20 MPa, preferably from 2.0 to 10 MPa, and a molding time of from 20 seconds to 1 hour.

After compression molding, to promote thermosetting, 1 to 60 minutes of additional heating at 150 to 200°C may be carried out.

[0028]

In cases where the composition of the invention is a solvent-containing slurry, a separator of the desired shape may be obtained by coating the slurry onto, for example, a release film, removing the solvent to form a sheet-like precursor, and then compression molding the precursor. In this technique, because the precursor fabricated from the inventive composition has a high flexibility that allows it to be rolled, continuous feeding of the sheet is possible, leading to improved separator productivity.

[0029]

The solvent here is not particularly limited, provided it is capable of preparing a coatable slurry. Illustrative examples include aliphatic hydrocarbon solvents such as pentane, hexane and heptane; aromatic hydrocarbon solvents such

81793497

as toluene, p-xylene, o-xylene, m-xylene and ethylbenzene;
ketone solvents such as acetone, methyl ethyl ketone, methyl
isopropyl ketone, diethyl ketone, methyl isobutyl ketone,
methyl n-butyl ketone, cyclopentanone and cyclohexanone; ester
5 solvents such as ethyl acetate, isopropyl acetate, n-propyl
acetate, isobutyl acetate and

n-butyl acetate; aliphatic alcohols such as methanol, ethanol, n-propanol, isopropanol, n-butanol, isobutanol, t-butanol, 1-pentanol, 1-hexanol and cyclohexanol; ether solvents such as diethyl ether, tetrahydrofuran and 1,4-dioxane; amide solvents such as N,N-dimethylformamide, N,N-dimethylacetamide (DMAc) and N-methylpyrrolidone; cyclic urea solvents such as 1,3-dimethyl-2-imidazolidinone and 1,3-dimethyl-3,4,5,6-tetrahydro-2(1H)-pyrimidinone; and dimethylsulfoxide. These may be used singly or two or more may be used in admixture. In this invention, the use of a mixed solvent of a ketone solvent and an aromatic hydrocarbon solvent is preferred, with the use of a mixed solvent of methyl ethyl ketone and toluene being especially preferred. The mixing ratio of the ketone solvent and the aromatic hydrocarbon solvent is discretionary, and may be set to a weight ratio of from 1:9 to 9:1, preferably from 6:4 to 9:1, and more preferably from 7:3 to 8:2.

The solids concentration of the slurry, although not particularly limited, is preferably from about 1 to about 50 wt %, and more preferably from about 30 to about 50 wt %.

[0030]

The slurry preparation method may be any wherein the carbonaceous material, each of the resins making up the resin binder, the curing accelerator that is optionally used, and the solvent are mixed together in any order. However, the method employed in the invention is preferably one in which the carbonaceous material is added and mixed into a mixture of each of the resins making up the resin binder, the curing accelerator that is optionally used and the solvent. Mixture may be carried out using the known mixers mentioned above.

The slurry coating method is not particularly limited and may be suitably selected from among known methods, such as spin coating, dipping, flow coating, inkjet printing, jet dispensing, spraying, bar coating, gravure coating, roll coating, transfer printing, brush coating, blade coating and air knife coating.

The solvent removal temperature varies depending on the solvent used and thus cannot be strictly specified. Also,

this must be a lower temperature than the temperature at which the thermoset resin begins to cure, and can generally be set to from room temperature to about 150°C, and more preferably from about 50°C to about 130°C.

5 Prior to heating for solvent removal, the slurry may be pre-dried at from room temperature to about 80°C.

[0031]

The surface of the separator thus obtained may be subjected to an existing hydrophilizing treatment such as
10 blasting, plasma treatment, corona discharge treatment, flame treatment or UV treatment.

In addition, it is possible to lower the surface resistance of the separator by carrying out surface treatment in which the separator is irradiated with a laser to remove
15 the resin components from the surface layer of the separator.

[0032]

The separator of the invention generally has a suitable flexibility characterized by a flexural strain of about 0.65 to 1.5% and a flexural stress of about 25 to 50 MPa, and
20 has gas barrier properties characterized by a gas permeability coefficient of not more than about 9.0×10^{-10} mol·m/m²·sec·MPa. Depending on the composition, the separator may be one having a good gas permeability coefficient of not more than 3.0×10^{-10} mol·m/m²·sec·MPa.

25 With regard to other separator characteristics, the inventive separator has an electrical conductivity such that the volume resistivity is not more than about 40 mΩ·cm, a heat resistance such that the glass transition temperature is at least about 120°C, and a durability such that the weight
30 change in a hot-water immersion test is not more than about 2.0 wt %. Depending on the composition, the separator may be one having a good electrical conductivity such that the volume resistivity is not more than 25 mΩ·cm, and a good heat resistance and durability such that the glass transition
35 temperature is at least 140°C and the weight change in a hot-water immersion test is not more than about 1.4 wt %.

EXAMPLES

[0033]

The invention is illustrated more concretely below by way of Examples and Comparative Examples, although these
5 Examples are not intended to limit the invention.

Evaluations of various properties in the following Examples were carried out under the testing standards and conditions shown below.

[1] Volume Resistivity

10 Measurement was carried out using 100 mm (L) × 100 mm (W) × 0.8 mm (T) test specimens and in accordance with JIS K 7194.

[2] Glass Transition Point

15 Measurement was carried out with a dynamic mechanical analyzer (DMA, available from Hitachi High-Tech Science Corporation) and using 20 mm (L) × 10 mm (W) × 0.8 mm (T) test specimens.

[3] Weight Change in Hot-Water Immersion

20 A 50 mm (L) × 50 mm (W) × 0.8 mm (T) test specimen was placed in a stainless steel pressure vessel containing 300 mL of deionized water, and the percent change in weight following a 75-hour test at 150°C was measured.

[4] Gas Permeability Test

25 Using circular test specimens having a thickness of 800 μm and a diameter of 44 mm, the hydrogen permeability coefficient was measured at a gas pressure of 2 kgf/cm² (196 kPa) and 25°C in accordance with JIS K 7126-1 (Differential-pressure method).

[5] Flexural Testing

30 Using 20 mm (L) × 25 mm (W) × 0.8 mm (T) test specimens, the flexural strain and flexural stress at 25°C were measured in accordance with JIS K 7171 at a test rate of 1 mm/min and a span between support points of 16 mm.

[0034]

The materials used in the Examples and Comparative Examples are shown below.

5 [Resin Binder: Thermoplastic Elastomer]

Examples 1 to 3

A styrene-isobutylene-styrene block copolymer (SIBSTAR 103T, available from Kaneka Corporation)

Comparative Example 2

10 A hydrogenated styrene-ethylene-butylene-styrene block copolymer (Tuftec H1041, available from Asahi Kasei Chemicals Corporation)

[Resin Binder: Thermoset Resin]

15 Examples 1 to 3

A hydrogenated bisphenol A-type epoxy resin (jERYX-8000, available from Mitsubishi Chemical Corporation) and a novolak-type phenolic resin (Shonol BRG-556, available from Showa Denko K.K.) combined in an equivalent ratio.

20 Comparative Example 1

A cresol novolak-type epoxy resin (Epotohto YDCN-700-10, available from Nippon Steel & Sumikin Chemical Co., Ltd.) and a phenol novolak resin (Shonol BRG-556, available from Showa Denko K.K.) combined in an equivalent ratio.

25

[Resin Binder: Compatibilizer]

A maleic anhydride-modified hydrogenated styrene-ethylene-butylene-styrene block copolymer (Tuftec M1913, available from Asahi Kasei Chemicals Corporation)

30

[Carbonaceous Material]

A material obtained by mixing the natural graphite BF-30 (Shin-Etsu Chemical Co., Ltd.) and Mitsubishi Carbon

Black #3050B (Mitsubishi Chemical Corporation) in a 90:10 weight ratio.

[Curing Accelerator]

- 5 An imidazole-type curing accelerator (Curezol™ C11z, available from Shikoku Chemicals Corporation)

[0035]

[Examples 1 to 3]

- 10 The resin binder and the curing accelerator were mixed in the respective weight ratios shown in Table 1 and the mixture was charged into a planetary mixer containing a mixed solvent of toluene and methyl ethyl ketone (toluene : methyl ethyl ketone = 70:30 (weight ratio)), then stirred to effect
15 dissolution, giving a resin solution having a solids content of 20 wt %. The carbonaceous material was charged into this resin solution in the weight ratio shown in Table 1, followed by additional stirring, thereby giving a slurry solution.

- Next, this slurry solution was coated as a sheet onto a
20 release film with a Comma Coater™ R-FC (available from Hirano Tecseed Co., Ltd.) and dried at 65°C for one hour, following which the temperature was raised to 120°C over a period of one hour, removing the solvent within the sheet and thereby giving a sheet-like fuel cell separator precursor (thickness, 760 to
25 790 μm).

- The resulting precursor was placed in a 400×160 mm mold, where it was compression-molded at a mold temperature of 100°C, a molding pressure of 285 kg/cm² (2.79 MPa) and a molding time of 30 minutes and thermally cured at 175°C for 1 hour, thereby
30 giving a molded plate having gas flow channels.

Next, the entire surface of the resulting molded plate was subjected to surface-roughening treatment by air blasting, at a pressure of 0.25 MPa, with alumina abrasive grit having a
5 particle size of 20 μm , thereby giving a fuel cell separator. The resulting fuel cell separator had a flexibility such that it did not break even when folded as shown in FIGS. 1 to 3.

[0036]

[Comparative Example 1] Composition Lacking Thermoplastic Elastomer

Using a thermoset resin, carbonaceous material and curing accelerator in the weight ratio shown in Table 1, a fuel cell separator precursor and a fuel cell separator were obtained in the same way as in Example 1. The resulting fuel cell separator, as shown in FIG. 4, broke when folded and thus lacked flexibility.

10 [0037]

[Comparative Example 2]

Using a thermoplastic elastomer and carbonaceous material in the weight ratio shown in Table 1, a fuel cell separator precursor and a fuel cell separator were obtained in the same way as in Example 1.

[0038]

Various properties of the separators obtained in each of the above Examples and Comparative Examples were measured and evaluated. The results are presented together in Table 1.

20 [0039]

[Table 1]

		Example			Comparative Example	
		1	2	3	1	2
Resin binder	Thermoplastic elastomer	54	45	54		200
	Thermoset resin	80	100	80	200	
	Compatibilizer	66	55	66		
Carbonaceous material		600	600	800	600	600
Curing accelerator		2	2	2	2	-
Moldability		good	good	good	good	good
Volume resistivity (mΩ·cm)		19.0	23.7	15.4	13.5	82.5
Glass transition point (°C)		146	146	148	212	109
Weight change in hot water immersion test (wt %)		1.2	1.2	1.0	0.4	1.5
Gas permeability coefficient (mol·m/m ² ·sec·MPa)		1.9×10 ⁻¹⁰	2.1×10 ⁻¹⁰	1.5×10 ⁻¹⁰	6.7×10 ⁻¹¹	3.1×10 ⁻⁹
Three-point flexural tests	Flexural strain (%)	0.94	1.03	0.82	0.61	1.98
	Flexural stress (MPa)	35.3	39.5	33.1	71.3	16.3

[0040]

As is apparent from Table 1, each of the fuel cell separators obtained in Examples 1 to 3 had a good flexibility, good durability and good gas barrier properties, in addition
5 to which the other separator characteristics were adequate for enabling the separator to endure practical use.

By contrast, the separator obtained in Comparative Example 1 possessed adequate characteristics, but had a high rigidity (poor flexibility) and was prone to cracking at a
10 reduced thickness.

The separator in Comparative Example 2 had sufficient flexibility and was not prone to cracking even at a reduced thickness. However, not only were the separator characteristics far inferior, because the separator was too
15 soft, there was a possibility of the channel geometry being crushed by the pressure applied to the separator during stacking.

CLAIMS:

1. A fuel cell separator obtained by molding a composition comprising a carbonaceous material and a resin binder, the resin
5 binder comprising a thermoset resin, a thermoplastic elastomer (A), and a compatibilizer,

wherein the thermoset resin is at least one selected from the group consisting of phenolic resins, epoxy resins, furan resins, urea resins, melamine resins, polycarbodiimide resins, silicone
10 resins, and benzoxazine resins, and

wherein the compatibilizer is an acid-modified thermoplastic elastomer that is different from the thermoplastic elastomer (A).

2. The fuel cell separator of claim 1, wherein the
15 thermoplastic elastomer (A) comprises a styrene thermoplastic elastomer.

3. The fuel cell separator of claim 2, wherein the styrene thermoplastic elastomer is a hydrogenated styrene thermoplastic
20 elastomer.

4. The fuel cell separator of claim 3, wherein the hydrogenated styrene thermoplastic elastomer is a side chain-bearing hydrogenated styrene thermoplastic elastomer.

25 5. The fuel cell separator of claim 4, wherein the side chain-bearing hydrogenated styrene thermoplastic elastomer is a block copolymer comprising a side-chain-bearing polyolefin polymer block and a styrene polymer block.

30

6. The fuel cell separator of any one of claims 1 to 5, wherein the acid-modified thermoplastic elastomer is a maleic anhydride-modified hydrogenated styrene-ethylene-butylene-styrene block copolymer.

5

7. A method for producing a fuel cell separator, the method comprising the steps of:

preparing a slurry by mixing together a carbonaceous material, a thermoset resin, a thermoplastic elastomer, a compatibilizer and
10 a solvent, wherein the thermoset resin is at least one selected from the group consisting of phenolic resins, epoxy resins, furan resins, urea resins, melamine resins, polycarbodiimide resins, silicone resins, and benzoxazine resins, and wherein the compatibilizer is an acid-modified thermoplastic elastomer;

15 coating the slurry onto a surface;

removing the solvent to form a sheet-like separator precursor;
and

molding the separator precursor, and thermally curing the molded separator precursor,

20 wherein the removing the solvent is performed by heating at a lower temperature than the temperature at which the thermoset resin begins to cure.

FIG.1

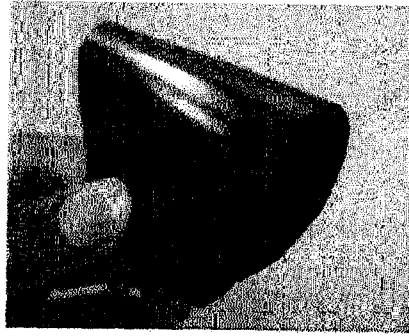


FIG.2

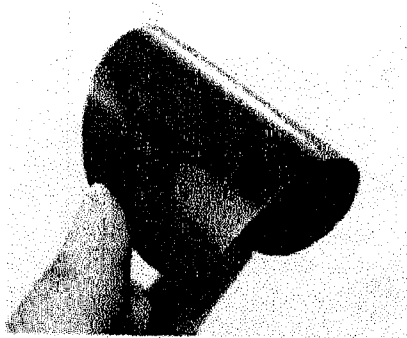


FIG.3

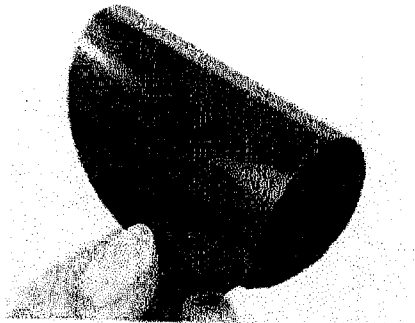


FIG.4

