



(12) **DEMANDE DE BREVET CANADIEN**
CANADIAN PATENT APPLICATION

(13) **A1**

(22) Date de dépôt/Filing Date: 2019/04/09

(41) Mise à la disp. pub./Open to Public Insp.: 2020/06/04

(30) Priorité/Priority: 2018/12/04 (US62/656,547)

(51) Cl.Int./Int.Cl. *E03D 9/052* (2006.01)


(71) Demandeur/Applicant:
VENTEX INDUSTRIES, LTD., CA

(72) Inventeur/Inventor:
NELSON, DAVID, CA

(74) Agent: FURMAN IP LAW & STRATEGY PC

(54) Titre : TOILETTES VENTILEES AMELIOREES

(54) Title: IMPROVED VENTILATED TOILET

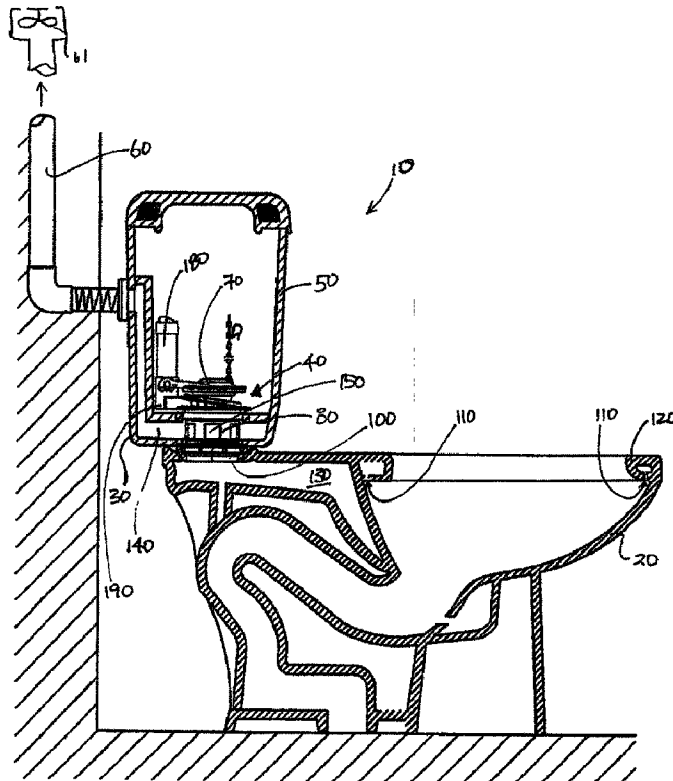

(57) **Abrégé/Abstract:**

This invention relates to a ventilated toilet system for removing obnoxious odors from the toilet bowl and includes integral vent channels formed along the base and the back inside of the water tank, and a vent adapter mounted inside the passage that directs

(57) **Abrégé(suite)/Abstract(continued):**

the flow of ventilating air along the vent channels to an exhaust pipe and discharges it by a remote in- line exhaust fan to the outside atmosphere. The adapter is attached to the base of the overflow flush valve pipe or, conversely, designed to be an integral part of the overflow flush value pipe, itself, and is positioned to connect the base vent channel of the water tank to the toilet water inlet chamber of the bowl for passage of ventilating air, and to connect the overflow flush valve pipe to the water inlet chamber for passage of flush water.

Abstract

This invention relates to a ventilated toilet system for removing obnoxious odors from the toilet bowl and includes integral vent channels formed along the base and the back inside of the water tank, and a vent adapter mounted inside the passage that directs the flow of ventilating air along the vent channels to an exhaust pipe and discharges it by a remote in-line exhaust fan to the outside atmosphere. The adapter is attached to the base of the overflow flush valve pipe or, conversely, designed to be an integral part of the overflow flush value pipe, itself, and is positioned to connect the base vent channel of the water tank to the toilet water inlet chamber of the bowl for passage of ventilating air, and to connect the overflow flush valve pipe to the water inlet chamber for passage of flush water.

IMPROVED VENTILATED TOILET

Field of the Invention

Embodiments of the present invention generally relate to toilets and more particularly toilets that are ventilated to remove odors.

Background

The tendency in recent years towards closed rooms with air conditioning has brought about a change in the location of bathrooms, particularly in apartments, town houses, motels and hotels. Typically, in the past, bathrooms were often placed on an outside wall for ventilation to be obtained by means of a window. Recent designs to buildings places bathrooms within an interior of a building or living space in order to permit other living areas to be placed adjacent an exterior wall of the building or house, thus increasing the desirability of the living space. For those bathrooms placed within an interior space of a building or a living space, ventilation of odors from the bathroom is most often achieved by ceiling ventilation systems. That is, a ceiling vent sucks out air from the bathroom, through a conduit, and vents or exhausts bathroom air into the atmosphere. Accordingly, there is an increasing need for improved ventilation of the modern bathroom over the inefficient conventional method of ceiling vents.

Various types of devices for ventilating toilet bowls have been proposed and can be categorized into several groups according to their construction and mode of operation. A

number of devices exist where the ventilation system is attached to the seat, is a part of the seat, or is built into the seat itself. Typical of these include: U.S. Patent No. 4,620,329, which discloses a toilet having an internal channel in the seat for the conveyance of air through hollow hinge mechanisms; and U.S. Patent No. 4,094,023, which discloses a toilet seat having a perforated suction tube attached on the underside and an exhaust tube running down that extends into the bowl. These ventilation systems can cause a sanitary problem due to the presence of baffles, channels and openings along the underside of the seat and/or tubing located in the bowl which present a breeding ground for bacteria.

Other devices exist in which the ventilation system is formed in the toilet bowl independent of the water tank, and these require reconstruction of the bowl itself as in U.S. Patent Nos. 3,938,201 and 4,222,129. Once again unsanitary conditions are present.

Still other systems exist which are attached to the toilet bowl or hung on the side thereof such as in U.S. Patent No. 4,317,242. These designs result in either an inconvenient or hazardous condition.

There are ventilating devices where the ventilation is achieved through the overflow pipe, such as is exhibited in U.S. Patent Nos. 4,232,406, 4,165,544 and 3,495,282. These inventions all suffer from insufficient airflow volume to adequately ventilate the toilet.

Ventilating devices also exist that are positioned between the seat and the toilet bowl as exhibited in U.S. Patent Nos. 3,069,696 and 4,402,091. These devices suffer from safety and sanitation problems due to the additional tubing and vents.

A few designs provide a ventilating system by adding a vent adapter between the

toilet bowl and the water tank, all in communication with one another, as exhibited in U.S. Patent Nos. 2,777,137, 3,230,552 and U.S. Pat. No. 4,494,255. Because the vent adapter is not an integral part of either the toilet bowl or the water tank, the device itself, as well as the crevices formed by the planes of connection, once again pose sanitation hazards and/or air flow constraints. Also, this exposed vent adapter is unsightly.

U.S. Patent No. 2,351,560 uses a vent adapter positioned in the water inlet connecting the closet to the bowl but requires a major structural change in the configuration of the water tank to house a suction fan and motor assembly, and the motor wiring creates an electrical hazard.

In U.S. Patent No. 4,989,276, a ventilated odorless toilet was disclosed comprising a toilet bowl having apertures along a bottom rim of the toilet for drawing odors from the toilet. The drawn odors were directed along a plurality of ventilation conduits within the water tank. The plurality of ventilations conduits were fluidly connected to a ventilation pipe or conduit disposed within the walls of the building and fluidly connected to a vent or exhaust opening in an exterior wall. The drawn odors are directed through the pipes and eventually exhausted into the atmosphere.

In general, the above ventilation systems have one or more of the following problems: inadequate sanitation, unsightly appearance, physical obstruction, electrical shock hazard, lack of plumbing code compliance and/or expense.

An objective of this invention is to provide a practical, durable, simple, inexpensive, and sanitary system of eliminating unwanted odors from the bathroom in an energy efficient manner that can be adapted to work with toilets already installed in buildings. Energy loss is

additionally minimized by providing a relatively short interval of exhaust fan operation as compared to the prolonged usage of a less efficient bathroom fan.

Summary of the Invention

An improved ventilated toilet can comprise a toilet bowl having flush water apertures spaced around the inner periphery of the toilet bowl rim of a conventional stool type toilet can be used to draw off odors in the opposite direction of water flow. These odors then pass through a tank vent channel that is placed between the toilet bowl and the water tank. The tank vent channel is fluidly connected to a ventilation conduit which can be fluidly connected to the outside atmosphere. The tank vent channel and the water tank are fluidly sealed to one another using a rubber gasket and a flush valve having enlarged vent channels.

A flapper valve can be adapted to work cooperatively with the flush valve and a trip lever can be adapted to work cooperatively with the flapper valve.

Once the odors pass through the vent channel in the base of the water tank, the air flow proceeds up a vent channel provided along the back of the water tank and out through an opening port in the back of the tank that in turn communicates with a vent pipe having an in-stream exhaust fan mounted at a remote location.

Thus, in some embodiments, the invention provides an improved ventilated toilet, comprising: a water tank, the water tank configured to contain a volume of water that can be released by a user; bowl, wherein the bowl comprises a water inlet chamber, and at least one water channel, the water inlet chamber and the at least one water channel being fluidly connected

to the water tank and configured to channel water into the bowl when the volume of water in the water tank is released by the user, and to provide an conduit for odors present in the bowl to be removed from the bowl; a ventilation conduit, the ventilation conduit providing a passage for odors present in the toilet to be removed from the bowl to the atmosphere outside an enclosure in which the ventilated toilet is situated; wherein the water tank further comprises: a fluid chamber, the fluid chamber configured to hold the volume of water; a vent channel, the vent channel comprising a ventilation cavity, the ventilation cavity configured to provide a conduit between the bowl and the ventilations conduit, operative to remove odors present in the ventilated toilet; a first valve, the first valve secured to the fluid chamber and moveable between a closed position and an open position, such that when the first valve is in the closed position, the volume of water in the fluid chamber is substantially prevented from flowing into the bowl, and wherein when the first valve is in the open position substantially the entire volume of water in the water tank is released into the bowl; a second valve, the second valve providing a fluid connection between the first valve and the bowl, and further providing atmospheric communication of the bowl with the vent channel and ventilation conduit; an actuator, the actuator comprising a trip lever configured to move the first valve from the closed position to the open position, thereby permitting water to be released from the water tank into the bowl.

In some embodiments, the first valve comprises a flapper valve, the flapper valve moveable from the closed position to the open position by the actuator, and wherein the flapper valve returns to the closed position in response to gravity as the water in the fluid chamber is released into the water inlet chamber.

In some embodiments, the second valve further comprises at least one vent, the at least one vent in atmospheric communication with the ventilation cavity and the bowl.

In some embodiments, the second valve further comprises a gasket, the gasket operative to secure the second valve to the water inlet channel.

In some embodiments, the ventilation conduit further comprises a fan, the fan operative to draw odors from the bowl through the ventilation conduit and to expel the odors into the atmosphere outside the enclosure in which the ventilated toilet is situated. In some embodiments, the fan is configured to operate continuously.

In some embodiments, the fan is activated directly by a user. In some embodiments, the fan is activated by movement of the actuator. In some embodiments, the actuator further comprises a timer operative to stop the operation of the fan after a pre-determined period of time.

In some embodiments, odors are substantially removed from the bowl at a flow rate of 1.6 gallons per flush. In some embodiments, odors are substantially removed from the bowl at a flow rate of 1.3 gallons per flush. In some embodiments, odors are substantially removed from the bowl at a flow rate of 0.8 gallons per flush.

Brief Description of the Drawings

While the invention is claimed in the concluding portions hereof, preferred embodiments are provided in the accompanying detailed description which may be best understood in conjunction with the accompanying diagrams where like parts in each of the several diagrams are labeled with like numerals, and where:

Fig. 1 is a side cross-sectional view of an embodiment of the present invention illustrating a

siphon bowl, a tank vent channel, a water tank, flush valve, and a flapper valve;

Fig. 2 is an enlarged side cross-sectional view of the tank vent channel of Fig. 1;

Fig. 3a is an enlarged side perspective view of the flapper valve and the flush valve of Fig. 1;

Fig. 3b is side view of the flapper valve and the flush valve of Fig. 3a;

Fig. 3c is a plan view of the flapper valve and the flush valve of Fig. 3a;

Fig. 4a is an enlarged side perspective view of an embodiment of the present invention illustrating a rubber gasket for sealing the tank vent channel to the toilet bowl and water tank of Fig. 1;

Figure 4b is a side cross-sectional view of the rubber gasket of Fig. 4a;

Fig. 4c is a plan view of the rubber gasket of Fig. 4a;

Fig. 5a is a side perspective view of an embodiment of the present invention illustrating a trip lever for use with the flapper valve of Fig. 1;

Fig. 5b is a side view of the trip lever of Fig 5a;

Fig. 5c is a plan view of the trip lever of Fig. 5a; and

Fig. 5d is a rear view of the trip lever of Fig. 5a.

Detailed Description of the Invention

With reference to Fig 1, an embodiment of the present invention comprises an ventilated toilet bowl **10** comprising a bowl **20**, a tank vent channel **30**, connecting means **40** for sealingly and fluidly connecting a water tank **50** to the bowl **20**, and conduit means for fluidly connecting the tank vent channel **30** to a ventilation conduit **60**. The bowl **20** can be adapted to be secured to a floor using known techniques, such as a base flange (not shown). The ventilated toilet provides an advantage over prior art apparatus in that it draws odors from the toilet and removes them to the atmosphere outside the enclosure where the toilet is situated.

To ensure that the water tank **50**, the tank vent channel **30** and the bowl **20** are all fluidly sealed together, connecting means **40** can be used. In one embodiment, and as shown in Fig. 1, the connecting means **40** can comprise a flapper valve **70** operatively connected to a flush valve **80** having enlarged vent channels **150**.

As shown, the flapper valve **70** is positioned within the water tank **50** and is operatively connected to the flush valve **80** which spans the width of the tank vent channel **30** to extend into the bowl **20**. A rubber gasket **100** can be used to secure and seal the flush valve **80** to the bowl **20**, and fluidly connect the bowl **20** to the vent channel **30** and the water tank **50**.

The bowl **20** further comprises at least one water channels **110**, which in some embodiments can be located along an underside of the top circumferential ring **120** of the bowl **20**. In action, the flushing of the toilet typically causes water from the water tank **50** to flow through the connecting means **40** and into a water inlet chamber **130** and into the bowl **20** through the plurality of water channels **110**.

The water channels **110** can also serve to function as vent apertures for odors within the

bowl **20** to be exhausted through the water inlet chamber **130**. As the odors collect within the water inlet chamber **130**, the odors pass through the flush valve **80** of the connecting means **40** and are directed into a ventilation cavity **140** of the vent channel **30** through enlarged vents **150**.

The enlarged vents **150**, are effective to permit operation of the system both with older versions of toilet installations, as well as with low flow and High Efficiency Toilet (HET) configurations that are designed to operate with reduced water volume per flush. For example, embodiments of the present system are effective to remove odors in toilet systems with flows of 1.6 gallons per flush (GPF), or lower. In some embodiments, the system is effective to remove odors in toilet installations with flows of about 1.3 GPF or lower. In some embodiments, the system is effective to remove odors in toilet installations with flows of 0.8 GPF or lower.

With reference to Fig. 2, the vent channel **30** has an opening **160** adjacent a top portion thereof which can be adapted to fluidly connect the ventilation cavity **140** to a pre-existing ventilation conduit **60**.

The ventilation conduit **60** can be fluidly connected to the outside atmosphere using known techniques and also include a fan **61** to encourage and/or ensure consistent ventilation of odors from the toilet **10** and their movement to the atmosphere outside the enclosure where the toilet is situated.

Figures 3a to 3c illustrate the connecting means **40** in greater detail. As shown, the flapper valve **70** is adapted to be secured to a bottom portion of the water tank **50** by threaded connection to the flush valve **80**, which extends the width of the vent channel **30**. Applicant notes that the enlarged vents **150** of the flush valve **80** are aligned within the ventilation cavity **140** of the vent channel **30**. As shown, a bottom portion of the flush valve **80** extends beyond the

vent channel **30** and is positioned with the water inlet channel **130** and secured thereto by a rubber gasket **100**.

Embodiments of the rubber gasket **100** are shown in Figs 4a to 4c.

Figs 5a to 5d, inclusive, illustrate an embodiment of a trip lever **170** that can be adapted to be used with any pre-existing water tank. Referring back to Fig. 1, the trip lever **170** is operatively connected to a fill valve **180** that is fluidly connected to a water intake **190** along a bottom surface of the water tank **50** and operatively connected to the flapper valve **70**. By pushing down on the trip lever **170**, the flapper valve **70** is caused to be opened, allowing the water stored within the water tank **50** to escape through the connecting means **40** and into the bowl **20**.

When the toilet is not being flushed, any odors within the bowl **20** passes through the water channels **110**, into the water inlet chamber **130**, through the enlarged vents **150** and into the ventilated cavity **140**. From there a fan **61** will cause the odors to be fluidly moved through the ventilation conduit **60** and into the outside atmosphere.

In some embodiments, the fan can be configured to run continuously. In other cases, it may be desirable to activate the fan only when the ventilated toilet is in use, and possibly for a period of time afterwards. In this case the apparatus could include a switching mechanism to allow a user to turn the fan on and off as desired. In still other embodiments, operation of the fan may be link to the actuator assembly, such that when the toilet is flushed the fan is automatically started. In these cases, the system might also include a timer to turn the fan off again after a pre-determined length of time.

It will be recognized that the specific materials used in constructing the various components of the system described herein, are not considered to be limiting to the scope of the invention. Those of skill in the art will readily recognize and, be able to, select materials and components that will accomplish the objectives of the invention without requiring any inventive skill. It should also be apparent to those skilled in the art that many more modifications besides those already described are possible without departing from the inventive concepts herein. The inventive subject matter, therefore, is not to be restricted except in the scope of the appended claims.

Moreover, in interpreting both the specification and the claims, all terms should be interpreted in the broadest possible manner consistent with the context. In particular, the terms “comprises” and “comprising” should be interpreted as referring to elements, components, or steps in a non-exclusive manner, indicating that the referenced elements, components, or steps may be present, or utilized, or combined with other elements, components, or steps that are not expressly referenced.

Any reference or depiction of dimensions or relationships of the sizes of components of the system described herein are merely for illustrative purposes and are not to be construed as limiting in any way to the scope of the invention.

Claims

1. An improved ventilated toilet, comprising:

a water tank, the water tank configured to contain a volume of water that can be released by a user;

a bowl, wherein the bowl comprises a water inlet chamber, and at least one water channel, the water inlet chamber and the at least one water channel being fluidly connected to the water tank and configured to channel water into the bowl when the volume of water in the water tank is released by the user, and to provide an conduit for odors present in the bowl to be removed from the bowl;

a ventilation conduit, the ventilation conduit providing a passage for odors present in the toilet to be removed from the bowl to the atmosphere outside an enclosure in which the ventilated toilet is situated;

wherein the water tank further comprises:

a fluid chamber, the fluid chamber configured to hold the volume of water;

a vent channel, the vent channel comprising a ventilation cavity, the ventilation cavity configured to provide a conduit between the bowl and the ventilations conduit, operative to remove odors present in the ventilated toilet;

a first valve, the first valve secured to the fluid chamber and moveable between a closed position and an open position, such that when the first valve is in the closed position, the volume of water in the fluid chamber is substantially prevented from

flowing into the bowl, and wherein when the first valve is in the open position substantially the entire volume of water in the water tank is released into the bowl;

a second valve, the second valve providing a fluid connection between the first valve and the bowl, and further providing atmospheric communication of the bowl with the vent channel and ventilation conduit;

an actuator, the actuator comprising a trip lever configured to move the first valve from the closed position to the open position, thereby permitting water to be released from the water tank into the bowl.



2. The ventilated toilet of claim 1, wherein the first valve comprises a flapper valve, the flapper valve moveable from the closed position to the open position by the actuator, and wherein the flapper valve returns to the closed position in response to gravity as the water in the fluid chamber is released into the water inlet chamber.




3. The ventilated toilet of claim 1, wherein the second valve further comprises at least one vent, the at least one vent in atmospheric communication with the ventilation cavity and the bowl.

4. The ventilated toilet of claim 1, wherein the second valve further comprises a gasket, the gasket operative to secure the second valve to the water inlet channel.

5. The ventilated toilet of claim 1, wherein the ventilation conduit further comprises a fan, the fan operative to draw odors from the bowl through the ventilation conduit and to expel the odors into the atmosphere outside the enclosure in which the ventilated toilet is situated.
6. The ventilated toilet of claim 5, wherein the fan is configured to operate continuously.
7. The ventilated toilet of claim 5, wherein the fan is activated directly by a user.
8. The ventilated toilet of claim 5, wherein the fan is activated by movement of the actuator.
9. The ventilated toilet of claim 8, wherein the actuator further comprises a timer operative to stop the operation of the fan after a pre-determined period of time.
10. The ventilated toilet of claim 1, wherein odors are substantially removed from the bowl at a flow rate of 1.6 gallons per flush.
11. The ventilated toilet of claim 1, wherein odors are substantially removed from the bowl at a flow rate of 1.3 gallons per flush.

12. The ventilated toilet of claim 1, wherein odors are substantially removed from the bowl at a flow rate of 0.8 gallons per flush

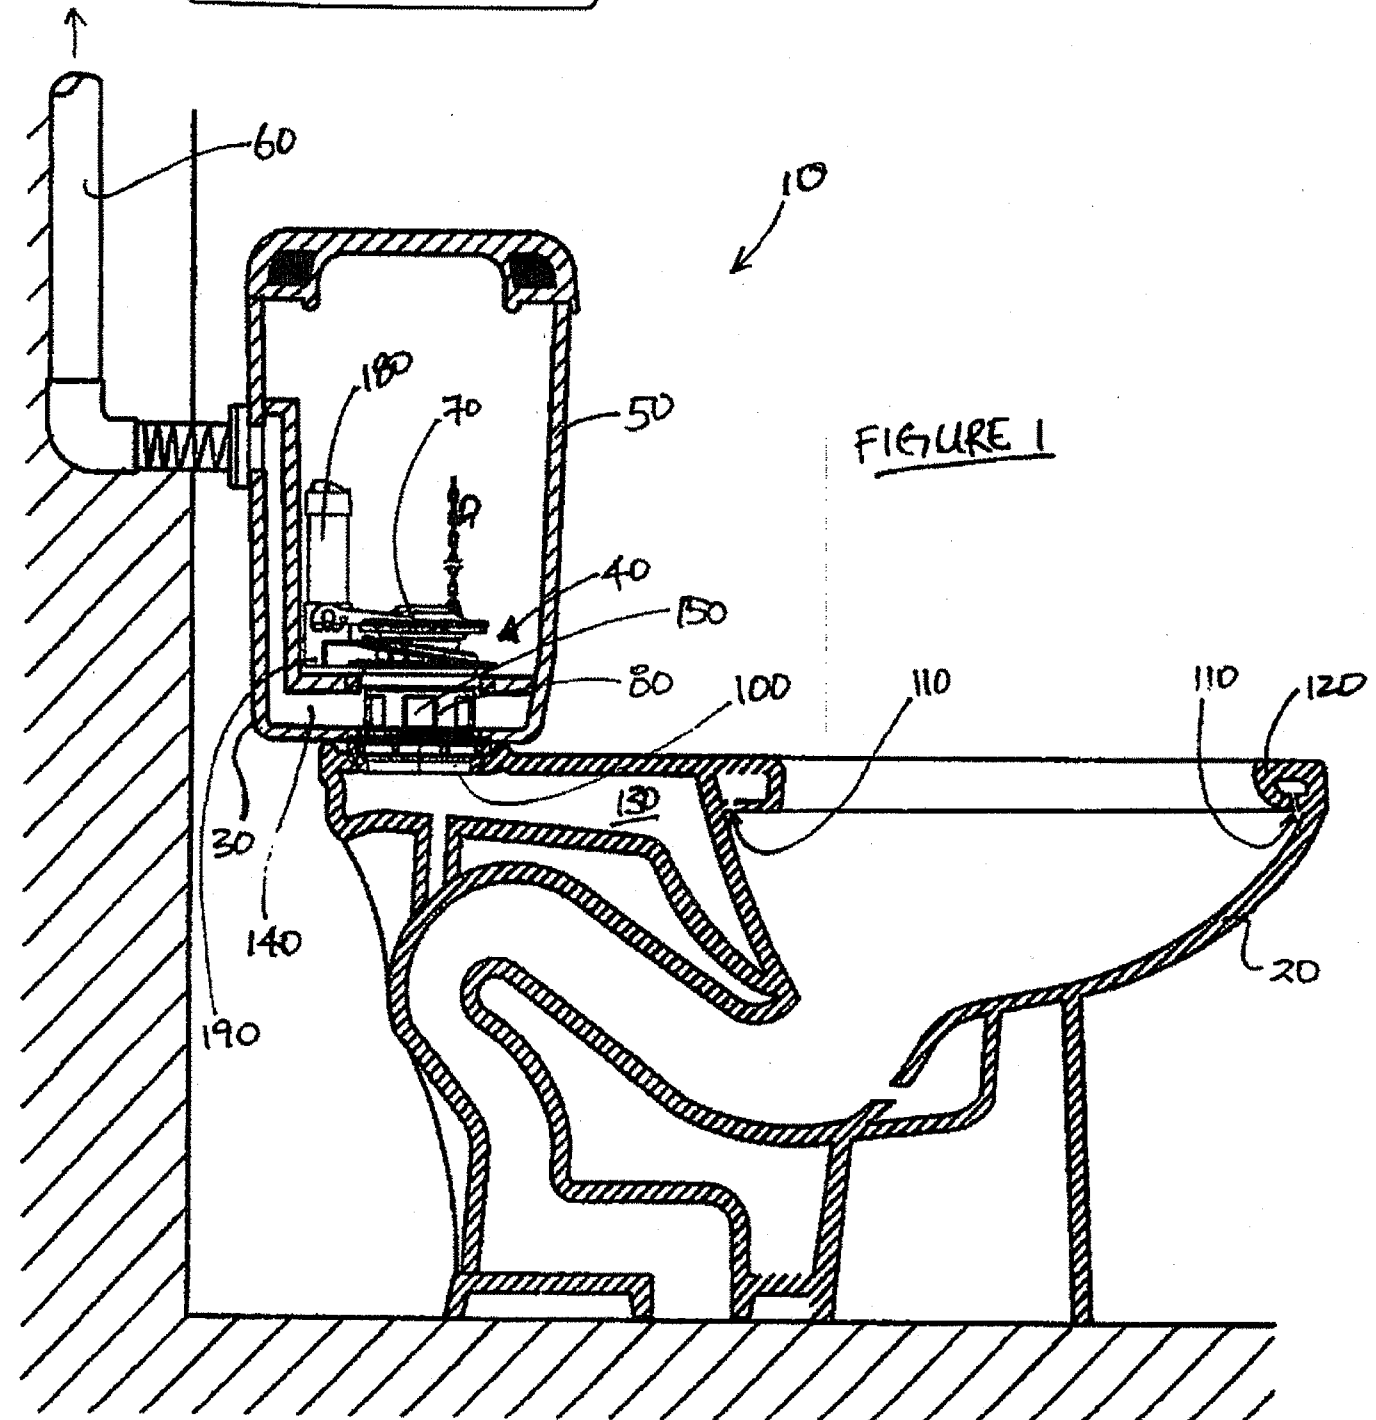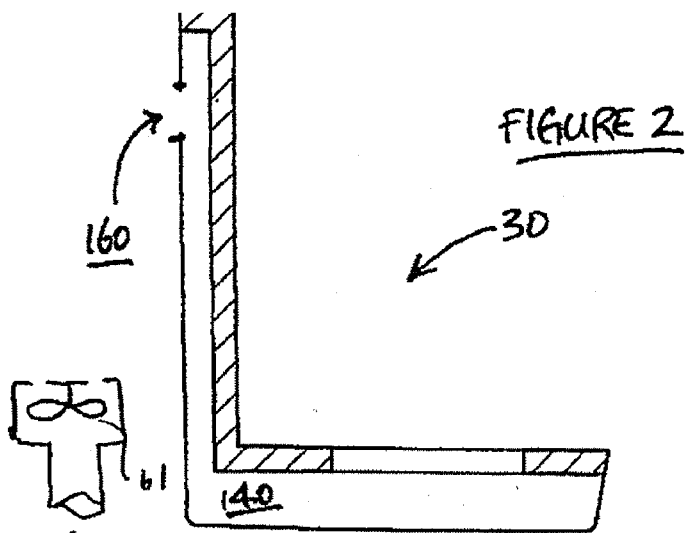

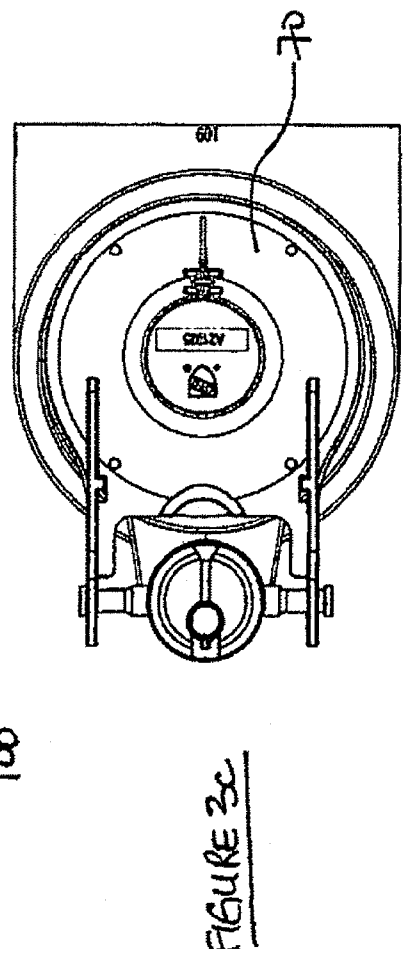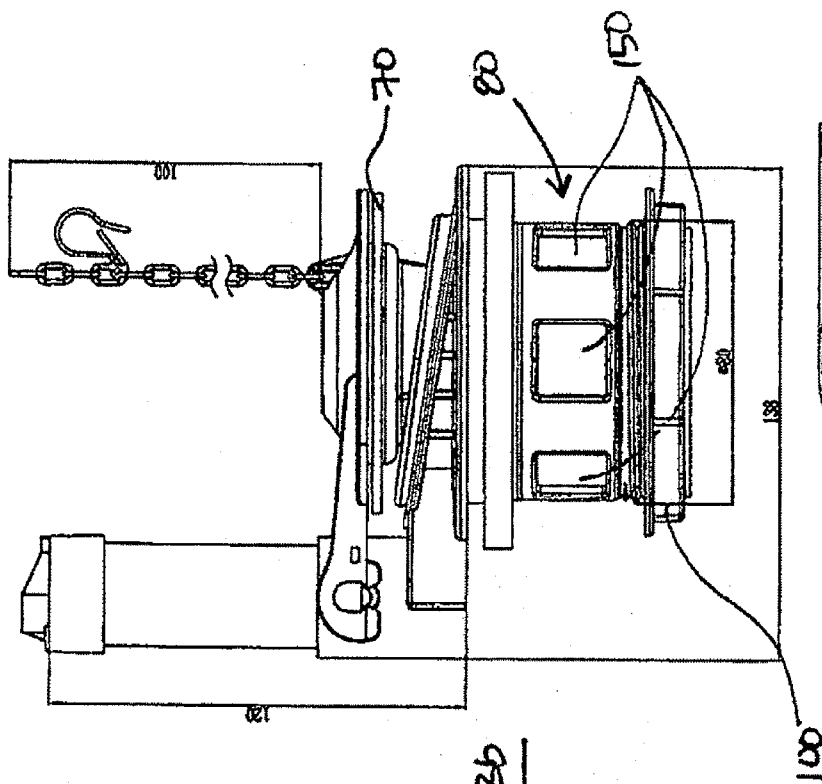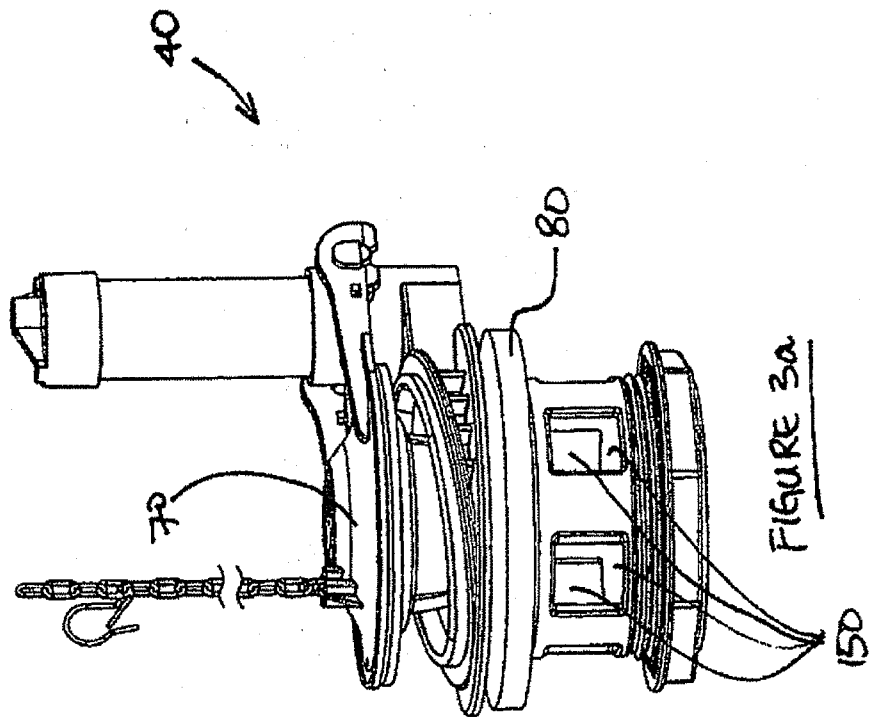

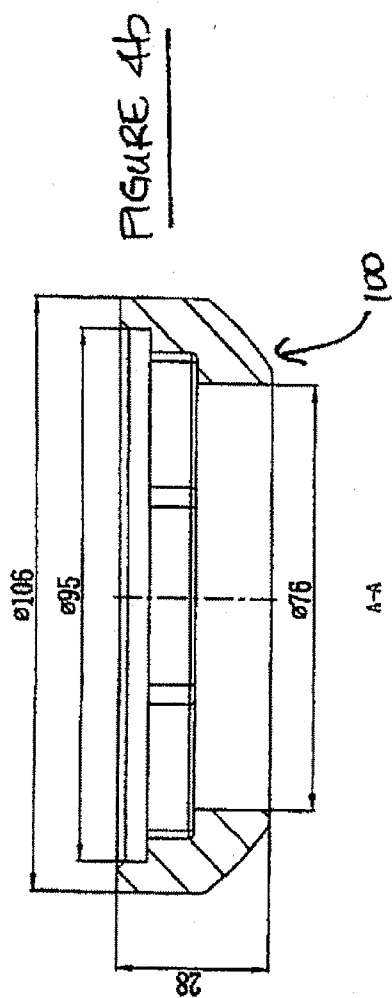


FIGURE 4b

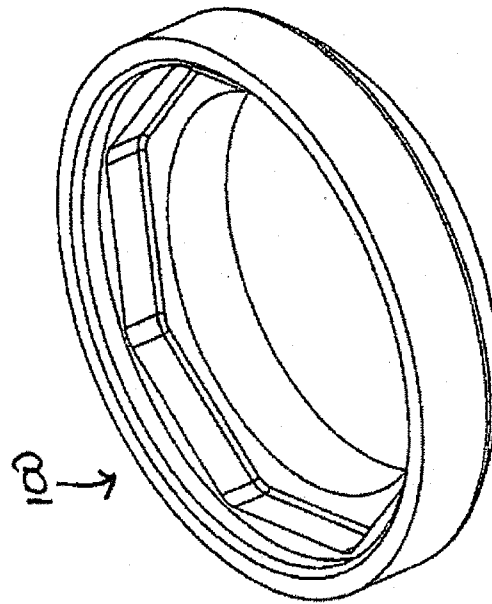


FIGURE 4a

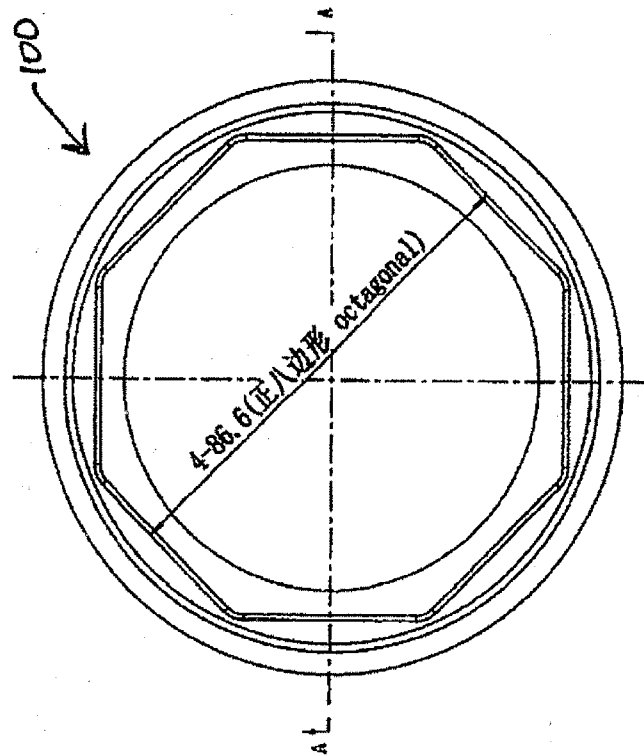


FIGURE 4c

