



(22) Date de dépôt/Filing Date: 2018/12/28

(41) Mise à la disp. pub./Open to Public Insp.: 2019/09/30

(45) Date de délivrance/Issue Date: 2021/01/19

(30) Priorité/Priority: 2018/03/30 (US62/650,598)

(51) Cl.Int./Int.Cl. *A47B 81/00* (2006.01),
A43D 117/00 (2006.01), *A47B 61/04* (2006.01)


(72) Inventeur/Inventor:
SINGH, MANDEEP MS, CA

(73) Propriétaire/Owner:
SINGH, MANDEEP MS, CA

(74) Agent: NA

(54) Titre : SYSTÈME DE DRAINAGE D'OBJETS MOUILLES SUR DES PLATEAUX SIMPLES ET DES PLATEAUX
MULTINIVEAUX

(54) Title: DRAINING SYSTEM FOR WET OBJECTS ON SINGLE AND MULTI LEVEL TRAYS

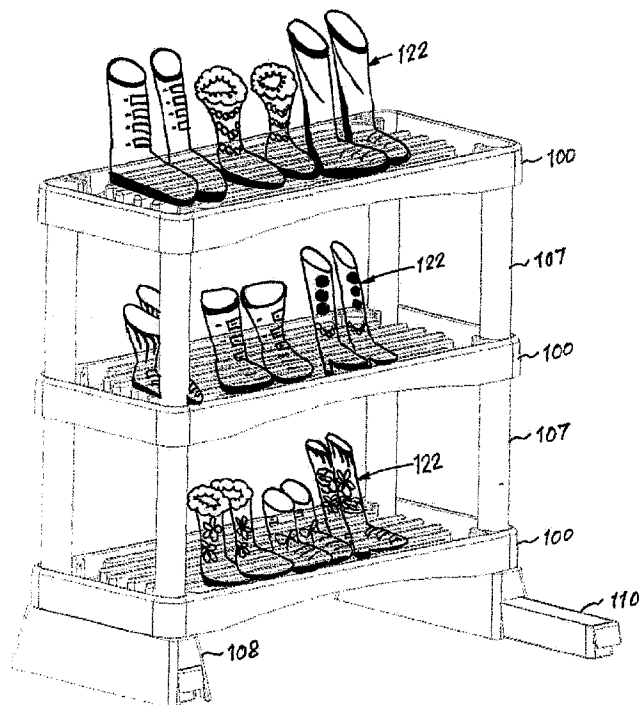

(57) Abrégé/Abstract:

A draining system comprising a single or multi-layer tray designed to store and dry wet objects like winter boots, rain boots or dishes that are placed on the tray. This system provides effective utilization of space to store wet objects. Water from the wet objects placed on the tray goes into waste collection bin which can easily be removed without disrupting the tray set-up to dispense waste water without creating a mess.

DRAINING SYSTEM FOR WET OBJECTS ON SINGLE OR MULTI LEVEL TRAYS

ABSTRACT

A draining system comprising a single or multi-layer tray designed to store and dry wet objects like winter boots, rain boots or dishes that are placed on the tray. This system provides effective utilization of space to store wet objects. Water from the wet objects placed on the tray goes into waste collection bin which can easily be removed without disrupting the tray set-up to dispense waste water without creating a mess.

DRAINING SYSTEM FOR WET OBJECTS ON SINGLE AND MULTI LEVEL TRAYS

BACKGROUND

[0001] In winter or in rainy season, snow or water gets on the boots that makes the indoors messy. Often, snow is mixed with dirt and salt and when it comes off the boots, it leaves residue on the floor which is difficult to clean. There are trays available, but they only are meant to contain the waste water and they become pool of waste water over time. By storing boots in such trays dirty water goes back on the floor with the boots. These trays do not address the mess issue effectively. Also, these trays take a lot of floor space. There is a need for a better boot storing system to dry the boots and increase usage of limited floor area to store boots.

SUMMARY

[0002] In accordance to first aspect of this invention the draining system comprises of one tray and a waste collection bin placed under the tray. The tray provides a surface to keep the wet objects and provides a passage for waste water to flow from the wet objects into the waste collection bin. The tray has a sloped base member and at least one drain hole. The slope of the base member can be a straight slope or a curved slope. The sloped surface of the base member is made in a way that when water falls on the surface it is directed towards the drain hole. Offset from this sloped surface of the base member there is another virtually flat surface above the sloped surface formed by top of the ribs originating from the sloped surface. This virtually flat surface is designed to receive wet objects. Due to the offset between the virtually flat surface and the bottom sloped surface, waste water from the wet object drips down from the virtually flat surface to the bottom sloped surface by gravity and then it is directed to the drain hole. The virtually flat surface and the bottom sloped surface can be made as one part or two separate parts. The tray is raised from the floor either by built-in feet or by separate feet, the feet makes room to put a waste collection bin under the drain hole of the tray. The waste collection bin receives waste water from the tray. The waste collection bin can be removed for emptying without disrupting the tray and wet objects placed on the tray.

[0003] In accordance to second aspect of this invention, the draining system comprises of multiple trays that are stacked one over another in a way that the trays are connected by one or more hollow pillar or pillars and there is a waste collection bin placed under the bottom most tray. The bottom most tray is raised from the floor either by built-in feet or by separate feet, the feet makes room to put a waste collection bin under the drain hole of the bottom most tray. The pillar is a hollow tubular structure with a through hole and two flat ends. The pillar act as support structure as well as a draining connection between each tray. Structure of each tray is same as the tray explained in first aspect of this invention. The drain hole in the tray has a post around it which has a step feature and a side cut-out throughout the post height, this post is designed to receive one end of the pillar. There is a tubular feature around the drain hole on bottom of the tray to receive another end of the pillar. The step feature in the post above the drain hole is designed in a way that when a pillar is assembled in the post a gap is created between the pillar and the sloped surface of the tray so that water from all the trays continues to pass through the drain hole of each tray, then passes through the pillar and then travels into the waste collection bin on the floor level.

[0004] In accordance to third aspect of this invention, the waste collection bin as explained in above two aspects of this invention has a built-in electric heater to rapidly evaporate water that comes into the waste collection bin.

DESCRIPTION OF THE FIGURES

[0005] In the figures,

[0006] Fig. 1 shows single tray of the draining system;

[0007] Fig. 2 shows single tray of the draining system without the ribs to clearly demonstrate the sloped surface;

[0008] Fig. 3 shows single tray of the draining system without the ribs to demonstrate that the sloped surface is curved in shape;

[0009] Fig. 4 shows a single tray of the draining system without the ribs and a drain hole in the tray;

[0010] Fig. 5 shows a single tray of the draining system raised from the floor by two feet;

[0011] Fig. 6 shows a single tray draining system in accordance with the first aspect of the invention, the system comprising a single tray, feet and a removable waste collection bin under the tray;

[0012] Fig. 7a and Fig. 7b show multi-tray setup of the draining system in accordance with second aspect of the invention;

[0013] Fig. 8 shows assembly of the pillar in multi-tray set-up of the draining system and shows flow of waste water through the drain hole with pillar attached to the tray;

[0014] Fig. 9 shows exploded view of multi-tray setup of the draining system;

[0015] Fig. 10 shows multi-tray setup of the draining system with winter boots placed on each tray;

[0016] Fig. 11 shows multi-tray setup of the draining system with dishes and cutlery placed on each tray;

[0017] Fig. 12a and Fig. 12b show a tray of the draining system with built-in feet to raise the tray from floor level to accommodate the waste collection bin under the drain hole;

[0018] Fig. 13a and Fig. 13b show a tray of the draining system with separate feet to raise the tray from floor level to accommodate the waste collection bin under the drain hole;

[0019] Fig. 14a and Fig. 14b show a tray of the draining system with a post having a stepped recess and a side cut-out fused with the boundary wall of the tray;

[0020] Fig. 15a and Fig. 15b show a tray of the draining system with a post having a stepped recess and a side cut-out independently standing on the sloped base member of the tray;

[0021] Fig. 16a and Fig. 16b show a tray of the draining system with a post having a stepped protrusion and a side cut-out independently standing on the sloped base member of the tray;

[0022] Fig. 17a and Fig. 17b show a tray of the draining system with a tubular feature around the drain hole on the bottom side of the tray;

[0023] Fig. 18 shows structure of a hollow pillar having two ends;

[0024] Fig. 19a shows a two-tray set-up of the draining system. Fig. 19b shows sagittal cross-section of the unit through the pillar. Fig. 19c shows zoomed in view of the sagittal cross-section;

[0025] Fig. 20a shows a two-tray set-up of the draining system. Fig. 20b shows frontal cross-section of the unit through the pillar. Fig. 20c shows zoomed in view of the frontal cross-section.

DETAIL DESCRIPTION

[0026] As shown in Fig. 1 a tray body 100 is rectangular in shape. Tray 100 has a sloped base member 101 and a virtually flat surface above the base member 101 made by peaks of multiple ribs 102. The virtually flat surface formed by the peaks of multiple ribs 102 provides a surface for placing wet objects. The base member 101 of the tray 100 is surrounded by walls 113. In this figure sloped base member 101 and ribs 102 are shown as one part, but they can be separate parts: one part making sloped base and the other part above the slopped base making a flat surface with perforations to allow water to pass through. Base member 101 has four drain holes 103a strategically placed at the four corners of the tray 100, these four corners are the bottommost points of the sloped base member 101. In these illustrations four drain holes are shown, but they can be fewer or more depending on shape and the direction of the slope. Note that the virtually flat surface formed by ribs 102 is higher than sloped base member's surface 101, this height difference allows water to flow from the wet object placed on the virtually flat surface to sloped base surface 101 and then flows towards the drain holes 103a by gravity. Drain holes 103a are surrounded by tubular features 103b at the bottom of tray 100 on the

opposite side of sloped base 101. The drain hole 103a is surrounded by a post 121 on top of the sloped base feature 101 and is fused with the tray walls 113.

[0027] In Fig. 2, flat ribs 102 of the tray 100 are removed to show the sloped base member 101 clearly. In this figure, the sloped base member 101 is shown as a curved profile converging into drain holes 103a. Profile of the base member 101 can be a straight inclined profile in one direction or multiple straight inclined profiles in multiple directions. The sloped shape can converge into one drain hole or multiple drain holes.

[0028] As shown in Fig. 3, the sloped base member 101 is spherical in shape, having a slope in the direction shown by curve 104 and curve 105.

[0029] Fig. 4 shows the flow of water over the sloped base member 101. Waste water drips off the wet objects placed on the tray 100, flows over the sloped base member and flow into the drain hole 103a. Fig. 4 also shows the post 121, the first recess 114 inside the post 121, a side cut-out 115 in post 114 and the step 106 in the post 114 on top of drain holes 103a.

[0030] Fig. 5 shows tray 100 raised by two feet 108. These feet 108 raise the tray 100 from the floor to create space 109 under the drain holes 103a. In this figure two feet are shown but there could be many variations of raised feet depending on shape and size of trays.

[0031] Fig. 6 shows two removable waste collections bins 110 placed under the tray 100. The left waste collection bin 110 is shown in assembled state properly placed under drain holes 103a of the tray 100 and the right waste collection bin 110 is shown in a pulled-out state. In this figure one waste collection bin 110 is big enough to collect water from two drain holes 103a, but there could be many variations of waste collection bin 110 depending on the number, location and size of drain holes. Waste water passing through the drain holes 103a is stored in the waste collection bin 110. Waste collection bin 110 can be removed for emptying and can be re-placed in opening 109 for subsequent water collection.

[0032] Fig. 7a and Fig. 7b. shows multi-trays setup. As shown in Fig. 7a two trays 100 can be stacked one over the other by using pillars 107. Fig. 18 clearly shows the construction of pillar 107. The pillar 107 is hollow with a through opening 120. The pillar 107 has two ends, first

end 116 and the second end 117. Outer size 118 of the pillar 107 matches the first recess 114 of the tray post 121 and the inner size 119 of the pillar 107 matches the outer size of tray's tubular feature 103b such that first end 116 of the pillar 107 fits inside the first recess 114 of bottom tray 100 and the second end 117 of the pillar 107 fits around the tubular feature 103b of the top tray 100. First end 116 of the pillar 107 butts against the step 106 of the tray 100, this assembly of pillar and tray leaving gap 111 between sloped surface 101 and pillar 107 so that waste water from the bottom tray 100 can flow through the drain hole 103a. In Fig. 7a and Fig. 7b, four pillars 107 are shown between two trays, but they can be more than four or less depending on the shape and size of the trays 100 and placement of drain holes in the tray. The pillars 107 provide support to top tray 100 and acts as a draining connection between two trays. This way, trays can be stacked up in two layers as shown in Fig. 7a or 3 layers as shown in Fig. 7b or even more layers (not shown). Water from top tray 100 flows through the pillar 107, then through the drain hole 103a of bottom tray 100, and then into the waste collection bin 110 at floor level.

[0033] Fig. 8 clearly shows gap 111 created above the drain hole in bottom tray 100 in multi-tray set-up. Gap 111 allows water from bottom tray 100 to flow through drain hole 103a.

[0034] Fig. 9 shows an exploded view of three-layer tray setup. In this illustration, there are two holes 112 shown in foot 108. Holes 112 are designed to receive tubular feature 103b of bottom tray 100, so that water from drain hole 103a can flow through the foot 108, and into removable waste collection bin 110. Holes 112 in foot 108 also act as tray locating holes for assembly purpose. The holes 112 will not be required if the foot is of a different design, an example of such foot is shown in Fig. 12a, Fig. 12b, Fig 13a and Fig. 13b.

[0035] Fig. 10 shows a three-layer tray setup with footwear 122 on each layer. This illustration also shows that pillars 107 have created enough space between the two trays 100 to accommodate tall boots 122.

[0036] Fig. 11 shows a three-layer tray setup with various dishes and cutlery 123 on trays 100.

[0037] Fig. 12a and Fig. 12b show a tray 100 with built-in feet 124 to raise the tray 100 to make space for the waste collection bin 110 under the drain holes of the tray 100. Fig. 12b shows space 109 under the tray 100 to accommodate waste collection bin 110.

[0038] Fig. 13a and Fig. 13b show a tray 100 with separate feet 125 to raise the tray 100 to make space for the waste collection bin 110 under the drain holes of the tray 100. Fig. 13b shows the feet 125 in disassembled state and this figure also shows space 109 under the tray 100 to accommodate waste collection bin 110.

[0039] Fig. 14a and Fig. 14b show a post 121 on top of the sloped base member 101. In these figures the post is shown fused with the tray walls 113. The post 121 has a first recess 114, a second recess 126, a step 106 between the two recesses and a side cut-out 115 throughout the post height. The sloped base member 101 has a drain hole 103a inside the post 121. Fig. 14b shows a pillar 107 assembled into the post 121 such that first end 116 of the pillar 107 fits into the first recess 114 of the post 121 and butts against the step 106. This assembly of pillar 107 and tray post 121 creates a gap 111 for water to flow through drain hole 103a. Fig. 14b illustrates a multi-layer tray set-up.

[0040] Fig. 15a and Fig. 15b show a post 121 on top of the sloped base member 101. In these figures the post is shown independently standing on the sloped base member 101 and not fused with tray walls 113. The post 121 has a first recess 114, a second recess 126, a step 106 between the two recesses and a side cut-out 115 throughout the post height. The sloped base member 101 has a drain hole 103a inside the post 121. Fig. 15b shows a pillar 107 assembled into the post 121 such that first end 116 of the pillar 107 fits into the first recess 114 of the post 121 and butts against the step 106. This assembly of pillar 107 and tray post 121 creates a gap 111 for water to flow through drain hole 103a. Fig. 15b illustrates a multi-layer tray set-up.

[0041] Fig. 16a and Fig. 16b show a post 121 on top of the sloped base member 101. In these figures the post is shown independently standing on the sloped base member 101 and not fused with tray walls 113. The post 121 has a first protrusion 128, a second protrusion 127, a step 106 between the two protrusions and a side cut-out 115 throughout the post height. The

sloped base member 101 has a drain hole 103a inside the post 121. Fig. 16b shows a pillar 107 assembled onto the post 121 such that first end 116 of the pillar 107 fits onto the second protrusion 127 of the post 121 and butts against the step 106. This assembly of pillar 107 and tray post 121 creates a gap 111 for water to flow through drain hole 103a. Fig. 16b illustrates a multi-layer tray set-up.

[0042] Fig. 17a and Fig. 17b show bottom view of the tray 100 in a multi-layer tray set-up. Fig. 17a shows the tubular feature 103b surrounding the drain hole 103a on bottom face of the tray 100. Fig. 17b shows pillar 107 assembly with the tubular feature 103b such that the second end 117 of the pillar 107 fits on to the tubular feature 103b of the tray 100.

[0043] Fig. 18 clearly shows the construction of pillar 107. The pillar 107 is hollow with a through opening 120. The pillar 107 has two ends, first end 116 and the second end 117. Outer size 118 of the pillar 107 matches the first recess 114 of the tray post 121 and the inner size 119 of the pillar 107 matches the outer size of tray's tubular feature 103b. In case of the post 121 described in Fig. 16a and Fig. 16b, inner size 119 of the pillar 107 matches outer size of the second protrusion 127 of the post 121 and inner size 119 of the pillar 107 also matches the outer size of tray's tubular feature 103b.

[0044] Fig. 19a shows a two-tray set-up of the draining system. Fig. 19b shows sagittal cross-section of the unit through the pillar 107. Fig. 19c shows zoomed in view of the sagittal cross-section. As shown in Fig. 19b and Fig. 19c water from the top tray 100 flows on the sloped base member 101, then through the drain hole 103a, then through the pillar 107, then through the drain hole 103a of the bottom tray and then finally reaches the waste collection bin 110. Also shown in Fig. 19b and Fig. 19c water from the bottom tray 100 flows on the sloped base member 101, passes through the gap 111, enters the drain hole 103a and finally reaches the waste collection bin 110.

[0045] Fig. 20a shows a two-tray set-up of the draining system. Fig. 20b shows frontal cross-section of the unit through the pillar. Fig. 20c shows zoomed in view of the frontal cross-section. As shown in Fig. 20c water from the top tray 100 flows down through the pillar 107, then through the drain hole 103a of the bottom tray and then finally reaches the waste

collection bin 110. In the bottom tray 100 water from peaks of the multiple ribs 102 flows down to the sloped base member 101, passes through the gap 111, enters the drain hole 103a and finally reaches the waste collection bin 110.

WHAT IS CLAIMED IS:

1. A draining system for storing wet objects like footwear comprising:
a tray having:
a base member that is enclosed by walls on a top side of the said base member,
at least one stepped post above the top side of the said base member with a side cut-out throughout the height of the said at least one stepped post,
an opening on the base member inside the said at least one stepped post,
a tubular feature on a bottom side of the said base member around the opening,

at least one waste collection bin placed under the said tray such that the waste collection bin can be removed without moving the tray above the waste collection bin,


detachable feet that are used to raise the tray to accommodate the at least one waste collection bin under the said tray,

at least one pillar to connect two of said tray together, one above the other, for stacking purpose.
2. The draining system of claim 1, wherein the at least one stepped post in the said tray comprises of two recesses: a first recess and a second recess, and a step surface in between the first recess and the second recess.
3. The draining system of claim 2, wherein the second recess is below the first recess and the first recess is bigger than the second recess.
4. The draining system of claim 1, wherein the top side of the tray base member is formed in at least two levels: a higher level and a lower level such that the said at least one stepped post is positioned at the lower level.
5. The draining system of claim 4, wherein a step inside the said at least one stepped post is higher than the lower level of the said tray base member.
6. The draining system of claim 4, wherein the height difference between the higher level and the lower level is achieved by creating a curve on the base member.
7. The draining system of claim 1, wherein the tray base member has projections originating from the base member to form a virtually horizontal plane above the base member to place wet objects like footwear.
8. The draining system of claim 1, wherein the said detachable feet can be separated from the tray.

9. The draining system of claim 1, wherein the at least one stepped post is fused with walls surrounding the top side of the said base member of the tray.
10. The draining system of claim 1, wherein the said at least one pillar has a through opening along a length and has two ends: a first end and a second end.
11. The draining system of claim 10, wherein an outer size of the said at least one pillar matches inner size of the said at least one stepped post.
12. The draining system of claim 10, wherein an inner size of the said at least one pillar matches an outside size of the said tubular feature on the bottom side of the said tray.
13. The draining system of claim 10, wherein stacking of said trays is achieved by inserting the first end of the said at least one pillar inside the said at least one stepped post of the said tray at the bottom and by inserting the said tubular feature of the tray at the top inside the second end of the said at least one pillar.
14. The draining system of claim 13, wherein the first end of the said at least one pillar makes contact with a step inside the said at least one stepped post.
15. The draining system of claim 13, wherein a gap is created between the first end of the said at least one pillar and the top side of the said base member of the said tray at the bottom.
16. A method of draining waste liquid from outside of wet objects like footwear, the method comprising:
placing the wet or snow-soaked footwear on the draining system comprising:
a tray having:
 a base member that is enclosed by walls on a top side of the said base member,
 at least one stepped post above the top side of the said base member with a side cut-out throughout the height of the said at least one stepped post,
 an opening on the base member inside the said at least one stepped post,
 a tubular feature on a bottom side of the said base member around the opening,
at least one waste collection bin placed under the said tray such that the waste collection bin can be removed without moving the tray above the waste collection bin,
detachable feet that are used to raise the tray to accommodate the at least one waste collection bin under the said tray,
at least one pillar to connect two of said tray together, one above the other, for stacking purpose.

17. A method of claim 16, where in the waste liquid from the footwear flows through the side cut-out of the said post, then through the opening on the said tray base member inside the post and finally into the waste collection bin which is placed under the said tray.

18. A method of claim 17, where in the waste collection bin is removed for emptying without moving the said tray.

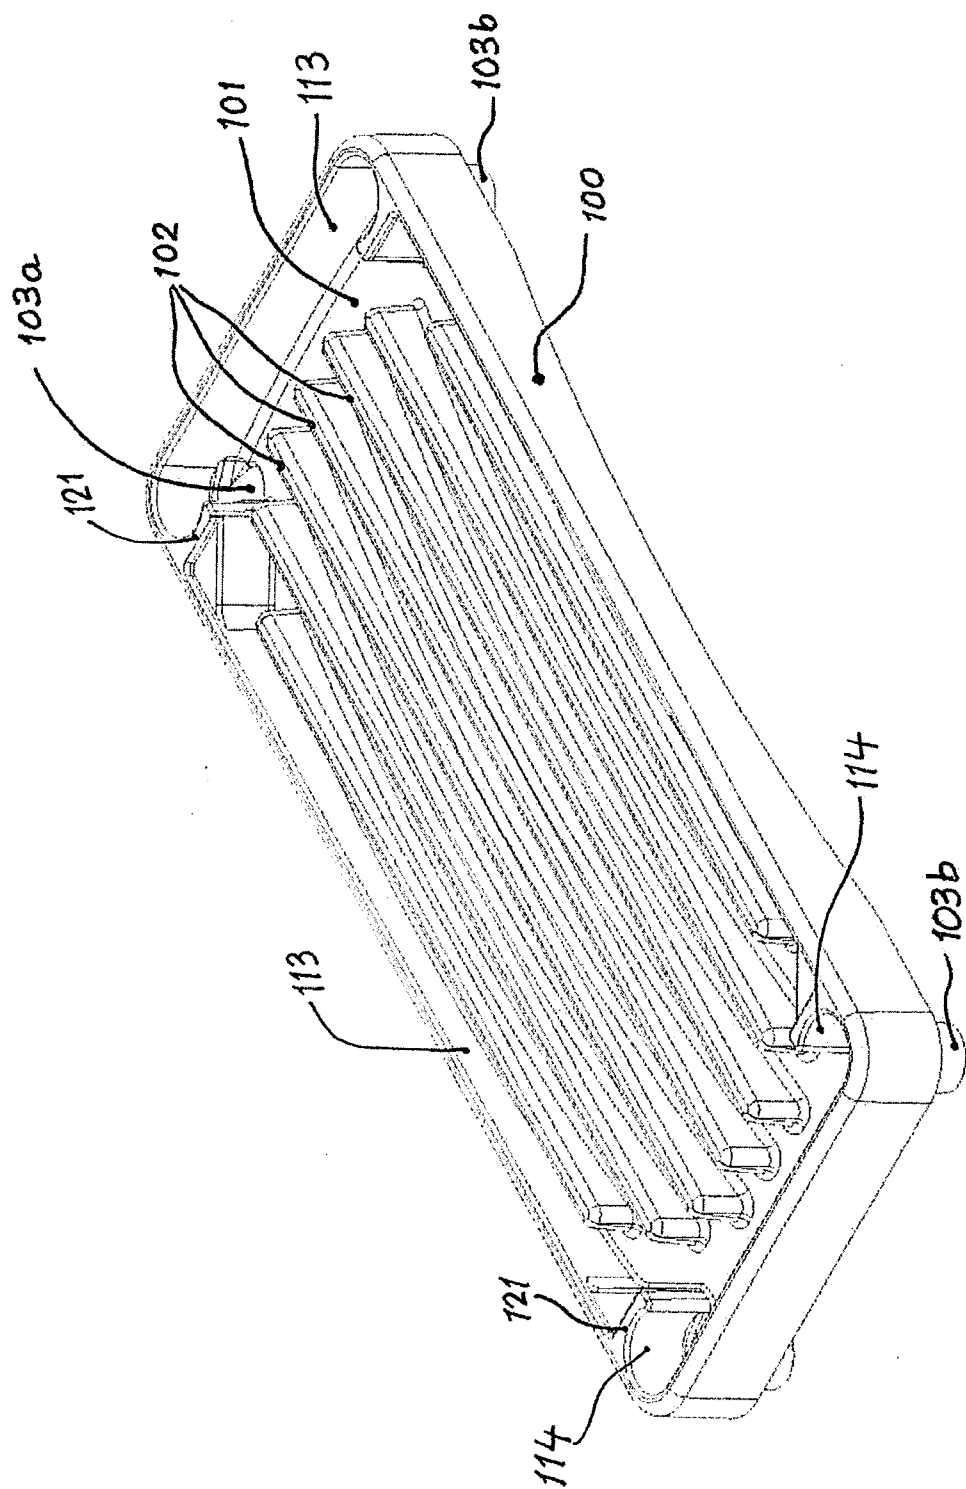

-Fig. 1-

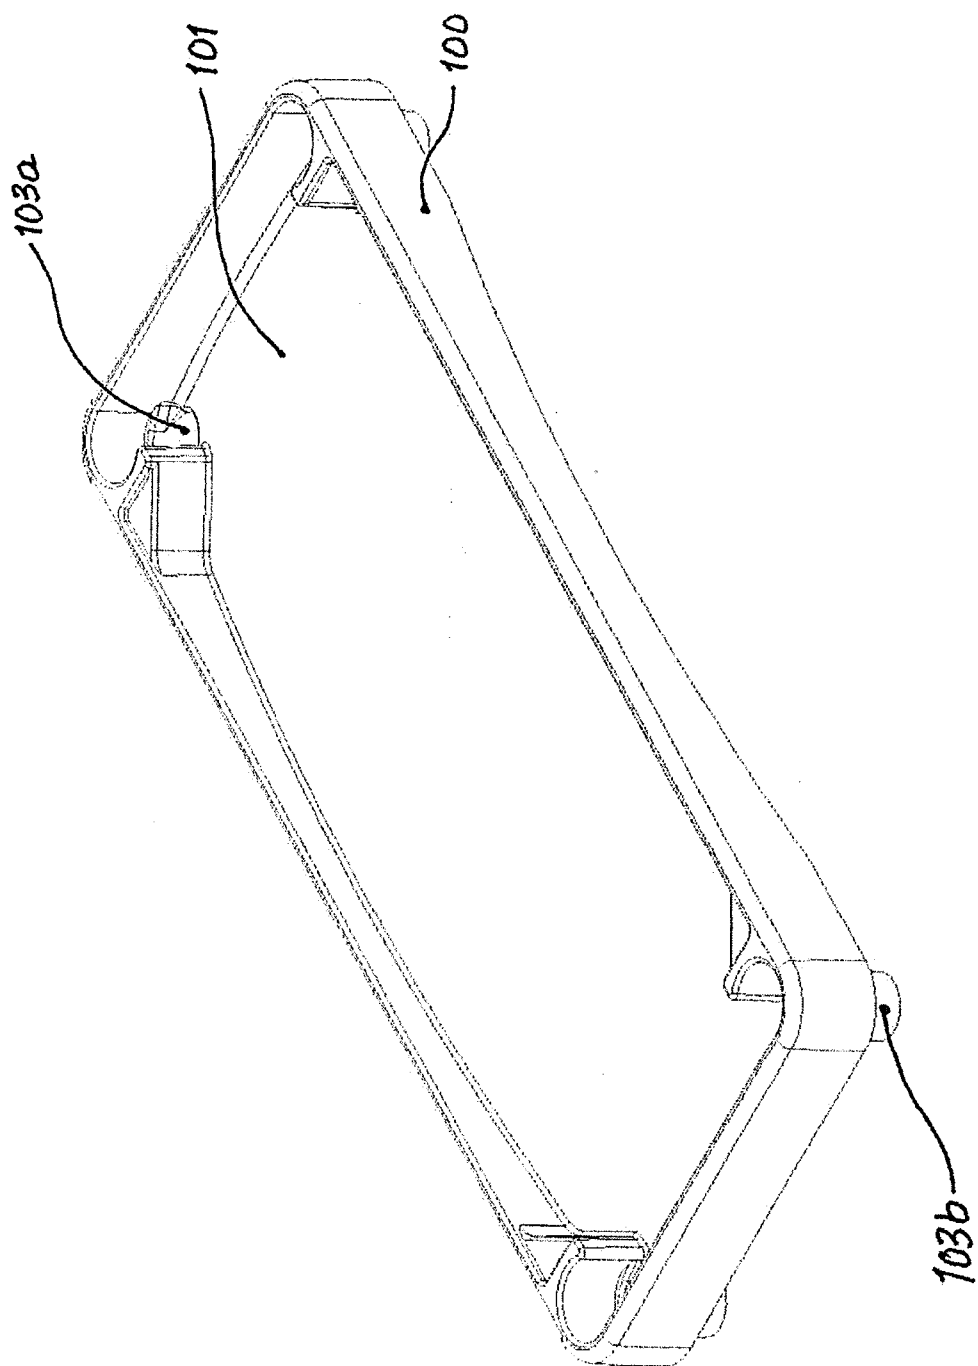


Fig 2.-


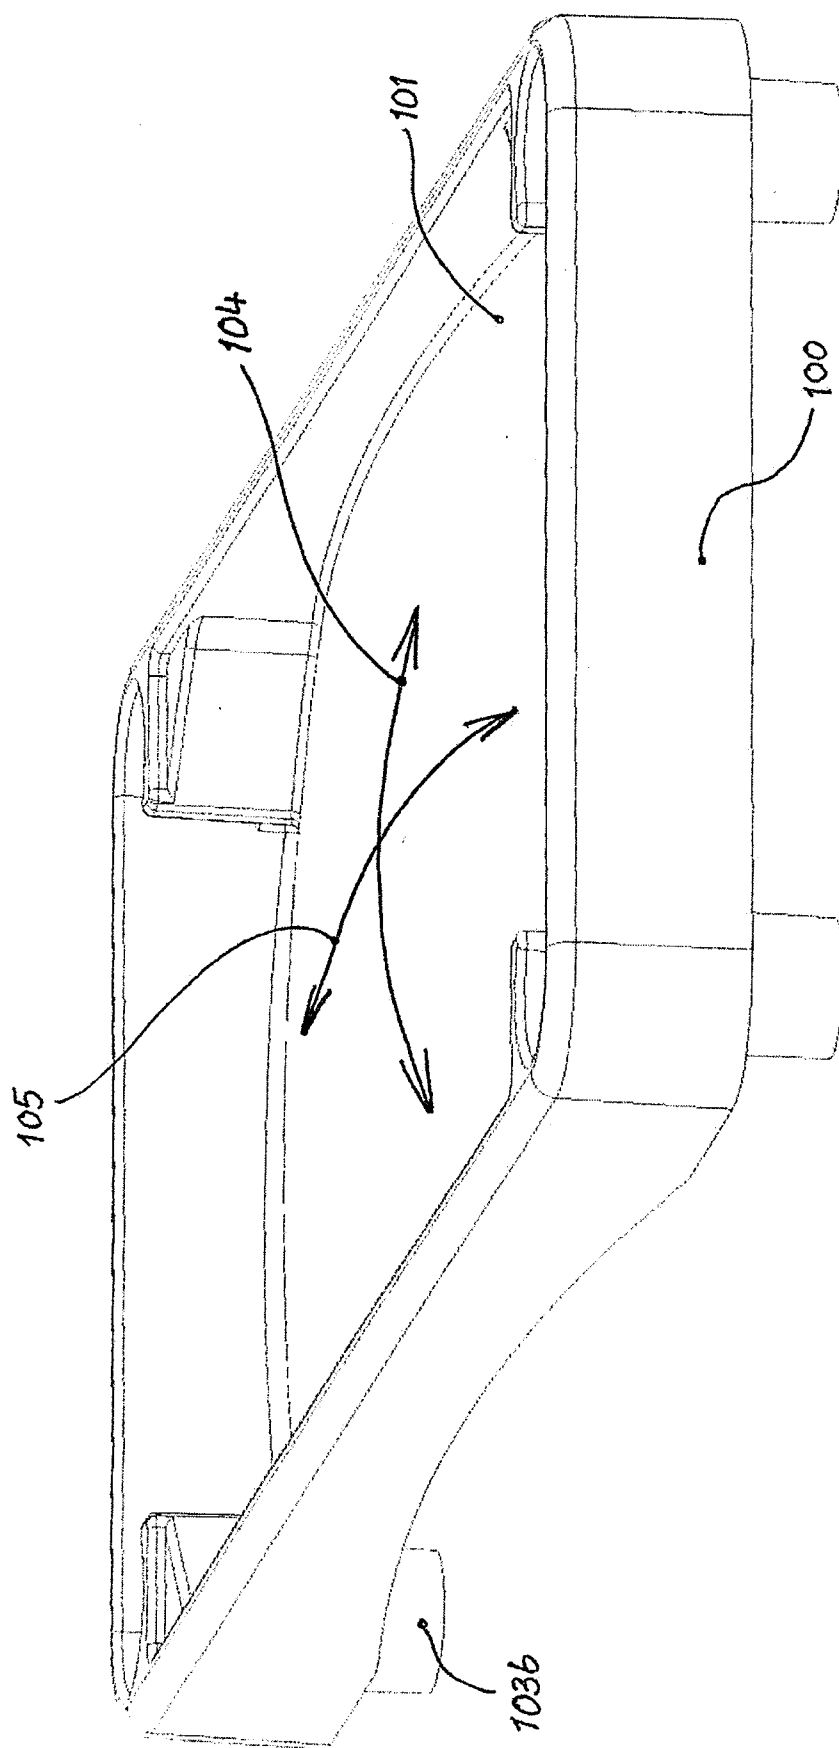


Fig. 3

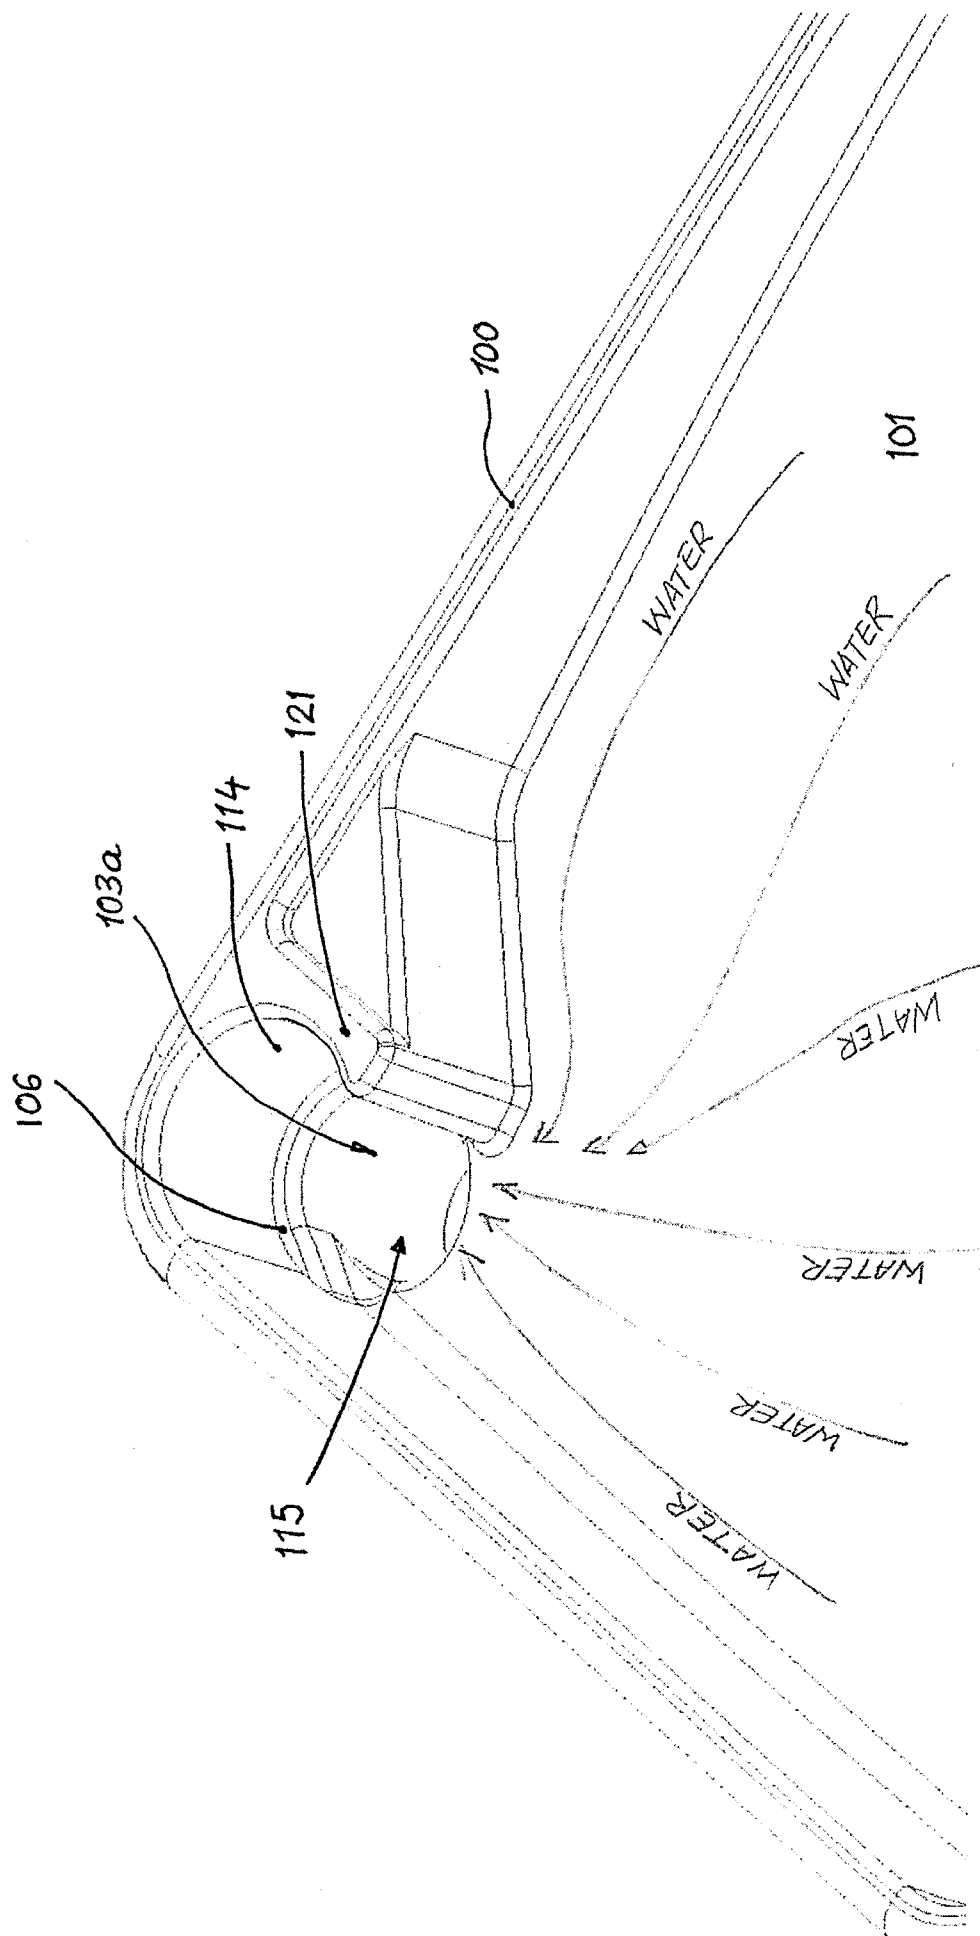

-Fig. 4-


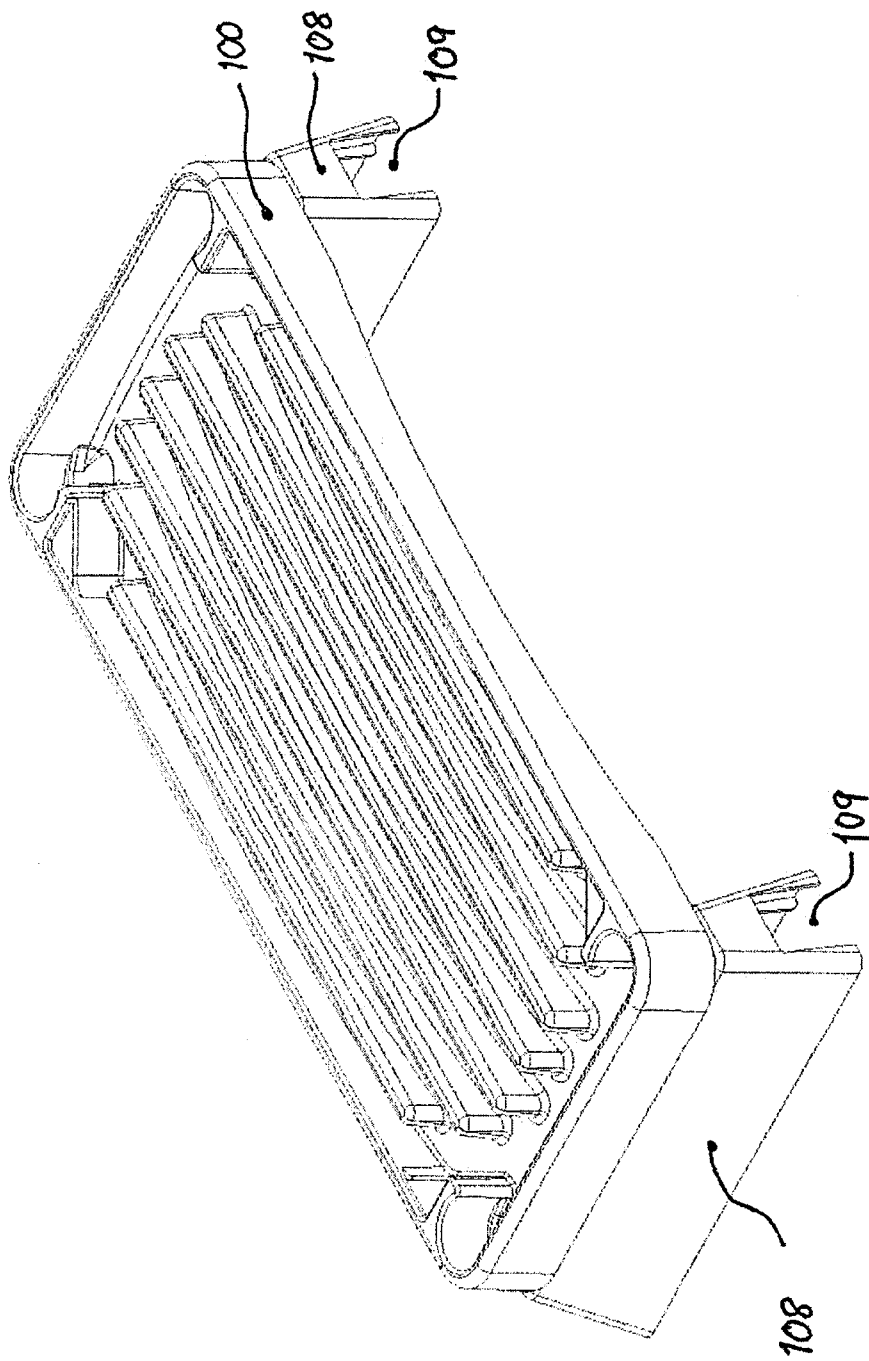


Fig. 5

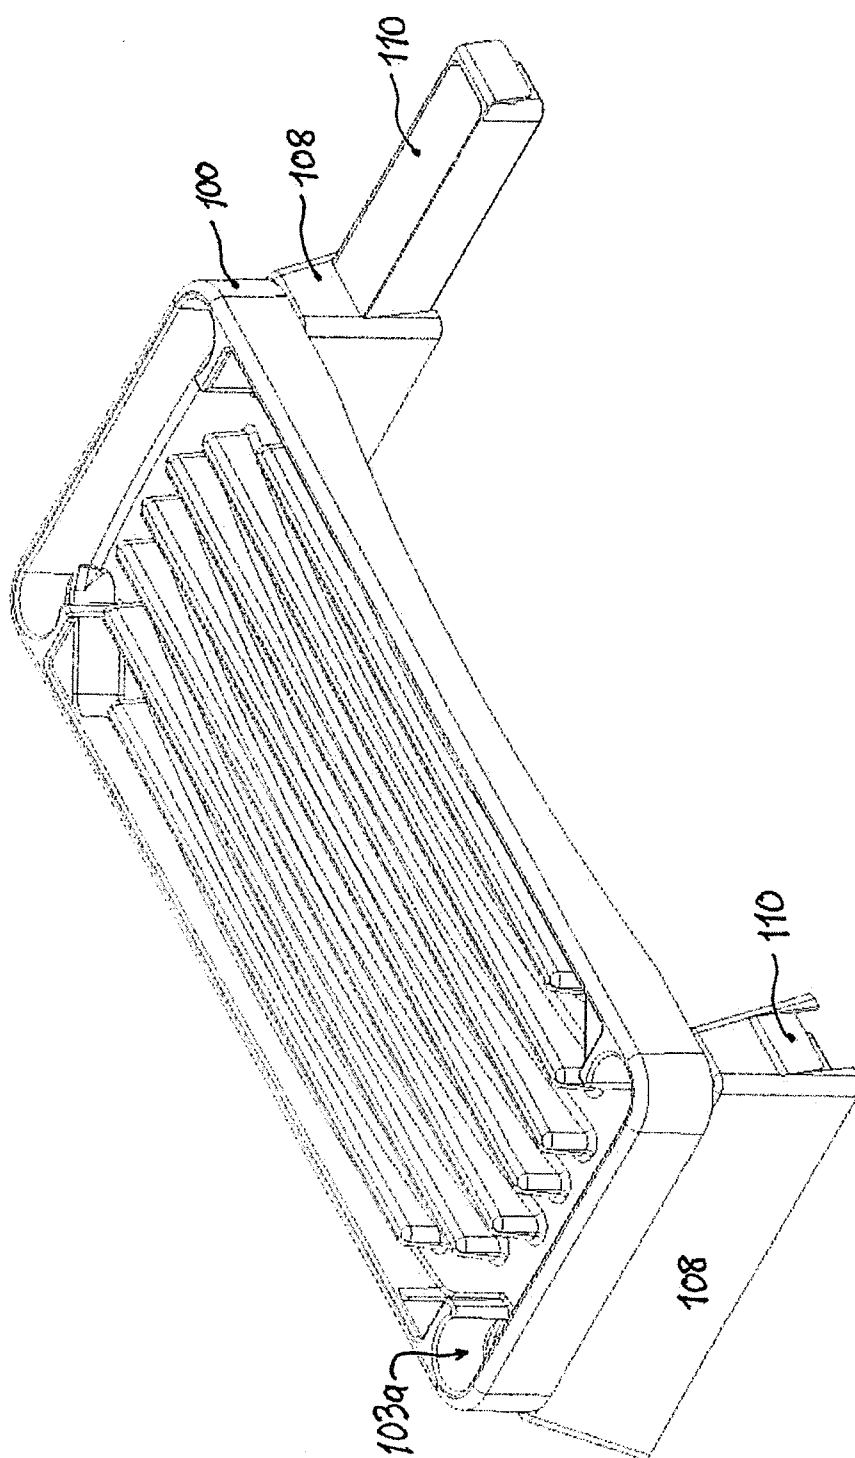

-Fig.6-

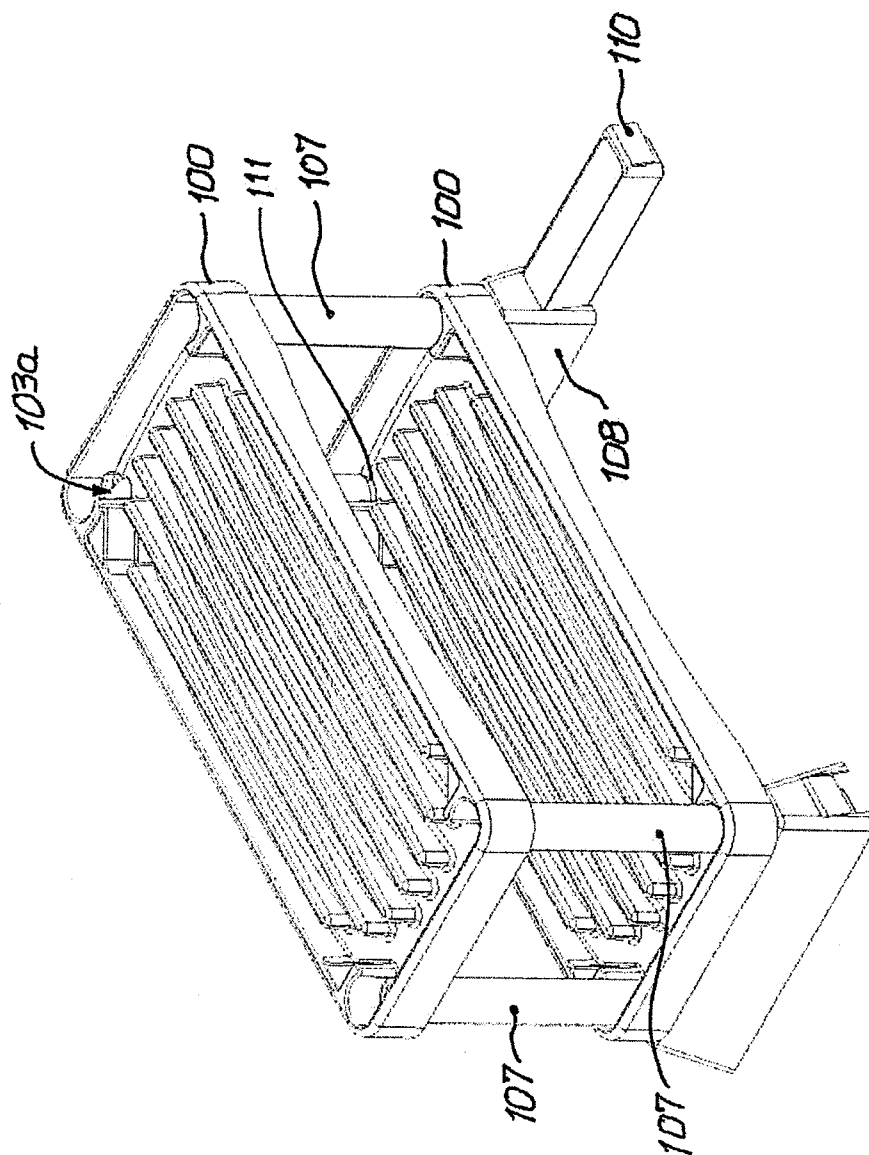


Fig. 7a-

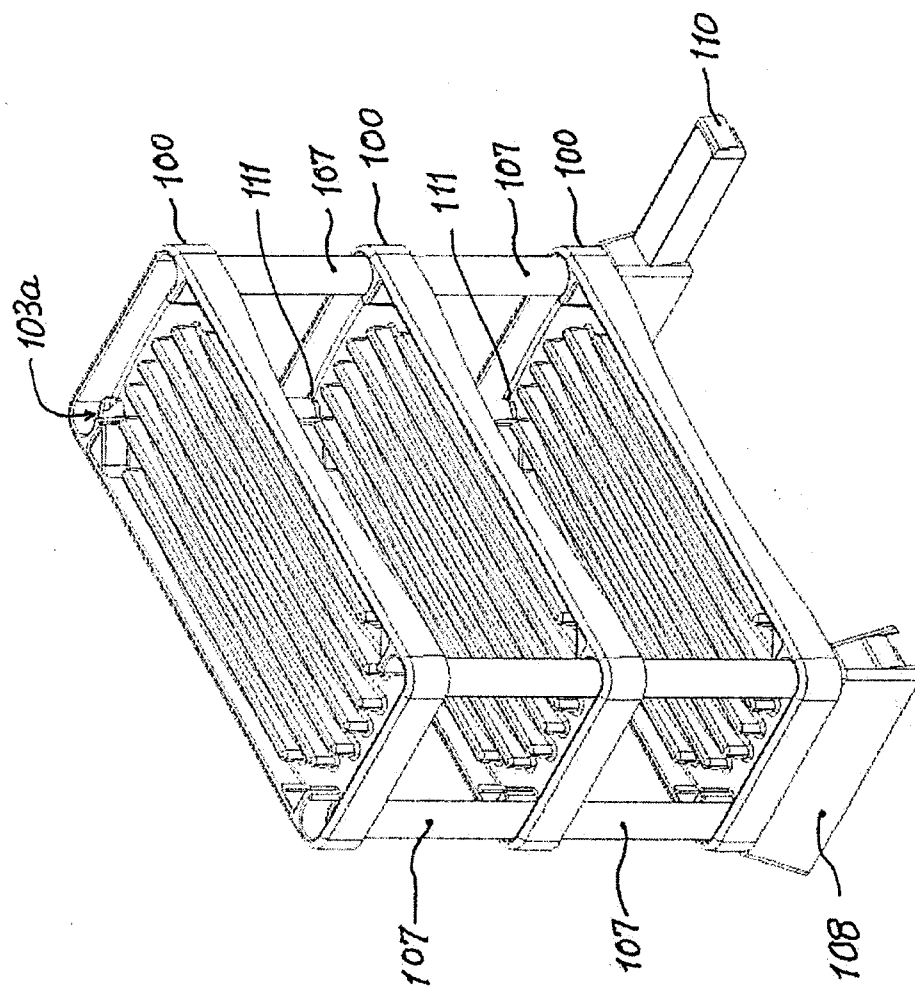


Fig. 7b-



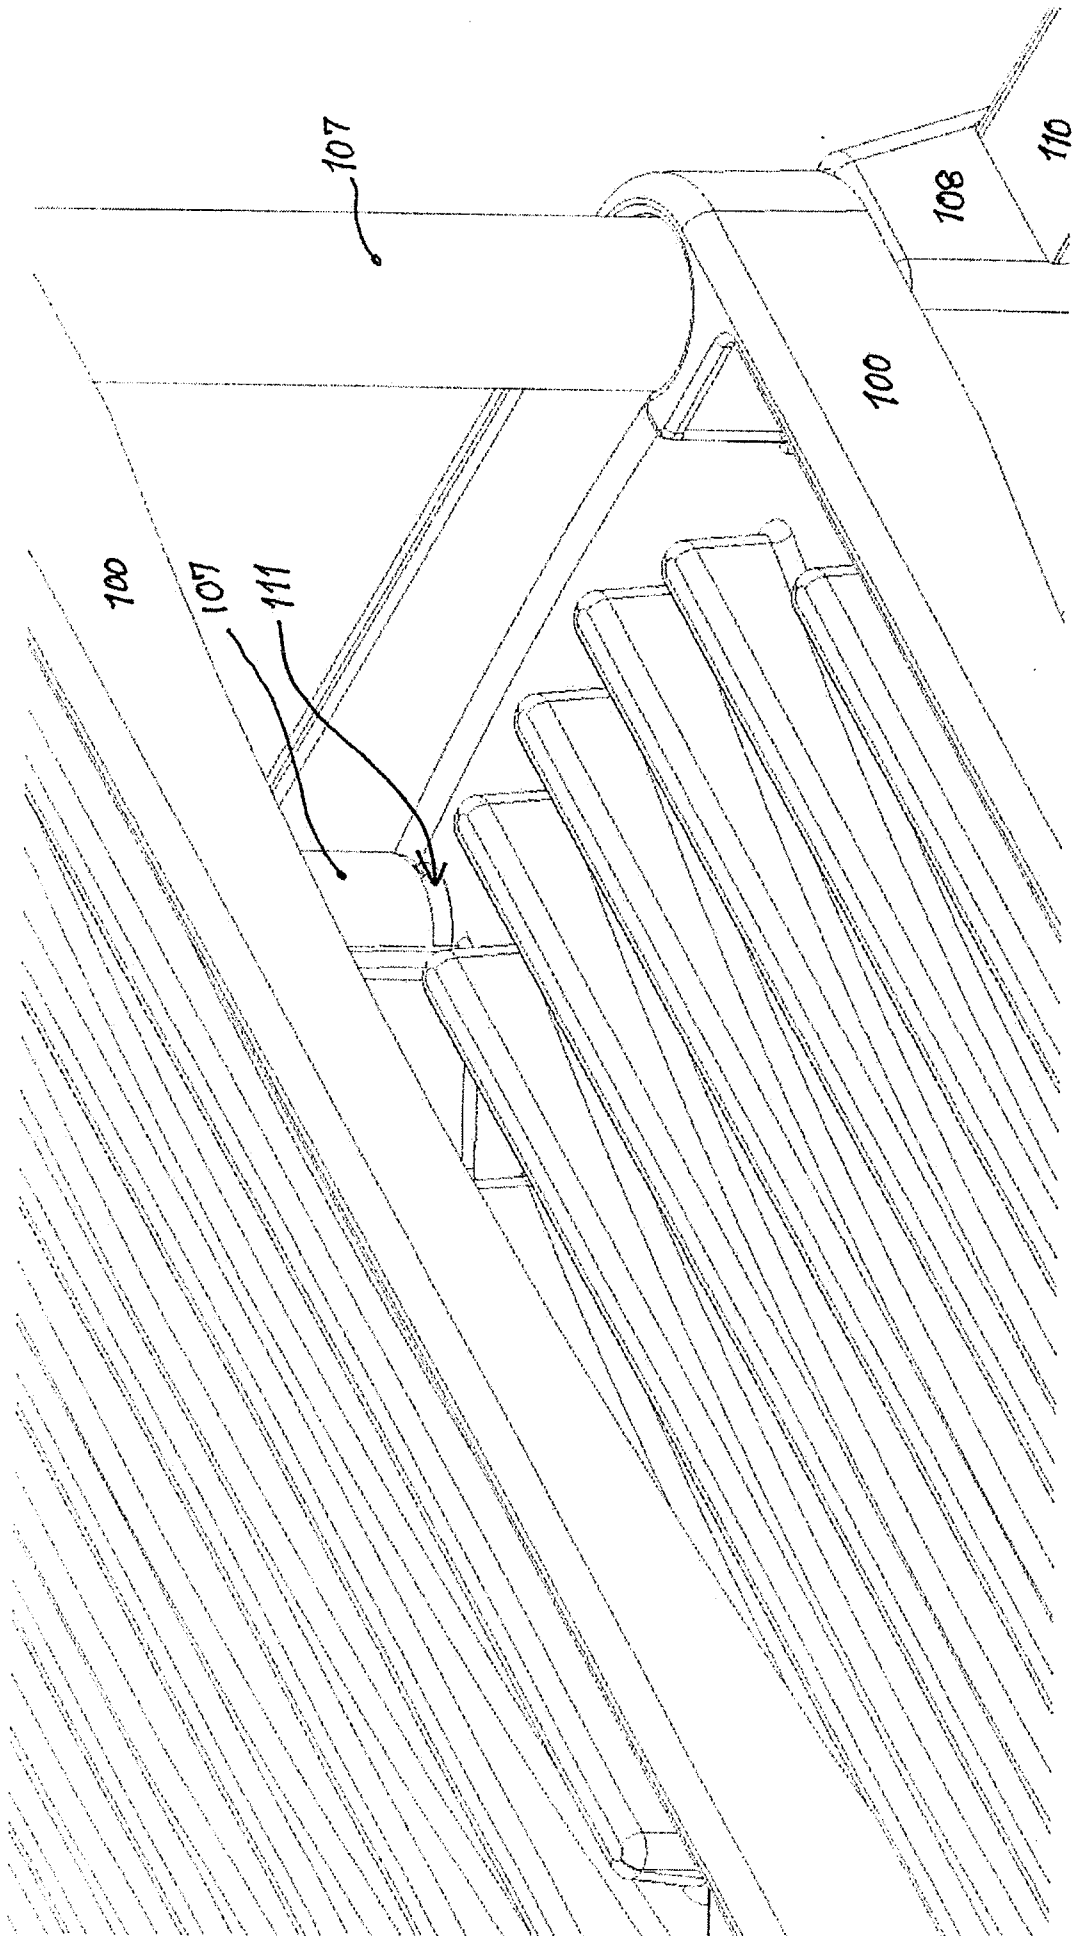



Fig. B-

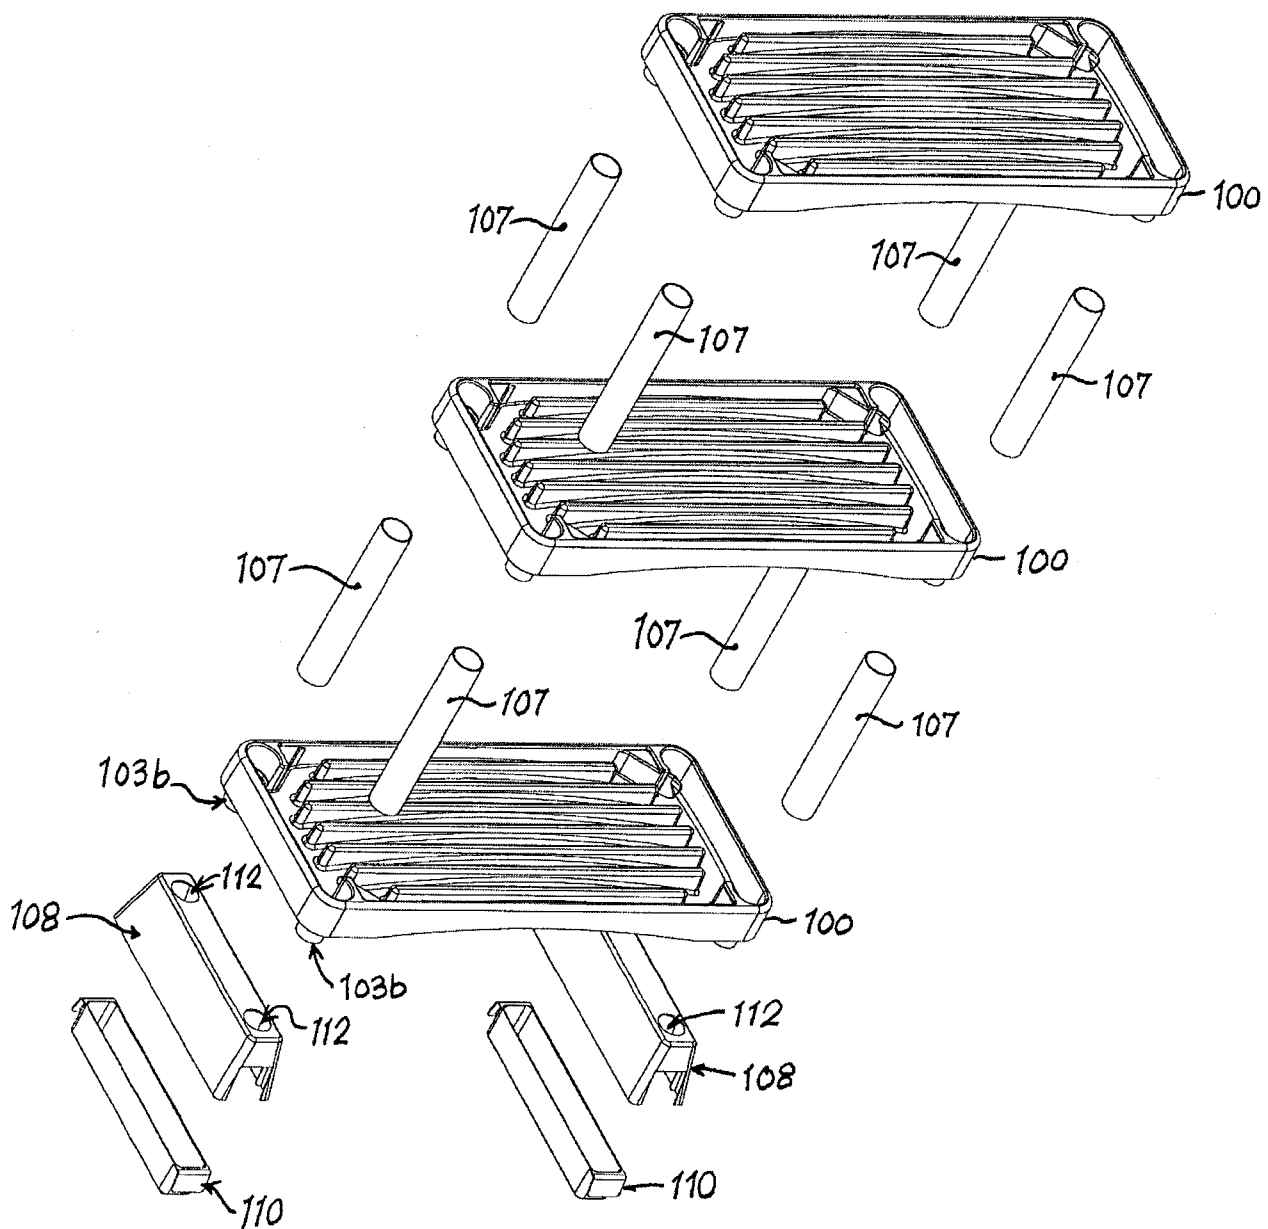



-Fig. 9-


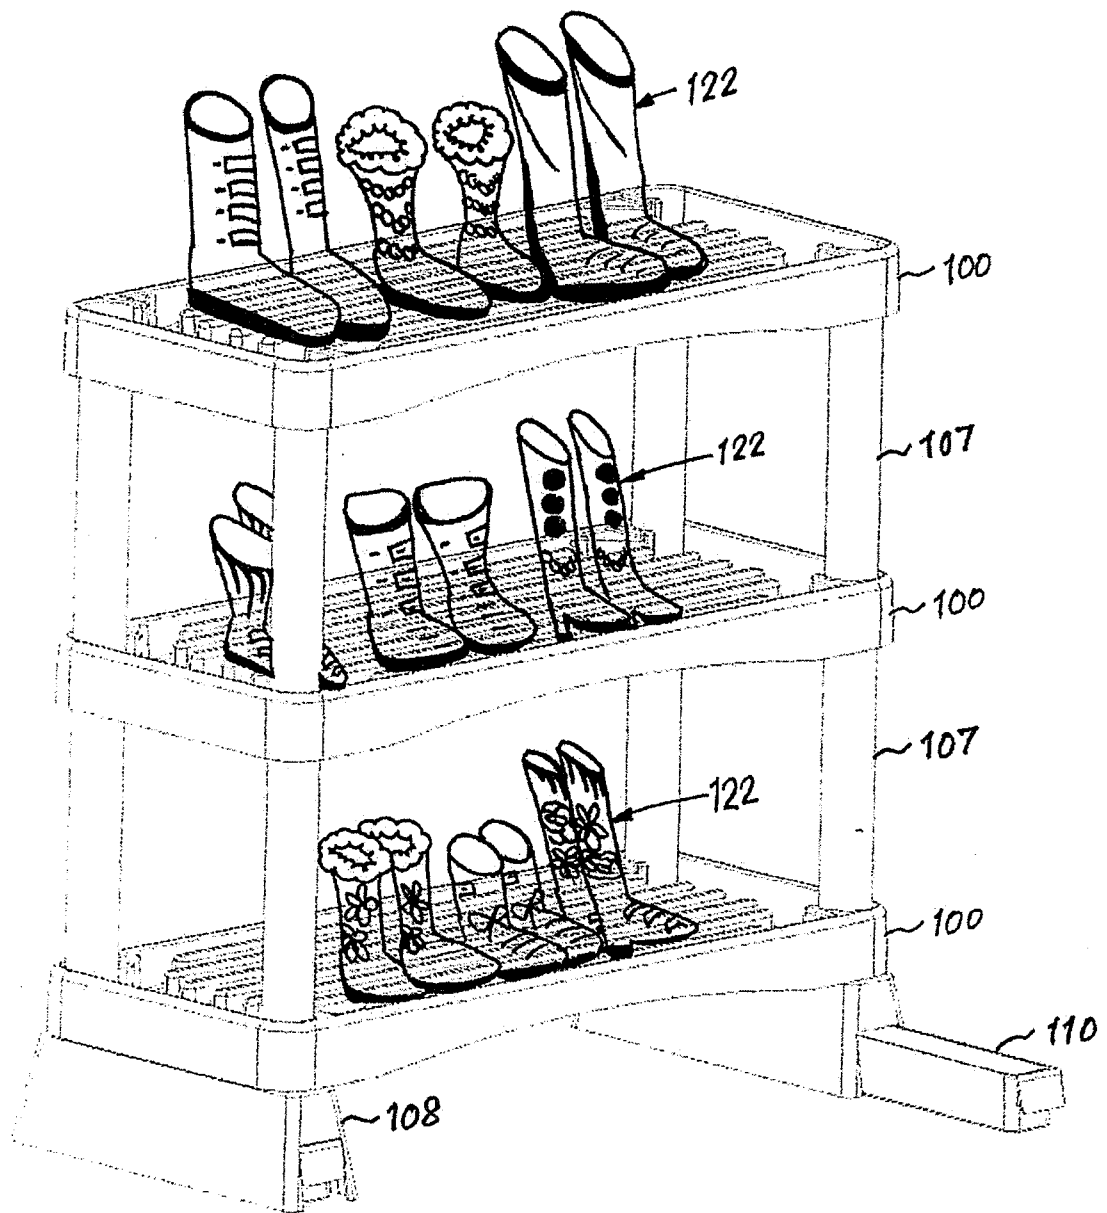




-Fig. 10-


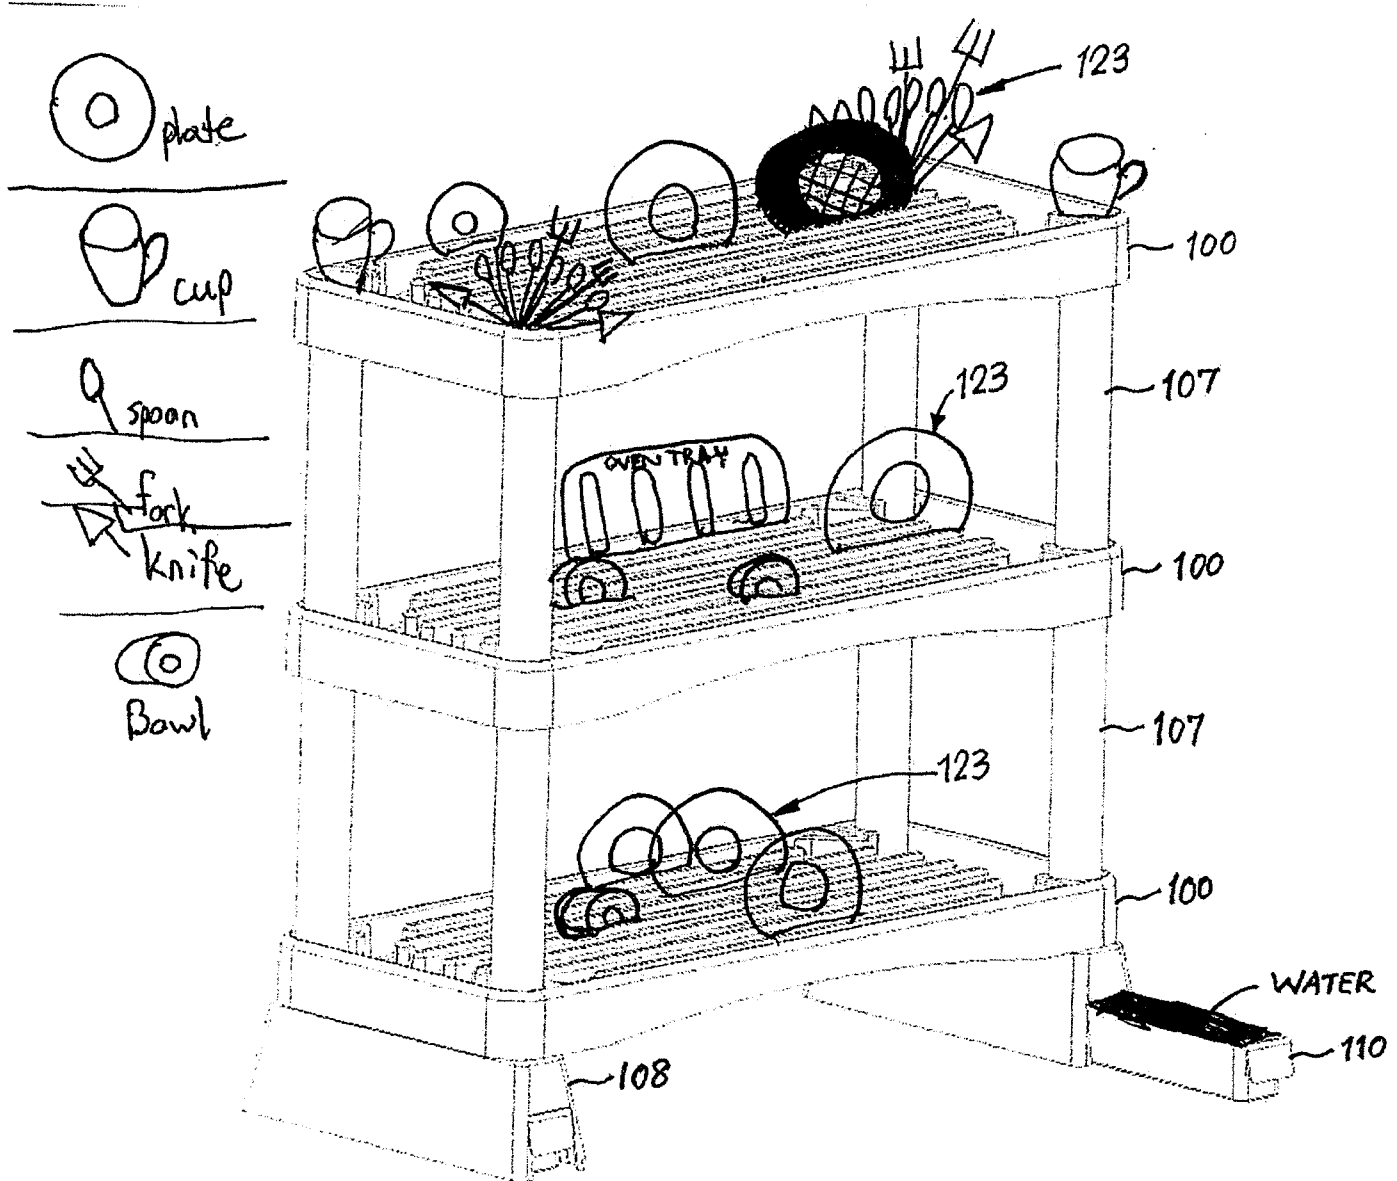




-Fig. 11-

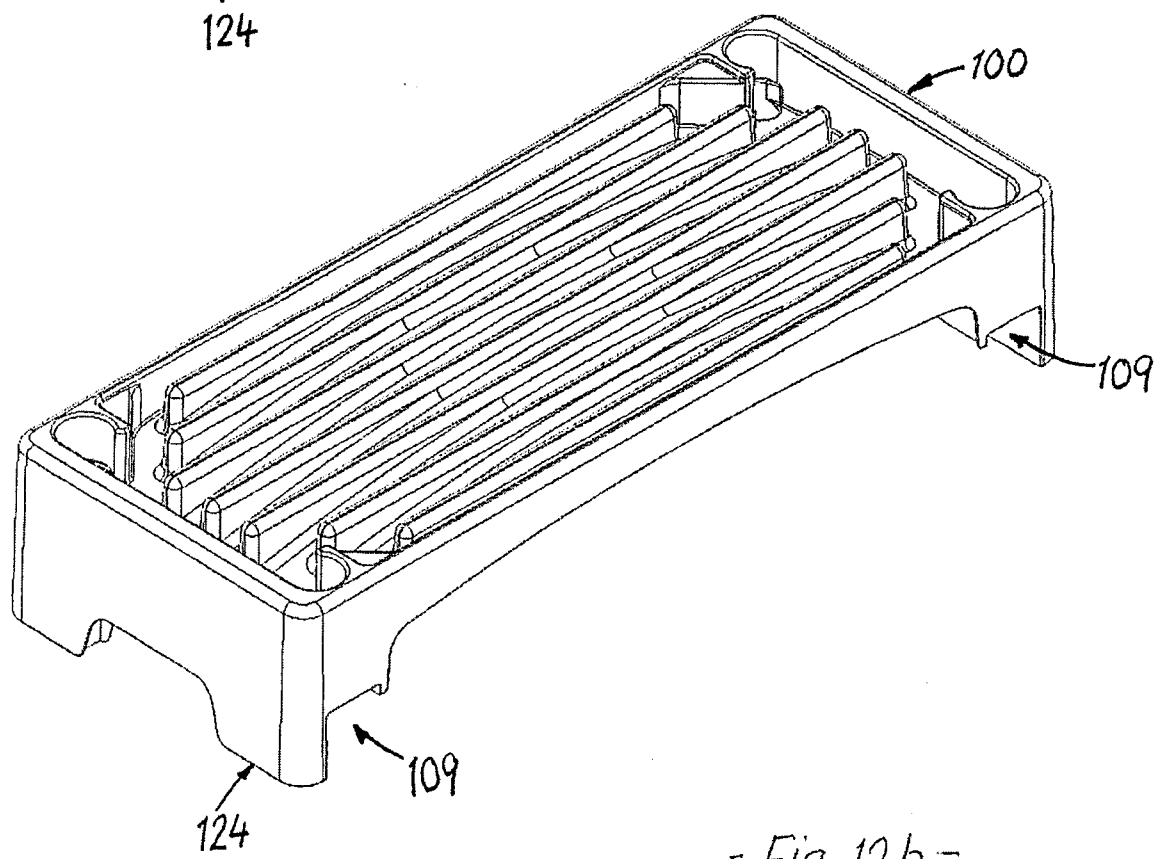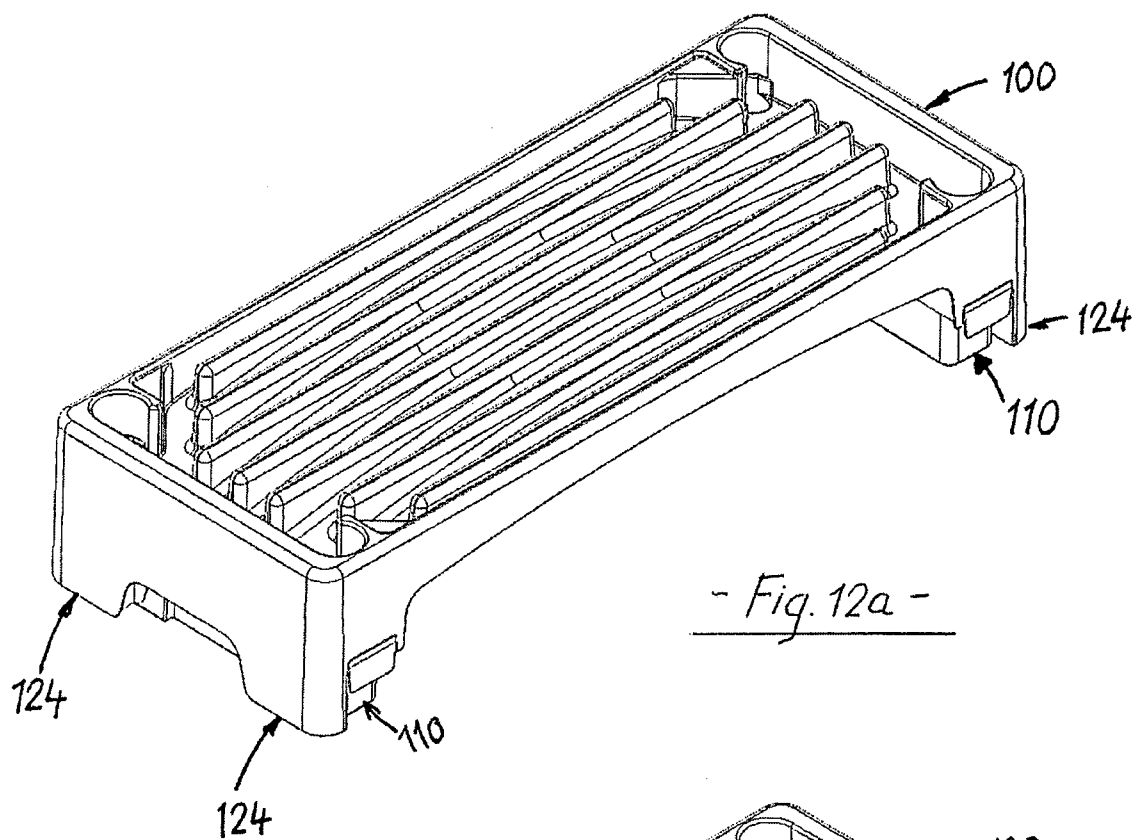


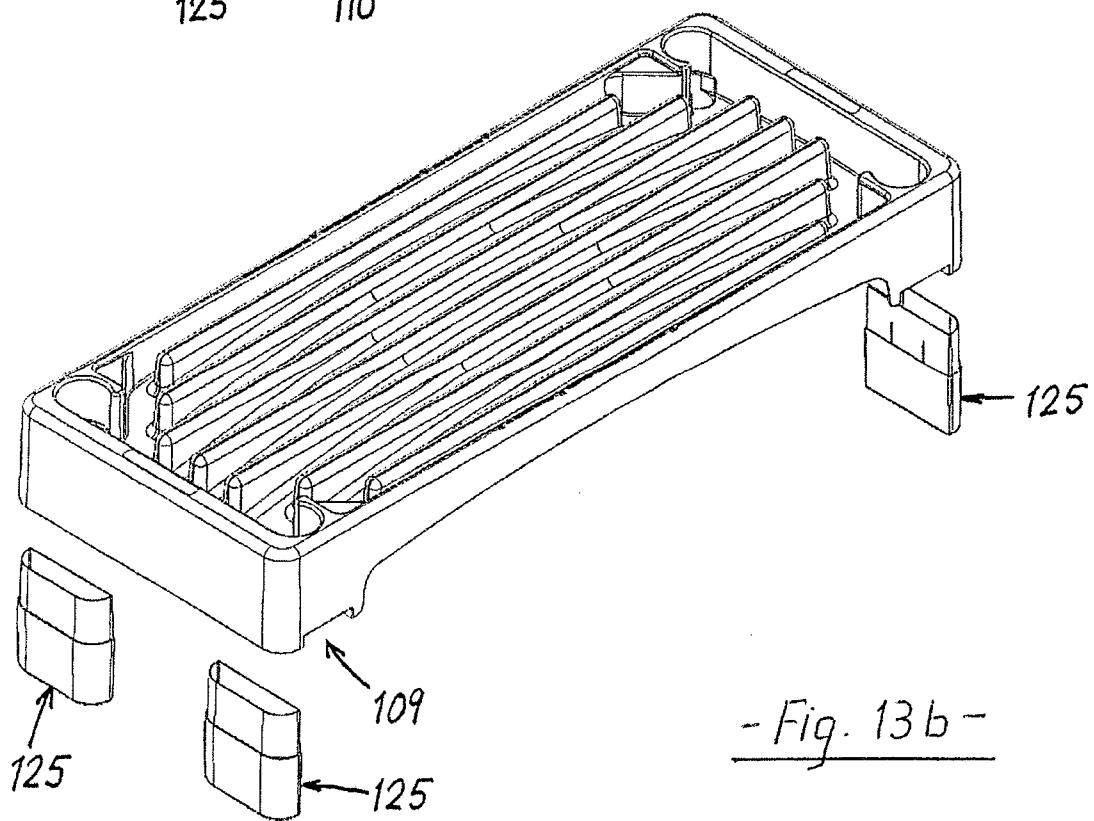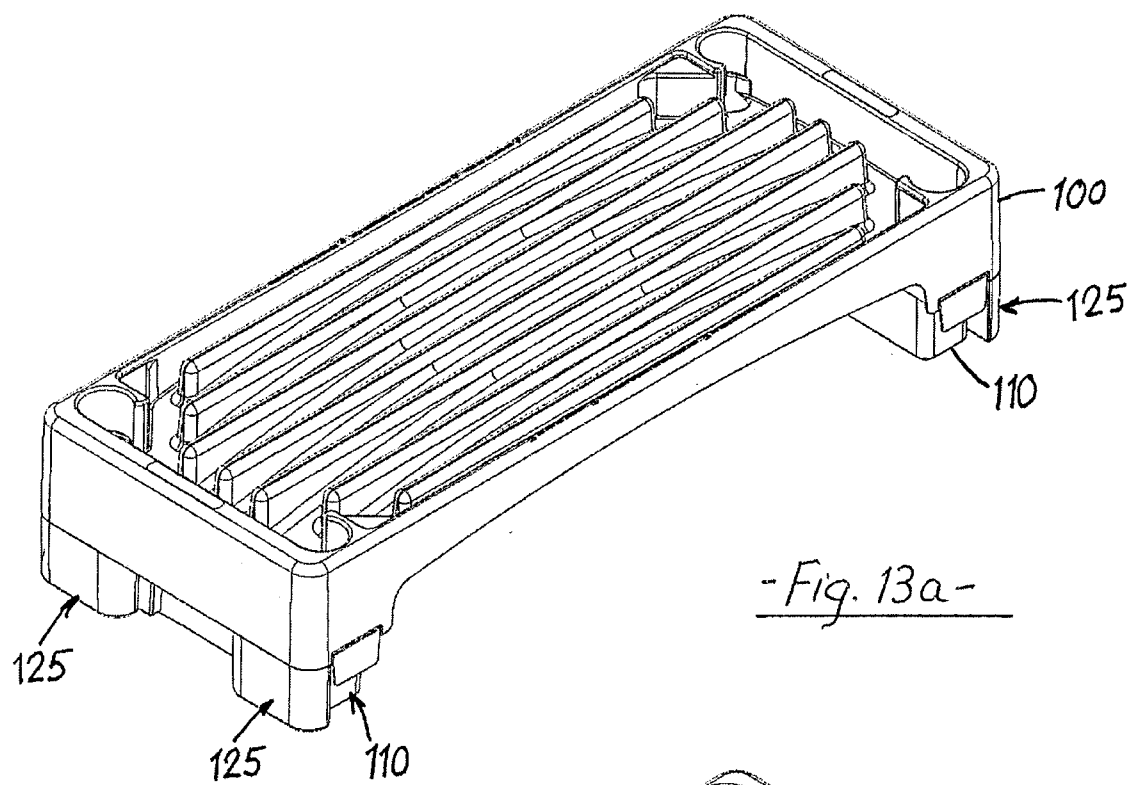

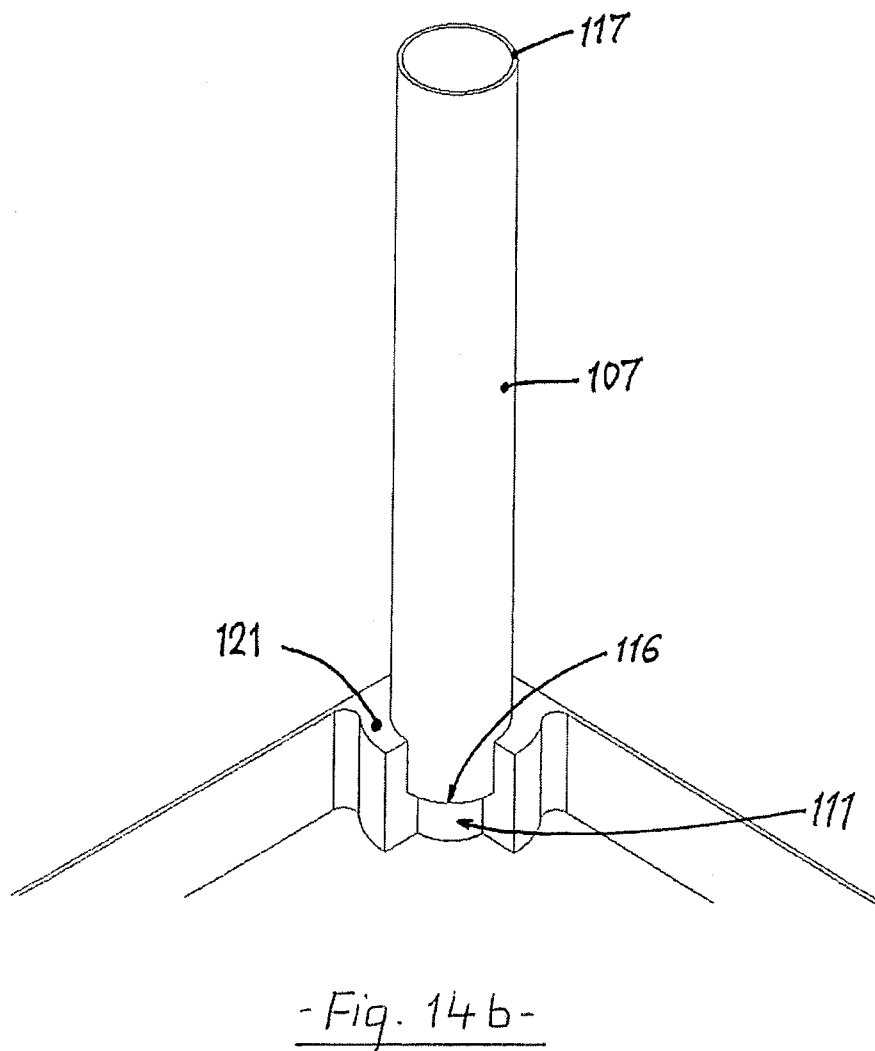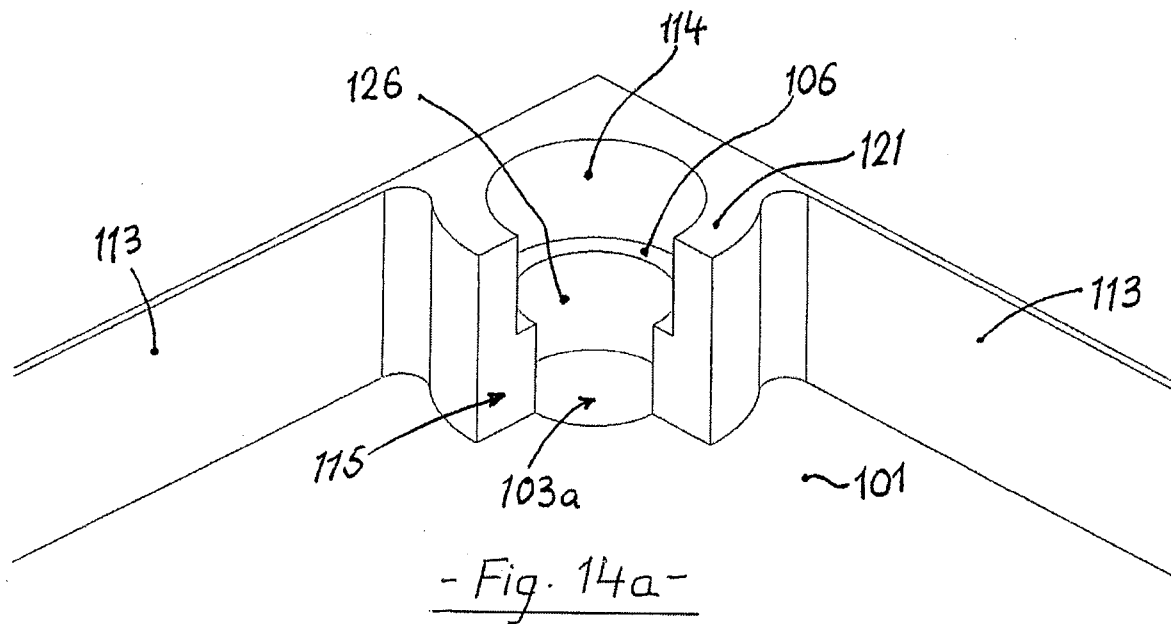


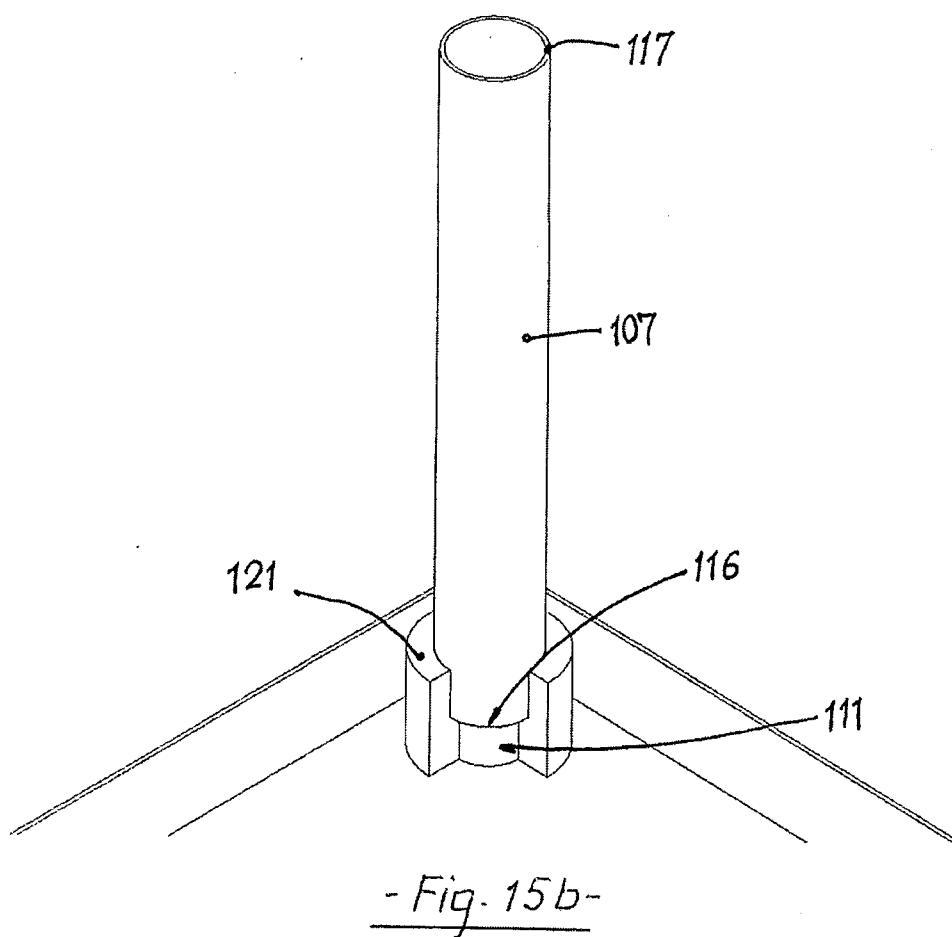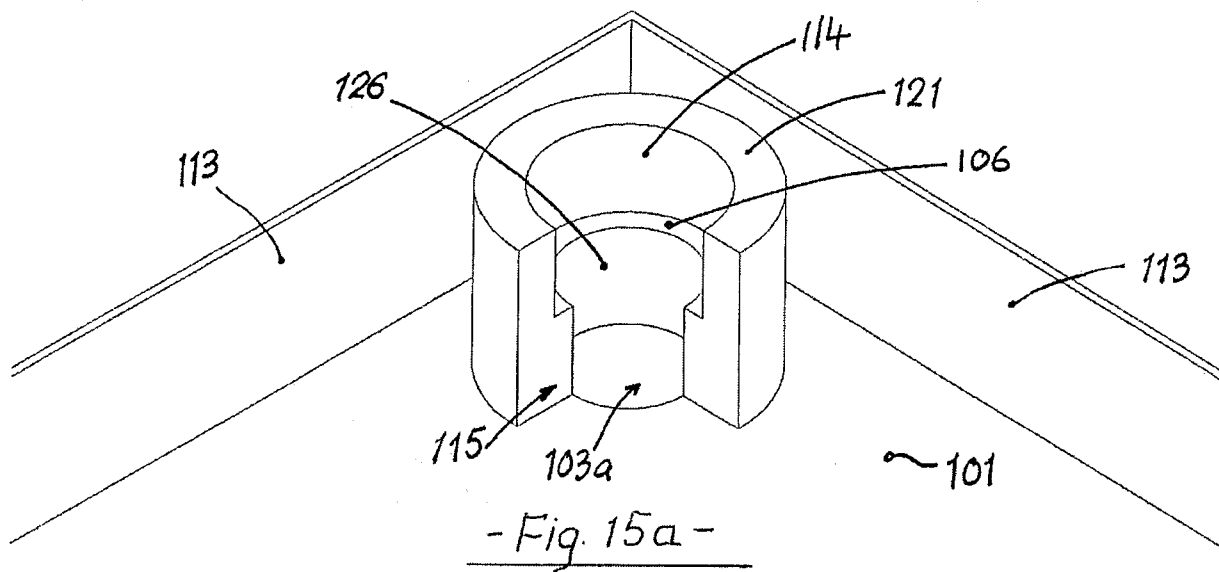

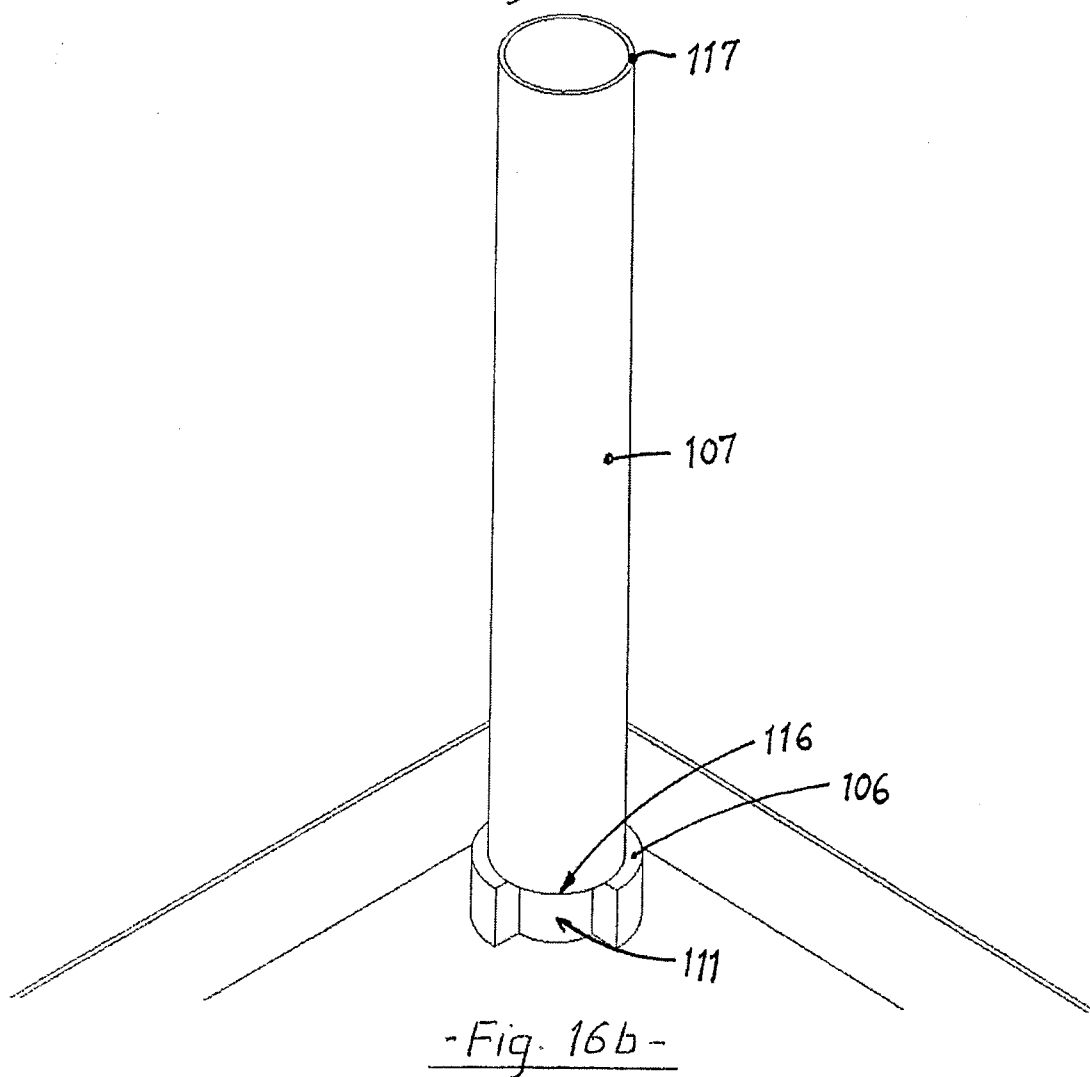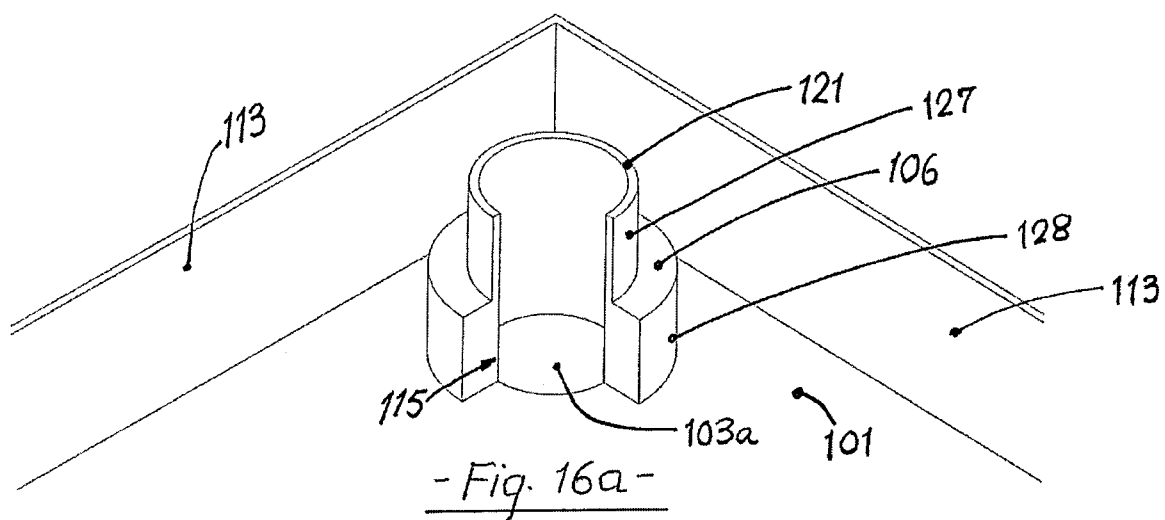


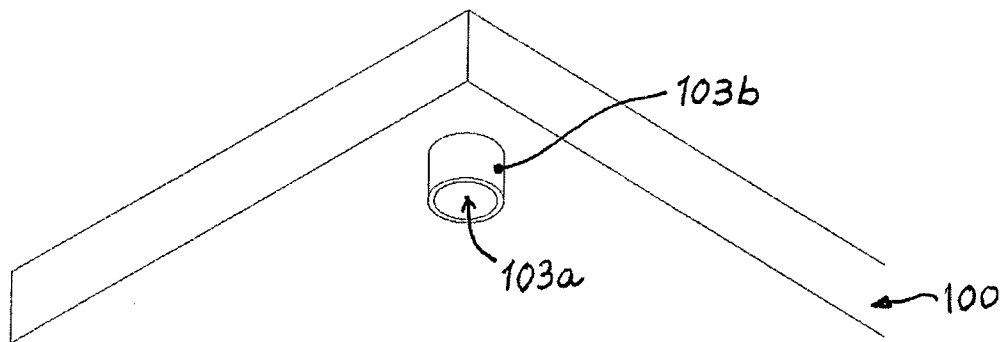

- Fig. 17 a -

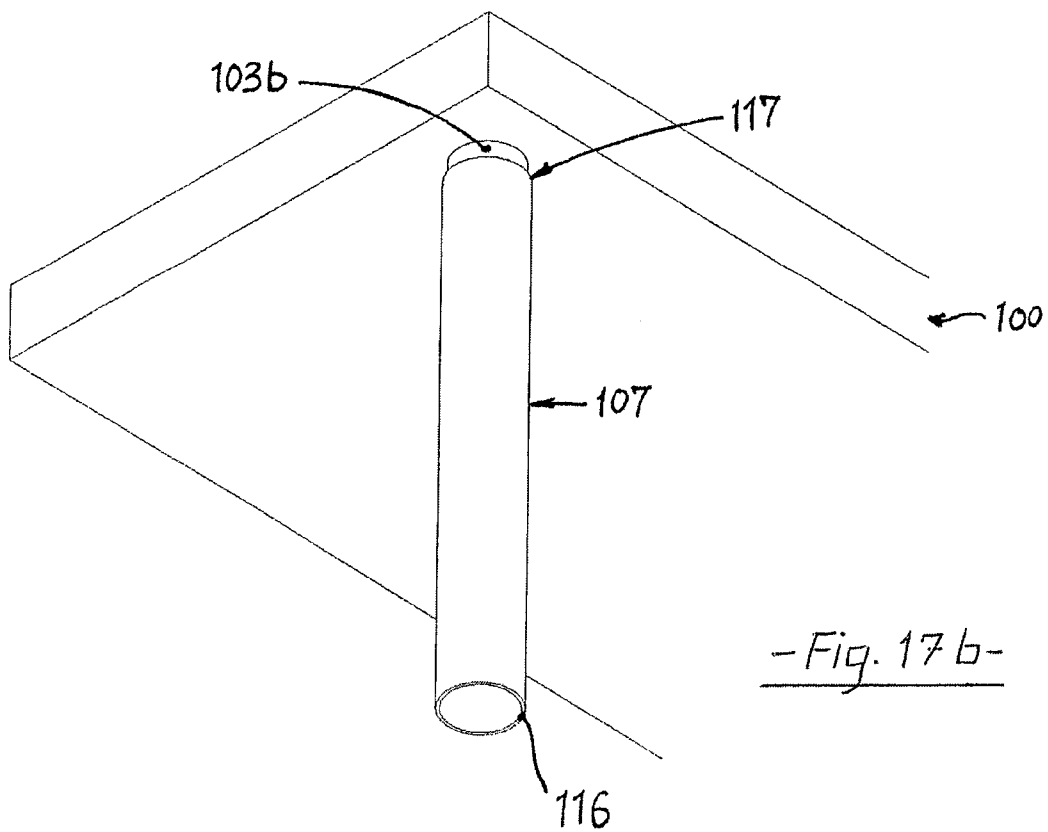

- Fig. 17 b -

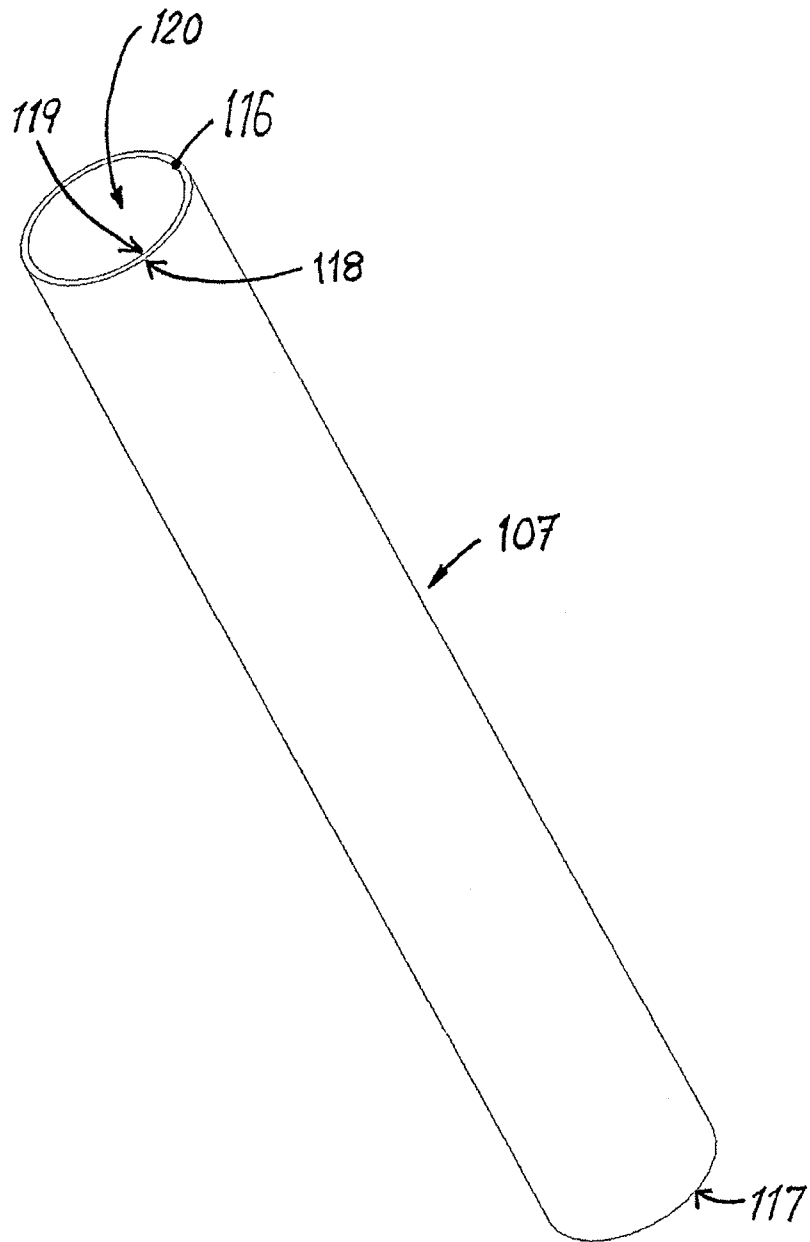

- Fig. 18 -

