



(11) (21) (C) **2,165,405**
(22) 1995/12/15
(43) 1996/06/17
(45) 2000/05/16

(72) Kanda, Toshiyuki, JP

(72) Takabayashi, Hiroshi, JP

(72) Onitsuka, Yoshihiro, JP


(73) CANON KABUSHIKI KAISHA, JP

(51) Int.Cl.⁶ G02F 1/1335

(30) 1994/12/16 (313694/1994) JP

(54) **DISPOSITIF D'ECLAIRAGE ET APPAREIL D'AFFICHAGE A
CRISTAUX LIQUIDES MUNI DE CE DISPOSITIF**

(54) **ILLUMINATION DEVICE AND LIQUID CRYSTAL DISPLAY
APPARATUS INCLUDING SAME**

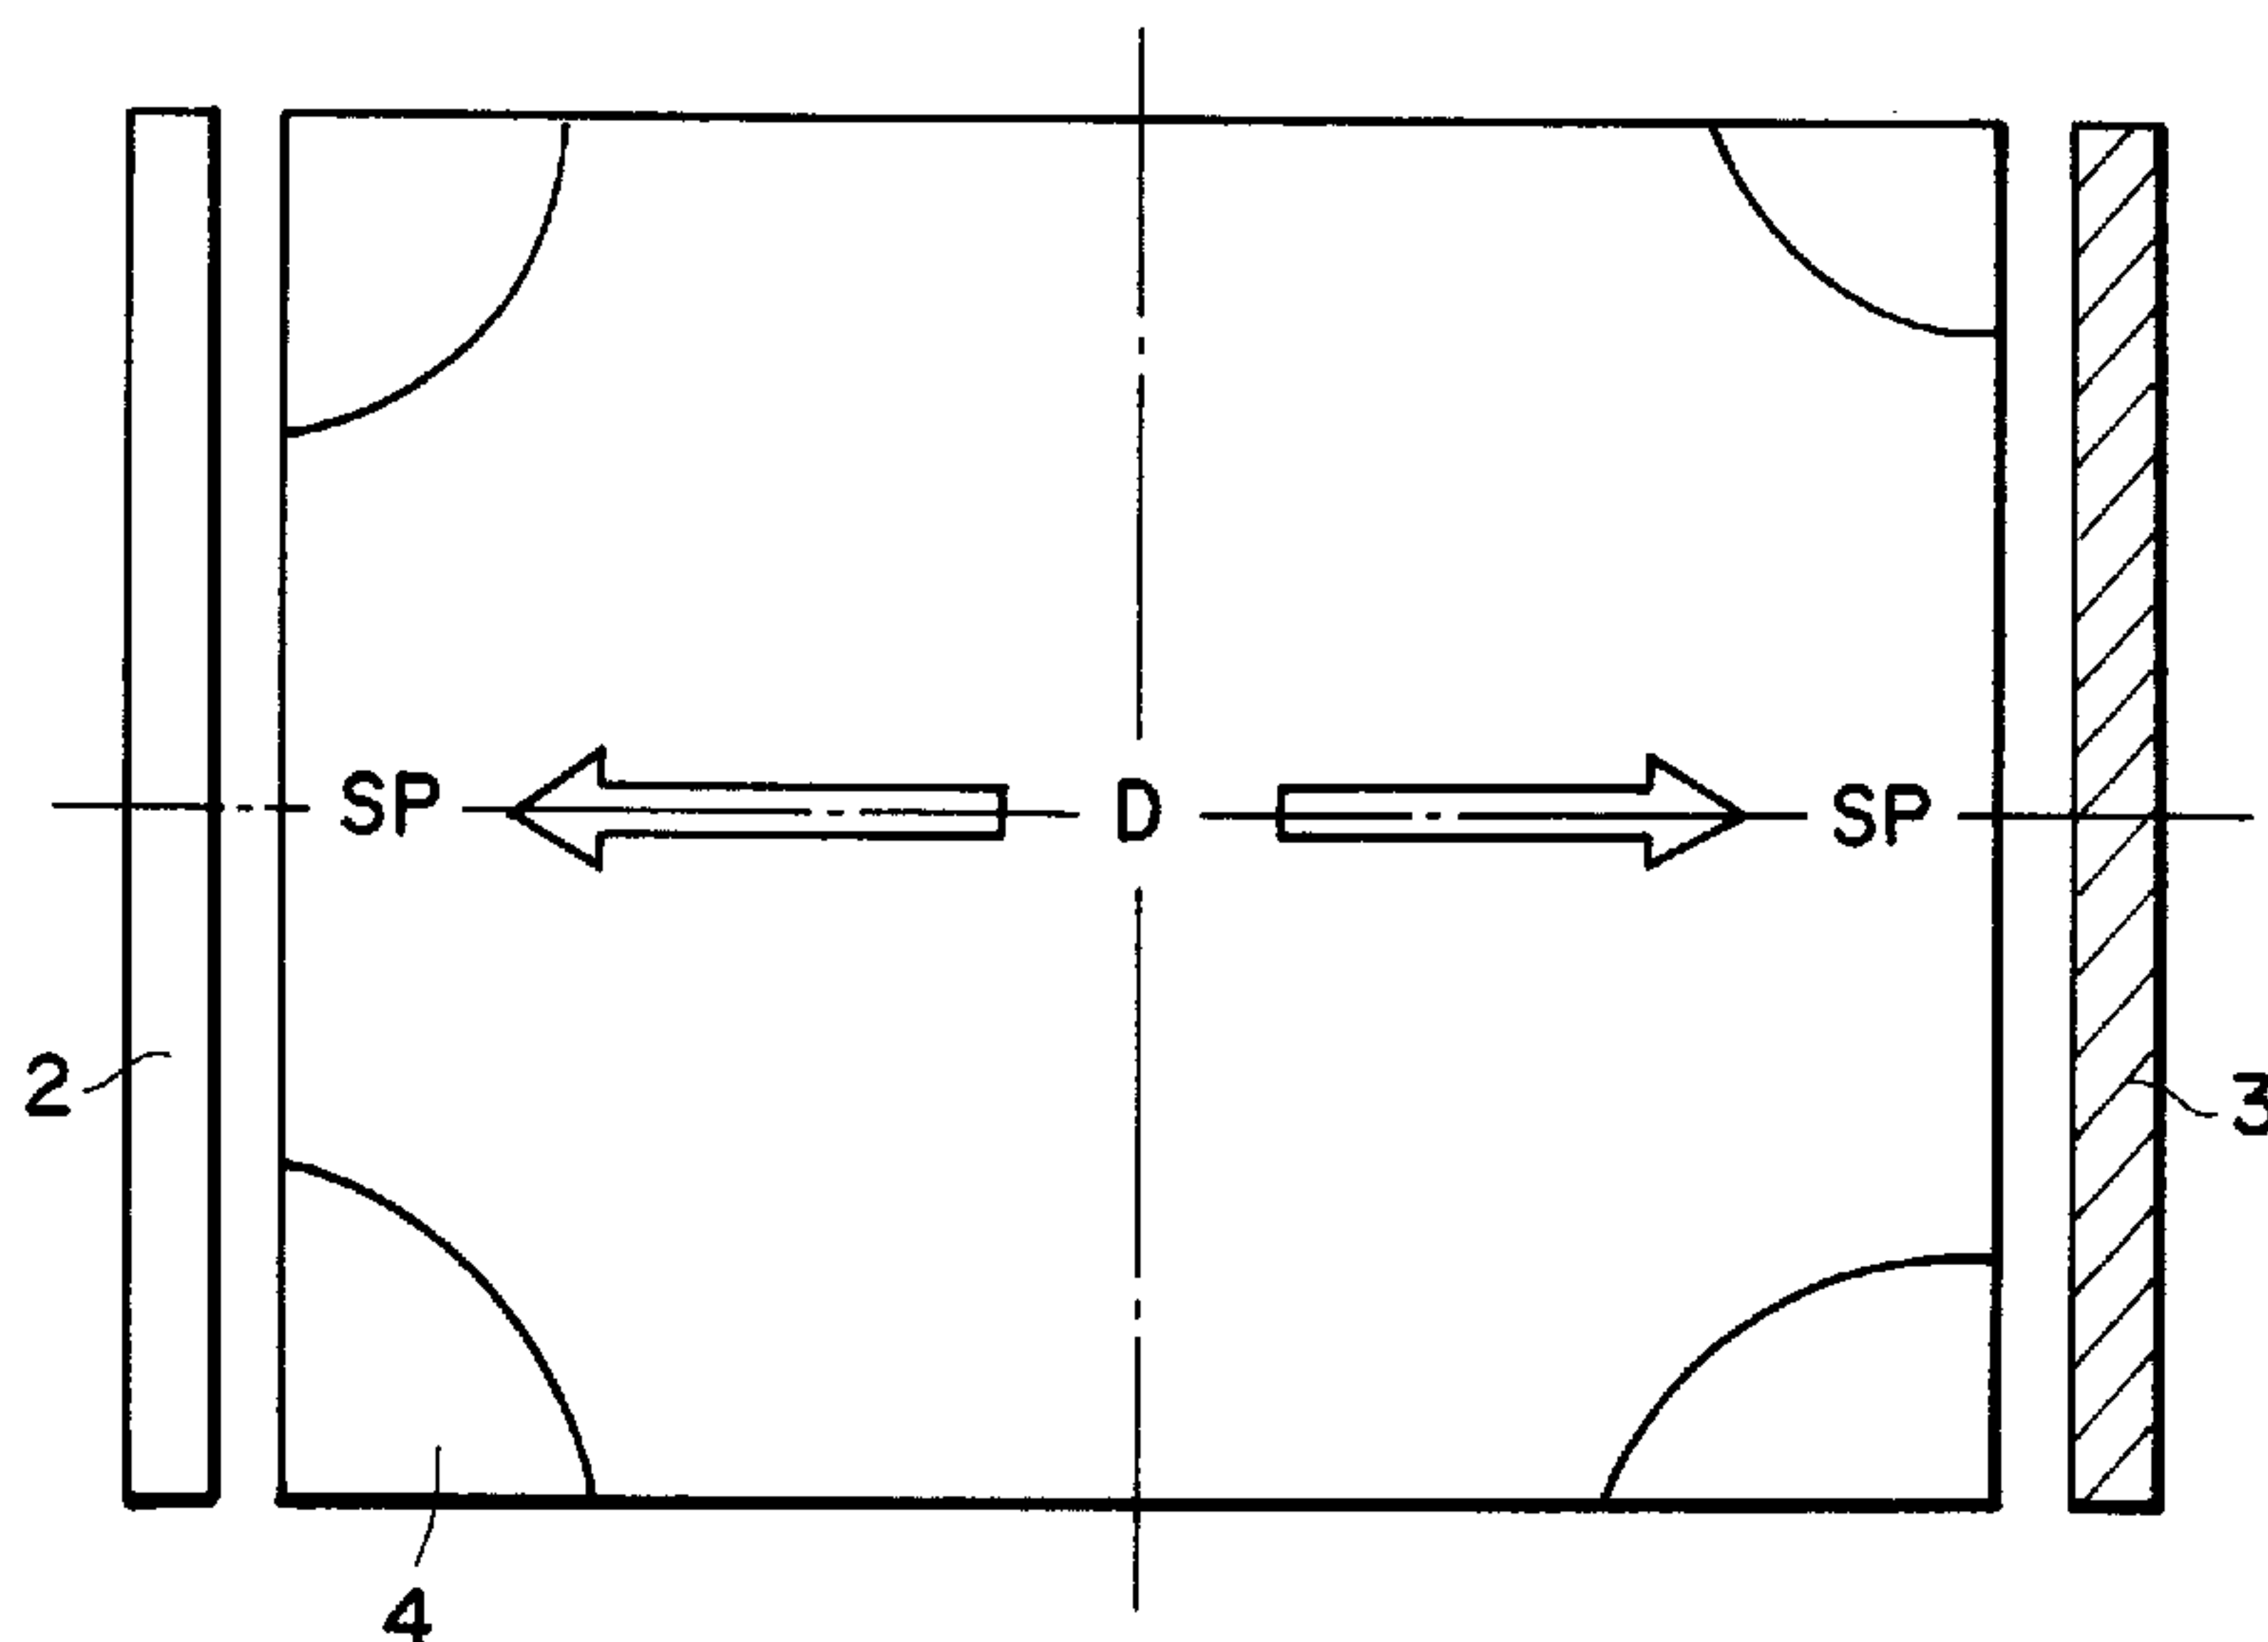

(57) An illumination device includes: a linear light source; first reflection means disposed opposite to and with a spacing from the linear light source; a light guide means disposed between the linear light source and the first reflection means; and a second reflection means disposed behind the light guide means so that light issued from the linear light source is transmitted through the light guide means and reflected by the first and second reflection means to be emitted in a direction forward from the light guide means. Further, a luminance distribution-adjusting means for reflecting light transmitted through the light guide means is disposed along the light guide means in a distribution density which varies at a changing rate free from discontinuity so as to adjust the luminance distribution of the light emitted in the direction forward from the light guide means. The illumination device may suitably be used as a backlight unit for a liquid crystal panel to provide a liquid crystal display apparatus having improved display qualities.

ABSTRACT OF THE DISCLOSURE

An illumination device includes: a linear light source; first reflection means disposed opposite to and with a spacing from the linear light source; a
5 light guide means disposed between the linear light source and the first reflection means; and a second reflection means disposed behind the light guide means so that light issued from the linear light source is transmitted through the light guide means and
10 reflected by the first and second reflection means to be emitted in a direction forward from the light guide means. Further, a luminance distribution-adjusting means for reflecting light transmitted through the light guide means is disposed along the light guide
15 means in a distribution density which varies at a changing rate free from discontinuity so as to adjust the luminance distribution of the light emitted in the direction forward from the light guide means.
The illumination device may suitably be used as a
20 backlight unit for a liquid crystal panel to provide a liquid crystal display apparatus having improved display qualities.

ILLUMINATION DEVICE AND
LIQUID CRYSTAL DISPLAY APPARATUS INCLUDING SAME

FIELD OF THE INVENTION AND RELATED ART

5 The present invention relates to an
illumination device used, e.g., as a backlight device
for illuminating a liquid crystal panel, and a liquid
crystal display apparatus including the illumination
device, more particularly a planar illumination device
10 improved in uniformity of luminance distribution.

Various proposals have been made regarding a
backlight device for illuminating a transmission-type
liquid crystal panel, etc., from the back side. As an
example thereof, Figure 1 shows a so-called edge-type
15 planar illumination device having light sources at
edges, and Figure 2 shows a section of a liquid
crystal display apparatus including such an
illumination device.

Referring to Figure 1, the illumination
20 device (backlight device) 1 includes a fluorescent
lamp 2 as a linear light source and a side reflection
plate 3 (as a first reflection means) disposed
opposite to and with a spacing from the fluorescent
lamp 2. Between the fluorescent lamp 2 and the side
25 reflection plate 3, a transparent acrylic resin plate
4 is disposed as a light guide means. The fluorescent
lamp 2 is covered with a fallen or sideways U-shaped

reflector 5 as shown in Figure 2. The reflector 5 is formed of an aluminum sheet, and the inner surface thereof is mirror-finished, e.g., by vapor deposition of silver. Behind the acrylic plate 4 and between the fluorescent lamp 2 and the side reflection plate 3, a rear reflection plate (second reflection means) 6 is disposed. The rear reflection plate 6 is formed of an aluminum sheet similarly as the reflector 5, and the inner face thereof is mirror-finished by vapor deposition of silver. On a front (or fore) side of the acrylic plate 4, a diffusion plate 7 is disposed so as to diffuse light from the acrylic plate 4. Further, before (on a front side (upper side in the figure) of) the diffusion plate 7, a liquid crystal panel P is disposed.

By the way, when such a backlight device 1 is driven to turn on the fluorescent lamp 2 without disposing a diffusive reflection pattern (luminance distribution adjusting means) 9 comprising a large number of dots 10, a major portion of light reflected from the reflection plate 6 is not emitted uniformly toward the liquid crystal panel P, and most light emitted toward the liquid crystal panel P comes from the vicinity of the fluorescent lamp 2 or the side reflection plate 3, thus failing to realize a uniform luminance of such a planar illumination device.

Accordingly, it has been practiced to dispose

a diffusive reflection pattern (luminance distribution adjusting means) 9 comprising a large number of dots 10 formed, e.g., by printing of a white paint on the back side of the acrylic plate 4 as shown in Figure 3, 5 thereby aiming at luminance uniformization by utilization of random reflection. These dots 10 are formed in a larger size at a central portion of the acrylic plate 4 and in a smaller size and with a larger spacing at positions approaching the edges of 10 the acrylic plate 4 as shown in Figure 3, wherein characters "SP" and "D" represent that the distribution density of the dots 10 is sparse and dense, respectively. The planar density distribution of the diffusive reflection pattern has been designed 15 to be sparse at edges and dense at a center, respectively, of the acrylic plate 4 as shown in Figure 4. Further, the density distribution in a section including the oppositely disposed fluorescent lamp 2 and the side reflection plate 3 has been one 20 represented by a broken line shown in Figure 5 showing a lowest density in proximity to the edges of the acrylic plate 4 and a density which increases proportional to a distance from the edges of the acrylic plate 4. As a result, a larger amount of 25 light is emitted in a fore direction from the acrylic plate 4 at a position with a higher density of the diffusive reflection pattern 9 (or dots 10 thereof)

and a smaller amount of light is emitted at a position with a lower density of the diffusive reflection pattern 9. Incidentally, the above-described distribution density represents (or is based on) an areal ratio of a portion occupied with the diffusive reflection pattern 9 in a unit area of the light guide means (acrylic plate) 4. An iso-(distribution) density curve represents a line (or curved line) connecting points of identical distribution density of the diffusive reflection pattern 9. These also hold true with the other Figures relating to distribution densities of a diffusive reflection pattern and iso-distribution density curves thereof.

As a result, regarding light transmitted through the acrylic plate 4, a portion thereof is totally reflected by the acrylic plate 4, a portion thereof is reflected at random by the diffusive reflection pattern 9, and a further portion thereof is reflected by the reflection plates 3 and 6, thereby illuminating the liquid crystal panel P.

However, in the above-described illumination device (backlight device) designed to dispose the diffusive reflection dots 10 so as to show a distribution density curve represented by the broken line in Figure 5 which includes an acute-angular change at a point of maximum distribution density of the diffusive reflection pattern, the luminance takes

the maximum at the point and bright lines occur from the point as the center, thereby lowering the display quality of a liquid crystal panel of which the resolution has been particularly measured in recent
5 years.

SUMMARY OF THE INVENTION

An object of the present invention is to provide an illumination device capable of providing a
10 uniform luminance while preventing the occurrence of bright lines.

Another object of the present invention is to provide a liquid crystal display apparatus showing good display qualities by using an illumination device
15 having uniformized luminance.

According to the present invention, there is provided an illumination device, comprising:

- a linear light source,
- a first reflection means disposed opposite to
20 and with a spacing from the linear light source,
- a light guide means disposed between the linear light source and the first reflection means,
- a second reflection means disposed behind the light guide means so that light issued from the linear
25 light source is transmitted through the light guide means and reflected by the first and second reflection means to be emitted in a direction forward from the

light guide means, and

a luminance distribution-adjusting means for reflecting light transmitted through the light guide means disposed along the light guide means in a
5 distribution density which varies at a changing rate free from discontinuity so as to adjust the luminance distribution of the light emitted in the direction forward from the light guide means.

According to another aspect of the present
10 invention, there is provided a liquid crystal display apparatus including an illumination device as described above and a liquid crystal panel disposed in front of the illumination device so as to be illuminated with light from the illumination device to
15 effect a display.

These and other objects, features and advantages of the present invention will become more apparent upon a consideration of the following description of the preferred embodiments of the
20 present invention taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a schematic perspective view
25 illustrating a structural outline of an illumination device.

Figure 2 is a sectional view of a liquid

crystal display apparatus including a section taken along line A-A in Figure 1.

Figure 3 is an illustration of an arrangement of diffusive reflection pattern dots in an illumination device.

Figure 4 is an illustration of a planar density distribution of diffusive reflection pattern dots in an illumination device.

Figure 5 illustrates diffusive reflection pattern distribution densities along a transverse section between a fluorescent lamp and a side reflection plate.

Figure 6 is a sectional view of a crystal display apparatus according to a second embodiment of the invention.

Figure 7 illustrates a diffusive reflection pattern distribution density along a transverse section between a fluorescent lamp and a side reflection plate according to the second embodiment.

Figure 8 is an illustration of a planar distribution density of a diffusive reflection pattern according to another embodiment of the present invention.

Figures 9 and 10 are respectively a plan view showing an arrangement of fluorescent lamps and side reflection plate(s) according to another embodiment.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The illumination device according to the present invention is principally characterized by having a linear light source and a first reflection means disposed opposite to each other with a light guide member disposed therebetween, and also a luminance distribution means disposed along or in superposition with the light guide member in a distribution density which varies without angular deflection or at a changing rate free from discontinuity along a linear horizontal direction including the linear light source, the light guide member and the first reflection means. It is particularly preferred that the distribution density curve forms a continuously changing curve.

More specifically, in the present invention, it is preferred that the luminance distribution-adjusting means is disposed to form a distribution density-changing curve as represented by a solid line in Figure 5 having a moderate maximum (or minimum) density portion characterized as a region providing a slope (density-changing rate per length along a transverse section) which is at most 50 % of a maximum slope along the curve for a length (including the maximum or minimum density portion) of at least 5 % of the entire transverse section length of the light guide means (i.e., nearly the transverse length of the

illumination device).

Due to the above-described structure, light issued from the linear light sources is transmitted through within the light guide member, and a portion thereof is reflected by the first and second reflection means to be emitted forward from the light guide member. Further, a portion of the light is reflected by the luminance distribution control or adjusting means to adjust the entire luminance distribution of light emitted in a direction forward from the light guide member. In this instance, as the luminance distribution adjusting means is disposed in a distribution density so as to provide a continuous changing rate, it is possible to suppress the occurrence of bright lines liable to occur at a point or line giving a discontinuity of such distribution density changing rate.

In the above-described structure, it is preferred that the luminance distribution adjusting means is disposed between the light guide means and the second reflection means in varying distribution densities so that the amount of light reflected on the side of the second reflection means and emitted in a forward direction from the light guide means is larger in a region of a higher distribution density and smaller in a region of a lower distribution density, respectively of the luminance distribution adjusting

means. Further, in this case, it is preferred that the luminance distribution adjusting means is disposed between the linear light source and the first reflection means in a distribution density such that the distribution density is lower in the vicinity of the linear light source than in the vicinity of the first reflection means and becomes higher at a position leaving away from the linear light source and the first reflection means to assume a maximum without angular deflection. In this instance, the distribution densities of the luminance distribution adjusting means in the vicinities of the linear light source and the first reflection means, respectively, may be set depending on a difference in luminance between the light from the linear light source and the light reflected from the first reflection means. Further, the distribution density of the luminance distribution adjusting means may be designed to assume a maximum at a position which is at different distances from the linear light source and the first reflection means. Further, it is also preferred that the distribution density of the luminance distribution adjusting means is increased at corners of the light guide means.

Alternatively, it is also preferred in the present invention that the luminance distribution adjusting means is disposed on a fore side of the

light guide means and opposite the second reflection means in varying distribution densities so that the amount of light emitted in a forward direction from the light guide means is smaller in a region of a
5 higher distribution density and larger in a region of a lower distribution density, respectively of the luminance distribution adjusting means. In this case, it is preferred that the luminance distribution adjusting means is disposed between the linear light
10 source and the first reflection means in a distribution density such that the distribution density is higher in the vicinity of the linear light source than in the vicinity of the first reflection means and becomes lower at a position leaving away
15 from the linear light source and the first reflection means to assume a minimum without angular deflection.

The distribution densities of the luminance distribution adjusting means in the vicinities of the linear light source and the first reflection means,
20 respectively, may be set depending on a difference in luminance between the light from the linear light source and the light reflected from the first reflection means. It is also preferred in this case that the distribution density of the luminance
25 distribution adjusting means assumes a minimum at a position which is at different distances from the linear light source and the first reflection means.

It is further preferred that the distribution density of the luminance distribution adjusting means is lowered at corners of the light guide means.

In the present invention, the above-mentioned
5 luminance distribution adjusting means may preferably be constituted as a reflection pattern comprising a large number of dots causing random reflection of light incident thereto from the linear light source. Alternatively, the luminance distribution adjusting
10 means may be constituted as a mesh pattern causing random reflection of light incident thereto from the linear light source. The light guide means may be provided as a transparent sheet member of, e.g., an acrylic resin plate. Alternatively, the light guide
15 means may be provided as a space formed between the linear light source and the side reflection means.

Hereinbelow, some preferred embodiments of the present invention will be described more specifically with reference to the drawings.

20 (First Embodiment)

A first embodiment of the present invention will now be described with reference to Figure 5.

An illumination device (backlight device) according to this embodiment has an outer appearance
25 similar to that shown in Figures 1 and 2 including a rectangular light guide means 4 and a fluorescent lamp 2 and a side reflection plate 3 disposed along a pair

of parallel sides of the rectangular light guide means
4. However, the distribution density of the diffusive
reflection pattern 9 taken along a section including a
line A-A in Figure 1 is as shown in Figure 5 (solid
5 line). More specifically, the distribution density of
the diffusive reflection pattern 9 along a section
including the fluorescent lamp (linear light source) 2
and the side reflection plate (first reflection means)
3 disposed opposite to each other and passing through
10 a center of the illumination device is designed so
that the distribution density in the vicinity of the
fluorescent lamp 2 is lower than in the vicinity of
the side reflection plate 3 and becomes higher as the
position leaves away from the fluorescent lamp 2 and
15 the side reflection plate 3. Further, the
distribution density is designed to assume a maximum
(round peak) at a position which is shifted from the
exact central point of the acrylic plate (light guide
means) 4, i.e., the exact mid point between the
20 fluorescent lamp 2 and the side reflection plate 3,
toward the side reflection plate 3 side (right side).
In other words, the distance between the maximum
(peak) and the side reflection plate 3 is set to be
smaller than the distance between the maximum and the
25 fluorescent lamp 2, and the maximum is designed to
provide a gently varying changing rate in distribution
density free from discontinuity. The above-mentioned

setting of a lower distribution density in the vicinity of the fluorescent lamp 2 than in the vicinity of the side reflection plate is adopted in view of a smaller reflected light quantity from the side reflection plate 3 than the emitted light quantity from the fluorescent lamp 2. In other words, the distribution densities in the vicinities of the fluorescent lamp 2 and the side reflection plate 3 may be set depending on a difference in luminance of these members. The above-mentioned shift of the position of the maximum from the very center of the acrylic resin plate is determined also in view of the luminance difference.

According to this embodiment, the occurrence of bright lines on an illumination surface of an illumination device (backlight device) is suppressed to provide a uniform planar illumination device, thereby providing the liquid crystal panel with good display qualities. Further, according to this embodiment, a side reflection plate 3 is used instead of a fluorescent lamp, whereby it becomes possible to provide an inexpensive but high-luminance illumination device generating a relatively small generated heat quantity while it may depend on an areal size thereof.

(Second Embodiment)

Now, a second embodiment of the present invention will be described with reference to Figures

6 and 7, wherein identical members are denoted by identical numerals as in Figure 2 and detailed explanation thereof may be omitted.

With reference to Figure 6, an illumination
5 device 20 according to this embodiment is provided with a front or fore-side transmission plate 21 disposed in parallel with a rear reflection plate (reflection means) 6 and a space S formed as a light
10 guide means between the rear reflection plate 6 and the front transmission plate 21. The front transmission plate 2 is formed of a thin transparent acrylic resin plate, below which is disposed a reflection pattern (luminance distribution adjusting means) 22. In other words, the reflection pattern 21
15 is disposed on a fore-side of the light guide means (space S) so as to be opposite to the rear reflection plate 6. The reflection pattern 22 may for example be formed by vapor deposition of aluminum in the form of a mesh or dots in a distribution density such that a
20 smaller amount of light is emitted in a fore direction toward the liquid crystal panel P at a position of a higher distribution density and a larger amount of the light is emitted at a position of a lower distribution density.

25 The distribution density of the reflection pattern 22 is designed to be as shown in Figure 7. More specifically, the distribution density of the

reflection pattern 22 along a section including the
fluorescent lamp 2 and the side reflection plate
(first reflection means) 3 and a center of the
illumination device 20 is set to be higher in the
5 vicinity of the fluorescent lamp 2 than in the
vicinity of the side reflection plate 3 and become
higher at positions leaving away from the fluorescent
lamp 2 and the side reflection plate 3. Further, the
distribution density is designed to assume a minimum
10 at a position which is shifted from the very center of
the space S (light guide means), i.e., the very mid
point between the fluorescent lamp 2 and the side
reflection plate 3, toward the right side. In other
words, the minimum position-side reflection plate
15 distance is set to be smaller than the minimum
position-fluorescent lamp distance, and the minimum is
designed to provide a changing rate which varies
gently without discontinuity. The above-mentioned
setting of a higher distribution density in the
20 vicinity of the fluorescent lamp 2 than in the
vicinity of the side reflection plate is adopted in
view of a smaller reflected light quantity from the
side reflection plate 3 than the emitted light
quantity from the fluorescent lamp 2. In other words,
25 the distribution densities in the vicinities of the
fluorescent lamp 2 and the side reflection plate 3 may
be set depending on a difference in luminance of these

members. The above-mentioned shift of the position of the minimum from the very center of the acrylic resin plate is determined also in view of the luminance difference.

5 On the other hand, on a fore-side (upper side) of the front transmission plate 21, a prism sheet 23 is disposed so as to uniformize the directionality of illumination light. On the prism sheet 23, respective prisms are disposed so that the
10 extension direction of each prism ridge is parallel with the longitudinally extending directions of the fluorescent lamp 2. (In case of using 2 fluorescent lamps extending in directions crossing each other, another prism sheet may preferably be disposed in
15 superposition so that its prism ridge extension direction is in parallel with the longitudinal extension direction of the other fluorescent lamp.) Further, the respective prisms are so disposed that their apex angles are directed toward the front
20 transmission plate 21.

 In this embodiment, a liquid crystal display apparatus B₂ is constituted by the above-mentioned backlight device 20 and the liquid crystal panel P.

 According to this embodiment, the occurrence
25 of bright lines on an illumination surface of an illumination device (backlight device) is suppressed to provide a uniform planar illumination device,

thereby providing the liquid crystal panel with good display qualities. Further, according to this embodiment, a side reflection plate 3 is used instead of a fluorescent lamp, whereby it becomes possible to
5 provide an inexpensive but high-luminance illumination device generating a relatively small generated heat quantity while it may depend on an areal size thereof.

As described above, the diffusive reflection
10 pattern 9 is disposed in a distribution density as represented by a solid line shown in Figure 5 in the first embodiment, and the reflection pattern 22 is disposed in a distribution density as shown in Figure 7. However, they are not limitative. For example, in
15 case where the light guide means (acrylic plate 4 or light guide space S) provides four corner portions where the luminance is lowered, it is possible to provide a higher distribution density of the diffusive reflection pattern 9 than the surrounding regions in
20 the first embodiment, or it is possible to provide a lower distribution density of the reflection pattern 22 than the surrounding regions, thereby increasing the luminance of light emitted from such corner regions to moderate and substantially uniformize the
25 luminance distribution over the entire illumination surface (as shown in Figure 8). On the other hand, in case where there is a locally excessive luminance

portion, it is possible to lower the distribution density of the diffusive reflection pattern 9 in the first embodiment or it is possible to increase the distribution density of the reflection pattern 22 in
5 the second embodiment, respectively than in the surrounding region, thereby uniformizing the luminance distribution over the entire surface. Such an adjustment of the distribution density may be performed depending on the type (characteristic) and
10 disposition of the light source used.

In the above-embodiments, the (diffusive) reflection pattern has been generally described to be formed in a dot pattern but may also be formed in a mesh pattern.

15 Further, the light guide means has been described as an acrylic plate 4 in the first embodiment and a light guide space S in the second embodiment but it is also possible to use a light guide space in the first embodiment and a transparent
20 sheet member such as an acrylic plate in the second embodiment.

The above embodiments use one fluorescent lamp 2 and one side reflection plate 3, but this is not limitative. For example, as shown in Figure 9, it
25 is possible to dispose fluorescent lamps 2 on three sides of the light guide means 4 and a side reflection plate 3 on the remaining one side of the light guide

means 4. Alternatively, it is also possible to dispose fluorescent lamps 2 on neighboring two sides and side reflection plates 3 on the remaining two neighboring sides, respectively of the light guide means 4 as shown in Figure 10.

Also in these embodiments, each section including a fluorescent lamp 2, a side reflection plate 3 and a center of a light guide means 4 may preferably have a distribution density of the luminance distribution adjusting means which varies gently with a changing rate free from discontinuity. Figures 9 and 10 show embodiments wherein a reflection pattern in a distribution density as shown is disposed between a rear reflection plate and a light guide means. However, in case where such a reflection pattern is disposed on a fore side of the light guide means, it may be appropriate to adopt a distribution density pattern opposite to those shown in Figures 9 and 10, i.e., $D \rightarrow SP$ and $SP \rightarrow D$.

As described above, according to the present invention, it becomes possible to prevent the occurrence of bright lines on a planar illumination device to uniformize the luminance distribution.

Further, according to the present invention, by using such an illumination device having a uniformized luminance distribution as a backlight

21 65405

-21-

device of a liquid crystal panel, it becomes possible to improve the display qualities of the liquid crystal panel.

5

10

15

20

25

CLAIMS

1. An illumination device, comprising:

a linear light source,

a first reflection means disposed opposite to and
5 spaced from the linear light source,

a light guide means disposed between the linear
light source and the first reflections means,

a second reflection means disposed behind the light
guide means so that light issued from the linear light
10 source is transmitted through the light guide means and
reflected by the first and second reflection means to be
emitted from the light guide means in a forward
direction, and

a luminance distribution-adjusting means for
15 reflecting light transmitted through the light guide
means and disposed along the light guide means with a
distribution density which varies at a changing rate free
from discontinuity so as to adjust the luminance
distribution of the light emitted from the light guide
20 means in the forward direction;

said luminance distribution-adjusting means being
disposed between the light guide means and the second
reflection means with varying distribution densities so
that the amount of light reflected on the second
25 reflection means side and emitted from the light guide
means in a forward direction is larger in a region of a
higher distribution density and smaller in a region of a
lower distribution density, respectively, of the
luminance distribution-adjusting means for an identical
30 intensity of light incident thereto; and the distribution
density of the luminance distribution adjusting means is
increased at corners of the light guide means, whereby
the light emitted from the light guide means is made
uniform.

35 2. An illumination device, comprising:

a linear light source,

a first reflection means disposed opposite to and spaced from the linear light source,

a light guide means disposed between the linear light source and the first reflection means,

5 a second reflection means disposed behind the light guide means so that light issued from the linear light source is transmitted through the light guide means and reflected by the first and second reflection means to be emitted from the light guide means in a forward
10 direction, and

a luminance distribution-adjusting means for reflecting light transmitted through the light guide means and disposed along the light guide means with a distribution density which varies at a changing rate free
15 from discontinuity so as to adjust the luminance distribution of the light emitted from the light guide means in the forward direction;

said luminance distribution-adjusting means being disposed on a front side of the light guide means and
20 opposite the second reflection means with varying distribution densities so that the amount of light emitted from the light guide means in a forward direction is smaller in a region of a higher distribution density and larger in a region of a lower distribution density,
25 respectively, of the luminance distribution adjusting means for an identical intensity of light incident thereto; and the distribution density of the luminance distribution adjusting means is lowered at corners of the light guide means, whereby the light emitted from the
30 light guide means is made uniform.

3. An illumination device according to claim 1, wherein said luminance distribution adjusting means extends between the linear light source and the first reflection means in a distribution density such that the
35 distribution density is lower in the vicinity of the linear light source than in the vicinity of the first reflection means and becomes higher at a position farther

from the linear light source and the first reflection means to assume a maximum without angular deflection.

4. An illumination device according to claim 1, wherein the distribution densities of the luminance distribution adjusting means in the vicinities of the linear light source and the first reflection means, respectively, are set depending on a difference in luminance between the light from the linear light source and the light reflected from the first reflection means.

5. An illumination device according to claim 1, wherein the distribution density of the luminance distribution adjusting means assumes a maximum at a position which is at different distances from the linear light source and the first reflection means.

6. An illumination device according to claim 2, wherein said luminance distribution adjusting means extends between the linear light source and the first reflection means in a distribution density such that the distribution density is higher in the vicinity of the linear light source than in the vicinity of the first reflection means and becomes lower at a position farther from the linear light source and the first reflection means to assume a minimum without deflection.

7. An illumination device according to claim 2, wherein the distribution densities of the luminance distribution adjusting means in the vicinities of the linear light source and the first reflection means, respectively, are set depending on a difference in luminance between the light from the linear light source and the light reflected from the first reflection means.

8. An illumination device according to claim 2, wherein the distribution density of the luminance distribution adjusting means assumes a minimum at a position which is

at different distances from the linear light source and the first reflection means.

5 9. An illumination device according to claim 1 or 2, wherein said luminance distribution adjusting means comprises a plurality of dots reflecting light from the linear light source.

10 10. An illumination device according to claim 1 or 2, wherein said luminance distribution adjusting means is disposed in the form of a mesh reflecting light from the linear light source.

11. An illumination device according to claim 1 or 2, wherein said light guide means comprises an acrylic resin plate.

15 12. An illumination device according to claim 1 or 2, wherein said light guide means comprises a space formed between the linear light source and the first reflection means.

13. An illumination device, comprising:

a linear light source,

20 a first reflection means disposed opposite to and spaced from the linear light source,

a light guide means disposed between the linear light source and the first reflection means,

25 a second reflection means disposed behind the light guide means so that light issued from the linear light source is transmitted through the light guide means and reflected by the first and second reflection means to be emitted from the light guide means in a forward direction, and

30 a luminance distribution-adjusting means for reflecting light transmitted through the light guide means and disposed along the light guide means with a distribution density which varies at a changing rate free from discontinuity so as to adjust the luminance

distribution of the light emitted from the light guide means in the forward direction;

5 said light guide means being in the form of a rectangle, wherein said linear light source and said first reflection means are disposed opposite to each other across one set of parallel sides of the rectangle, and a second linear light source and a second first reflection means are disposed opposite to each other across a second set of parallel sides of the rectangle.

10 14. An illumination device, comprising:

 a linear light source,

 a first reflection means disposed opposite to and spaced from the linear light source,

15 a light guide means disposed between the linear light source and the first reflection means,

 a second reflection means disposed behind the light guide means so that light issued from the linear light source is transmitted through the light guide means and reflected by the first and second reflection means to be
20 emitted from the light guide means in a forward direction, and

 a luminance distribution-adjusting means for reflecting light transmitted through the light guide means and disposed along the light guide means with a
25 distribution density which varies at a changing rate free from discontinuity so as to adjust the luminance distribution of the light emitted from the light guide means in the forward direction;

30 said light guide means being in the form of rectangle, wherein said linear light source and said first reflection means are disposed opposite to each other across one set of parallel sides of the rectangle, and other linear light sources are disposed on the other sides of the rectangle.

35 15. An illumination device, comprising:

 a linear light source,

a first reflection plate disposed opposite to and spaced from the linear light source,

a light guide member disposed between the linear light source and the first reflection plate,

5 a second reflection plate disposed behind the light guide member, and

10 a reflection pattern disposed between the light guide member and the second reflection plate comprising a plurality of dots disposed with a varying distribution density such that the distribution density is lower in the vicinity of the linear light source than in the vicinity of the first reflection plate and becomes higher at a position farther from the linear light source and the first reflection plate to assume a maximum density
15 which is free from angular deflection,

whereby light issued from the linear light source is transmitted through the light guide member and reflected by the first and second reflection plates and the reflection pattern so as to be emitted from the light
20 guide member in a forward direction,

said reflection pattern being disposed between the light guide member and the second reflection plate with varying distribution densities so that the amount of light reflected on the second reflection plate side and emitted from the light guide member in a forward
25 direction is larger in a region of a higher distribution density and smaller in a region of a lower distribution density, respectively, of the reflection pattern for an identical intensity of light incident thereto; and the
30 distribution density of the reflection pattern is increased at corners of the light guide member, whereby the light emitted from the light guide member is made uniform.

16. An illumination device, comprising:

35 a linear light source,

a first reflection plate disposed opposite to and spaced from the linear light source,

a light guide member disposed between the linear light source and the first reflection plate,

a second reflection plate disposed behind the light guide member, and

a reflection pattern disposed on a front side of the light guide member comprising a plurality of dots disposed with a varying distribution density such that the distribution density is higher in the vicinity of the linear light source than in the vicinity of the first reflection plate and becomes lower at a position farther from the linear light source and the first reflection plate so as to assume a minimum density which is free from angular deflection,

whereby light issued from the linear light source is transmitted through the light guide member and reflected by the first and second reflection plates and the reflection pattern so as to be emitted from the light guide member in a forward direction;

said reflection pattern being disposed on a front side of the light guide member and opposite the second reflection plate with varying distribution densities so that the amount of light emitted from the light guide member in a forward direction is smaller in a region of a higher distribution density and larger in a region of a lower distribution density, respectively, of the reflection pattern for an identical intensity of light incident thereto, and the distribution density of the reflection pattern is lowered at corners of the light guide member, whereby the light emitted from the light guide member is made uniform.

17. An illumination device, comprising:

a linear light source,
a first reflection plate disposed opposite to and spaced from the linear light source,
a light guide member disposed between the linear light source and the first reflection plate,
a second reflection plate disposed behind the light guide member, and

a reflection pattern disposed between the light guide member and the second reflection plate comprising a

plurality of dots disposed with a varying distribution density such that the distribution density is lower in the vicinity of the first reflection plate and becomes higher at a position farther from the linear light source and the first reflection plate to assume a maximum density which is free from angular deflection,

whereby light issued from the linear light source is transmitted through the light guide member and reflected by the first and second reflection plates and the reflection pattern so as to be emitted from the light guide member in a forward direction;

said light guide member being in the form of a rectangle, wherein said linear light source and said first reflection plates are disposed opposite to each other across one set of parallel sides of the rectangle, and a second linear light source and a second first reflection plate are disposed opposite to each other across a second set of parallel sides of the rectangle.

18. An illumination device, comprising:

a linear light source,

a first reflection plate disposed opposite to and spaced from the linear light source,

a light guide member disposed between the linear light source and the first reflection plate,

a second reflection plate disposed behind the light guide member, and

a reflection pattern disposed on a front side of the light guide member comprising a plurality of dots disposed with a varying distribution density such that the distribution density is higher in the vicinity of the linear light source than in the vicinity of the first reflection plate and becomes lower at a position farther from the linear light source and the first reflection plate to assume a minimum density which is free from angular deflection,

whereby light issued from the linear light source is transmitted through the light guide member and reflected by the first and second reflection plates and the

reflection pattern to be emitted from the light guide member in a forward direction;

5 said light guide member being in the form of a rectangle, wherein said linear light source and said first reflection plates are disposed opposite to each other across one set of parallel sides of the rectangle, and a second linear light source and a second first reflection plate are disposed opposite to each other across a second set of parallel sides of the rectangle.

10 19. An illumination device, comprising:

 a linear light source,

 a first reflection plate disposed opposite to and spaced from the linear light source,

15 a light guide member disposed between the linear light source and the first reflection plate,

 a second reflection plate disposed behind the light guide member, and

20 a reflection pattern disposed on a front side of the light guide member comprising a plurality of dots disposed with a varying distribution density such that the distribution density is higher in the vicinity of the linear light source than in the vicinity of the first reflection plate and becomes lower at a position farther from the linear light source and the first reflection plate to assume a minimum density which is free from angular deflection,

25 whereby light issued from the linear light source is transmitted through the light guide member and reflected by the first and second reflection plates and the reflection pattern to be emitted from the light guide member in a forward direction;

30 said light guide member being in the form of a rectangle, wherein said linear light source and said first reflection plate are disposed opposite to each other across one set of parallel sides of the rectangle, and other linear light sources are disposed on the other sides of the rectangle.

35

20. An illumination device, comprising:

a linear light source,

a first reflection plate disposed opposite to and spaced from the linear light source,

5 a light guide member disposed between the linear light source and the first reflection plate,

a second reflection plate disposed behind the light guide member, and

10 a reflection pattern disposed on a front side of the light guide member comprising a plurality of dots disposed with a varying distribution density such that the distribution density is higher in the vicinity of the linear light source than in the vicinity of the first reflection plate and becomes lower at a position farther
15 from the linear light source and the first reflection plate to assume a minimum density which is free from angular deflection,

whereby light issued from the linear light source is transmitted through the light guide member and reflected
20 by the first and second reflection plates and the reflection pattern to be emitted from the light guide member in a forward direction;

25 said light guide member being in the form of a rectangle, wherein said linear light source and said first reflection plate are disposed opposite to each other across one set of parallel sides of the rectangle, and other linear light sources are disposed on the other sides of the rectangle.

21. A liquid crystal display apparatus, comprising:

30 an illumination device according to any one of claims 1 to 20, inclusive, and

a liquid crystal panel disposed on a front side of the illumination device, which is adapted to be illuminated by the illumination device.

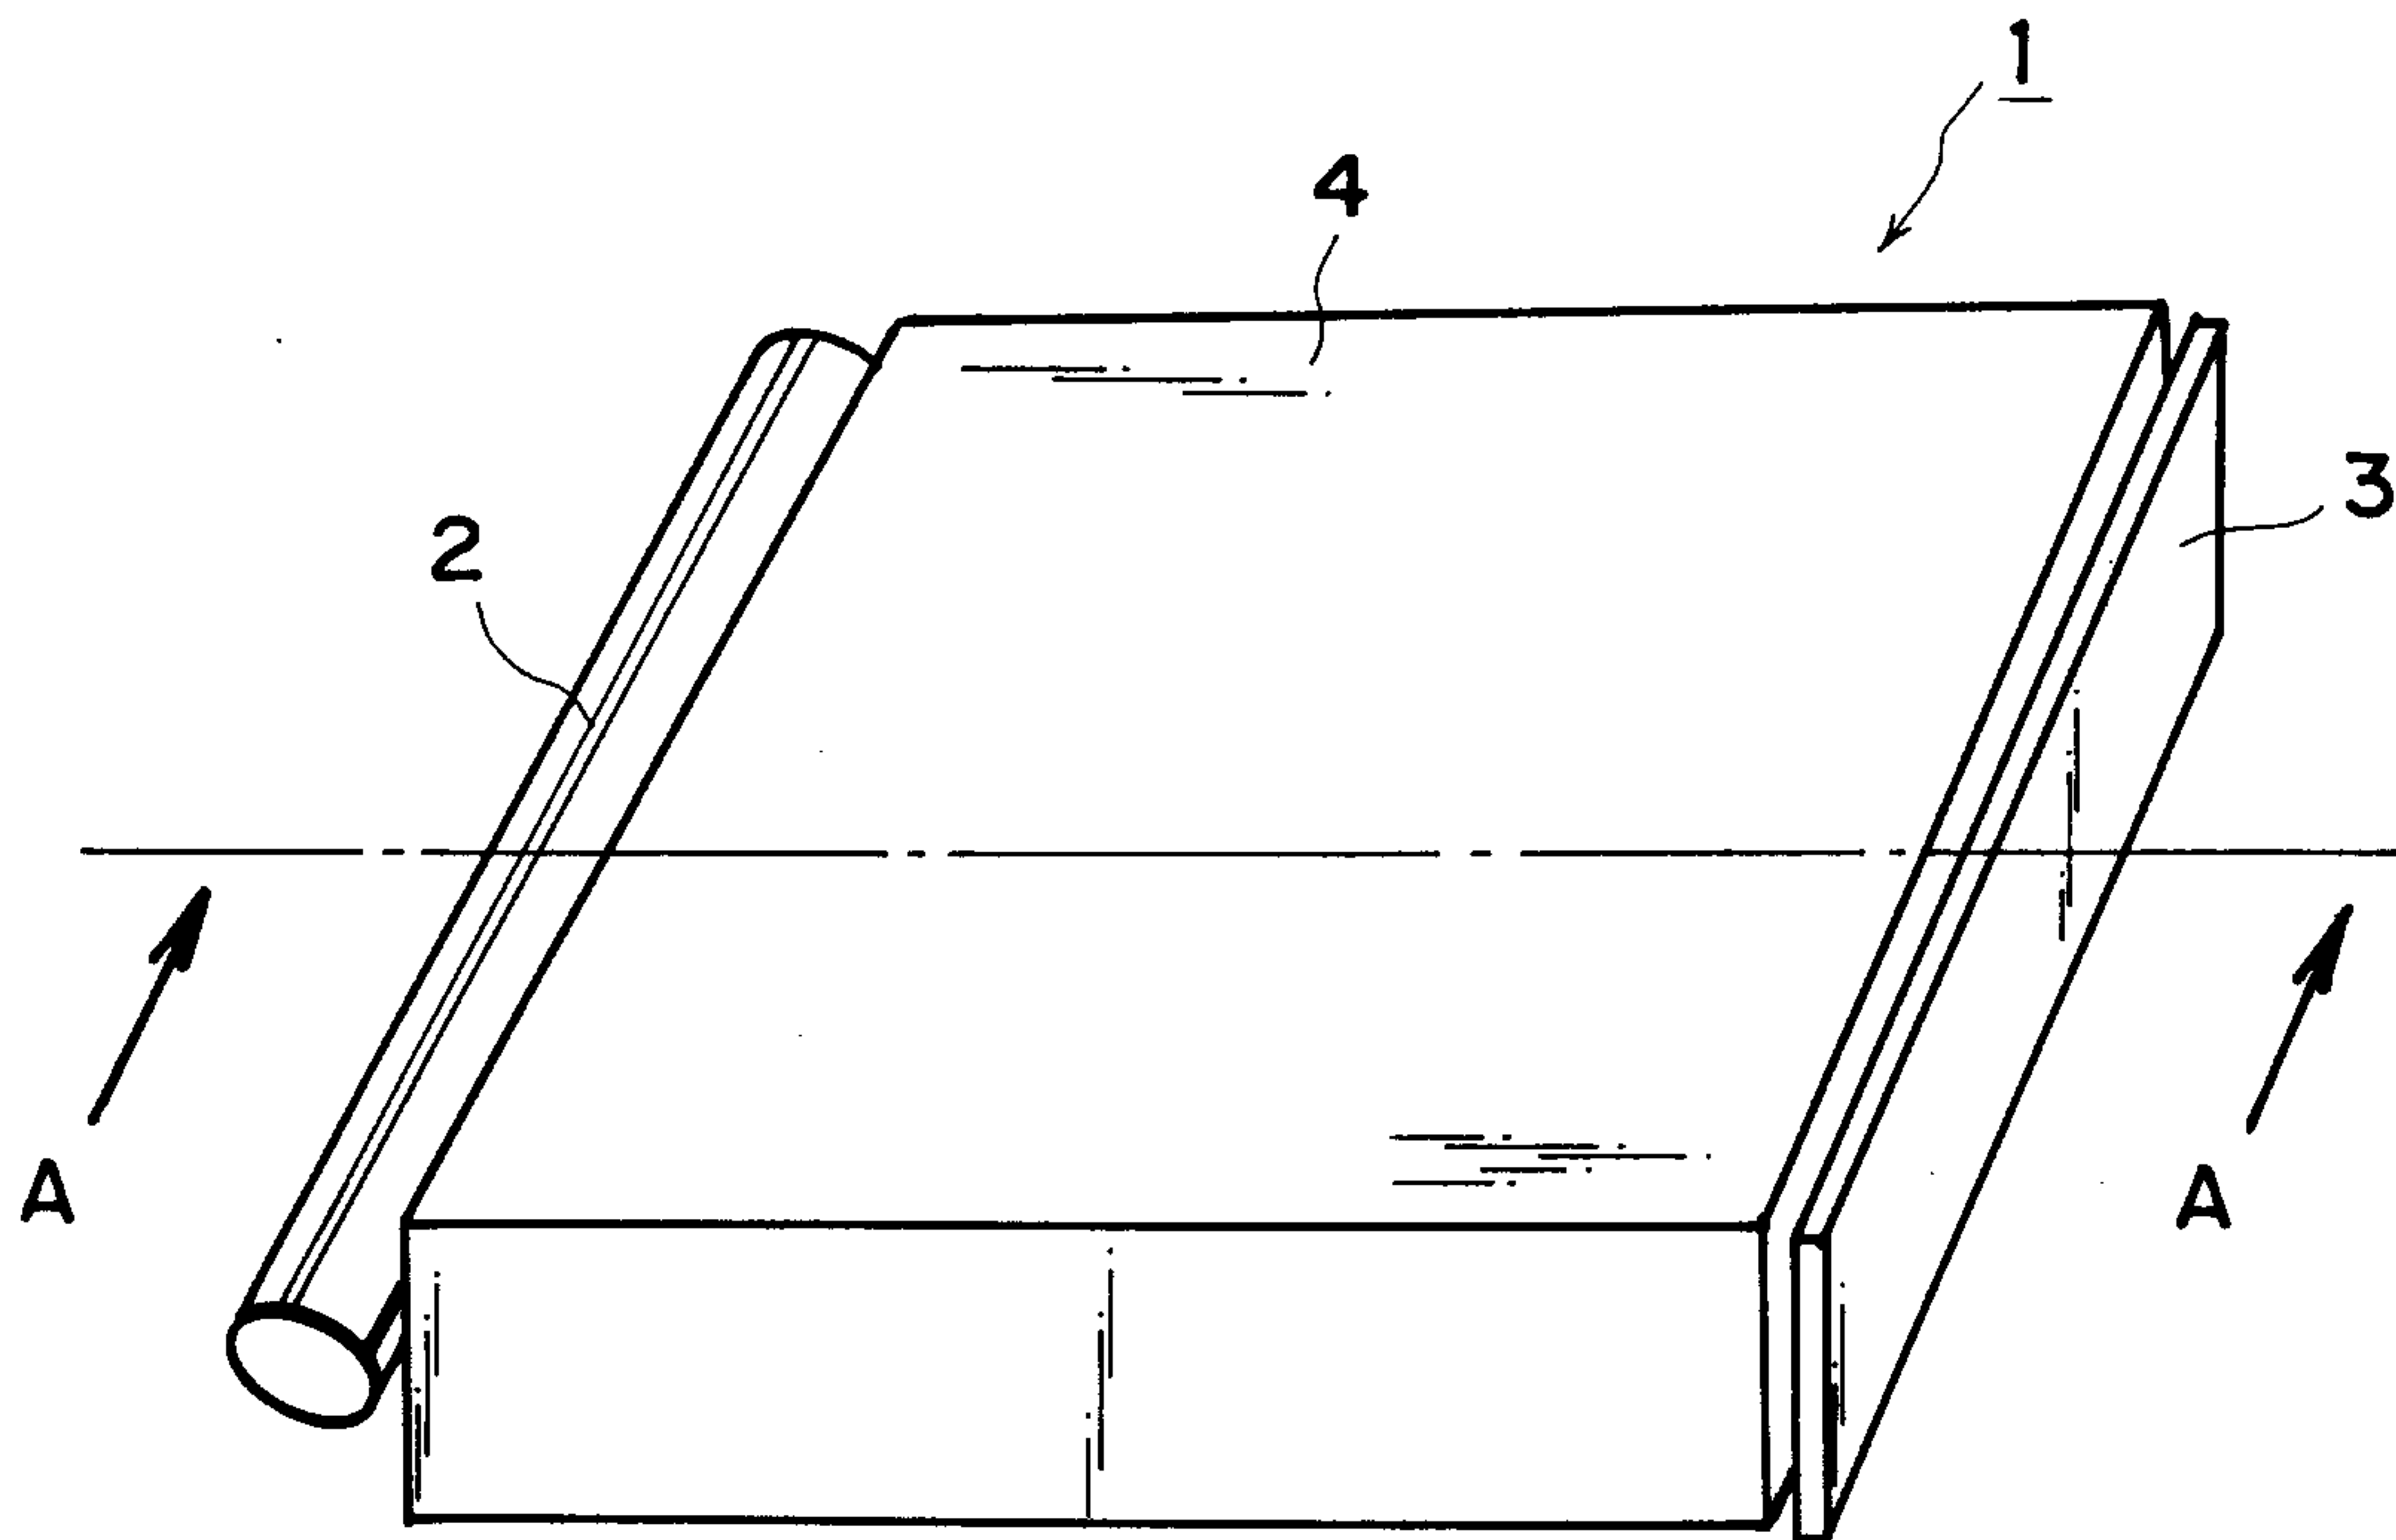


FIG. 1

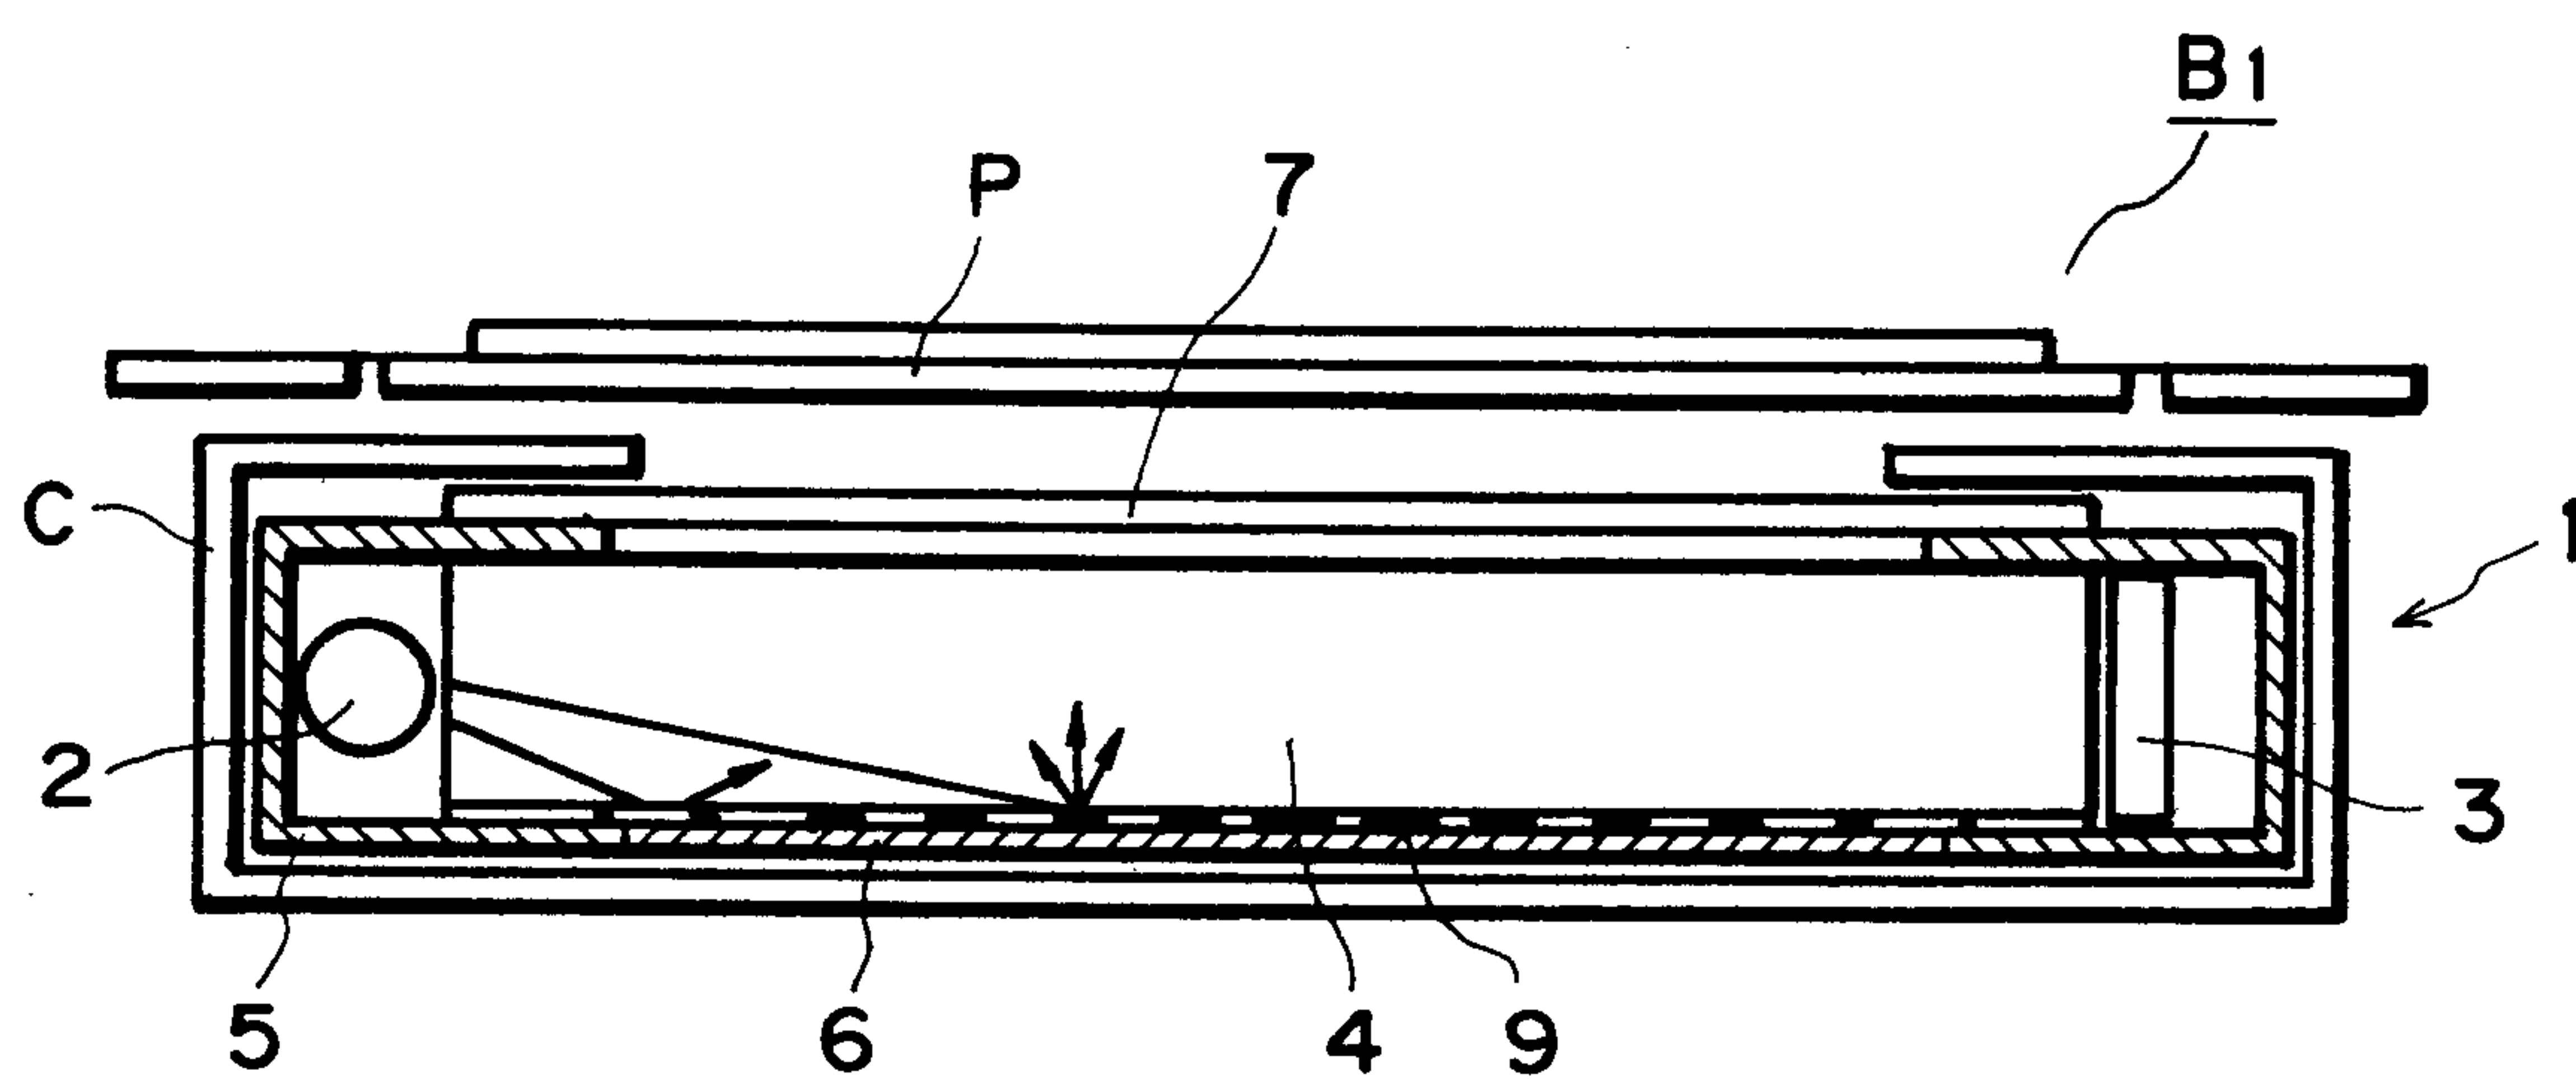


FIG. 2

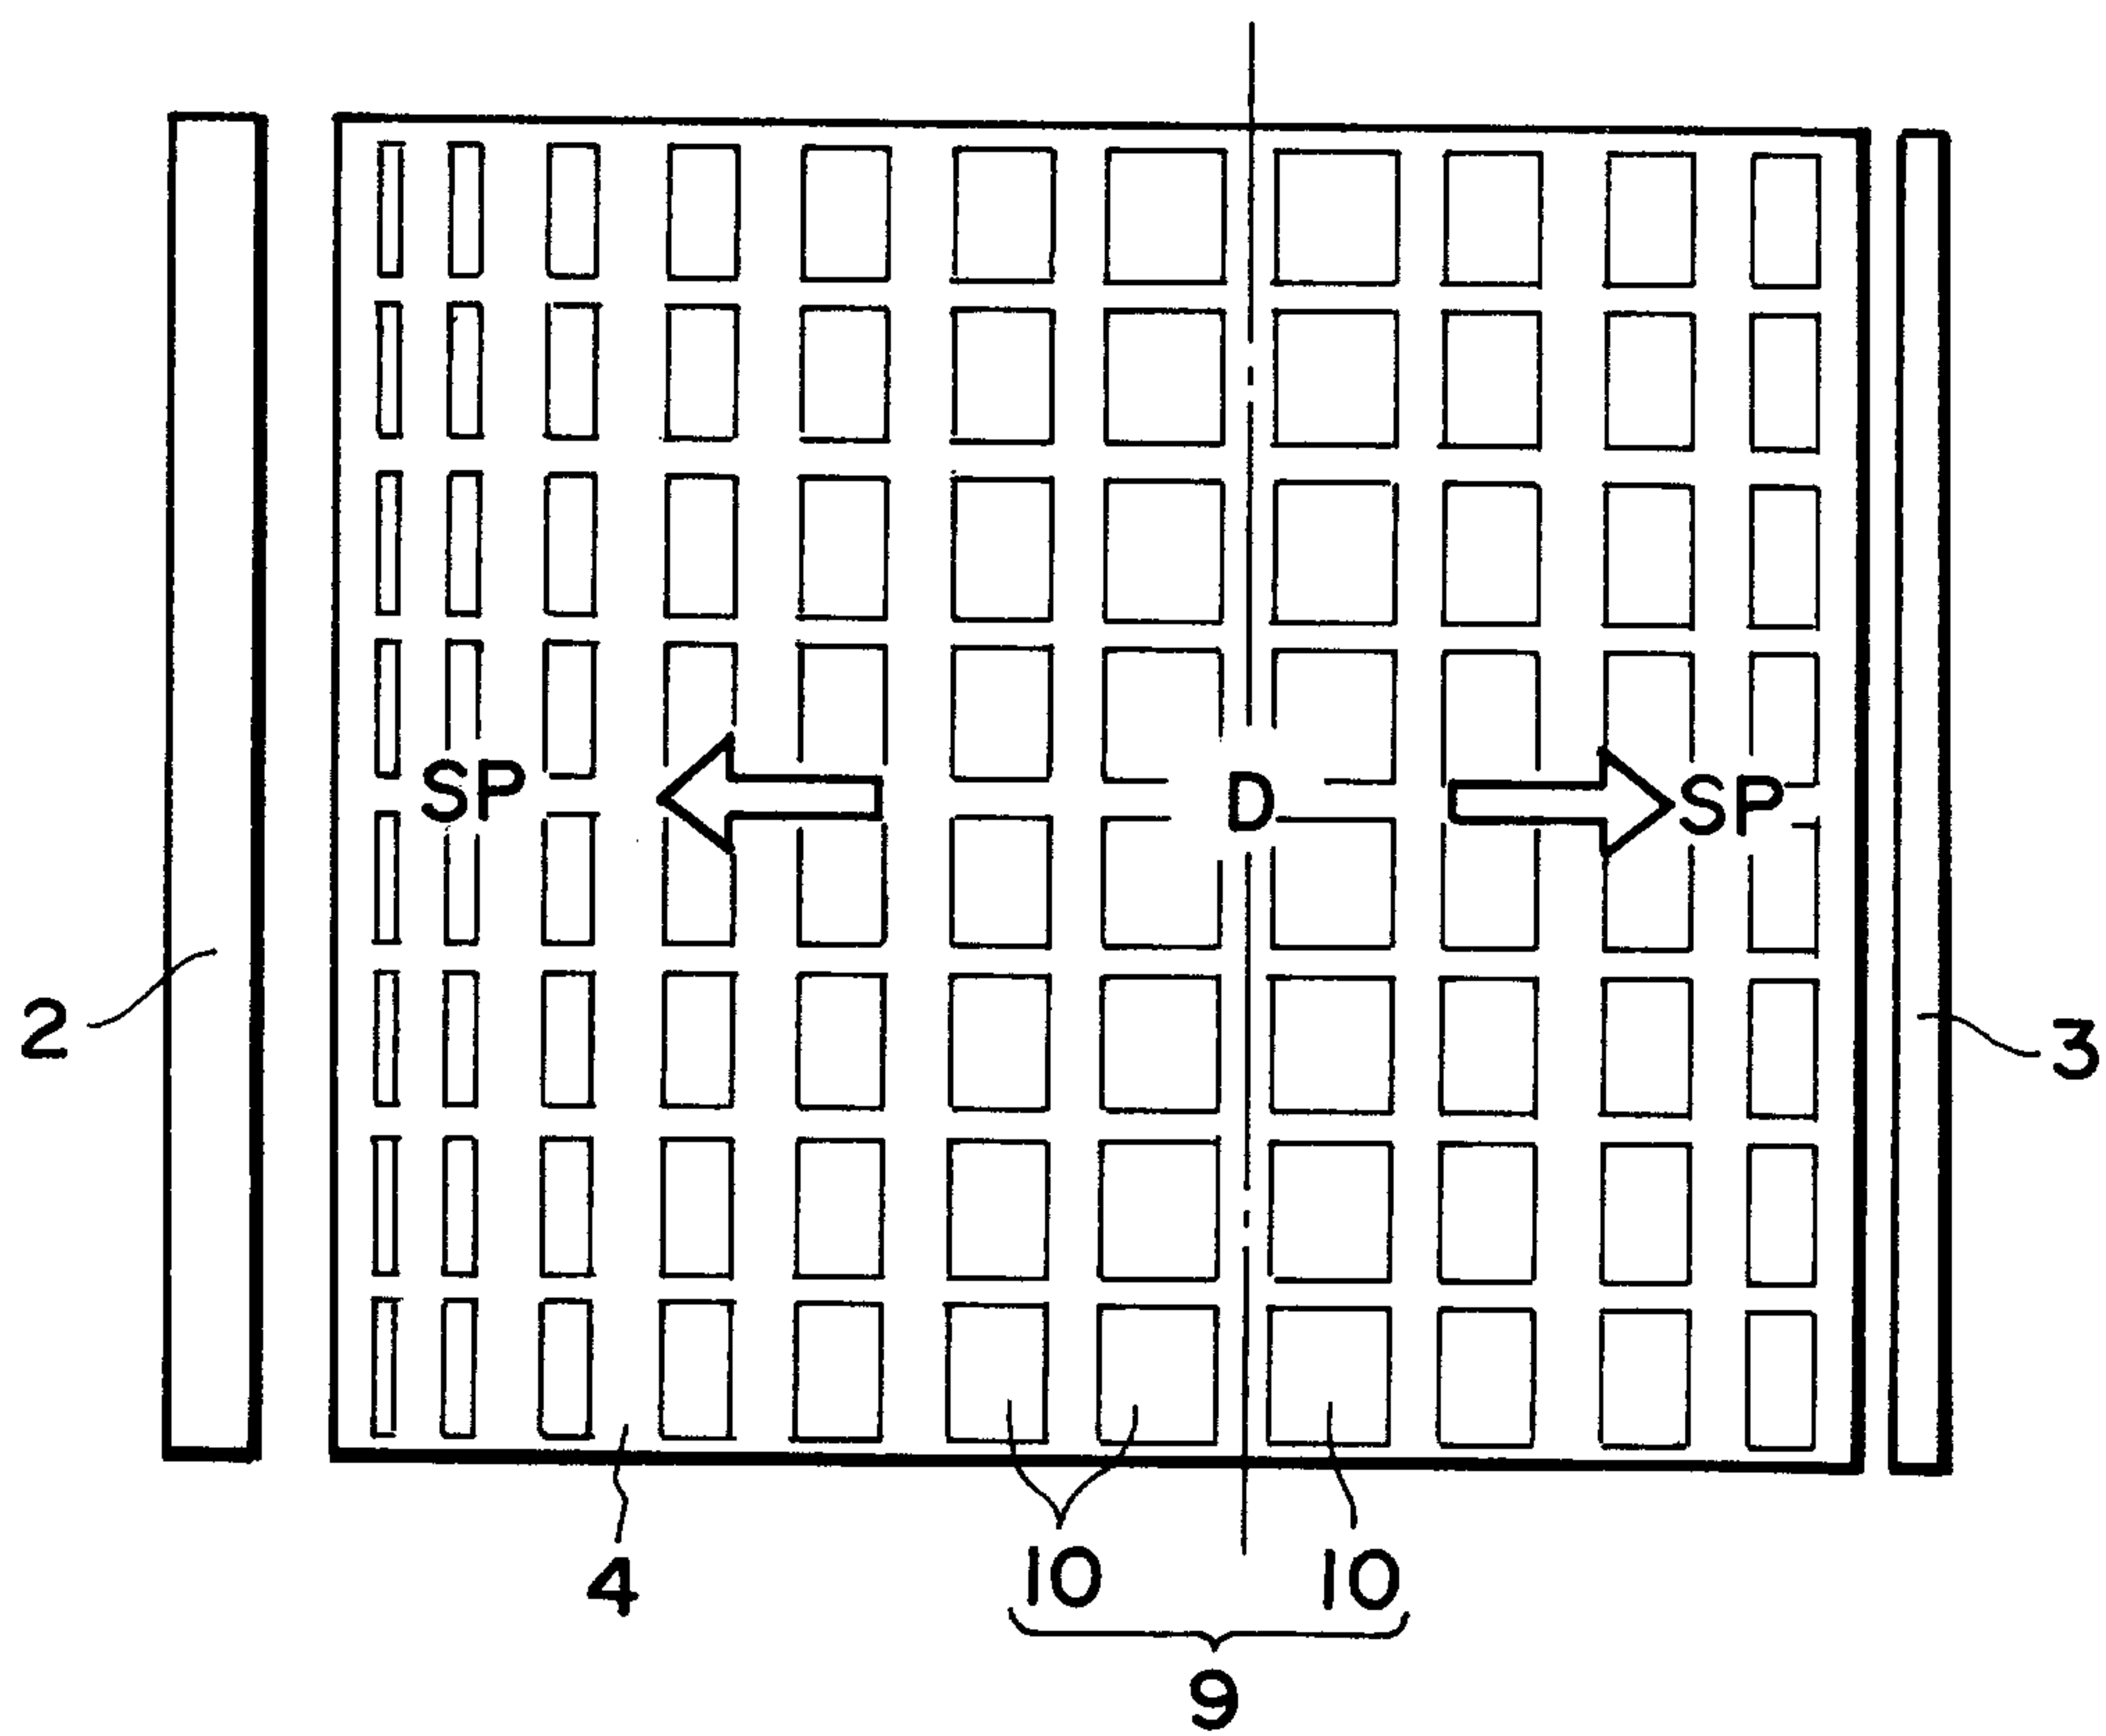


FIG. 3

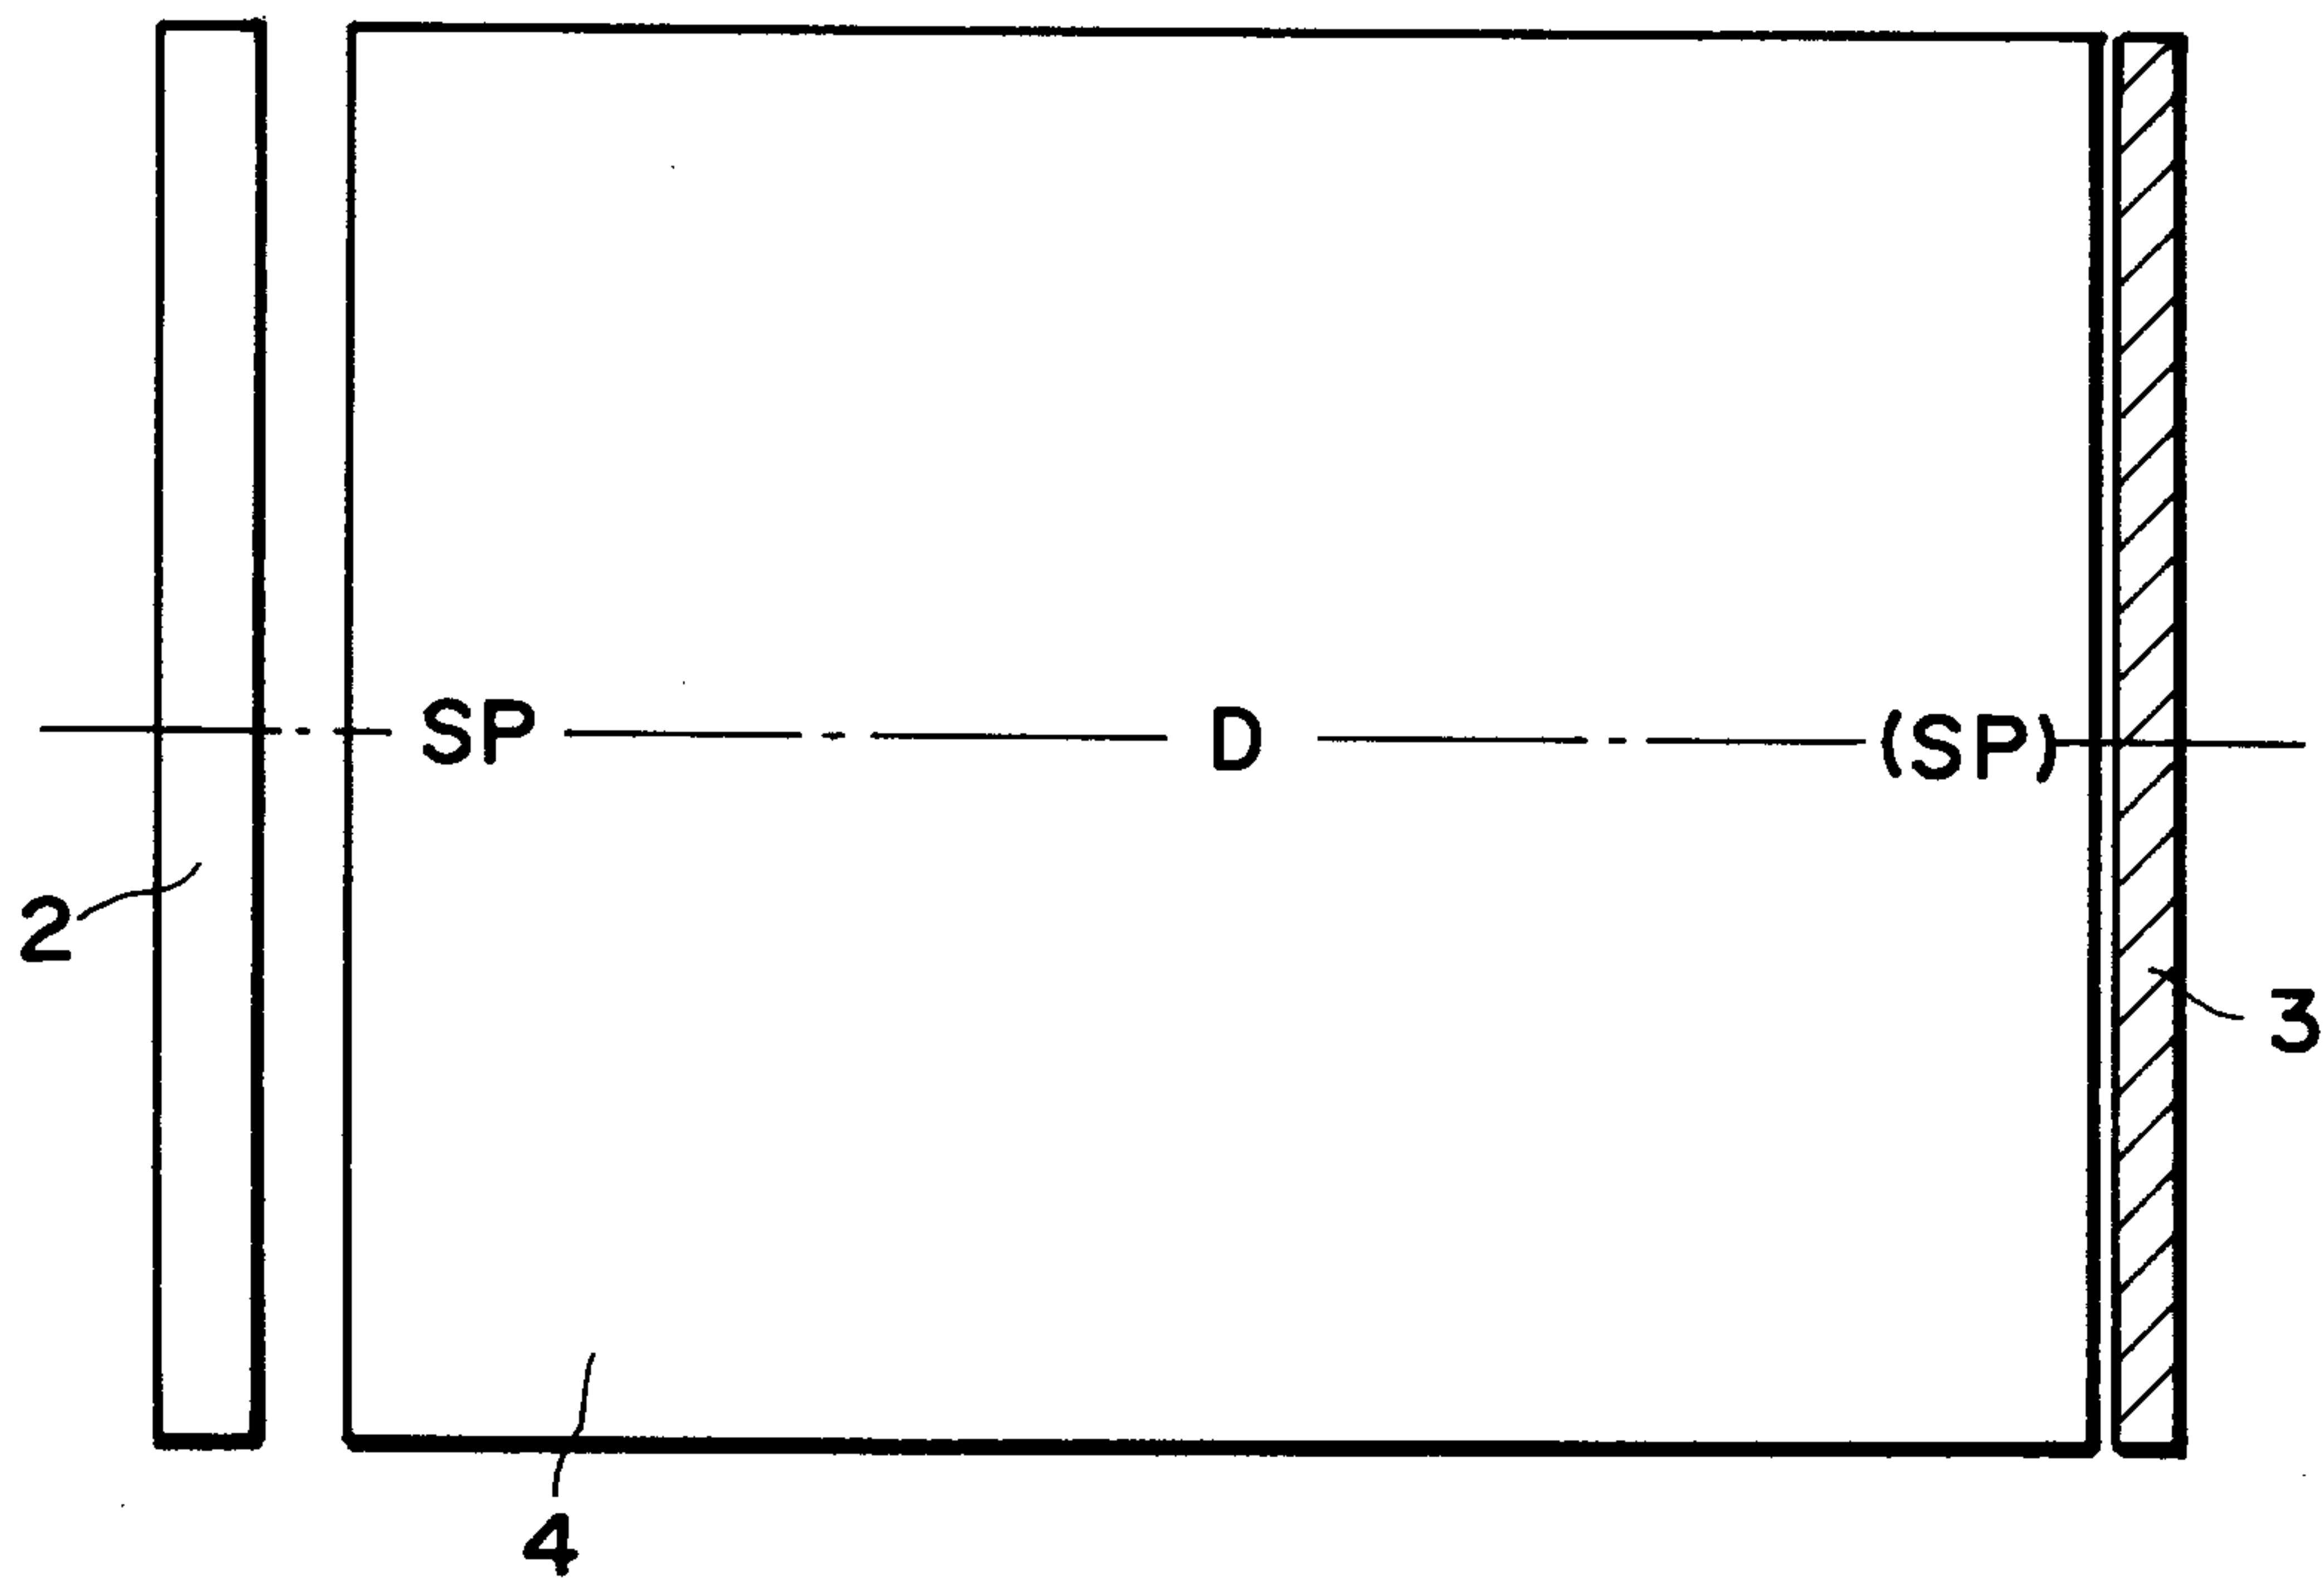


FIG. 4

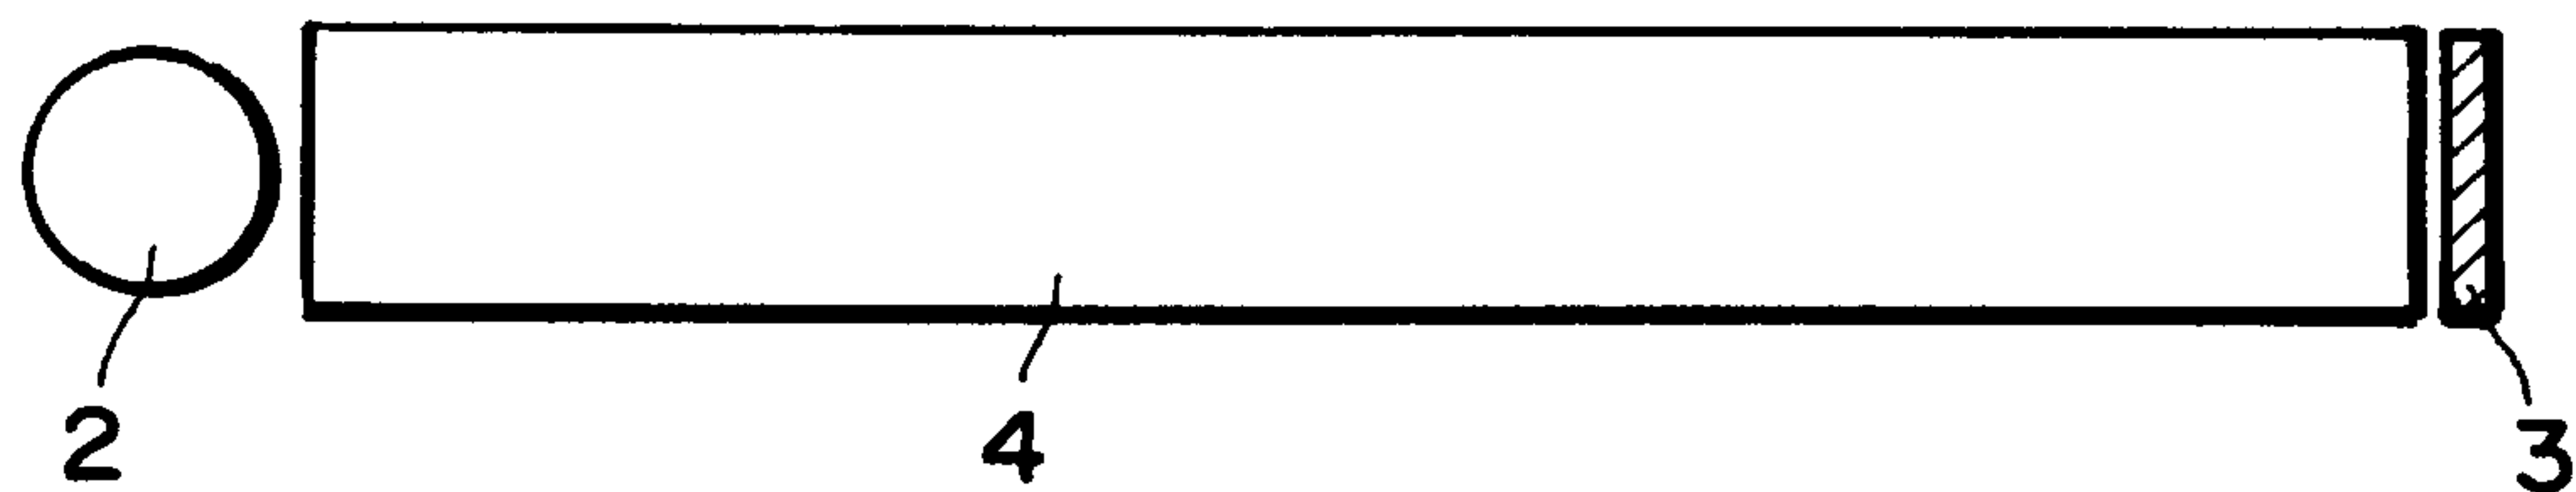
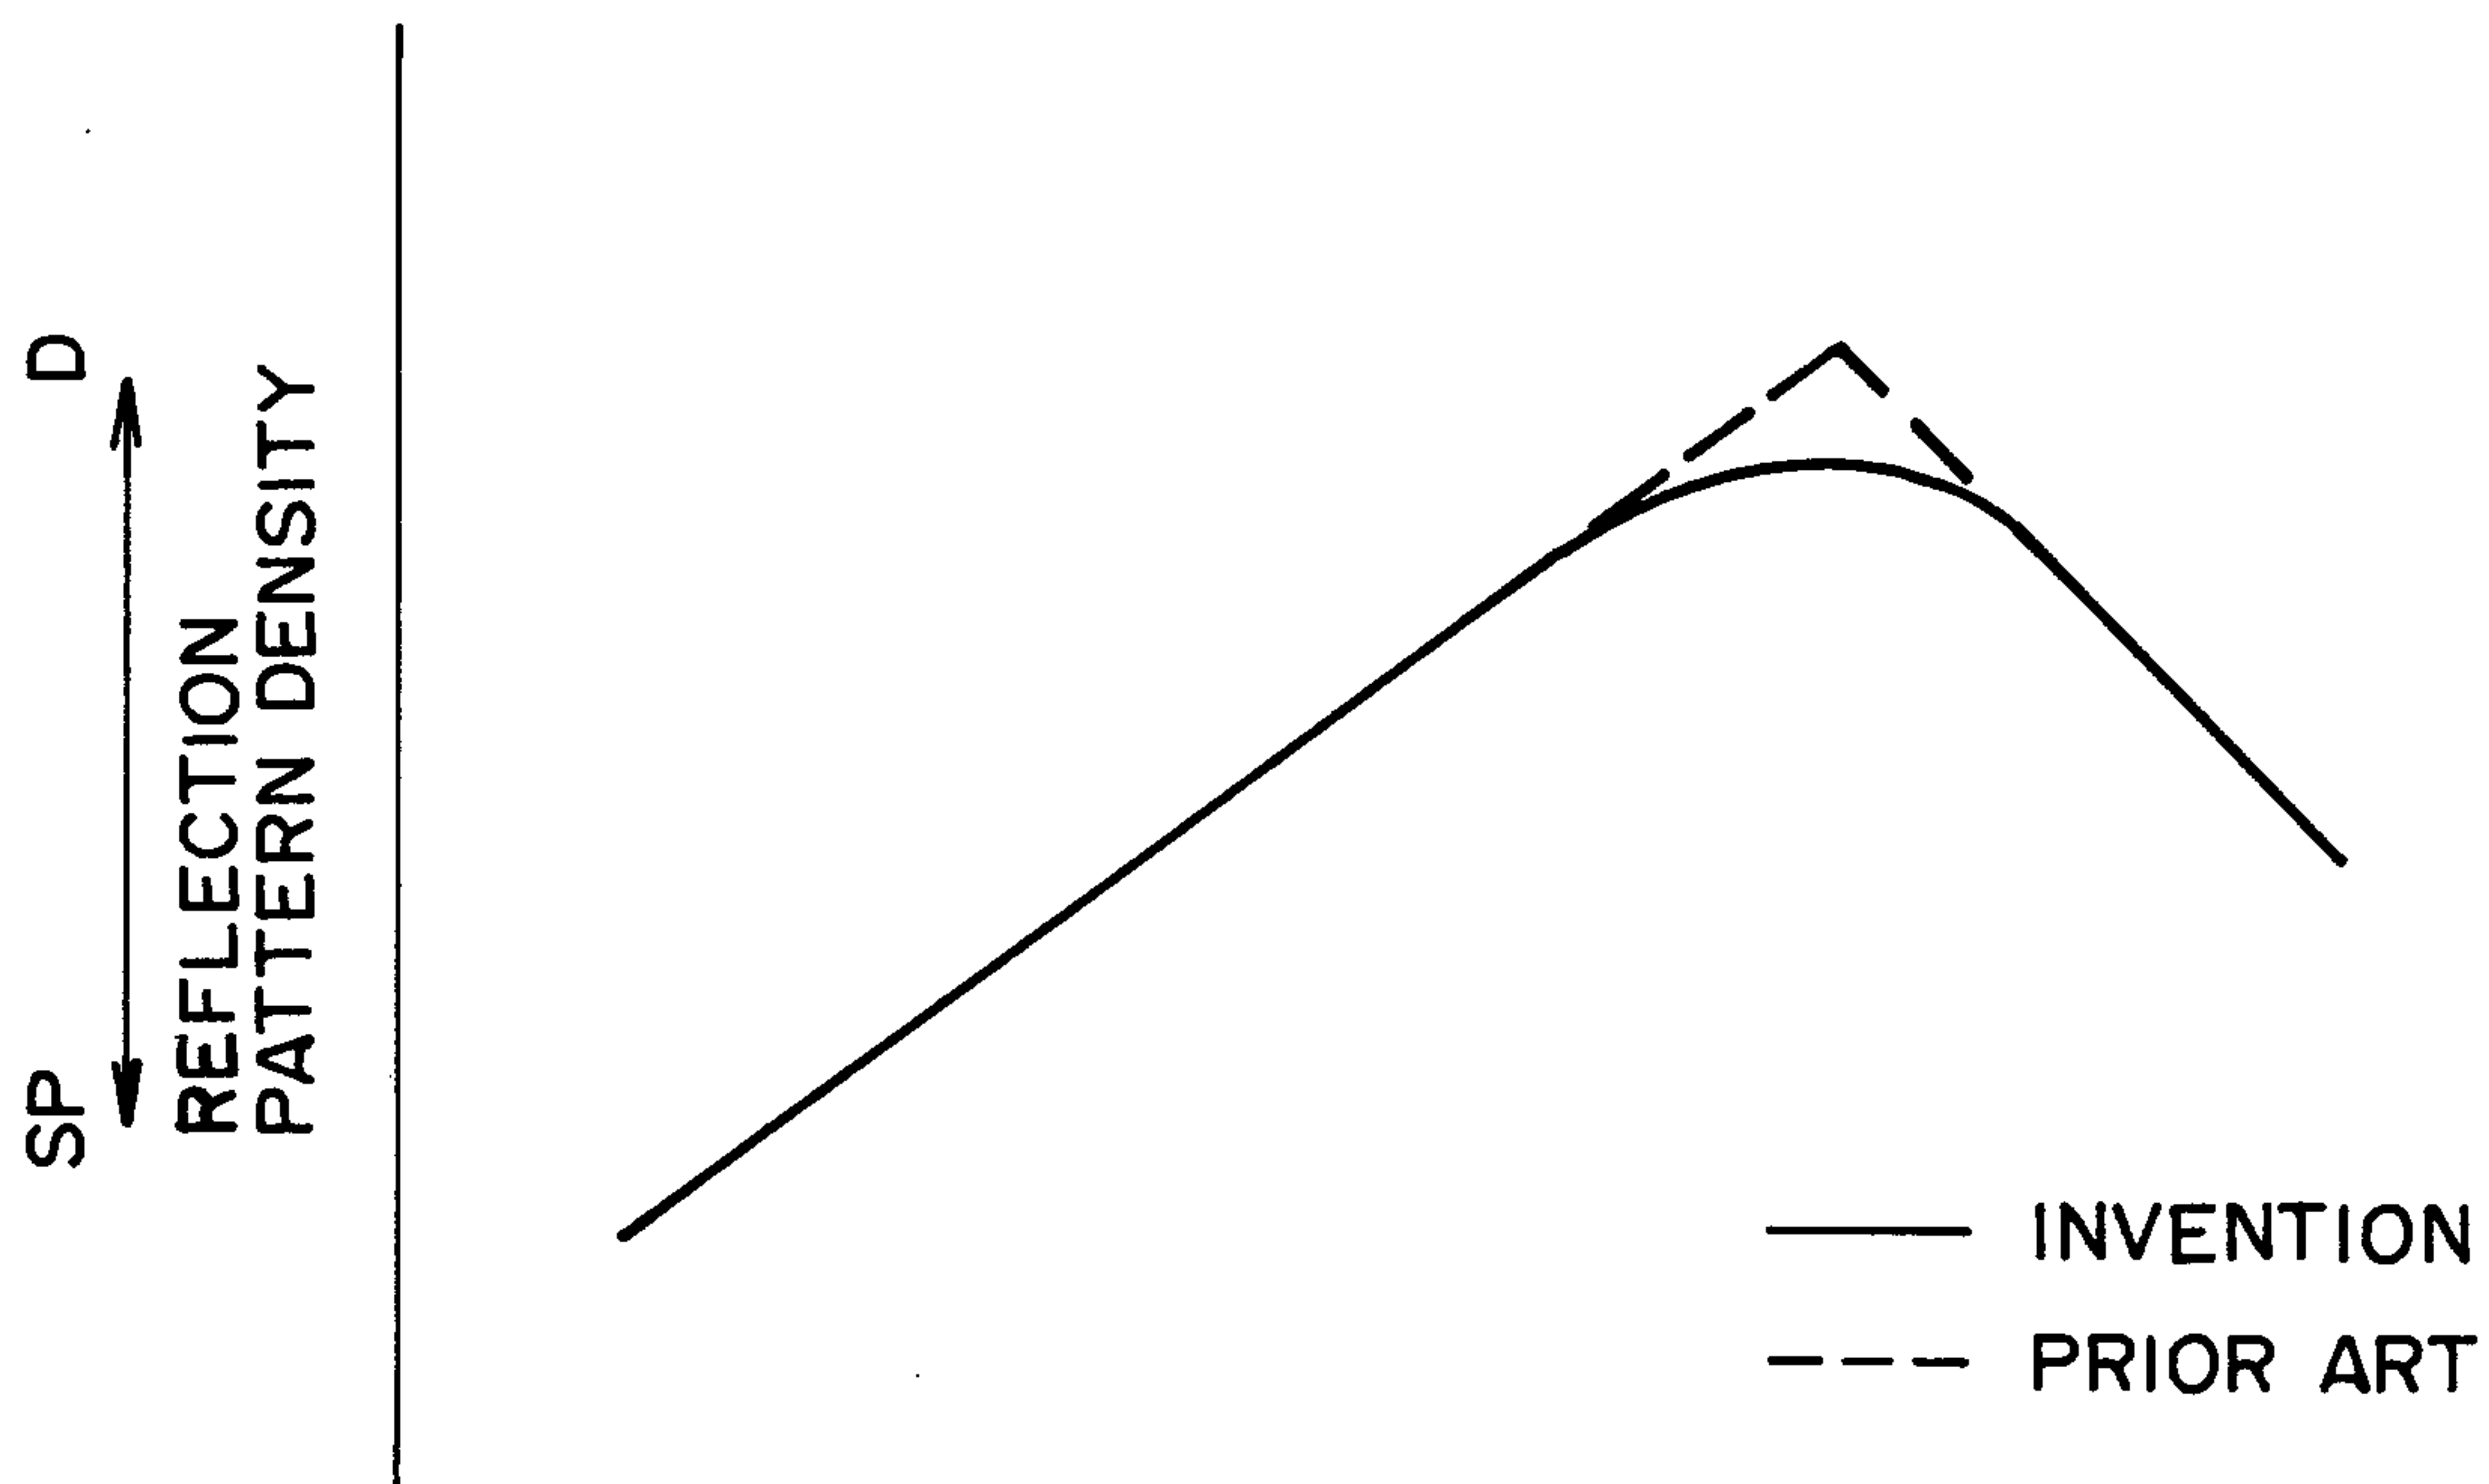


FIG. 5

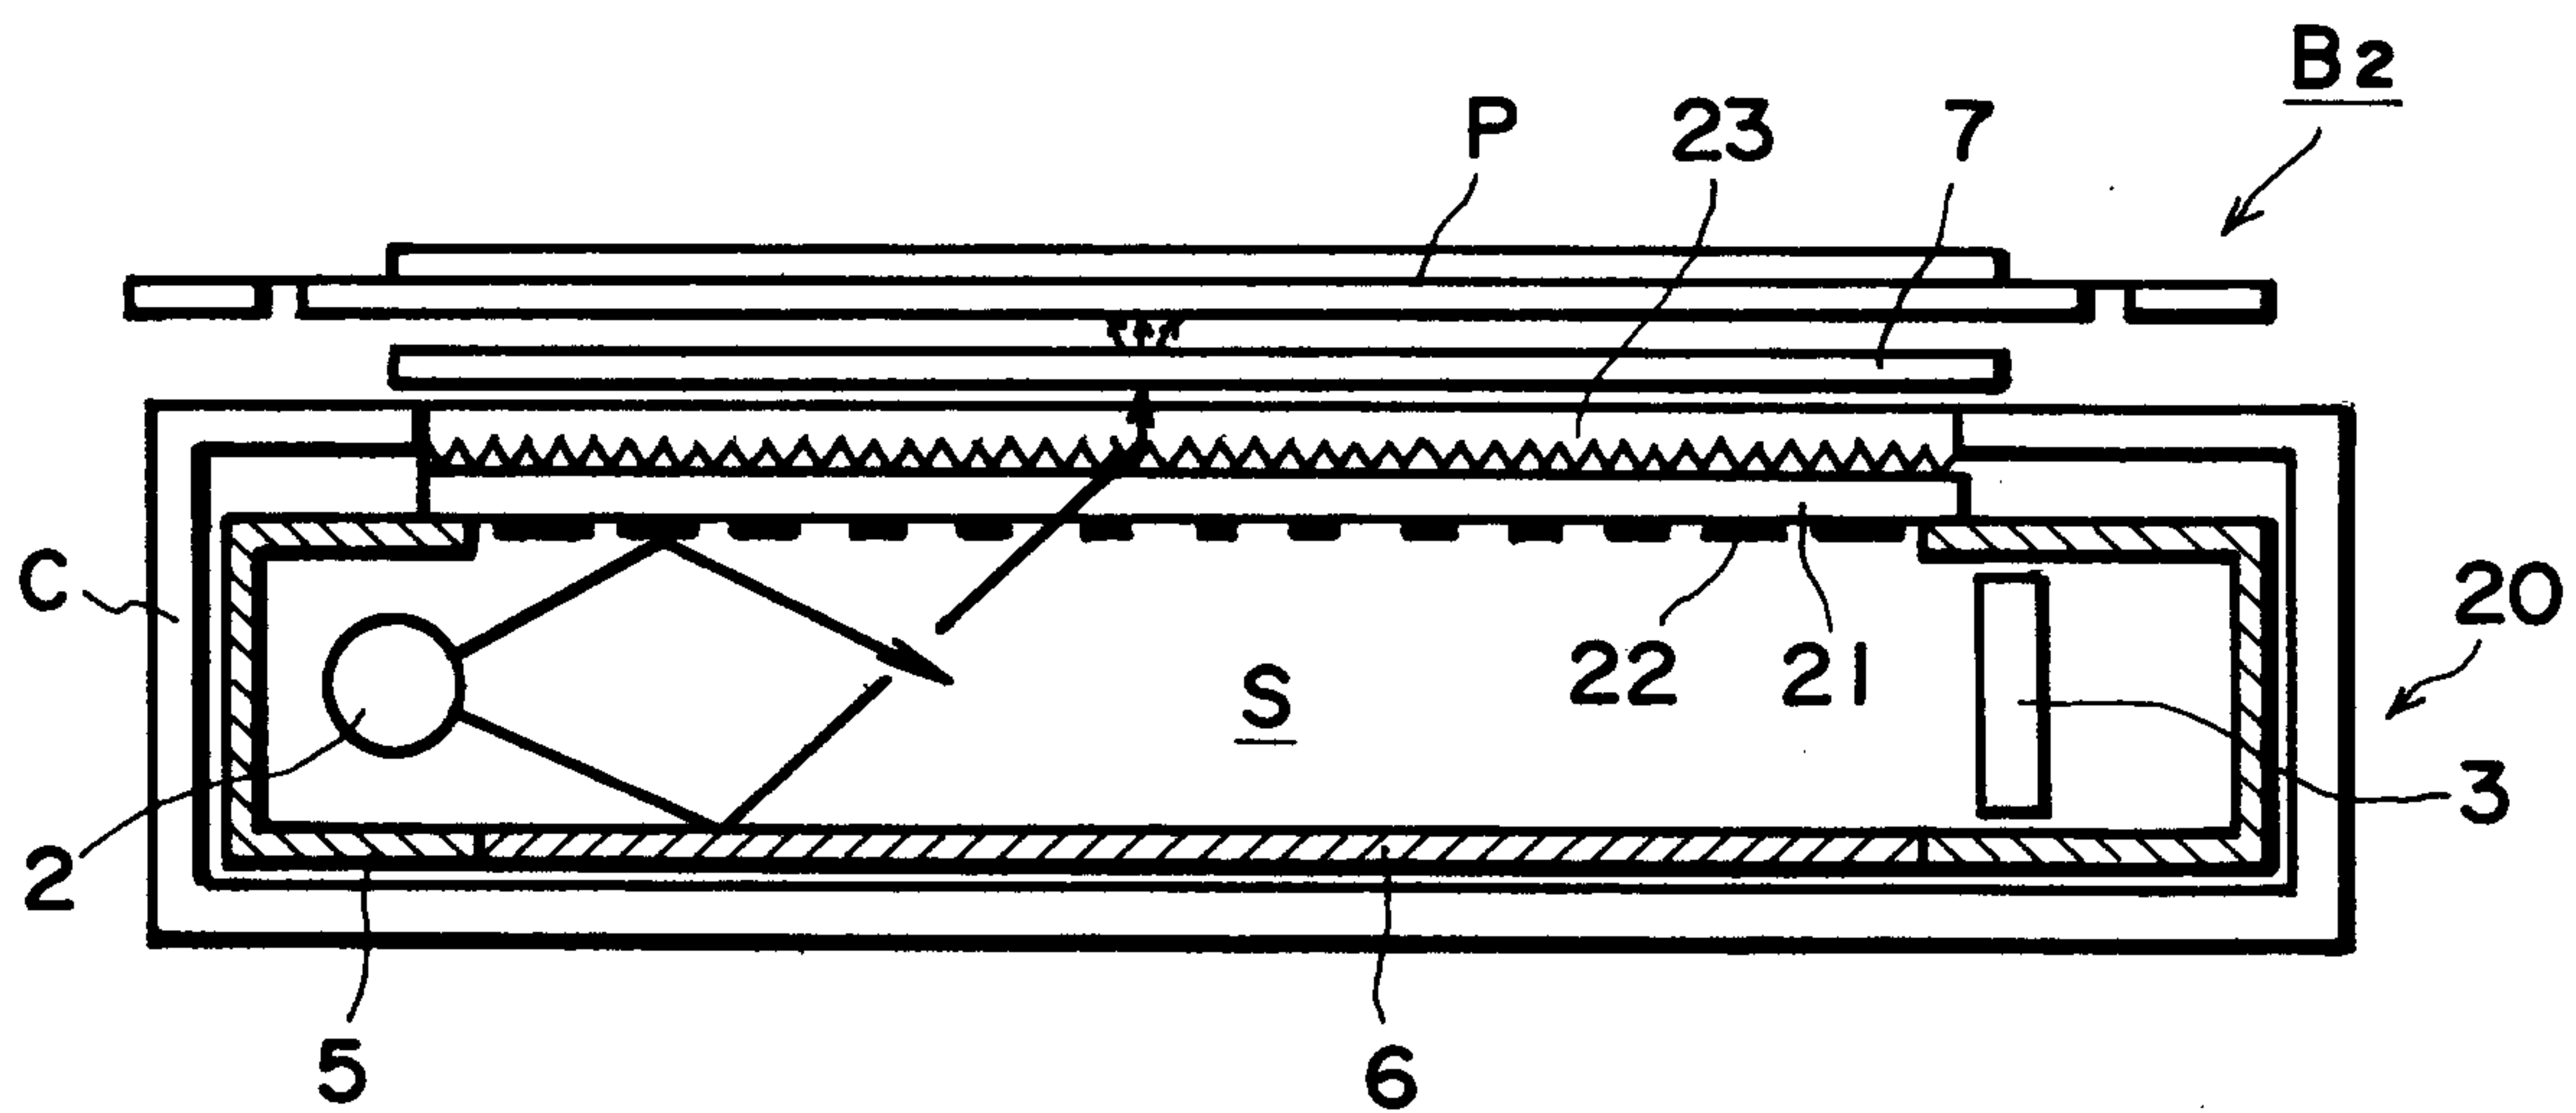


FIG. 6

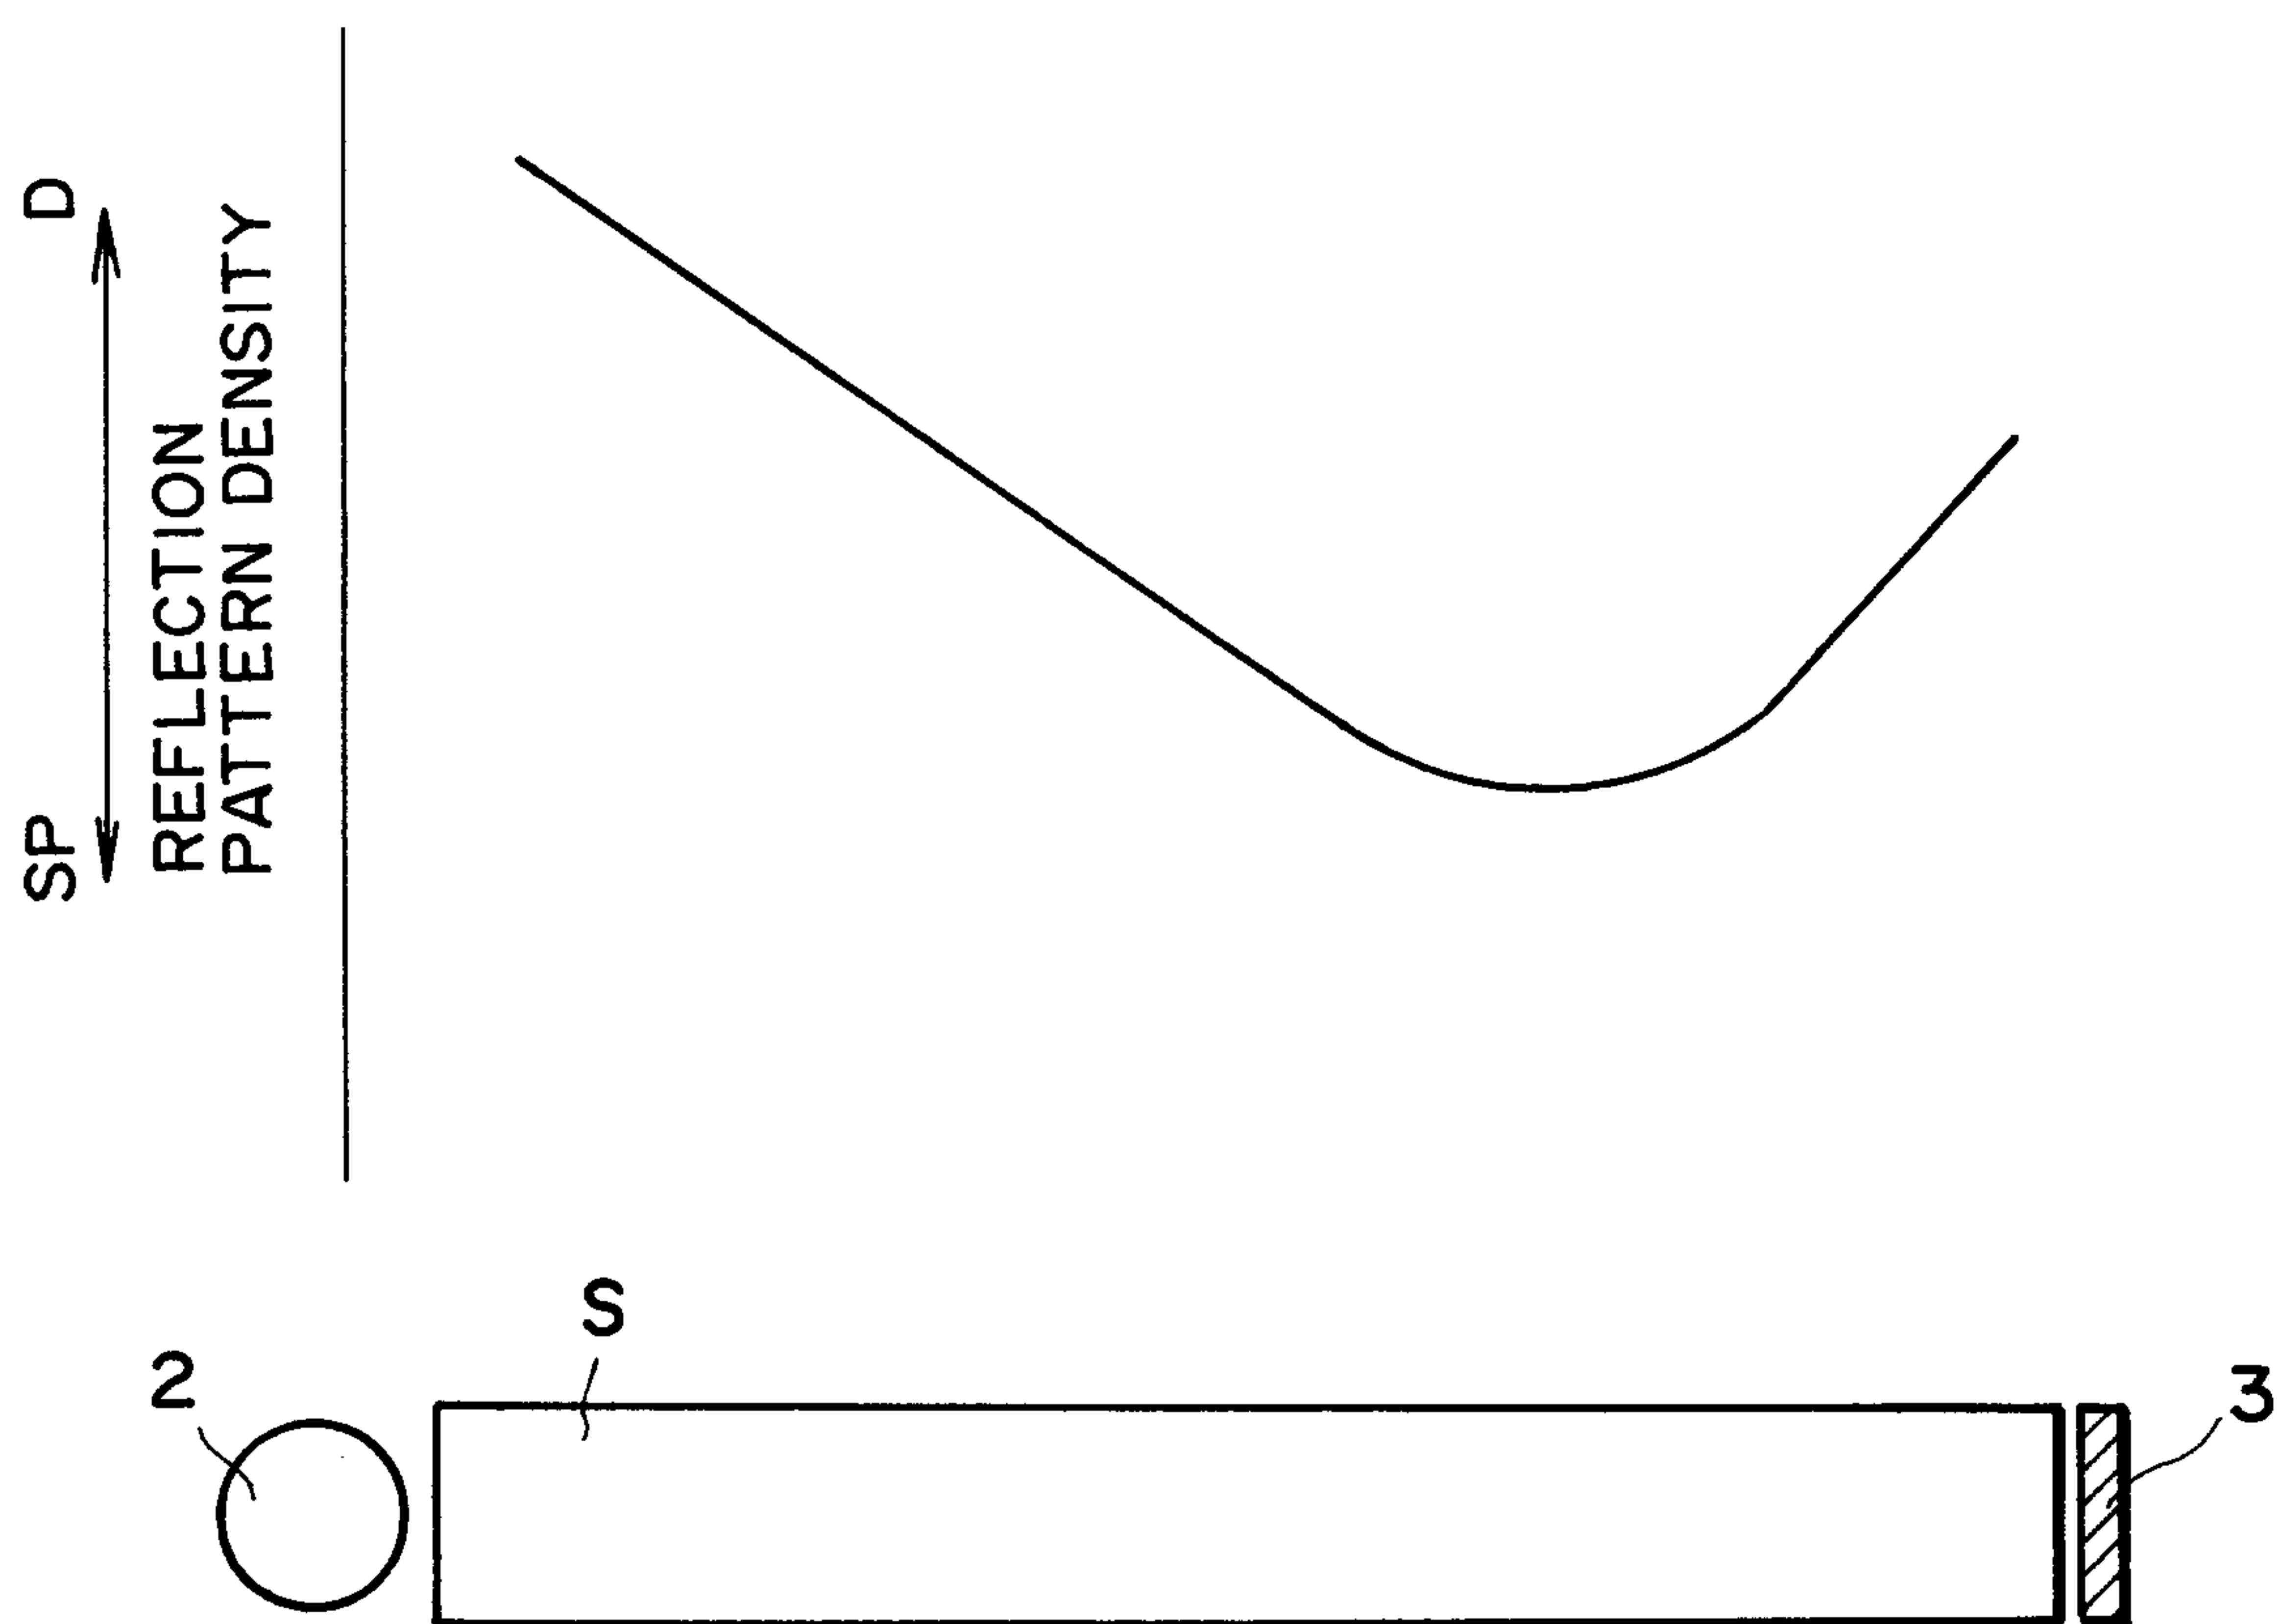


FIG. 7

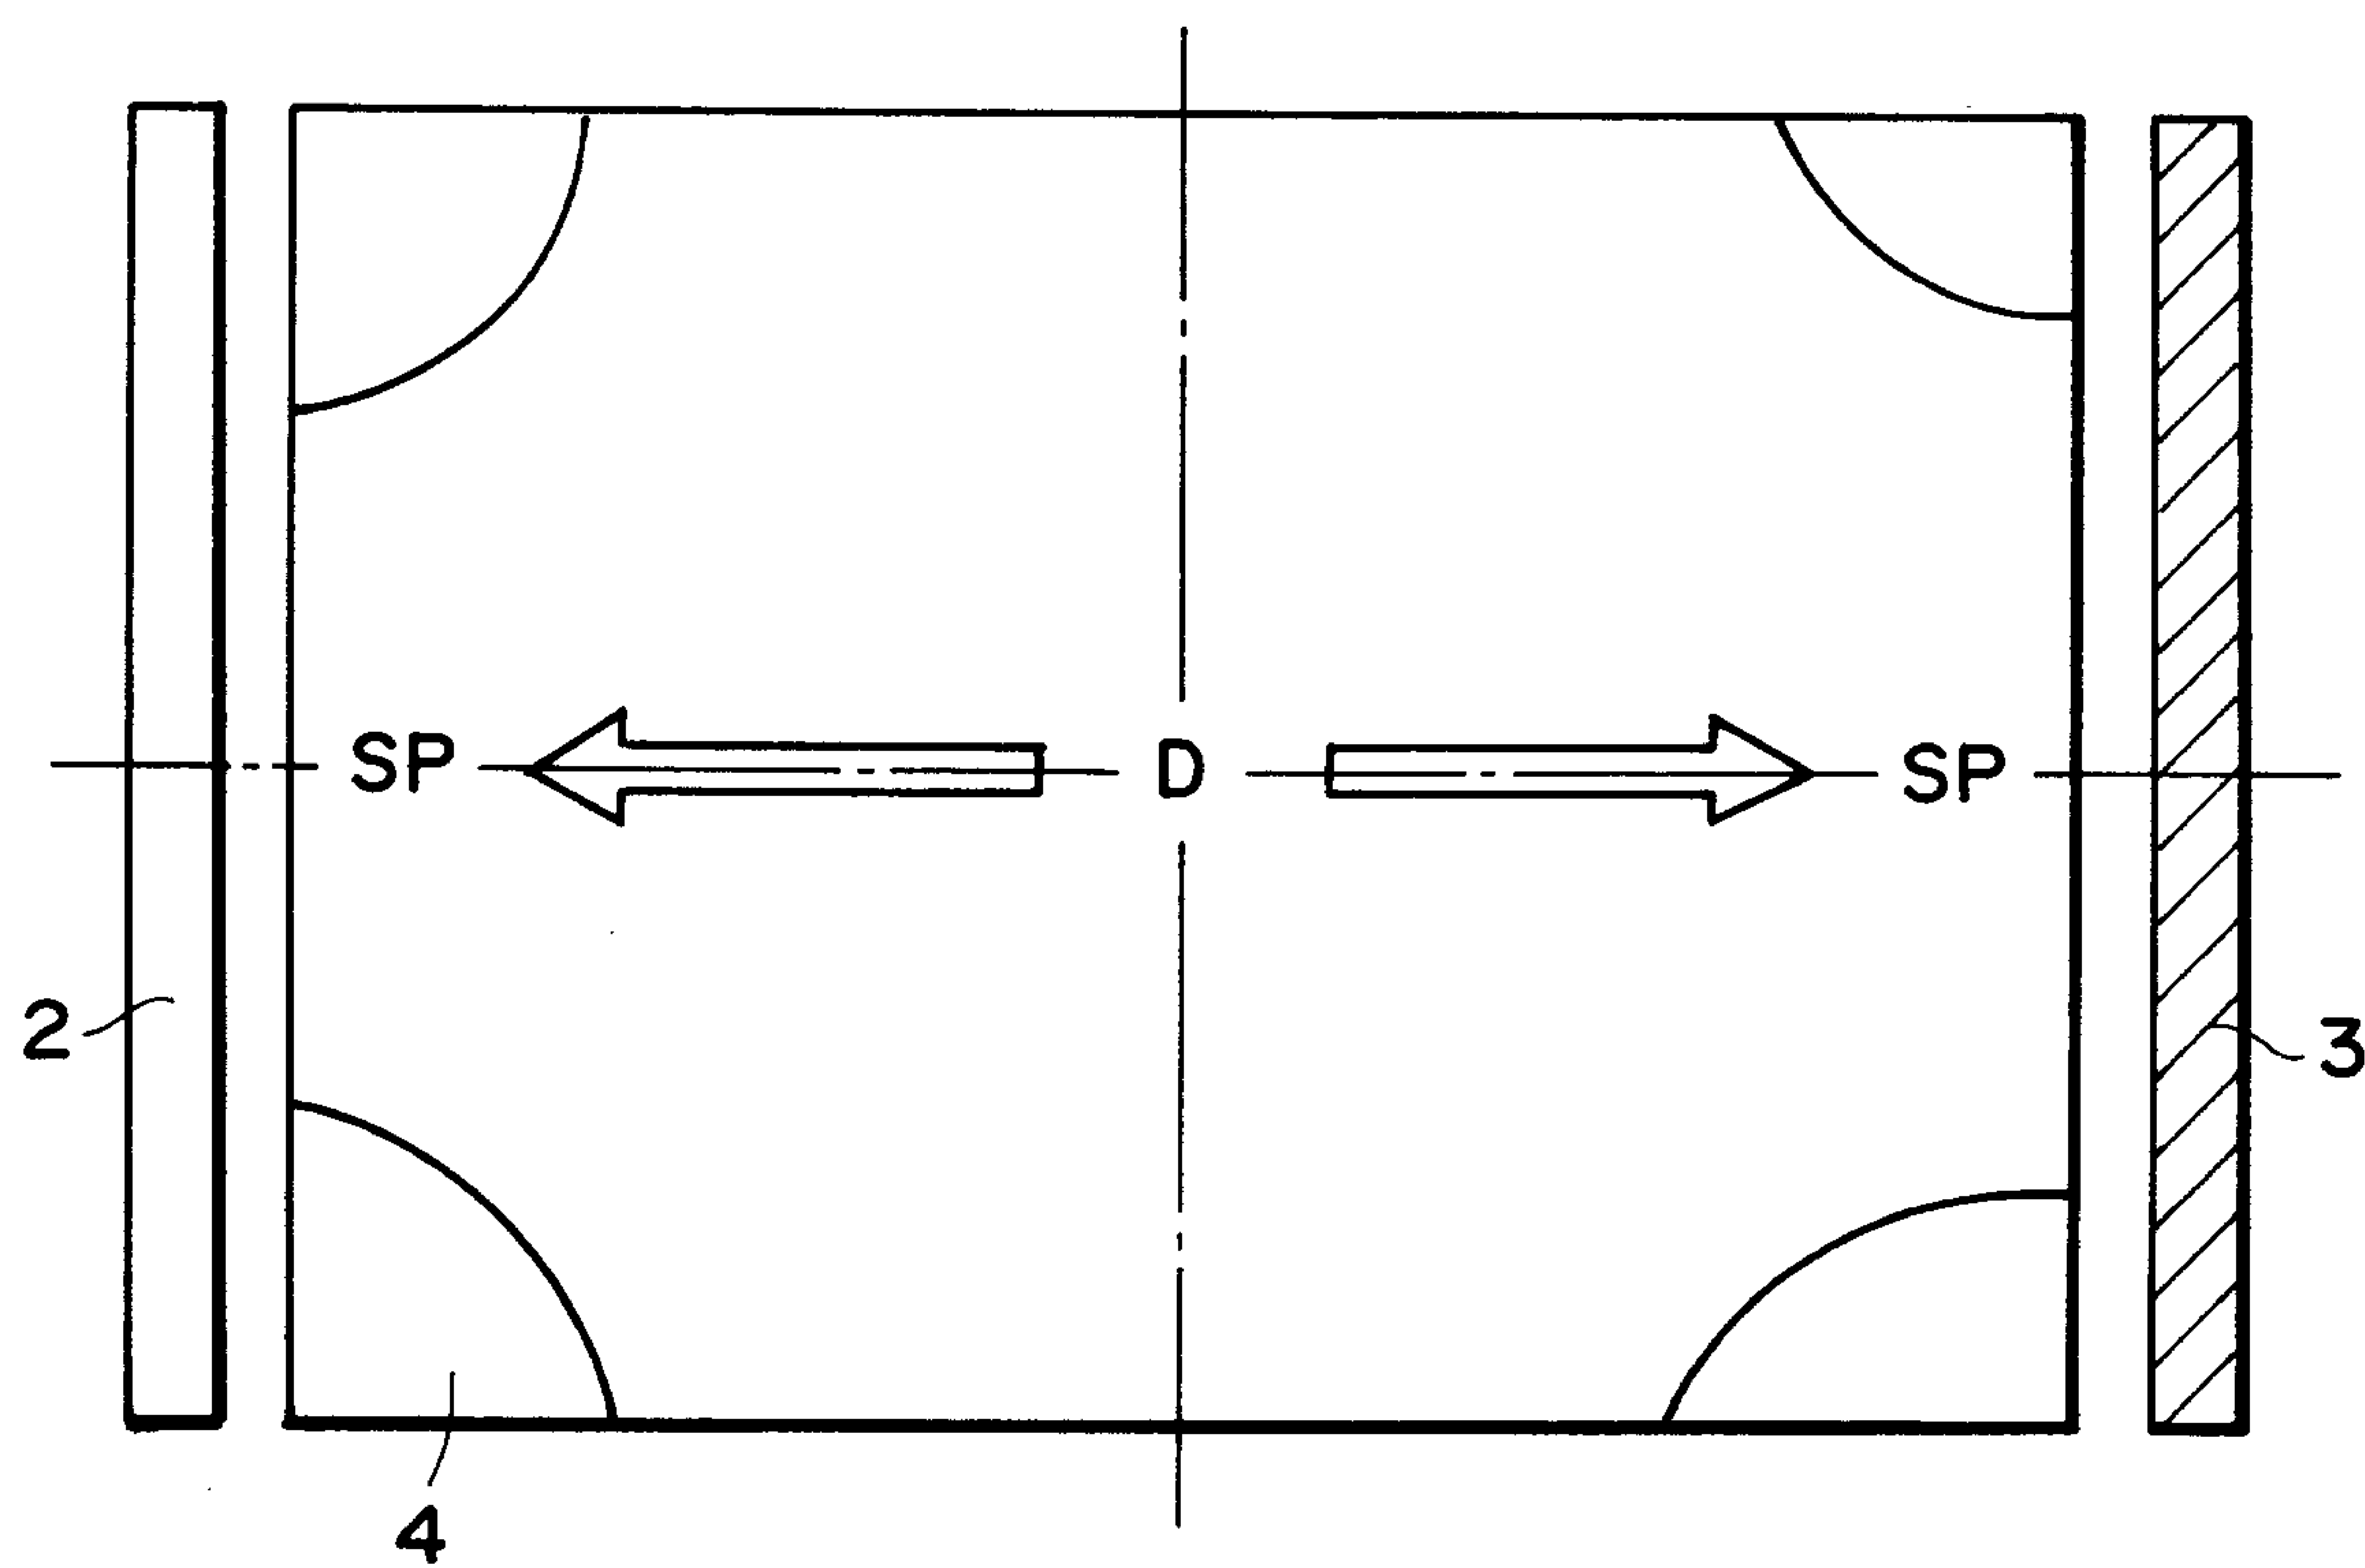


FIG. 8

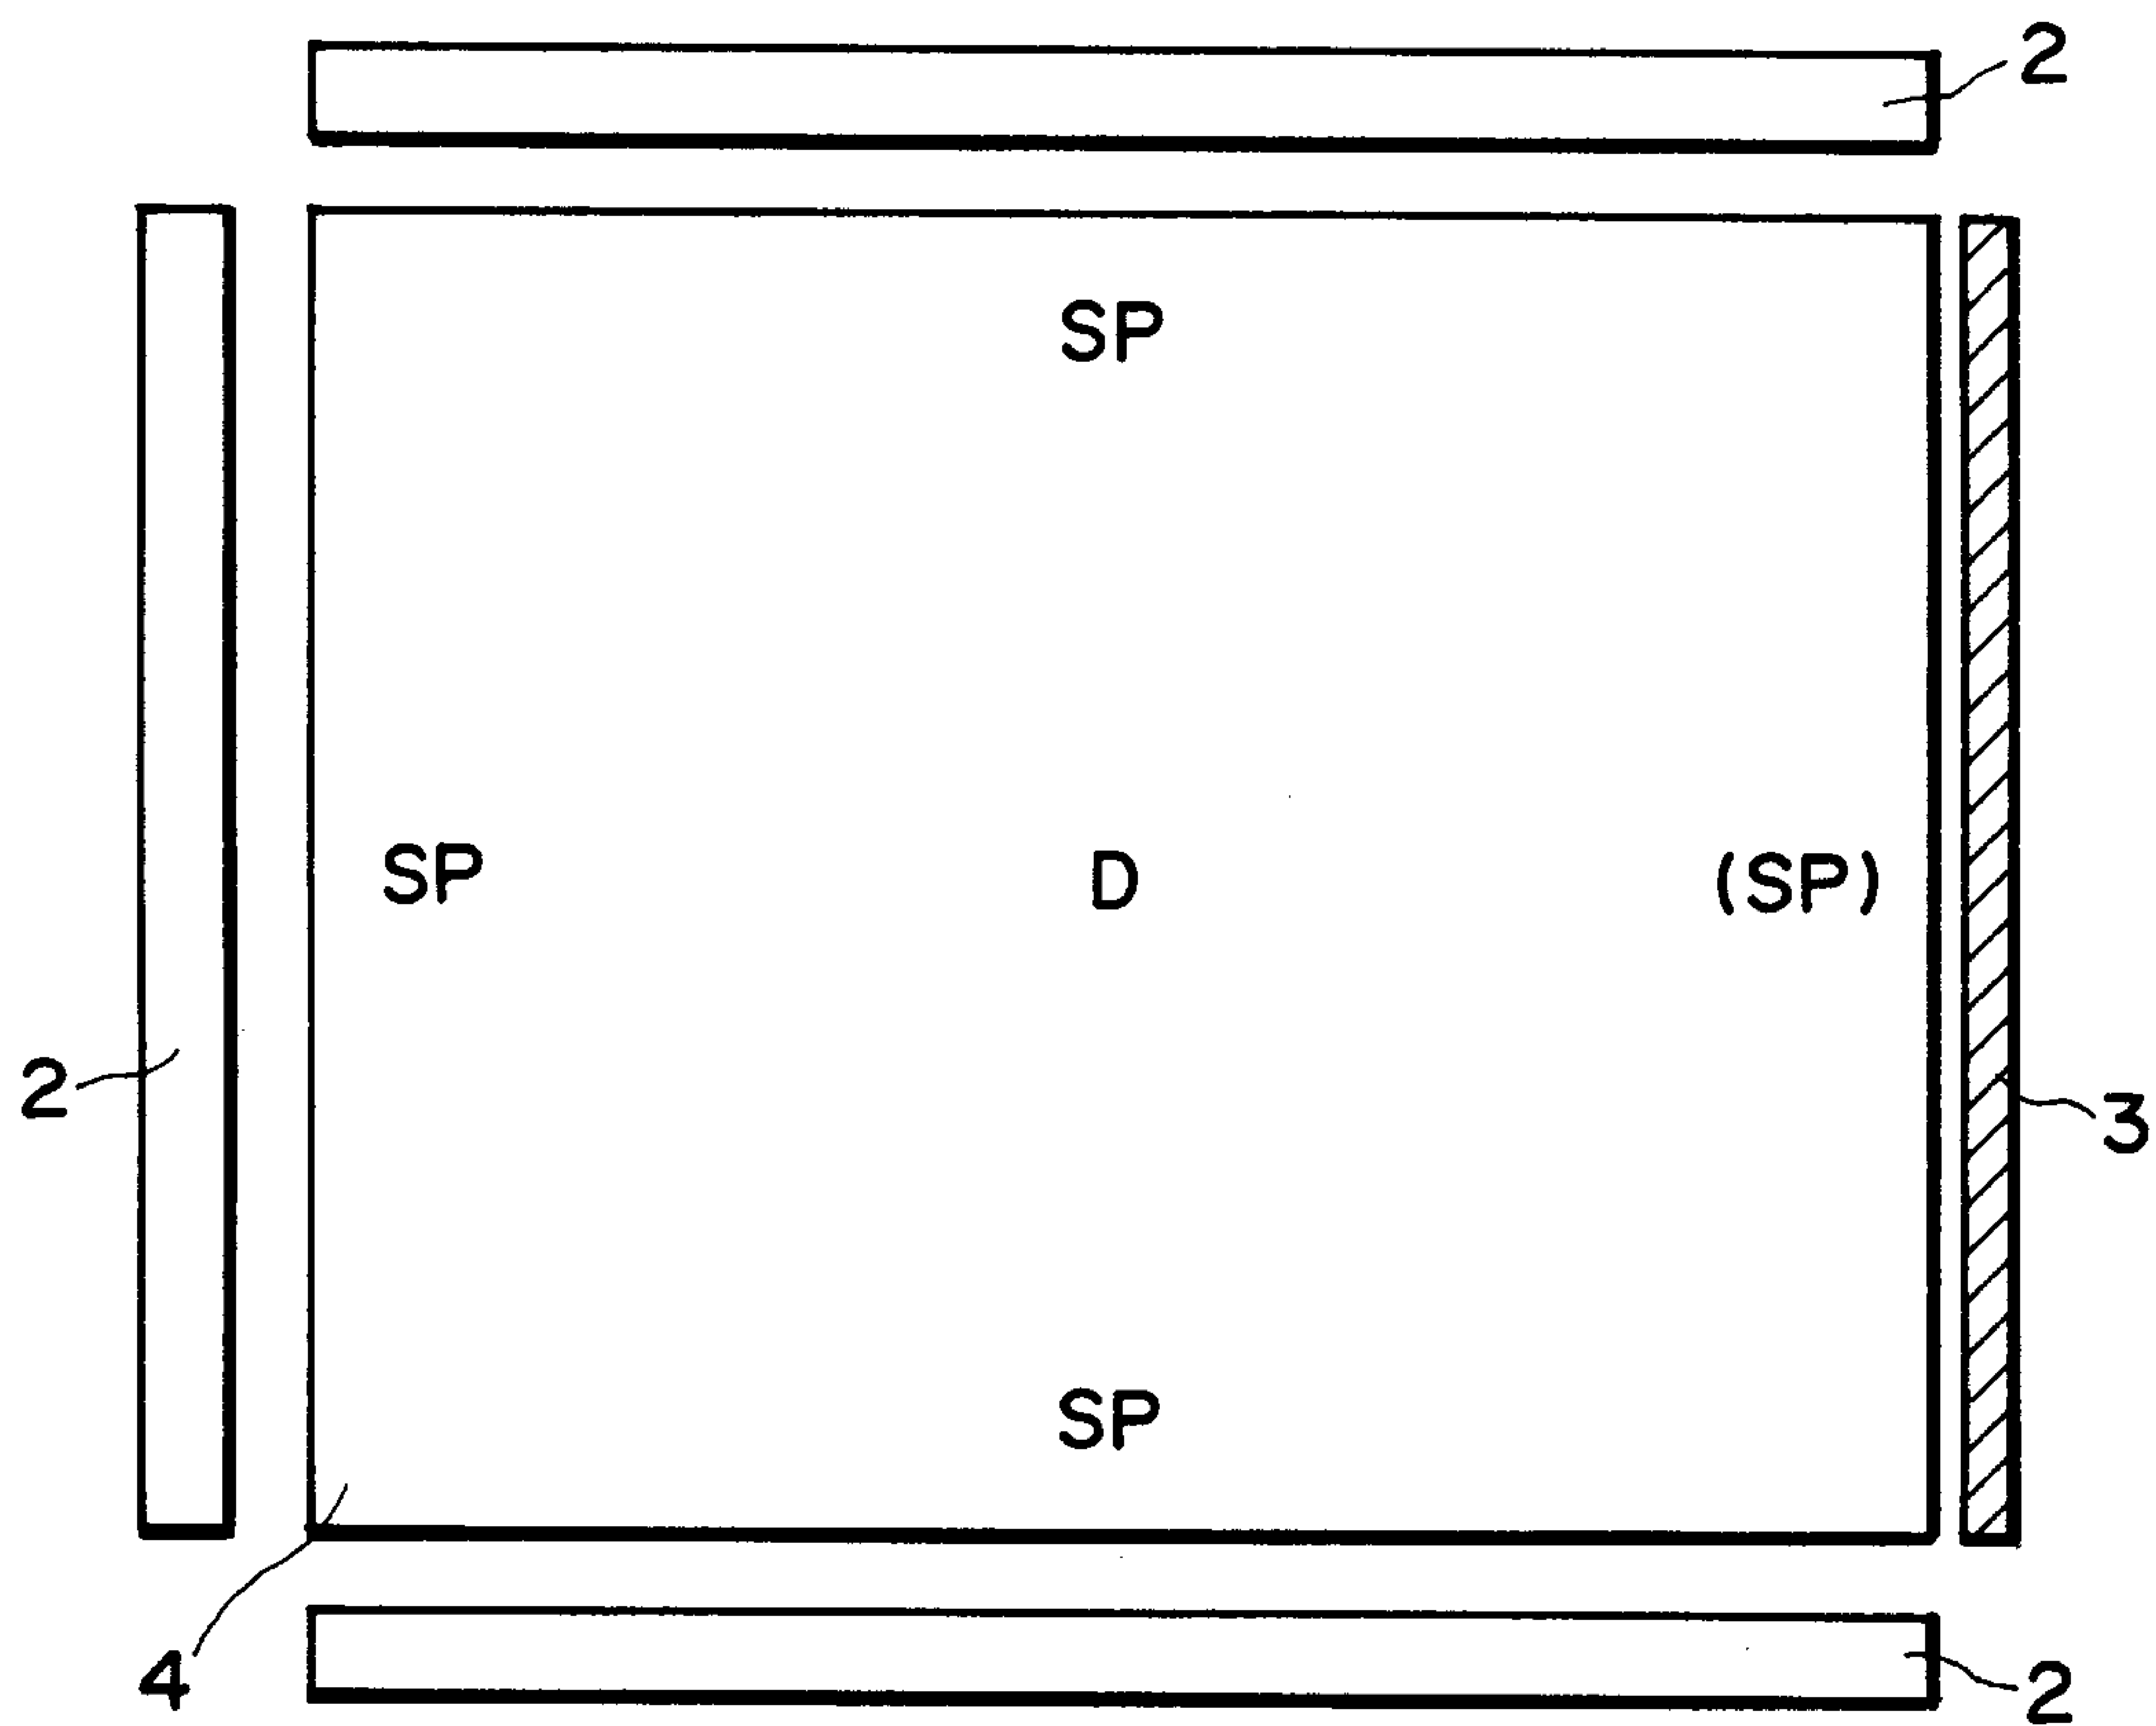


FIG. 9

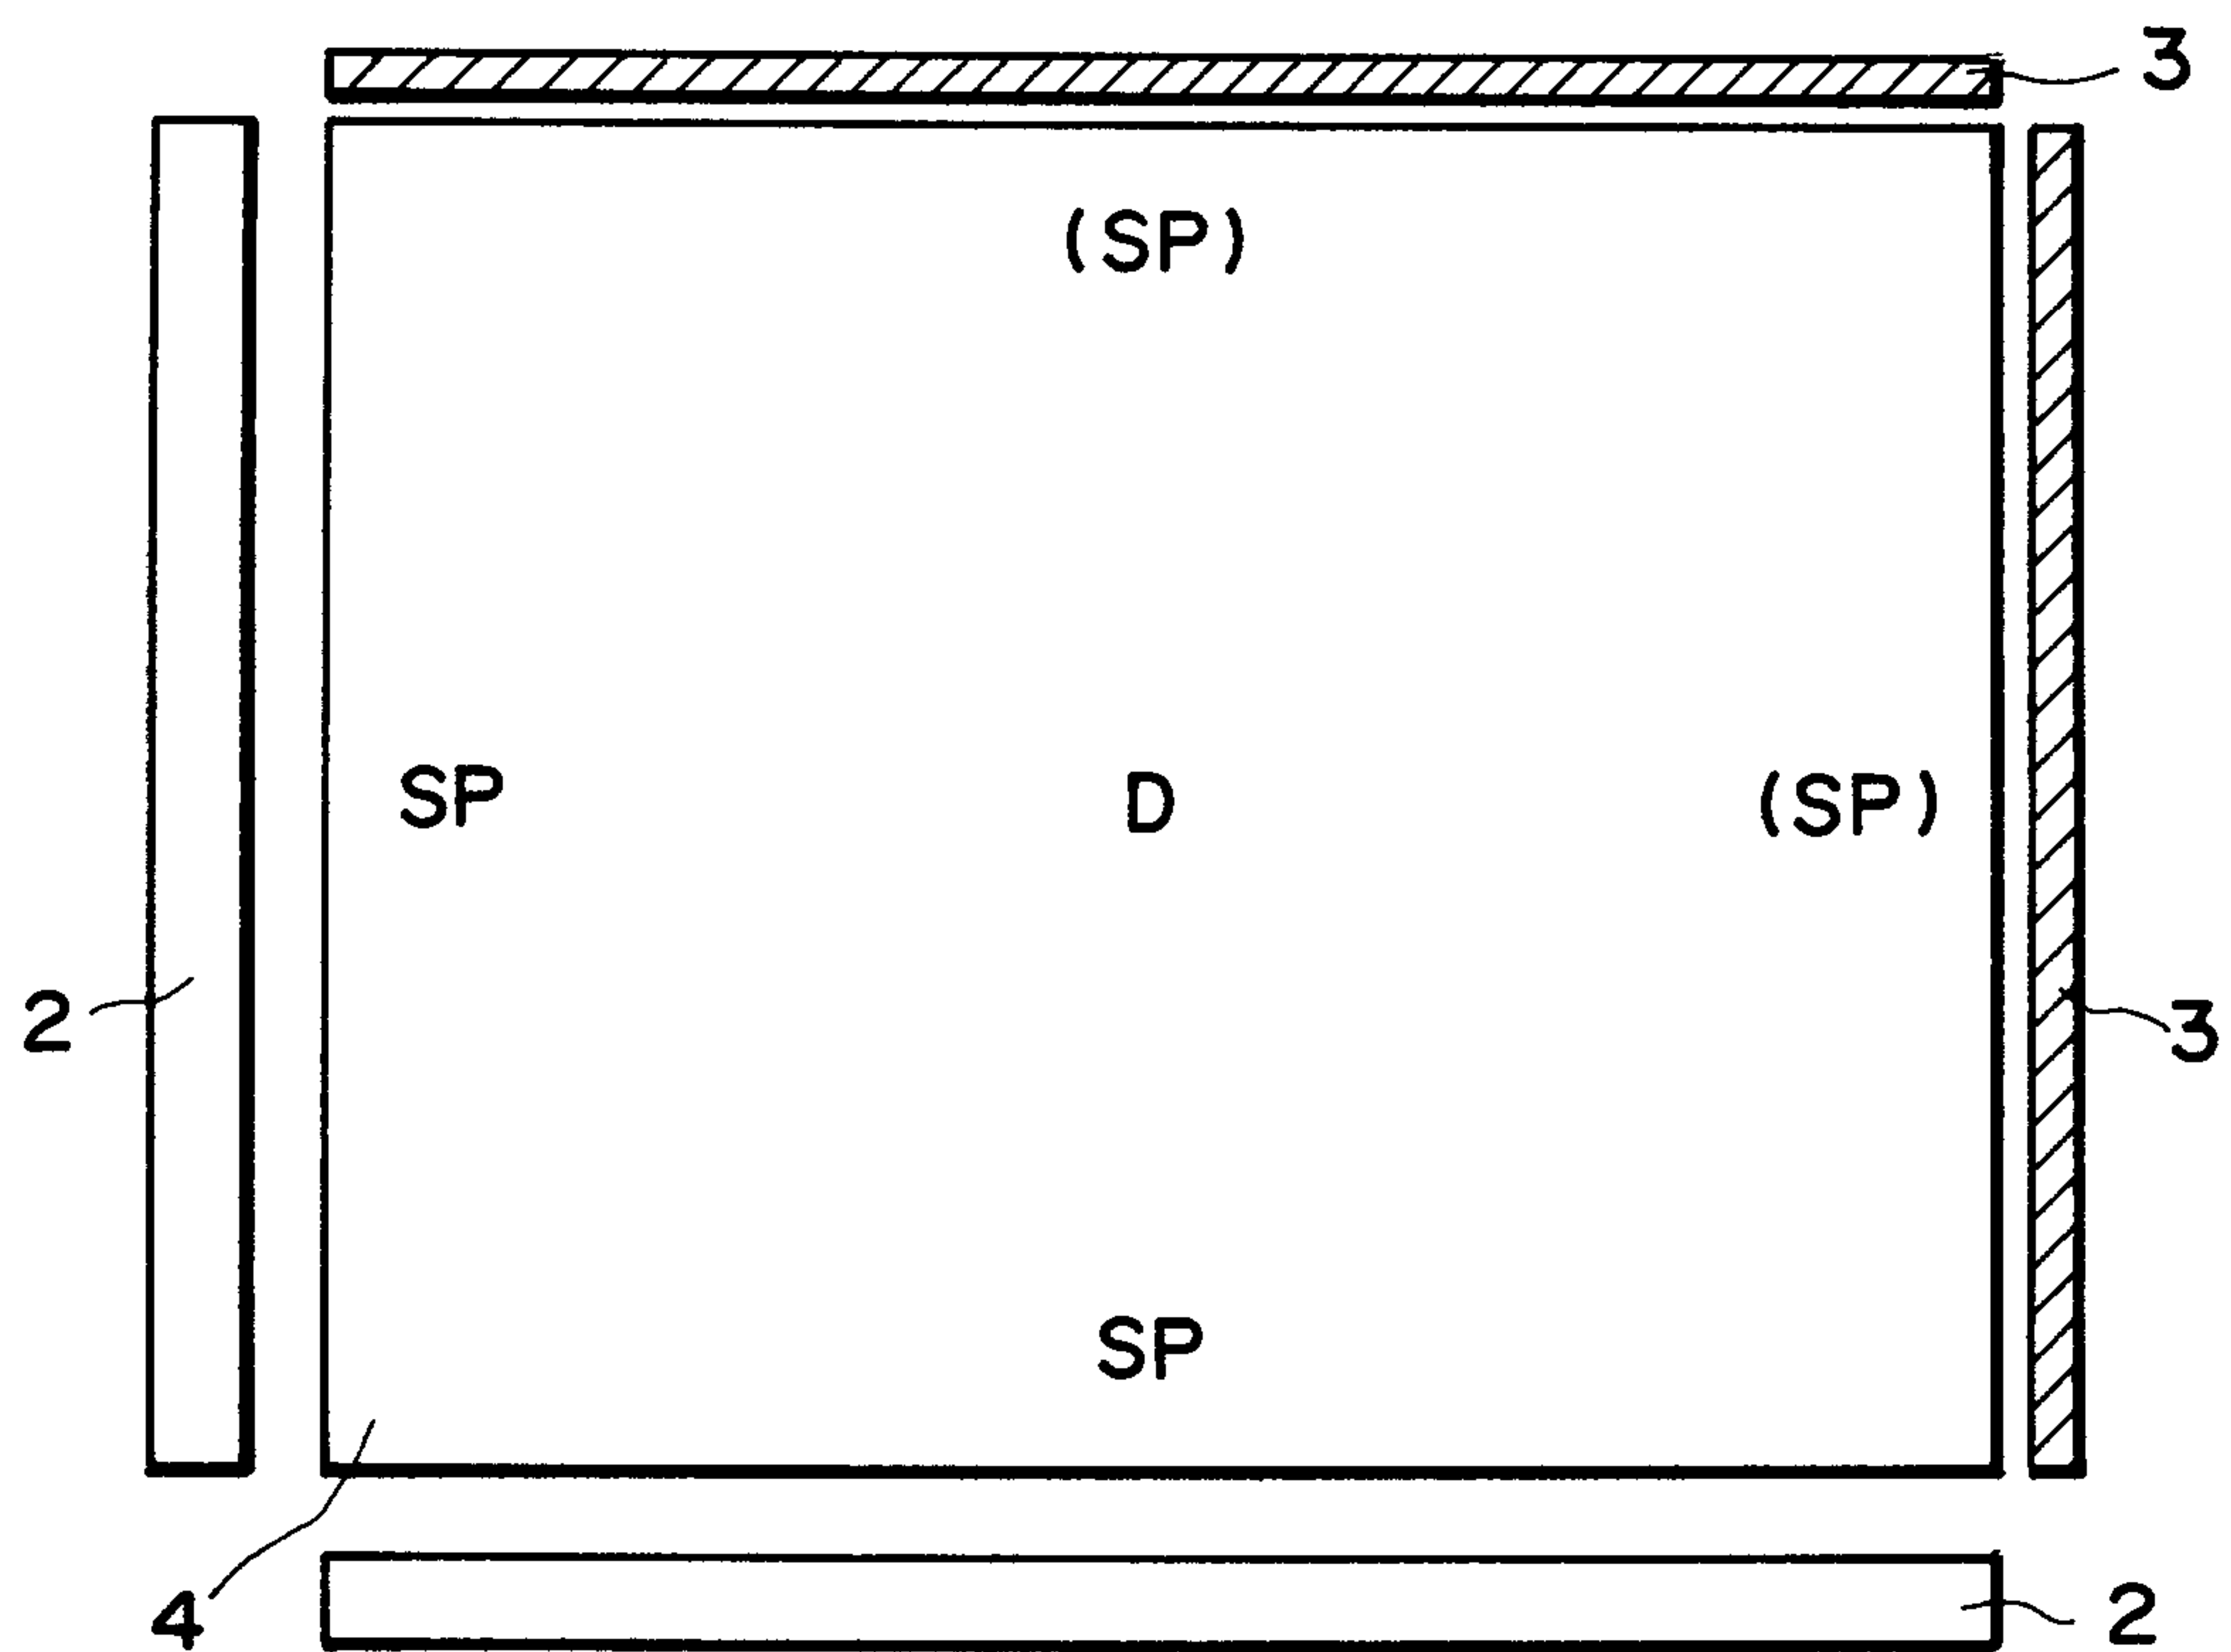


FIG. 10