

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



WIPO | PCT



(10) International Publication Number

WO 2015/124710 A1

(43) International Publication Date

27 August 2015 (27.08.2015)

(51) International Patent Classification:

C03C 3/097 (2006.01) C03C 10/00 (2006.01)

(21) International Application Number:

PCT/EP2015/053576

(22) International Filing Date:

20 February 2015 (20.02.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10 2014 002 253.6

21 February 2014 (21.02.2014)

DE

10 2014 211 700.3 18 June 2014 (18.06.2014)

DE

(71) Applicant: SCHOTT AG [DE/DE]; Hattenbergstraße 10, 55122 Mainz (DE).

(72) Inventors: JEDAMZIK, Ralf; Guttenbrunnstrasse 17, 64347 Griesheim (DE). GRÜN, Steffen; Hinter Zeine 17, 55595 Wallhausen (DE). LIFKA, Thomas; Tiefentaler Weg 26, 55128 Mainz-Bretzenheim (DE). FADERL, Johann; Kapellenstrasse 30, 55437 Nieder-Hilbersheim (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: HIGHLY HOMOGENEOUS GLASS-CERAMIC COMPONENT

Figures

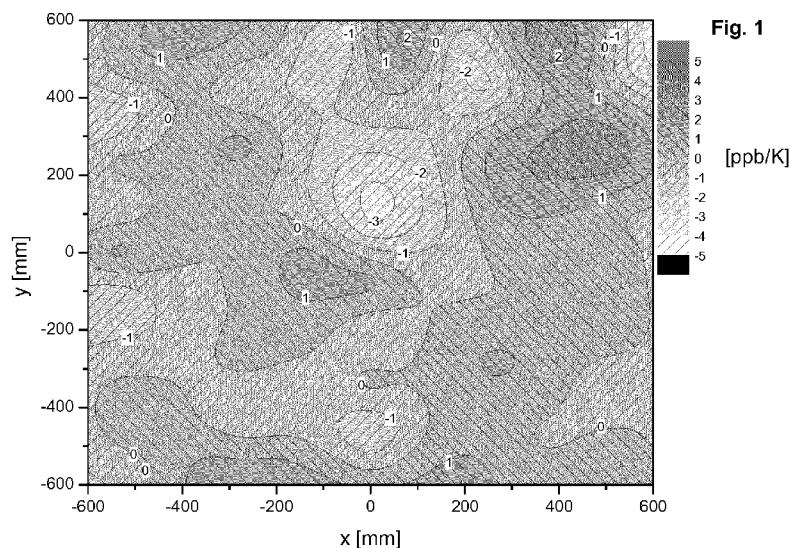

(57) Abstract: The present invention relates to a glass-ceramic component having a low average coefficient of thermal expansion (CTE) and a high CTE homogeneity, to the use of such a component and to a process for producing such a component.

WO 2015/124710 A1

- 1 -

Highly homogeneous glass-ceramic component

The present invention relates to a glass-ceramic component having a low average coefficient of thermal expansion (CTE) and a high CTE homogeneity, to the use of such a component and to a process for producing such a component.

5 On pages 107-214, Bach, Hans (Editor): "Low Thermal Expansion Glass Ceramics", Springer Verlag Berlin, Heidelberg, New York, 1995, ISBN: 3-540-58598-2, describes the principle technology for producing the glass-ceramic Zerodur®, which is produced and sold by the applicant. Zerodur® is a lithium aluminosilicate glass-ceramic with a particularly low thermal expansion and a high stability. Zerodur® is used as base material for a multiplicity of precision applications, for example for producing mirrors for telescopes with large dimensions, but which is also used for producing smaller precision components, for instance stages for microlithography.

10

At present, Zerodur® is commercially available in the following expansion classes:

	CTE (0;50)
ZERODUR® Expansion class 2	0 ± 100 ppb/K
ZERODUR® Expansion class 1	0 ± 50 ppb/K
ZERODUR® Expansion class 0	0 ± 20 ppb/K
ZERODUR® Expansion class 0 SPECIAL	0 ± 10 ppb/K
ZERODUR® Expansion class 0 EXTREME	0 ± 7 ppb/K

15 A process for casting large homogeneous glass blocks as green glass for producing large glass-ceramic blocks is known from DE 102004052514A1. The method described in said application can be used to produce glass-ceramic components having a CTE homogeneity of up to 10 ppb/K, as are commercially available at the time of filing:

CTE (0;50) homogeneity tolerances	
Up to 18 tons	< 30 ppb/K
Up to 6 tons	< 20 ppb/K
Up to 0.3 tons	< 10 ppb/K

20 The above homogeneity tolerances mean e.g. that for Zerodur® components of more than 0.3 tons, a CTE (0;50) homogeneity of less than 10 ppb/K is not commercially available, up to 6

tons only a homogeneity of at most 20 ppb/K can be guaranteed. Even for small components of up to 0.3 tons, a CTE homogeneity of better than 6 ppb/K was not commercially available.

5 The demands made in terms of the homogeneity of a glass-ceramic component for precision applications increase constantly, however, and therefore continuous development is required to improve the homogeneity of glass-ceramics and the measures described to date in the prior art for improving the homogeneity are no longer adequate.

10 In particular, EUV (Extreme UV) lithography (EUVL) requires substrates for masks and mirrors which have an average CTE of less than 0 ± 5 ppb/K in the temperature range of, for example, 19 to 25°C and have a CTE homogeneity of 6 ppb/K or better.

15 It was therefore an object of the present invention to provide glass-ceramic components which have an improved CTE homogeneity and also to provide measures which can be used to achieve such an improvement in homogeneity.

This object is achieved by the embodiments described in the claims.

20 In particular, a glass-ceramic component is provided which, at an application temperature T_A , has a CTE, preferably an average CTE, in the interval of 0 ± 20 ppb/K, preferably in the interval of 0 ± 15 ppb/K, more preferable in the interval of 0 ± 10 ppb/K, according to specific embodiments in the interval of 0 ± 5 ppb/K, and a CTE homogeneity of at most 5 ppb/K, preferably at most 4 ppb/K, most preferably at most 3 ppb/K.

25 These and other aspects and objects, features and advantages of the present invention will become apparent upon a consideration of the following detailed description and the invention when read in conjunction with the Figures.

30 It is to be understood that both the foregoing general description and the following detailed description are merely exemplary of the invention, and are intended to provide an overview or framework for understanding the nature and character of the invention as claimed.

35 The invention relates to glass-ceramic components having a low average coefficient of thermal expansion or CTE ("Coefficient of Thermal Expansion"). For the purposes of the invention, an "average CTE" is understood to mean the average of all CTE measurements carried out on a glass-ceramic component at various places. For the purpose of the invention, a "low average

CTE" is understood to mean the a CTE (0;50) of $0 \pm 100 \text{ ppb/K}$, preferably $0 \pm 50 \text{ ppb/K}$, more preferably $0 \pm 20 \text{ ppb/K}$, even more preferably $0 \pm 10 \text{ ppb/K}$ and most preferably $0 \pm 7 \text{ ppb/K}$.

5 The average CTE for the temperature range of 0 to 50°C (CTE(0;50)) is usually reported. However, the average CTE can also be reported for other temperature ranges. For high-precision applications, the average CTE is reported in a considerably smaller temperature range around the later application temperature, for example a CTE(19;25) for microlithography components. As described herein below, the average CTE can also be reported for a specific application temperature T_A .

10

The average CTE for a temperature range can be determined by means of equation (1) below:

$$\text{CTE } [t_0; t] = (1 / l_0) \times (l_t - l_0) / (t - t_0) = \Delta l / (l_0 \times \Delta t) \quad (1)$$

15 where t_0 is the initial temperature, t is the measurement temperature, l_0 is the test specimen length at the initial temperature t_0 , l_t is the test specimen length at the measurement temperature t and Δl is the corrected change in length undergone by the test specimen at a change in temperature Δt . The method is shown schematically in Fig. 6.

20 To determine an average CTE, the length of a test specimen of a glass-ceramic is measured at the initial temperature t_0 , the test specimen is heated to a second temperature t and the length l_t at this temperature is measured. The average CTE $[t_0; t]$ for the temperature range t_0 to t is obtained from the abovementioned formula (1). The thermal expansion can be determined by means of dilatometry, i.e. the determination of the change in length of a test specimen as a 25 function of the temperature. An instrument for determining the average CTE is described, for example, in R. Mueller, K. Erb, R. Haug, A. Klaas, O. Lindig, G. Wetzig: "Ultraprecision Dilatometer System for Thermal Expansion Measurements on Low Expansion Glasses", 12th Thermal Expansion Symposium, Pittsburgh/PA, P.S. Gaal and D.E. Apostolescu Eds., 1997, the contents of which are incorporated in their entirety into the present application.

30

In addition to this conventional determination of the average CTE, a determination of the average CTE as indicated in EP 1 321 440 was carried out in the examples for the glass-ceramic, since the true CTE at a particular temperature may be given incorrectly when considering the average CTE in a temperature interval. A CTE-T curve oscillating around the zero line may suggest a low average CTE, whereas the "true CTE" at the particular application temperature may 35 lie outside specifications. The "true CTE" at a specific temperature is understood to mean the

value lying on a CTE-T curve at this temperature. The contents of EP 1 321 440 are incorporated in their entirety into the present application.

5 The CTE is determined as a function of the temperature for this measurement method. The CTE(T) is then defined according to the formula (2) below:

$$\text{CTE (T)} = (1 / l_0) \times (\partial l / \partial T) \quad (2)$$

10 To produce a $\Delta l/l_0$ -T curve or an expansion curve or to plot the change in length $\Delta l/l_0$ of a test specimen versus the temperature, the temperature-dependent change in length in the length of a test specimen from the initial length l_0 at the initial temperature t_0 to the length l_t at the temperature t can be measured. Here, small temperature intervals of, for example, intervals of 5°C or 3°C are preferably chosen for determining a measurement point.

15 Such measurements can, for example, be carried out by dilatometric methods, interferometric methods, for example the method of Fabry-Perot, i.e. the measurement of the shift of interference fringes of laser beams reflected from the surfaces of a measurement sample during expansion, or other suitable methods.

20 The selected method for determining the $\Delta l/l_0$ -T measurement points preferably has a precision of preferably at least ± 0.10 ppm, more preferably of ± 0.05 ppm, most preferably of ± 0.01 ppm.

Furthermore, a glass-ceramic is usually defined by the possible deviations from the CTE average which make it still usable for the planned application. This deviation from the average CTE 25 is reported as a range (e.g. "0 $\pm 10 \times 10^{-6}/K$ " or "0 ± 10 ppb/K" for a range of from -10 to 10 ppb/K around an average CTE of 0 ppb/K). For the purposes of the invention, a "low average CTE" is understood to be a value of at most 0 ± 20 ppb/K, more preferably at most 0 ± 10 ppb/K, most preferably at most 0 ± 7 ppb/K, according to specific embodiments at most 0 ± 5 ppb/K.

30 According to the invention, the glass-ceramic component has a high CTE homogeneity. Here, the value of the CTE homogeneity ("total spatial variation of CTE") is understood to mean what is termed the peak-to-valley value, i.e. the difference between the respective highest and the respective lowest CTE value of the samples taken from a glass-ceramic. For the purposes of 35 the invention, the value is reported in ppb/K, where 1 ppb/K = $0.001 \times 10^{-6}/K$. The CTE homo-

geneity over the entire glass-ceramic component is at most 5 ppb/K, preferably at most 4 ppb/K, most preferably at most 3 ppb/K.

Furthermore, a glass-ceramic component can be characterized by the zero crossing of a CTE-T curve. If the zero crossing of the CTE-T curve of a glass-ceramic component lies at or in the proximity of the application temperature, the change in length given potential minor fluctuations in temperature around the application temperature is minimal. For precision applications, it is therefore generally the case that a glass-ceramic component having a zero crossing matched to the application temperature is used. The position of the zero crossing of the CTE-T curve can be set by correspondingly adapting the ceramization of the glass-ceramic. In particular, the CTE-T curve can have at least one zero crossing in a range of $T_A \pm 10$ K, preferably $T_A \pm 5$ K. Preferred application temperatures lie in the range of -60 to 100°C, more preferably of -40°C to +80°C. Particular embodiments of the present invention relate to glass-ceramic components for application temperatures T_A of 22°C, 40°C, 60°C, 80°C and 100°C, which have a zero crossing of the CTE-T curve and/or tolerances as described above.

According to one embodiment of the invention, the CTE-T curve of the glass-ceramic has a gradient at the zero crossing of ≤ 5 ppb/K², more preferably ≤ 2.5 ppb/K², even more preferably ≤ 2 ppb/K².

Glass-ceramics for precision applications should also have a good internal quality. It is preferable for glass-ceramics to have at most 5 inclusions per 100 cm³, more preferably at most 3 inclusions per 100 cm³, most preferably at most 1 inclusion per 100 cm³. For the purposes of the invention, inclusions are understood to mean both bubbles and crystallites having a diameter of more than 0.3 mm.

According to one embodiment of the invention, glass-ceramic components are provided which have a diameter or an edge length of at most 800 mm and a thickness of at most 100 mm and which have at most 5 inclusions, preferably at most 3 inclusions, more preferably at most 1 inclusion in each case per 100 cm³ with a diameter of a magnitude of more than 0.03 mm.

In addition to the number of inclusions, the maximum diameter of the detected inclusions also serves as a measure of the internal quality. The maximum diameter of individual inclusions in the overall volume of a glass-ceramic component having a diameter of less than 500 mm is preferably at most 0.6 mm, and preferably at most 0.4 mm in the critical volume for the application, for example in the proximity of the surface. The maximum diameter of individual inclusions in glass-ceramic components having a diameter of 500 mm to less than 2 m is preferably at

most 3 mm, and preferably at most 1 mm in the critical volume for the application, for example in the proximity of the surface.

The Figures show:

5 Figure 1 shows the depiction of the two-dimensional measurement of the derivation of the CTE from the mean CTE value of a square glass-ceramic component having an area of 1.2×1.2 m edge length and a thickness of 225 mm according to Example 1-B.

10 Figure 2 shows the depiction of the two-dimensional measurement of the CTE of a square glass-ceramic component having an area of 1.2×1.2 m edge length and a thickness of 225 mm and the position of the test specimens taken for the CTE homogeneity measurement of the glass-ceramic component according to Example 1-B.

15 Figures 3 and 4 show the horizontal and, respectively, vertical distribution of the CTE values of the glass-ceramic component tested in respect of the CTE homogeneity.

20 Figure 5 shows the comparison of the CTE-T curves of a plurality of differently ceramicized glass-ceramic components, the zero crossings of the CTE-T curves of which lie between -10°C and $+60^{\circ}\text{C}$.

Figure 6 schematically shows the determination of the CTE (0;50).

25 For the purposes of the invention, a glass-ceramic is understood to mean inorganic, non-porous materials with a crystalline phase and a vitreous phase, with the matrix, i.e. the continuous phase, generally being a glass phase, i.e. a vitreous phase.

30 According to one embodiment of the present invention, a transparent glass-ceramic is provided. As a result of the transparency, it is possible for many properties of such a glass-ceramic, in particular of course the internal quality thereof, to be assessed better.

It is preferable to use a glass-ceramic composed of the system $\text{Li}_2\text{O} - \text{Al}_2\text{O}_3 - \text{SiO}_2$ having the following composition (in % by weight based on oxide):

SiO_2	50 – 70
Al_2O_3	17 – 32
P_2O_5	3 – 12

Li ₂ O	2 – 5
Na ₂ O	0 – 2
K ₂ O	0 – 2
MgO	0 – 2
CaO	0 – 4
BaO	0 – 5
SrO	0 – 2
ZnO	0 – 4
TiO ₂	1 – 5
ZrO ₂	0 – 5

The glass-ceramic preferably has a proportion of SiO₂ of 50 to 70% by weight. The proportion of SiO₂ is more preferably at most 62% by weight, even more preferably at most 60% by weight.

The proportion of SiO₂ is more preferably at least 52% by weight, even more preferably at least

5 54% by weight.

The proportion of Al₂O₃ is preferably 17 to 32% by weight. The glass-ceramic more preferably contains at least 20% by weight, even more preferably at least 22% by weight, Al₂O₃. The proportion of Al₂O₃ is more preferably at most 30% by weight, more preferably at most 28% by

10 weight.

The phosphate content P₂O₅ of the glass-ceramic is preferably 3 to 12% by weight. The glass-ceramic more preferably contains at least 4% by weight, even more preferably at least 5% by weight, P₂O₅. The proportion of P₂O₅ is preferably limited to at most 10% by weight, more preferably to at most 8% by weight.

The glass-ceramic preferably also contains TiO₂ in a proportion of 1 to 5% by weight, with preference being given to at least 1.5% by weight TiO₂ being present. However, the proportion is preferably limited to at most 4% by weight, more preferably to at most 3% by weight.

20

The glass-ceramic can also contain ZrO₂ in a proportion of at most 5% by weight, preferably at most 4% by weight. ZrO₂ is preferably present in a proportion of at least 0.5% by weight, more preferably at least 1% by weight.

25 Furthermore, the glass-ceramic can contain alkali metal oxides such as Li₂O, Na₂O and K₂O. Li₂O may be present in a proportion of at least 2% by weight, preferably at least 3% by weight.

The proportion of Li_2O is limited to preferably at most 5% by weight, more preferably at most 4% by weight. Na_2O and K_2O are optionally present in the glass-ceramic. The proportion of Na_2O and/or K_2O can in each case and independently be at most 2% by weight, preferably at most 1% by weight, most preferably at most 0.5% by weight. Na_2O and K_2O can in each case and independently be present in a proportion of at least 0.01% by weight, preferably at least 0.02% by weight, more preferably at least 0.05% by weight, in the glass-ceramic.

The glass-ceramic can also contain alkaline earth metal oxides such as MgO , CaO , BaO and/or SrO , and also further divalent metals such as ZnO . The proportion of CaO is preferably at most 4% by weight, more preferably at most 3% by weight, even more preferably at most 2% by weight. The glass-ceramic preferably contains at least 0.1% by weight, more preferably at least 0.5% by weight, CaO . MgO can be present in the glass-ceramic in a proportion of at most 2% by weight, preferably at most 1.5% by weight, and/or preferably at least 0.1% by weight. The glass-ceramics can contain BaO in a proportion of less than 5% by weight, preferably at most 4% by weight, and/or preferably at least 0.1% by weight. In specific embodiments, the glass-ceramic may be BaO -free. The glass-ceramics can contain SrO in a proportion of at most 2% by weight and/or preferably at least 0.1% by weight. In specific embodiments, the glass-ceramic may be SrO -free. As further metal oxide, the glass-ceramic preferably may contain ZnO in a proportion of preferably at least 1% by weight, more preferably at least 1.5% by weight. The proportion of ZnO is limited to at most 4% by weight, preferably at most 3% by weight.

The glass-ceramic can also contain one or more customary refining agents such as As_2O_3 , Sb_2O_3 , SnO , SO_4^{2-} , F^- , Cl^- , Br^- or a mixture of these in a proportion of at most 1% by weight.

Transparent glass-ceramics with low coefficients of thermal expansion are known in this system, and commercially available products such as Zerodur®, Zerodur® M (both SCHOTT AG) and Clearceram® (Ohara) can be mentioned by way of example. These glass-ceramics usually contain approximately 50 to 80% of solid solutions with a high quartz content, also known as β -eucryptite solid solutions, as the main crystal phase. This crystallization product is a metastable phase which, depending on the crystallization conditions, changes its composition and/or structure or is converted into a different crystal phase. The solid solutions with a high quartz content have a thermal expansion which is very low or even falls as the temperature rises.

One embodiment of the invention relates to glass-ceramic components having a large volume. For the purposes of the present application, this term is intended to mean a glass-ceramic component having a mass of at least 500 kg, preferably at least 1 t, more preferably at least 2 t, in one embodiment of the invention at least 5 t, or edge lengths (width and/or depth) in the case of

rectangular shapes of at least 0.5 m, more preferably at least 1 m, and a thickness (height) of at least 50 mm, preferably 100 mm, or in the case of round shapes a diameter of at least 0.5 m, more preferably at least 1 m, more preferably at least 1.5 m, and a thickness (height) of at least 50 mm, preferably 100 mm. In specific embodiments of the invention, the glass-ceramic components can also be even larger glass-ceramic components having, for example, a diameter of at least 3 m or at least 4 m or greater and a weight of 10 to 15 tons. The maximum size of the glass-ceramic components depends on the size of the melting tank. However, it is also possible to cast larger glass-ceramic components with a diameter of 8 m and having a weight of between 40 and 60 tons. In particular, the invention also relates to rectangular glass-ceramic components, in which it is preferable that at least one surface has a surface area of at least 1 m², preferably at least 1.2 m², more preferably at least 1.4 m².

It is generally the case that large-volume glass-ceramic components having a considerably greater base than height are produced. The process according to the invention is also suitable, however, for producing large-volume glass-ceramic components with a high CTE homogeneity which have a shape that approximates a cube or a sphere. In addition to the volume and the weight, a glass-ceramic component of this type can also be described by a shape factor $R=h/d$, where h corresponds to the height of the glass block and d corresponds to the diameter. While the shape factors in the production of some large-volume glass components, such as lenses or telescope mirrors, generally lie below 0.1, there is also a demand for large-volume glass components having shape factors of above 0.1, for instance in the range between 0.1 and 0.3, for example prisms. A further embodiment of the present invention therefore relates to large-volume glass-ceramic components having high shape factors, which can lie between approximately 0.1 and 0.3 up to at most approximately 0.5. Here, the shape factor $R=h/d$ is defined as the ratio of height h to transverse extent d , with the transverse extent d in the case of a cylindrical shape being the diameter thereof and in the case of a cuboidal shape being the diagonal thereof.

A further embodiment relates to precision components with relatively small dimensions, in particular in the case of rectangular shapes with edge lengths (width and/or depth) or in the case of round areas with diameters of at least 100 mm and/or less than 500 mm and a thickness of less than 50 mm, preferably less than 10 mm and/or at least 1 mm, more preferably at least 2 mm. Precision components of this type can be used in microlithography, for example.

Components for microlithography are commonly used under standard clean room conditions, in particular at a room temperature of 22°C. The CTE can be adapted to this application temperature. However, components of this type are subjected to various process steps, for example

coating with metallic layers, cleaning, patterning and/or exposure processes, in which temperatures which are higher than those that prevail during later use in the clean room are present. It is advantageous if a component of this type has a low thermal expansion not only at the later application temperature, but also under the thermal loading caused by the process steps. The 5 present invention therefore also relates to components in which the temperature interval which satisfies the CTE tolerance of 0 ± 20 ppb/K, preferably of 0 ± 15 ppb/K, more preferably 0 ± 10 ppb/K, has at least an extent of 10 K, preferably at least 15 K, more preferably at least 20 K. Furthermore, according to this embodiment of the invention, preference is given to components having a CTE which is optimized to an application temperature of 20°C, 40°C, 50°C, 60°C 10 and/or 80°C.

In the following, measures are described which can improve the homogeneity of glass-ceramic components. Here, each one of these measures already leads to an improvement in the homogeneity. According to the invention, these can be employed individually or as a combination of 15 two or more thereof during the production of a glass-ceramic component.

A glass-ceramic is generally produced as follows: suitable raw materials are melted in a suitable composition, refined, homogenized and then hot-formed to form a glass blank or green body or the green glass. The "green body" of a glass-ceramic is understood to mean a vitreous body 20 which has been melted from a suitable composition and which can be converted into a glass-ceramic by treatment with a suitable temperature programme.

In particular, the influence of the batch production on the homogeneity of a glass-ceramic component was examined.

25 Firstly, it may be advantageous to set the grain size distribution of the components of the batch. This can have an influence on the melting properties and should be selected such that it is possible to achieve unproblematic melting and therefore the most homogeneous melt possible. Surprisingly, it is not advantageous for good homogeneity to select all components in a particularly fine grain size. A mixture of components of different grain sizes has proved to be advantageous, for example a division of the grain sizes of the components into at least two, for example 30 three, classes. Division into 4 or 5 classes may also be advantageous. By way of example, the batch can comprise

- 10 to 15% by weight of a fine fraction having a grain size of a class 1, i.e. a mean grain diameter of 1 – 50 µm,
- 35 60 to 85% by weight of a medium fraction having a grain size of a class 2, i.e. a mean grain diameter of 10 – 250 µm, and

- 5 to 10% by weight of a coarse fraction having a grain size of a class 3, i.e. a grain diameter of 100 – 1000 µm.

It is preferable to select starting components which can be readily melted, where possible the ni-

5 ntrates, carbonates or phosphates, if appropriate also the oxides, of the raw materials required, for example quartz powder, aluminium oxide, aluminium hydroxide, aluminium metaphosphate, aluminium orthophosphate, magnesium carbonate, magnesium phosphate, zirconium sand, zirconium oxide, zinc oxide, titanium dioxide, lithium carbonate, lithium nitrate, potassium carbonate and potassium nitrate.

10 It has furthermore been found that it is advantageous in the production of glass-ceramics to control the accuracy of the batch composition.

15 The batch of the starting components is generally weighed out in charges. In the production of optical glasses, a charge size which corresponds to approximately 10 to 25% by weight of the later quantity of the glass melt in the melting tank has proved to be expedient. It has surprisingly been found that smaller charge sizes can lead to an increase in the homogeneity of the glass-ceramic component when producing green glasses for glass-ceramic components of high homogeneity. According to the invention, in one embodiment of the invention, it is therefore the 20 case that batch charges which correspond to less than 10% by weight, preferably less than 5% by weight, of the later quantity of the green glass melt in the melting tank are weighed out.

25 It has furthermore been found that the weighing-out operation should be performed at least with an accuracy of preferably at least $\pm 0.3\%$ by weight, more preferably at least $\pm 0.1\%$ by weight, most preferably at least $\pm 0.05\%$ by weight, since even relatively minor differences in composition and therefore the formation of striae (streaks) and deviations in homogeneity can be avoided by this measure.

30 Furthermore, for introducing the batch into the melting tank, the batch can be moistened, in order to avoid loss through carry-over in particular of finely particulate components. For this purpose, at least 1% by weight, more preferably at least 3% by weight, water can be added to the batch, for example. It is preferable for at most 10% by weight water to be added, however.

35 In addition to avoiding the carry-over of finely particulate components, it is possible inter alia for the water or OH content of the melt and therefore of the resulting glass-ceramic to be set by moistening the batch. It has surprisingly been found that a higher OH content can have an ad-

vantageous effect on the homogeneity of a glass-ceramic. It is assumed that the presence of the water molecules makes the molecular bonds of the components in the melt less firm, and as a result the melt has a lower viscosity and can be homogenized more easily and more effectively. The relatively low viscosity can also bring about better refinement, and therefore it is possible 5 to obtain glass-ceramic components with a particularly low number of bubbles.

Common LAS glass-ceramics have an OH content of approximately from 0.03 to 0.05 mol/l. It has been found that the setting of the OH content of the glass-ceramic to a content of at least 10 0.06 mol/l, more preferably at least 0.07 mol/l can prove to be advantageous for the CTE homogeneity of a glass-ceramic. The OH content is preferably at most 0.15 mol/l, more preferably at most 0.13 mol/l, further preferably at most 0.12 mol/l, further preferably at most 0.11 mol/l, further preferably at most 0.10 mol/l, further preferably at most 0.095 mol/l. To determine the OH content, a plate of the glass-ceramic having a thickness of 0.57 mm was measured in an infrared spectrometer and the OH band of the IR spectrum was determined quantitatively between 15 2.7 and 3.3 μ m with respect to a calibration measurement and converted into the OH content.

The OH content of the melt can furthermore be set by hydrous starting components. By way of example, it is preferred according to the invention not to use aluminium oxide but rather aluminium hydroxide in a proportion of at least 50% by weight, more preferably at least 80% by weight, 20 of the total content of aluminium oxide as starting component. According to specific embodiments, exclusively aluminium hydroxide is used as starting component. Moreover, the OH content can also be set by using other hydroxides, for example $Mg(OH)_2$, $LiOH$, KOH and/or other hydroxides.

25 After the components have been weighed out, the batch is mixed by means of a conventional stirrer and then transported to the melting tank and introduced therein.

The green glass is melted in a plurality of steps:

- melting,
- optionally, homogenizing,
- refining,
- optionally, further homogenizing,
- optionally, a standing phase,
- casting.

35 After the batch has been melted completely, a first homogenization preferably takes place. The melt can be homogenized by bubbling, by thermal means or by mechanical means. Thermal

homogenization here is understood to mean that the convection of the melt is promoted by increasing the temperature or different heating of the tank surfaces. Thereafter, the temperature of the melt is increased to approximately 1600°C for the refining operation. This can be followed by a second homogenization phase. By way of example, the melt can be kept at an elevated 5 temperature for a number of days, with the duration of the holding time being dependent on the volume of the melt. It is assumed that the melt is further homogenized on a molecular level during such a holding or standing phase.

Then, the green glass is cast in metal moulds, as are described, for example, in DE 10 102004052514A1. The casting mould is then moved away laterally from the region beneath the 10 melting tank and moved into a furnace for controlled cooling. The controlled cooling to room temperature is effected at a sufficiently low cooling rate in order to avoid stresses and the formation of cracks.

15 The glass block thus produced is preferably subjected to a visual inspection for freedom from bubbles, freedom from cracks, etc. This can be followed by a first machining operation, in particular the removal of the surface regions, before the ceramization of the green body to form the glass-ceramic is carried out.

20 During the heat treatment referred to as ceramization, the green glass or the glass or the green body is converted into a glass-ceramic by controlled volume crystallization. During this heat treatment, crystallization nuclei of the same type or a different type are formed in the glass in a first conversion step ("crystallization nucleation"). Crystallization nuclei or crystal nuclei are understood to mean submicroscopic crystalline aggregates of a characteristic size. In a second 25 conversion step ("crystal growth"), if appropriate at a slightly higher temperature, crystals or crystallites grow from the crystal nuclei.

The present invention also relates to the use of the glass-ceramic according to the invention in astronomy, for example as mirror supports for large segmented telescopes or monolithic astronomical telescopes or else ultra-light mirror substrates, as precision components, such as 30 standards for precision measurement technology, mechanical precision parts, e.g. for ring laser gyroscopes, coil springs for the watchmaking industry, in LCD lithography, for example as mirrors and prisms, and also in microlithography, for example as mask holders, wafer stages and reference plates, and also as substrates for mask blanks and mirrors in EUV lithography.

The entire disclosures of all applications, patents and publications, cited above and below, and of corresponding German applications DE 10 2014 002 253 filed February 21, 2014 and DE 102014211700 filed June 18, 2014, are hereby incorporated by reference.

5 It goes without saying that the features of the invention mentioned above and those still to be explained herein below can be used not only in the respectively indicated combination but also in other combinations, without departing from the scope of the invention. The present invention will be illustrated below by a series of examples. However, the present invention is not limited to the examples mentioned.

10

Examples

Example 1:

15 The starting compounds named in Table 1 were weighed out with an accuracy of $\pm 0.1\%$ by weight (% by weight, based on oxide). In this case, the size of the charge weight was 4% by weight of the total weight of the melt. Before being introduced into the melting tank, the batch was moistened with 8% by weight water.

Table 1:

	Example 1	Raw material	Grain size fraction
SiO ₂	56.1	Quartz powder	Medium/coarse (5:1)
Al ₂ O ₃	25.5	Al(OH) ₃ Al orthophosphate	Medium Fine
P ₂ O ₅	7.1	Al orthophosphate	Fine
Li ₂ O	3.5	Li ₂ CO ₃	Coarse
Na ₂ O	0.2	Na ₂ O	Medium
K ₂ O	0.5	Potassium nitrate	Coarse
MgO	1.0	MgCO ₃	Coarse
ZnO	1.5	ZnO	Fine
TiO ₂	2.2	TiO ₂	Fine
ZrO ₂	1.9	Zirconium sand	Coarse
As ₂ O ₃	0.5	As ₂ O ₃	
Sum total	100.0		

20

This composition was melted in a melting tank measuring 28 m³ for a period of time of several days, with the temperature being kept at approximately 1600°C. The decomposition of As₂O₃ in

the process forms refining gases, which carry along small gaseous inclusions and homogenize the melt. During the refining phase and also during a subsequent cooling phase, the glass melt is homogenized further. In particular, controlling the temperature of the tank surface induces convection of the melt, in order to promote the homogenization. During a subsequent cooling phase, which can similarly last for several days, the temperature of the glass melt is reduced to approximately 1400°C, and the latter is then cast into (a) cylindrical casting moulds having a diameter of 1550 mm and a height of 350 mm (Example 1-A) and (b) rectangular casting molds having an edge length of 1.3 m and a height of 350 mm (Example 1-B). The blocks of the green glass thus produced were ceramized under the following conditions after removal of the marginal regions: firstly, the blank was heated at a heating rate of 0.5°C/h to a temperature of between 630 and 660°C. The heating rate was then reduced to 0.01°C/h and heating was continued until a temperature of between 770 and 800°C was reached. This temperature was maintained for 80 hours. Then, the blank was cooled at a cooling rate of -1°C/h to room temperature.

15 Example 1-A

A glass-ceramic plate having a diameter of 1.5 m was cut from a cylindrical ceramized block (a), and the CTE homogeneity of said glass-ceramic plate was determined as described below. Furthermore, the CTE homogeneity of smaller rectangular glass-ceramic components having an area of 110 × 110 mm and, respectively, 150 × 110 mm was determined.

Table 2:

	Example 1-A	Example 1-A	Example 1-A
Dimensions of glass-ceramic component	cylindrical form: diameter: 1.5 m height: 0.23 m	rectangular form (150×110×5)mm	rectangular form (110×110×5)mm
Weight of glass-ceramic component	1.03 t	284 g	153 g
OH content [mol/l]	0.087	0.087	0.087
Average CTE (0;50) [ppb/K]	0.0	0.0	0.0
Average CTE (19;25) [ppb/K]	3.0	3.0	3.0
CTE homogeneity [ppb/K]	3	2.5	2
Inclusions > 0.3 mm			
- Average number per 100 cm ³	1	0	0
Inclusions > 0.03 mm			
- Average number per 100 cm ³	3	1	1
- Maximum size [mm]	0.5	0.05	0.05

Example 1-B

Further blocks of the green glass from Example 1 were ceramized under the same conditions as described in Example 1, but with the following holding times to optimize the glass ceramics for 5 different application temperatures T_A :

Table 3:

	Ex. 1-B-a	Ex. 1-B-b	Ex. 1-B-c	Ex. 1-B-d
Ceramization holding times [h]	70	110	140	170
Figure 5, curve no.	1	2	3	4
Zero crossing(s) of CTE-T curve	20°C 32°C	5°C 32°C	-2°C 40°C	-6°C 58°C
Application temperature T_A	22°C	30°C	40°C	60°C
CTE (T_A) [ppb/K]	- 4	5	0	- 3
Temperature range around T_A in which CTE deviates at most ± 10 ppb deviates from 0 ppb/K [K]	8 – 31	23 – 39	26 – 33	47 – 82
Extent of temperature range [K]	23	16	7	35

Test specimens were taken from the resulting glass-ceramics, the CTE-T curve of said test 10 specimens being shown in Figure 5. The glass-ceramic plates having edge lengths of $100 \times 100 \times 5$ mm which were produced from these glass-ceramics likewise had a CTE homogeneity of 2 ppb/K.

Example 1-C

15 A rectangular glass-ceramic plate having edge lengths of 1.2 m was cut from the ceramized rectangular block (b), and the CTE homogeneity of said glass-ceramic plate was determined as described below.

Table 4:

	Example 1-A	Example 1-A	Example 1-A
Dimensions of glass-ceramic component (width×depth×height)	(1.2×1.2×0.235)m	(150×110×5)mm	(110×110×5)mm
Weight of glass-ceramic component	0.86 ton	284 g	153 g
OH content [mol/l]	0.088	0.088	0.088
Average CTE (0;50) [ppb/K]	-12.2	-12.2	-12.2
CTE homogeneity [ppb/K]	5	4	3
Inclusions > 0.3 mm			
- Average number per 100 cm ³	3	1	1
- Maximum size [mm]	1.5	0.4	0.4

Casting and ceramizing a rectangular shape of a glass ceramic is more difficult in view of the homogeneity of the resulting block of green glass and glass ceramic component since the flow of the glass during casting into the in particular the corner portions leads to unfavourable currents and thus to increased inhomogeneity. However, according to the present invention it is possible to cast large rectangular blocks with outstanding homogeneity.

Figure 1 shows a two-dimensional representation of the CTE homogeneity of the rectangular glass-ceramic component from Example 1 having edge lengths of 1.2 × 1.2 m. To determine the CTE homogeneity, 64 test specimens were cut from the glass-ceramic component and measured separately. Figure 2 shows the positions of the 64 test specimens taken. All CTE values measured lay between -15 and -10 ppb/K and thus correspond to CTE(0;50) 0 ± 20 ppb/K. The CTE homogeneity was 5 ppb/K.

Furthermore, the CTE homogeneity of smaller rectangular glass-ceramic components having an area of 110 × 110 mm and, respectively, 150 × 110 mm was determined. Figure 2 shows the positions of the test specimens taken for this determination. Figures 3 and 4 show CTE values for the individual test specimens of the test specimens taken in the horizontal (Figure 3) and, respectively, in the vertical (Figure 4) direction. The tolerances brought about by the measurement are shown in Figures 3 and 4. The CTE homogeneity was 3 ppb/K (110 × 110 mm) and (150 × 110 mm), together 4 ppb/K.

Example 2

A glass-ceramic raw glass melt was melted as described in Example 1 and cast into a round casting mould having a diameter of 4.5 m and a height of 350 mm. After cooling, the marginal

regions were removed and the raw glass block was ceramized: firstly, the blank was heated at a heating rate of 0.5°C/h to a temperature of between 630 and 660°C. The heating rate was then reduced to 0.01°C/h and heating was continued until a temperature of between 770 and 800°C was reached. This temperature was maintained for 80 hours. Then, the blank was cooled at a 5 cooling rate of -1°C/h to room temperature.

A round glass-ceramic disc having a diameter of 4263 mm, a thickness of 80 mm and a weight of 2.89 ton was cut from the ceramized block, and the CTE homogeneity of said glass-ceramic disc was determined as described in the table below.

10

Table 5:

	Example 2
OH content [mol/l]	0.088
Average CTE (0;50) [ppb/K]	0.0
Average CTE (5;35) [ppb/K]	6.0
CTE homogeneity (0;50)	3 ppb/K
CTE homogeneity (5;35)	6 ppb/K
Inclusions > 0.3 mm	
- Average number per 100 cm ³	3
- Maximum size [mm]	1.5

The glass-ceramic disc had the internal quality described in Table 5:

15

Table 6:

	Critical volume	Non-critical volume
Maximum diameter of the inclusions [mm]	≤ 2.0	≤ 4.0
Number of inclusions per 100 cm ³	≤ 1	≤ 1
Average volume density [particles/cm ³]	≤ 5 × 10 ⁻⁶	≤ 5 × 10 ⁻⁶
Striae (photoelastic examination)	None verified	None verified
Stress in the volume [nm/cm]	≤ -2.8	≤ -2.8

For the purposes of this Example 2, the term "critical volume" is understood to mean the volume from the surface down to a depth of 2 mm.

20

Comparative Examples

A glass-ceramic raw glass melts was melted basically as described in Example 1 but with the differences as

5

The melts were cast into a cylindrical casting molds having a diameter of 1550 mm and a height of 350 mm and processed and ceramized into cylindrical glass ceramic blanks having a diameter of 1.5 m and a height of 350 mm as described in Example 1-A. The physical properties are also described in Table 7 below.

10

Table 7:

	Comparative Example 1	Comparative Example 2
Production differences to Ex. 1		
Weighting accuracy	0.3 wt.%	0.5 wt.%
Size of batch charge	12 %	12 %
Starting compounds	(same as Ex. 1)	Al(OH) replaced by Al ₂ O ₃
Grain size		
- Fine fraction	20 % by weight	20 % by weight
- Medium fraction	70 % by weight	60 % by weight
- Coarse fraction	10 % by weight	20 % by weight
Water added to batch	5 % by weight	3 % by weight
Physical properties of glass ceramic		
OH content [mol/l]	0.06	0.05
Average CTE (0;50) [ppb/K]	39.9	42.4
CTE homogeneity [ppb/K]	4	6
Inclusions > 0.3 mm		
- Average number per 100 cm ³	4	6
- Maximum size [mm]	1.0	1.5

Comparing the results of the Comparative Examples 1 and 2 with the Examples, it is shown that by the present invention, glass ceramic components having a higher CTE homogeneity, better average CTE and better internal quality can be produced.

15

The preceding examples can be repeated with similar success by substituting the generically or specifically described reactants and/or operating conditions of this invention for those used in the preceding examples.

From the foregoing description, one skilled in the art can easily ascertain the essential characteristics of this invention and, without departing from the spirit and scope thereof, can make various changes and modifications of the invention to adapt it to various usages and conditions.

Claims

1. Low thermal expansion glass-ceramic component, which, at an application temperature T_A , has a CTE in the interval of 0 ± 20 ppb/K, preferably in the interval of 0 ± 15 ppb/K, more preferably in the interval of 0 ± 10 ppb/K, and a CTE homogeneity of at most 5 ppb/K.
2. Glass-ceramic component according to claim 1, whereas the application temperature T_A lies within in the range of -60° to 100°C .
3. Glass-ceramic component according to claim 1 or 2, whereas the application temperature T_A is selected from the group consisting of 22°C , 30°C , 40°C , 60°C , 80°C and 100°C .
4. Glass-ceramic component according to one or more of the preceding claims, wherein the temperature interval which satisfies the CTE tolerance of 0 ± 10 ppb/K has at least an extent of 10 K.
5. Glass-ceramic component according to one or more of claims 1 to 3, having a rectangular base with edge lengths of in each case at least 100 mm and a thickness of at least 5 mm.
6. Glass-ceramic component according to one or more of the preceding claims, having a mass of at least 500 kg.
7. Glass-ceramic component according to one or more of the preceding claims, having a rectangular shape and wherein at least one surface has a surface area of at least 1 m^2 .
8. Glass-ceramic component according to one or more of the preceding claims, comprising an LAS glass-ceramic with the following composition (in % by weight based on oxide)



SiO_2	50 – 70
Al_2O_3	17 – 32
P_2O_5	3 – 12
Li_2O	2 – 5
Na_2O	0 – 2
K_2O	0 – 2
MgO	0 – 2
CaO	0 – 4



BaO	0 – 5
SrO	0 – 2
ZnO	0 – 4
TiO ₂	1 – 5
ZrO ₂	0 – 5



9. Glass-ceramic component according to one or more of the preceding claim, comprising a glass-ceramic with an OH content of at least 0.06 mol/l.
10. Use of a glass-ceramic component according to one or more of claims 1 to 9 in astronomy, metrology, LCD lithography or microlithography, for example as mask holders, wafer stages or reference plates or as an optical component in EUV lithography, in particular as a substrate for an EUV mask blank or an EUV mirror.
11. Use of a glass-ceramic component according to one or more of claims 1 to 9 as a precision component, such as standards for precision measurement technology, mechanical precision parts, e.g. for ring laser gyroscopes, coil springs for the watchmaking industry, and in LCD lithography, for example as mirrors and prisms.
12. Process for producing a glass-ceramic component according to one or more of claims 1 to 9, comprising the steps of
 - melting of a green body,
 - casting of the green body,
 - ceramization of the green body to form a glass-ceramic.

1/3

Figures

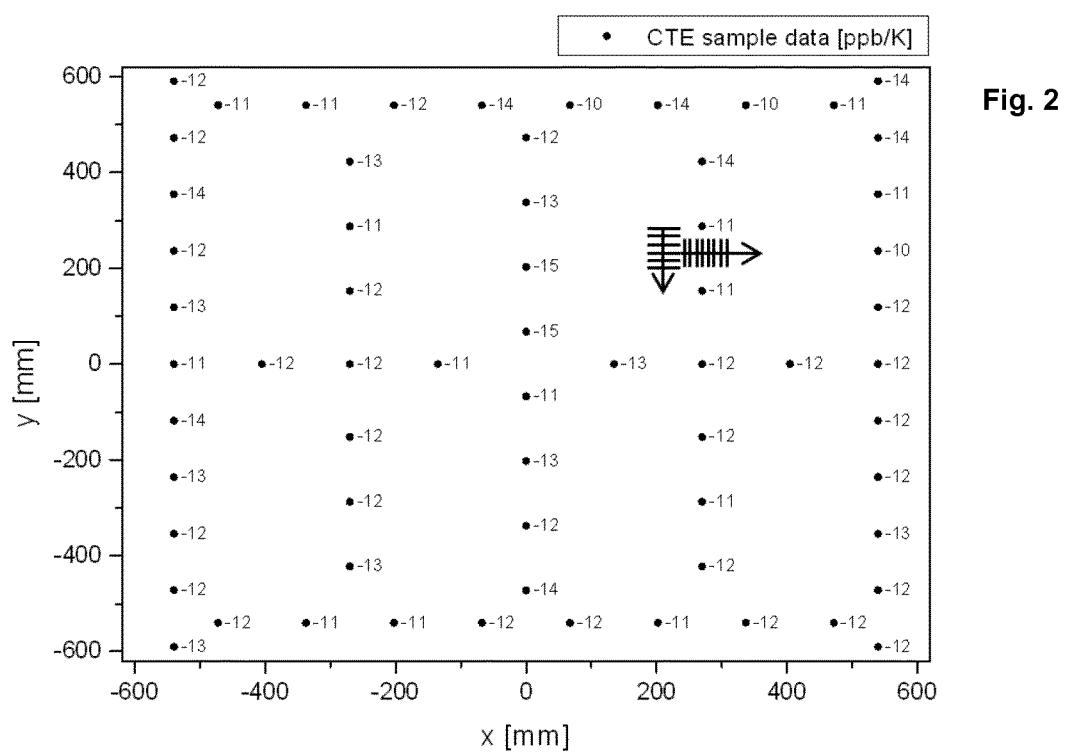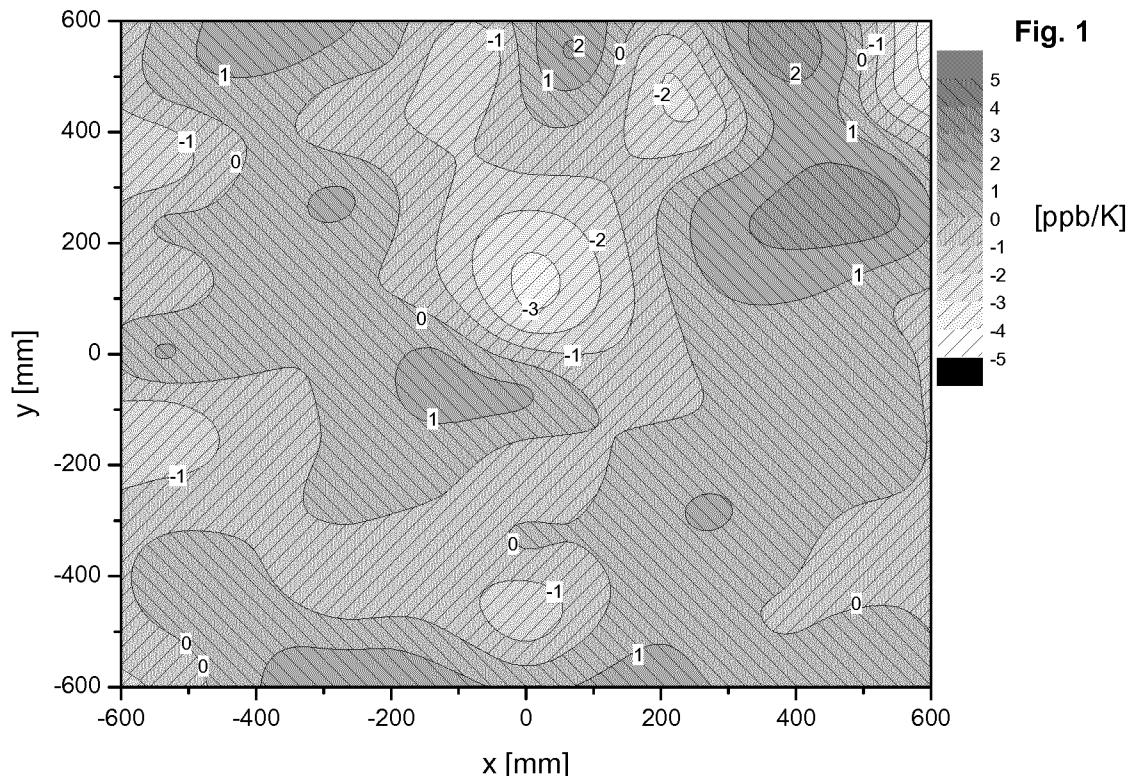

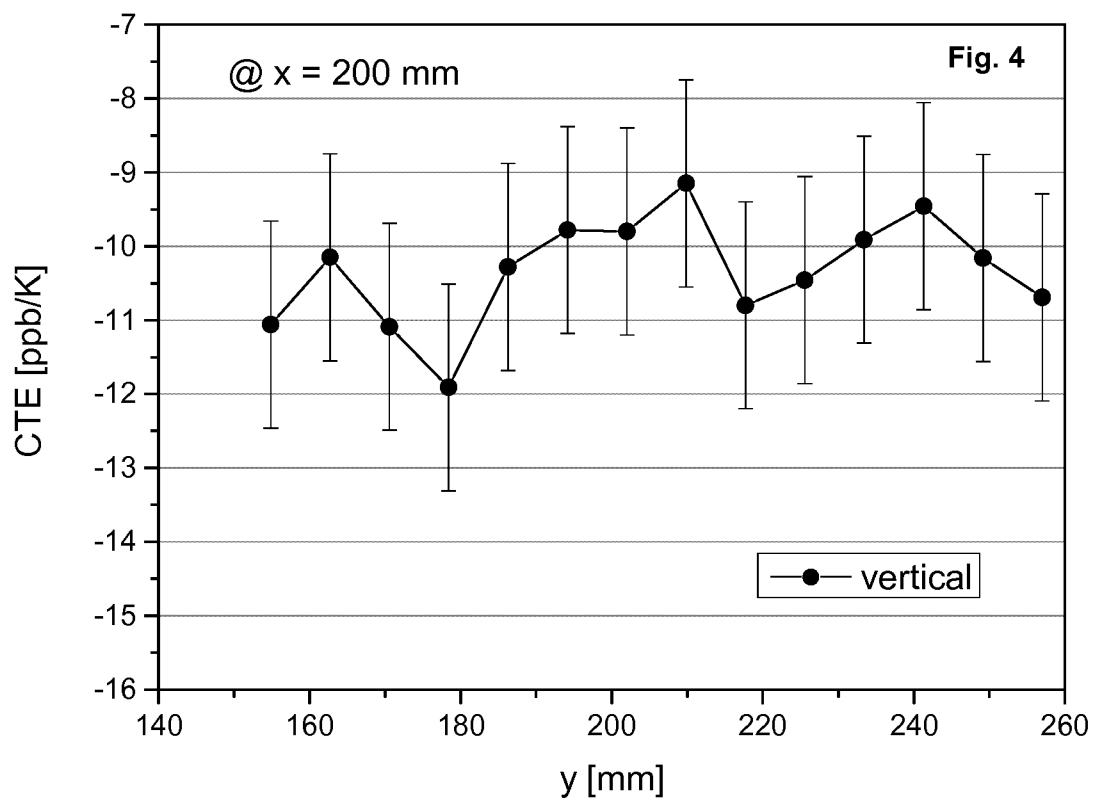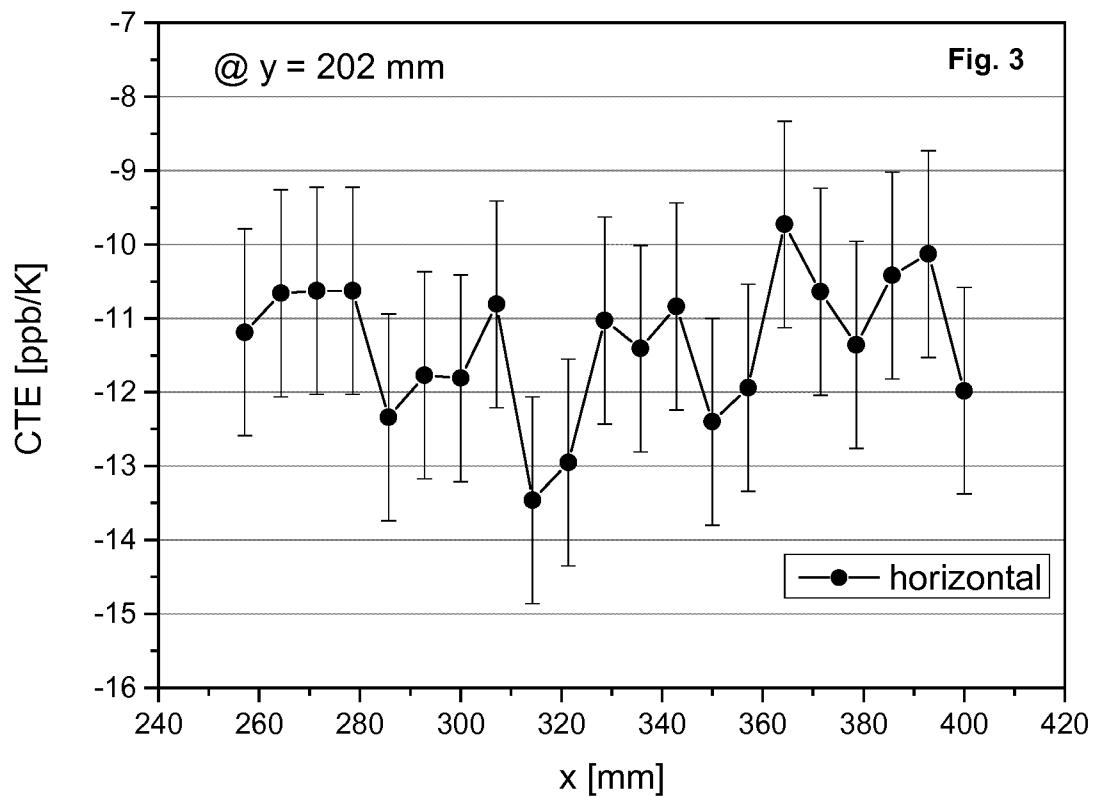

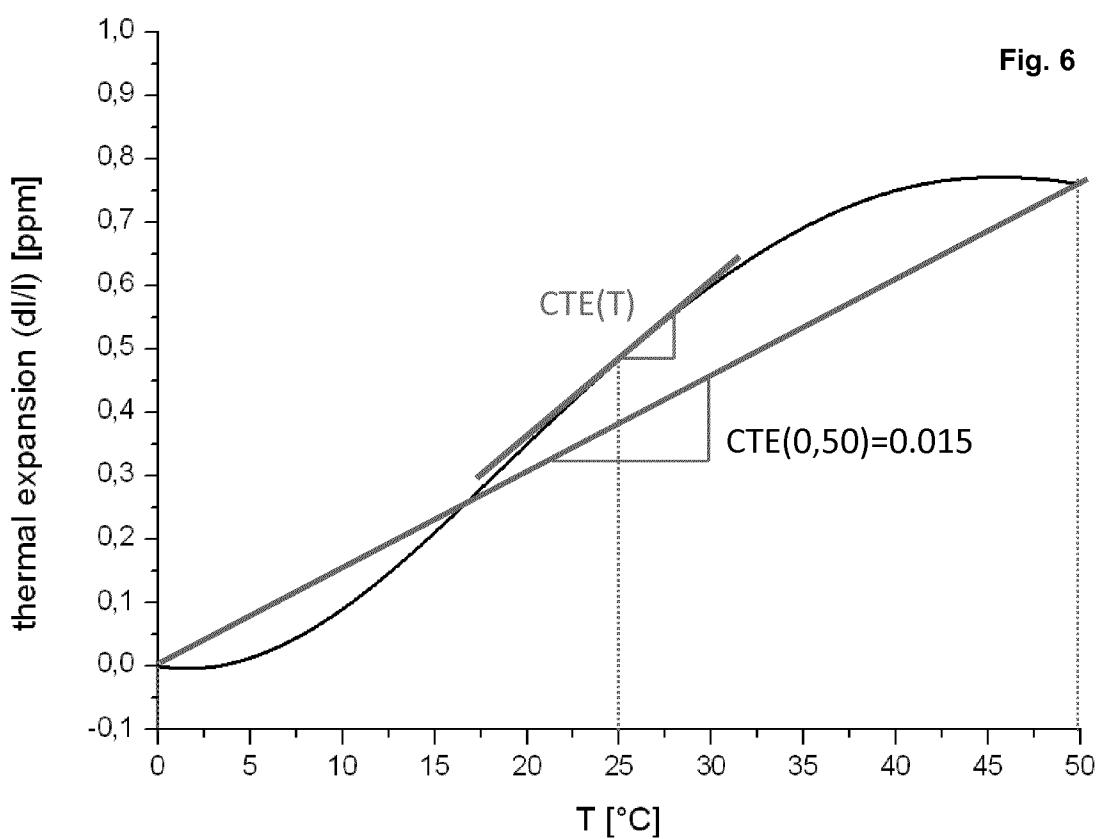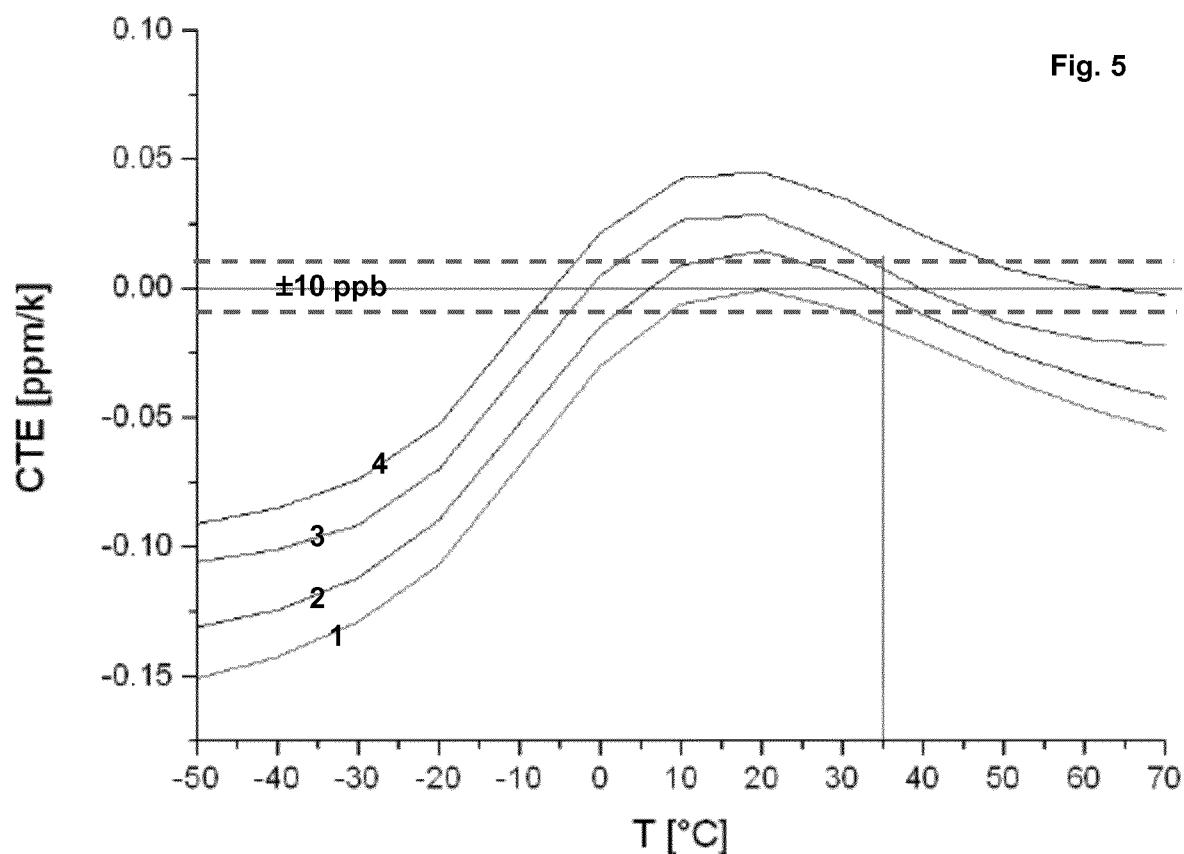

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/053576

A. CLASSIFICATION OF SUBJECT MATTER
INV. C03C3/097 C03C10/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C03C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data, PAJ, COMPENDEX, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 516 863 A1 (OHARA KK [JP]) 23 March 2005 (2005-03-23) paragraphs [0003] - [0005], [0014] - [0015], [0035] - [0050], [0064]; claims 13-16; examples 1,4 ----- US 2005/197242 A1 (MITRA INA [DE] ET AL) 8 September 2005 (2005-09-08) paragraphs [0070] - [0077], [0098] - [0101]; example 6 ----- DE 10 2004 052514 A1 (SCHOTT AG [DE]) 4 May 2006 (2006-05-04) cited in the application paragraphs [0017] - [0019], [0053] - [0058] ----- -/-	1-12 1-12 1-12

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
29 April 2015	13/05/2015
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Lecerf, Nicolas

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/053576

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 321 440 A2 (SCHOTT GLAS [DE]; ZEISS STIFTUNG [DE] SCHOTT GLAS [DE]; ZEISS CARL STI) 25 June 2003 (2003-06-25) paragraphs [0020] - [0023], [0034] - [0036], [0070] - [0091] -----	1-12
A	WO 2011/138340 A2 (ZEISS CARL SMT GMBH [DE]; KALLER JULIAN [DE]; CLAUSS WILFRIED [DE]; GE) 10 November 2011 (2011-11-10) page 1, line 1 - page 3, line 6 -----	1-12

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/EP2015/053576

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
EP 1516863	A1 23-03-2005	CN 1607191 A EP 1516863 A1 HK 1075243 A1 JP 4412952 B2 JP 2005089272 A KR 20050028845 A TW I286999 B		20-04-2005 23-03-2005 18-12-2009 10-02-2010 07-04-2005 23-03-2005 21-09-2007
US 2005197242	A1 08-09-2005	CN 1657462 A DE 102004008824 A1 JP 4504835 B2 JP 2005231994 A NL 1028342 A1 NL 1028342 C2 US 2005197242 A1		24-08-2005 08-09-2005 14-07-2010 02-09-2005 23-08-2005 17-07-2007 08-09-2005
DE 102004052514	A1 04-05-2006	CN 1778735 A DE 102004052514 A1 JP 4560474 B2 JP 2006117525 A		31-05-2006 04-05-2006 13-10-2010 11-05-2006
EP 1321440	A2 25-06-2003	AT 342241 T EP 1321440 A2 JP 4429597 B2 JP 2003267789 A US 2003125184 A1 US 2005235696 A1		15-11-2006 25-06-2003 10-03-2010 25-09-2003 03-07-2003 27-10-2005
WO 2011138340	A2 10-11-2011	CN 102934030 A DE 102010028488 A1 JP 2013530517 A US 2013120863 A1 WO 2011138340 A2		13-02-2013 03-11-2011 25-07-2013 16-05-2013 10-11-2011