

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
29 December 2005 (29.12.2005)

PCT

(10) International Publication Number  
**WO 2005/124225 A1**

(51) International Patent Classification<sup>7</sup>: **F21S 8/02**,  
F21V 25/00

(21) International Application Number:  
PCT/GB2005/001906

(22) International Filing Date: 17 May 2005 (17.05.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0413655.2 18 June 2004 (18.06.2004) GB  
0504267.6 2 March 2005 (02.03.2005) GB

(71) Applicant (for all designated States except US): **SCOL-  
MORE INTERNATIONAL LIMITED** [GB/GB]; Scol-  
more Park, Landsberg, Lichfield Road Industrial Estate,  
Tamworth, Staffs B79 7XB (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **RAWLINS, Karl,  
Justin** [GB/GB]; 2 Raygill, Wilnecote, Tamworth, Staffs  
B77 4JY (GB).

(74) Agent: **FENWICK, Elizabeth, Anne**; 5 Stonehouse  
Road, Sutton Coldfield, West Midlands B73 6LR (GB).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,  
MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ,  
OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL,  
SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,  
VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,  
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,  
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: HEAT RESISTANT CASING

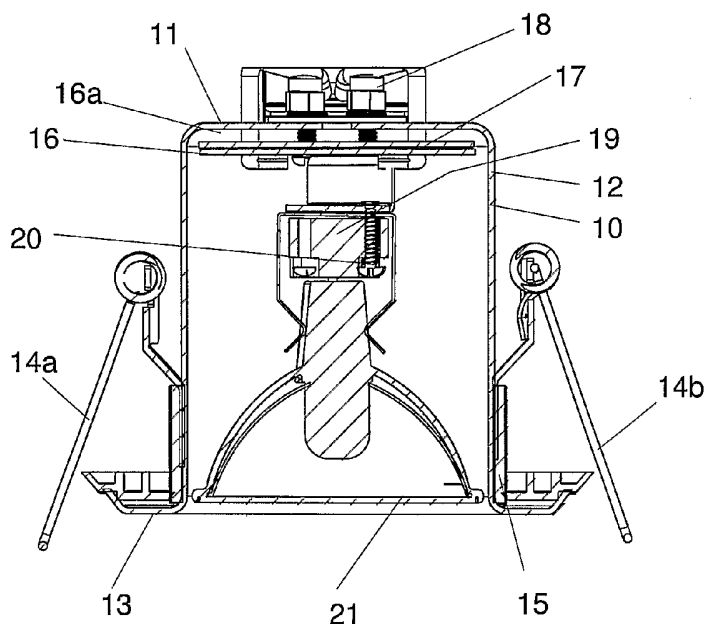

(57) Abstract: A casing (10) (fire hood) for an electrical fitting comprises a top (11) of heat resistant material provided with at least one aperture and supporting a side-wall (12). The housing encloses an electrical fitting (19) attached to the housing by attachment means, and within the housing is a first solid fire-resistant intumescent material (17) positioned between the interior surface of the top (11) and electrical fitting (19). Intumescent material (17) is provided with at least one aperture and is spaced from the interior surface of top (11). The housing is further provided with a collar of a second solid fire-resistant intumescent material (15) extending around the exterior surface of side wall (12). In the event of fire or significant temperature increase, intumescent material (17) and (15) expand to around nine times their original volume, filling the gap (16A) between the top (11) and plate (16), together with the apertures in the top (11), and the space between the housing and the surrounding structure e.g. a ceiling or wall. These expansions help to prevent a fire from spreading.

### HEAT RESISTANT CASING

This invention relates to a new fire resistant casing for use with electrical fittings, particularly for use with lamp holders.

New building regulations require down-lighters fitted into ceilings to be provided with fire hoods to prevent or at least minimise the spread of fire. Various types of fire hood have been proposed which include a fire resistant intumescent material that upon excessive heating (e.g. in the event of a fire) expand to many times their original volume, thus forming a fire barrier to minimise or prevent fire spread. These hoods have been quite successful, but the aim is still to increase the efficiency of the built-in ventilation and fire/heat protection, whilst providing a cost effective and easy to install option. An object of the present invention is to provide a new heat resistant casing (fire hood) which can be supplied already fitted with a lamp holder or other electrical fitting and which in use is efficient at minimising heat build up and also in preventing or minimising fire spread, should that occur.

According to one aspect of the present invention, there is provided a heat-resistant casing for an electrical fitting in which the casing comprises a housing of heat resistant material comprising a top supporting one or more side-walls, the top is provided with at least one aperture, the housing encloses an electrical fitting which is attached to the housing by an attachment means, and within the housing is a first solid fire-resistant intumescent material positioned between the interior surface of the top and the electrical fitting, characterised in that the first solid fire-resistant intumescent material is provided with at least one aperture and is spaced apart from the interior surface of the top, and the housing is further provided with a collar of a second solid fire-resistant intumescent material which extends substantially completely around the exterior surface of the side wall or walls.

The housing is preferably of substantially circular cross-section and is preferably of self-supporting substantially rigid construction and of metal or plastic. The top preferably has a plurality of apertures for ventilation (heat dissipation), passage of electrical cables and attachment means for the first fire resistant intumescent material. The 'free edge' of the side wall, i.e. the side wall remote from the top, preferably has an outwardly extending lip. This

lip may be used for attachment of a cover for the electrical fitting. Where the electrical fitting is a lamp holder, a cover in the form of a decorative ring can be attached to the lip. The casing is particularly applicable for recessing into a support structure such as a ceiling or wall, especially when the support structure is being constructed. In a preferred embodiment, a seal is provided substantially overlying the lip so that the seal when in use is sandwiched between the lip and the surface into which the casing is fitted e.g. a ceiling or wall. One aim of the seal is to prevent moisture and air from getting between the casing and the fitting surface (e.g. ceiling or wall) and thus into the voids between floors and into loft spaces. This is an area in which house builders are being told to clamp down, so to improve energy efficiency and is requested by the NHBC (National House Builders Council). A further potential benefit of the seal is that it allows the casing to sit evenly on the ceiling where a textured surface, e.g. Artex, has been used, thus not showing gaps around the rim and preventing the downlighter leaning at an angle. In addition the seal helps to reduce the contact temperature between the rim of the downlighter and the ceiling board. The seal may e.g be made of a moisture resistant elastomeric composition and preferably is provided with a raised rib portion on the surface remote from the lip.

The intumescent material may be based on graphite or other intumescent materials which upon exposure to extreme heat expand in volume. An example of a graphite based material is that supplied by Technical Fibre Products Limited as 'Intumescent Material' and consists of a high temperature Rockwool fibre mat containing easily dispersed foliating graphite bonded in acrylic. The first and second intumescent materials may be of the same composition or different.

Preferably the first intumescent material is provided with a plurality of apertures. The apertures are for passage of electrical cables and/or for ventilation to dissipate heat that tends to build up in the casing when the electrical fitting is switched on. Preferably a plate is provided to support the first intumescent material, in which case the plate is usually provided with apertures, at least some of which coincide with those of the first intumescent material. The apertures are conveniently circular holes punched through with

a suitable tool. The plate is preferably sized to fit snugly within the casing and may then be attached to the interior surface of the top by means of e.g. nuts and bolts. The nuts also serve to maintain the necessary space between the interior surface of the top and the first intumescent material supported on the plate. Preferably the gap between the interior surface of the top and the first intumescent material is in the range 2 to 8 mm, more preferably 2 to 5mm. Where a plate is provided, this may conveniently be used for attachment of the electrical fitting e.g. by means of nuts and bolts. The electrical fitting is preferably positioned within the housing so that it does not touch the internal surface of the side wall or walls.

It will be appreciated that certain features of the invention which are, for clarity, described in the context of separate embodiments, may also be provided in combination in a single embodiment. Conversely, various features of the invention, which are for brevity described in the context of a single embodiment, may also be provided separately or in any suitable combination.

Embodiments of the present invention will now be described with reference to the accompanying drawings in which:

Figure 1 is a schematic view, partly in section, of a casing according to the present invention;

Figure 2 is a perspective top view of the casing of Figure 1, also showing connections of the electrical cable to a terminal housing.

Figure 3 is a perspective top view of the first solid fire-resistant material used in Figure 1, attached to its backing plate and threaded through with electrical cables.

Figure 4 is a bottom view of the first solid fire-resistant material and attached backing plate of Figure 3 in position in the casing.

Figure 5 is a schematic side view, partly in section, of the casing of Figure 1.

Figure 6 are perspective and side views illustrating a moisture seal (2 views), the seal positioned on a heat resistant casing and the casing recessed into a ceiling.

Referring now to Figure 1 a heat resistant casing 10 comprises a cylindrical pressed steel housing consisting of a top 11 supporting a side wall 12. The

side wall 12 has a lip 13 onto which is clipped a cover 14 by means of spring clips 14a & 14b. A collar 15 of solid fire resistant intumescent material surrounds the lower edge of the side wall 12. The collar 15 is 25mm high and 12mm thick and is glued in place. Within the housing is a steel plate 16 supporting a 12mm thick layer of solid fire resistant intumescent material 17. Plate 16 and layer 17 have corresponding apertures. The gap 16A between the top 11 and layer 17 is chosen to be in the range 2 to 5mm. The plate 16 is held in place by nuts and bolts 18, which also keep the gap 16A consistent. A pressed steel lamp holder 19 is attached to plate 16 by means of nuts and bolts 20. An aluminium lamp 21 fits into the lamp holder 19.

Referring to Figure 2, seven apertures are apparent in top 11. Through three apertures electrical cabling 22 to 24 passes, into two apertures are fitted fixing nuts and bolts for the terminal housing 25, one aperture 26 is open for ventilation, and one aperture 27 is occupied by a nut and bolt connected to the plate 16 inside the casing.

Referring to Figure 3, cables 22 and 23 are shown, together with ventilation apertures 28,29.

Referring to Figure 4, cables 22 & 23 are shown through plate 16, plus four ventilation apertures e.g. 30.

Figure 5 is a schematic representation showing i.a. more clearly how the down-lighter cover 14 clips into place.


In operation, the apertures in the top 11, solid fire resistant intumescent material 17 and plate 16 act to ventilate the casing and dissipate heat.


In the event of a fire, the solid fire resistant intumescent material 17 expands to 9 times its volume, filling the gap between the top 11 and plate 16 and the aforementioned apertures including those through which the cabling passes. This expansion helps to prevent the fire from spreading e.g. to an upper floor when the housing is recessed into a ceiling. Also, the collar 15 of solid fire resistant intumescent material expands to nine times its volume, filling the space between the housing and the surrounding structure e.g. the ceiling. This expansion helps to prevent the fire from spreading. Where a seal is fitted as in Figure 6, this aims to prevent moisture and air from getting between the casing and the ceiling and also helps to give the casing a flat fitting in the ceiling.

## CLAIMS:

1. A heat resistant casing for an electrical fitting in which the casing comprises a housing of fire resistant material comprising a top supporting one or more side-walls, the top is provided with at least one aperture, the housing encloses an electrical fitting which is attached to the housing by an attachment means, and within the housing is a first solid fire-resistant intumescent material positioned between the interior surface of the top and the electrical fitting, characterised in that the first solid fire-resistant intumescent material is provided with at least one aperture and is spaced apart from the interior surface of the top, and the housing is further provided with a collar of a second solid fire-resistant intumescent material which extends substantially completely around the exterior surface of the side wall or walls.
2. A heat resistant casing according to Claim 1 characterised in that the housing is of a self-supporting substantially rigid construction.
3. A heat resistant casing according to Claim 1 or 2 characterised in that the housing has a substantially circular cross-section.
4. A heat resistant casing according to any preceding claim characterised in that the housing is of metal or plastic.
5. A heat resistant casing according to any preceding claim characterised in that the collar is adjacent the edge of the side wall remote from the top.
6. A heat resistant casing according to any preceding claim characterised in that the side wall remote from the top has an outwardly extending lip.
7. A heat resistant casing according to claim 6 characterised in that a seal is provided which extends substantially around the surface of the outwardly extending lip.
8. A heat resistant casing according to claim 7 characterised in that the seal is positioned so that when the casing is fitted into a retaining surface the seal will be sandwiched between the outwardly extending lip and that retaining surface.

9. A heat resistant casing according to any preceding claim characterised in that the top is provided with a plurality of apertures.
10. A heat resistant casing according to any preceding claim characterised in that the first solid fire-resistant intumescent material is provided with a plurality of apertures.
11. A heat resistant casing according to any preceding claim characterised in that the housing is further provided with a plate which supports the first solid fire-resistant intumescent material.
12. A heat resistant casing according to any preceding claim characterised in that the first solid fire-resistant intumescent material is spaced apart from the internal surface of the top by a gap of from 2 to 8mm.
13. A heat resistant casing according to Claim 12 characterised in that the gap is from 2 to 5 mm.
14. A heat resistant casing according to Claim 11 characterised in that the plate is provided with at least one aperture.
15. A heat resistant casing according Claim 14 characterised in that at least one aperture in the plate coincides with at least one aperture in the first solid fire-resistant intumescent material.
16. A heat resistant casing according to any one of claims 11 to 15 characterised in that the electrical fitting is attached to the plate.
17. A heat resistant casing according to any preceding claim characterised in that the electrical fitting is spaced from the internal surface of the side wall or walls.
18. A heat resistant casing according to any preceding claim characterised in that the electrical fitting comprises a lamp holder.
19. A heat resistant casing according to any preceding claim characterised in that the first solid fire-resistant intumescent material is of substantially the same composition as the second solid fire-resistant intumescent material.
20. A heat resistant casing according to any preceding claim characterised in that it is adapted to be recessed into a support structure.
21. heat resistant casing according to claim 1 and substantially as herein described with reference to any one of Figures 1 to 6.

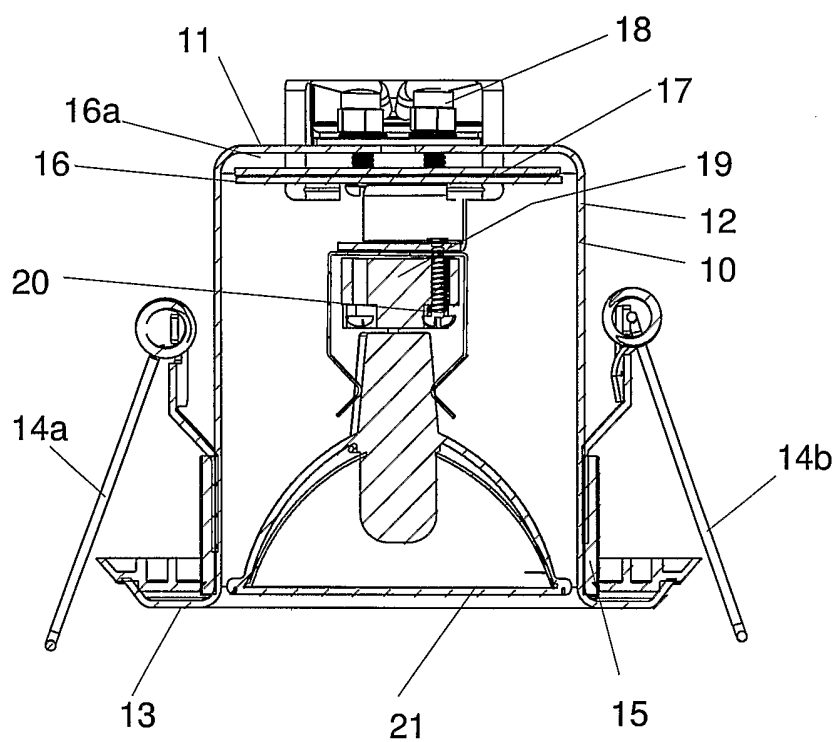**Figure 1 of 6**

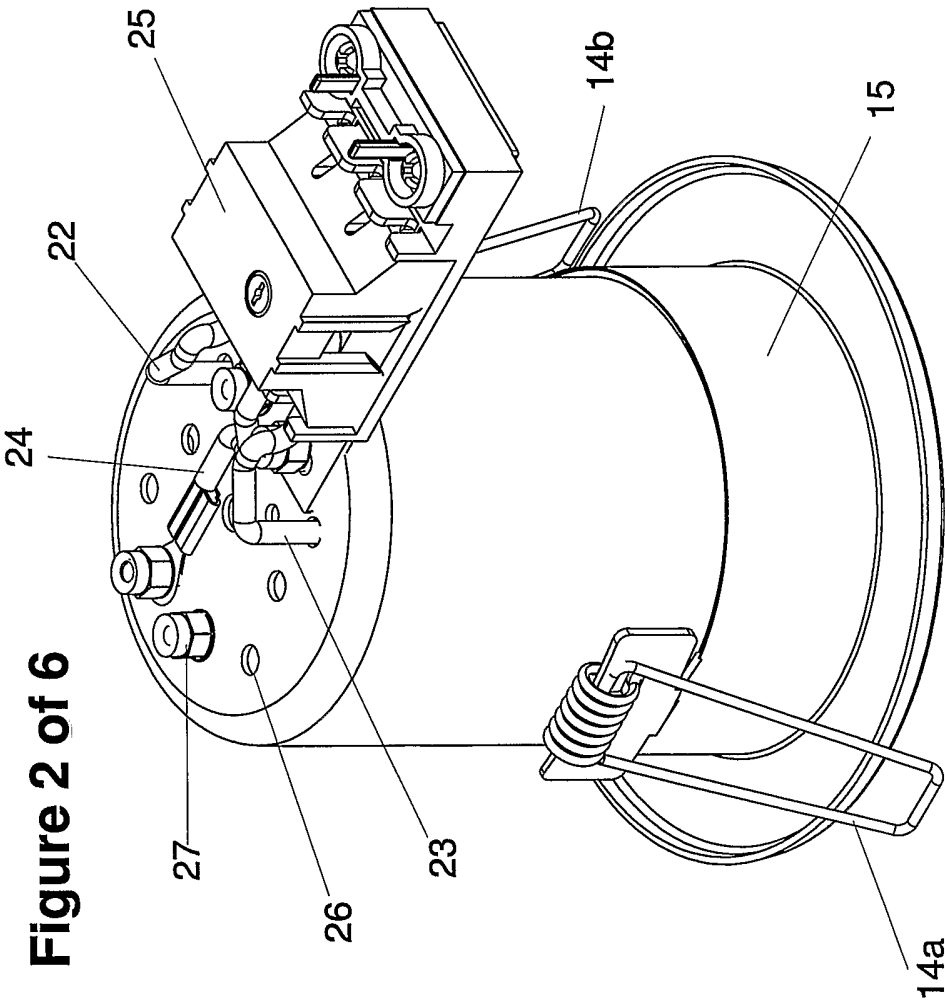

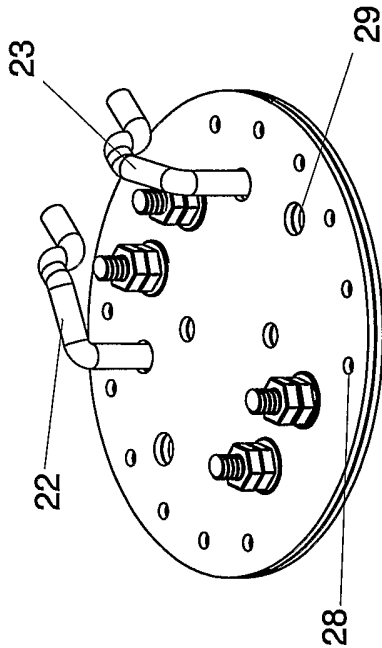


Figure 3 of 6




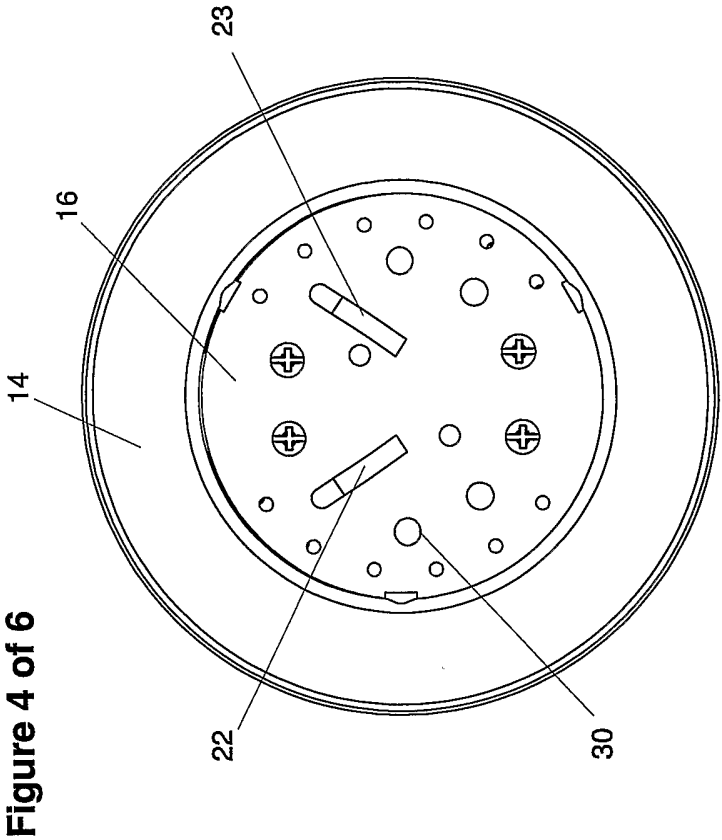


Figure 5.

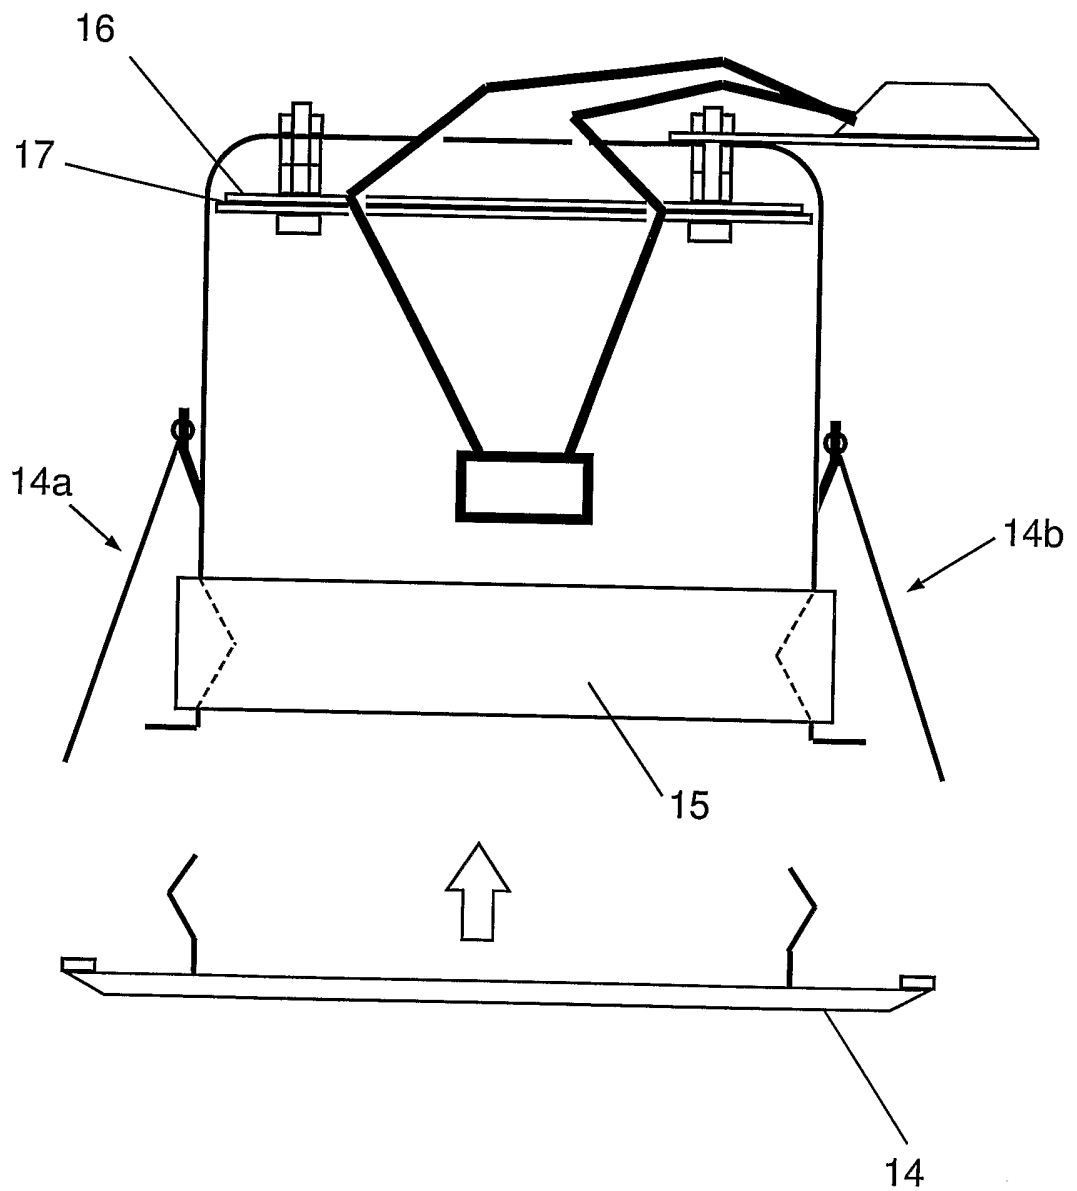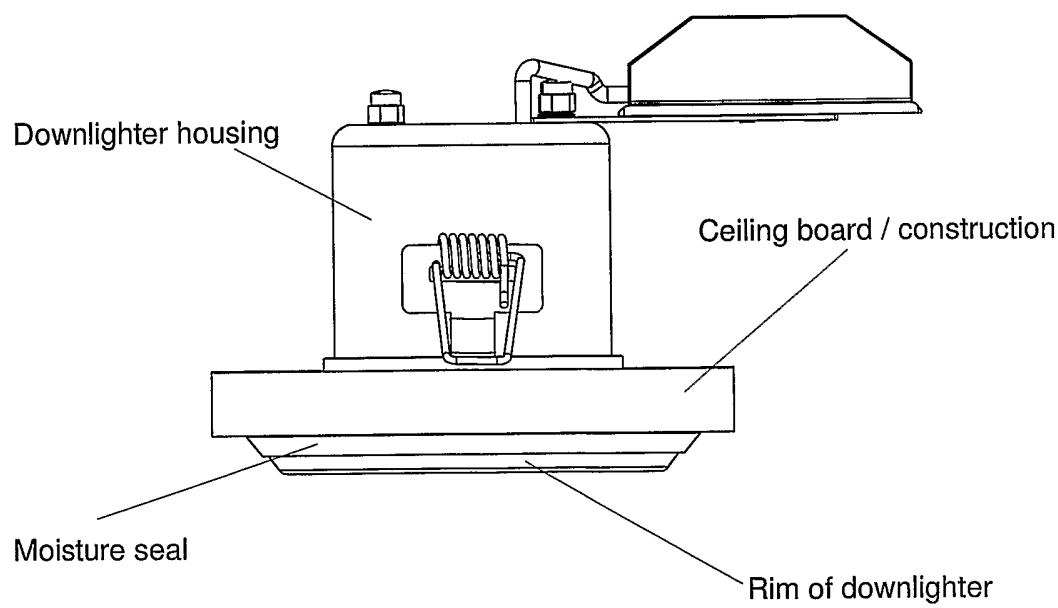

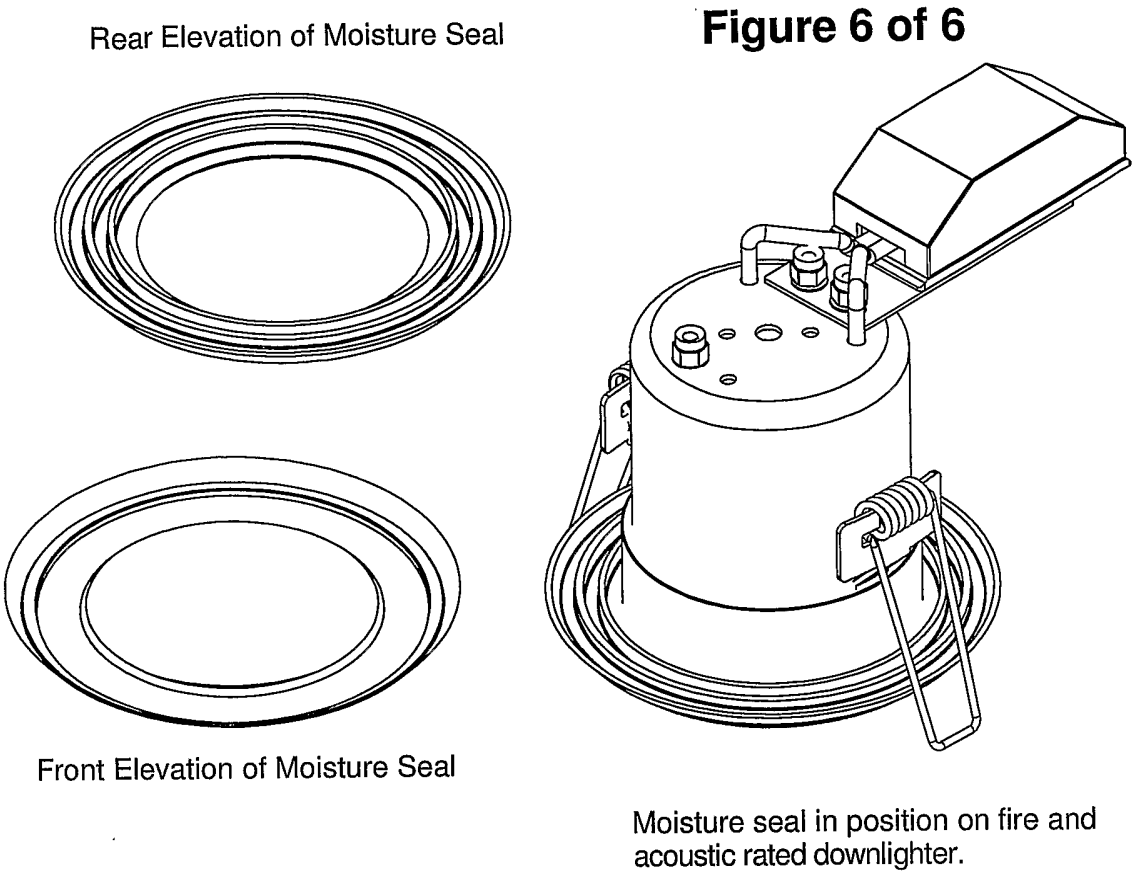

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB2005/001906

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 F21S8/02 F21V25/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 F21V F21S

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages                                              | Relevant to claim No. |
|------------|---------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| X          | GB 2 326 467 A (* ENVIRONMENTAL SEALS LIMITED) 23 December 1998 (1998-12-23)<br>page 3, line 13 - page 5, line 5<br>figures 1,2 | 1-6,<br>11-21         |
| Y          |                                                                                                                                 | 7,8                   |
| Y          | US 6 447 145 B1 (THOMAS ERIC P ET AL)<br>10 September 2002 (2002-09-10)<br>column 2, line 52 - line 63<br>figure 2              | 7,8                   |
| A          |                                                                                                                                 | 1,6                   |
| A          | WO 98/12472 A (JONES, PETER, CHARLES)<br>26 March 1998 (1998-03-26)<br>page 6, line 15 - line 24<br>figure 1                    | 1-4                   |
|            | -----<br>-/--                                                                                                                   |                       |

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

5 October 2005

Date of mailing of the international search report

12/10/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

De Mas, A

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB2005/001906

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category ° | Citation of document, with indication, where appropriate, of the relevant passages                                                                  | Relevant to claim No. |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| A          | <p>GB 2 325 728 A (* EURO PASSIVE FIRE PROTECTION LIMITED)<br/> 2 December 1998 (1998-12-02)<br/> claims 1-4,6,10<br/> figures 1-8</p> <p>-----</p> | 1-3,9,10              |

# INTERNATIONAL SEARCH REPORT

information on patent family members

Intern

I Application No

PCT/GB2005/001906

| Patent document<br>cited in search report |    | Publication<br>date | Patent family<br>member(s)                                                      | Publication<br>date                                                |
|-------------------------------------------|----|---------------------|---------------------------------------------------------------------------------|--------------------------------------------------------------------|
| GB 2326467                                | A  | 23-12-1998          | AT 212427 T<br>AU 7538698 A<br>DE 69803567 D1<br>EP 0983471 A1<br>WO 9854512 A1 | 15-02-2002<br>30-12-1998<br>14-03-2002<br>08-03-2000<br>03-12-1998 |
| US 6447145                                | B1 | 10-09-2002          | CA 2342307 A1                                                                   | 30-12-2001                                                         |
| WO 9812472                                | A  | 26-03-1998          | AU 4311097 A<br>DE 69731897 D1<br>EP 0950159 A1                                 | 14-04-1998<br>13-01-2005<br>20-10-1999                             |
| GB 2325728                                | A  | 02-12-1998          | NONE                                                                            |                                                                    |