



(51) International Patent Classification:

E21B 23/02 (2006.01) *E21B 23/00* (2006.01)
E21B 25/02 (2006.01) *E21B 31/20* (2006.01)

(21) International Application Number:

PCT/AU2010/000194

(22) International Filing Date:

22 February 2010 (22.02.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2009900823 25 February 2009 (25.02.2009) AU

(71) Applicant (for all designated States except US): **21C AUSTRALIA PTY LTD** [AU/AU]; Unit 2/10 McElligott Court, Canning Vale, Western Australia 6155 (AU).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BEACH, Andrew** [AU/AU]; 380 Crossman Road, Boddington, Western Australia 6390 (AU). **McLEOD, Gavin** [AU/AU]; 332 Preston Point Road, Attadale, W.A. 6156 (AU). **BLAKE-WAY, Ben** [AU/AU]; 57 Bromley Road, Hilton, Western Australia 6163 (AU).

(74) Agent: **GRIFFITH HACK**; Level 19, 109 St Georges Terrace, Perth, Western Australia 6000 (AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: HEAD ASSEMBLY

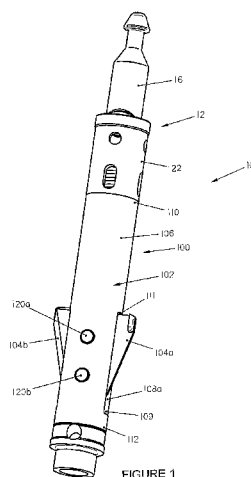


FIGURE 1

(57) Abstract: A head assembly (10) comprises a spear head assembly (12) and a latching system (100) which are coupled together. The spearhead assembly (12) comprises a spear point (16) having a proximal end (18) pivotally coupled about a pivot axis (20) and a sleeve (22) that is biased in a direction toward a pointed end (24) of the spear point (16). The sleeve (22) is coupled with the spear point (16) so that the spear point (16) and the pivot axis (20) can move axially relative to the sleeve (22). The latching system (100) comprises a latch body (102) and two latch dogs (104a) and (104b) which are coupled to the latch body (102) and movable between latching position where the latch dog (16) from the latch body (102) and can engage a latching mechanism and a release position where the latch dogs (104) retract inwardly. The latching system (100) is configured to enable the latch dogs (104) to move parallel to each other rather than pivot when moving between the latch and release positions. The spear head assembly (12) enables the head assembly (10) to be coupled to an overshot to enable tripping through a drill string. The latching system (100) enables the head assembly (10) to selectively engage the latching mechanism inside the drill string to hold the head assembly (10) in at least one axial direction relative to the drill string.



- 1 -

HEAD ASSEMBLY

Field of the Invention

- 5 The present invention relates to a head assembly for tripping an apparatus through a tube or conduit, for example a head assembly for tripping an inner core barrel through a drill string.

Background of the Invention

10

- In core drilling, a core tube is suspended inside a drill string for receiving a core sample of ground being cut by a core drill. The core tube is coupled to the head assembly enabling the core tube to be: lowered into the drill string and locked in place while a core sample is being cut and, subsequently retrieved
15 from the drill string once the drilling is ceased to enable the core sample to be analyzed. The head assembly comprises a spear point at an up hole end which engages an overshot attached to a wire line. To lower the head assembly and core tube through the drill string the overshot is engaged with the spear point and the wire line is wound out so that the head assembly travels by action of
20 gravity down the drill string. To prevent the core tube being pushed back by an advancing core sample being cut by the core drill, the head assembly may also comprise a latching system which engages a latching seat, such as a recess or shoulder inside the drill string. When the head assembly is to be retrieved an upward force applied by the wire line is transmitted via the head assembly to
25 the latching system to disengage from the recess or shoulder enabling the head assembly to be retrieved from the core drill.

Summary of the Invention

- 30 A first aspect of the invention provides a spear head assembly comprising:
a spear point having a proximal end pivotally coupled about a pivot axis;
and,
a sleeve having a central axis, the spear point being biased in a direction toward a proximal end of the sleeve and coupled to the sleeve wherein the pivot
35 axis can move axially relative to the sleeve.

The spear point may pivot about the pivot axis between a central position where

- 2 -

a longitudinal axis of the spear point is substantially parallel to the central axis of the sleeve, and one or more offset positions where the longitudinal axis of the spear point is not parallel to the central axis of the sleeve, and wherein the pivot axis moves axially relative to the sleeve as the spear point moves
5 between the central position and one or more of the offset positions.

The spear point may be biased toward the central position.

When the spear point moves from the central position to an offset position, the
10 bias applied to the spear point increases with increasing offset the central position.

The pivot axis may lie inside the sleeve when the spear point is in the central position.
15

The spear head assembly may comprise a detent mechanism which holds the spear point in one or more of the offset positions against the bias applied by the sleeve.

20 The bias applied by the sleeve may return the spear point to the central position upon application of a force on the spear point disengaging the spear point from the detent mechanism.

The detent mechanism may comprise a plurality of recesses formed on an
25 outer surface of the spear point and a member biased to seat in the or each recess.

The spear head assembly may comprise a post to which the spear point is pivotally coupled about the pivot axis, and wherein the member is disposed
30 between the pivot axis and a detent spring retained in the post.

The detent mechanism releasably holds the spear point in the central position.

The pivot axis may be rotatable about an axis parallel to the central axis of the
35 sleeve.

The spear point may be rotatable about the central axis of the sleeve.

- 3 -

The sleeve may have a first end beyond which the spear point extends, the first end having an abutment surface extending between an outer circumferential surface of the sleeve and an inner circumferential surface of the sleeve, the
5 abutment surface reducing in inner diameter from the outer circumferential surface to the inner circumferential surface.

A second aspect of the invention provides a spear head assembly comprising:
a spear point having a longitudinal axis; and,
10 a sleeve coupled to the spear point and having a central axis;
wherein the spear point: can pivot about a pivot axis extending transverse to the central axis; and, is able to rotate about the central axis.

The spear head may be able to move axially relative to a sleeve.
15

A third aspect of the invention provides a latch system for latching an apparatus to a latching member inside a tube through which the apparatus can travel, the latching system comprising:

a latch body; and,
20 one or more latch dogs coupled to the latch body, the latching system having a latch position where the latch dogs extend from the latch body to a location enabling engagement with the latching member, and a release position where the latch dogs retract into the latch body to a position where the latching system can pass through the latching member, wherein the latch dogs move
25 parallel to each other when the latching system moves between the latch position and the release position.

The latch dogs may move toward each other when the latch system moves from the latch position to the release position.
30

The latch dogs may move away from each other when the latching system moves from the release position toward the latch position.

The latch system may comprise a bias mechanism arranged to bias the latch
35 system toward the latch position.

The latch system may comprise a latch carrier extending through the latch

- 4 -

body, wherein the latch body is axially movable relative to the latch carrier, and wherein the latch dogs engage the latch carrier.

The bias mechanism may couple the latch carrier to the latch body.

5

Each latch dog may be provided with at least two slots, the slots being of identical shape, wherein the slots on respective latch dogs are disposed in a mirror image orientation.

10 The latch system comprises a plurality of pins, each pin coupled at its opposite ends to the latch body and wherein respective pins pass through one of the slots on each of the latch dogs.

15 The slots may comprise at least one section that extends diagonally relative to a longitudinal axis of the latch body.

In an alternate embodiment the slots may comprise at least two sections that extend at different angles diagonally of the longitudinal axis.

20 The latch carrier may comprise a slot through which the pins pass, the slot having a length greater than a spacing between the pins wherein the latch body can move axially relative to the latch carrier.

25 The bias mechanism may comprise: a mechanical fastener which engages the latch body and the latch carrier; and a latch spring retained about the mechanical fastener.

Each latch dog may be provided with a latch face which can engage the latching member when the latch system is in the latch position.

30

Each latch face may slope away from the latch member in a direction opposite a direction of movement of the latch dogs within the latch system moves from the latch position to the release position.

35 Each latch dog may comprise a brake pad having a brake surface orientated to contact an inside surface of the tube as the apparatus is lowered through the tube.

- 5 -

A fourth aspect of the invention provides a brake system for an apparatus adapted to travel through a tube, the braking system comprising:

a brake body; and,

5 one or more brake dogs coupled to the brake body, the braking system having a brake position where the brake dogs extend from the brake body to a position where they can engage an inside surface of the tube to brake motion of the apparatus through the tube, and a release position where the brake dogs retract into the brake body to a position where the brake dogs are spaced from
10 an interior surface of the tube wherein the brake dogs move parallel to each other when the braking system moves between the brake position and the release position.

The brake system may comprise a bias mechanism arranged to bias the brake
15 system toward the brake position.

A fifth aspect of the invention provides a head assembly comprising:

a spear head assembly according to the first aspect of the invention;

and,

20 a latching system coupled to the spear head assembly, the latching system adapted to latch the head assembly to a latching member disposed within a tube through which the head assembly travels.

A sixth aspect of the invention provides a head assembly comprising:

25 the latching system according to a second aspect of the invention; and,
 a spear head assembly attached to the latching system enabling the head assembly to be releasably attached to an overshoot.

A seventh aspect of the invention provides a head assembly comprising:

30 a spear head assembly according to the first aspect of the invention;
and,

 a latching system according to the second aspect of the invention, wherein the spear head assembly is attached to the latching system.

- 6 -

Brief Description of the Drawings

Embodiments of the head assembly and major components thereof will now be described by way of example only with reference to the accompanying
5 drawings in which:

Figure 1 is a schematic representation of an embodiment of the head assembly incorporating an embodiment of a spear point and a latching system, where the latching system is shown in a latched position;
10

Figure 2 is a schematic representation of the head assembly shown in Figure 1 but with the latching system depicted in a release position;

Figure 3 is a schematic representation of the spear head assembly shown in
15 Figures 1 and 2 where a spear point of the spear head assembly is depicted in a central position;

Figure 4 illustrates the spear head assembly shown in Figure 3 but with the spear point in an offset position;
20

Figure 5 is a longitudinal section view of the spear head assembly shown in Figure 3;

Figure 6 is a section view of the spear head assembly shown in Figure 4;
25

Figure 7 is a section view of the head assembly shown in Figure 1;

Figure 8 is a section view of the head assembly shown in Figure 2;

30 Figure 9 is an enlarged view of a portion of the latching system engaged with a landing ring;

Figure 10 is a representation of a latch dog in a second embodiment the latching system;
35

Figure 11 is a depiction of the latch dog shown in Figure 10 but with a brake pad removed; and,

Figure 12 is a representation of a brake pad incorporated in a latch dog depicted in Figure 10.

5 Detailed Description of Preferred Embodiments

Figures 1, 2, 7 and 8 depict an embodiment of a head assembly 10 which may be used for tripping an apparatus or tool such as an inner core barrel through a tubular structure such as a drill string. The head assembly 10 comprises two
10 major subsystems, a spear head assembly 12 and a latching system 100 connected to the spear head assembly 12. The spear head assembly 12 enables the head assembly 10 to be coupled to an overshot and a wire line enabling the head assembly 10 to be tripped through (i.e. lowered into and retrieved from) a drill string. Latching system 100 enables the head assembly
15 10 to selectively engage a latching mechanism inside the drill string to hold the head assembly 10 against motion in at least one direction relative to the drill string, which in this embodiment, is an up hole direction. A further embodiment of the spear head assembly 10 may comprise a spear head assembly 12 as described hereinafter together with a prior art latching system. An alternate
20 embodiment of the head assembly may comprise a latching system 100 as described hereinafter and a prior art spear head assembly.

The spear head assembly 12 will now be described in greater detail with reference to Figures 3-6. The spear head assembly 12 comprises a spear point
25 16 having a proximal end 18 pivotally coupled about a pivot axis 20, and a sleeve 22 that is biased in a direction toward a pointed end 24 of the spear point 16. The sleeve 22 is coupled with the spear point 16 so that the spear point 16 and the pivot axis 20 can move axially relative to the sleeve 22.

30 The spear point 16 is able to pivot about the pivot axis 20 between: a central position shown in Figures 3 and 5 where a longitudinal axis 26 of the spear point 16 is substantially parallel to a central axis 28 of the sleeve; and, one or more offset positions shown in Figures 4 and 6 where the longitudinal axis 26 of the spear point is inclined from and thus not parallel to the central axis 28. The
35 pivot axis 20 corresponds with a central longitudinal axis of a pivot pin 30 which pivotally couples the spear point 16 to a support post 32. From a comparison of Figures 5 and 6, it can be seen that when the spear point 16 is moved between

- 8 -

its central position (Figure 5) and an offset position (Figure 6) there is a relative linear movement between the pivot axis 20 and the sleeve 22 along the central axis 28. Thus there is an axial displacement between the pivot axis 20 and the sleeve 22 as the spear point 16 moves between the central position and an offset position.

The sleeve 22 is provided with an axial passage through which the post 32 extends and into which the proximal end 18, pivot axis 20, and pivot pin 30 retract when the spear point 16 is in the central position (see Figure 5). A first or up hole end 36 of the sleeve 22 from which the spear point 16 extends is formed with a smooth continuous abutment surface 38 (see Figure 6) which transitions between an outer circumferential surface 40 and an inner circumferential surface 42 of the sleeve 22. The abutment surface 38 reduces in inner diameter from the outer surface 40 to the inner surface 42 forming a funnel like structure having a radiused transition 44 to the inner surface 42.

An internal circumferential ledge 46 is provided in the sleeve 22. An up hole side of the ledge 46 is recessed to form a seat 48 while on the opposite side of the ledge 46 forms a shoulder 50 against which one end of a sleeve spring 52 abuts. A distal end 53 of the sleeve 22 opposite to the end 36 is provided with a reduced diameter boss 54 which is formed with a screw thread on its outer circumferential surface to enable coupling of the spear head assembly 12 to the latching system 100. The spring 52 biases the spear point 16 and the pivot axis 20 toward the distal end 53 of the sleeve 22, i.e. inwardly of the sleeve.

The post 32 is provided with a slot at an end 56 adjacent the end 36 of the sleeve 22 for receiving the proximal end 18 of the spear point 16. The slot in the end 56 in effect creates a bifurcation in the end 56 through which the pivot pin 30 passes thereby pivotally attaching the spear point 16 to the post 32. Inward of the end 56, the post 32 has, about its outer surface, an outwardly flared portion 58 which is configured to engage the seat 48 when the spear point 16 is in the central position (see Figure 5). The abutment between the outwardly flared portion 58 and the seat 48 prevents the post 32 from falling out of the sleeve 22 and thus maintains the coupling between the spear point 16 and the sleeve 22. An axial hole 60 is formed in the post 32 extending from the outwardly flared portion 58 to an end 62 distant the end 56.

- 9 -

A cup 64 having an increased outer diameter relative to the post 32 is attached to the end 62 by a bolt 66. The bolt 66 is provided with a shank 68 that threadingly engages an internal surface of the passage 60. The change in outer diameter between the post 32 and the cup 64 forms a shoulder 70 against which the spring 52 abuts. An outer diameter of the cup 64 is marginally smaller than an inner diameter of the boss 54 providing sufficient clearance for axial motion of the post 32 while retaining the spring 52 on the shoulder 70. The cup 64 is also provided with an outer circumferential shoulder 71 at its distal end (see Figure 6) which creates a stop against the end of the boss 54 to limit the axial movement of the spear point 16 and thus prevent overloading the spring 52.

A detent mechanism 72 is provided which holds the spear point 16 in an offset position against the bias of the spring 52. Indeed, the detent mechanism 72 as explained hereinafter, also operates to releasably hold the spear point 16 in the central position.

The detent mechanism 72 comprises in combination, recesses 74a, 74b, and 76 formed on an outer surface of a spear point 16 at the distal end 18 about the pivot axis 20, and a member in the form of a ball 78 which is biased in a direction to enter and seat in the one of the recesses 74a, 74b or 76 when in alignment with the ball 78. The ball 78 has dimensions so that it can retract into the passage 60 and is biased toward the recesses by a detent spring 80. The spring 80 bears at one end against the ball 78 and at an opposite end against the shank 68 of the bolt 66. As a result of the coupling between the post 32 and the sleeve 22, the post 32 and thus the spear point 16 is able to rotate about the central axis 28. In addition, as described above, the spear point 16 and the pivot axis 20 can move axially relative to the pivot axis 28 and the sleeve 22.

When the spear assembly 12 is located inside a drill string, the spear point 16 should be in the central position to ensure engagement with an overshot. However, at other times when the spear head assembly is attached to an apparatus located at ground level, to facilitate easier handling, it is advantageous for the spear point 16 to be in an offset position.

When the spear head assembly is arranged so that the spear point 16 is in a

- 10 -

the central position shown in Figures 3 and 5, the detent mechanism 72 acts to releasably lock the spear point 16 in this position by virtue of the ball 78 being biased into the recess 76 by the detent spring 80. When in this position, the spring 52 is in a relatively relaxed state and the pivot axis 20 and proximal end 18 of the spear point 16 are located inward of the end 36 of the sleeve 22. In addition, the outwardly flared portion 58 of the post 32 is seated in the seat 48. An outer diameter of the spear point 16 is made marginally smaller than the inner diameter of the inner circumferential surface 42 so as to provide minimal clearance there between.

10

In order to move the spear point 16 from the central position shown in Figure 5, to an offset position shown in Figure 6, not only is it necessary to apply a lateral force on the spear point 16 to affect rotation about the pivot axis 20, but in addition the spear point 16 must be moved axially against the bias of the spring 52 to move the pivot axis 20 closer to or beyond the end 36. This action may be accomplished by an operator grabbing the sleeve 22 in one hand, the spear point 16 in another hand, pulling the two components away from each other so as to compress the spring 52, and simultaneously applying a moment to the spear point 16 causing it to pivot about the pivot axis 20 pushing the ball 78 against the bias of the spring 80. Due to the relative configuration of the spear point 16 and the end 36 of the sleeve 22, there is minimal risk of a user jamming or catching their fingers or hand between the spear point 16 and the sleeve 22. In particular this arises due to the shape of the surface 38 and the previously described relationship between the outer diameter of the spear head 16 and inner diameter of the inner surface 42.

25

When the spear point 16 is pivoted to a point where the ball 78 is aligned with one of the recesses 74 or 76, the detent mechanism 72 operates to hold the spear point 16 in that position. If the user lets go of the spear point 16 before one of these points is reached, the spear point 16 will snap back to the central position by action of abutment of the sleeve 22 (being biased by spring 52) with the spear point 16. The detent 72 is sufficiently strong to hold the spear point 16 in an offset position against the bias of the spring 52. To return the spear point 16 to the central position, an external force is required to rotate the spear point 16 about the pivot axis 20 sufficient to retract the ball 78 against the bias of the spring 80 into the passage 60 to unseat the ball from the recess 74b. Once this occurs, the bias of the spring 52 pushing the sleeve 22 against the

35

- 11 -

spear point 16 automatically snaps the spear point 16 back to the central position where the ball 78 will engage the recess 76.

5 The size of a spear head assembly 12 is matched to the diameter of a drill string in which it is to be used. As a result of this, spear point 16 does not have sufficient room when inside a drill string to pivot about the axis 20 to an extent where the detent mechanism 72 can engage and hold the spear point 16 in an offset position. Accordingly, when located inside a drill pipe, the spear point 16 will always be in the central position thereby maximizing the likelihood of proper
10 engagement with an overshot.

With particular reference to Figures 1, 2, and 7-11 the latching system 100 comprises a latch body 102 and two latch dogs 104a, 104b (hereinafter referred to in general as "latch dogs 104") that are coupled to the latch body 102 and
15 moveable between a latching position (shown in Figures 1 and 7) where the latch dogs extend from the latch body 102 and can engage a latching mechanism and a release position shown in Figures 2 and 8 where the latch dogs 104 retract inwardly of the latch body 102 to a position where the latching system 100 can pass through the latching mechanism. More particularly, latch
20 dogs 104 move parallel to each other when moving between the latch and release positions. The parallel motion of the latch dogs 104 is transverse to a longitudinal axis 106 of the latch body 102. The latch dogs 104 move parallel toward each other when the latching system is moved from the latch position to the release position. Conversely, the latch dogs 104 move parallel away from
25 each other when the latching system is moved from the released position toward the latch position.

The latch body 102 is in the form of a hollow tube 106 which is provided with axially extending slots 108a and 108b (hereinafter referred to as "slots 108").
30 The slots are formed inboard of opposite ends 110 and 112 of the tube 106. Slots 108 are positioned relative to the dogs 104 so that the latch dogs 104 can extend from and retract into the tube 106 through the slots 108. The slots 108 terminate at opposite ends in planar surfaces 109 and 111.

35 The parallel motion of the latch dogs is facilitated by the combination of at least two slots formed on each of the latch dogs 104, and corresponding pins that extend through the slots. More particularly, latch dog 104a is formed with two

- 12 -

slots 114a and 116a which are of identical shape to each other and are inclined relative to the longitudinal axis of latch body 102. The slots 114a and 116a are axially offset from each other and oriented so that they at least partially (and indeed in this specific embodiment wholly) overlap each other in the axial
5 direction.

The latch dog 104b is also provided with slots 114b and 116b of identical shape as slots 114a and 116a but disposed in a mirror image orientation.

10 The latch dogs 104 are coupled to a latch carrier 118 by pins 120a and 120b (hereinafter referred to in general as "pins 120"). Each of the pins 120 pass through the tube 106 and through respective pairs of the slots 114 and 116. For example pin 120a passes through the slots 114a and 114b while the pin 120b passes through the slots 116a and 116b. In addition, the latch carrier 118
15 is formed with a longitudinal slot 122 which extends in the axial direction of the body 102 and through which both of the pins 120a and 120b pass.

An end 124 of the latch carrier 118 is provided with an axial tube 126 provided with an internal thread that is engaged by a bolt 128. An internal annular land
20 130 is formed in the latch body 102 through which the tube 126 can extend but beyond which the end 124 of the latch carrier 118 cannot pass. A latch spring 132 extends about a shank of the bolt 128 and is retained between the land 130 and a washer 134 through which the bolt 128 passes. The washer 134 has an outer diameter greater than that of an inner diameter of the land 130. In this
25 way the latch carrier 118 is coupled to the body 102 in a manner allowing relative axial movement there between.

Each of the latch dogs 104 is provided with an upper flat face 136 that lies parallel with and inside of the end 124, and an opposite flat face 138 that is
30 parallel to and inside of a planar face 139 formed on the latch carrier 118 through and perpendicular to the slot 122.

The spacing between the end 124 and the face 139 is fixed, the spacing being slightly greater than the traverse distance between the faces 136 and 138.

35 With particular reference to Figure 9 a radially outer edge of the surface 136 is provided with a latch face 140. When the latching system 100 is in the latch

- 13 -

position, the latch face 140 is in alignment with a latching mechanism in the form of a latching shoulder 142 which is formed in an inside portion of an outer core barrel 144. Accordingly if a force is applied in the axial direction from the latch dogs 104 toward the spear point 16, the latch faces 140 of the latch dogs
5 104 would be brought into abutment with the latching shoulder 142 preventing the head assembly 10 from moving in an up hole direction. Although not essential, in the present depicted embodiment, the latch face 140 is shown as sloping or inclined so as to form a gap of increasing size in a radial outward direction from a central axis of the latch body 102. The function of the inclined
10 surface 140 will be described shortly.

When no upward pulling force is applied to the spear point 16, the latch spring 132 extends to a length governed by the distance between the washer 134 (abutting the head of the bolt 128) and the land 130 effectively pulling the latch
15 carrier 118 in an upward direction relative to the latch body 102. The motion of the latch carrier body 118 is limited by abutment of an increased diameter portion 146 of the latch carrier 118 with end 112 of the latch body 102 (see Figure 7). In this configuration, the pins 120 are in effect lowered relative to the latches 104 so that the pins 120 reside in a lower end of the respective slots
20 114 and 116. In this configuration, the latch dogs 104 are extended radially outward from the slots 108 to a maximum extent.

When it is required to retrieve the head assembly 10, an overshot is lowered into a drill string and engages the spear point 16. A wire line can then be
25 reeled in which applies an upward force on the spear point 16. The upward force applied on the spear point 16 is transferred to the latch body 102. Since the latch faces 140 are engaging the latch shoulder 142 application of the force causes the latch body 102 to move axially relative to the latch carrier 118. This results in the pins 120 sliding axially in an upward direction relative to the
30 carrier 118 and the latch dogs 104. This movement is also accompanied by a compression of the spring 132. Due to the inclination of the slots 114 and 116, the latch dogs 104 move inwardly in a plane parallel to the longitudinal axis of the latch body 102. Thus, with reference in particular to Figure 9, the latch faces 140 move inwardly toward each other along a radius R of the body 102.
35 Due to the inclination of the latch face 140 as this movement occurs, a gap is created between the latch shoulder 142 and the latch face 140 to facilitate a smooth unlatching of the latch system with minimal friction.

- 14 -

The motion of the latch dogs 104 when the latching system is moving from the latch position to the release position minimizes the likelihood of the latch face 140 sticking or jamming on the latch shoulder 142. This is the case irrespective of whether or not the latch face 140 is parallel with the surface 136 or inclined as shown in Figure 9. The inclination of the latch face 104 shown in Figure 9 further reduces the likelihood of jamming occurring.

Figures 10-12 depict a latch dog 104' that may be incorporated in an alternate embodiment of the present invention. The latch dog 104' differs in two main aspects from the latch dogs 104. Firstly, latch dog 104' comprises slots 114' and 116' which are each formed with two contiguous sections 150 and 152 that are inclined at different angles to the longitudinal axis 154 of the latch body. To highlight this, axis 150a and 152a are depicted in Figure 11 being the axes of the slot section 150 and 152 respectively. It can be seen that the angle of inclination θ of the axis 150a from the longitudinal axis 154 is smaller than the angle of inclination α of the axis 152a from the longitudinal axis 154. The function of this difference in inclination is described below

A further distinguishing feature of the latch dogs 104' from the latch dogs 104 is the inclusion of a brake pad 156 carried on a brake shoe 158 which is formed as part of the latch dog 104'. The brake shoe 158 is formed circumferentially of an outer axially extending face 160 of the latch dog 104' and comprises a circumferential recess 162 for seating brake pad 156. The brake pad 156, shown in greatest detail in Figure 12, is formed in a generally concaved shape having an outer brake surface 164 that in use bears against an inside surface of a drill rod. Opposite ends of the brake pad 156 are formed with inwardly directed catches 166 that catch or clip about opposite ends of the brake shoe 158, as shown clearly in Figure 10. Typically the brake pad 156 is made of a resilient plastics material enabling a snap fit on to the shoe 158. This also facilitates the easy replacement of brake pads 156.

When the latch dogs 104' are incorporated in to the latch system, the latch system in effect operates and functions as a brake system. Thus the latch dogs 104' in such an embodiment can be considered as brake dogs which act to control the speed of a tool being lowered through a drill string or other tube or conduit. A further modification of the latch system may comprise both latch

- 15 -

dogs 104 as shown in Figures 7 8 and 9 as well as the latch dogs 104' as shown in Figures 10-12, arranged axially relative to each other. Alternately, the latch dogs 104' may be used in place of the latch dogs 104 to provide both a braking and latching function. The inclination of the slot portion 152 relative to the slot portion 150 allows the latch dogs 104' to move radially outward further than latch dog where the slot 114, 116 comprised only a single section having a single axis of inclination, thus compensating for wear of the brake pads 164. Further, the change in angle between slot portions 150 and 152 allows for greater movement of the latch dogs 104 relative to the amount of movement of the latch body 102. That is it changes the ratio of movement between these two components.

Pressure applied by the brake pads 164 against the inside of the drill string can be varied by adjustment of the bolt 128 to increase or decrease the degree of compression of the spring 132.

Modifications and variations of the embodiments of the above invention that would be obvious to a person of ordinary skill in the art are deemed to be within the scope of the present invention the nature of which is to be determined from the above description and the appended claims.

- 16 -

Claims:

1. A spear head assembly comprising:
a spear point having a proximal end pivotally coupled about a pivot axis;
5 and,
a sleeve having a central axis, the spear point being biased in a direction toward a proximal end of the sleeve and coupled to the sleeve wherein the pivot axis can move axially relative to the sleeve.
- 10 2. The spear head assembly according to claim 1 wherein the spear point pivots about the pivot axis between a central position where a longitudinal axis of the spear point is substantially parallel to the central axis of the sleeve, and one or more offset positions where the longitudinal axis of the spear point is not
15 parallel to the central axis of the sleeve, and wherein the pivot axis moves axially relative to the sleeve as the spear point moves between the central position and one or more of the offset positions.
3. The spear head assembly according to claim 2 wherein the spear point is biased toward the central position.
20
4. The spear head assembly according to claim 3 wherein when the spear point moves from the central position to an offset position, the bias applied to the spear point increases with increasing offset from the central position.
- 25 5. The spear head assembly according to any one of claims 2 – 4 wherein the pivot axis lies inside the sleeve when the spear point is in the central position.
6. The spear head assembly according to any one of claims 2 – 5
30 comprising a detent mechanism which holds the spear point in one or more of the offset positions against the bias applied by the sleeve.
7. The spear head assembly according to claim 6 wherein the bias applied by the sleeve returns the spear point to the central position upon application of
35 a force on the spear point disengaging the spear point from the detent mechanism.

- 17 -

8. The spear head assembly according to claim 6 or 7 wherein the detent mechanism comprises a plurality of recesses formed on an outer surface of the spear point and a member biased to seat in the or each recess.
- 5 9. The spear head assembly according to claim 8 comprising a post to which the spear point is pivotally coupled about the pivot axis, and wherein the member is disposed between the pivot axis and a detent spring retained in the post.
- 10 10. The spear head assembly according to any one of claims 6 – 9 wherein the detent mechanism releasably holds the spear point in the central position.
11. The spear head assembly according to any one of claims 1 – 10 wherein the pivot axis is rotatable about an axis parallel to the central axis of the sleeve.
- 15 12. The spear head assembly according to any one of claims 1-12 wherein the spear point is rotatable about the central axis of the sleeve.
13. The spear head assembly according to any one of claims 1 – 12 wherein the sleeve has a first end beyond which the spear point extends, the first end having an abutment surface which transitions between an outer circumferential surface of the sleeve and an inner circumferential surface of the sleeve, the abutment surface reducing in inner diameter from the outer circumferential surface to the inner circumferential surface.
- 20 14. A spear head assembly comprising: a spear point having a longitudinal axis; and a sleeve coupled to the spear point and having a central axis; wherein the spear point: can pivot about a pivot axis extending transverse to the central axis; and, is able to rotate about the central axis.
- 25 15. A spear head assembly according to claim 14 wherein the spear head is able to move axially relative to a sleeve.
- 30 16. A latch system for latching an apparatus to a latching member inside a tube through which the apparatus can travel, the latching system comprising: a latch body; and, one or more latch dogs coupled to the latch body, the latching system
- 35

- 18 -

having a latch position where the latch dogs extend from the latch body to a location enabling engagement with the latching member, and a release position where the latch dogs retract into the latch body to a position where the latching system can pass through the latching member, wherein the latch dogs move
5 parallel to each other when the latching system moves between the latch position and the release position.

17. The latch system according to claim 16 wherein the latch dogs move toward each other when the latch system moves from the latch position to the
10 release position.

18. The latch system according to claim 16 or 17 wherein the latch dogs move away from each other when the latching system moves from the release position toward the latch position.
15

19. The latch system according to any one of claims 16 – 18 comprising a bias mechanism arranged to bias the latch system toward the latch position.

20. The latch system according to claim 19 comprising a latch carrier
20 extending through the latch body, wherein the latch body is axially movable relative to the latch carrier, and wherein the latch dogs engage the latch carrier.

21. The latch system according to claim 20 wherein the bias mechanism couples the latch carrier to the latch body.
25

22. The latch system according to any one of claims 16 – 21 wherein each latch dog is provided with at least two slots, the slots being of identical shape, wherein the slots on respective latch dogs are disposed in a mirror image orientation.
30

23. The latch system according to claim 22 comprising a plurality of pins, each pin coupled at its opposite ends to the latch body and wherein respective pins pass through one of the slots on each of the latch dogs.

24. The latch system according to claim 22 or 23 wherein the slots comprise at least one section that extends diagonally relative to a longitudinal axis of the latch body.
35

25. The latch system according to claim 24 wherein each slot comprises at least two sections that extends at different angles diagonally of the longitudinal axis.

5

26. The latch system according to any one of claims 22 – 25 wherein the latch carrier comprises a slot through which the pins pass, the slot having a length greater than a spacing between the pins wherein the latch body can move axially relative to the latch carrier.

10

27. The latch system according to any one of claims 21 – 26 wherein the bias mechanism comprises:

a mechanical fastener which engages the latch body and the latch carrier; and

15

a latch spring retained about the mechanical fastener.

28. The latch system according to claim 27 wherein the bias applied by the latching spring can be adjusted by manipulation of the mechanical fastener.

20

29. The latch system according to any one of claims 16 – 28 wherein each latch dog is provided with a latch face which can engage the latching member when the latch system is in the latch position.

25

30. The latch system according to claim 29 wherein each latch face slopes away from the latch member in a direction opposite a direction of movement of the latch dogs within the latch system moves from the latch position to the release position.

30

31. The latching system according to any one of claims 16 – 29 wherein each latch dog comprises a brake pad having a brake surface orientated to contact an inside surface of the tube as the apparatus is lowered through the tube.

35

32. A brake system for an apparatus adapted to travel through a tube, the braking system comprising:

a brake body; and,

one or more brake dogs coupled to the brake body, the braking system

- 20 -

having a brake position where the brake dogs extend from the brake body to a position where they can engage an inside surface of the tube to brake motion of the apparatus through the tube, and a release position where the brake dogs retract into the brake body to a position where the brake dogs are spaced from an interior surface of the tube wherein the brake dogs move parallel to each other when the braking system moves between the brake position and the release position.


33. The brake system according to claim 32 further comprising a bias mechanism arranged to bias the brake system toward the brake position.

34. A head assembly comprising:
a spear head assembly according to any one of claims 1 – 15; and,
a latching system coupled to the spear head assembly, the latching system adapted to latch the head assembly to a latching member disposed within a tube through which the head assembly travels.

35. A head assembly comprising:
the latching system according to any one of claims 16 – 31; and,
a spear head assembly attached to the latching system enabling the head assembly to be releasably attached to an overshoot.

36. A head assembly comprising:
a spear head assembly according to any one of claims 1 – 15; and,
a latching system according to any one of claims 16 - 31, wherein the spear head assembly is attached to the latching system.

1/12

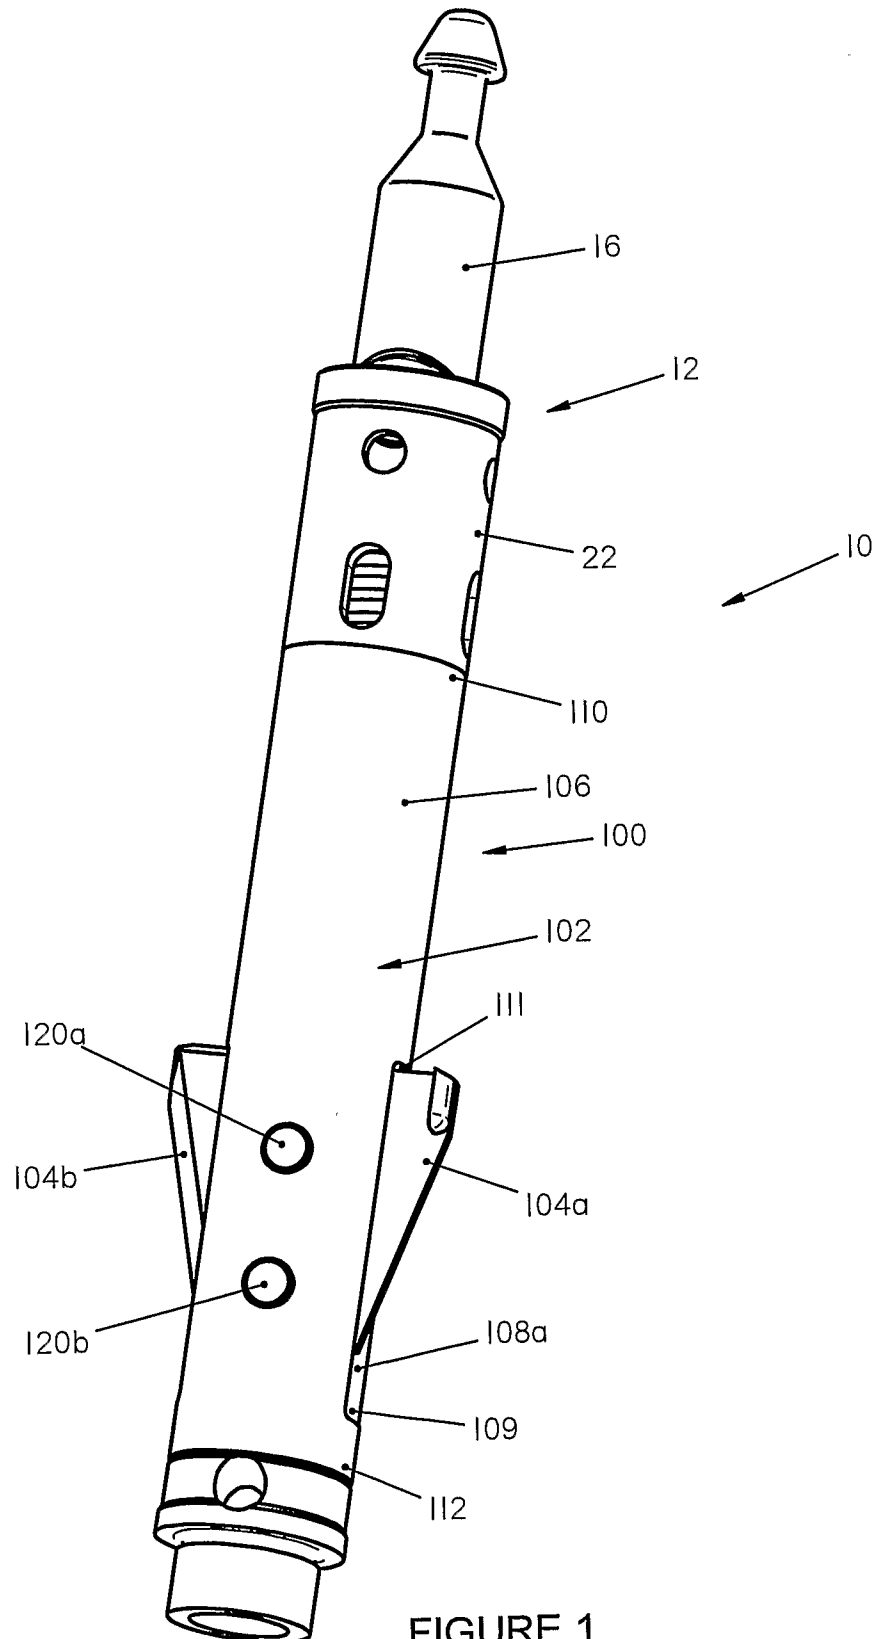

2/12

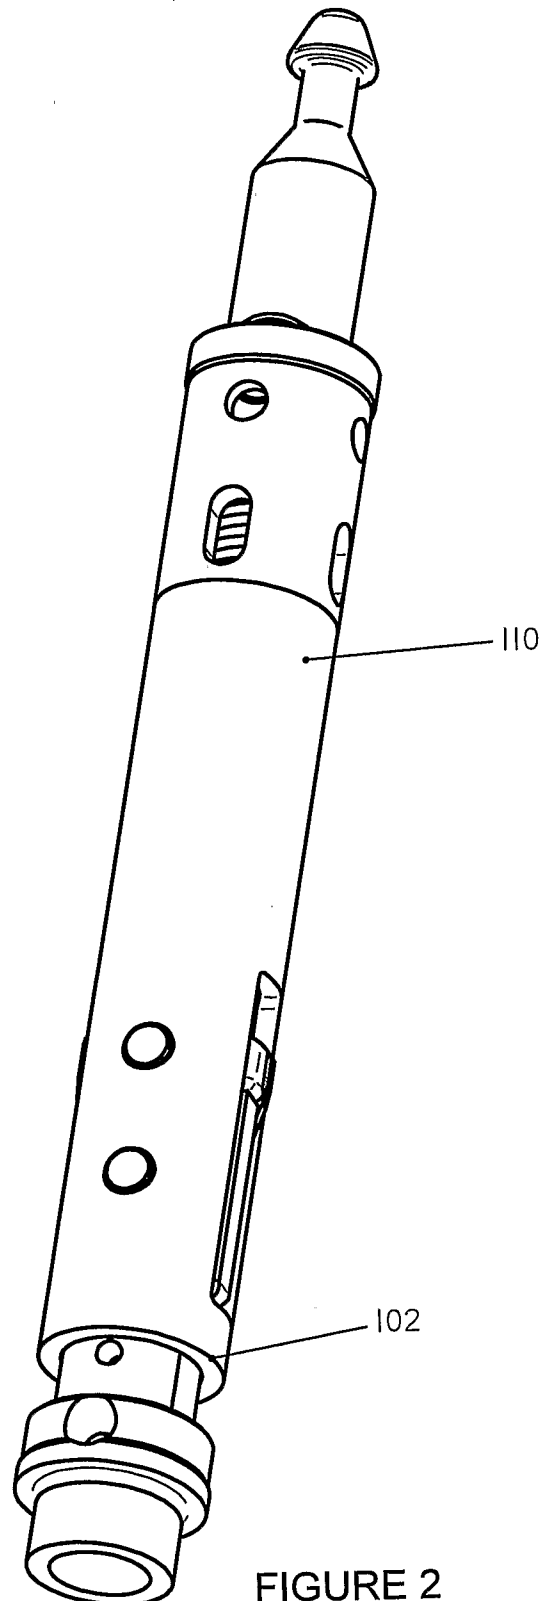


FIGURE 2

3/12

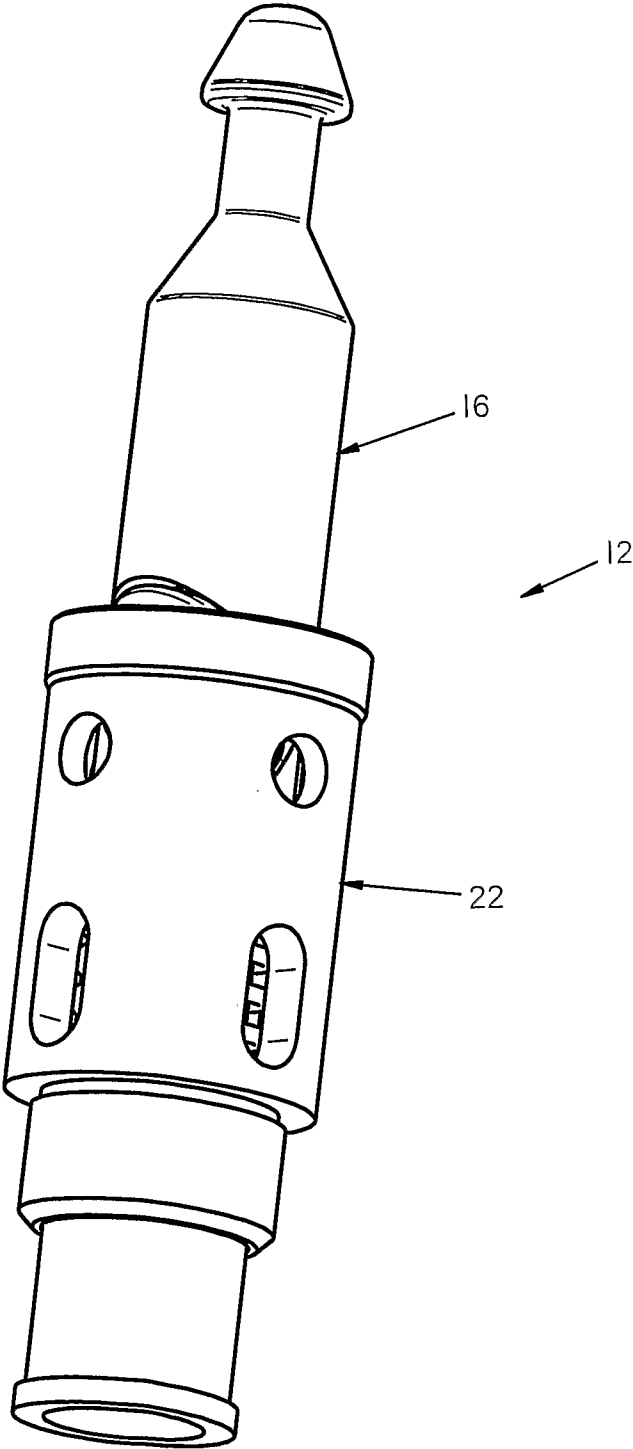


FIGURE 3

4/12

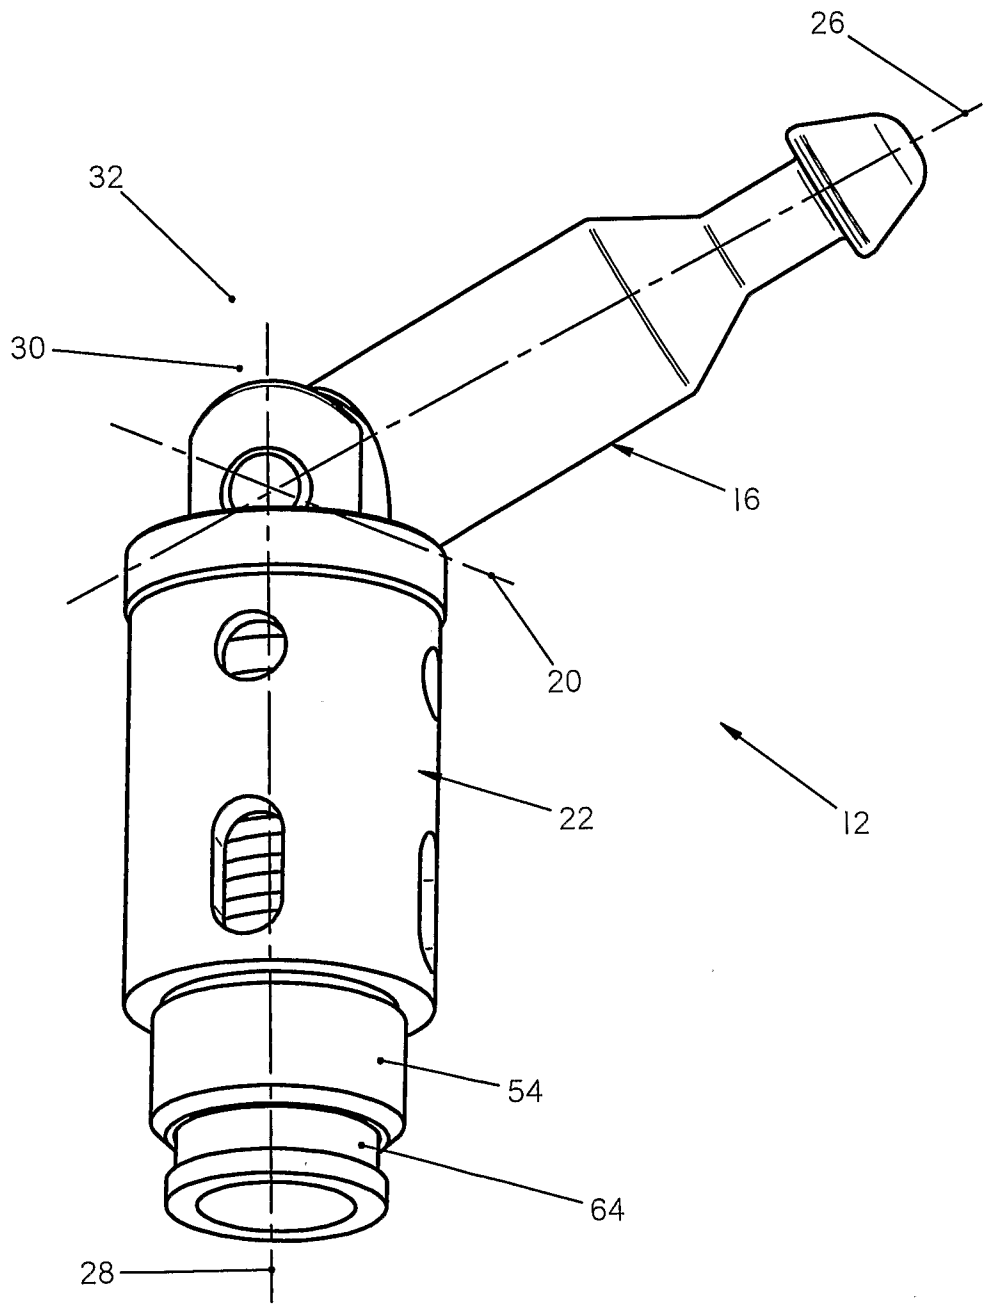


FIGURE 4

5/12

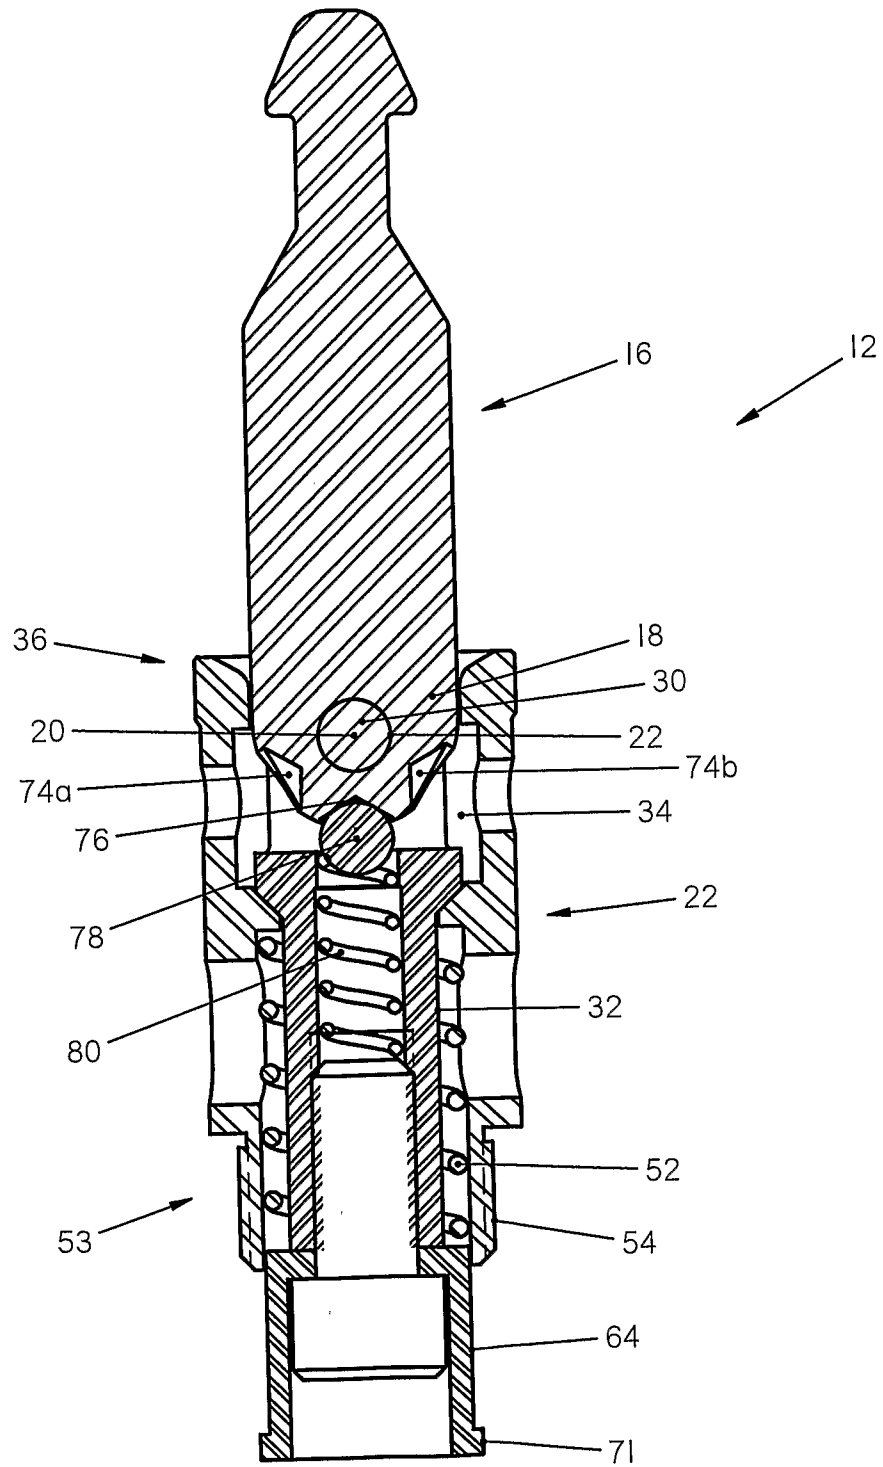


FIGURE 5

6/12

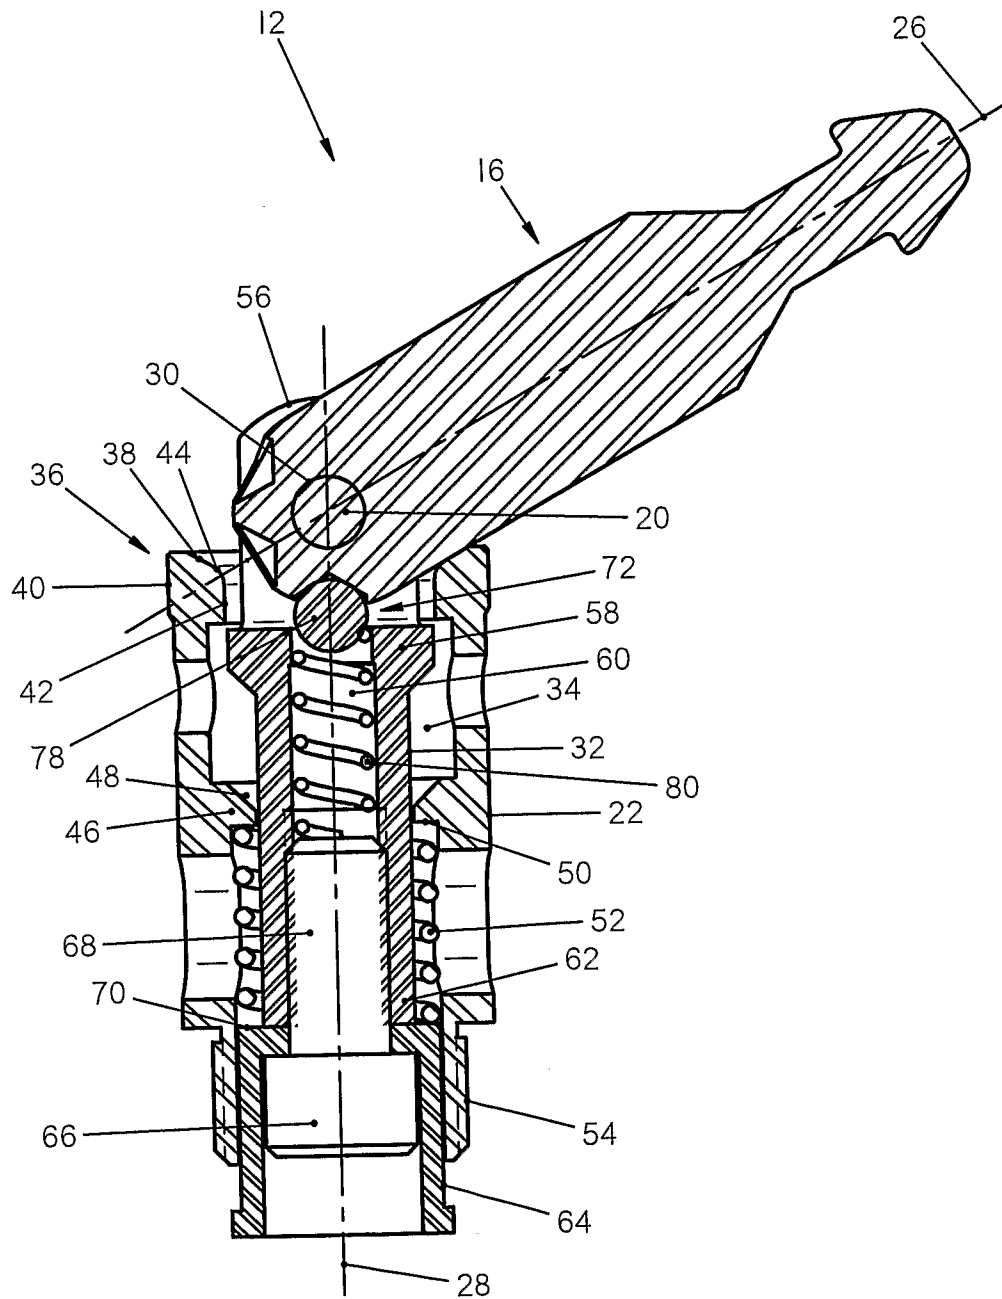


FIGURE 6

7/12

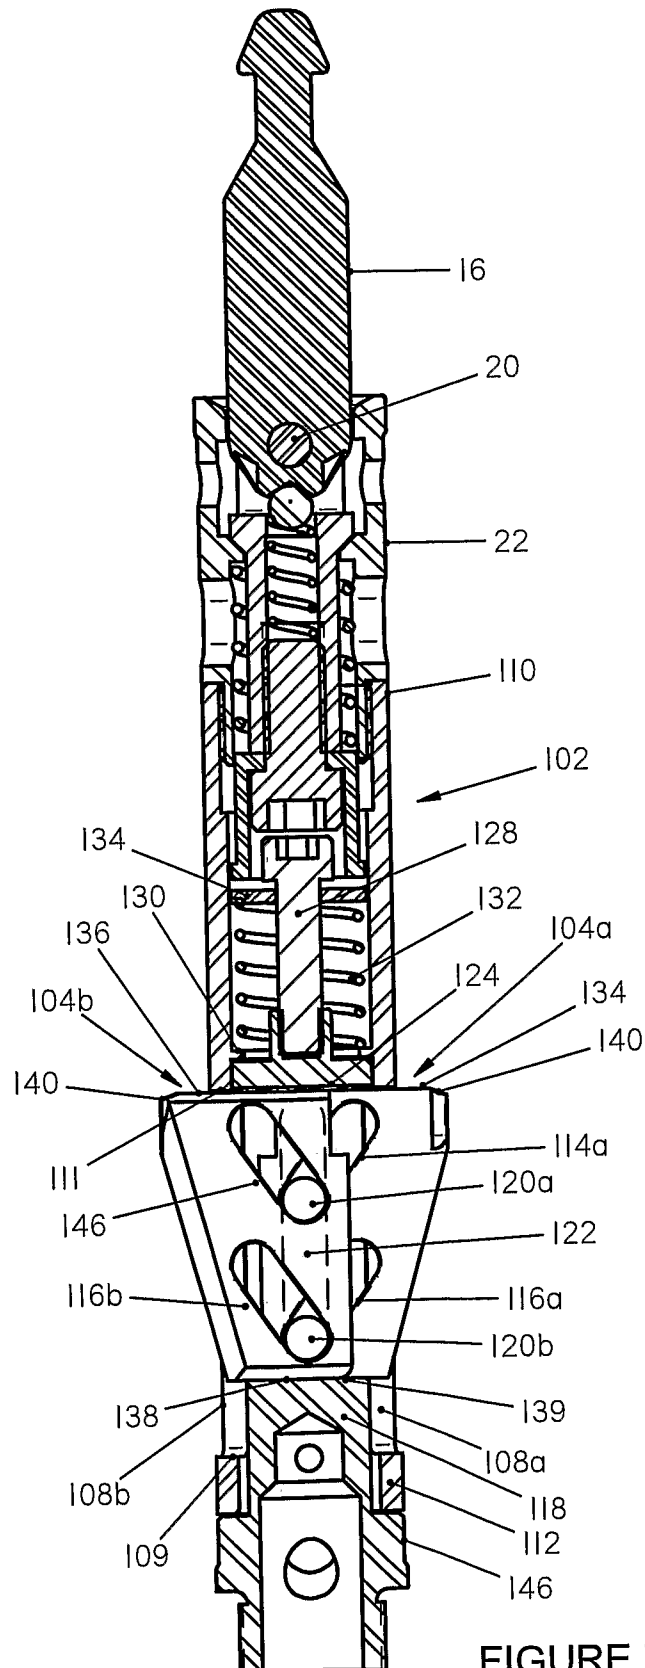


FIGURE 7

8/12

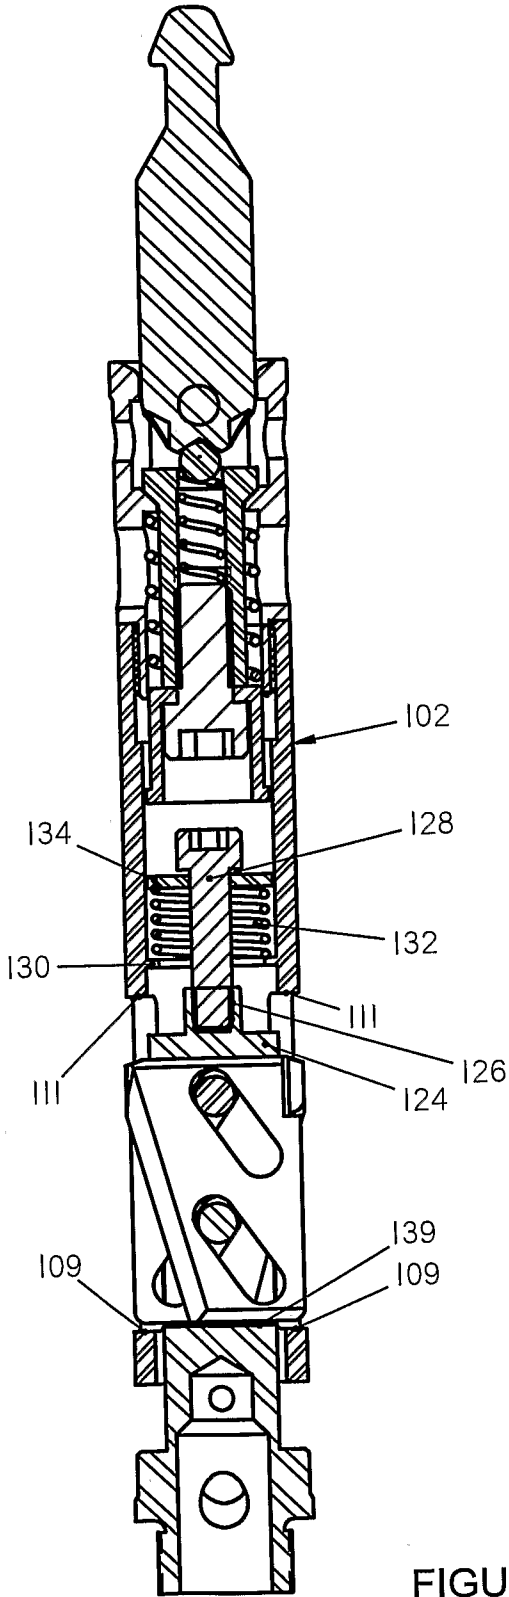


FIGURE 8

9/12

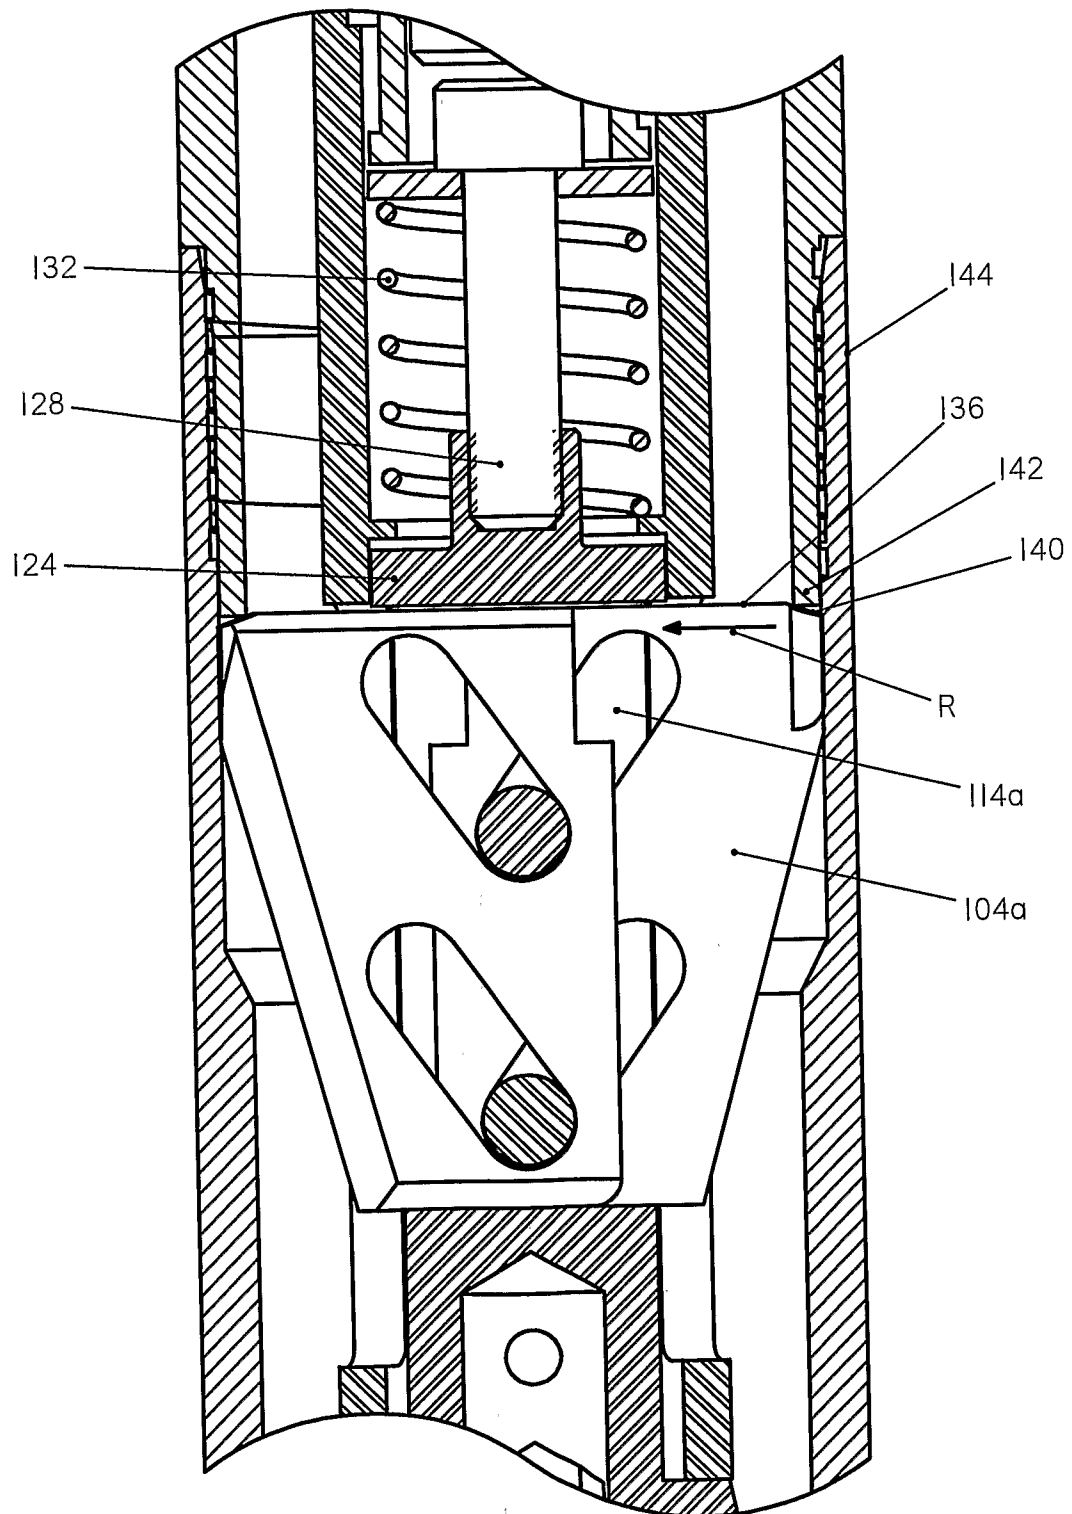


FIGURE 9

10/12

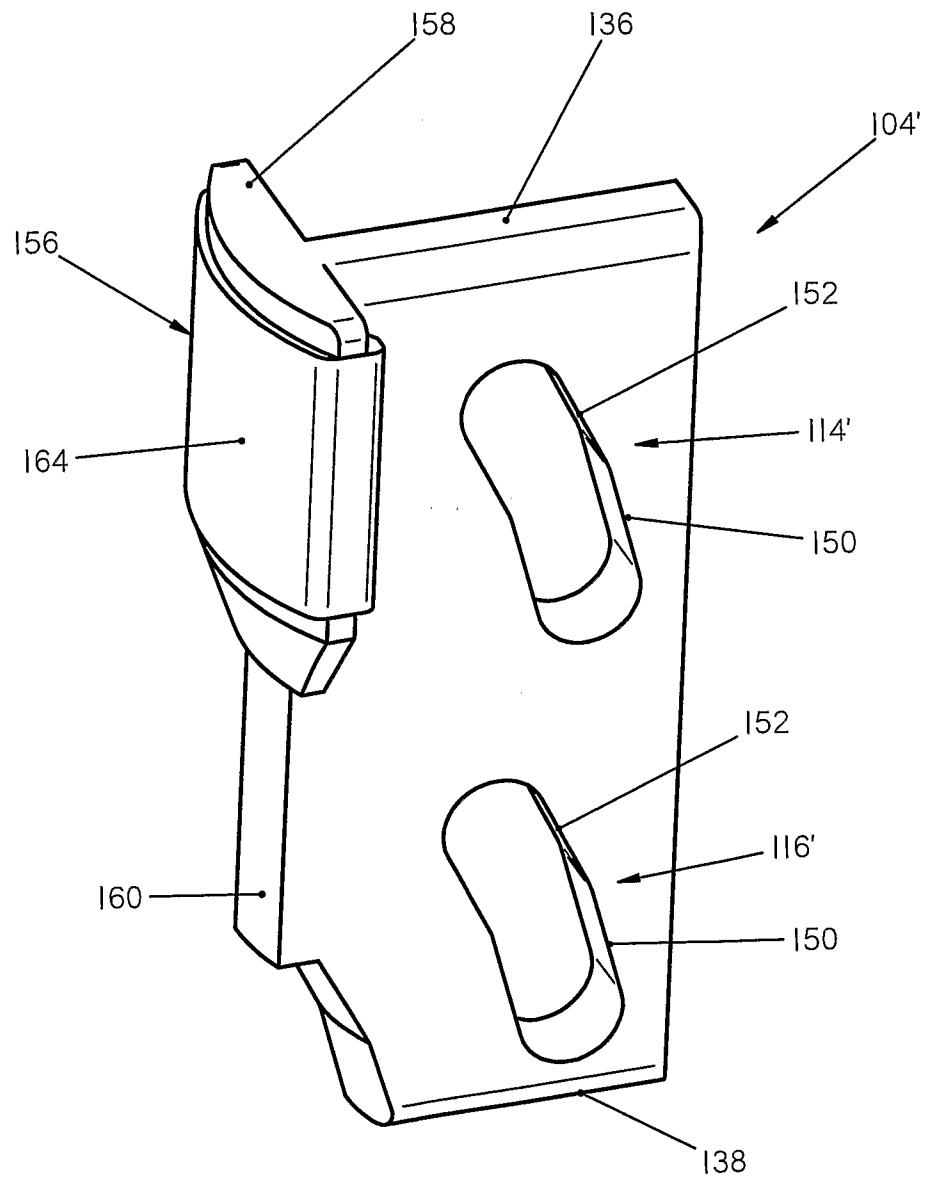


FIGURE 10

11/12

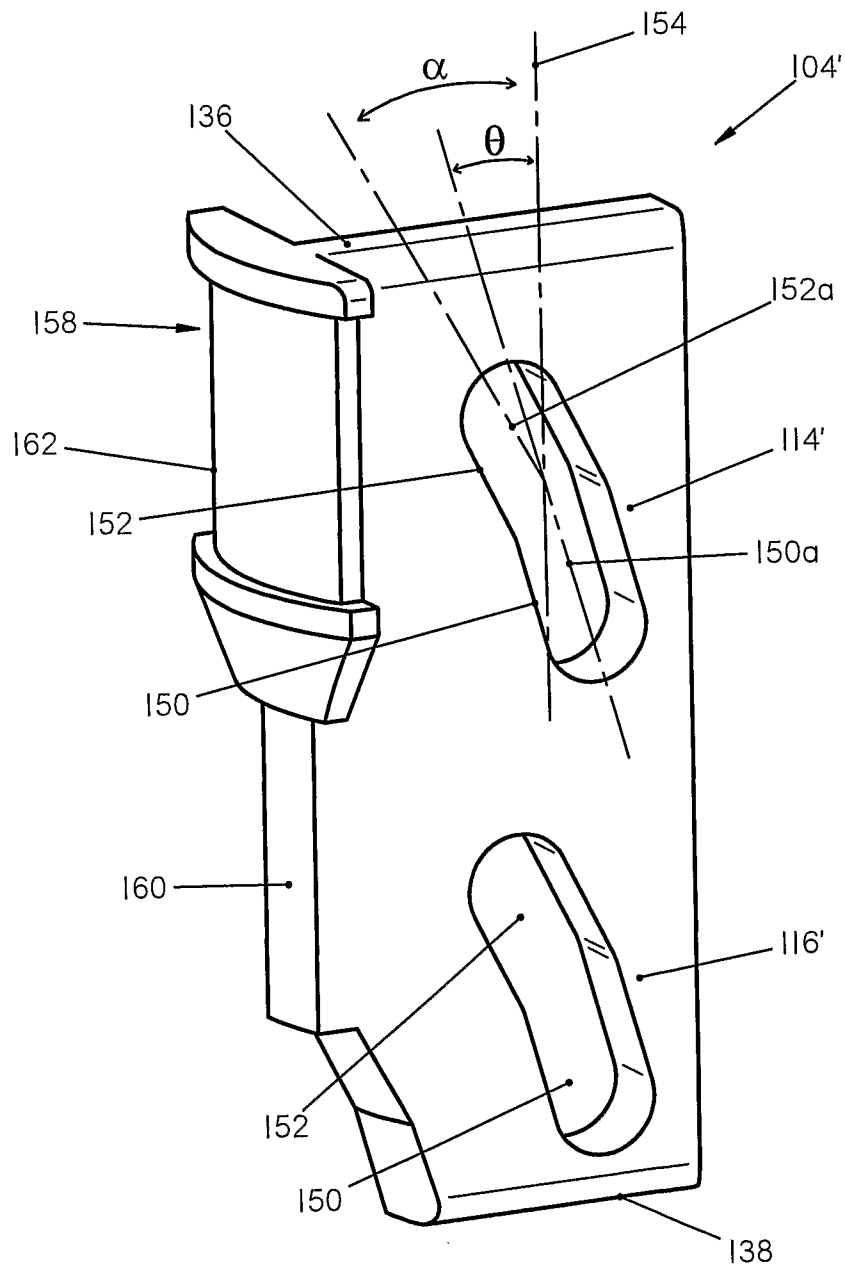


FIGURE 11

12/12

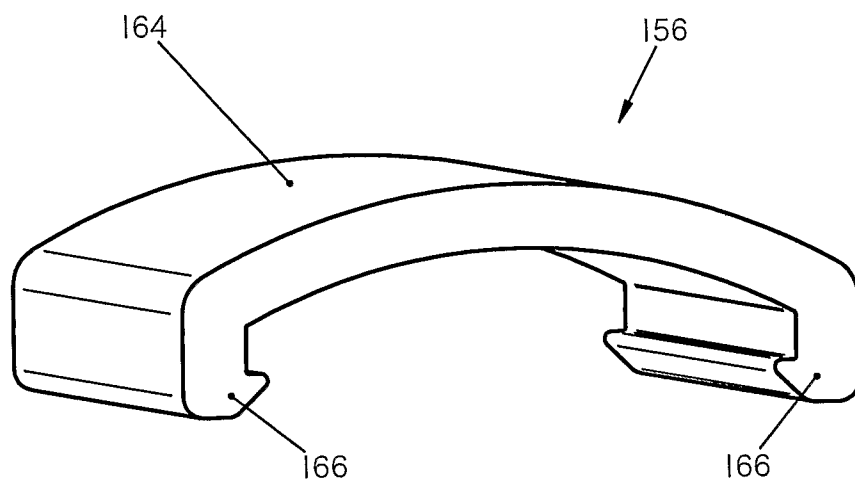


FIGURE 12

INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU2010/000194

A. CLASSIFICATION OF SUBJECT MATTER

Int. Cl.

E21B 23/02 (2006.01)*E21B 25/02* (2006.01)*E21B 23/00* (2006.01)*E21B 31/20* (2006.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, EPODOC - IPC, ECLA E21B23, E21B25, E21B31 & Keywords (spear, overshot, fishing, head, trip, latch, pivot, rotate, angle, grip, anchor, grapple, dog, brake, side ways, radial, transverse, lateral, extend, expand, outwards, parallel) & like terms

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	CN 86106661 A (GEOLOGICAL MACHINERY FACTORY BEIJING (CN)) 18 May 1988 Figures 1-2	1-5, 11-15, 34 6-7, 10
X Y	US 4281725 A (RUNK) 4 August 1981 Figures 1, 3-4; column 5, line 39-60; and column 3, line 38-46	14-15, 34 36
Y	WO 2004/018831 A1 (2IC AUSTRALIA PTY LTD) 4 March 2004 Abstract; figures 1-5	6-7, 10

☒ Further documents are listed in the continuation of Box C☒ See patent family annex

* Special categories of cited documents:			
"A"	document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E"	earlier application or patent but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family
"P"	document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search
27 April 2010

Date of mailing of the international search report

04 MAY 2010

Name and mailing address of the ISA/AU

AUSTRALIAN PATENT OFFICE
PO BOX 200, WODEN ACT 2606, AUSTRALIA
E-mail address: pct@ipaaustralia.gov.au
Facsimile No. +61 2 6283 7999

Authorized officer

ALLAN SMAILES

AUSTRALIAN PATENT OFFICE
(ISO 9001 Quality Certified Service)
Telephone No : +61 2 6283 2154

INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU2010/000194

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,Y Y	US 3818997 A (BIRDWELL) 25 June 1974 Figure 1a; and column 3, line 4-25	16-20, 22-24, 26, 29-30, 32-33, 35 21, 27-28
X,Y Y	US 3603413 A (CHRISTENSEN DIAMOND PRODUCTS COMPANY) 7 September 1971 Figures 1a and 2a; and column 3, line 43-66	16-20, 22-26, 29- 30, 32-33, 35 21, 27-28
X Y	US 3346059 A (SVENDSEN) 10 October 1967 Figures 1-6; column 2, line 25 to column 3, line 42	16-20, 29-30, 32- 33, 35 36
Y	US 3554304 A (CHRISTENSEN DIAMOND PRODUCTS COMPANY) 12 January 1971 Figures 1, 2, 3, 4 and 6; column 4, line 47-72; and column 8, line 64-71	16-30, 32-33, 35
Y	GB 510587 A (ELLIOTT CORE DRILLING COMPANY) 3 August 1939 Figures 1-3; and page 2, line 89 to page 3, line 5	16-18, 22-24, 26, 29-30, 32-33, 35
A	WO 1997/018382 A1 (DOWN HOLE TECHNOLOGIES PTY LTD) 22 May 1997 Abstract; figures 1-4	8-9
P,A	US 2009/0283327 A1 (DRENTH et al.) 19 November 2009 Abstract; figures 1-3	8-9
	US 3554304 can be combined with either one of US 3818997 or US 3603413 GB 510587 can be combined with either one of US 3818997 or US 3603413	

INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU2010/000194

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a)

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

- Claims 1-15, 34, 36 are directed to a spear head with a sleeve and a spear point pivotal about an axis. It is considered that the spear point being pivotal about an axis comprises a first distinguishing feature.
- Claims 16-33, 35-36 are directed to a latch or brake system for an apparatus within a tube having dogs which move parallel to each other when moving between the tube engaging condition and release position. It is considered that the dogs moving parallel to each other comprises a second distinguishing feature.

PCT Rule 13.2, first sentence, states that unity of invention is only fulfilled when there is a technical relationship among the claimed inventions involving one or more of the same or corresponding special technical features. PCT Rule 13.2, second sentence, defines a special technical feature as a feature which makes a contribution over the prior art.

Each of the abovementioned groups of claims has a different distinguishing feature and they do not share any feature which could satisfy the requirement for being a special technical feature. Because there is no common special technical feature it follows that there is no technical relationship between the identified inventions. Therefore the claims do not satisfy the requirement of unity of invention *a priori*.

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☒ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/AU2010/000194

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member			
CN	86106661	CN	1049542		
US	4281725	AU	62546/80	CA	1128493
WO	2004018831	AU	2003250598	CA	2496425
		US	7383899	ZA	200501482
US	3818997	NONE			
US	3603413	DE	2048519	FR	2064116
		ZA	7002626	GB	1279190
US	3346059	NONE			
US	3554304	NONE			
GB	510587	NONE			
WO	9718382	AU	69198/96	CA	2236932
		US	6045171	ZA	9608165
US	2009283327	WO	2009140597		
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.					
END OF ANNEX					