



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 484 472 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
25.10.2006 Bulletin 2006/43

(51) Int Cl.:
E21B 21/06^(2006.01)

(21) Application number: **04253224.2**

(22) Date of filing: **28.05.2004**

(54) **Modular mud plant**

Modulare Spülungsanlage

Installation modulaire de boue de forage

(84) Designated Contracting States:
DE FR GB

(30) Priority: **05.06.2003 US 476272 P**

(43) Date of publication of application:
08.12.2004 Bulletin 2004/50

(73) Proprietor: **NATIONAL-OILWELL, L.P.**
Houston, TX 77042-4200 (US)

(72) Inventor: **Tettleton, Tab**
Spring
Texas 77379 (US)

(74) Representative: **Flint, Adam**
Beck Greener
Fulwood House,
12 Fulwood Place,
London WC1V 6HR (GB)

(56) References cited:
EP-A- 0 748 924 **DE-A- 19 507 172**
GB-A- 2 350 851 **US-A- 6 070 764**

EP 1 484 472 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a system for processing drilling fluid.

[0002] The embodiments of the present invention relate generally to systems for removing and controlling solids suspended in a liquid slurry. More particularly, the embodiments provide a mobile system for storing and processing drilling fluids.

[0003] Rigs used for drilling hydrocarbon wells are large, complex assemblies of machinery. While drilling rigs used offshore are often integrated into a single platform, almost all rigs used to drill wells on land are designed to be disassembled, transported between drilling sites, and reassembled. Although some rigs may be designed to be moved by helicopter or airplane, the majority of rigs are moved by trucks and trailers. Thus, many land rigs are designed to disassemble into components sized so as to be quickly and easily loaded onto, transported by, and offloaded from a trailer.

[0004] The process of assembling a land rig for drilling operations is known as "rig up". During rig up, all of the various components of the drilling rig are assembled and tested prior to any drilling activity taking place. The rig up procedure may last anywhere from a couple of days to more than a week, depending on the type of rig being assembled and any problems encountered during the process. Because drilling the well can not commence until rig up is complete, it is desirable to minimize the time spent assembling the drilling rig.

[0005] The entire rig up process must be performed in reverse order to "rig down", the process used to disassemble the rig for transportation to another location. During rig down, the individual rig components are disconnected and loaded, by cranes or winches, onto trailers for transport. The rig down procedures further add to the downtime that the rig spends between drilling wells, and are therefore conducted as quickly as safety permits.

[0006] The amount of downtime spent between drilling wells is often limited by the contract under which the rig is operating. These contracts often specify the time permitted for rig up and rig down, and that any time beyond the permitted limits will not be paid for by the rig lessee, but will be paid for by the rig operator. Thus, any equipment or procedures that may be available to lessen the amount of time needed for rig up and rig down activities are desirable and would be welcomed by the industry.

[0007] One key component of a drilling rig is the drilling fluid circulation system or mud system, which circulates drilling fluid (mud) through the wellbore. The circulation system is also used to maintain the density of the drilling fluid by removing drilled cuttings from the fluid, and adding other solids to the fluid as may be desired. The density of the drilling fluid is critical to hole cleaning, rate of penetration, and pressure control in the well. Hole cleaning and rate of penetration are important factors in the efficiency of the drilling process, while pressure control is critical to safely drilling a well.

[0008] In general operation, drilling fluid is pumped by high-pressure mud pumps through the drill string and into the wellbore. The fluid exits the drill string at the bit and returns to the surface through the annulus between the drill string and the wellbore, carrying cuttings from the hole to the surface. The hydrostatic pressure from the column of drilling fluid prevents fluids from the surrounding formation from entering the wellbore and potentially causing a loss of well control.

[0009] At the surface, the drilling fluid is then processed, in order to maintain the desired density, before it is pumped back through the drill string into the hole. Solids control equipment, such as shakers, degassers, desilters, desanders, and centrifuges, may be used to process the drilling fluid at the surface by removing solids and entrained gases from the fluid. The density of the drilling fluid may be increased by adding a higher density fluid or selected solid materials to the fluid. The drilling fluid, including a reserve volume, is typically stored in tanks or pits at the surface before being recirculated through the well.

[0010] For land-based, mobile drilling rigs, the circulation system is often subdivided into skid-mounted modules that can be easily transported by truck between well sites. These skid-mounted modules are normally designed to be lifted by cranes onto trailers or pulled onto flatbed trailers by winches. Common modules include mud tanks, solids control equipment, jetting equipment, and a gravity fed manifold. A common circulation system may include more than one module of each type, but every module employed in the system increases the time needed for rig up and rig down operations.

[0011] The mud tank modules provide a reservoir of drilling fluid for use during circulation. Most conventional mud tank modules include open top, rectangular tanks, but round tanks are also occasionally used. At one end of the typical mud tank module is a "porch" for mounting pumps and other equipment that is used to move fluid into and out of the tanks. The mud tanks also preferably have access hatches or manways through the sides of the tanks designed to provide access into the tank to facilitate cleaning, since solids tend to accumulate in the tanks. The tanks are usually cleaned periodically during operations, and also between well drilling operations. The mud tanks may also have agitators or stirrers provided to keep the fluid circulating within a single tank in order to minimize settling of the solids.

[0012] An assortment of other modules are also used in conjunction with the mud tanks and are thus in fluid communication with the tanks. The solids control module includes the shakers, desilters, desanders, mudcleaners, agitators, mud hoppers, centrifuges, degassers, etc. and may include one or more skids, to which the equipment is mounted. Jetting equipment is used to supply high pressure fluid to clean or remove deposits from the inside of the mud tanks. Jetting equipment may also be used in conjunction with a tanker truck or vacuum truck to clean out the mud tanks and remove unwanted fluids.

The gravity fed manifold is used to control and route the supply of drilling fluid from the mud tanks to the triplex pumps, which are used to circulate the drilling mud down the wellbore and throughout the system. The jetting equipment, and manifold all require one or more skids each.

[0013] With all of the different equipment that has to be integrated into a typical fluid circulation system, it can be seen that the effort required to transport and assembly such a system is considerable. Thus, there remains a need in the art for systems that decrease the time needed for rig up and rig down of a fluid circulation system.

[0014] EP-A-0748924 discloses a flushing tank system for the treatment of material flushed out of boreholes, having circular tanks located on a container unit. The upper tank sections are cylindrical and the lower tank sections are conical. Pumps and piping are provided underneath the tanks.

[0015] According to the present invention, there is provided a system for processing drilling fluid, the system comprising: at least one shaker tank disposed on a shaker tank skid and operable to receive drilling mud from a drilling system; solids control equipment disposed on an equipment platform skid, wherein the equipment platform skid is connected to the top of the shaker tank skid, and wherein said solids control equipment is operable to draw drilling mud from the at least one shaker tank and process the drilling mud; at least one suction tank disposed on a suction tank skid, wherein said suction tank is operable to receive drilling mud that has been processed by said solids control equipment; a suction platform skid connected to the top of the suction tank skid and comprising a platform providing access to said suction tank, wherein said suction platform skid substantially covers said suction tank; and, at least one centrifugal pump disposed on at least one of the shaker tank skid and the suction tank skid, the centrifugal pump being in fluid communication with the at least one tank of said skid, characterised in that the at least one centrifugal pump is vertically-mounted and positioned in a recess formed on the side of said skid so as to fit within the footprint of said skid.

[0016] The preferred embodiments provide a mobile solids control system for the processing of drilling fluids. The solids control system includes a suction tank skid, a suction platform skid, a shaker tank skid, and an equipment platform skid. The suction tank skid and shaker tank skid include the drilling fluid storage tanks, pumps to effectuate the flow of fluid through the system, and agitators to circulate fluid within the tanks. The pumps are preferably centrifugal pumps mounted vertically within notches or recesses built into the sides of the tank skids. The suction platform skid and the equipment platform skid are installed on top of the tank skids, and include solids control equipment used to process the drilling fluid.

[0017] The vertically mounted, centrifugal pumps are preferably connected in fluid communication with at least two fluid tanks and are suited for use in transferring fluid between tanks, moving fluid through the solids control

equipment, supplying fluid for jetting and cleaning the tanks, and providing a fluid supply for priming the triplex pumps. The use of the centrifugal pumps for priming the triplex pumps eliminates the need for a gravity manifold for priming and simplifies the operation of the system. The jetting and cleaning fluid supplied by the centrifugal pumps may be dispersed into the tanks through cleaning nozzles, which may be integrated into the rotating shafts of the agitators or disposed within the tanks separately. The centrifugal pumps may also be used to empty the tanks when required without requiring the use of a vacuum truck.

[0018] In the preferred embodiments, the multiple operations performed by the centrifugal pumps allow for a substantially self-sufficient solids control system that can be used interchangeably with similar solids control systems having different fluid capacities with the same drilling rig. Likewise, in the preferred embodiments, the system provides a solids control system that is easily integrated into new or existing drilling rigs.

[0019] In the preferred embodiments, the solids control system reduces the number of trucks and crane lifts required to move the system between locations. Each platform skid is lifted by a crane and loaded onto a truck for transport. The tank skids can then also be loaded onto trucks and the entire system can be transported in four truckloads. Once in the new location, the tank skids are offloaded and the platform skids are lifted into place on top of the tank skids.

[0020] Thus, embodiments according to the present invention comprise a combination of features and advantages that provide a modular, mobile solids control system. These and various other characteristics and advantages of the preferred embodiments will be readily apparent to those skilled in the art upon reading the following detailed description and by referring to the accompanying drawings.

[0021] Embodiments of the present invention will now be described by way of example with reference to the accompanying drawings, in which:

Figure 1 is a front isometric view of one example of a solids control system in accordance with an embodiment of the present invention;

Figure 2 is a rear isometric view of the system of Figure 1;

Figure 3A-3C are views of the shaker tank skid and equipment platform skid of the system shown in Figure 1; and,

Figure 4 is top plan view of the suction tank skid and shaker tank skid of the system shown in Figures 1 and 2, and shows a partial, schematic flow diagram of the system.

[0022] In the description that follows, like parts are

marked throughout the specification and drawings with the same reference numerals, respectively. The drawing figures are not necessarily to scale. Certain features may be shown exaggerated in scale or in somewhat schematic form and some details of conventional elements may not be shown in the interest of clarity and conciseness.

[0023] The present invention is susceptible to embodiments of different forms. There are shown in the drawings, and herein will be described in detail, specific embodiments of the present invention with the understanding that the present disclosure is to be considered an exemplification of the principles of the invention, and is not intended to limit the invention to that illustrated and described herein. It is to be fully recognized that the different teachings of the embodiments discussed below may be employed separately or in any suitable combination to produce the desired results.

[0024] Figure 1 shows an embodiment of a solids control system 10 including a suction platform skid 20, equipment platform skid 30, shaker tank skid 40, and suction tank skid 50. Suction platform skid 20 and equipment platform skid 30 stack, respectively, on top of suction tank skid 50 and shaker tank skid 40. In the preferred embodiments, the assembled skids comprise a self-contained, mobile, solids control system that provides a more compact and more easily transportable system than conventional systems.

[0025] Suction platform skid 20 provides a working platform 24 above suction tank skid 50. Roof 26 covers platform 24, providing shelter from the environment and a cover for the open top mud tanks in suction tank skid 50. Working platform 24 is preferably a metal or fibreglass grating providing a non-slip working surface. In an alternative embodiment, working platform 24 may be formed from treaded plates, which would provide the tank covering function of roof 26. In this alternative embodiment, roof 26 may be eliminated. Working platform 24 is also preferably surrounded by handrails 23 to provide a secure, elevated working surface.

[0026] Suction platform skid 20 is built on a structural frame 22 that is adapted to attach to the top of suction tank skid 50 by way of posts 51 that allow for attachment between suction platform skid 20 and suction tank skid 50 and provide a gap between the two structures. Lifting points 28 are positioned on frame 22 and can be accessed by hatch 29 through roof 26. Access openings 25 through platform 24 provide access to suction tank skid 50. The overall dimensions of suction platform skid 20 are preferably within any local maximum size limits for road transportation.

[0027] Equipment platform skid 30 provides a working platform 33 and mounting locations for solid control equipment such as shakers 34, degasser 35, desander 36, and desilter 37. Roof 32 covers platform 33, providing shelter from the environment and a cover for the solids control equipment and the open top mud tanks in shaker tank skid 40. Working platform 33 is preferably a metal or fibreglass grating providing a non-slip working surface.

In an alternative embodiment working platform 33 may be formed from treaded plates, which would provide the tank covering function of roof 32. In this alternative embodiment, roof 32 may be eliminated. Working platform 33 is also preferably surrounded by handrails 27 to provide a secure, elevated working surface

[0028] Equipment platform skid 30 includes a structural base 31 that is adapted to attach to the top of shaker tank skid 40 by way of posts 41 that allow for attachment between equipment platform skid 30 and shaker tank skid 40 and provide a gap between the two structures. Lifting points (not shown) are positioned on base 31 and can be accessed by hatch (not shown) through roof 32. Access openings through platform 33 provide clearance for plumbing to the solids control equipment and access to shaker tank skid 40.

[0029] The overall dimensions of equipment platform skid 30 are preferably within any local maximum size limits for road transportation. Stairs 38 are also provided to enable access to equipment platform skid 30 from ground level as equipment platform skid 30 is designed to be installed on top of shaker tank skid 40. Stairs 38 are preferably removable for transport as are platforms 108 that extend beyond the footprint of base 31.

[0030] Shaker tank skid 40 and suction tank skid 50 provide skid-type platforms 42, 52 to which a plurality of mud tanks are mounted. As can be seen in Figure 4, the preferable mud tanks 200 are generally rectangular, flat-sided tanks. In the preferred embodiments of the present invention, system 10 can handle 1500 barrels (approx. 240,000 litres) of fluid. As will be discussed, tanks 200 are interconnected by piping and valves 202 to control the flow of fluid between tanks, to the solids control equipment, and out to the triplex pumps. The tanks 200 are preferably fitted with agitators 160 that are used to promote circulation through the tank. The tank skids 40, 50 also preferably include pumps 100 used to move the fluid between the tanks 200 and into and out of the system.

[0031] Referring now to Figure 2, a rear view of system 10 is shown. Pumps 100 are centrifugal pumps, oriented vertically and nested into recesses or notches 102 formed on the sides of shaker tank skid 40 and suction tank skid 50. Notches 102 allow pumps 100 to fit inside the generally rectangular footprint of the tank skids 40, 50 without adversely affecting circulation of fluid through the individual tanks. An overhead rail system 104, in conjunction with trolleys (not shown), allows for easy lifting and removal of pumps 100 for maintenance or replacement.

[0032] Shaker tank skid 40 and equipment platform skid 30 are shown in Figures 3A-3C. Figure 3A shows an elevation view of equipment platform skid 30 mounted atop shaker tank skid 40. Agitators 160 are mounted to shaker tank skid 40 below equipment platform skid 30 and provide agitation to the mud tanks. As can be seen in end view Figure 3B and top view Figure 3C, platforms 108 project beyond the footprint of skid 40. Platforms 108 are preferably removable or hinged to shaker tank skid

40 so that they can be collapsed during transport of the skid. Top view Figure 3C also shows rail system 104 and access hatch 110 through roof 32, which allows access to lifting points on equipment platform skid 30.

[0033] Figure 4 shows mud tanks 200 in plan view, with a partial hydraulic schematic of system 10 imposed thereon. Shaker tank skid 40 includes five mud tanks 200, which are connected by three pumps 100 controlled by valves 202. Agitators 160 are provided for three mud tanks 200. Shakers 34, degasser 35, desander 36, and desilter 37 draw fluid from the mud tanks 200, process the fluid, and return it to the tanks 200. Suction tank skid 50 provides four additional mud tanks 200, pumps, 100, valves 202, and agitators 160. Suction tank skid 50 also includes a mud hopper 204 that is used to add solids to the drilling mud. Tanks 200 may also include cleaning nozzles (not shown) for jetting, or cleaning, the tanks. These cleaning nozzles may be suspended in the tank on a rotating shaft or may be integrated into agitators 160. Cleaning nozzles integrated into agitators 160 may be preferred in order to reduce the equipment that is suspended in a tank because each interference with circulation in a tank may have detrimental effects on the fluid stored in that tank.

[0034] Pumps 100 can be used to provide the fluid pressure needed for moving fluid through the solids control equipment, for jetting and cleaning the tanks, and transferring fluid between tanks 200. Each pump 100 is preferably in fluid communication with at least two tanks 200 so that the number of pumps can be minimized. Pumps 100 allow cleaning and jetting to be performed while drilling operations are ongoing since, unlike conventional systems, the high-pressure triplex pumps are not required in system 10 for cleaning and jetting operations. Pumps 100 supply can supply fluids to the cleaning nozzles or can be used to draw fluid out of the tanks, thus eliminating the need, in conventional systems, for vacuum trucks to be used to empty the tanks.

[0035] Pumps 100 may also be used to supply pressurized fluid for priming high-pressure, triplex pumps 300. In most conventional systems, a separate manifold is used to supply the fluid that is needed to prime the triplex pumps 300. System 10 can be connected to the triplex pumps 300 via an easily installed flexible hose 302, and pumps 100 can supply sufficient fluid to prime the triplex pumps 300. This eliminates the need for a special manifold and the corresponding equipment, transportation, and rig up/rig down costs associated therewith.

[0036] Another key advantage to solids control system 10 is the simplicity of rig up and rig down. From the fully assembled position shown in Figure 1, suction platform skid 20 and equipment platform skid 30 are lifted, one at a time, by a crane and placed onto trailers for transport. The crane attaches to lift points on the base structure of the skid 20, 30, which can be accessed by opening hatch 28 in the roof. This configuration eliminates the need for any personnel to be on top of the roof of the skid 20,30

to attach to the crane, and allows the roof structure to be designed for smaller loads than would be necessary if the skid were lifted through the roof structure. Once the suction platform skid 20 and equipment platform skid 30 are removed, suction tank skid 50 and shaker tank skid 40 can be loaded onto trailers for transport. Each of the skids 20, 30, 40, and 50 requires a single truck load to transport. Thus, system 10 can be transported in four loads and only requires two crane lifts (or picks) for rig up or rig down.

Claims

1. A system (10) for processing drilling fluid, the system (10) comprising:

at least one shaker tank (200) disposed on a shaker tank skid (40) and operable to receive drilling mud from a drilling system;
solids control equipment (34,35,36,37) disposed on an equipment platform skid (30), wherein the equipment platform skid (30) is connected to the top of the shaker tank skid (40), and wherein said solids control equipment (34,35,36,37) is operable to draw drilling mud from the at least one shaker tank (200) and process the drilling mud;

at least one suction tank (200) disposed on a suction tank skid (50), wherein said suction tank (200) is operable to receive drilling mud that has been processed by said solids control equipment (34,35,36,37);

a suction platform skid (20) connected to the top of the suction tank skid (50) and comprising a platform (24) providing access to said suction tank (200), wherein said suction platform skid (20) substantially covers said suction tank (200); and,

at least one centrifugal pump (100) disposed on at least one of the shaker tank skid (40) and the suction tank skid (50), the centrifugal pump (100) being in fluid communication with the at least one tank (200) of said skid (40,50), **characterised in that** the at least one centrifugal pump (100) is vertically-mounted and positioned in a recess (102) formed on the side of said skid (40,50) so as to fit within the footprint of said skid (40,50).

2. A system according to claim 1, wherein at least one vertically-mounted, centrifugal pump (100) is disposed on the shaker tank skid and is in fluid communication with the at least one shaker tank.
3. A system (10) according to claim 1, comprising plural shaker tanks (200) and plural shaker tank skid centrifugal pumps (100), wherein the shaker tank skid

centrifugal pumps (100) are operable to transfer fluid between said shaker tanks (200), move fluid through said solids control Equipment (34,35,36,37), and supply fluid for jetting and cleaning said shaker tanks (200).

4. A system (10) according to any of claims 1 to 3, comprising at least one agitator (160) disposed within the shaker tank (200). 5
5. A system (10) according to any of claims 1 to 4, wherein said solids control equipment (34,35,36,37) includes at least one of a shaker (34), a degasser (35), a desander (36), and a desilter (37). 10
6. A system (10) according to any of claims 1 to 5, wherein at least one vertically-mounted, centrifugal pump (100) is disposed on the suction tank skid (50), and the suction tank skid centrifugal pump (100) is in fluid communication with said suction tank (200). 15
7. A system (10) according to claim 6, comprising plural suction tanks (200) and plural suction tank skid centrifugal pumps (100), wherein the suction tank skid centrifugal pumps (100) are operable to transfer fluid between said suction tanks (200), supply fluid for jetting and cleaning said suction tanks (200), and prime pumps used to supply fluid to the drilling system. 20
8. A system (10) according to any of claims 1 to 7, comprising at least one agitator (160) disposed within said suction tank (200). 25
9. A system (10) according to any of claims 1 to 8, wherein the or each shaker tank (200) and suction tank (200) is an open-topped, flat-sided tank. 30
10. A system (10) according to any of claims 1 to 9, wherein the shaker tank skid (40), the equipment platform skid (30), the suction tank skid (50), and the suction platform skid (20) are sized so as to allow transportation by road. 35
11. A system (10) according to any of claims 1 to 10, wherein said equipment platform skid (30), said shaker tank skid (40), said suction tank skid (50), and said suction platform skid (20) are separably connected together, such that the system (10) can be disassembled, transported separately, and reassembled prior to operation. 40

Patentansprüche

1. System (10) zum Verarbeiten von Bohrfluid, wobei das System (10) versehen ist mit: 45
- mindestens einem Rütteltank (200), der auf ei-

nem Rütteltank-Ladegestell (40) angeordnet und betätigbar ist, um Bohrschlamm von einem Bohrsystem zu erhalten;
einer Feststoffsteuerungsapparatur (34, 35, 36, 37), die auf einem Apparaturbühnen-Ladegestell (30) angeordnet ist, welches mit der Oberseite des Rütteltank-Ladegestells (40) verbunden ist, wobei die Feststoffsteuerungsapparatur (34, 35, 36, 37) betätigbar ist, Bohrschlamm von dem mindestens einen Rütteltank (200) anzusaugen und den Bohrschlamm zu verarbeiten; mindestens einem Saugtank (200), der auf einem Saugtank-Ladegestell (5) angeordnet ist und der betätigbar ist, Bohrschlamm zu erhalten, welcher durch die Feststoffsteuerungsapparatur (34, 35, 36, 37) verarbeitet wurde; einem Saugbühnen-Ladegestell (20), welches mit der Oberseite des Saugtank-Ladegestells (50) verbunden ist und eine Bühne (24) aufweist, die einen Zugang zu dem Saugtank (200) bereitstellt, wobei das Saugbühnen-Ladegestell (20) den Saugtank (200) im Wesentlichen überdeckt; und mindestens einer Zentrifugalpumpe (100), die an dem Rütteltank-Ladegestell (50) und/oder an dem Saugtank-Ladegestell (50) angeordnet ist und in Fluidverbindung mit dem mindestens einen Tank (200) des Ladegestells (40, 50) steht, **dadurch gekennzeichnet, dass** die mindestens eine Zentrifugalpumpe (100) in einer an der Seite des Ladegestells (40, 50) ausgebildeten Ausnehmung (102) vertikal montiert und angeordnet ist, so dass sie in die Standfläche des Ladegestells (40, 50) passt.

2. System gemäß Anspruch 1, bei welchem mindestens eine vertikal montierte Zentrifugalpumpe (100) an dem Rütteltank-Ladegestell angeordnet ist und in Fluidverbindung mit dem mindestens einen Rütteltank steht.
3. System (10) gemäß Anspruch 1, versehen mit mehreren Rütteltanks (200) und mehreren an dem Rütteltank-Ladegestell angeordneten Zentrifugalpumpen (100), wobei die an dem Rütteltank-Ladegestell angeordneten Zentrifugalpumpen (100) betätigbar sind, um Fluid zwischen den Rütteltanks (200) zu übertragen, Fluid durch die Feststoffsteuerungsapparatur (34, 35, 36, 37) zu bewegen, und Fluid zum Einspülen und Reinigen der Rütteltanks (200) bereitzustellen.
4. System (10) nach einem der Ansprüche 1 bis 3, versehen mit mindestens einem Rührwerk (160), welches innerhalb des Rütteltanks (200) angeordnet ist.
5. System (10) nach einem der Ansprüche 1 bis 4, bei welchem die Feststoffsteuerungsapparatur (34, 35,

36, 37) einen Rüttler (34), eine Entgasungseinrichtung (35), eine Entsandungseinrichtung (36) und/oder eine Entschlammungseinrichtung (37) aufweist.

6. System (10) nach einem der Ansprüche 1 bis 5, bei welchem mindestens eine vertikal montierte Zentrifugalpumpe (100) an dem Saugtank-Ladegestell (50) angeordnet ist, und die an dem Saugtank-Ladegestell angeordnete Zentrifugalpumpe (100) in Fluidverbindung mit dem Saugtank (200) steht.

7. System (10) gemäß Anspruch 6, versehen mit mehreren Saugtanks (200) und mehreren an dem Saugtank-Ladegestell angeordneten Zentrifugalpumpen (100), wobei die an dem Saugtank-Ladegestell angeordneten Zentrifugalpumpen (100) betätigbar sind, um Fluid zwischen den Saugtanks (200) zu übertragen, um Fluid zum Einspülen und Reinigen der Saugtanks (200) bereitzustellen, und um für ein Selbstansaugen von Pumpen, die zum Bereitstellen von Fluid für das Bohrsystem verwendet werden, zu sorgen.

8. System (10) nach einem der Ansprüche 1 bis 7, versehen mit mindestens einem innerhalb des Saugtanks (200) angeordneten Rührwerk (160).

9. System (10) nach einem der Ansprüche 1 bis 8, bei welchem der oder jeder Rütteltank (200) und Saugtank (200) ein oben offener Tank mit flachen Seiten ist.

10. System (10) nach einem der Ansprüche 1 bis 9, bei welchem das Rütteltank-Ladegestell (40), das Apparaturbühnen-Ladegestell (30), das Saugtank-Ladegestell (50) und das Saugbühnen-Ladegestell (20) so bemessen sind, dass ein Transport auf der Straße möglich ist.

11. System (10) nach einem der Ansprüche 1 bis 10, bei welchem das Apparaturbühnen-Ladegestell (30), das Rütteltank-Ladegestell (40), das Saugtank-Ladegestell (50), und das Saugbühnen-Ladegestell (20) lösbar miteinander verbunden sind, sodass das System (10) demontiert, getrennt transportiert und vor Inbetriebnahme wieder zusammengebaut werden kann.

Revendications

1. Système (10) pour traiter un fluide de forage, le système (10) comprenant :

au moins un réservoir de secoueur (200) disposé sur un dispositif de calage de réservoir de secoueur (40) et opérationnel pour recevoir une

boue de forage provenant d'un système de forage ;

une installation de contrôle de solides (34, 35, 36, 37) disposée sur un dispositif de calage de plate-forme d'installation (30), dans laquelle le dispositif de calage de plate-forme d'installation (30) est raccordé au sommet du dispositif de calage du réservoir de secoueur (40), et dans laquelle ladite installation de contrôle de solides (34, 35, 36, 37) est opérationnelle pour extraire la boue de forage d'au moins un réservoir de secoueur (200) et pour traiter la boue de forage ; au moins un réservoir d'aspiration (200) disposé sur un dispositif de calage de réservoir d'aspiration (50), dans lequel ledit réservoir d'aspiration (200) est opérationnel pour recevoir la boue de forage qui a été traitée par ladite installation de contrôle des solides (34, 35, 36, 37) ;

un dispositif de calage de plate-forme d'aspiration (20) raccordé au sommet du dispositif de calage de réservoir d'aspiration (50) et comprenant une plate-forme (24) fournissant un accès audit réservoir d'aspiration (200), dans lequel ledit dispositif de calage de plate-forme d'aspiration (20) recouvre essentiellement ledit réservoir d'aspiration (200); et

au moins une pompe centrifuge (100) disposée sur au moins l'un du dispositif de calage de réservoir de secoueur (40) et du dispositif de calage de réservoir d'aspiration (50), la pompe centrifuge (100) étant en communication de fluide avec le ou les réservoir(s) (200) dudit dispositif de calage (40 ; 50), **caractérisée en ce que** la (les) pompe(s) centrifuge(s) (100) est (sont) montée(s) verticalement et positionnée(s) dans un évidement (102) formé sur le côté dudit dispositif de calage (40, 50) de façon à s'adapter à l'intérieur de l'empreinte dudit dispositif de calage (40, 50).

2. Système selon la revendication 1, dans lequel au moins une pompe centrifuge montée verticalement (100) est disposée sur le dispositif de calage de réservoir du secoueur et est en communication de fluide avec le (les) réservoir(s) de secoueur.

3. Système (10) selon la revendication 1, comprenant plusieurs réservoirs de secoueur (200) et plusieurs pompes centrifuges de dispositif de calage de réservoir de secoueur (100), dans lequel les pompes centrifuges de dispositif de calage de réservoir de secoueur (100) peuvent agir pour transférer un fluide entre lesdits réservoirs de secoueur (200), déplacer un fluide à travers ladite installation de contrôle de solides (34, 35, 36, 37), et fournir un fluide pour produire un jet et nettoyer lesdits réservoirs (200).

4. Système (10) selon l'une quelconque des revendications 1 à 3.

cations 1 à 3, comprenant au moins un agitateur (160) disposé à l'intérieur du réservoir de secoueur (200).

semblé, transporté séparément et assemblé de nouveau avant une mise en fonctionnement.

5. Système (10) selon l'une quelconque des revendications 1 à 4, dans lequel ladite installation de contrôle des solides (34, 35, 36, 37) comporte au moins l'un des dispositifs de secoueur (34), de dégazeur (35), d'élimination de sable (36) et d'élimination de boue (37). 5
10
6. Système (10) selon l'une quelconque des revendications 1 à 5 dans lequel au moins une pompe centrifuge, montée verticalement (100) est disposée sur le dispositif de calage de réservoir d'aspiration (50), et dans lequel la pompe centrifuge de dispositif de calage de réservoir d'aspiration (100) est en communication de fluide avec ledit réservoir d'aspiration (200). 15
20
7. Système (10) selon la revendication 6 comprenant plusieurs réservoirs d'aspiration (200) et plusieurs pompes centrifuges de dispositif de calage de réservoir d'aspiration (100), dans lequel les pompes centrifuges de dispositif de calage de réservoir d'aspiration (100) peuvent agir pour transférer un fluide entre lesdits réservoirs d'aspiration (200), fournir un fluide pour produire un jet et nettoyer lesdits réservoirs d'aspiration (200) et des pompes à mise en charge utilisées pour fournir un fluide au système de forage. 25
30
8. Système (10) selon l'une quelconque des revendications 1 à 7, comprenant au moins un agitateur (160) disposé à l'intérieur dudit réservoir d'aspiration (200). 35
9. Système (10) selon l'une quelconque des revendications 1 à 8, dans lequel le ou chaque réservoir de secoueur (200) et réservoir d'aspiration (200) est un réservoir à côtés plats, ouvert sur le dessus. 40
10. Système (10) selon l'une quelconque des revendications 1 à 9, dans lequel le dispositif de calage de réservoir de secoueur (40), le dispositif de calage de plate-forme d'installation (30), le dispositif de calage de réservoir d'aspiration (50) et le dispositif de calage de plate-forme d'aspiration (20) sont dimensionnés de façon à permettre un transport par la route. 45
50
11. Système (10) selon l'une quelconque des revendications 1 à 10, dans lequel ledit dispositif de calage de plate-forme d'installation (30), ledit dispositif de calage de réservoir de secoueur (40), ledit dispositif de calage de réservoir d'aspiration (50), et ledit dispositif de calage de plate-forme d'aspiration (20) sont connectés ensemble de façon séparable de telle manière que le système (10) puisse être désas- 55

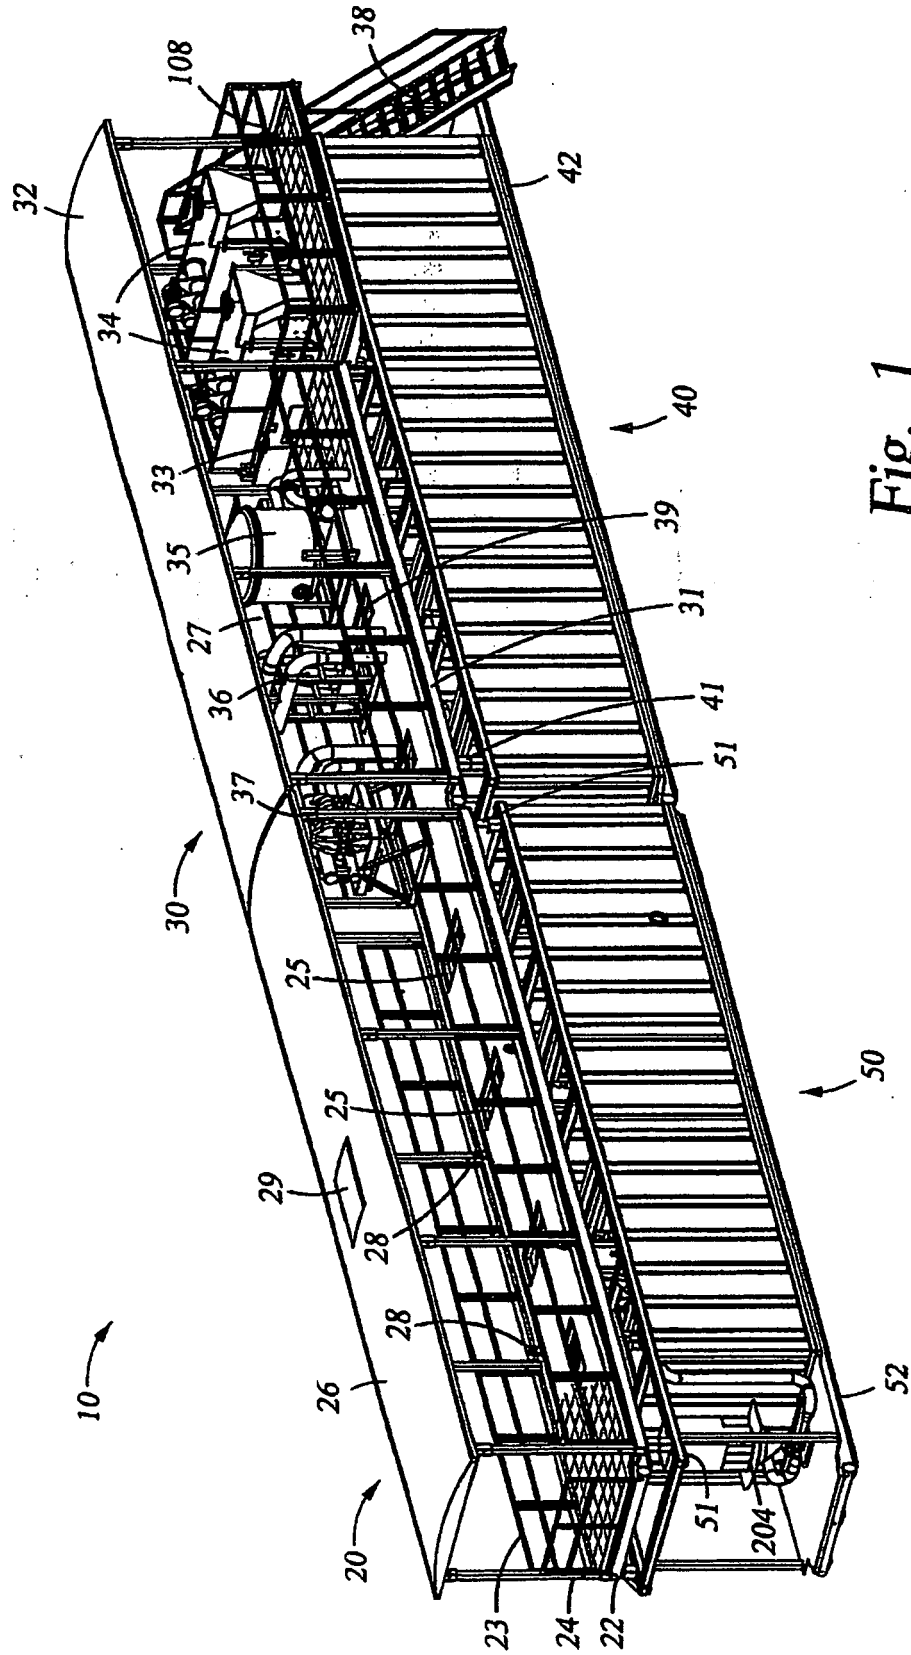


Fig. 1

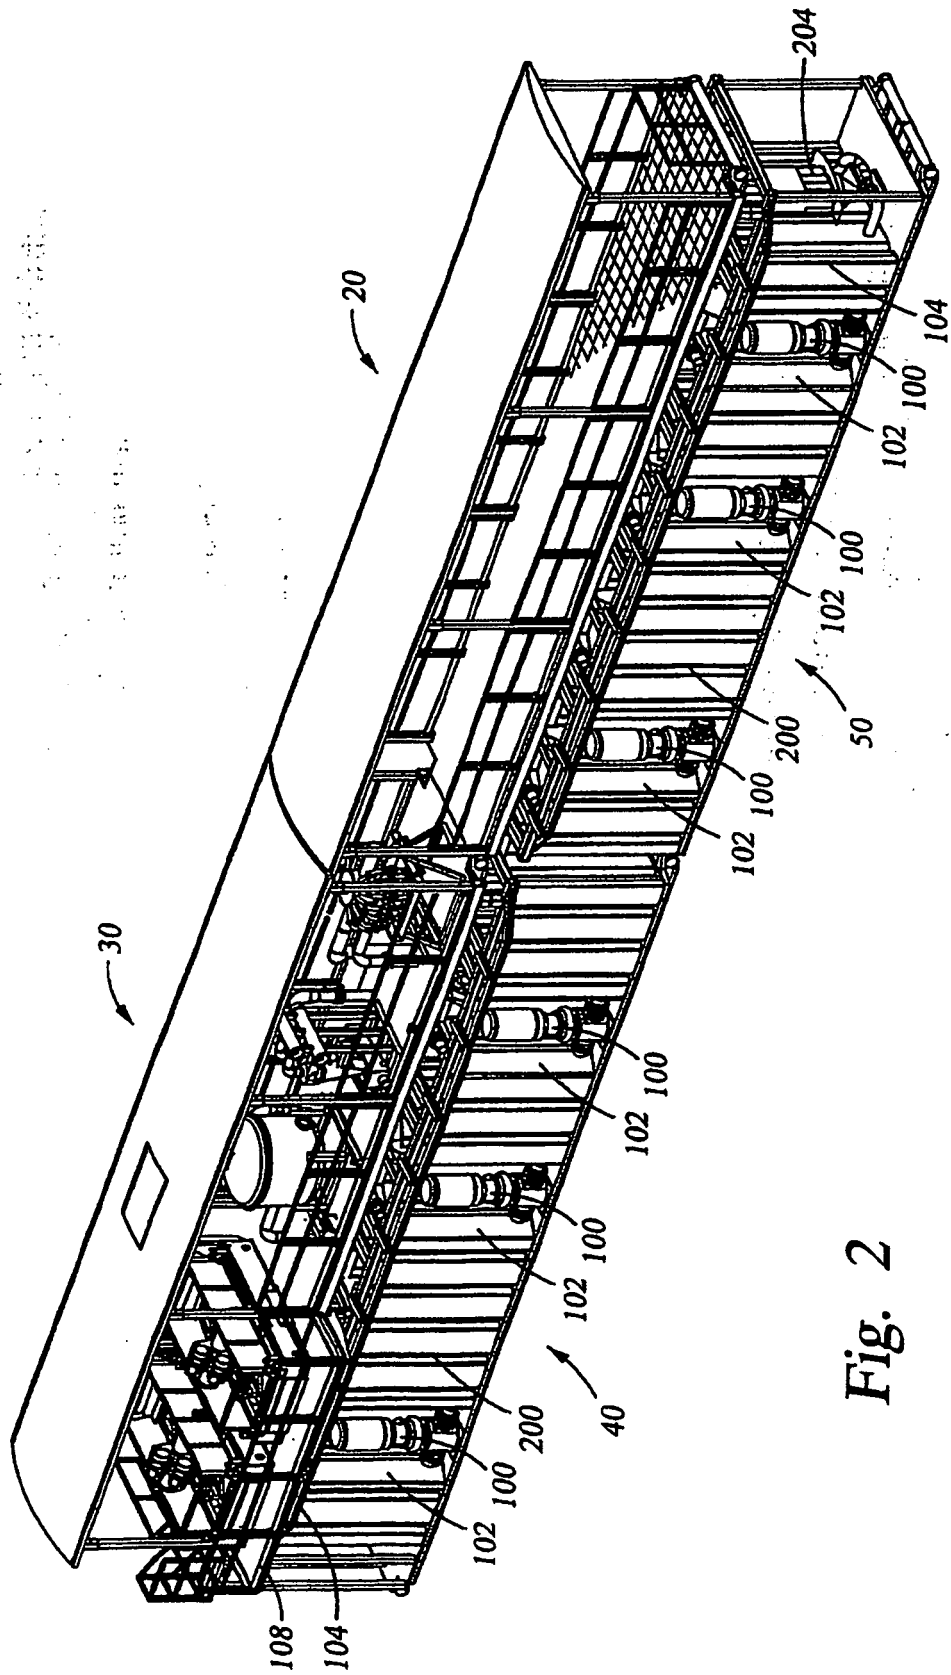


Fig. 2

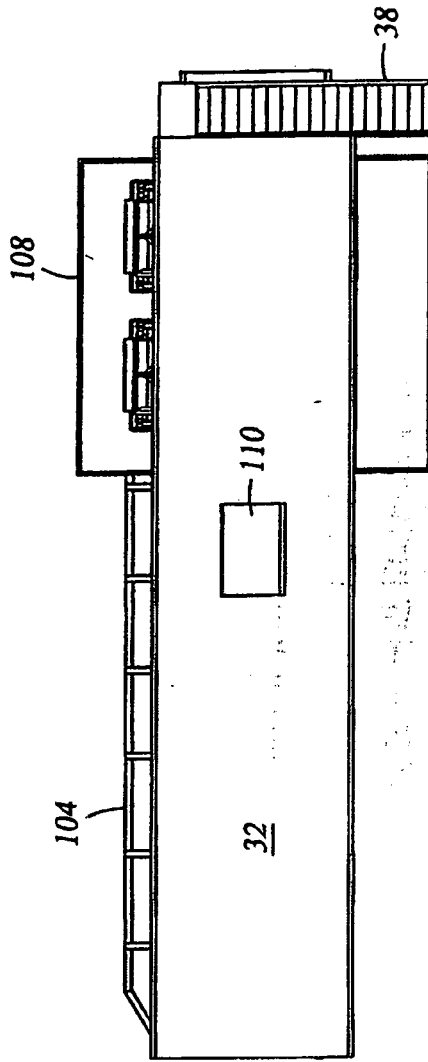


Fig. 3C

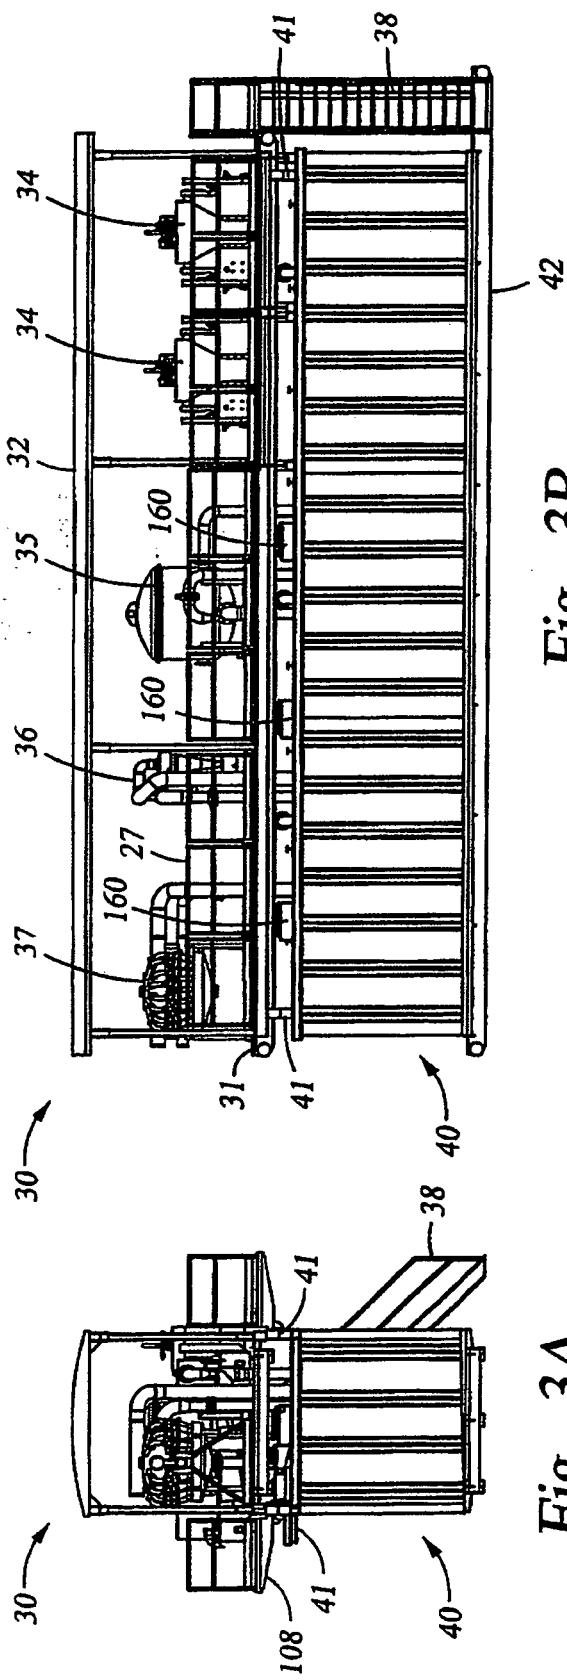


Fig. 3A

Fig. 3B

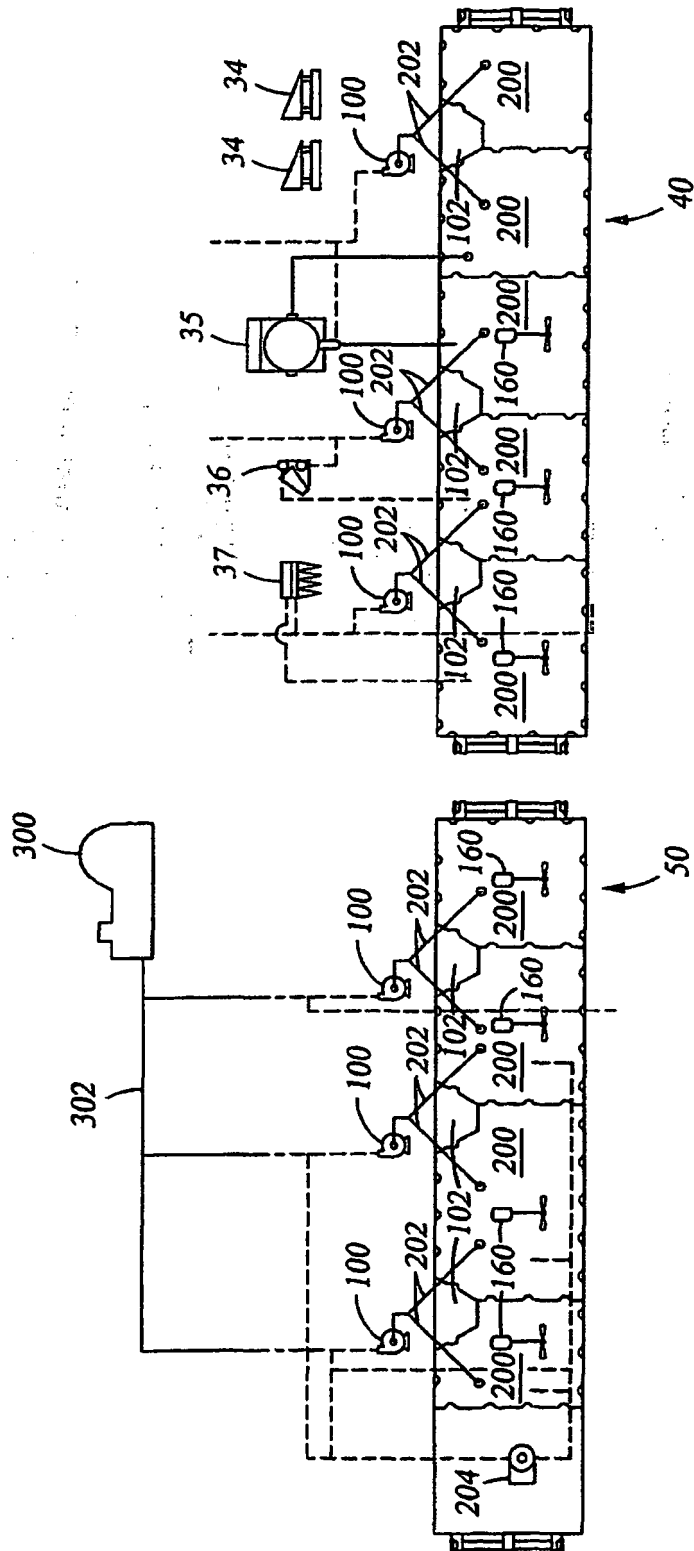


Fig. 4