



(86) Date de dépôt PCT/PCT Filing Date: 2000/07/06
(87) Date publication PCT/PCT Publication Date: 2001/01/11
(45) Date de délivrance/Issue Date: 2010/03/30
(85) Entrée phase nationale/National Entry: 2002/12/11
(86) N° demande PCT/PCT Application No.: GB 2000/002576
(87) N° publication PCT/PCT Publication No.: 2001/002057
(30) Priorité/Priority: 1999/07/06 (GB9915653.1)


(51) Cl.Int./Int.Cl. *A62C 33/04* (2006.01)

(72) Inventeur/Inventor:
BRUCE, TERRY, GB

(73) Propriétaire/Owner:
BRUCE, TERRY, GB

(74) Agent: ROGERS LAW OFFICE

(54) Titre : ETRANGLEUR DE TUYAU
(54) Title: HOSE CLAMPING DEVICE

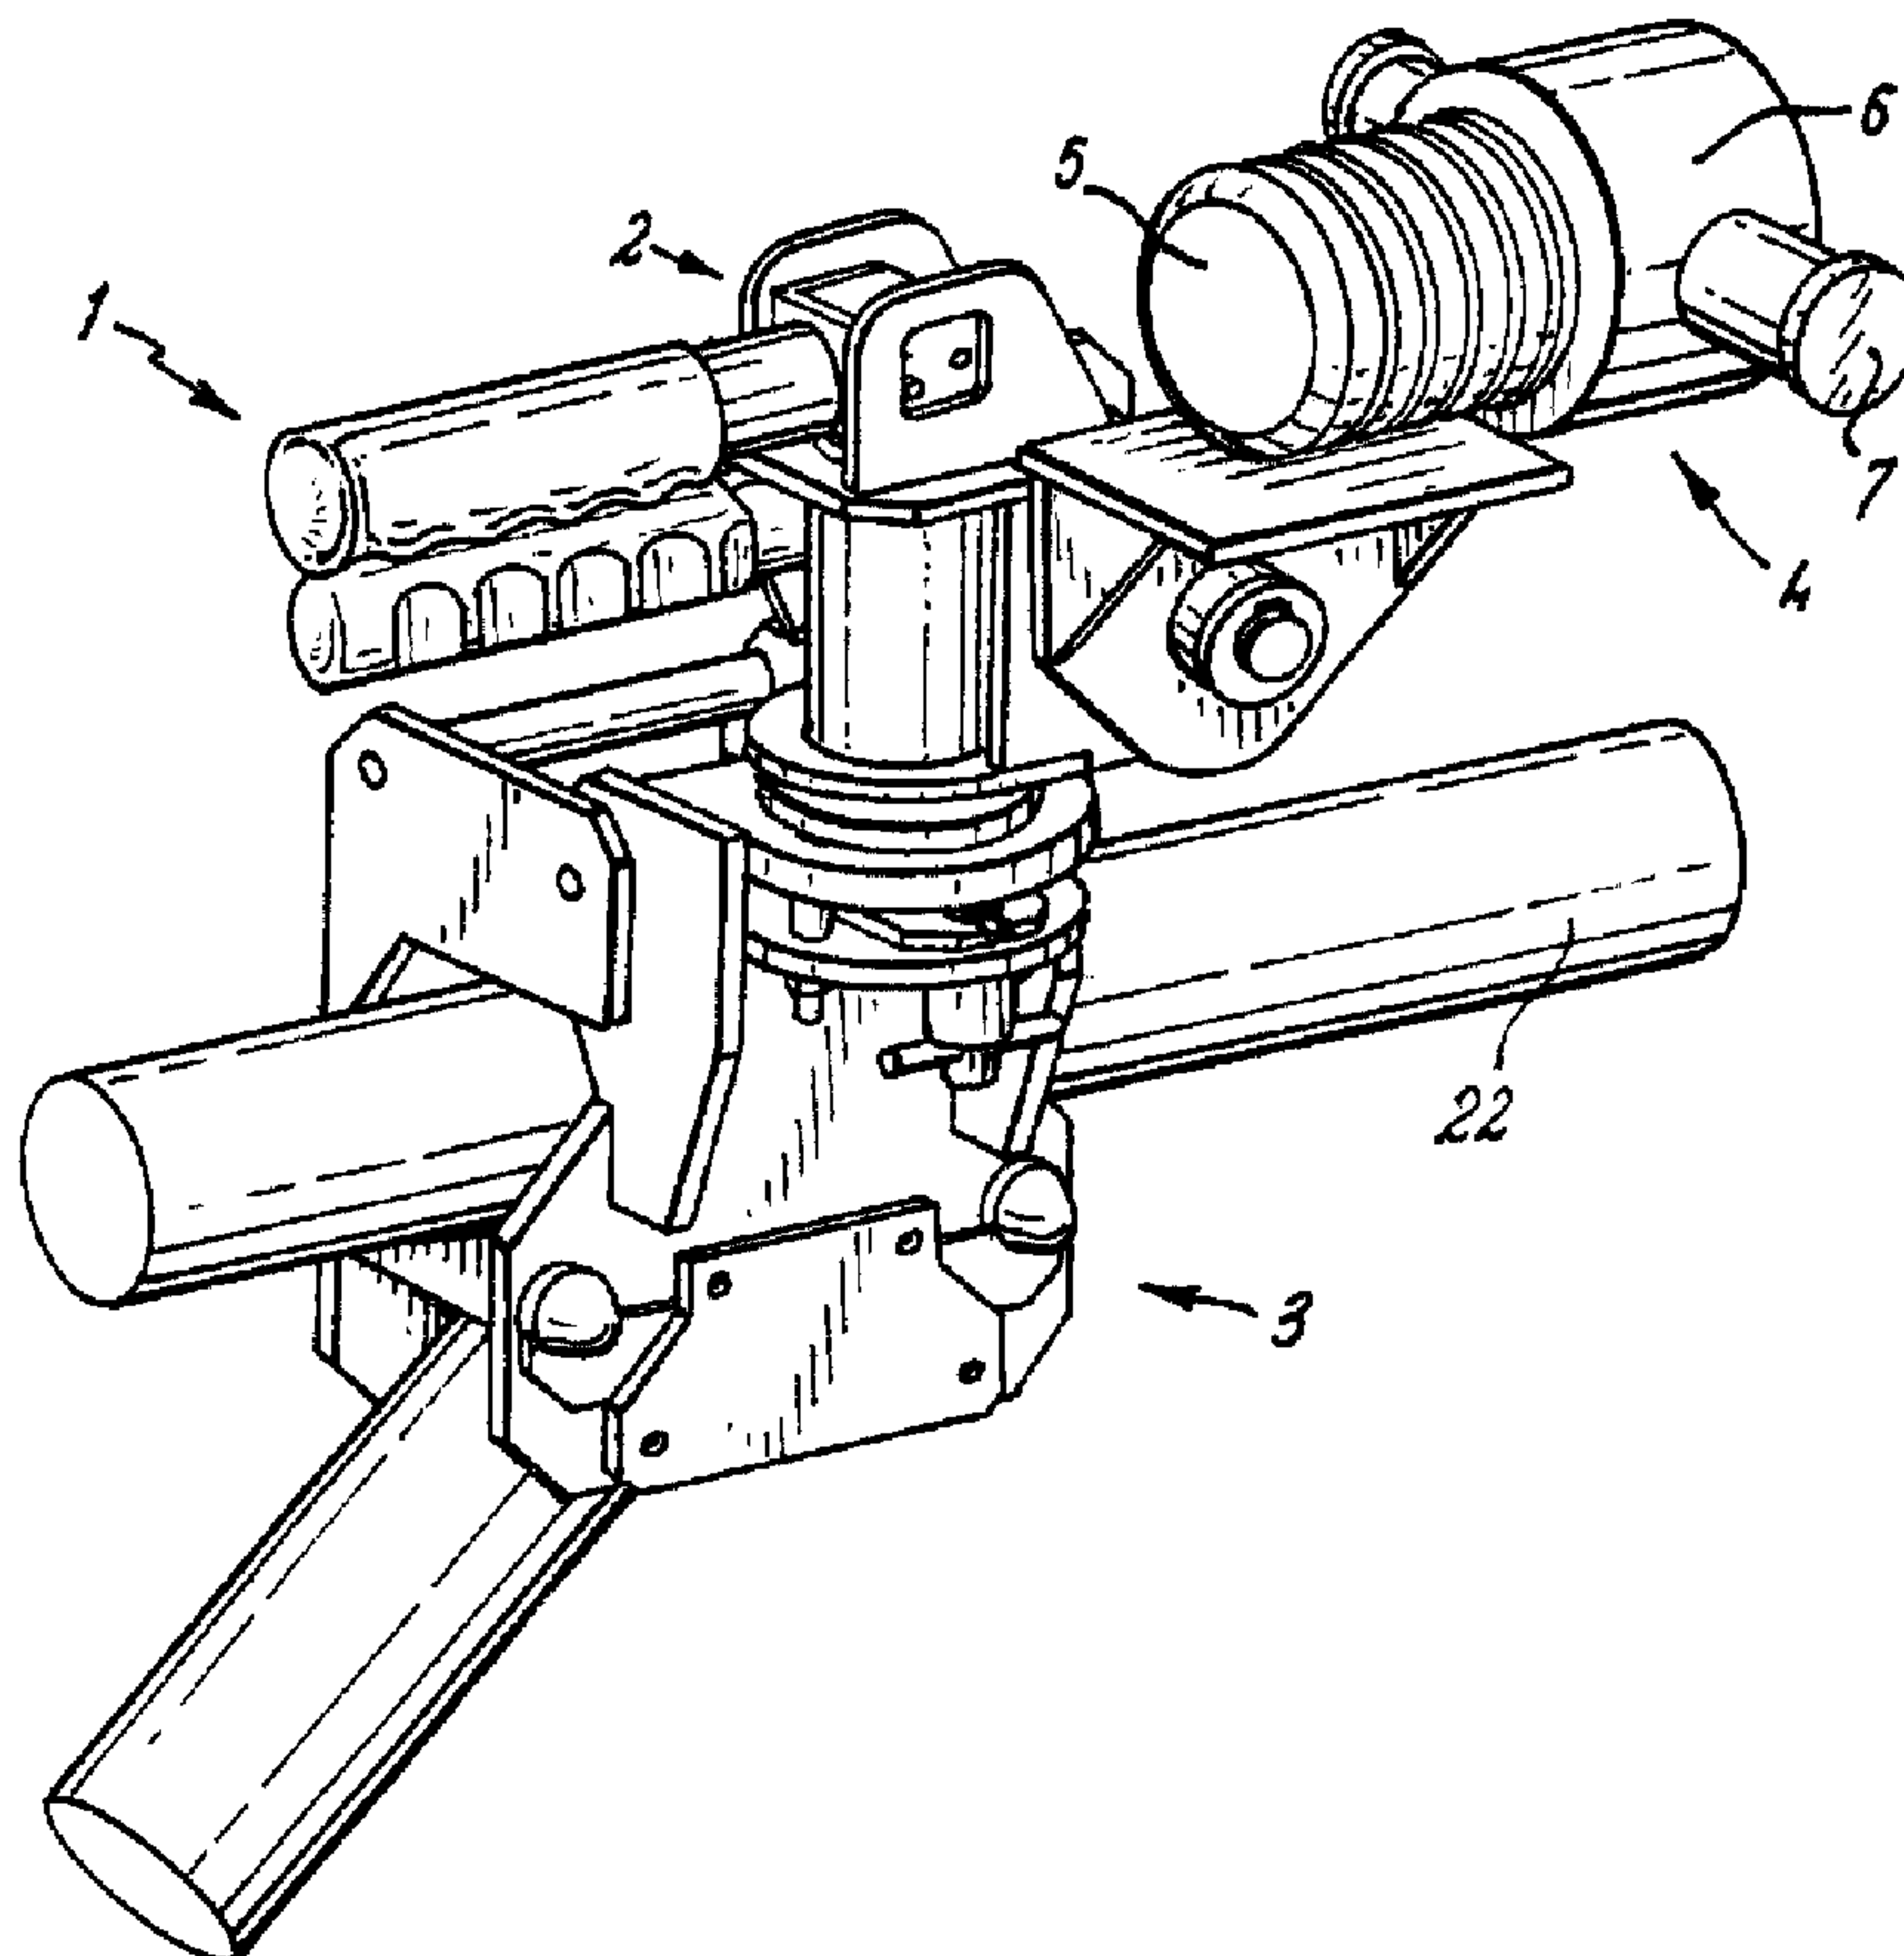

(57) Abrégé/Abstract:

A universal hose clamp (1) is described, which comprises a universal hose locating mechanism (2), a hose coupling (4) for connecting a hose to the hose clamp (1), and a securing means for securing said locating mechanism to a support structure. The

(57) **Abrégé(suite)/Abstract(continued):**

universal hose clamp (1) may be employed to secure a hose to an existing support structure (22) or to a portable independent frame (23). It is designed to be adaptable for use with a range of hose diameters and as such the universal hose clamp (1) can be employed in a wide range of emergency situations. When deployed the universal hose clamp (1) provides a means for rotating the hose coupling (4) in any direction and thereafter the hose coupling (4) can be locked in that position. Therefore, with the aid of the universal hose clamp (1) only one operator is required to control a hose device in an emergency situation.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
11 January 2001 (11.01.2001)

PCT

(10) International Publication Number
WO 01/02057 A3(51) International Patent Classification⁷: A62C 33/04

(21) International Application Number: PCT/GB00/02576

(22) International Filing Date: 6 July 2000 (06.07.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
9915653.1 6 July 1999 (06.07.1999) GB

DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant and

(72) Inventor: BRUCE, Terry [GB/GB]; 11 Buckie Walk, Bridge of Don, Aberdeen AB22 8DF (GB).

Published:


— With international search report.

(74) Agent: KENNEDYS; Patent Agency Limite, 4th Floor, Queens House, 19-29 St. Vincent Place, Glasgow G1 2DT (GB).

(88) Date of publication of the international search report:
25 May 2001(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: HOSE CLAMPING DEVICE

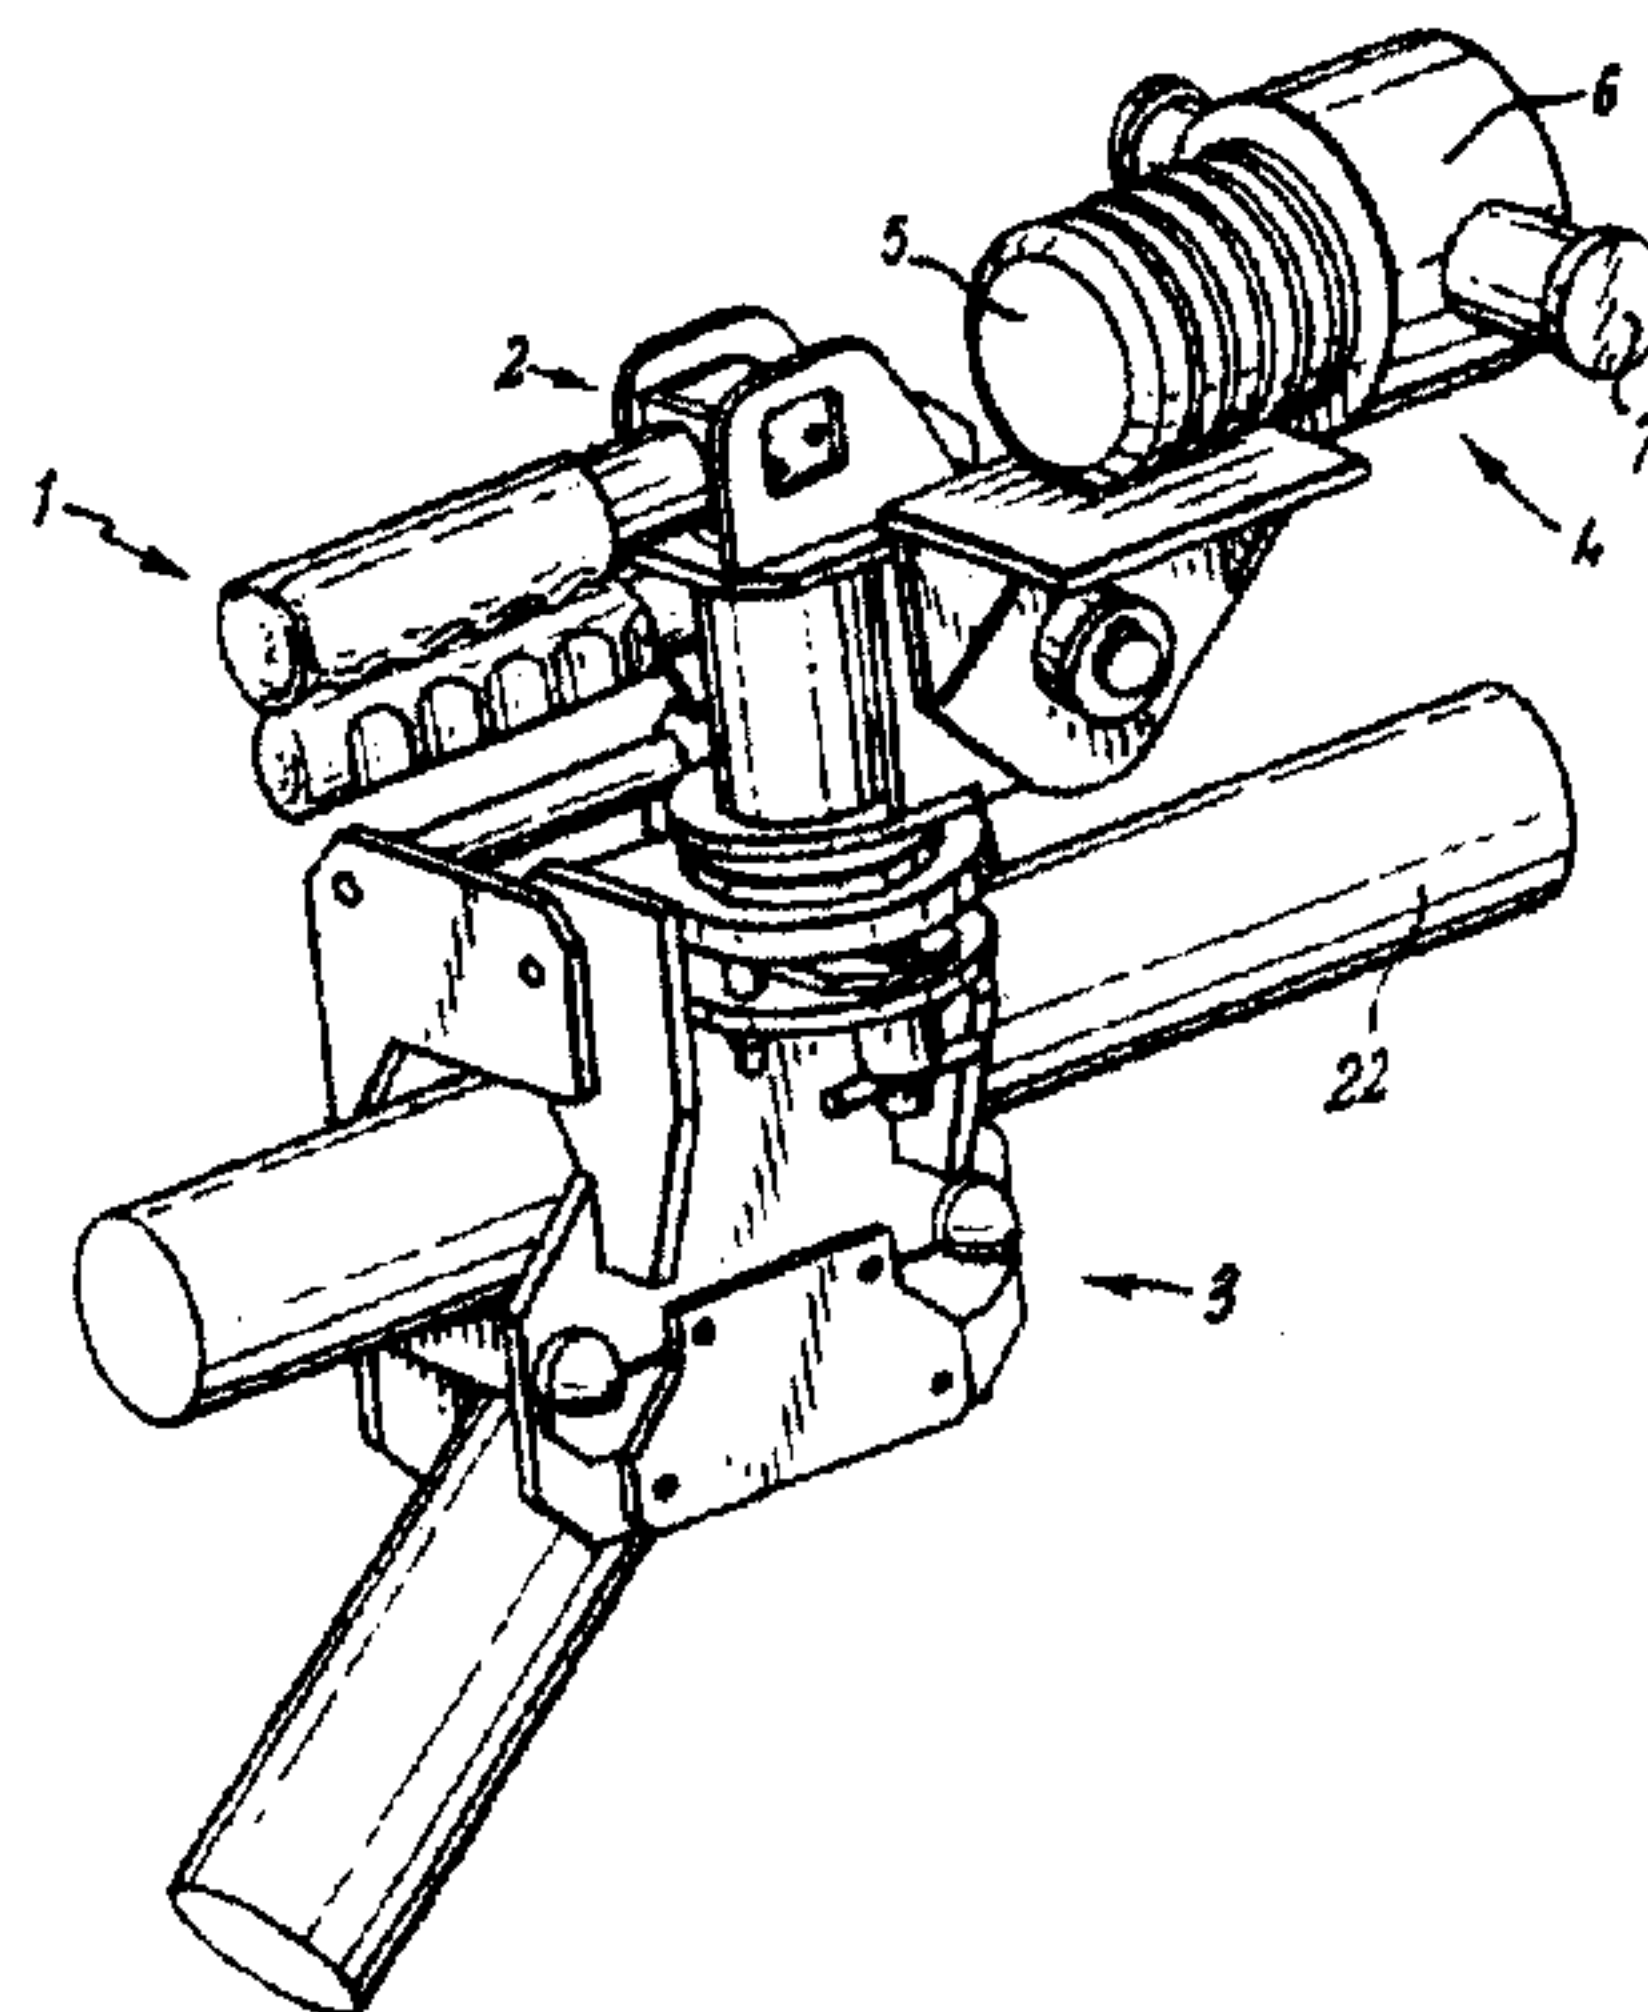

(57) Abstract: A universal hose clamp (1) is described, which comprises a universal hose locating mechanism (2), a hose coupling (4) for connecting a hose to the hose clamp (1), and a securing means for securing said locating mechanism to a support structure. The universal hose clamp (1) may be employed to secure a hose to an existing support structure (22) or to a portable independent frame (23). It is designed to be adaptable for use with a range of hose diameters and as such the universal hose clamp (1) can be employed in a wide range of emergency situations. When deployed the universal hose clamp (1) provides a means for rotating the hose coupling (4) in any direction and thereafter the hose coupling (4) can be locked in that position. Therefore, with the aid of the universal hose clamp (1) only one operator is required to control a hose device in an emergency situation.

WO 01/02057 A3

WO 01/02057

PCT/GB00/02576

1

1 Hose Clamping Device

2

3 The present invention relates to a device for securing
4 hoses, particularly those used by fire fighters.

5

6 When fighting a fire there are a number of problems to be
7 addressed in addition to extinguishing the fire, for
8 example rescuing those who are trapped or crowd control.
9 As a result the available human resources need to be
10 carefully targeted to limit/prevent the occurrence of
11 injury.

12

13 The present invention recognises that as part of fire-
14 fighting the use and control of a hose is an onerous task
15 requiring the efforts of several people. The present
16 invention attempts to mitigate this problem and allow for
17 better targeting of available resources.

18

19 It is an object of the present invention to provide a
20 device whereby a hose can be clamped to a support thus
21 allowing fire fighters to be released from such duties
22 and available for other tasks, for example rescuing those
23 who are trapped.

WO 01/02057

PCT/GB00/02576

2

1 It is a further object that such a device will be simple
2 to use and readily adapted to the dimensions of different
3 hoses.

4

5 According to the present invention there is provided a
6 universal hose clamp comprising a universal hose locating
7 mechanism, a hose coupling for connecting a hose to the
8 hose clamp, and a securing means for securing said
9 locating mechanism to a support structure.

10

11 Preferably the support structure is an existing railing,
12 pole or other similar structure.

13

14 Preferably the securing means is a universal base
15 clamping mechanism adapted for clamping onto the support
16 structure.

17

18 Alternatively the support structure is a portable
19 independent frame.

20

21 More preferably the portable independent frame is a
22 tripod.

23

24 Preferably in this second embodiment the securing means
25 is a locking mechanism adapted to lockably engage the
26 hose locating mechanism to the support structure, wherein
27 the locking mechanism comprises a male and female member
28 that are adapted to lockably engage.

29

30 Preferably the hose locating mechanism comprises a
31 central mount, two Azimuth locking mechanisms and a quick
32 release hose mount.

33

WO 01/02057

PCT/GB00/02576

3

1 More preferably the Azimuth locking mechanism contained
2 on the locating mechanism comprises a handle assembly, a
3 connection means and a stab pin.

4

5 Preferably the Azimuth locking mechanism contained on the
6 locating mechanism moves between an unlocked position
7 when the handle assembly is in a plane parallel to the
8 stab pin, and a locked position when the handle assembly
9 is rotated through 90 degrees to lie in a plane
10 perpendicular to the stab pin.

11

12 Preferably the first Azimuth locking mechanism contained
13 on the locating mechanism provides a means for rotating
14 the hose coupling about an axis in the horizontal plane.

15

16 Preferably the second Azimuth locking mechanism contained
17 on the locating mechanism provides a means for rotating
18 the hose coupling about an axis in the vertical plane.

19

20 Preferably the hose coupling comprising a gripping aid, a
21 mounting band and a securing means.

22

23 Preferably the gripping aid is cylindrical in shape.

24

25 More preferably the gripping aid is made of a flexible
26 material, namely rubber.

27

28 Preferably the mounting band is cylindrical in shape.

29

30 Preferably the securing means is a screw thread mechanism

31

32 Preferably the attachment means for the hose coupling to
33 the universal hose clamp is easily detachable.

WO 01/02057

PCT/GB00/02576

4

1 More Preferably the attachment means is by way of an
2 Azimuth locking mechanism.

3

4 In order to provide a better understanding of the
5 invention embodiments will now be described by way of
6 example only with reference to the accompanying Figures
7 in which:

8

9 Figure 1 illustrates a universal hose clamp for
10 locking and securing a hose;

11

12 Figure 2 illustrates a component of the
13 universal hose clamp, namely a universal hose
14 locating mechanism, with two Azimuth locking
15 mechanisms shown in a locked position;

16

17 Figure 3 and 4 illustrate separate perspective
18 views of a further component of the universal
19 hose clamp, namely a universal base clamping
20 mechanism shown clamped to a Y-shaped handrail;

21

22 Figure 5 illustrates the universal hose clamp
23 of Figure 1 one of the universal Azimuth
24 locking mechanisms for controlling the hose
25 clamp rotation about the vertical axis in the
26 unlocked position; and

27

28 Figure 6 illustrates a tripod on which the
29 universal hose clamp of Figure 1 can be
30 mounted;

31

32

WO 01/02057

PCT/GB00/02576

5

1 Referring initially to Figure 1, a universal hose clamp
2 is generally depicted at 1 comprising a universal hose
3 locating mechanism 2, a universal base clamping mechanism
4 3 and a hose coupling 4.

5

6 The hose coupling 4 comprises a cylindrical gripping aid
7 5, a cylindrical mounting band 6 and a screw thread
8 mechanism 7.

9

10 Figure 2 illustrates further detail of the universal hose
11 locating mechanism 2 in the absence of the base clamping
12 mechanism 3 and the hose coupling 4. The hose locating
13 mechanism 2 comprises a central mount 8, two Azimuth
14 locking mechanisms 9 and 10 and a quick release hose
15 mount 11.

16

17 The two Azimuth locking mechanisms 9 and 10 further
18 comprise a handle assembly 12, a connection means 13 and
19 a stab pin 14 or 15. The connection means 13 provides
20 the activation mechanism for moving the Azimuth locking
21 mechanisms 9 and 10 between their unlocked and locked
22 positions. In Figure 2 both locking mechanisms 9 and 10
23 are in their locked positions. When unlocked the first
24 Azimuth locking mechanism 9 allows rotation of the hose
25 mount 11, and hence the hose coupling 4, about a
26 horizontal axis while the second Azimuth locking
27 mechanism 10, when unlocked, allows rotation about a
28 vertical axis. It should be noted at this point that
29 these two mechanisms lock independently of each other
30 such that one may be in the locked position while the
31 other is in the unlocked position. The stab pins 14 and
32 15 provide male members for the Azimuth locking
33 mechanisms 9 and 10, respectively.

1

2 Figures 3 and 4 present further detail of the universal
3 base clamping mechanism 3 in the absence of the hose
4 locating mechanism 2. The base clamping mechanism 3
5 comprises a central frame 16, a rail clamp 17 and a
6 female 18 for the Azimuth locking mechanism 10. The rail
7 clamp 17 further comprises a swing over lock 19, a rail
8 clamp tightening assembly 20, and two threaded locating
9 rails 21.

10

11 The combination of the hose locating mechanism 2 and the
12 base clamping mechanism 3 is achieved by inserting the
13 stab pin 15 in the female locking component 18 with the
14 handle assembly 12 in the unlocked position, as in Figure
15 5. This unlocked position corresponds to the case when
16 the handle assembly 12 is in a plane parallel to the stab
17 pin 15. The locked position is achieved by rotating the
18 handle assembly 12 through 90 degrees such that the
19 handle assembly 12 now lies in the plane perpendicular to
20 the stab pin 15, as in Figure 1.

21

22 To employ the universal hose clamp 1, the base clamping
23 mechanism 3 is attached to a railing, pole or other
24 similarly reinforced structure. As shown in Figure 1,
25 the desired structure to which the hose clamp 1 can be
26 attached may take the form of a Y-shaped rail 22.
27 Initially the swing over lock 19 is opened by unscrewing
28 one of the threaded locating rails 21. This allows the
29 rail clamp 17 to be placed in situ around the hand rail
30 22. With the hand rail 22 in place above the threaded
31 locating rails 21, the swing over lock 19 is then closed
32 and fastened. The base clamping mechanism 3 is then

WO 01/02057

PCT/GB00/02576

7

1 secured in place by tightening of the rail clamp 17 by
2 use of the rail clamp tightening assembly 20.

3

4 The second stage is to attach the hose locating mechanism
5 2 to the base clamping mechanism 3 via the vertical
6 Azimuth locking mechanism 10 as described above.
7 Thereafter the hose (not shown) is inserted within the
8 cylindrical hose gripping aid 5 which is then tightened
9 in the cylindrical mounting band 6 that is attached to
10 the quick release hose mount 11. The tightening of the
11 cylindrical hose gripping aid 5 in the cylindrical
12 mounting band 6 is achieved via the screw thread
13 mechanism 7. With the horizontal Azimuth locking
14 mechanism 9 in the unlocked position the hose coupling 4
15 is mounted on the horizontal stab pin 14.

16

17 At this stage the hose is secured within the hose clamp 1
18 and can be deployed at full pressure by just one person.
19 This has the obvious advantage of releasing manpower to
20 carry out other important duties. By simply unlocking
21 either of Azimuth locking mechanisms, 9 and 10, the hose
22 can be rotated to provide universal cover over 4π
23 steradians.

24

25 Mobility for the hose coupling 4 may be enhanced by its
26 incorporation with a tripod system 23, as illustrated in
27 Figure 6. This tripod 23 comprises a female member 24
28 for use in an Azimuth locking mechanism 10, adjustable
29 legs 25 and a cross brace 26 to provide additional
30 strength. It should be noted that the aforementioned
31 female 24 is of a similar design to the female member 18
32 used in the previously described embodiment. Therefore,
33 there is no requirement for the modification of the hose

WO 01/02057

PCT/GB00/02576

8

1 locating mechanism 2. With this embodiment the tripod is
2 assembled at the required location. The hose (not shown)
3 is then mounted in the hose locating mechanism 2 as
4 previously described. The vertical stab pin 15 is then
5 inserted in the female of the tripod 18 and locked as
6 required by the vertical Azimuth locking mechanism 10.

7

8 The use of alternative hose diameters is determined by
9 the nature of the emergency. Thus the hose coupling 4 is
10 not limited to use with one particular hose size.
11 Selection of a hose can be accommodated within a
12 particular cylindrical gripping aid 5 by the adjustment
13 of the screw thread mechanism 7. If the hose diameter is
14 significantly different then the quick release hose mount
15 11 allows a second hose clamp 4 of the desired dimensions
16 to be quickly mounted on the hose locating mechanism 2.

17

18 An advantage of the present invention is that there is
19 provided a universal hose clamp which can be used with
20 known types of hose and whose parts are readily
21 interchanged to meet the requirements of different
22 emergency situations.

23

24 A further advantage of the present invention is that
25 there is provided means which will reduce the manpower
26 required to control a hose, and increase the numbers
27 available to help those who are part of the emergency
28 situation.

29

30 A further advantage of the invention is that the
31 individual securing means are able to rotate such that
32 the hose can be used in any direction thus allowing the
33 changing needs of an emergency situation to be met.

WO 01/02057

PCT/GB00/02576

9

1

2 In an alternative embodiment the clamp may be provided
3 with means to enable control from a remote source. For
4 example an electronic receiver and control electronics
5 could be mounted within the central mount 8 of the
6 universal hose locating mechanism 2. This would allow
7 the direction of the hose coupling 4 to be altered
8 without the requirement for direct human contact.

9

10 Further modifications and improvements may be added
11 without departing from the scope of the invention herein
12 intended.

Claims:

1. A universal hose clamp comprising in combination:
a universal hose locating mechanism including a hose mount located at one end of a mounting pin to provide free rotational movement about the longitudinal axis of the pin, to control elevation of the hose mount,

a first locking mechanism movable between an unlocked position and a locked position to control rotational movement of the hose mount, the first locking mechanism comprising a handle assembly which is rotatable relative to the pin to move the first locking mechanism between the unlocked and locked positions;

a securing means for securing said locating mechanism to a support structure, wherein the universal hose locating mechanism and the securing means are releasably attached one to the other; and

a hose coupling mounted to the hose mount, said hose coupling being adapted to connect a hose to the universal hose locating mechanism, such that with the first locking mechanism in the unlocked position, the hose coupling has unlimited rotational movement about said axis.

2. A universal hose clamp as claimed in Claim 1, wherein the universal hose locating mechanism further comprises a second locking mechanism movable between an unlocked and a locked position, the second locking mechanism comprising a second handle assembly and a swivel pin having a swivel pin axis lying in a transverse plane that is substantially

perpendicular to the longitudinal axis of the mounting pin, wherein the second handle assembly is rotatable relative to the swivel pin to move the second locking mechanism (10) between the unlocked and locked positions such that with the second locking mechanism in the unlocked position, the hose coupling has unlimited rotational movement about the swivel pin axis.

3. A universal hose clamp as claimed in Claim 2, wherein the securing means comprises a female member adapted to receive an end of the swivel pin; and a base clamping mechanism suitable for clamping the universal hose clamp to a support structure such as a railing or pole to be found at the intended site of use for the hose clamp.

4. A universal hose clamp comprising in combination:
a universal hose locating mechanism including a hose mount located at one end of a mounting pin to provide free rotational movement about the longitudinal axis of the mounting pin, to control elevation of the hose mount,

a first locking mechanism movable between an unlocked position and a locked position to control rotational movement of the hose mount, the first locking mechanism comprising a handle assembly which is rotatable relative to the mounting pin to move the first locking mechanism between the unlocked and locked positions;

a hose coupling mounted to the hose mount, said hose coupling being adapted to connect a hose to the universal hose locating mechanism, such that with the first locking

mechanism in the unlocked position, the hose coupling has unlimited rotational movement about said axis;

a second locking mechanism movable between an unlocked and a locked position, the second locking mechanism comprising a handle assembly and a swivel pin having a swivel pin axis lying in a transverse plane that is substantially perpendicular to the longitudinal axis of the mounting pin, wherein the handle assembly is rotatable relative to the swivel pin to move the second locking mechanism between the unlocked and locked positions such that with the second locking mechanism in the unlocked position, the hose coupling has unlimited rotational movement about the swivel pin axis; and

a portable independent frame comprising a female member, said female member being adapted to releasably receive an end of the swivel pin and to permit the hose locating mechanism to be turned upon the frame.

5. A universal hose clamp as claimed in Claim 4, wherein the portable independent frame is a tripod.

6. A universal hose clamp, as claimed in Claim 3, wherein when the second locking mechanism is in the locked position the female member lockably engages with the swivel pin.

7. A universal hose clamp, as claimed in Claim 4 or Claim 5, wherein when the second locking mechanism is in the locked position the female member lockably engages with the swivel pin.

8. A universal hose clamp, as claimed in any one of Claims 1 to 7, wherein the hose mount has a quick release that comprises a hose mount female member adapted for receiving an end of the mounting pin whereby the hose mount is removable from the universal hose locating mechanism when the first locking mechanism is in the unlocked position.

9. A universal hose clamp as claimed in Claim 8, wherein when the first locking mechanism is in the locked position the hose mount female member lockably engages with the mounting pin.



10. A universal hose clamp as claimed in any one of Claims 1 to 9, wherein the hose coupling further comprises a gripping aid, a mounting band and a hose securing means.

11. A universal hose clamp as claimed in Claim 10, wherein the gripping aid is made of a flexible material, namely rubber.



12. A universal hose clamp as claimed in Claim 10 or 11, wherein the gripping aid is cylindrical in shape.


13. A universal hose clamp as claimed in any one of Claims 10 to 12, wherein the mounting band is cylindrical in shape.

14. A universal hose clamp as claimed in any of Claims 10 to 13, wherein the hose securing means is a screw thread mechanism.

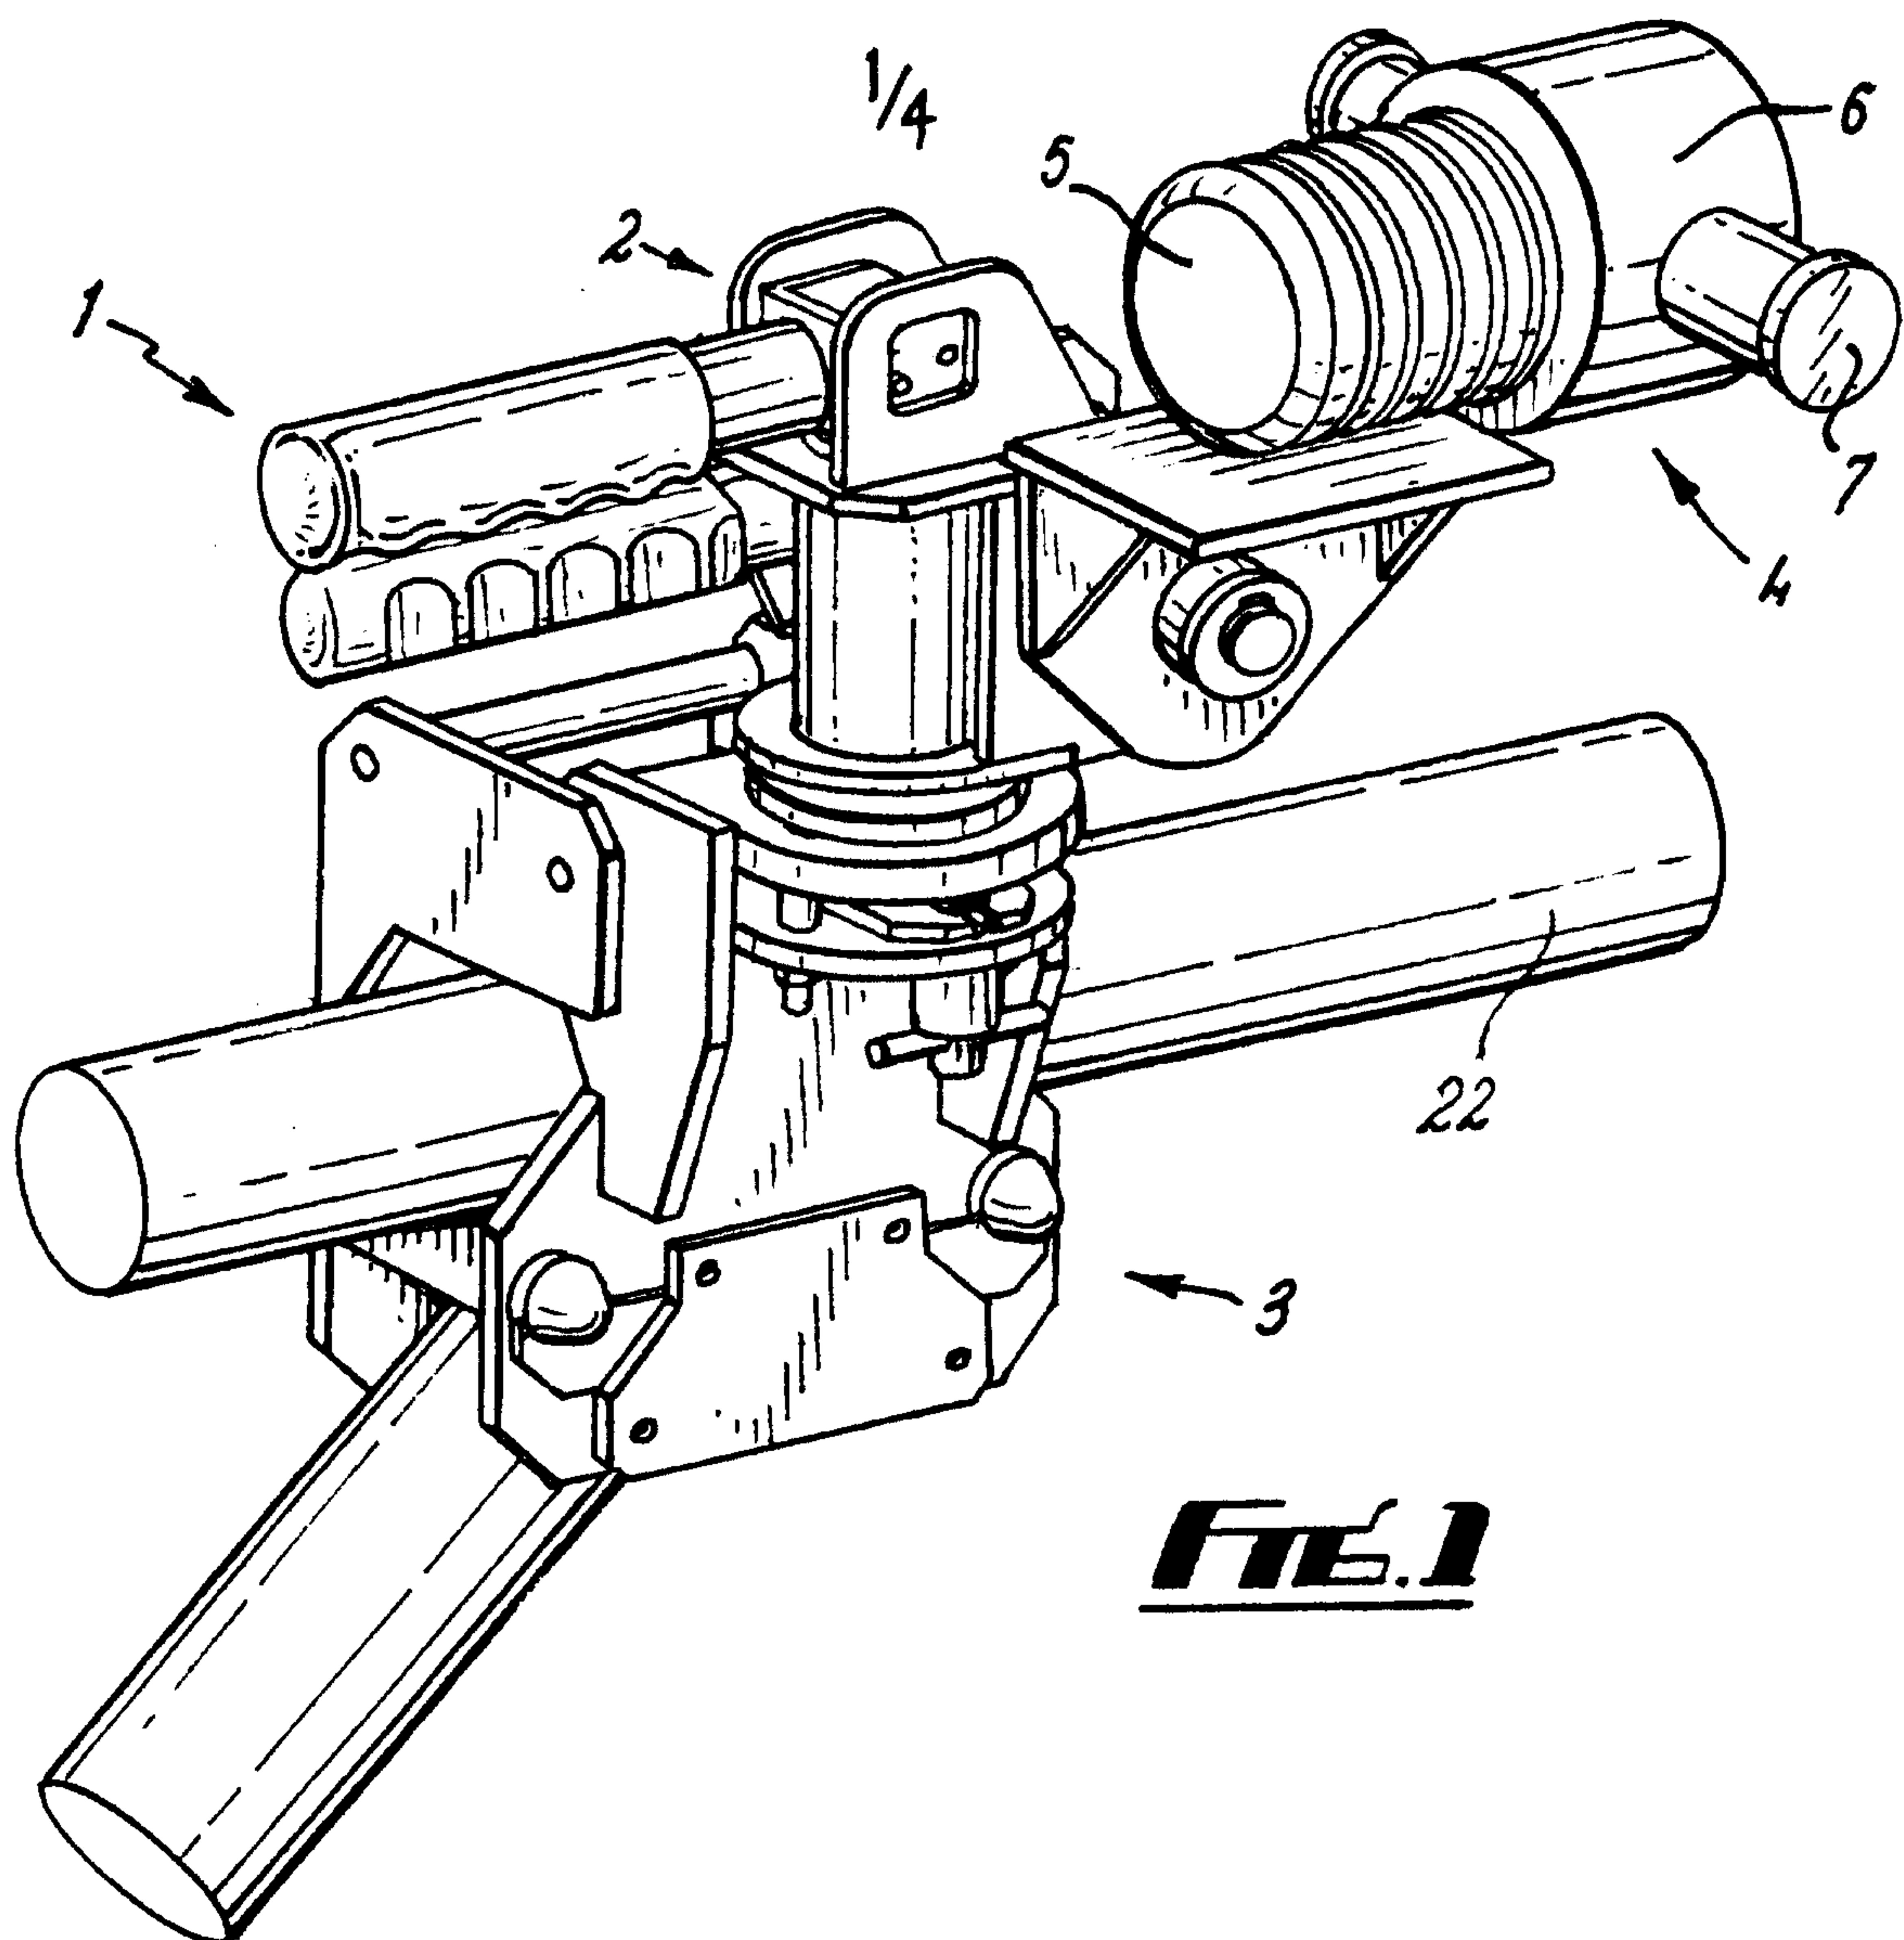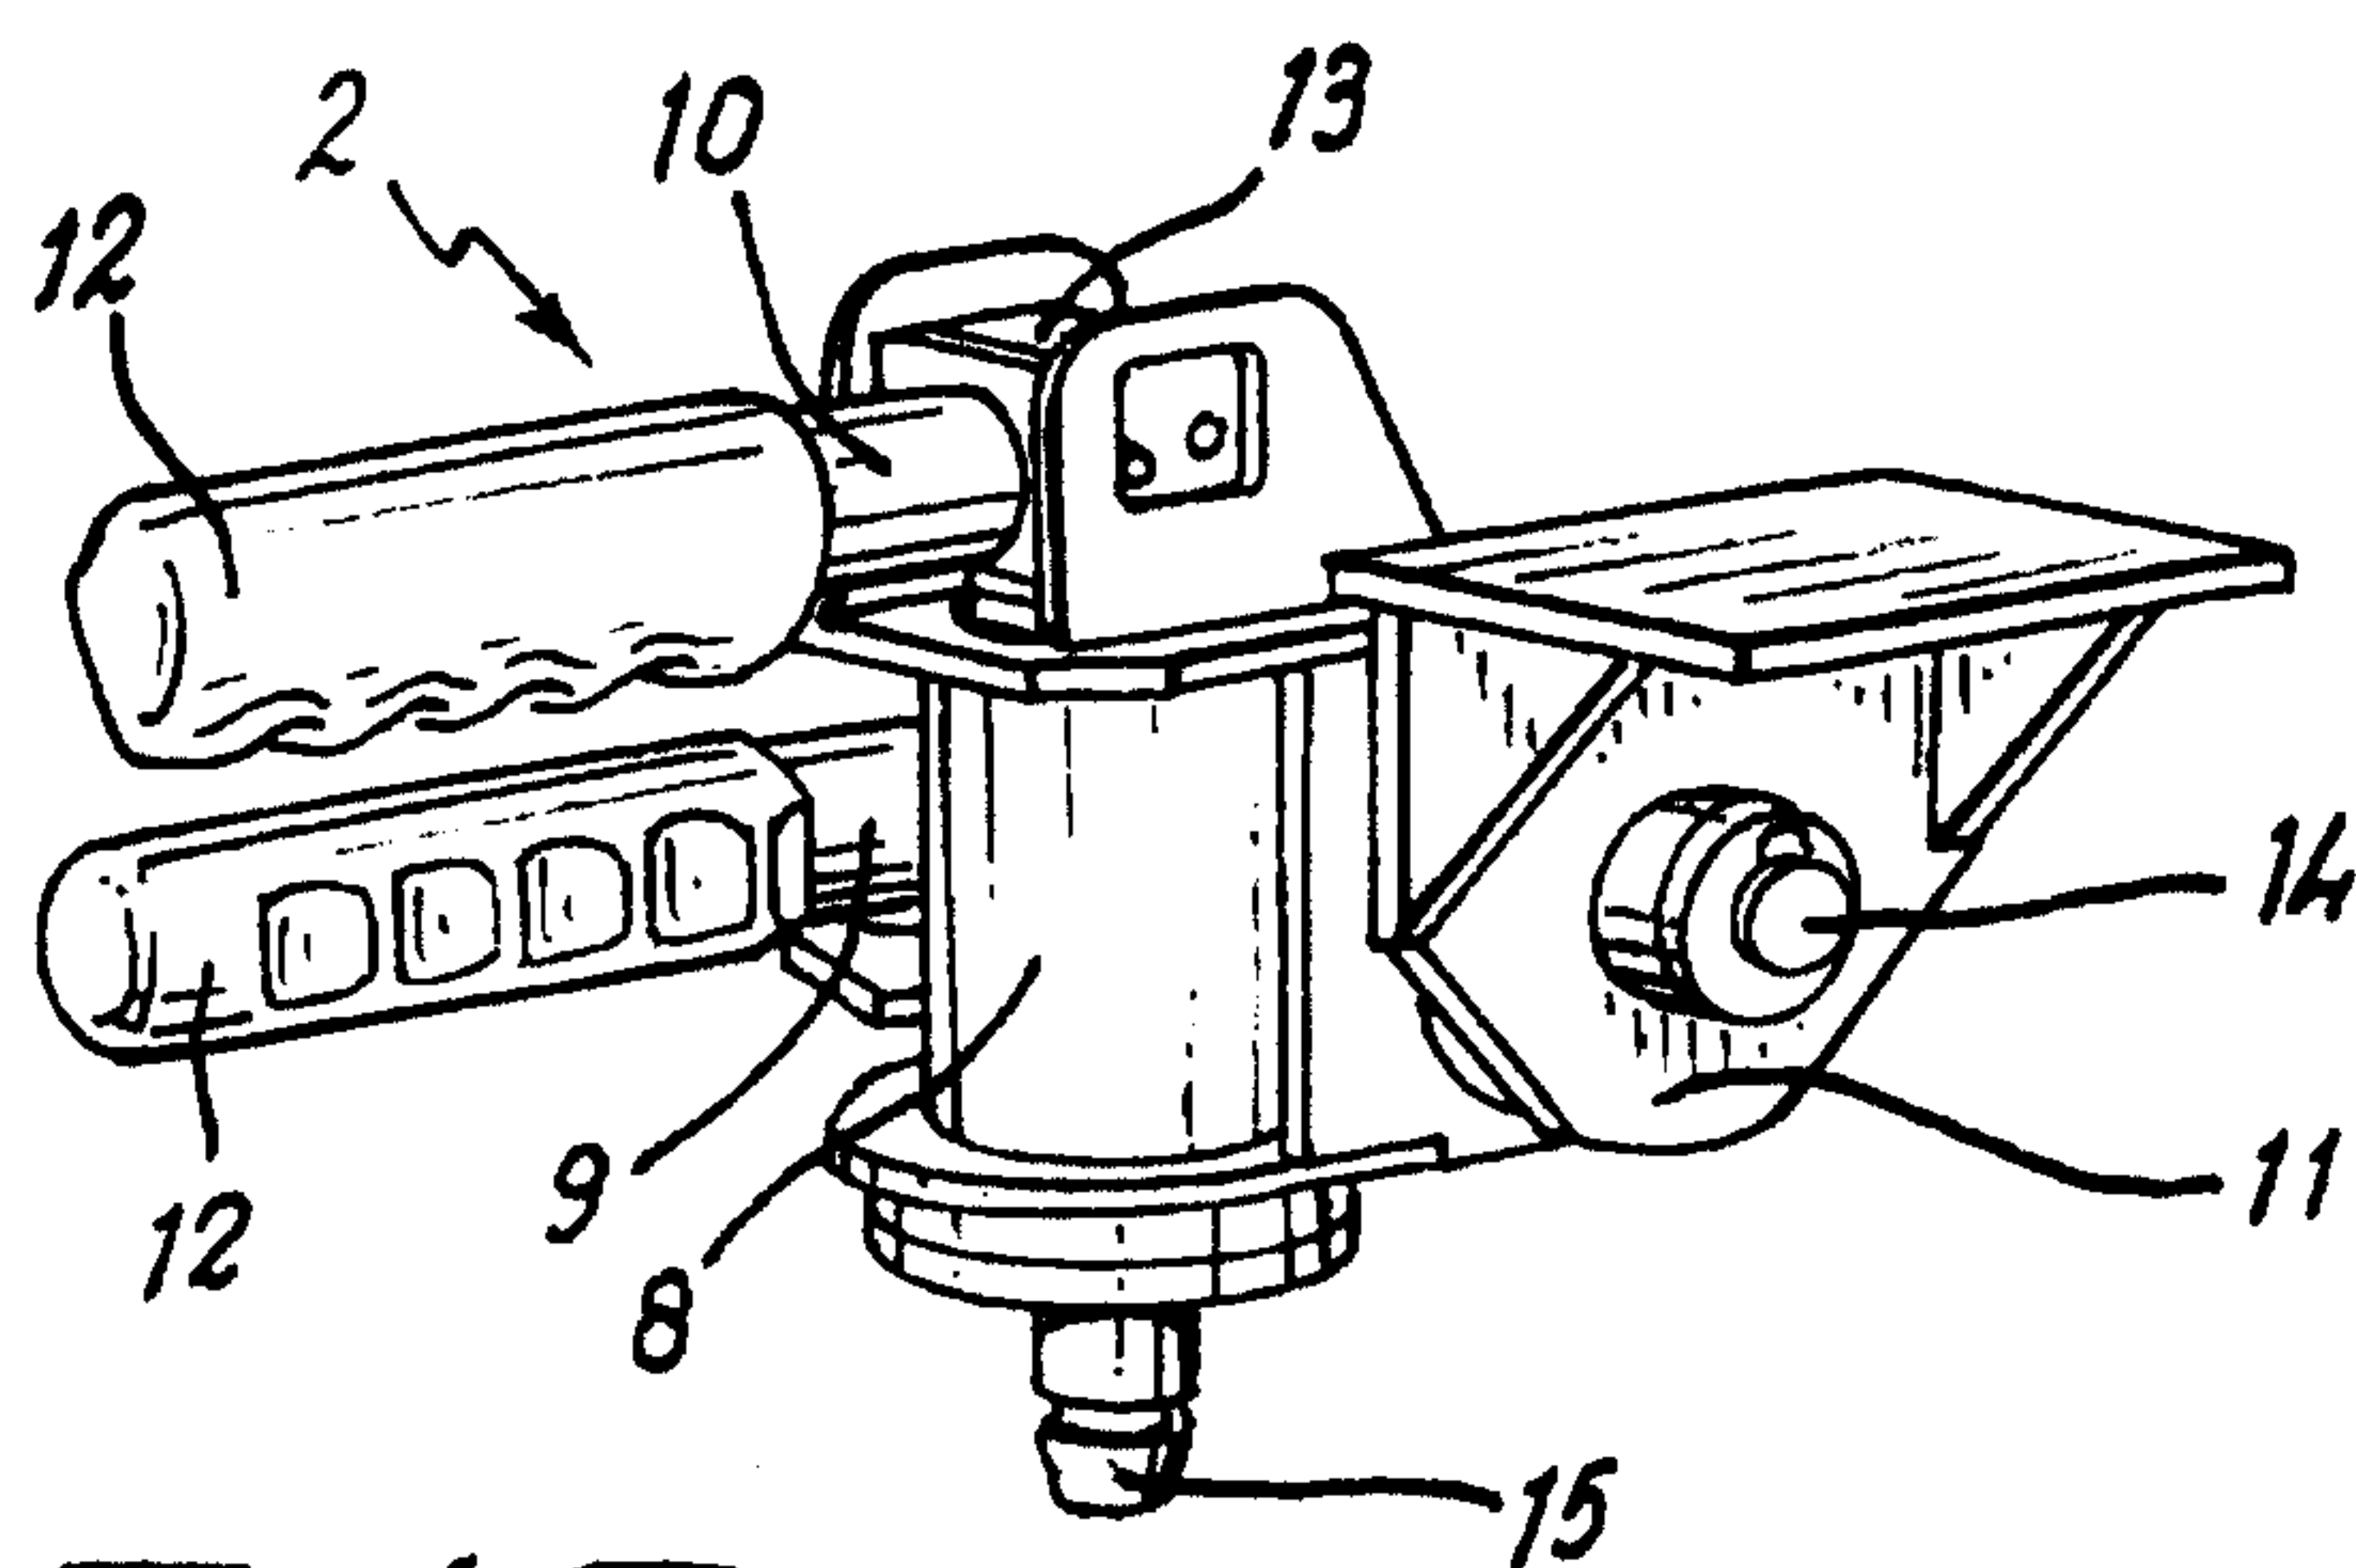**FIG. 1****FIG. 2**

SUBSTITUTE SHEET (RULE 26)

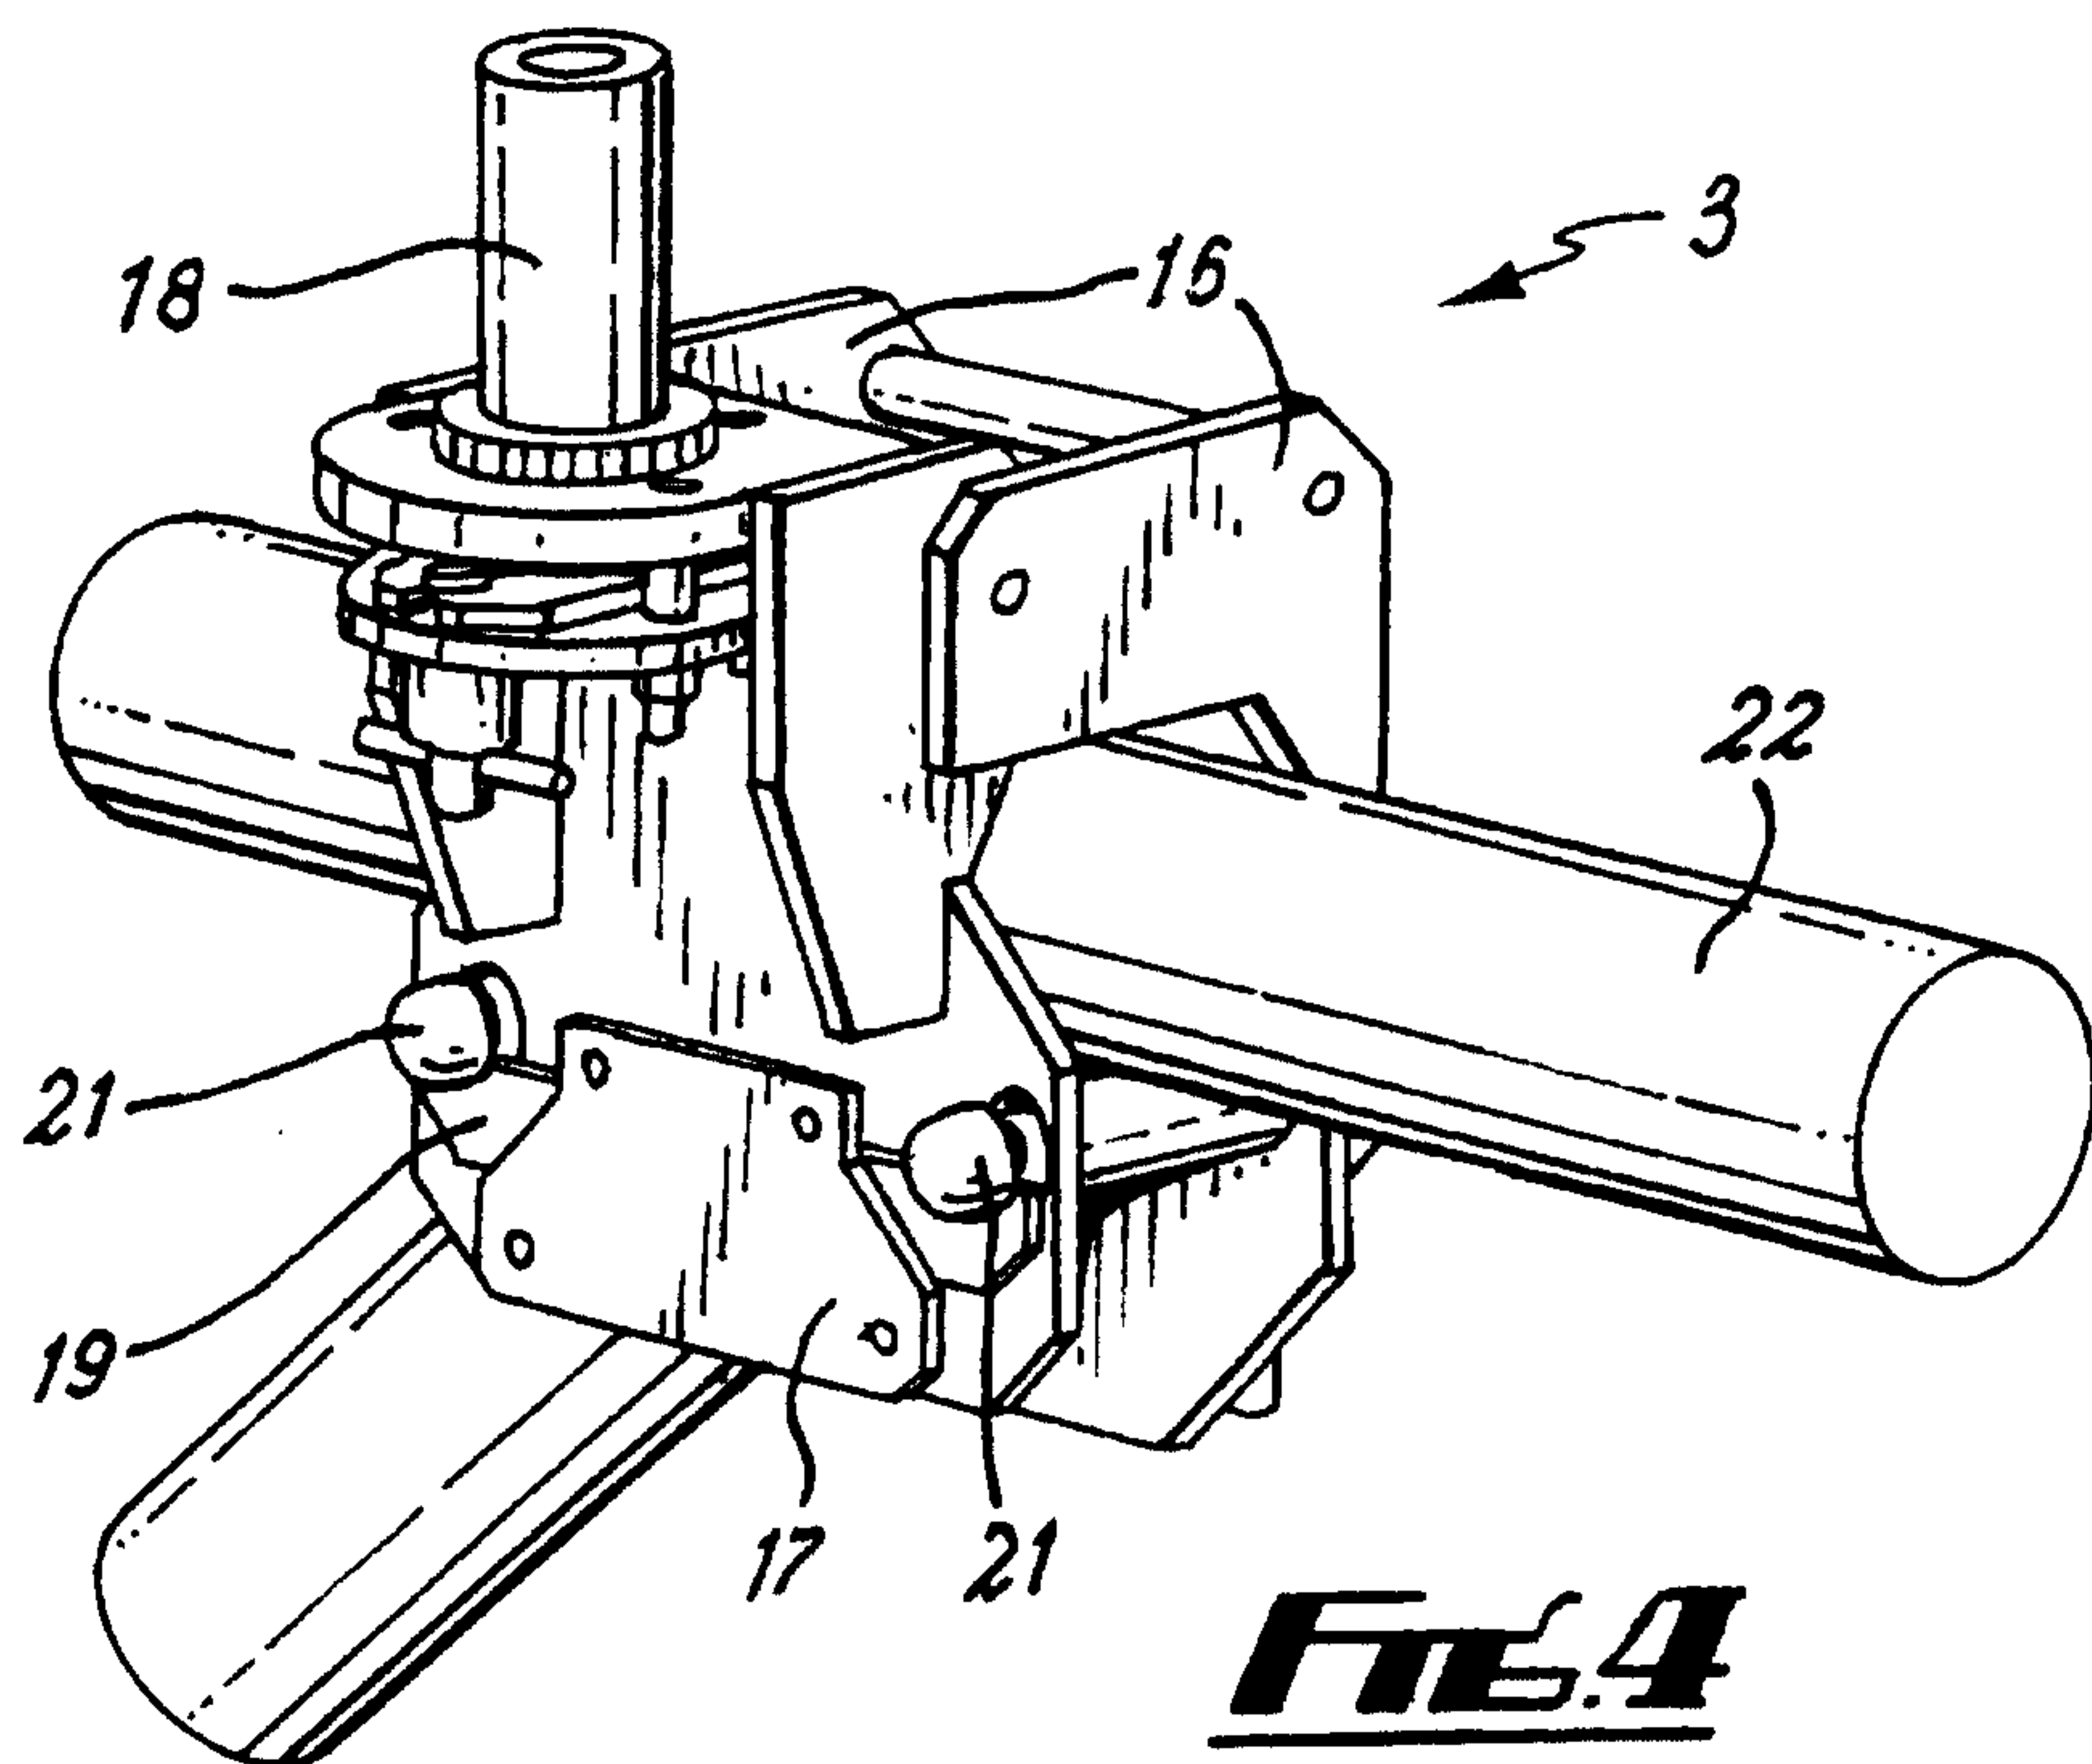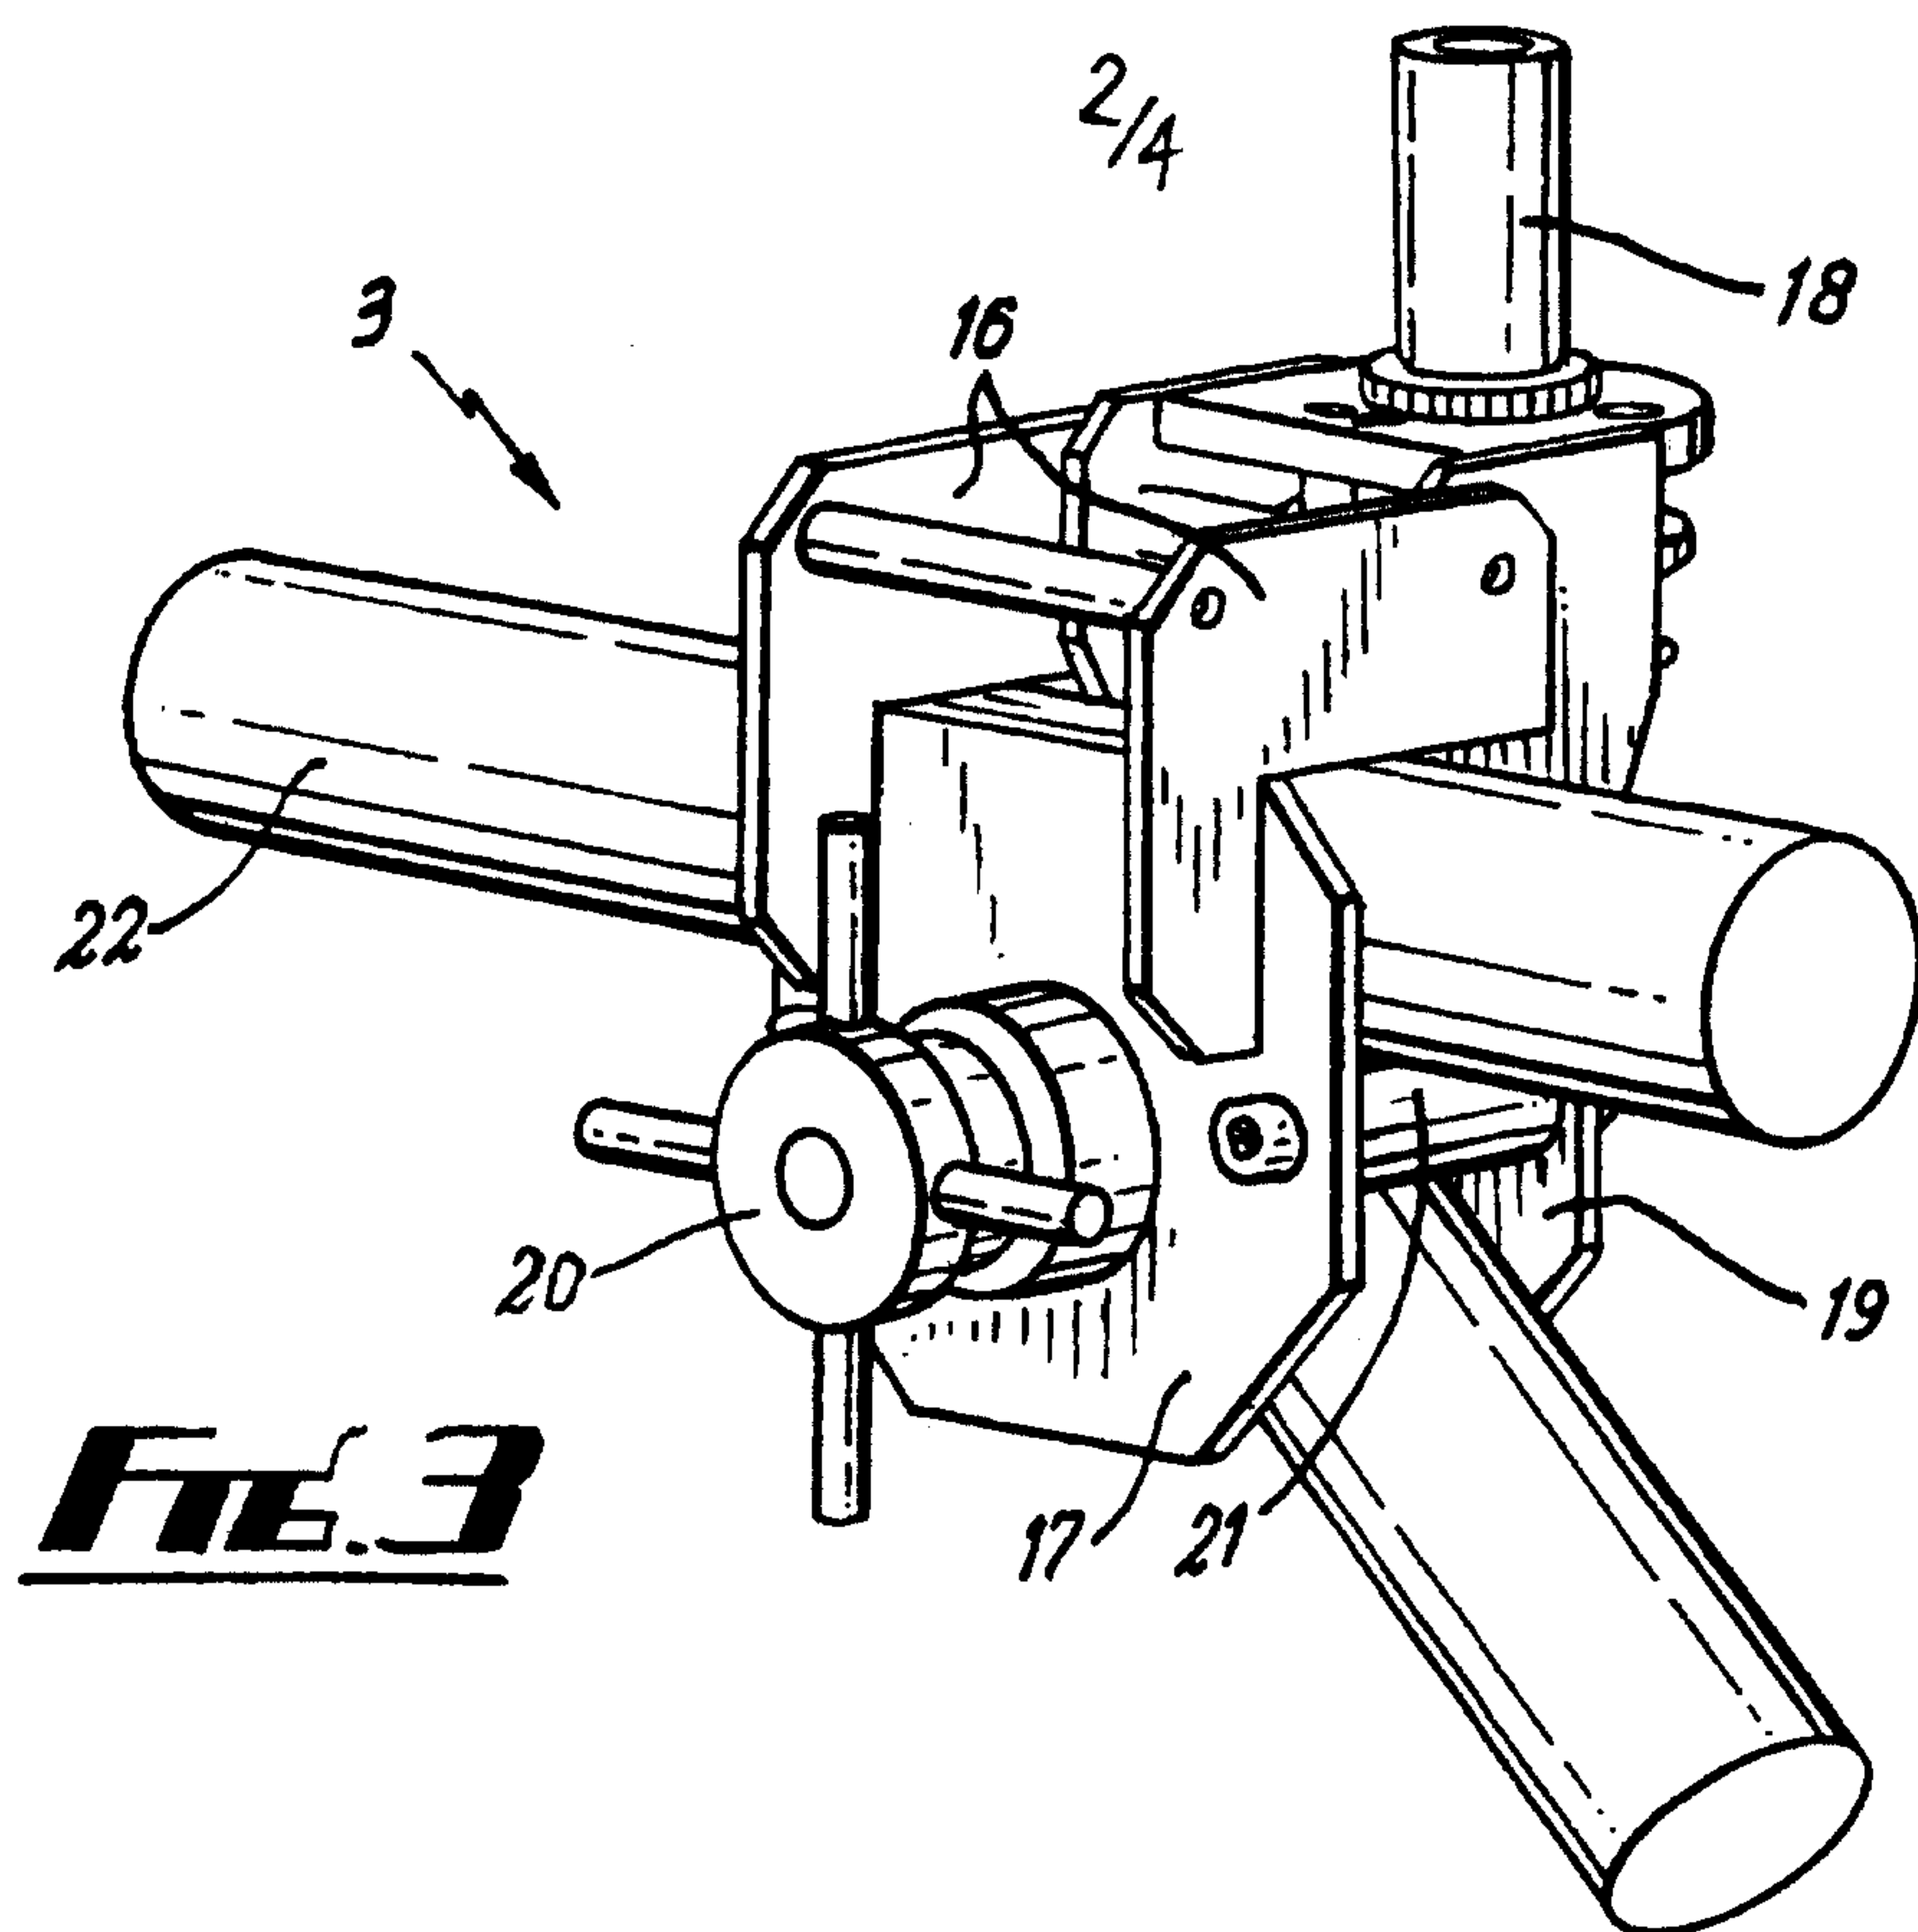

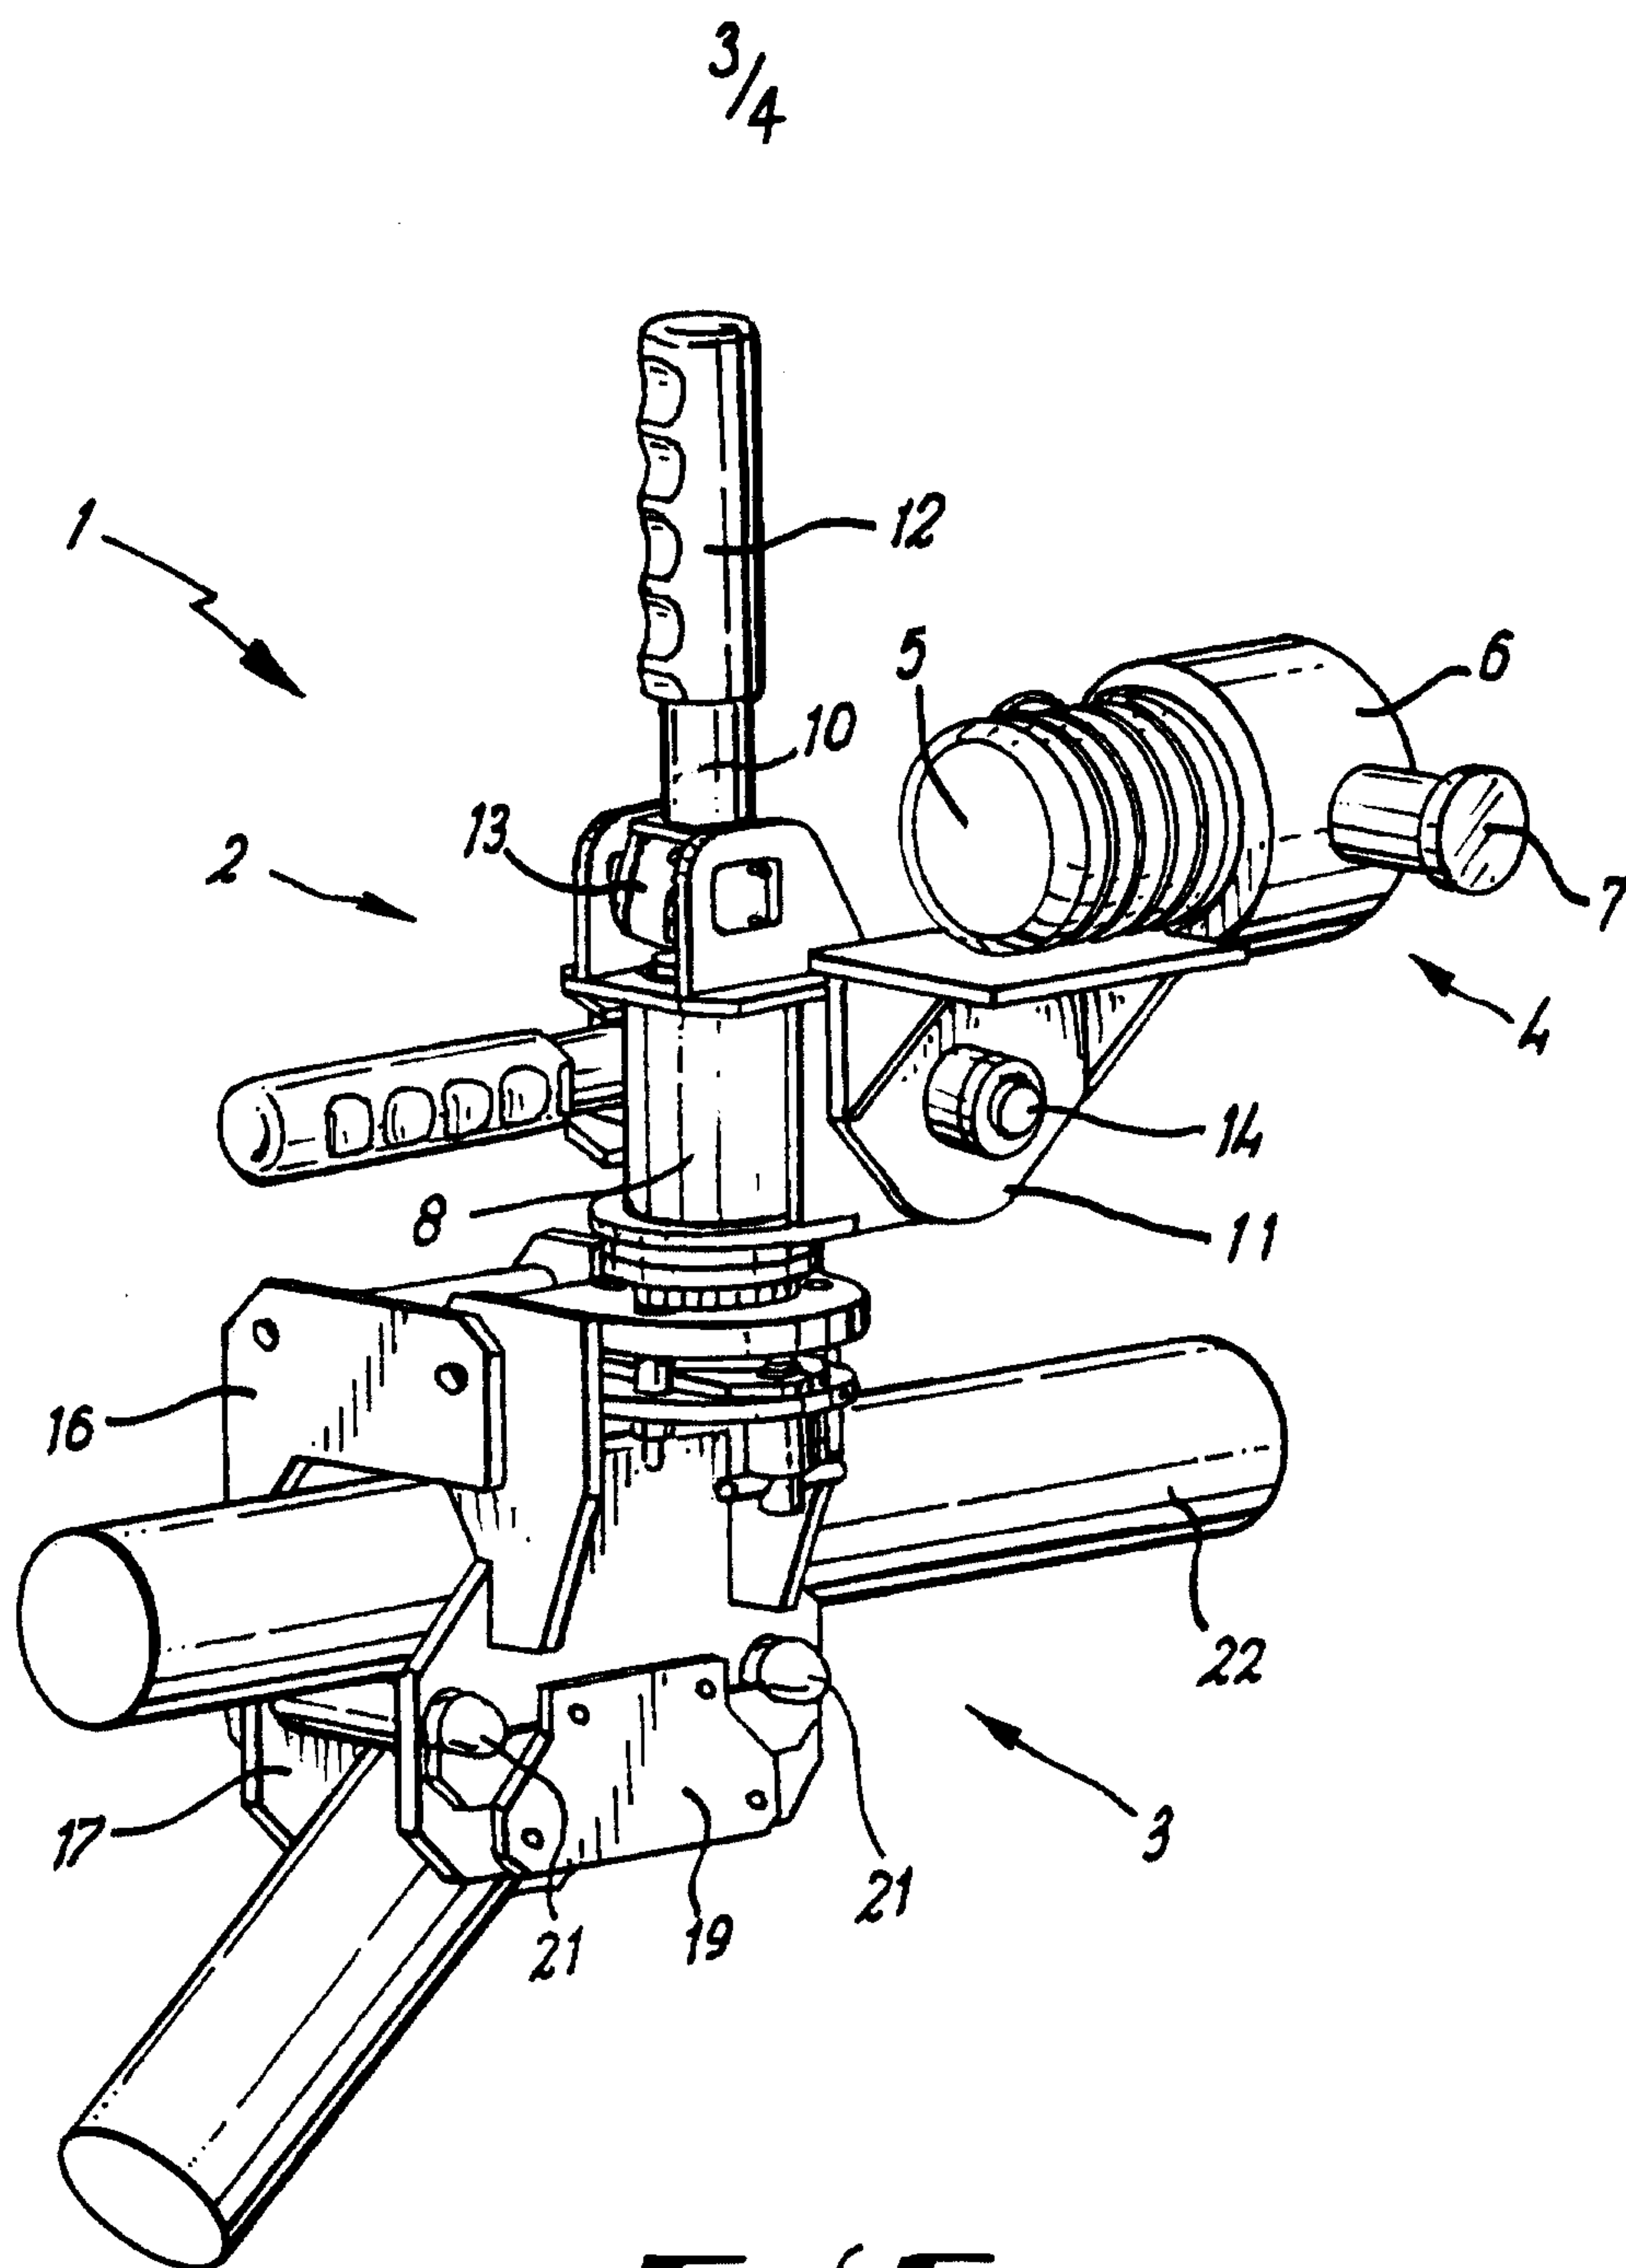

FILE 5

4/4

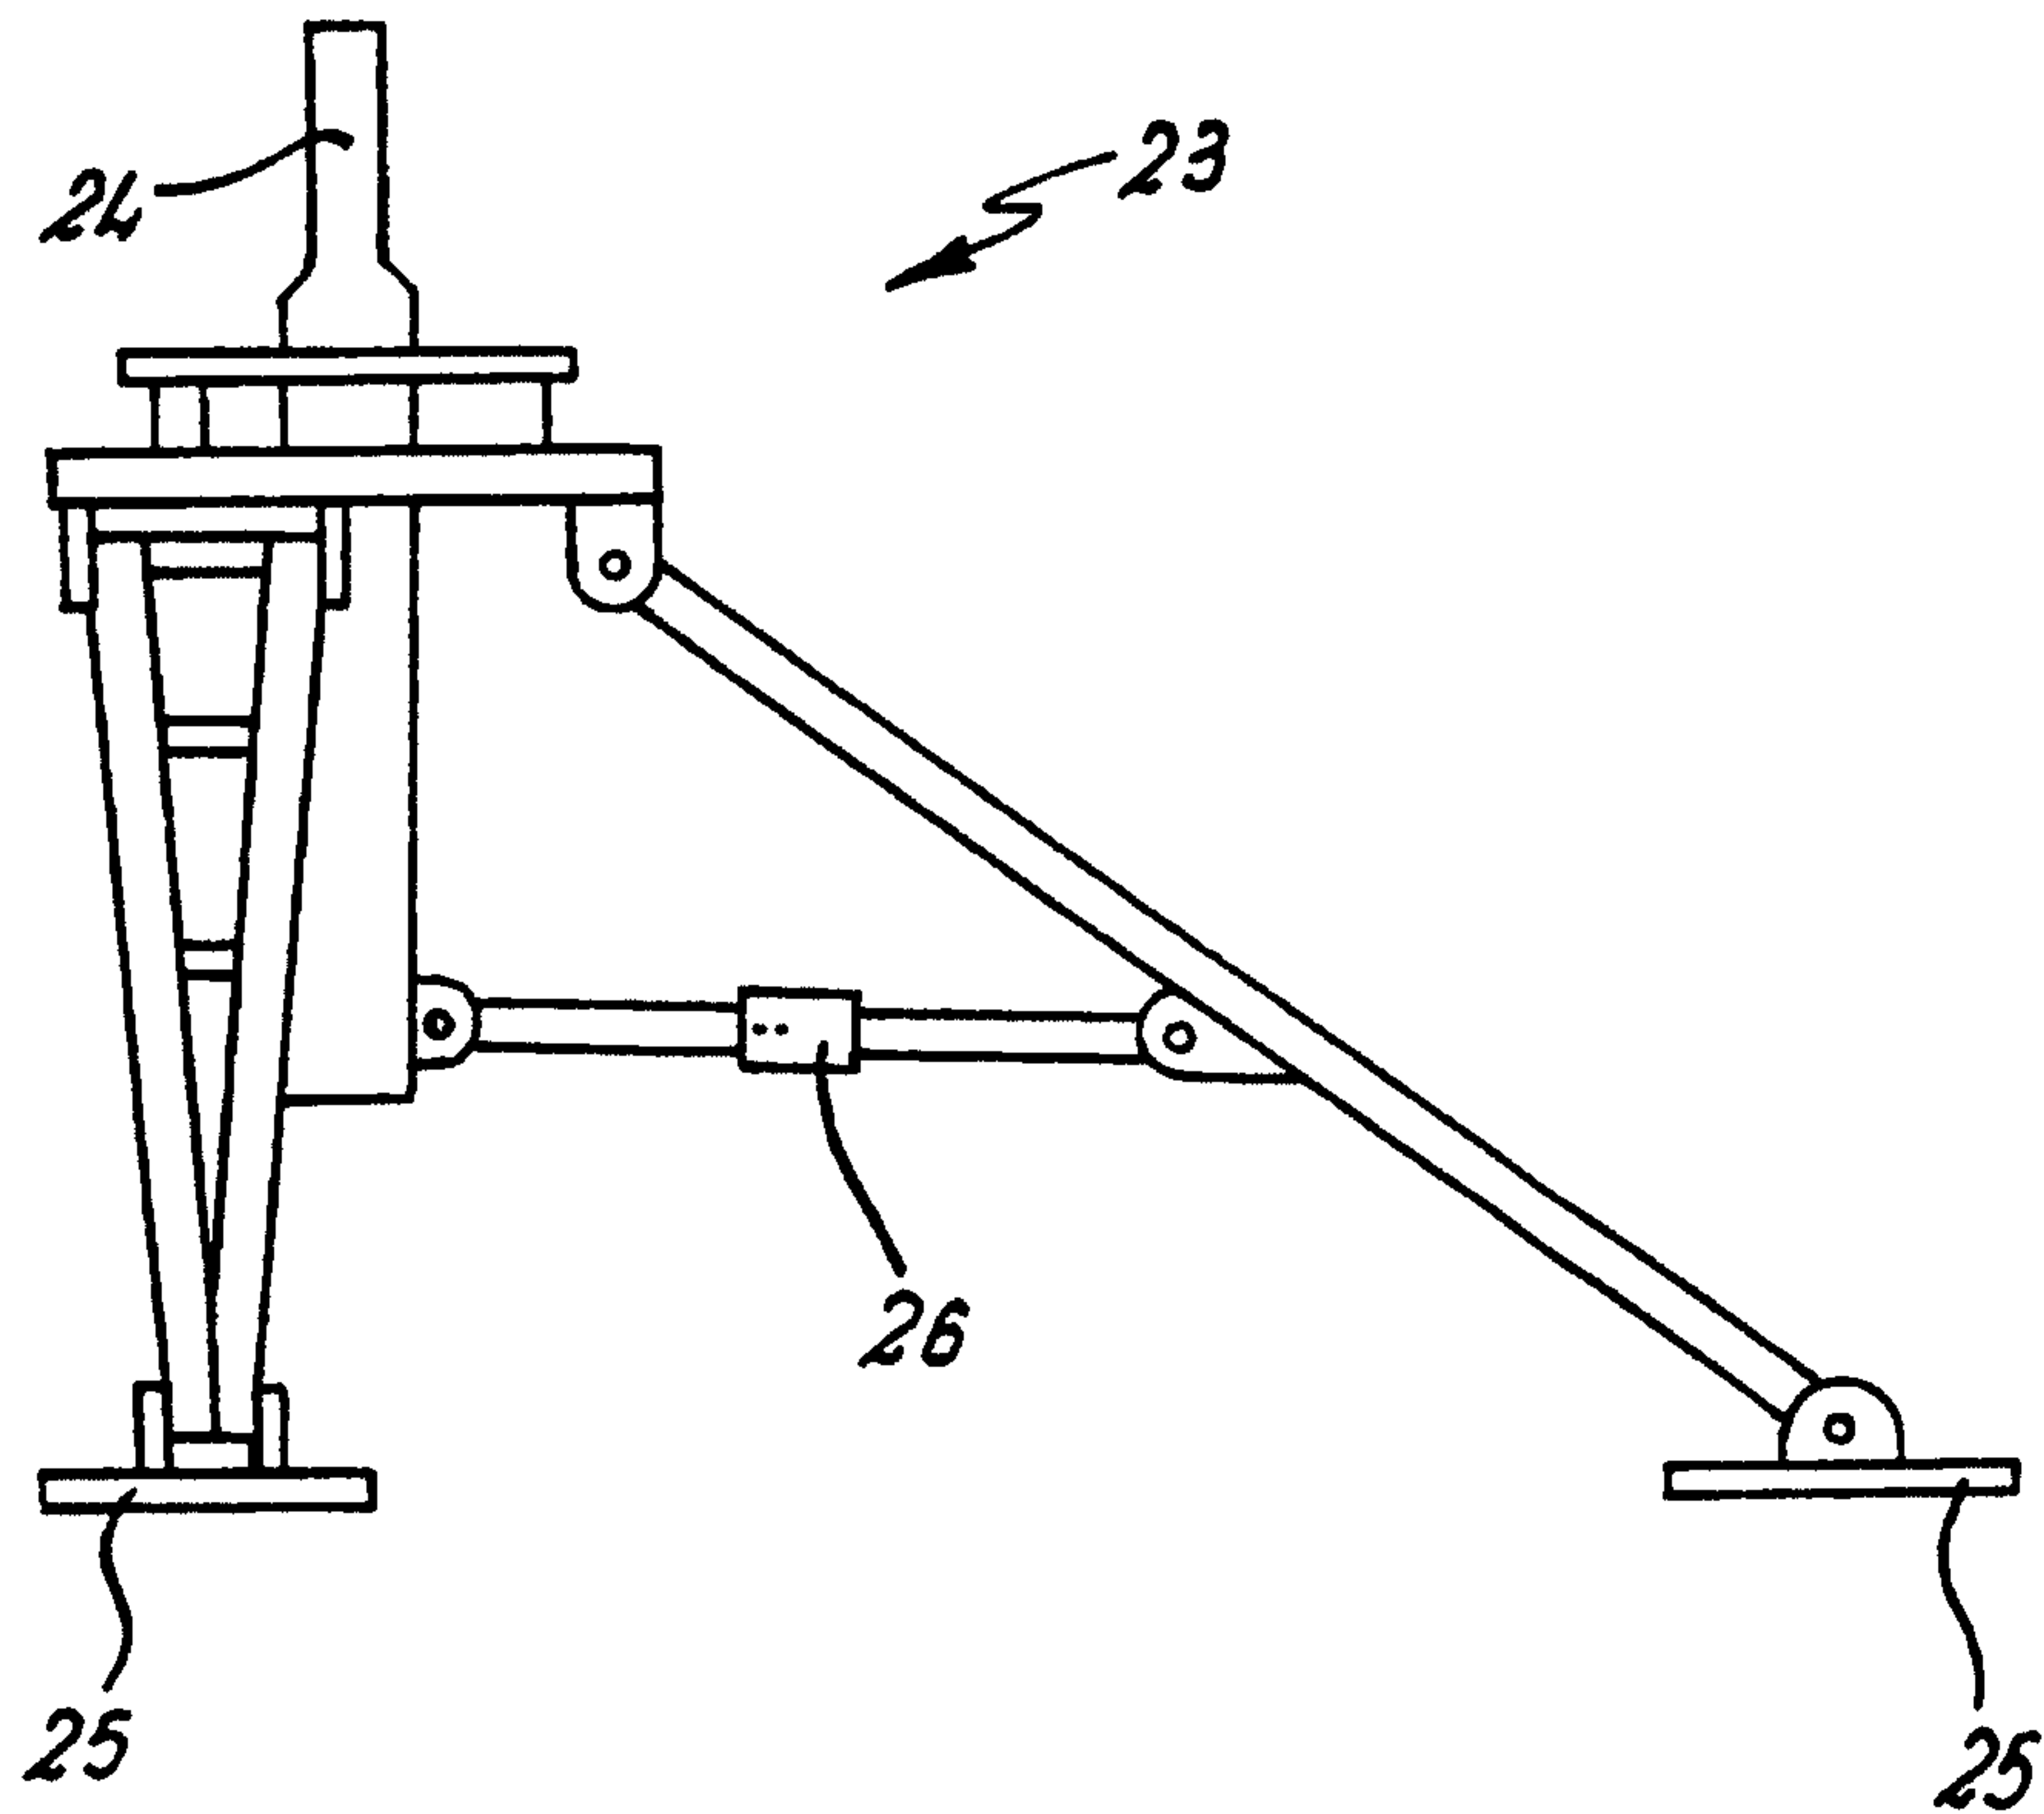


FIG. 6

SUBSTITUTE SHEET (RULE 26)

