




(86) Date de dépôt PCT/PCT Filing Date: 2014/02/24
 (87) Date publication PCT/PCT Publication Date: 2014/09/12
 (45) Date de délivrance/Issue Date: 2017/08/22
 (85) Entrée phase nationale/National Entry: 2015/08/07
 (86) N° demande PCT/PCT Application No.: US 2014/018088
 (87) N° publication PCT/PCT Publication No.: 2014/137647
 (30) Priorité/Priority: 2013/03/08 (US61/775,167)

(51) Cl.Int./Int.Cl. *F01K 13/00* (2006.01),
E21B 43/24 (2006.01), *F01K 17/02* (2006.01),
F01K 23/10 (2006.01), *F01K 23/14* (2006.01)
 (72) Inventeurs/Inventors:
 HUNTINGTON, RICHARD A., US;
 DENTON, ROBERT D., US;
 MCMAHON, PATRICK D., US;
 BOHRA, LALIT K., US;
 DICKSON, JASPER L., US
 (73) Propriétaire/Owner:
 EXXONMOBIL UPSTREAM RESEARCH COMPANY,
 US
 (74) Agent: BORDEN LADNER GERVAIS LLP

(54) Titre : TRAITEMENT DE L'ECHAPPEMENT A UTILISER DANS UNE RECUPERATION DE PETROLE AMELIOREE
 (54) Title: PROCESSING EXHAUST FOR USE IN ENHANCED OIL RECOVERY

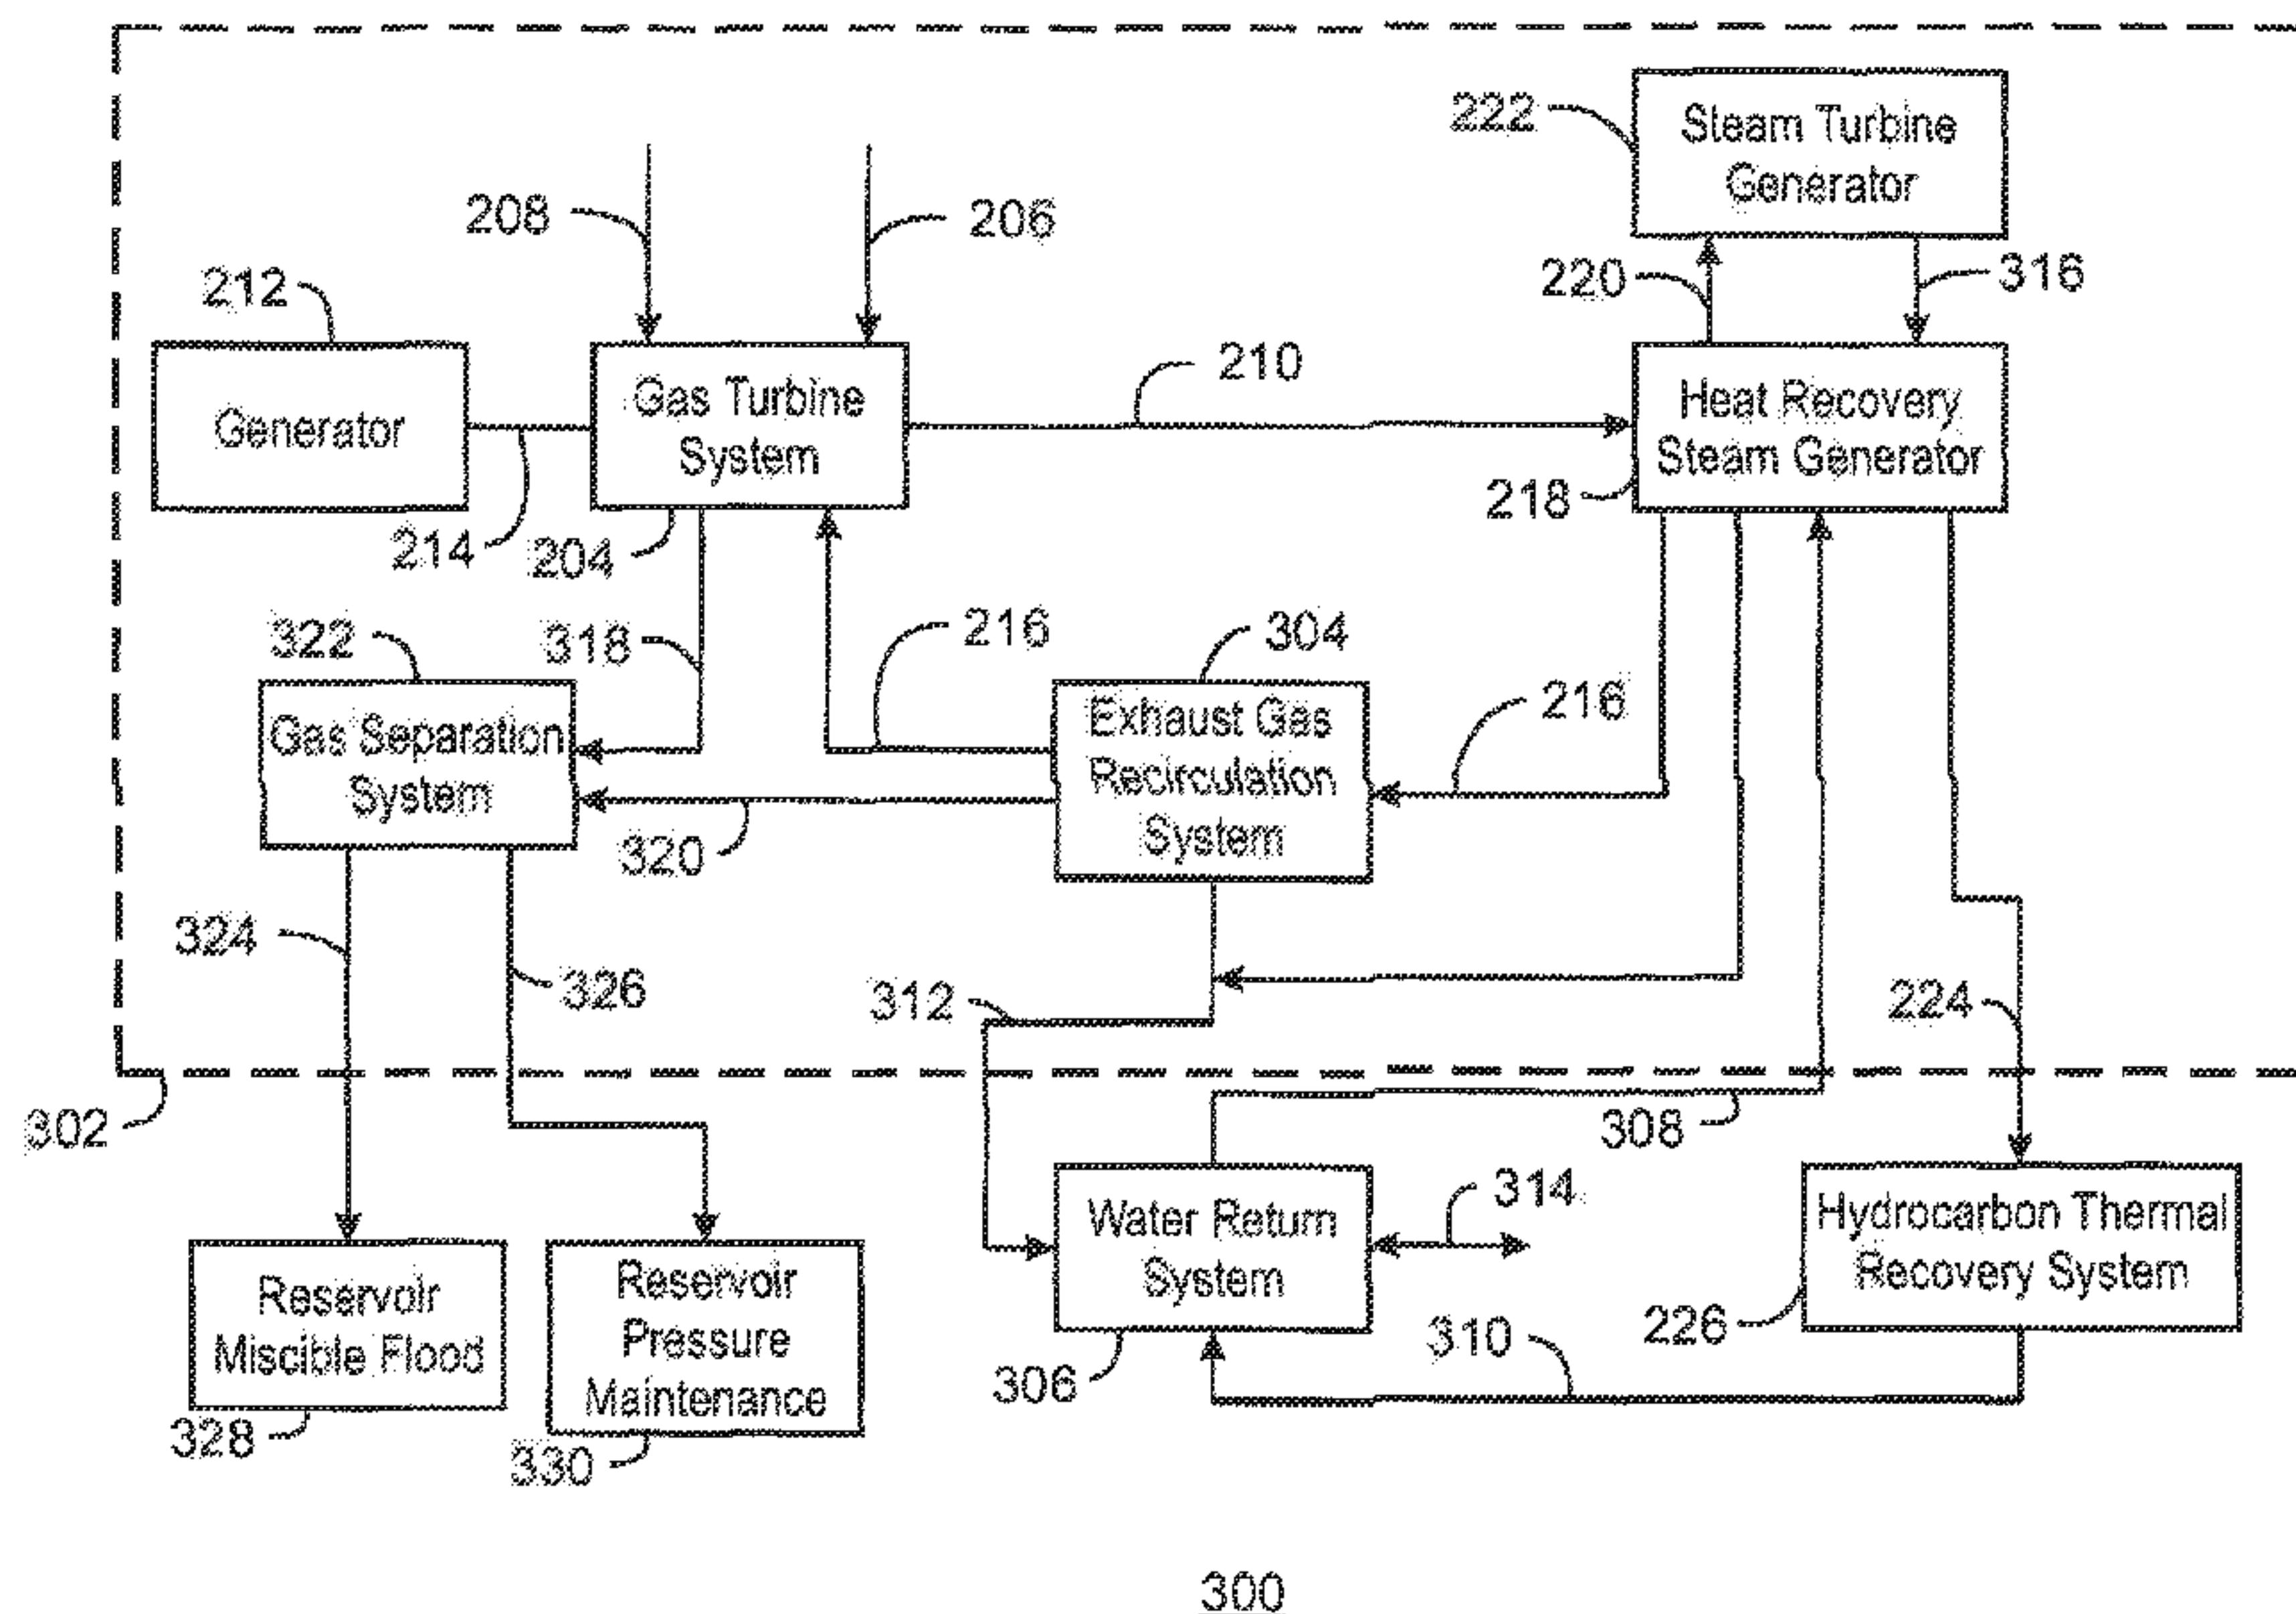

(57) Abrégé/Abstract:

A method for generating steam for hydrocarbon production is provided. The method includes producing steam using heat from an exhaust stream from a gas turbine system. A water stream is condensed from combustion products in the exhaust stream, and the water stream is used as a make-up water for production of the steam.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(10) International Publication Number
WO 2014/137647 A1(43) International Publication Date
12 September 2014 (12.09.2014)

WIPO | PCT

(51) International Patent Classification:

F01K 13/00 (2006.01) *F01K 23/10* (2006.01)
E21B 43/24 (2006.01) *F01K 23/14* (2006.01)
F01K 17/02 (2006.01)

(21) International Application Number:

PCT/US2014/018088

(22) International Filing Date:

24 February 2014 (24.02.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/775,167 8 March 2013 (08.03.2013) US

(71) Applicant (for all designated States except US): **EXXON-MOBIL UPSTREAM RESEARCH COMPANY** [US/US]; CORP-URC-SW359, P.O.Box 2189, Houston, TX 77252-2189 (US).

(72) Inventors; and


(71) Applicants (for US only): **HUNTINGTON, Richard, A.** [US/US]; 4506 Feagan Street, Houston, TX 77007 (US). **DENTON, Robert, D.** [US/US]; 4314 Phil Street, Bellaire, TX 77401 (US). **MCMAHON, Patrick, D.** [US/US]; 107 N. Westwinds Circle, The Woodlands, TX 77382 (US). **BOHRA, Lalit, K.** [IN/US]; 6731 Honeycrest Lane,Spring, TX 77389 (US). **DICKSON, Jasper, L.** [US/US]; 2223 Hickory Lawn Drive, Houston, TX 77077 (US).(74) Agents: **SULLIVAN, Jamie, L.** et al.; ExxonMobil Upstream Research Company, CORP-URC-SW359, P.O. Box 2189, Houston, TX 77252-2189 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) Title: PROCESSING EXHAUST FOR USE IN ENHANCED OIL RECOVERY

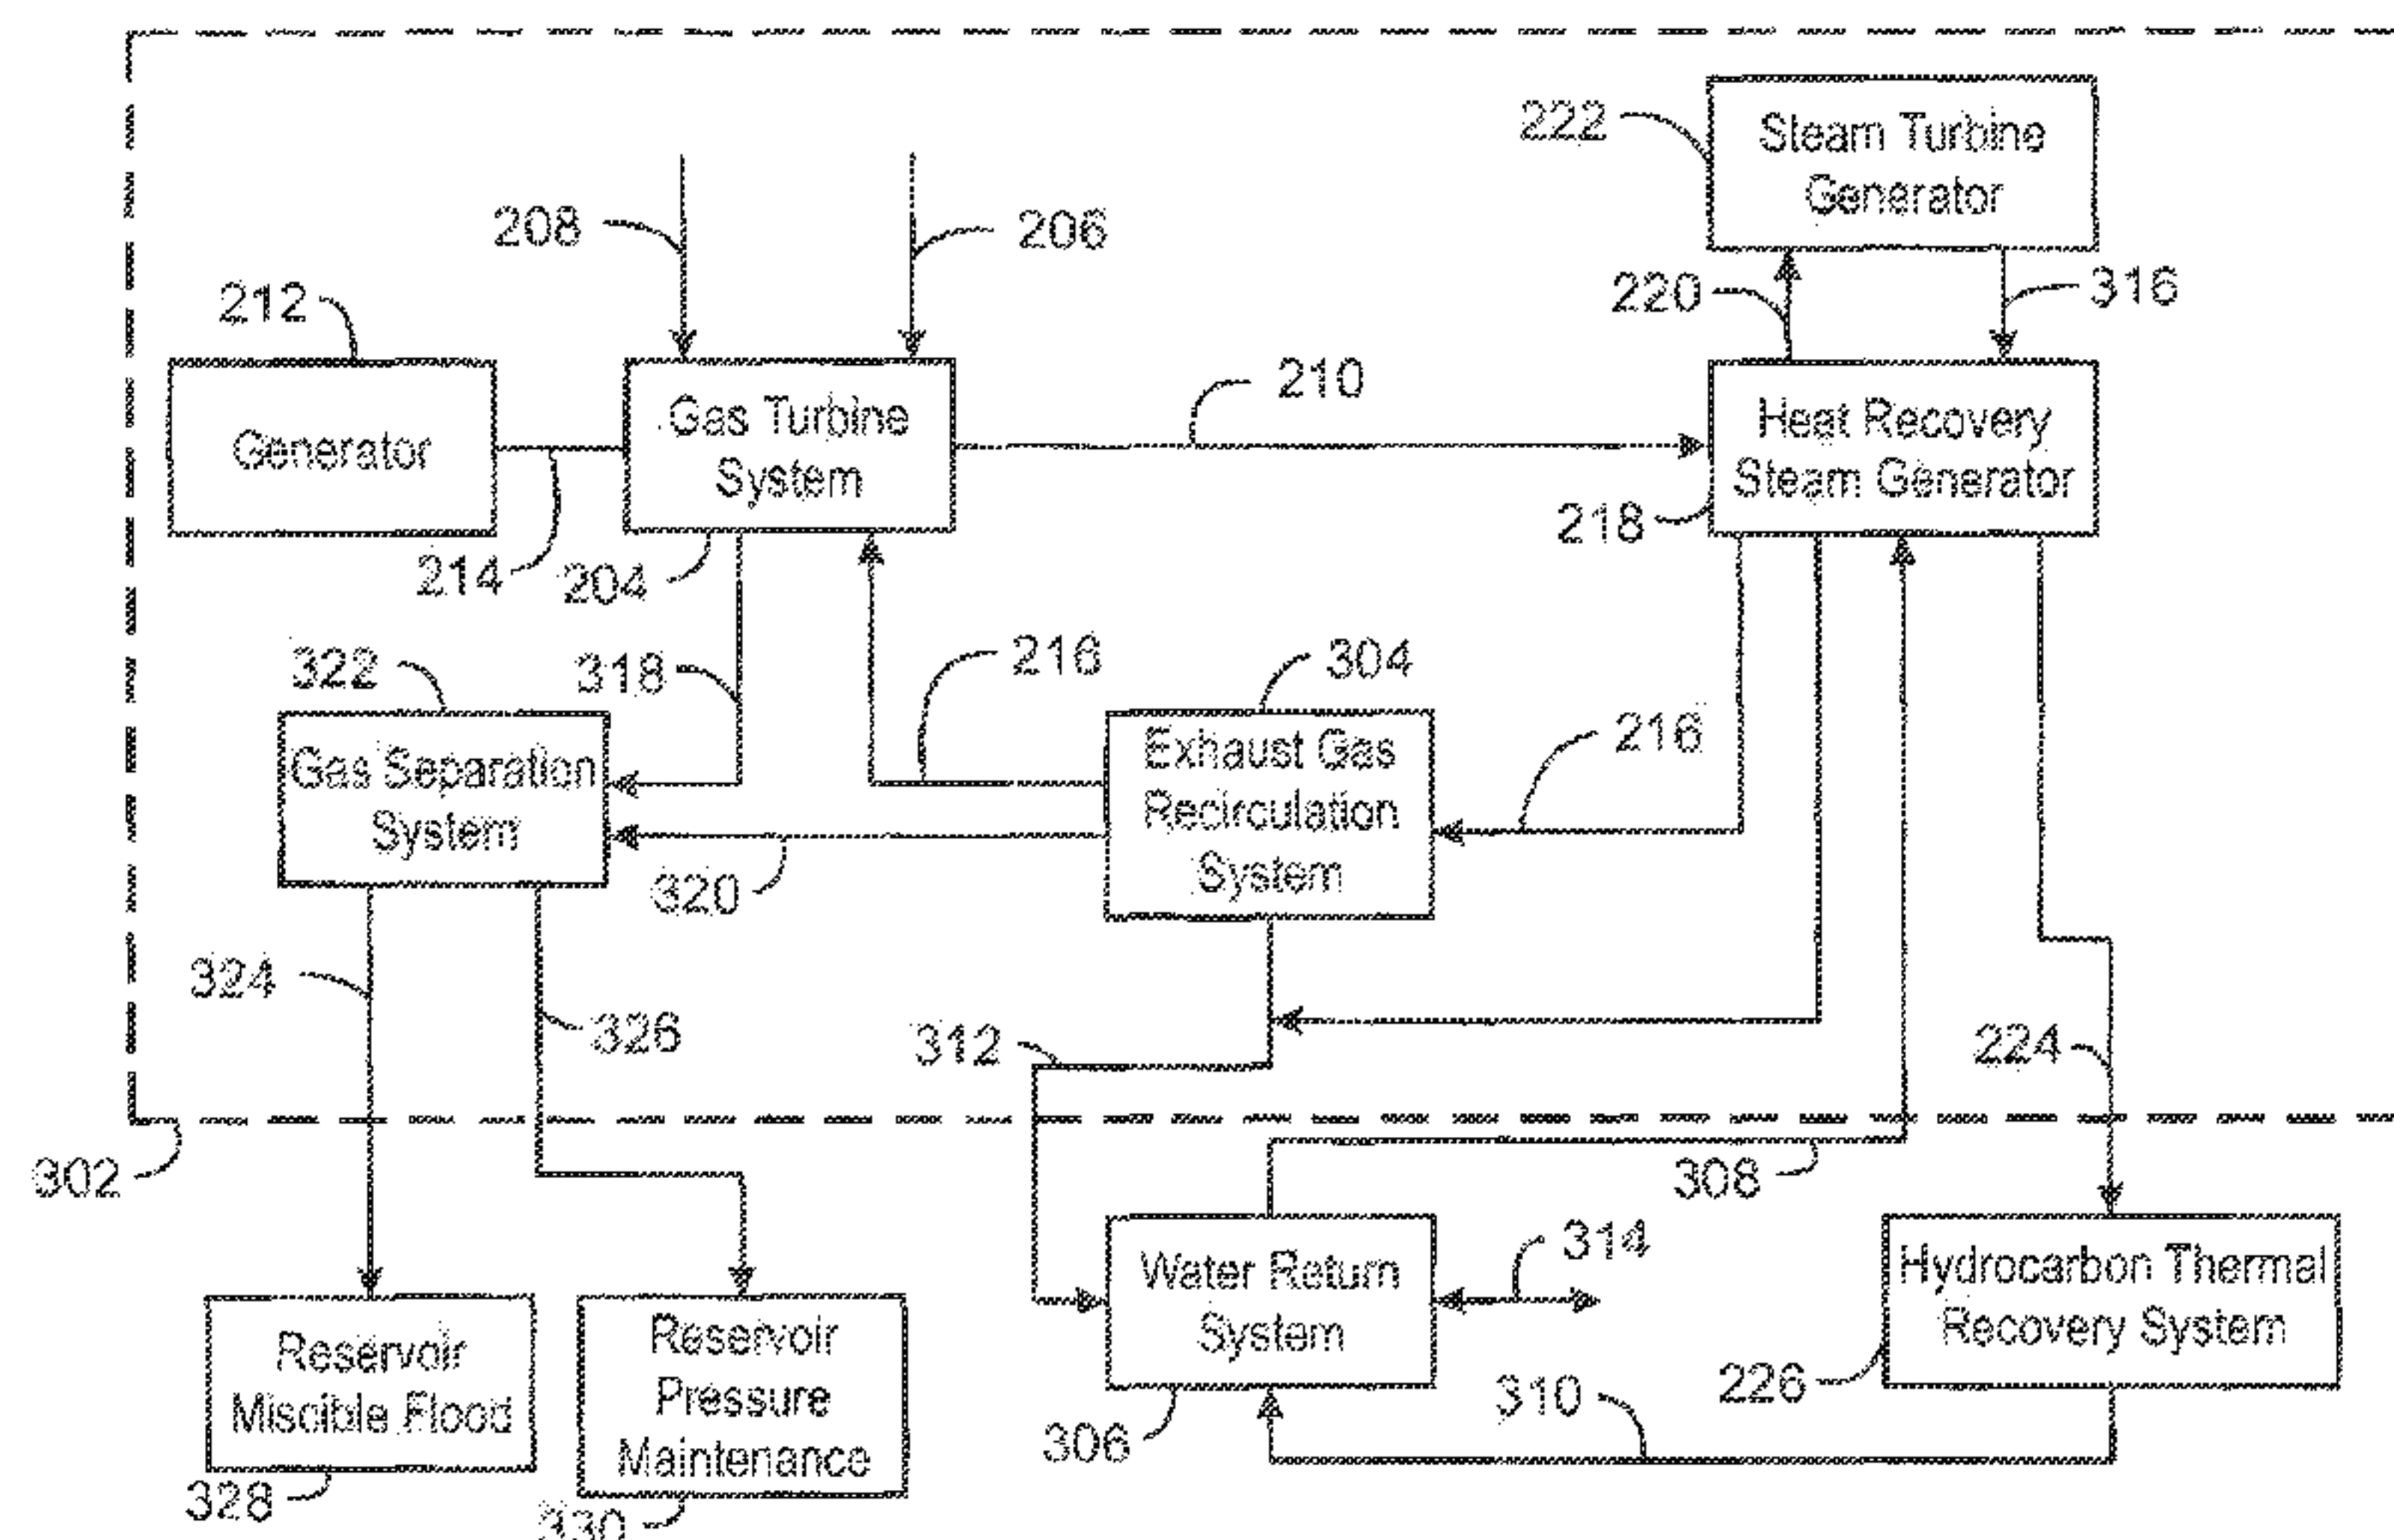300
FIG. 3

(57) Abstract: A method for generating steam for hydrocarbon production is provided. The method includes producing steam using heat from an exhaust stream from a gas turbine system. A water stream is condensed from combustion products in the exhaust stream, and the water stream is used as a make-up water for production of the steam.

WO 2014/137647 A1 

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

— *with international search report (Art. 21(3))*

PROCESSING EXHAUST FOR USE IN ENHANCED OIL RECOVERY**CROSS REFERENCE TO RELATED APPLICATIONS**

[0001] This application claims the priority benefit of United States Patent Application
5 61/775,167 filed March 8, 2013 entitled PROCESSING EXHAUST FOR USE IN
ENHANCED OIL RECOVERY.

FIELD

[0002] Exemplary embodiments of the present techniques relate to techniques for
recovering exhaust heat from a combined cycle plant and using the recovered exhaust heat for
10 enhanced oil recovery.

BACKGROUND

[0003] This section is intended to introduce various aspects of the art, which may be
associated with exemplary embodiments of the present techniques. This discussion is
believed to assist in providing a framework to facilitate a better understanding of particular
15 aspects of the present techniques. Accordingly, it should be understood that this section
should be read in this light, and not necessarily as admissions of prior art.

[0004] A Brayton cycle engine commonly known as a gas turbine can be adapted to
combust fuel at near stoichiometric conditions with exhaust gas recirculation. Such an engine
is referred to as an ultra-low emission technology (ULET) because the emissions produced by
20 the engine are primarily inert gases with low contaminant contents. Some ULET engines use
the exhaust heat of the gas turbine to produce multiple pressure levels of superheated steam
that is used in a condensing steam turbine to produce additional shaft power. In PCT
Application Publication No. WO2012003079, such an arrangement is described and referred
to as combined cycle power generation (CCPG). A power plant that implements CCPG is
25 referred to as a combined cycle power plant or, simply, a combined cycle plant. Gas turbine
combined cycle plants are rather efficient and can be operated at relatively low cost when
compared to other technologies, such as coal and nuclear.

[0005] The steam turbine in a combined cycle plant runs most efficiently with high
quality, *i.e.*, dry, steam. Production of dry steam requires a water feed that is substantially
30 free of contaminants, such as minerals, salts, and silica. Although water is produced as a
byproduct of the combustion process in a ULET engine, this water is of low quality and is
therefore not readily usable by a boiler of the steam turbine. The cost of purifying the water

is often prohibitive and, therefore, the water is often simply discarded. Moreover, although the steam turbine in a combined cycle plant produces blowdown water, this water is also of low quality and is, therefore, discarded in many instances.

5 [0006] In addition, although using the exhaust heat of the gas turbine to produce additional shaft power instead of merely venting it improves overall efficiency of the combined cycle plant, there may be more economical uses for the exhaust heat. However, current combined cycle plants are not equipped to use the exhaust heat or the steam produced with the exhaust heat for any alternative purposes.

10 [0007] For example, U.S. Patent No. 4,271,664 to Earnest discloses a turbine engine with exhaust gas recirculation. The engine has a main power turbine operating on an open-loop Brayton cycle. The air supply to the main power turbine is furnished by a compressor independently driven by the turbine of a closed-loop Rankine cycle which derives heat energy from the exhaust of the Brayton turbine. A portion of the exhaust gas is recirculated into the compressor inlet during part-load operation. However, no additional uses are
15 disclosed for the exhaust heat or the steam produced with the exhaust heat.

SUMMARY

[0008] An embodiment described herein provides a method for generating steam for hydrocarbon production using a combined cycle power plant. The method includes producing steam using heat from an exhaust stream from a gas turbine system, condensing a
20 water stream from combustion products in the exhaust stream, and using the water stream as a make-up water for production of the steam.

[0009] Another embodiment provides a method for using exhaust from a combined cycle plant in hydrocarbon production. The method includes producing steam using exhaust heat from an exhaust stream from a gas turbine system in the combined cycle plant and
25 condensing a water stream from the exhaust stream. The water stream is used as a make-up stream for the steam production. A steam turbine is driven with at least a portion of the steam and at least another portion of the steam is injected into a hydrocarbon reservoir for a thermal recovery process.

[0010] Another embodiment provides a system for generating power and thermally
30 recovering hydrocarbons from a reservoir. The system includes a gas turbine system configured to produce a hot exhaust stream as a byproduct of combustion. The system also includes a heat recovery steam generator (HRSG) configured to produce a steam stream using

the hot exhaust stream, wherein the HRSG produces a condensate stream from the combustion products in the hot exhaust stream. A feed system is configured to use the condensate stream as at least part of a make-up water provided to the HRSG to generate the steam stream.

5 BRIEF DESCRIPTION OF THE DRAWINGS

[0011] The advantages of the present techniques are better understood by referring to the following detailed description and the attached drawings, in which:

Fig. 1 is a schematic of a development illustrating the use of thermal recovery systems with a steam producing cogeneration facility;

10 **Fig. 2** is a simplified block diagram of another development illustrating a detailed view of a cogeneration facility of the development;

Fig. 3 is a simplified block diagram of another development illustrating a detailed view of a cogeneration facility of the development;

15 **Fig. 4** is a simplified block diagram of a portion of the development of **Fig. 3** illustrating a detailed view of the HRSG of the development according to a first embodiment;

Fig. 5 is a simplified block diagram of a portion of the development of **Fig. 3** illustrating a detailed view of the HRSG of the development according to a second embodiment;

Fig. 6 is a process flow diagram of a method for using exhaust heat in a combined cycle plant; and

20 **Fig. 7** is a process flow diagram of another method for using exhaust heat in a combined cycle plant.

DETAILED DESCRIPTION

[0012] In the following detailed description section, specific embodiments of the present techniques are described. However, to the extent that the following description is specific to
25 a particular embodiment or a particular use of the present techniques, this is intended to be for exemplary purposes only and simply provides a description of the exemplary embodiments. Accordingly, the techniques are not limited to the specific embodiments described below, but rather, include all alternatives, modifications, and equivalents falling within the true spirit and scope of the appended claims.

30 [0013] At the outset, for ease of reference, certain terms used in this application and their

meanings as used in this context are set forth. To the extent a term used herein is not defined below, it should be given the broadest definition persons in the pertinent art have given that term as reflected in at least one printed publication or issued patent. Further, the present techniques are not limited by the usage of the terms shown below, as all equivalents, synonyms, new developments, and terms or techniques that serve the same or a similar purpose are considered to be within the scope of the present claims.

[0014] "Bitumen" is a naturally occurring heavy oil material. It is often the hydrocarbon component found in oil sands. Bitumen can vary in composition depending upon the degree of loss of more volatile components. It can vary from a very viscous, tar-like, semi-solid material to solid forms. The hydrocarbon types found in bitumen can include aliphatics, aromatics, resins, and asphaltenes. A typical bitumen might be composed of:

- 19 weight percent (wt. %) aliphatics, which can range from 5 wt. %-30 wt. %, or higher;
- 19 wt. % asphaltenes, which can range from 5 wt. %-30 wt. %, or higher;
- 30 wt. % aromatics, which can range from 15 wt. %-50 wt. %, or higher;
- 32 wt. % resins, which can range from 15 wt. %-50 wt. %, or higher; and
- some amount of sulfur, which can range in excess of 7 wt. %.

In addition bitumen can contain some water and nitrogen compounds ranging from less than 0.4 wt. % to in excess of 0.7 wt. %. The metals content, while small, can be removed to avoid contamination of the product synthetic crude oil (SCO). Nickel can vary from less than 75 ppm (part per million) to more than 200 ppm. Vanadium can range from less than 200 ppm to more than 500 ppm. The percentage of the hydrocarbon types found in bitumen can vary.

[0015] The "Clark hot water extraction process" or "CHWE" was originally developed for releasing bitumen from oil sands, based on the work of Dr. K. A. Clark, and discussed in a paper by Corti et al., "Athabasca Mineable Oil Sands: The RTR/Gulf Extraction Process Theoretical Model of Bitumen Detachment," The 4th UNITAR/UNDP International Conference on Heavy Crude and Tar Sands Proceedings, vol. 5, Edmonton, AB, Aug. 7-12, 1988, pp. 41-44, 71. The process, which is also described in U.S. Pat. No. 4,946,597, uses vigorous mechanical agitation of oil sands with water and caustic alkali to disrupt the granules and form a slurry, after which the slurry is passed to a separation tank for the flotation of the bitumen, from which the bitumen is skimmed. The process may be operated at ambient temperatures, with a conditioning agent being added to the slurry. Earlier methods

used temperatures of 85 °C. and above together with vigorous mechanical agitation and are highly energy inefficient. Chemical adjuvants, particularly alkalis, have been utilized to assist these processes.

[0016] A “combined cycle power plant” or “CCPP” (also referred to herein as a
5 “combined cycle plant”) includes a gas turbine, a steam turbine, a generator, and a heat recovery steam generator (HRSG), and uses both steam and gas turbines to generate power. The gas turbine operates in an open or semi-closed Brayton cycle, and the steam turbine operates in a Rankine cycle. Combined cycle power plants utilize heat from the gas turbine exhaust to boil water in the HRSG to generate steam. The steam generated is utilized to
10 power the steam turbine. After powering the steam turbine, the steam may be condensed and the resulting water returned to the HRSG. The gas turbine and the steam turbine can be utilized to separately power independent generators, or in the alternative, the steam turbine can be combined with the gas turbine to jointly drive a single generator via a common drive shaft. These combined cycle gas/steam power plants generally have higher energy
15 conversion efficiency than Rankine-cycle or steam-only power plants. Currently, simple-cycle plant efficiency can exceed 44% while combined cycle plant efficiency can exceed 60%. The higher combined cycle efficiencies result from synergistic utilization of a combination of the gas turbine with the steam turbine.

[0017] A “compressor” is a machine that increases the pressure of a gas by the
20 application of work (*i.e.*, compression). Accordingly, a low pressure gas (*e.g.*, at about 35 kPa) may be compressed into a high-pressure gas (*e.g.*, at about 6,895 kPa) for transmission through a pipeline, injection into a well, or other processes.

[0018] As used herein, “condensate” includes liquid water formed by the condensation of
25 steam. Steam may also entrain liquid water, in the form of water droplets. This entrained water may also be termed condensate, as it may arise from condensation of the steam, although the entrained water droplets may also originate from the incomplete conversion of liquid water to steam in a boiler.

[0019] “Cyclic Steam Stimulation” or “CSS” (also known as the “huff-and-puff” process)
30 refers to a hot in-situ mining process in which a well is put through cycles of steam injection, heat soak, and pumped oil production. Specifically, CSS involves the cyclic introduction of high-temperature (*e.g.*, about 300 °C – 400 °C) steam into a reservoir through a horizontal well for prolonged periods of time (*e.g.*, weeks to months). This may allow the steam to heat the mineralized formation and to fluidify the oils. The oils can then be recovered at the

surface. The production and, therefore, the recovery of the oils may take place through another horizontal well situated at a higher depth.

[0020] A “dehydration device” is a device for removing water, in gaseous or liquid form, from a gas mixture. “Dewatered” describes broadly any reduction of water content.
5 Typically, a dewatered hydrocarbon-containing material can have a majority of the water content substantially removed, *e.g.*, less than about 5% by volume water or less than about 1% depending on the particular material and starting water content. Water contents much less than 1% may be desirable for certain gas streams.

[0021] A “development” is a project for the recovery of hydrocarbons using integrated
10 surface facilities and long term planning. The development can be directed to a single hydrocarbon reservoir, although multiple proximate reservoirs may be included.

[0022] “Enriched” as applied to any stream withdrawn from a process means that the withdrawn stream contains a concentration of a particular component that is higher than the concentration of that component in the feed stream to the process.

15 [0023] As used herein, “exemplary” means “serving as an example, instance, or illustration.” Any embodiment described herein as “exemplary” is not to be construed as preferred or advantageous over other embodiments.

[0024] A “facility” is a representation of a tangible piece of physical equipment through which hydrocarbon fluids are either produced from a reservoir or injected into a reservoir. In
20 its broadest sense, the term facility is applied to any equipment that may be present along the flow path between a reservoir and its delivery outlets, which are the locations at which hydrocarbon fluids either enter the reservoir (injected fluids) or leave the reservoir (produced fluids). Facilities may include production wells, injection wells, well tubulars, wellhead equipment, gathering lines, manifolds, pumps, compressors, separators, surface flow lines,
25 and delivery outlets. As used herein, a facility may also include a gas treatment unit, such as an acid gas separation unit, a cryogenic separation system, or a dehydration unit. In some instances, the term “surface facility” is used to distinguish those facilities other than wells. A “facility network” is the complete collection of facilities that are present in the system, which would include all wells and the surface facilities between the wellheads and the delivery
30 outlets.

[0025] The term “gas” is used interchangeably with “vapor,” and means a substance or mixture of substances in the gaseous state as distinguished from the liquid or solid state.

Likewise, the term "liquid" means a substance or mixture of substances in the liquid state as distinguished from the gas or solid state.

[0026] A "heat recovery steam generator" or "HRSG" is a heat exchanger or boiler that recovers heat from a hot gas stream. It produces steam that can be used in a process or used
5 to drive a steam turbine. A common application for an HRSG is in a combined-cycle power plant, where hot exhaust from a gas turbine is fed to the HRSG to generate steam which in turn drives a steam turbine. As described herein, the HRSG may be used to provide steam to an enhanced oil recovery process, such as CSS or SAGD.

[0027] "Heavy oil" includes oils which are classified by the American Petroleum Institute
10 (API) as heavy oils or extra heavy oils. In general, a heavy oil has an API gravity between 22.3° (density of 920 kg/m³ or 0.920 g/cm³) and 10.0° (density of 1,000 kg/m³ or 1 g/cm³). An extra heavy oil, in general, has an API gravity of less than 10.0° (density greater than 1,000 kg/m³ or greater than 1 g/cm³). For example, a source of heavy oil includes oil sand or bituminous sand, which is a combination of clay, sand, water, and bitumen. The thermal
15 recovery of heavy oils is based on the viscosity decrease of fluids with increasing temperature or solvent concentration. Once the viscosity is reduced, the mobilization of fluids by steam, hot water flooding, or gravity is possible. The reduced viscosity makes the drainage quicker and therefore directly contributes to the recovery rate.

[0028] A "hydrocarbon" is an organic compound that primarily includes the elements
20 hydrogen and carbon, although nitrogen, sulfur, oxygen, metals, or any number of other elements may be present in small amounts. As used herein, hydrocarbons generally refer to organic materials that are harvested from hydrocarbon containing sub-surface rock layers, termed reservoirs. For example, natural gas, oil, and coal are hydrocarbons.

[0029] "Hydrocarbon production" or "production" refers to any activity associated with
25 extracting hydrocarbons from a well or other opening. Hydrocarbon production normally refers to any activity conducted in or on the well after the well is completed. Accordingly, hydrocarbon production or extraction includes not only primary hydrocarbon extraction but also secondary and tertiary production techniques, such as injection of gas or liquid for increasing drive pressure, mobilizing the hydrocarbon or treating by, for example, chemicals
30 or hydraulic fracturing the well bore to promote increased flow, well servicing, well logging, and other well and wellbore treatments.

[0030] The term "natural gas" refers to a gas obtained from a crude oil well (associated

gas), from a subterranean gas-bearing formation (non-associated gas), or from a coal bed. The composition and pressure of natural gas can vary significantly. A typical natural gas stream contains methane (CH₄) as a significant component. Raw natural gas may also contain ethane (C₂H₆), higher molecular weight hydrocarbons, acid gases (such as carbon dioxide, hydrogen sulfide, carbonyl sulfide, carbon disulfide, and mercaptans), and contaminants such as water, nitrogen, iron sulfide, wax, and crude oil.

[0031] “Pressure” is the force exerted per unit area by the gas on the walls of the volume. Pressure can be shown as kilopascals (kPa).

[0032] As used herein, a “Rankine cycle power plant” includes a vapor generator, a turbine, a condenser, and a recirculation pump. For example when the vapor is steam, a “Rankine cycle power plant” includes a steam generator, a steam turbine, a steam condenser, and a boiler feed water pump. The steam is used to generate electricity by driving a generator from the steam turbine. The reduced pressure steam is then condensed in the steam condenser. The resulting water is recirculated to the steam generator to complete the loop.

[0033] “Reservoir formations” or “reservoirs” are typically pay zones including sandstone, limestone, chalk, coal, and some types of shale. Pay zones can vary in thickness from less than one foot (0.3048 meters) to hundreds of feet (hundreds of meters). The permeability of the reservoir formation provides the potential for production.

[0034] “Sequestration” refers to the storing of a gas or fluid that is a by-product of a process rather than discharging the fluid to the atmosphere or open environment. For example, as described herein, carbon dioxide gas formed from the burning or steam reforming of hydrocarbons may be sequestered in underground formations, such as coal beds.

[0035] “Steam Assisted Gravity Drainage” or “SAGD” is a thermal recovery process in which steam is injected into a first well to lower a viscosity of a heavy oil, and fluids are recovered from a second well. Both wells are usually horizontal in the formation, and the first well lies above the second well. Accordingly, the reduced viscosity heavy oil flows down to the second well under the force of gravity, although pressure differential may provide some driving force in various applications.

[0036] The term “steam-flooding” is synonymous with the term “steam injection.” Both terms describe a technique by which steam is injected into an underground formation to cause increased flow of viscous hydrocarbons.

[0037] As used herein, a “steam generator” may include any number of devices used to

generate steam for a process facility, either directly or as part of another process. Steam generators may include, for example, heat recovery steam generators (HRSG), and once through steam generators (OTSG), among others. The steam may be generated at a number of quality levels. Steam quality is measured by the mass fraction of a cold water stream that is converted into a vapor. For example, an 80 % quality steam has around 80 wt. % of the feed water converted to vapor. The steam is generated as wet steam that contains both steam vapor and associated condensate (or water). The wet steam may be passed through a separator to generate a dry steam, *i.e.*, without entrained condensate. As a result of the separation, the separator also generates a liquid condensate stream.

10 [0038] As used herein, a “steam system” includes one or more steam generators running in parallel from a common feed water source and feeding steam to a common outlet. The steam system may include any number or types of steam generators in parallel. Often, the parallel steam generators of the steam system generate steam at a similar quality level.

15 [0039] “Substantial” when used in reference to a quantity or amount of a material, or a specific characteristic thereof, refers to an amount that is sufficient to provide an effect that the material or characteristic was intended to provide. The exact degree of deviation allowable may in some cases depend on the specific context.

20 [0040] As used herein, “thermal recovery processes” include any type of hydrocarbon recovery process that uses a heat source to enhance the recovery, for example, by lowering the viscosity of a hydrocarbon. These processes may be based on heated water, wet steam, or dry steam, alone, or in any combinations. Further, any of these components may be combined with solvents to enhance the recovery. Such processes may include subsurface processes, such as cyclic steam stimulation (CSS), steam flooding, and SAGD, among others, and processes that use surface processing for the recovery, such as sub-surface mining and surface mining.

25 [0041] “Well” or “wellbore” refers to a hole in the subsurface made by drilling or insertion of a conduit into the subsurface. The terms are interchangeable when referring to an opening in the formation. A well may have a substantially circular cross section, or other cross-sectional shapes. Wells may be cased, cased and cemented, or open-hole well, and may be any type, including, but not limited to a producing well, an injection well, an experimental well, and an exploratory well, or the like. A well may be vertical, horizontal, or any angle between vertical and horizontal (a deviated well), for example a vertical well may include a non-vertical component.

30

Overview

[0042] Embodiments described herein extend combined cycle plant technologies to produce steam for purposes other than generating additional shaft power on a shaft of a gas turbine system in a combined cycle plant. For example, in various embodiments, a HRSG of the combined cycle plant produces wet steam, *i.e.*, steam with a quality equal to or less than 1, for use in a hydrocarbon thermal recovery process, such as a CSS process or a SAGD process. The hydrocarbons recovered by such processes are typically viscous hydrocarbons, including heavy oil, tar, or bitumen. The HRSG may also produce dry steam for generation of additional shaft power depending on the wet steam and power demands in the different phases of a hydrocarbon recovery process. For example, the HRSG may be designed to convert 50% of the available exhaust heat to dry steam to provide added power production for a nearby heavy oil upgrading, pumping or compression facilities and convert the remaining exhaust heat to produce wet steam for a thermal recovery process. Furthermore, the HRSG design may be flexible to control the steam flow from the dry steam system, for example by controlling the pressure of the steam drum and/or steam coils, to affect the heat transfer balance between the dry and wet steam systems. For example, by raising the dry steam pressure in the drum and steam coils, less dry steam is boiled off due to the higher boiling temperature thus leaving more exhaust heat in the HRSG to produce additional wet steam.

[0043] The HRSG cools the exhaust stream from the gas turbine engine in the combined cycle power plant, which causes water formed in the combustion to condense out. Further cooling of the stream, for example in an exhaust gas recirculation system, can remove more water from the exhaust gas. The condensed water, or condensate, can be purified and used as a source of water for the steam production. As many hydrocarbon production processes are located in areas with limited water resources, this can provide an additional source of water for the processes.

[0044] A number of techniques have been developed for producing heavy oil from subsurface formations using thermal recovery operations. Thermal recovery operations are used around the world to recover liquid hydrocarbons from both sandstone and carbonate reservoirs. These operations include the conventional suite of steam based in-situ thermal recovery techniques, such as CSS, steam-flooding, and SAGD, as well as surface mining and their associated thermal based surface extraction techniques.

[0045] SAGD techniques are based on a continuous injection of steam through a first

well to lower the viscosity of heavy oils and a continuous production of the heavy oil from a lower-lying second well. In SAGD, two horizontal wells are completed into the reservoir. The two wells are first drilled vertically to different depths within the reservoir. Thereafter, using directional drilling technology, the two wells are extended in the horizontal direction that result in two horizontal wells, vertically spaced from, but otherwise vertically aligned with each other. Ideally, the production well is located above the base of the reservoir but as close as practical to the bottom of the reservoir, and the injection well is located vertically 10 to 30 feet (3 to 10 meters) above the horizontal well used for production.

[0046] The upper horizontal well is utilized as an injection well and is supplied with steam from the surface. The steam rises from the injection well, permeating the reservoir to form a vapor chamber that grows over time towards the top of the reservoir, thereby increasing the temperature within the reservoir. The steam, and its condensate, raise the temperature of the reservoir and consequently reduce the viscosity of the heavy oil in the reservoir. The heavy oil and condensed steam will then drain downward through the reservoir under the action of gravity and may flow into the lower production well, whereby these liquids can be pumped to the surface. At the surface of the well, the condensed steam and heavy oil are separated, and the heavy oil may be diluted with appropriate light hydrocarbons for transport by pipeline.

[0047] As a result of the unique wellbore configuration in SAGD, any condensate injected into the reservoir with the steam will fall directly to the underlying production well due to the influence of gravity, and thereby not contribute to the recovery of the hydrocarbons. For this reason, in SAGD projects such as those operating in the Athabasca region of Alberta, the current convention is to separate the condensate and only inject the steam phase into the injection wells used in the recovery process. The steam phase after the condensate has been removed is commonly referred to as dry steam.

[0048] In various embodiments, the HRSG of the combined cycle plant includes two steam generation systems, each being fed a different quality of water and producing a correspondingly different quality of steam. For example, a first stream of steam of low quality can be produced for use in hydrocarbon recovery process, while a second stream of high quality steam can be produced for use in generating additional shaft power in a gas turbine system. The first and second streams of steam can be produced simultaneously or, in some instances, only one stream can be produced. The amount of steam produced in each stream can depend on demand levels for hydrocarbon recovery and/or power generation. In

addition, the condensed water produced as a byproduct of combustion in the combined cycle plant and/or the blowdown water produced by the steam turbine of the combined cycle plant can be used as feed water for producing low quality steam rather than simply being discarded.

Using Exhaust Heat from Combined Cycle Plant for Enhanced Oil Recovery

5 [0049] Fig. 1 is a schematic of a development 100 illustrating the use of thermal recovery systems with a steam producing cogeneration facility. The thermal recovery systems that are illustrated include both a surface mining 102 and extraction recovery process, and a subsurface thermal recovery process 104, such as cyclic steam stimulation (CSS) or steam
10 assisted gravity drainage (SAGD). The subsurface thermal recovery process 104 allows for recovery of hydrocarbons from a reservoir 106 that is too deep for surface mining. It will be clear that the techniques described herein are not limited to this combination, or these specific techniques, as any number of techniques or combinations of techniques may be used in embodiments described herein. For example, the SAGD 104 recovery process can instead be a cyclic steam stimulation (CSS) recovery process or other thermal recovery process.

15 [0050] The surface mining 102 may be used to reach a portion of the reservoir 106 that is closer to the surface, while the underground 104 recovery may be used to access hydrocarbons in a portion of the reservoir 106 that is at a greater depth. If, however, the reservoir does not have any portion that is easily accessible by surface mining, the surface mining 102 recovery process may be omitted.

20 [0051] In the development 100, a cogeneration facility 108 is used to generate power and steam 110, which can be provided to a surface separation facility 112 and an injection facility 114. The steam 110 may include wet steam only or both wet steam and dry steam, for example, carried in different pipes from the steam generation facility 108.

[0052] The surface mining 102 uses heavy equipment 116 to remove hydrocarbon
25 containing materials 118, such as oil sands, from the reservoir 106. The hydrocarbon containing materials are offloaded at the separation facility 112, where a thermal process, such as a Clark hot water extraction (CHWE) process, among others, may be used to separate a hydrocarbon stream 120 from a tailings stream 122. The tailings stream 122 may be sent to a tailings pond 124, or may be injected into a sub-surface formation for disposal. A water
30 stream 126 may be recycled to the steam generation facility 108. The extraction process may utilize wet steam from the cogeneration facility 108.

[0053] The subsurface thermal recovery process 104 injects the steam 110 into the

reservoir through injection wells **128** to produce hydrocarbons. The injection raises the temperature of a portion **130** of the reservoir **106** to lower the viscosity of the hydrocarbons **131**, allowing the hydrocarbons **131** to flow to collection wells **132**. Although, for the sake of clarity, the injection wells **128** and collection wells **132** are shown as originating from
5 different locations in **Fig. 1**, these wells **128** and **132** may be drilled from the same surface pads to enable easier tracking between the wells **128** and **132**. Moreover, if the subsurface thermal recovery process **104** is CSS, a single well may be used for both steam injection and collection of hydrocarbons and steam condensate. The resulting streams **134** from the reservoir **106** may include the hydrocarbons **131** and the condensate from the steam **110**. The
10 streams **134** can be processed at a surface facility **136** to remove at least some of the water. A CSS process may use lower quality steam, e.g., greater than about 70 %, while a SAGD process may utilize higher quality steam, e.g., greater than about 90 %, or dry steam from a steam generator at the cogeneration facility **108**.

[0054] The hydrocarbon stream **138** and water stream **140** from the subsurface thermal recovery process **104** may be sent to a transportation facility **142**, which may provide further separation and purification of the incoming streams **120**, **138**, and **140**, prior to sending the marketable hydrocarbons **106** on to further processing facilities. The resulting process water
15 **144** can be returned to a steam generator at the cogeneration facility **108** for recycling.

[0055] The schematic of **Fig. 1** is not intended to indicate that the development **100** is to include all the components shown in **Fig. 1**. Further, the development **100** may include any number of additional components not shown in **Fig. 1**, depending on the details of the specific implementation.
20

[0056] **Fig. 2** is a simplified block diagram of another development **200** illustrating a detailed view of a cogeneration facility **202** of the development **200**. The cogeneration facility **202** may correspond to the cogeneration facility **108** of **Fig. 1**. The cogeneration facility **202** includes a gas turbine system **204**, which may be characterized as a power-producing semi-closed Brayton cycle. In various embodiments, the gas turbine system **204** includes a combustion chamber (not shown) for combusting a fuel **206** mixed with a compressed oxidant **208**. The fuel **206** may include any suitable hydrocarbon gas or liquid,
25 such as natural gas, methane, ethane, naphtha, butane, propane, syngas, diesel, kerosene, aviation fuel, coal derived fuel, bio-fuel, oxygenated hydrocarbon feedstock, or any combinations thereof. The oxidant **208** may include any suitable gas containing oxygen, such as air, oxygen-rich air, oxygen-depleted air, pure oxygen, or any combinations thereof.
30

[0057] In addition to a combustion chamber, the gas turbine system **204** includes a main compressor and an expander (not shown). The combustion chamber of the gas turbine system **204** produces an exhaust gas **210**, which can be sent to any variety of apparatuses and/or facilities in an exhaust gas recirculation (EGR) system back to the gas turbine system **204**. As the exhaust gas **210** expands through the expander of the gas turbine system **204**, it generates mechanical power to drive the main compressor of the gas turbine system **204** and an electrical generator **212**, for example, through a shaft **214**. Other systems may also be driven by the mechanical power, such as pumps, compressors, and/or other facilities.

[0058] In some implementations (not shown in **Fig. 2**), the EGR system may include a compressor. As opposed to a conventional fan or blower system, the compressor can compress and increase the overall density of the exhaust gas, thereby directing a pressurized or compressed recycle exhaust gas **216** into the main compressor of the gas turbine system **204**. The compressed recycle exhaust gas **216** can be used to help facilitate a stoichiometric or substantially stoichiometric combustion of the oxidant **208** and fuel **206** by moderating the temperature of the combustion products.

[0059] The EGR system of the cogeneration facility **202** includes a heat recovery steam generator (HRSG) **218**, or similar device. The HRSG **218** delivers a first stream of steam **220** to a steam turbine **222**. In various embodiments, the combination of the HRSG **218** and the steam turbine **222** are part of a power-producing closed Rankine cycle. The gaseous exhaust stream **210** is introduced to the HRSG **218** and is used to generate the first stream of steam **220** and a recycled exhaust gas **216**. The HRSG **218** may optionally include a catalytic system to reduce residual oxygen, carbon monoxide, hydrogen, unburned hydrocarbons, or other products of incomplete combustion in the exhaust gas **210**.

[0060] In some embodiments, the first stream of steam **220** is sent to the steam turbine **222**, as shown, to generate additional mechanical power. The additional mechanical power can be used to power a separate generator. Alternatively, the steam turbine **222** can be coupled, for example, through a gear box, to the shaft **214** of the gas turbine system **204** to supplement the mechanical energy generated by the gas turbine system **204**. In some embodiments, the first stream of steam **220** is dry steam (*i.e.*, high quality steam), which, relative to wet steam, reduces the likelihood of scaling and associated damage on the inside of the steam turbine **222**.

[0061] The HRSG **218** also delivers a second stream of steam **224** to a thermal recovery system **226** to facilitate recovery of viscous hydrocarbons from a reservoir or from material

removed from a reservoir. The thermal recovery system **226** may implement a SAGD process, a steam-flooding process, a CSS process, a CHWE process, or the like. In some embodiments, the second stream of steam **224** is wet steam (*i.e.*, low quality steam), as shown. However, as will be explained in more detail below with reference to **Fig. 4**, the second stream of steam may instead be dry stream. The cogeneration facility **202** is not limited to delivering the second stream of steam **224** to a thermal recovery system **226**. In addition or alternatively, the cogeneration facility **202** may deliver the second stream of steam **224**, or a third stream of steam, to a system that uses the stream of steam in a utility heating process, a process heating process, and/or a steam stripping process.

10 [0062] The block diagram of **Fig. 2** is not intended to indicate that the development **200** is to include all the components shown in **Fig. 2**. Further, the development **200** may include any number of additional components not shown in **Fig. 2**, depending on the details of the specific implementation. For example, the development **200** may include any number of additional valves, gear boxes, sensors, control systems, condensers, or the like.

15 [0063] **Fig. 3** is a simplified block diagram of another development **300** illustrating a detailed view of a cogeneration facility **302** of the development **300**. Certain elements in **Fig. 3** have the same function as corresponding elements in **Fig. 2** and, accordingly, are referenced with the same reference number as in **Fig. 2**. For example, the cogeneration facility **302** of the development **300** includes the gas turbine system **204**. The gas turbine system **204** can include a combustion chamber for combusting the fuel **206** mixed with the compressed oxidant **208**. The combustion chamber of the gas turbine system **204** produces exhaust gas **210**, which can be sent to any variety of apparatuses and/or facilities in an exhaust gas recirculation (EGR) system **304** back to the gas turbine system **204**. As the exhaust gas **210** expands through an expander of the gas turbine system **204**, it generates mechanical power to drive the main compressor of the gas turbine system **204** and the electrical generator **212** through the shaft **214**.

20 [0064] The EGR system **304** is fluidly coupled to the HRSG **218** to transport and process the partially cooled gas turbine exhaust gas **216** back to the gas turbine system **204**. The EGR system **304** may include various components (not shown), an exhaust gas cooler such as a direct contact cooler or shell and tube heat exchanger or air-fin heat exchanger to reduce the temperature of the exhaust gas to about 4-66 degrees Celsius (°C), a water spray to remove dust or debris from the exhaust gas, and/or an inertial separator to remove water droplets and mist from the cooled recycle exhaust gas in line **216**. The EGR system **304** may also include

a blower, fan, or compressor to increase the pressure of the recycle exhaust gas by about 1-21 kPa. The blower, fan, or compressor can compress and increase the overall density of the recycle exhaust gas, thereby directing a pressurized or compressed recycle exhaust gas in line **216** into the main compressor of the gas turbine system **204**. The pressurized recycle exhaust gas can be used to help facilitate a stoichiometric or substantially stoichiometric combustion of the oxidant **208** and fuel **206** by moderating the temperature of the combustion products.

[0065] The HRSG **218** of the cogeneration facility **302** generates and delivers the first stream of steam **220** to the steam turbine **222** to generate additional mechanical power. The additional mechanical power can be used to power a separate electrical generator. Alternatively, the steam turbine **222** can be coupled, for example, through a gear box, to the shaft **214** of the gas turbine system **204** to supplement the mechanical energy generated by the gas turbine system **204**. Other systems may be driven by the mechanical power, such as pumps, compressors, and/or other facilities.

[0066] The HRSG **222** also generates and delivers the second stream of steam on line **224** to a thermal recovery system **226** to facilitate recovery of viscous hydrocarbons from a reservoir. The thermal recovery system **226** may implement a SAGD process, a steam-flooding process, a CSS process, a CHWE process, or the like.

[0067] In some embodiments, the first stream of steam **220** is high quality steam, and the second stream of steam **224** is low quality steam. In addition or alternatively, the cogeneration facility **302** may deliver the second stream of steam **224**, or a third stream of steam, to a system that uses the stream of steam in a utility heating process, a process heating process, and/or a steam stripping process.

[0068] A water return system **306** provides at least a portion **308** of the feed water used in the HRSG **218**. The water return system **306** receives water **310** produced from the thermal recovery system **226**. The water **310** produced by the thermal recovery system **226** may first be separated from other well fluids before being sent to the water return system **306**. The water return system **306** may process received water by filtration, stripping, pH control and/or other means so that it is suitable for use as feed water to the HRSG **218**.

[0069] Another source of water to the water return system **306** is water produced by the combustion of fuel and oxidant within the gas turbine system **204**. At least some water in the recycle exhaust gas **216** is condensed as the recycle exhaust gas is cooled. This condensed water **312** may be transported to the water return system **306** for processing and used to

make-up an imbalance between the flow rates of the steam **224** and the produced water **310**. In some cases, the condensed water **312** may exceed the amount used for make-up, and some water may be exported or stored as indicated by an arrow **314**. In other cases, the condensed water **312** may be inadequate and additional water from storage or external supplies may be received to make-up the stream of steam to the thermal recovery system **226** as indicated by the arrow **314**.

[0070] The water return system **306** may also include a water purification system for preparing the portion **308** of water used as the make-up water to the HRSG **218**. The water purification system can use any number of systems known in the art to filter the water, adjust the pH of the water, removed dissolved gases, remove dissolved oxygen, or remove dissolved solids. Such techniques can include, for example, hot lime softening which may lower the concentration of contaminants by forcing their precipitation. Any number of other techniques may also be used alone or in various combinations, including filtration, steam stripping, evaporative purification (distillation), membrane purification, chemical purification, ion exchange, and the like. For example, the condensed water **312** from the exhaust gas recirculation system **304** and HRSG **218** will generally be at a low pH, e.g., about 4 pH units, as a result of dissolved CO₂ in the exhaust. The low pH may cause damage to the HRSG **218** as the steam is formed. To decrease this problem, a steam stripper may be used to remove the dissolved CO₂ and shift the pH to a higher level. Steam stripping may also be used, alone, or in combinations with oxygen scavengers, to remove oxygen from the portion **308** of the feed water used in the HRSG **218** to lower the amount of oxygen injected by the thermal recovery process **226**. Further, chemicals, such as sodium sulfate, sodium carbonate, or others, can be added to increase the pH to between about 7 to about 9 pH units.

[0071] Water **310** produced from the thermal recovery process **226** may have suspended or dissolved solids, or both, from the formation. Suspended solids may be removed by passing the water **310** through a filtration system, for example, including fiber or ceramic filter cartridges, among others. Dissolved solids can be removed by reverse osmosis, among other known techniques. In an embodiment, the dissolved solids are not removed, but allowed to pass through a low quality steam generator. Generation of low quality steam, e.g., 70 % to 90 % steam, is less likely to cause fouling of a steam generator from dissolved solids.

[0072] Generally, since the wet CSS steam is not superheated and generally has a steam quality in the range of 70 to 100%, the requirements for the CSS feed water quality are not as stringent as those for the feed water that is returned to or used as make-up to the steam

turbine generation system.

[0073] The HRSG **218** may include two steam generation systems, a first one for the stream of steam **220** for the steam turbine **222**, and a second one for the stream of steam **224** for the thermal recovery system **226**. The first steam generation system can use high quality boiler feed water to produce high pressure, highly superheated steam for the steam turbine **222** while, in some embodiments, the thermal recovery system **226** provides wet steam and, therefore, requires lower quality boiler feed water that is consistent with re-use of water produced from the hydrocarbon reservoir with less extensive water treatment than would be required for the steam turbine **222**. Accordingly, the water return system **306** may process and produce water of a first quality as feed water for the first steam generation system of the HRSG **218** and water of a second quality as feed water for the second steam generation system of the HRSG **218**.

[0074] In addition, the steam turbine **222** generally requires less steam blow down and therefore less water makeup, while certain thermal recovery systems, such as a CSS system, effectively have a large continuous blow down (*i.e.*, wet steam is generally produced) and require more water make-up to replace water that is not recovered from the hydrocarbon reservoir. Therefore, the HRSG **218** may receive the steam blowdown **316** from the steam turbine **222** and use the steam blowdown **316** as make-up feed water for the thermal recovery system **226**. Using the steam blowdown **316** as make-up feed water is a better alternative to the conventional practice of disposal, which is wasteful and which can have harmful effects on the environment.

[0075] The gas turbine system **204** may be adapted to extract a purge stream **318** from the recycle exhaust gas **216**. Moreover, the EGR system **304** may be adapted to extract a part of the recycle exhaust gas **222** as a product gas or alternate purge stream **320** prior to delivery of the recycle exhaust gas **216** back to the gas turbine system **204**. The purge stream **318** from the gas turbine system **204** and/or the alternate purge stream **320** from the EGR system **304** are fluidly coupled to a gas separation system **322**. The gas separation system **322** may optionally include a catalytic system similar in purpose to the system described in the HRSG **218** to further remove products of incomplete combustion remaining in the purge stream **318** and/or alternate purge stream **320**.

[0076] The gas separation system **322** may receive the purge stream **318** and/or alternate purge stream **320** and may employ any suitable gas separation technology to separate CO₂ from an inert gas in the extraction stream **318** and **320**. Suitable gas separation technologies

include, but are not limited to, solvent extraction using amines, hot potassium carbonate, or other solvents, molecular sieve separation, and solid sorbent separation. The products of the gas separation system **322** are a CO₂ rich stream **324** and a CO₂ lean stream **326**. In some embodiments, the CO₂ lean stream **326** mainly consists of inert gases, such as nitrogen.

5 These separated streams may be used separately, in conjunction with each other, or in conjunction with other production well fluids (*e.g.*, natural gas), to enhance a hydrocarbon thermal recovery process carried out in the reservoir **106** or another proximate hydrocarbon reservoir. Proximate reservoirs may be those local to the viscous hydrocarbon reservoir **106** or those within an economic transport distance by pipeline or other transport methods.

10 [0077] For example, the CO₂ rich stream **324** may be fed to a reservoir miscible flood process **328** for combined injection with steam, *e.g.*, the stream of steam in line **224**, into a reservoir. Injection of CO₂ with steam stimulation may increase recovery of viscous hydrocarbons relative to steam stimulation alone. Alternatively, the CO₂ rich stream **324** can be used for sales, used in another processes requiring CO₂, and/or further compressed and
15 injected into a terrestrial reservoir for sequestration or another purpose. The CO₂ lean stream **326** may be fed to a reservoir pressure maintenance system **330** for maintenance of pressure levels in the reservoir **106** or another proximate hydrocarbon reservoir.

[0078] The gas separation system **322** may separate anywhere from zero to 100% of the CO₂ from the purge extraction or alternate purge extraction streams. The separation
20 percentage may be established by the separation technology employed or by the quantity of CO₂ or inert gas required in a specific application. In some applications, only inert gases may be required, and no CO₂ separation technology may be employed within the gas separation system **322**. Further, the gas separation system **322** may operate at a low pressure similar to that of the alternate purge stream **320** and may include compressors to increase the pressure
25 of the CO₂ rich stream **324** and/or the CO₂ lean stream **326**. Alternatively, the gas separation system **322** may operate at a high pressure similar to that of the purge stream **318** to reduce the size of the CO₂ separation equipment and include additional compression as required for the product streams. The gas separation system **322** may also operate at higher pressures than
30 either purge stream **318** or **320** by compressing the purge stream **318** or **320** to reduce the size of the CO₂ separation equipment and reduce or eliminate the need for additional compression of the product streams **324** and **326**. Some CO₂ separation processes, such as hot potassium carbonate (Hot Pot), are only economical at higher pressures and, therefore, low pressure extraction without compression would not be feasible for these processes. In addition, either

purge stream **318** or **320** may be injected into a subterranean reservoir, after any required compression and treating, for enhanced hydrocarbon recovery, pressure maintenance, carbon sequestration or similar methods without separation into CO₂ rich and CO₂ lean streams by a gas separation system **322**. Stream **318**, **320**, **324** or **326** may require further processing prior to injection into a reservoir, such as dehydration or removal of contaminants by filtration, catalytic conversion or similar processes.

[0079] In some embodiments, the cogeneration facility **302** includes a control system or systems (not shown) adapted to control the flow rate at which fuel **206** and oxidant **208** are fed to the combustion chamber of the gas turbine system **204** to cause a near stoichiometric ratio of fuel and oxidant such that the equivalence ratio of the combustion is maintained in the range of 0.8 to 1.2, 0.9 to 1.1, 0.95 to 1.05, or preferably 0.99 to 1.02, while also achieving desired shaft power, temperature, pressure, flow or similar objectives. The control system or systems may also control the flow rate of the purge streams **318** and/or **320** to maintain a flow or pressure or similar balance within the gas turbine system **204**, the heat recovery steam generator **218**, and the EGR system **304**.

[0080] The block diagram of **Fig. 3** is not intended to indicate that the development **300** is to include all the components shown in **Fig. 3**. Further, the development **300** may include any number of additional components not shown in **Fig. 3**, depending on the details of the specific implementation. For example, the development **300** may include any number of additional valves, gear boxes, sensors, control systems, condensers, or the like.

[0081] **Fig. 4** is a simplified block diagram of a portion **400** of the development **300** illustrating an exemplary HRSG **218**. Like numbered items are as described with respect to previous figures. In the portion **400** shown, the HRSG **218** produces a stream of high quality steam in line **220**, for use by the steam turbine **222**, and a stream of low quality steam in line **224**, for use by the thermal recovery system **226**. Correspondingly, the water return system **306** processes water to produce two streams of feed water. The first feed water stream **402** is of a low quality relative to the second feed water stream **404**. Two steam generators **406** and **408** in the HRSG **218** receive the respective feed water streams and generate the two streams of steam in lines **224** and **220**, respectively. The steam generator **406** also receives the steam blowdown **316** from the steam turbine **228** as another source of feed water.

[0082] A controller (not shown) controls an amount of steam generated by each steam generator **406** and **408**. For example, if a power demand is greater than a demand for hydrocarbon recovery, the controller opens and closes appropriate valves to direct a majority

of the heat from the exhaust gas in line **216** to the steam generator **408**, which generates steam for the steam turbine **222**. Conversely, if the exhaust heat is of greater economical use in recovering hydrocarbons, a majority of the heat is directed to the steam generator **406**, which generates steam for the thermal recovery system **226**. Alternately, similar outcomes
5 may be achieved by controlling the steam drum pressure for steam stream **220** (preferred) or the steam drum pressure for steam stream **224** in a single HRSG without the need to control the exhaust flow among the HRSGs. By increasing the pressure in a steam drum, the temperature at which the steam boils is increased and less heat is transferred in the associated steam coils and less steam is produced in that coil. Consequently, more heat remains in the
10 exhaust flow to produce more steam in the other steam coil. Thus by controlling the steam flow from the steam drums and affecting the pressure in each steam drum, the amount of steam produced in the dry vs. the wet steam systems may be controlled.

[0083] **Fig. 5** is a simplified block diagram of a portion **500** of the development **300** illustrating another exemplary configuration of the HRSG **218**. Like numbered items are as
15 described with respect to previous figures. As in the portion **400** shown in **Fig. 4**, in the portion **500** shown in **Fig. 5**, the HRSG **218** produces a stream of high quality steam **220**, for use by the steam turbine **222**, and a stream of low quality steam **224**, for use by the thermal recovery system **226**. However, in this example, the water return system **306** processes water to produce a single stream of high quality feed water **308**. The two steam generators **406** and
20 **408** in the HRSG **218** receive the feed water stream **308** and generate the two streams of steam **224** and **220**, respectively. To improve the quality of the stream of steam in line **220**, a separator **502** in the HRSG **218** receives steam from the high quality steam generator **408** and separates a vapor phase or dry steam from a liquid phase or condensate. The dry steam leaves the separator **502** via line **220** for use by the steam turbine **222**.

25 [0084] At least a portion of the condensate from the separator **502** can be recycled to an inlet of the low quality steam generator **406**. Typically, less than 100 % of the condensate will be recycled, as any dissolved salts in the condensate will be concentrated over time and can foul the boiler tubes in the steam generator **406**. Therefore, when recycling the condensate, at least a portion is continuously purged to a disposal (not shown) and replaced
30 by clean boiler feed water from the water return system **306**.

[0085] A controller (not shown) can control various elements of the HRSG **224** including a set of valves **504**. The valves **504** can be used to control the flow of steam and condensate to and from the separator **502** to vary the amounts of steam flowing through each of lines **220**

and **224** and the amount of condensate flowing as feed water to the low quality steam generator **406**.

[0086] Although the embodiments of the HRSG **218** shown in **Figs. 4** and **5** implement two steam generators, other numbers of steam generators can be used, and additional streams of steam can be produced. For example, a single steam generator may be used with a single separator to generate a single stream of high quality steam. If low quality steam is desired in such a configuration, a valve can be selectively opened or shut to bypass the separator. Furthermore, more than two steam generators can be used in the HRSG **218**. Example embodiments of an HRSG **218** having multiple steam generators are described, for example, in International Patent Application No. WO/2012-170114 entitled, "Methods and Systems for Providing Steam," published on December 13, 2012, and incorporated herein by reference in its entirety. Moreover, the controller of the HRSG **218** can control the HRSG **218** to produce high quality steam in both steam streams **220** and **224** if, for example, a particular hydrocarbon thermal recovery process calls for the use of high quality steam.

15 Methods for Using Exhaust Heat from Combined Cycle Plant for Enhanced Oil Recovery

[0087] **Fig. 6** is a process flow diagram of a method **600** for using exhaust heat in a combined cycle plant. The method begins at block **602**, at which exhaust heat from a gas turbine system in a combined cycle plant is used to produce steam. At block **604**, at least a first portion of the produced steam is used in a hydrocarbon thermal recovery process. At block **606**, at least a second portion of the produced steam is used to drive a steam turbine in the combined cycle plant.

[0088] At block **608**, at least a third portion of the steam is used in another process such as a utility heating process, a process heating process, and/or a steam stripping process. Water produced as a byproduct of gas combustion in the gas turbine system is used as make-up feed water for production of the at least a first portion of the steam at block **610**. Moreover, blowdown from the steam turbine is used as make-up feed water for production of the at least a first portion of the steam at block **612**.

[0089] The process flow diagram of **Fig. 6** is not intended to indicate that all the blocks of the method **600** shown in **Fig. 6** are to be included in every case. Further, any number of additional blocks not shown in **Fig. 6** may be included in the method **600**, depending on the details of the specific implementation.

[0090] **Fig. 7** is a process flow diagram of another method **700** for using exhaust heat in a

combined cycle plant. At block **702**, high quality steam is produced using exhaust heat from a gas turbine system in a combined cycle plant. At block **704**, low quality steam is also produced using the exhaust heat. An amount of the high quality steam produced relative to an amount of the low quality steam produced is adjusted at block **706**.

5 [0091] At block **708**, a steam turbine is driven using the high quality steam and, at block **710**, the low quality steam is used in a thermal recovery system (*e.g.*, by injecting the low quality steam into a reservoir to thermally recover viscous hydrocarbons in the reservoir), a Clark hot water extraction system, a utility heating system, a process heating system, and/or a steam stripping system. At block **712**, blowdown from the steam turbine is used as make-up
10 feed water for the production of the low quality steam. Water produced as a byproduct of gas combustion in the gas turbine system is used as make-up feed water for the production of the low quality steam at block **714**.

[0092] The process flow diagram of **Fig. 7** is not intended to indicate that all the blocks of the method **700** shown in **Fig. 7** are to be included in every case. Further, any number of
15 additional blocks not shown in **Fig. 7** may be included in the method **700**, depending on the details of the specific implementation.

CLAIMS:

1. A method for generating steam for hydrocarbon production using a combined cycle power plant, including:
 - substantially stoichiometrically combusting a compressed oxidant and a fuel in a combustion chamber in a gas turbine system in the combined cycle power plant, thereby generating an exhaust stream containing combustion products;
 - producing steam using heat from the exhaust stream;
 - condensing a water stream from the combustion products in the exhaust stream; and
 - using the water stream as a make-up water for production of the steam.
2. The method of claim 1, including:
 - chilling the exhaust stream to condense a second water stream;
 - combining the water stream and the second water stream to form a combined water stream; and
 - using the combined stream as the make-up water.
3. The method of claims 1 or 2, including using at least a portion of the steam to drive a steam turbine.
4. The method of claim 3, wherein the steam turbine produces additional shaft power on a shaft of the gas turbine system.
5. The method of claims 3 or 4, wherein the steam turbine produces blowdown, and wherein the method includes using the blowdown as make-up water for production of the steam.
6. The method of any one of claims 3-5, including injecting at least a portion of the steam into a hydrocarbon reservoir in a thermal recovery process for hydrocarbons.


7. The method of claim 6, wherein the thermal recovery process is a cyclic steam stimulation process.
8. The method of claims 6 or 7, wherein the thermal recovery process is a steam assisted gravity drainage process.
9. The method of claims 6, 7, or 8, wherein the thermal recovery process is a Clark hot water extraction process.
10. The method of any one of claims 3-5, wherein the steam turbine produces a blowdown stream, and wherein the method includes using the blowdown stream as make-up feed water for production of the steam used in a thermal recovery process.
11. The method of any one of claims 1-10, including using at least a portion of the steam in a utility heating process, a process heating process, or a steam stripping process, or any combinations thereof.
12. The method of any one of claims 1-11, including recirculating the exhaust stream to the combustion chamber as a diluent for combustion.
13. The method of claim 12, including extracting a portion of the diluent to offset the amount of fuel and oxidant added.
14. The method of claim 13, including separating the extracted portion of diluent into a carbon dioxide rich stream and a carbon dioxide lean stream.
15. The method of claim 14, including injecting the carbon dioxide rich stream into a hydrocarbon reservoir for enhanced oil recovery.

16. The method of claims 14 or 15, including injecting the carbon dioxide rich stream into a subterranean formation for carbon sequestration.
17. The method of claims 14, 15, or 16, including injecting the carbon dioxide lean stream into a hydrocarbon reservoir for pressure maintenance.
18. The method of any one of claims 1-17, including treating the water stream prior to using the water stream as the make-up water.
19. The method of claim 18, including adjusting the pH of the water stream to between about 7 and about 9 pH units.
20. The method of claims 18 or 19, including steam stripping the water stream to remove dissolved gases.
21. The method of claims 18, 19, or 20, including treating the water stream with an oxygen scavenger.
22. The method of any one of claims 3-21, including generating a high quality steam and a low quality steam.
23. The method of claim 22, including using the high quality steam to drive the steam turbine.
24. The method of claim 22 or 23, comprising:
 - obtaining reproduced water from a hydrocarbon thermal recovery system;
 - treating the reproduced water; and
 - using the reproduced water to produce the high quality steam or the low quality steam, or both.


25. The method of claims 22, 23, or 24, including using the low quality steam in a thermal recovery process.
26. A method for using exhaust from a combined cycle plant in hydrocarbon production, including:
substantially stoichiometrically combusting a fuel and an oxidant in a gas turbine system in the combined cycle plant to produce an exhaust stream;
producing steam using exhaust heat from the exhaust stream;
condensing a water stream from the exhaust stream;
using the water stream as a make-up stream for the steam production;
driving a steam turbine with at least a portion of the steam; and
injecting at least another portion of the steam into a hydrocarbon reservoir for a thermal recovery process.
27. The method of claim 26, wherein the portion of steam driving the steam turbine is adjusted based at least in part on a level of output power demanded from the combined cycle plant.
28. The method of claim 27, wherein the thermal recovery process is cyclic steam stimulation.
29. The method of claim 28, wherein the thermal recovery process is steam assisted gravity drainage.
30. The method of any one of claims 27-29, including driving the steam turbine with the steam.
31. The method of claim 30, wherein the steam turbine produces additional shaft power on a shaft of the gas turbine system.

32. The method of claim 31, including:
producing a blowdown stream from the steam turbine; and
providing the blowdown stream as make-up feed water for the production of the steam.
33. The method of any one of claims 26-32, including using the steam in a Clark hot water extraction system, a utility heating system, a process heating system, or a steam stripping system, or any combinations thereof.
34. A system for generating power and thermally recovering hydrocarbons from a reservoir, including:
a gas turbine system configured to produce a hot exhaust stream as a byproduct of substantially stoichiometric combustion of a compressed oxidant and a fuel in a combustion chamber;
a heat recovery steam generator (HRSG) configured to produce a steam stream using the hot exhaust stream, wherein the HRSG produces a condensate stream from the combustion products in the hot exhaust stream; and
a feed system configured to use the condensate stream as at least part of a make-up water provided to the HRSG to generate the steam stream.
35. The system of claim 34, including a steam turbine configured to use at least a portion of the steam stream to generate mechanical power.
36. The system of claims 34 or 35, including an electrical generator driven by mechanical power.
37. The system of claim 35, wherein the steam turbine produces additional shaft power on a shaft of the gas turbine system.


38. The system of any one of claims 34-37, including a hydrocarbon production system configured to use a portion of the steam stream to thermally recover hydrocarbons from a reservoir.
39. The system of claim 38, including a cyclic steam stimulation system.
40. The system of claims 38 or 39, including a steam assisted gravity drainage system.
41. The system of claims 38, 39, or 40, including a Clark hot water extraction system.
42. The system of claim 34, including a water purification system for the condensate stream.
43. The system of claim 42, including a steam stripper configured to decrease dissolved gases in the condensate stream.
44. The system of claims 42 or 43, including a pH adjustment system configured to bring the pH of the condensate stream to between about 7 and about 9 pH units.
45. The system of claims 42, 43, or 44, including a filtration system.

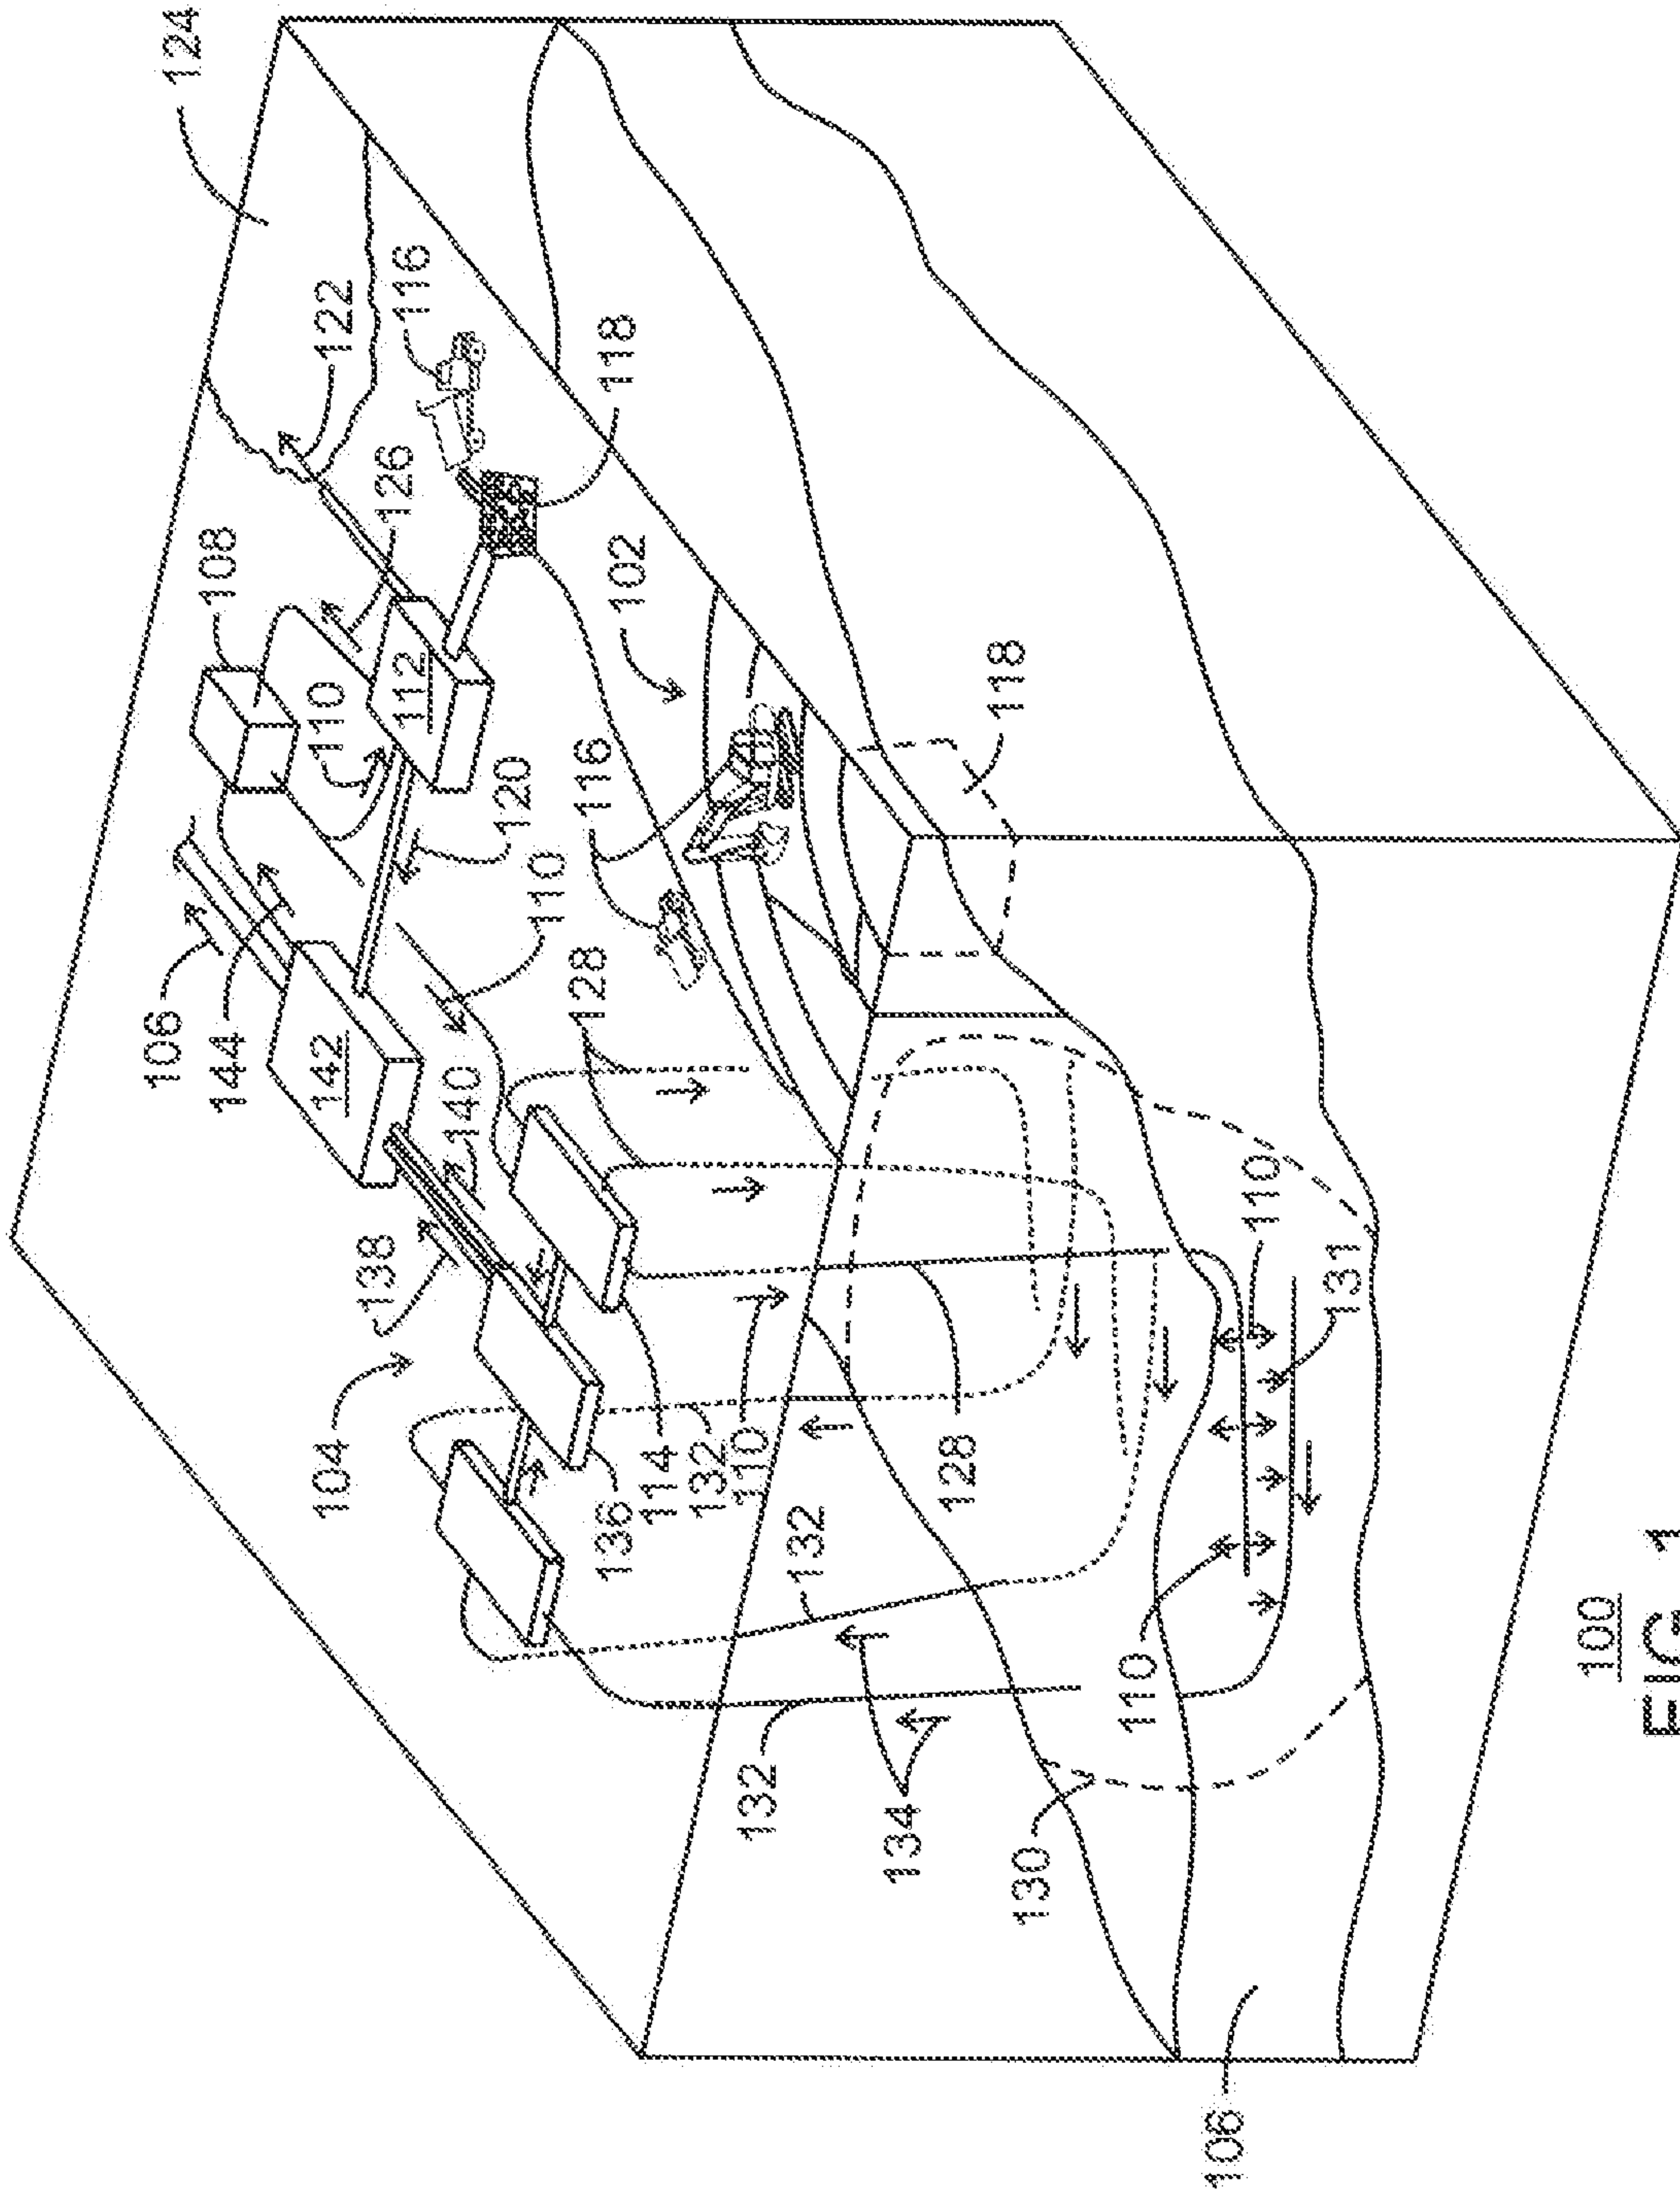

100
FIG. 1

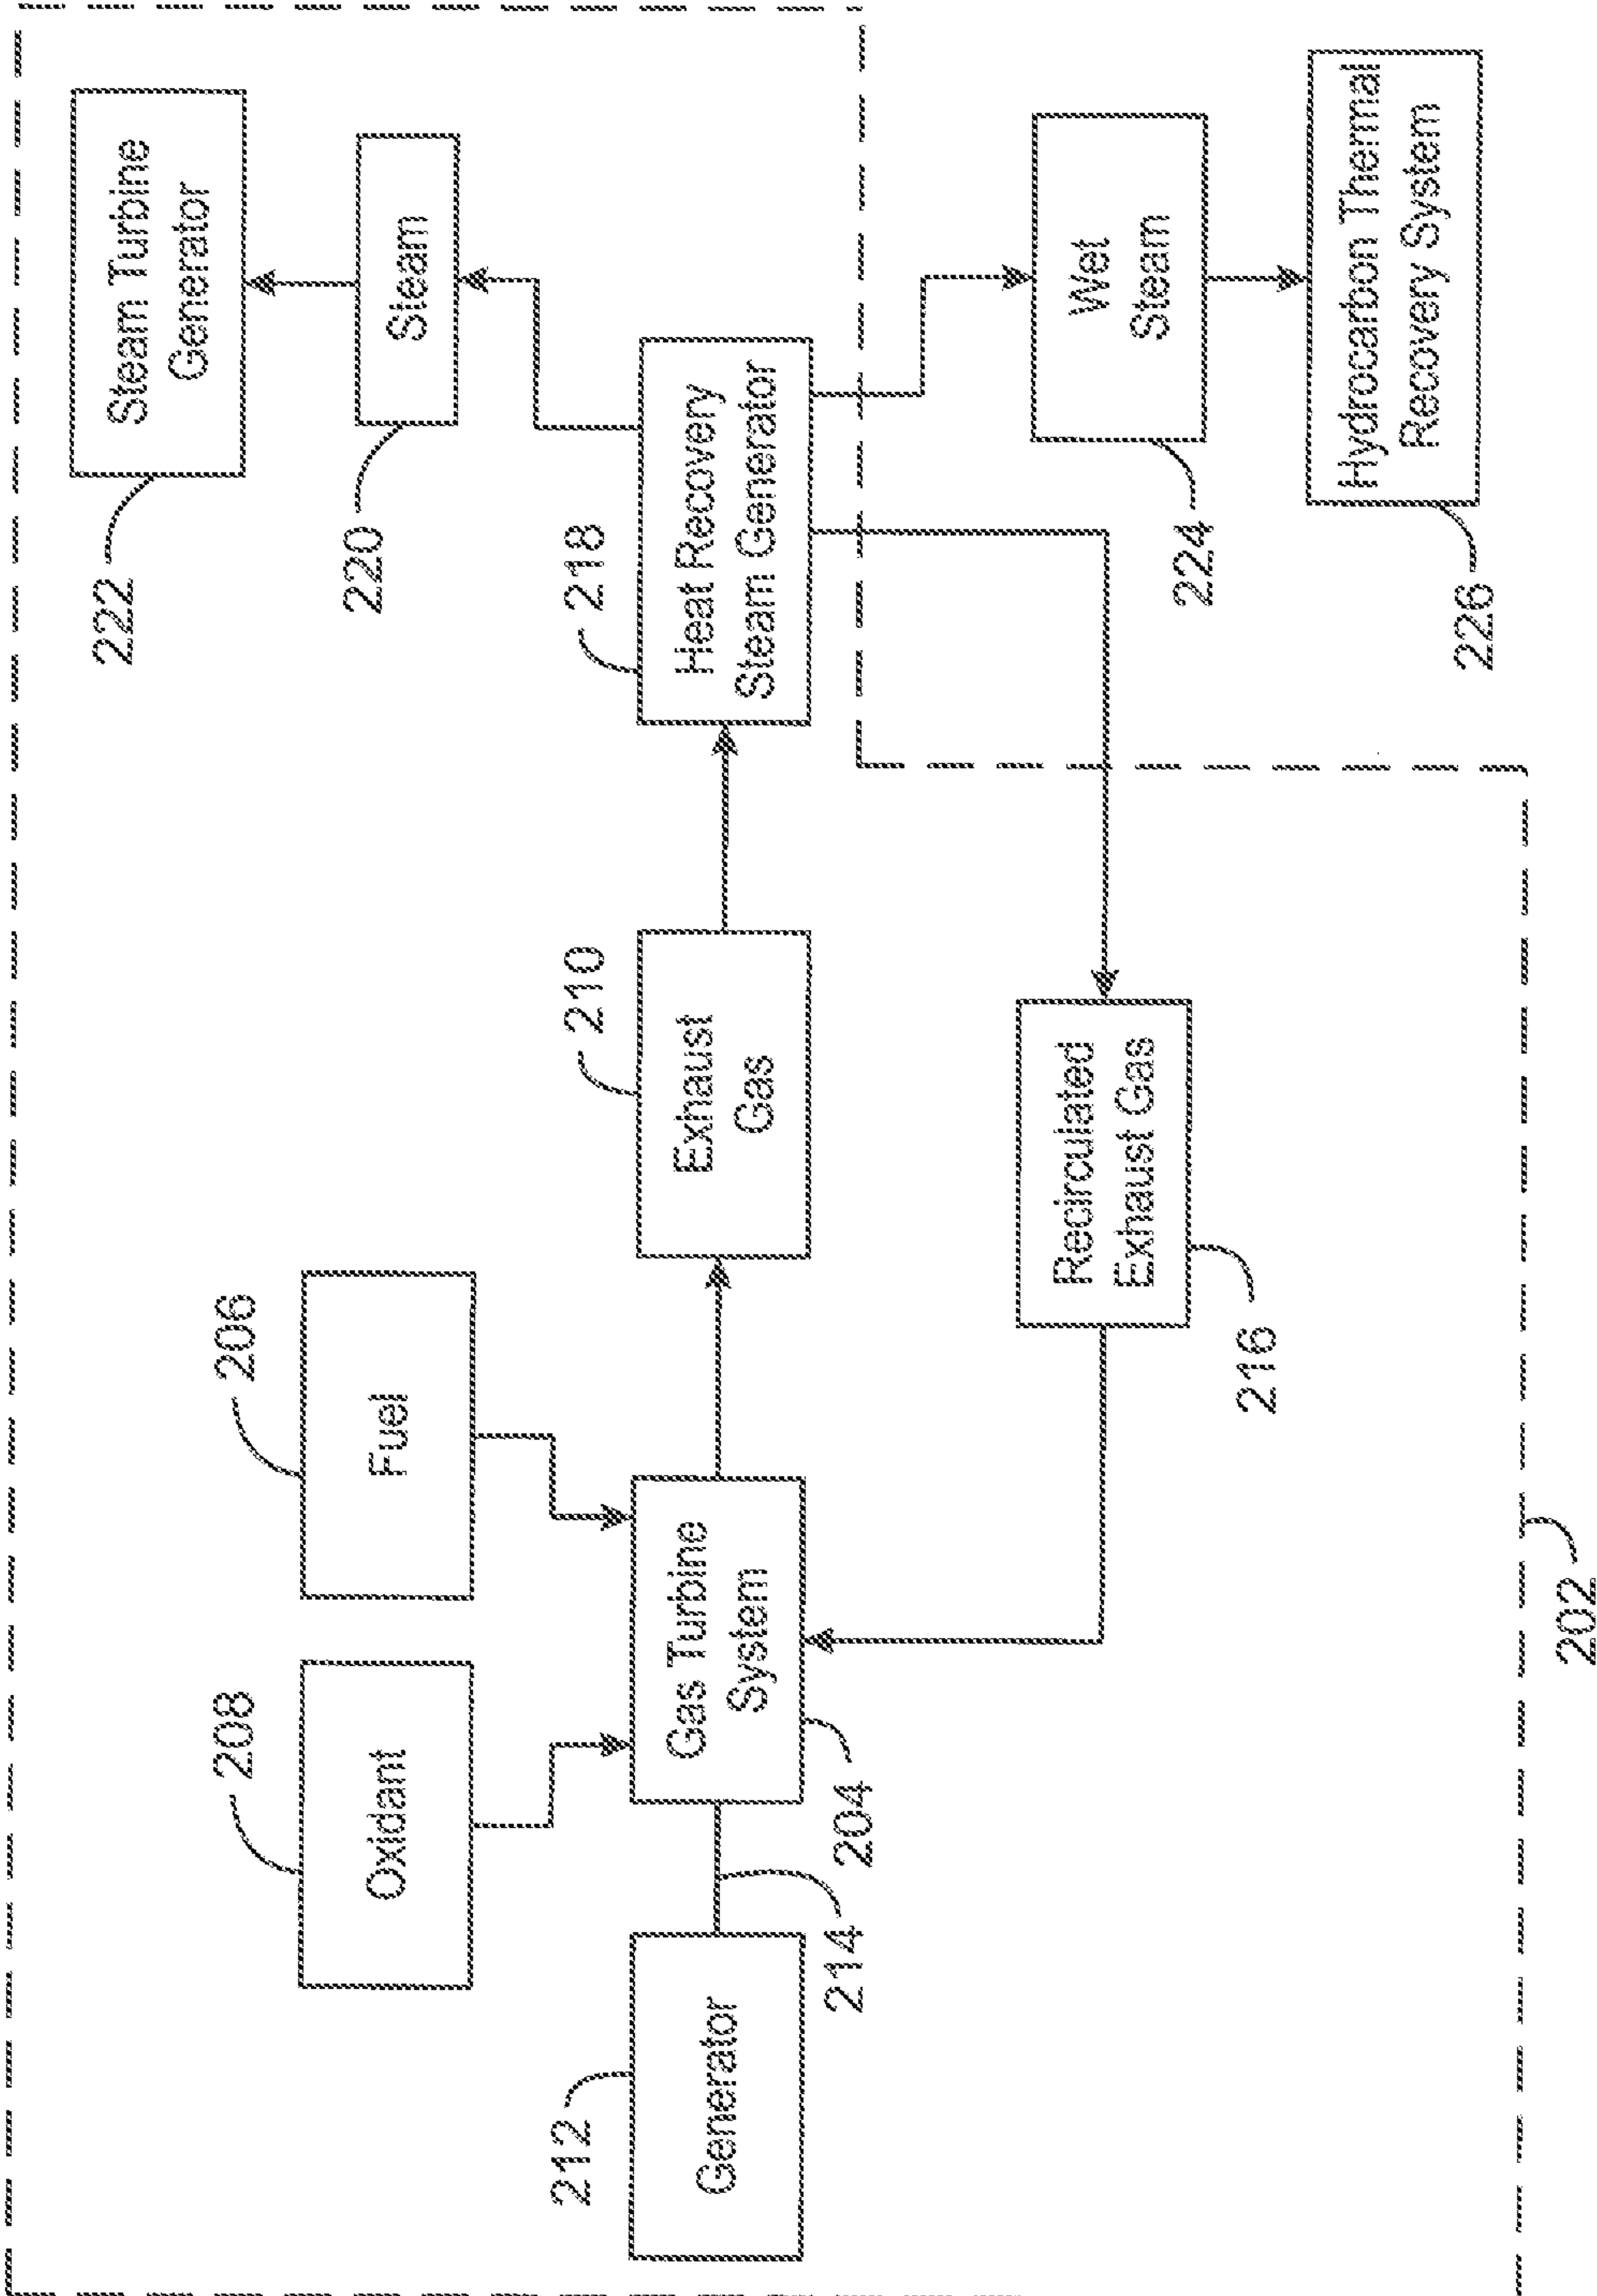


200
FIG. 2

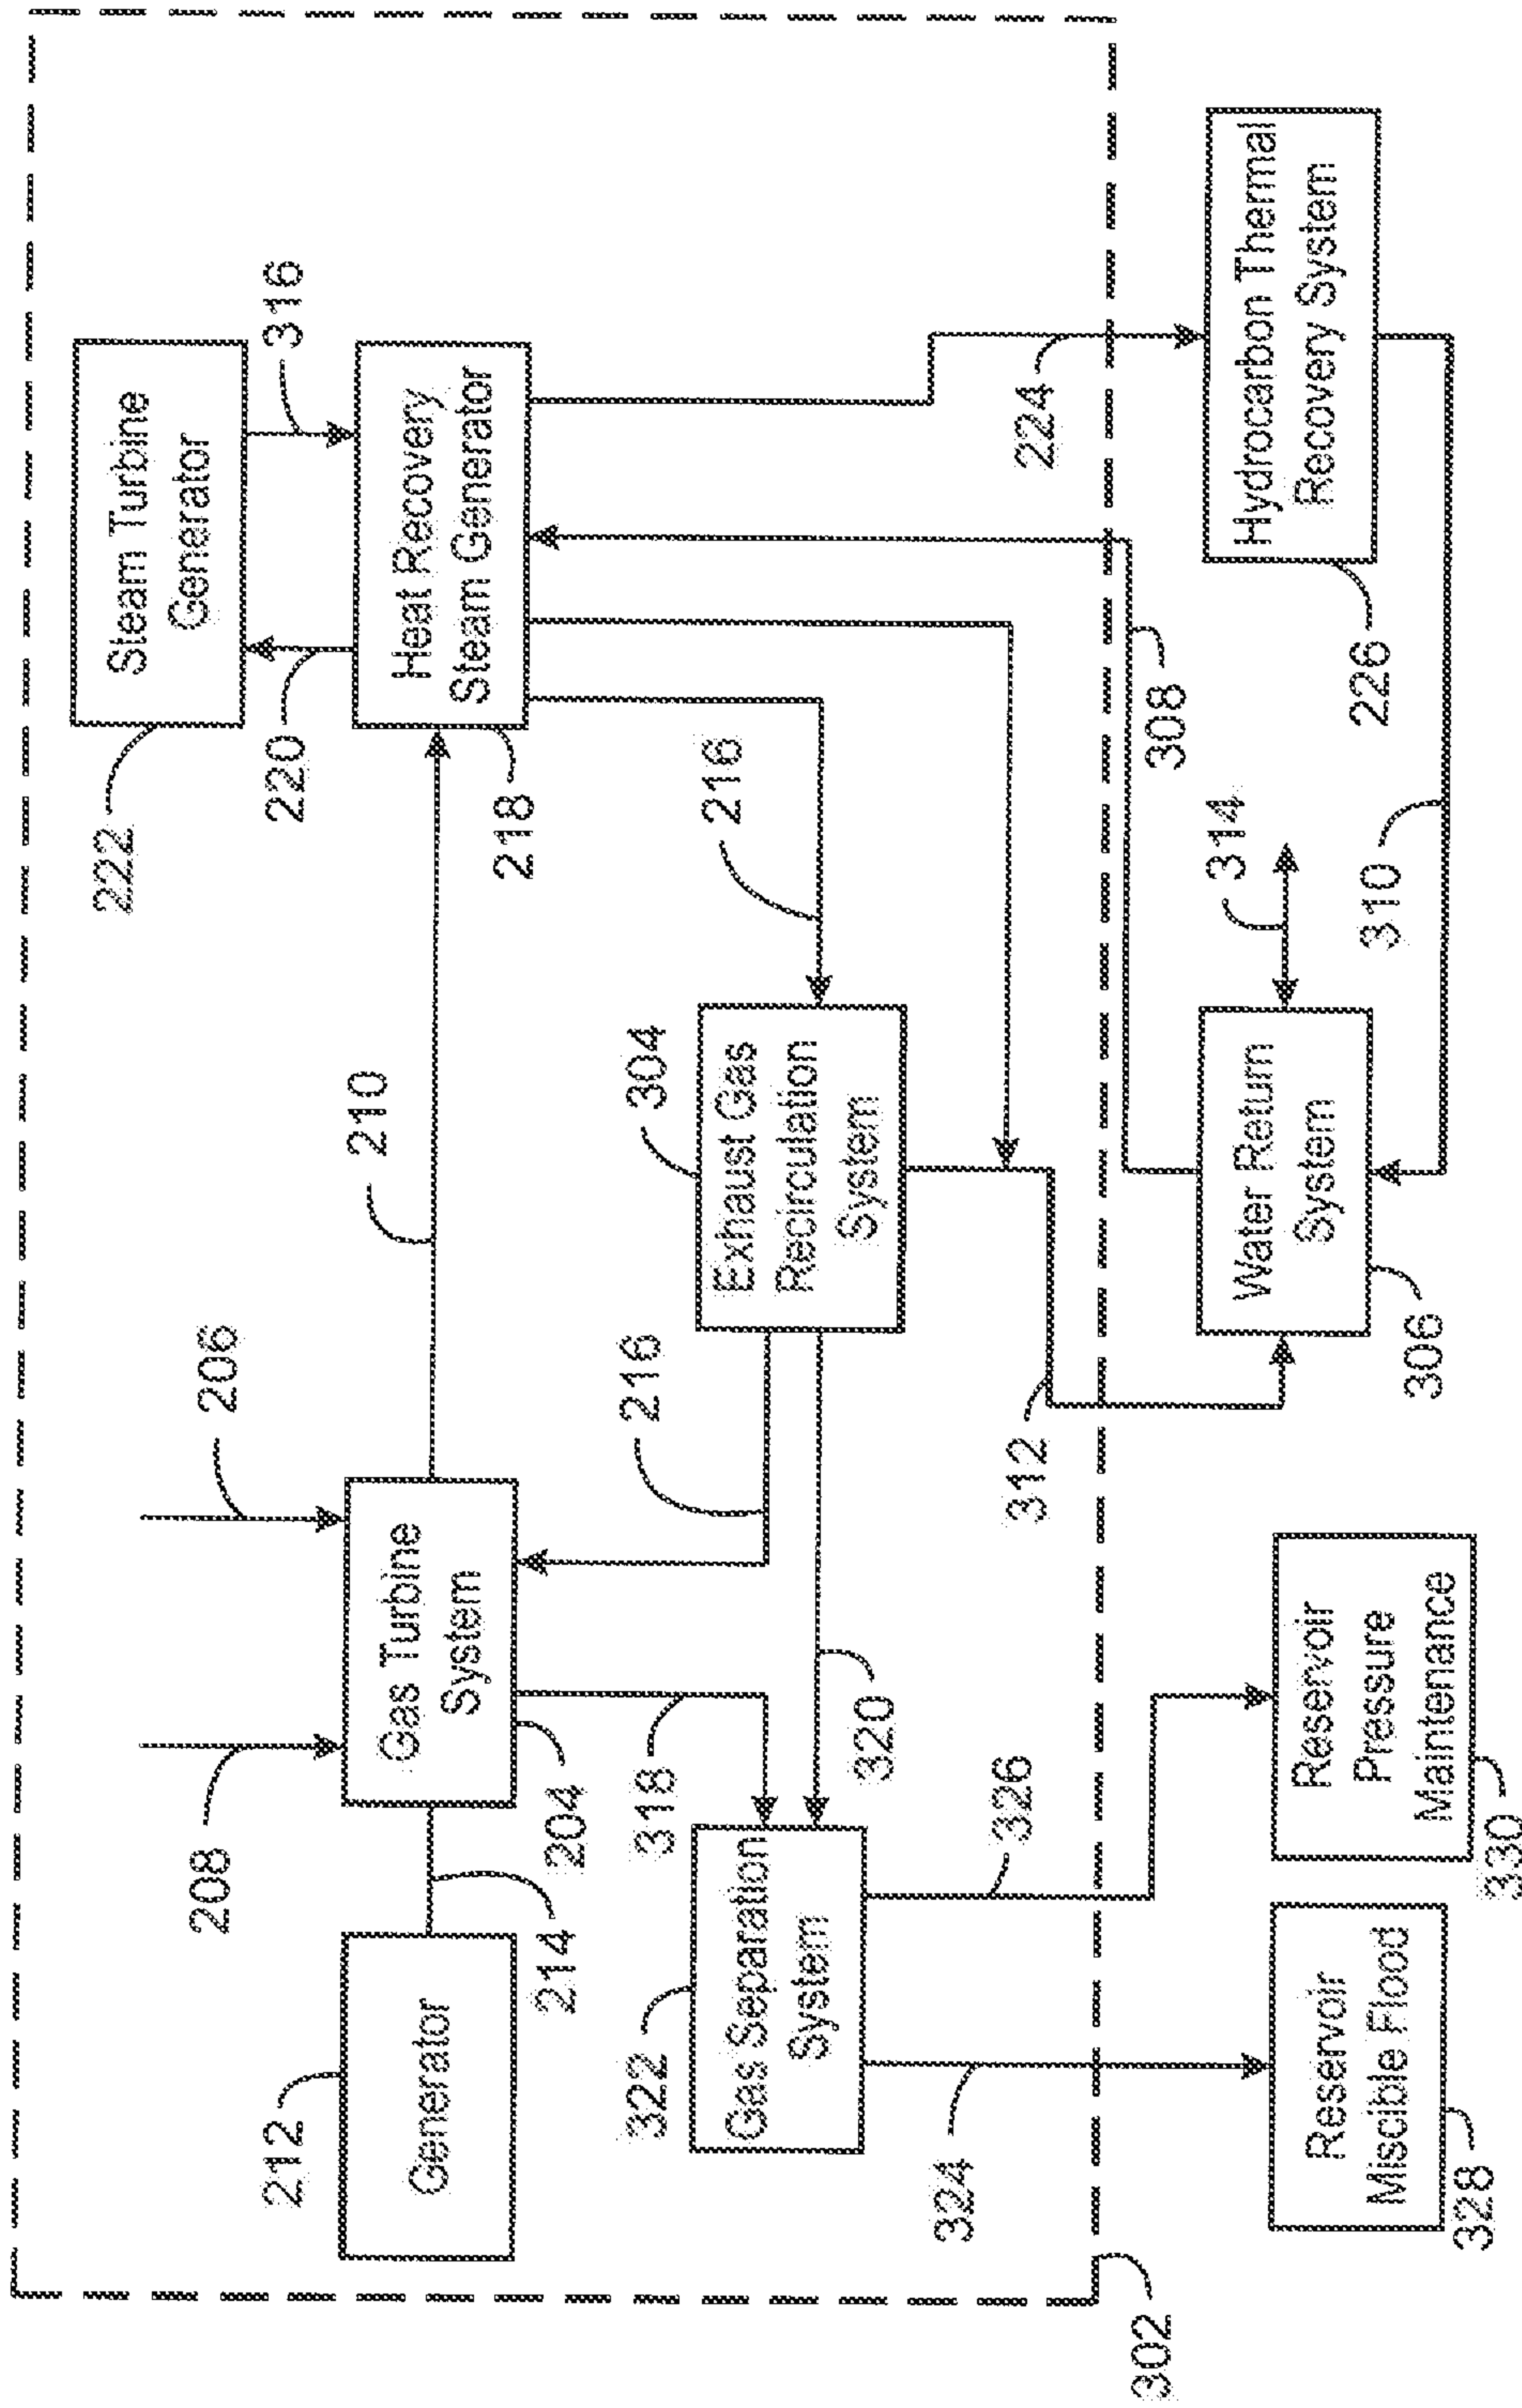


300
FIG. 3


4/7

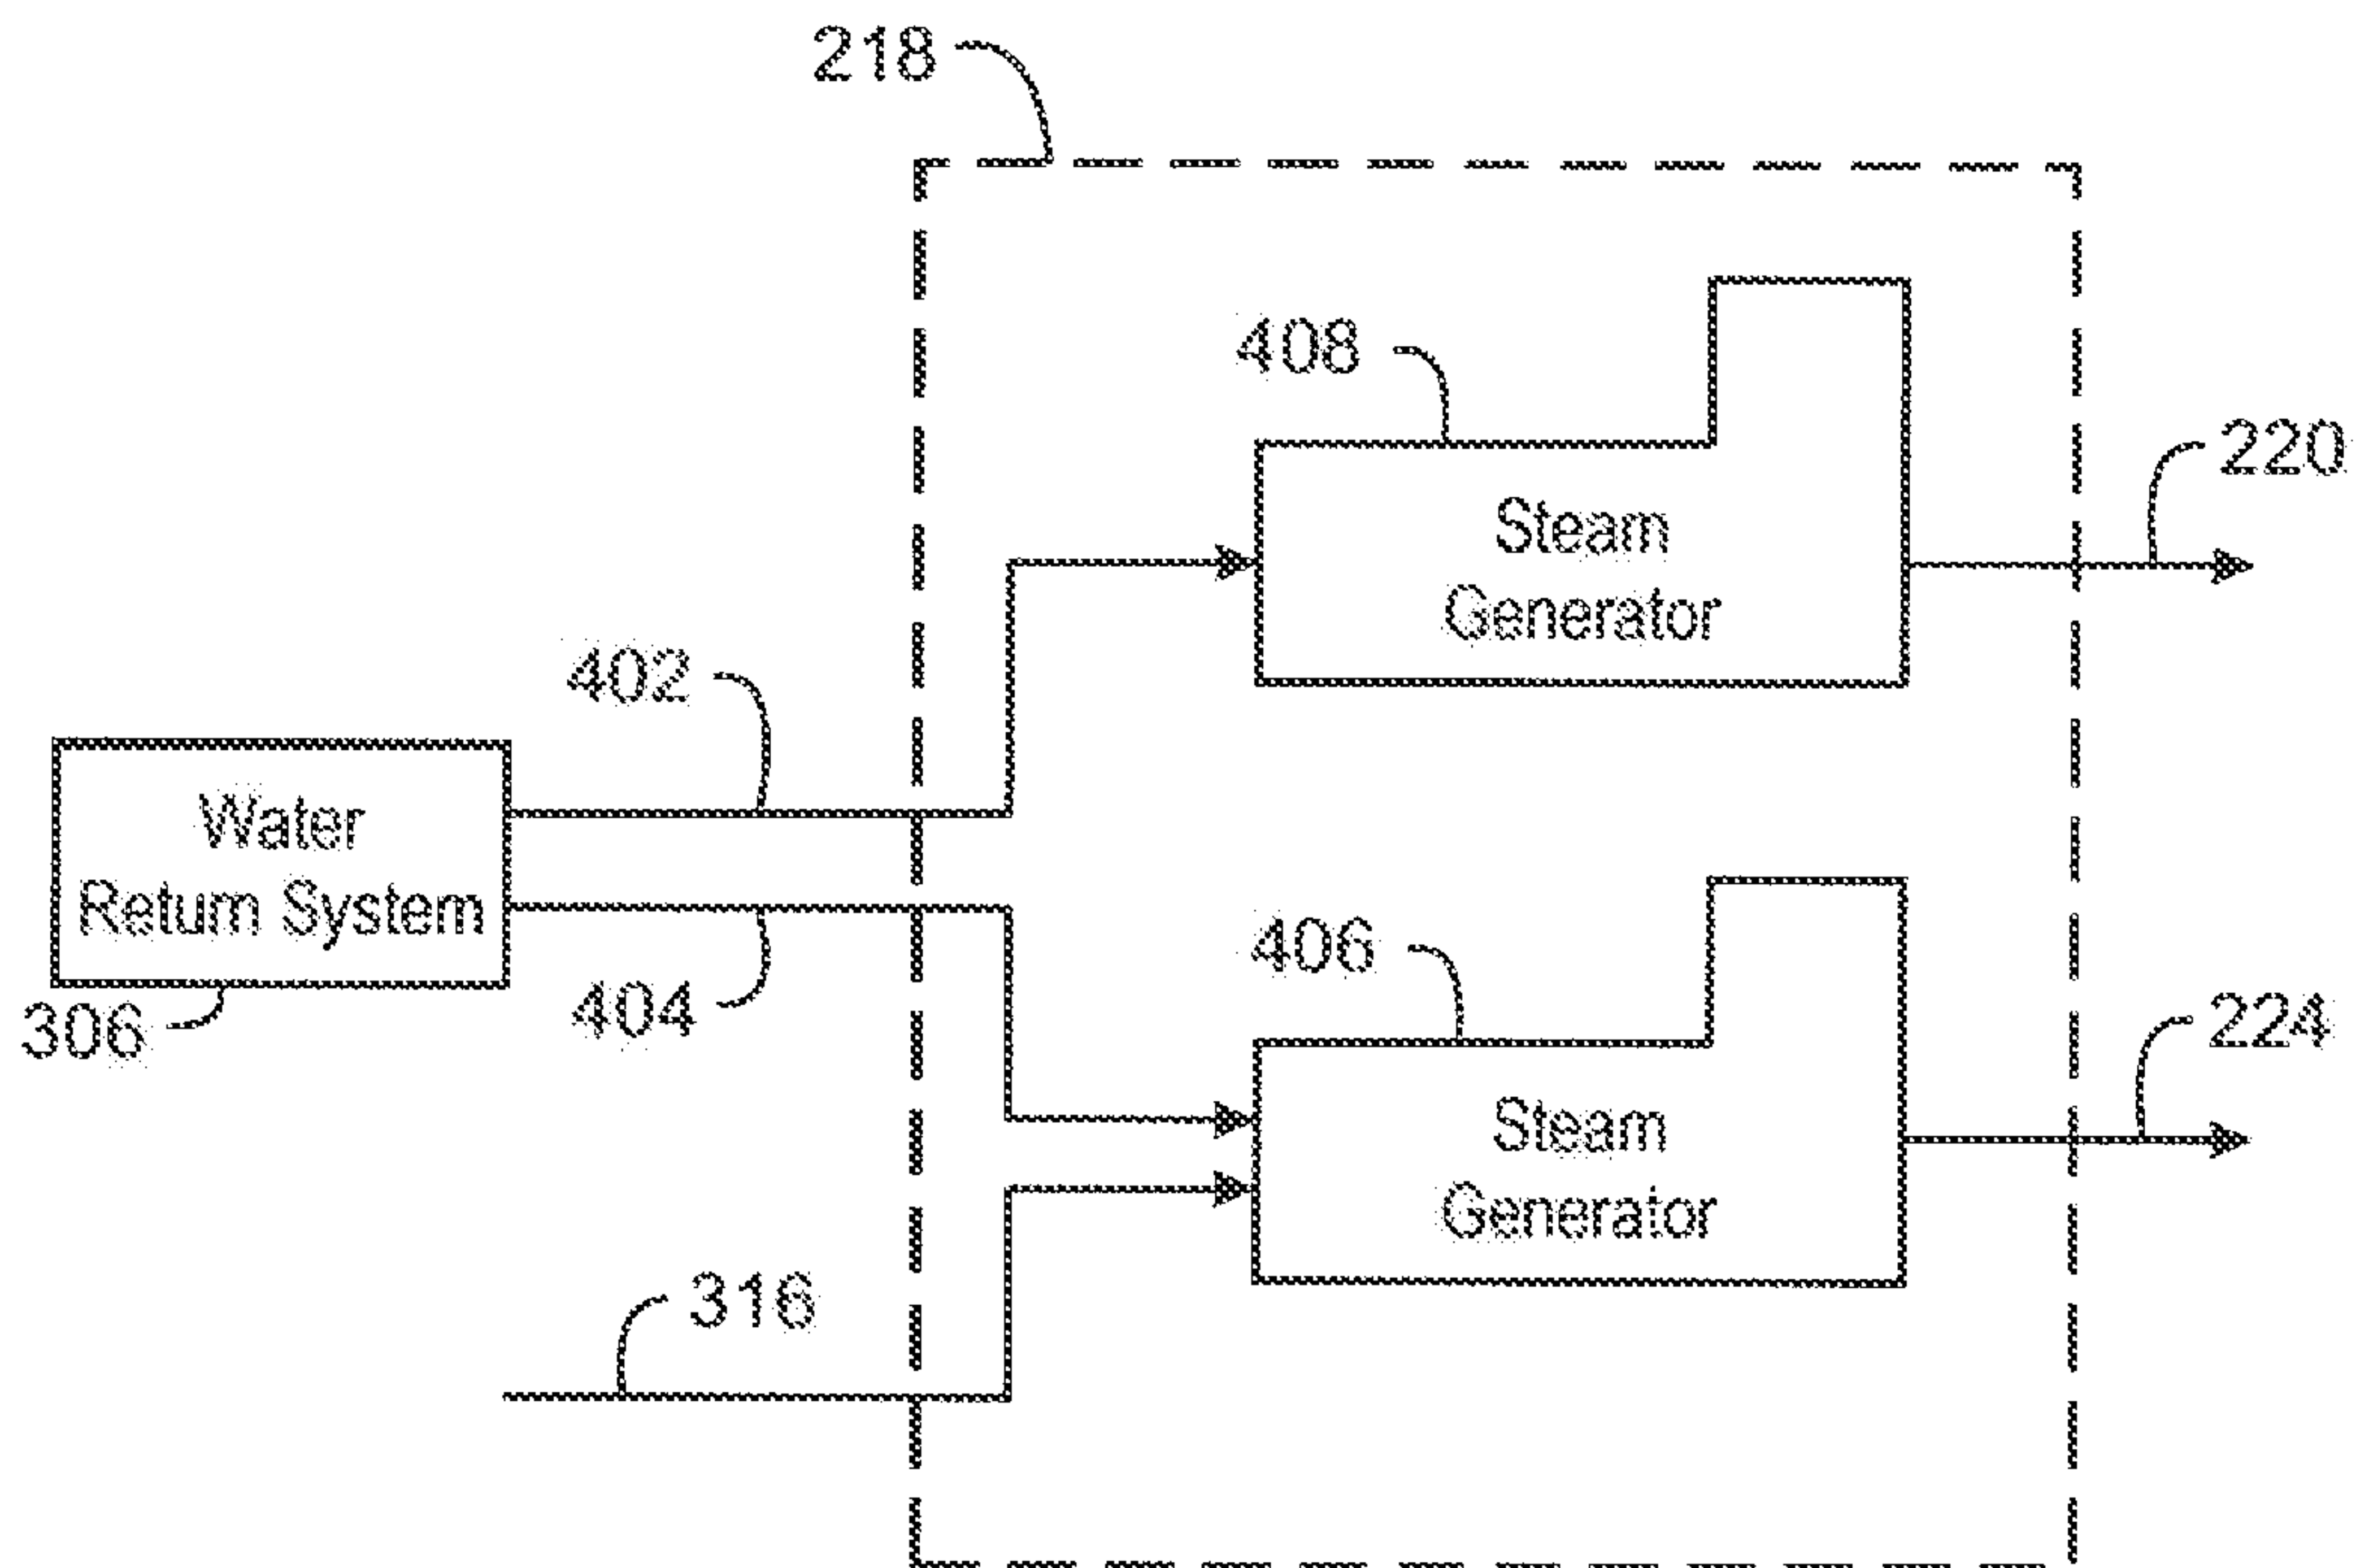


400
FIG. 4

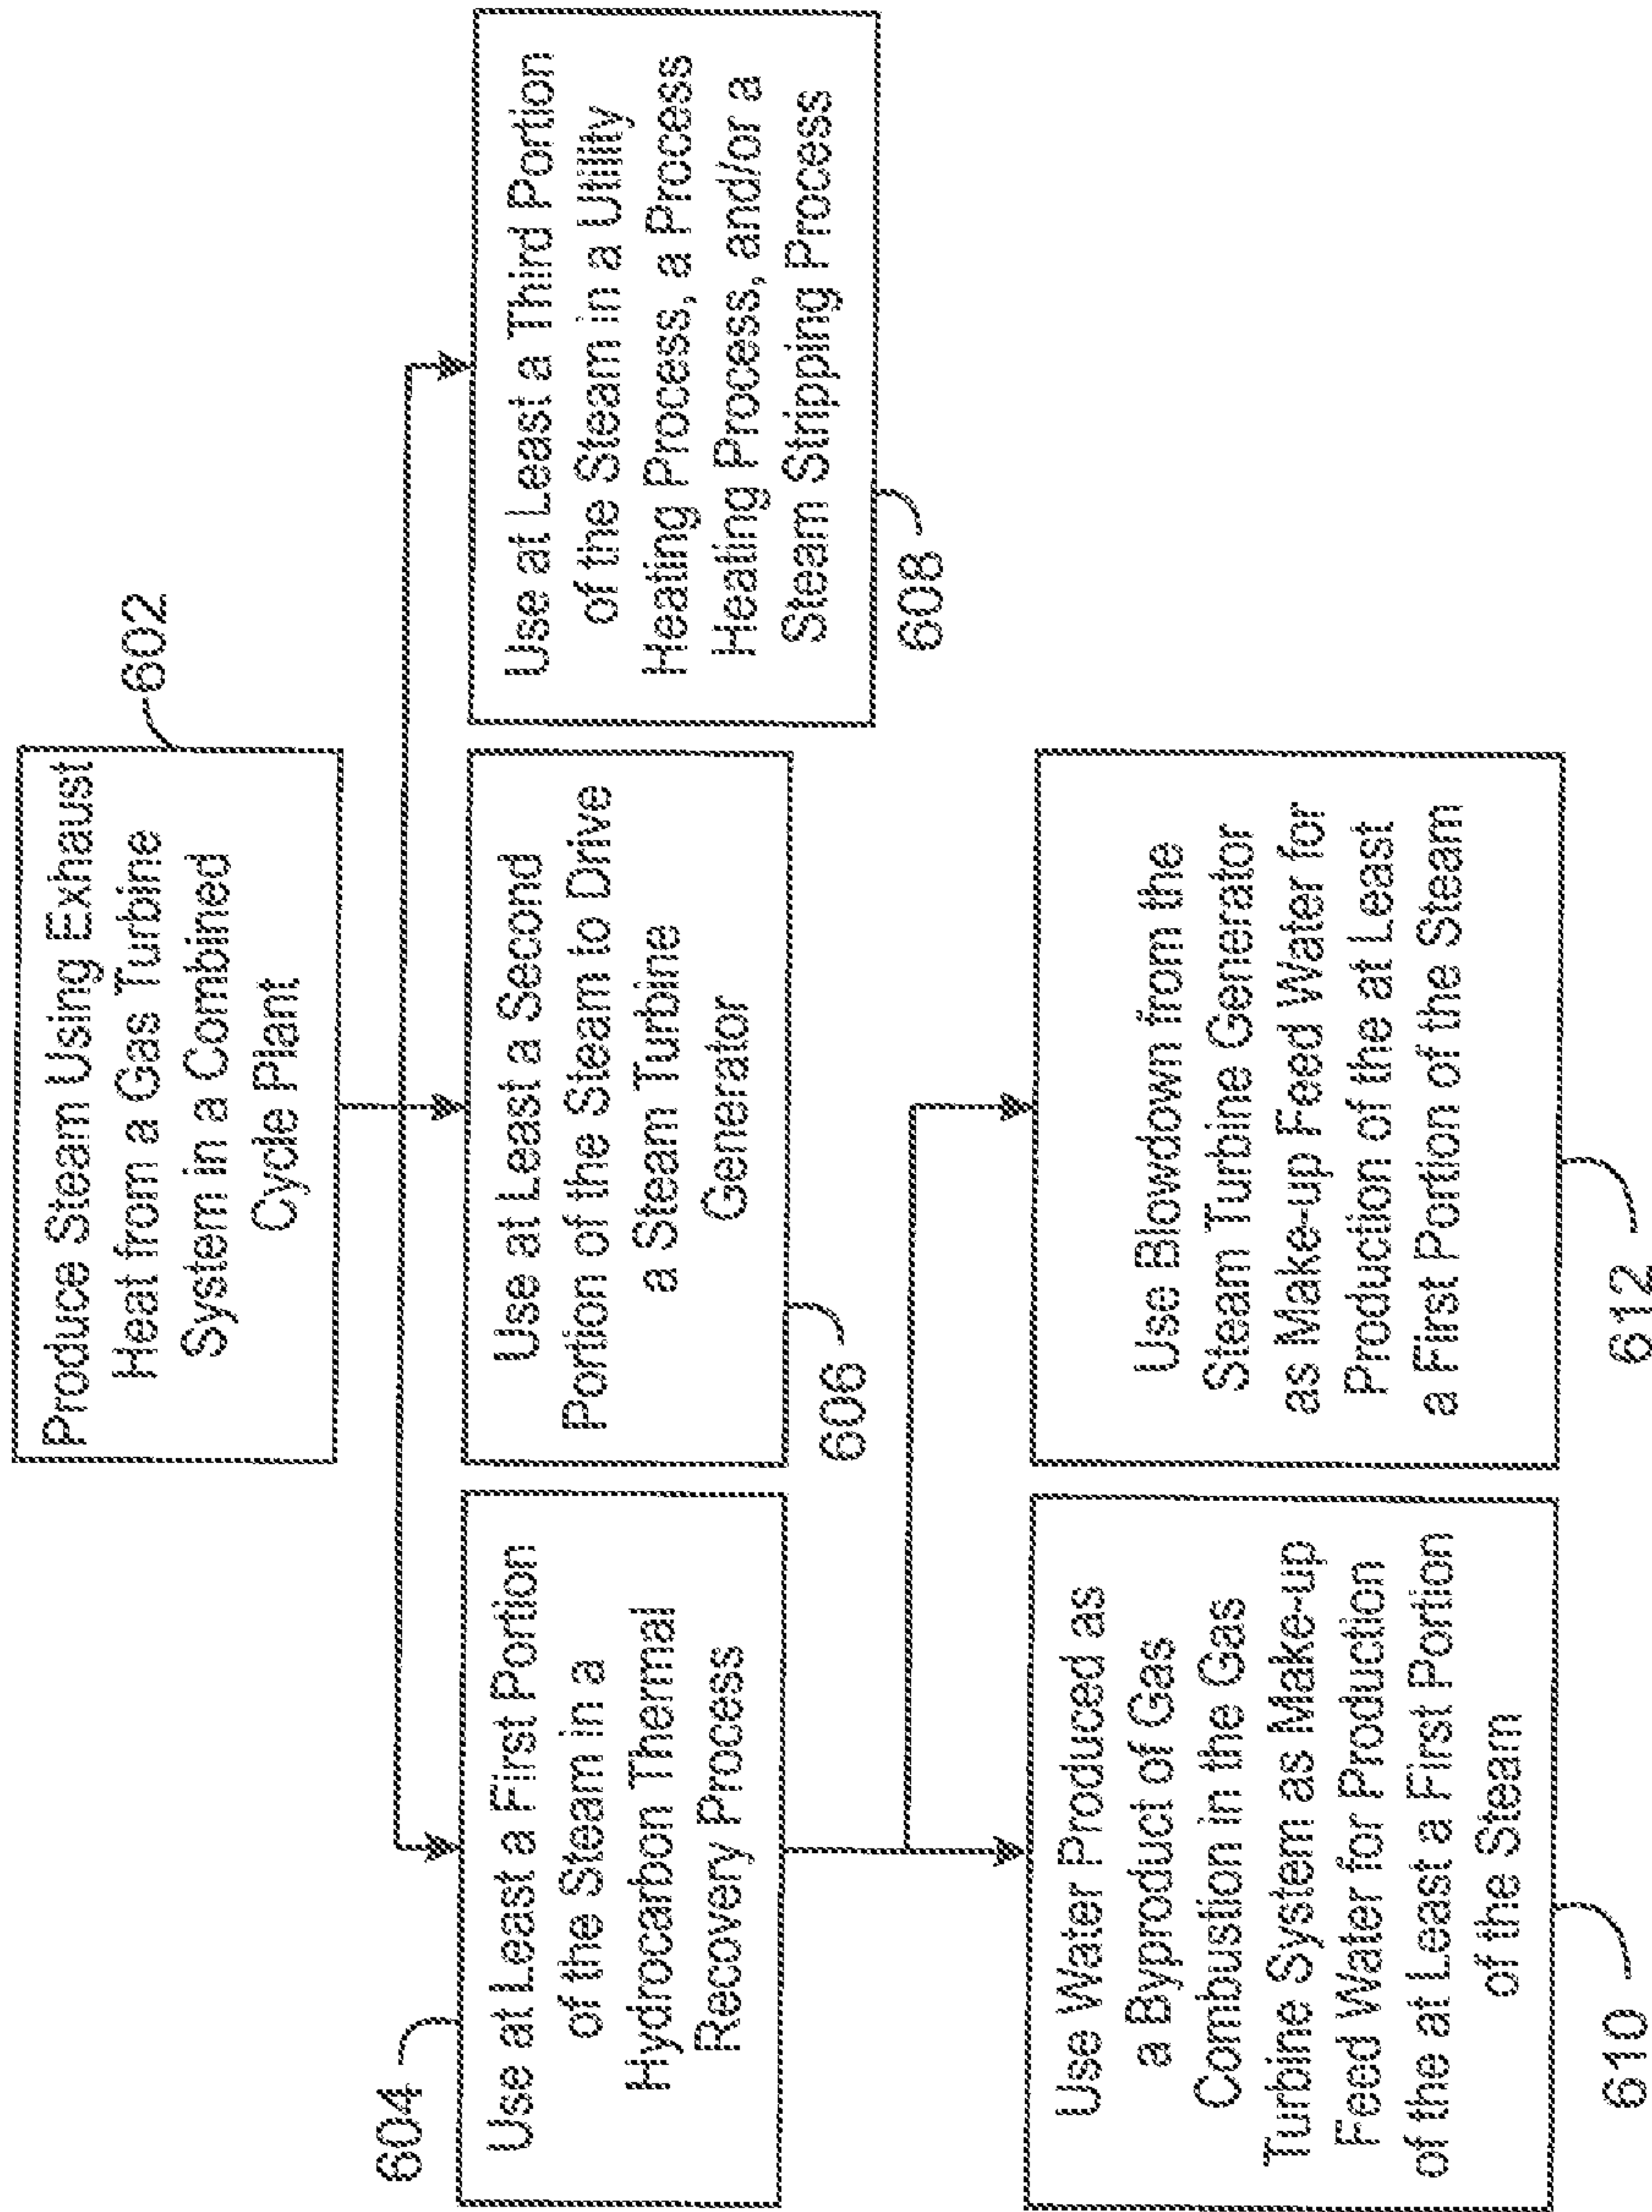

600
FIG. 6

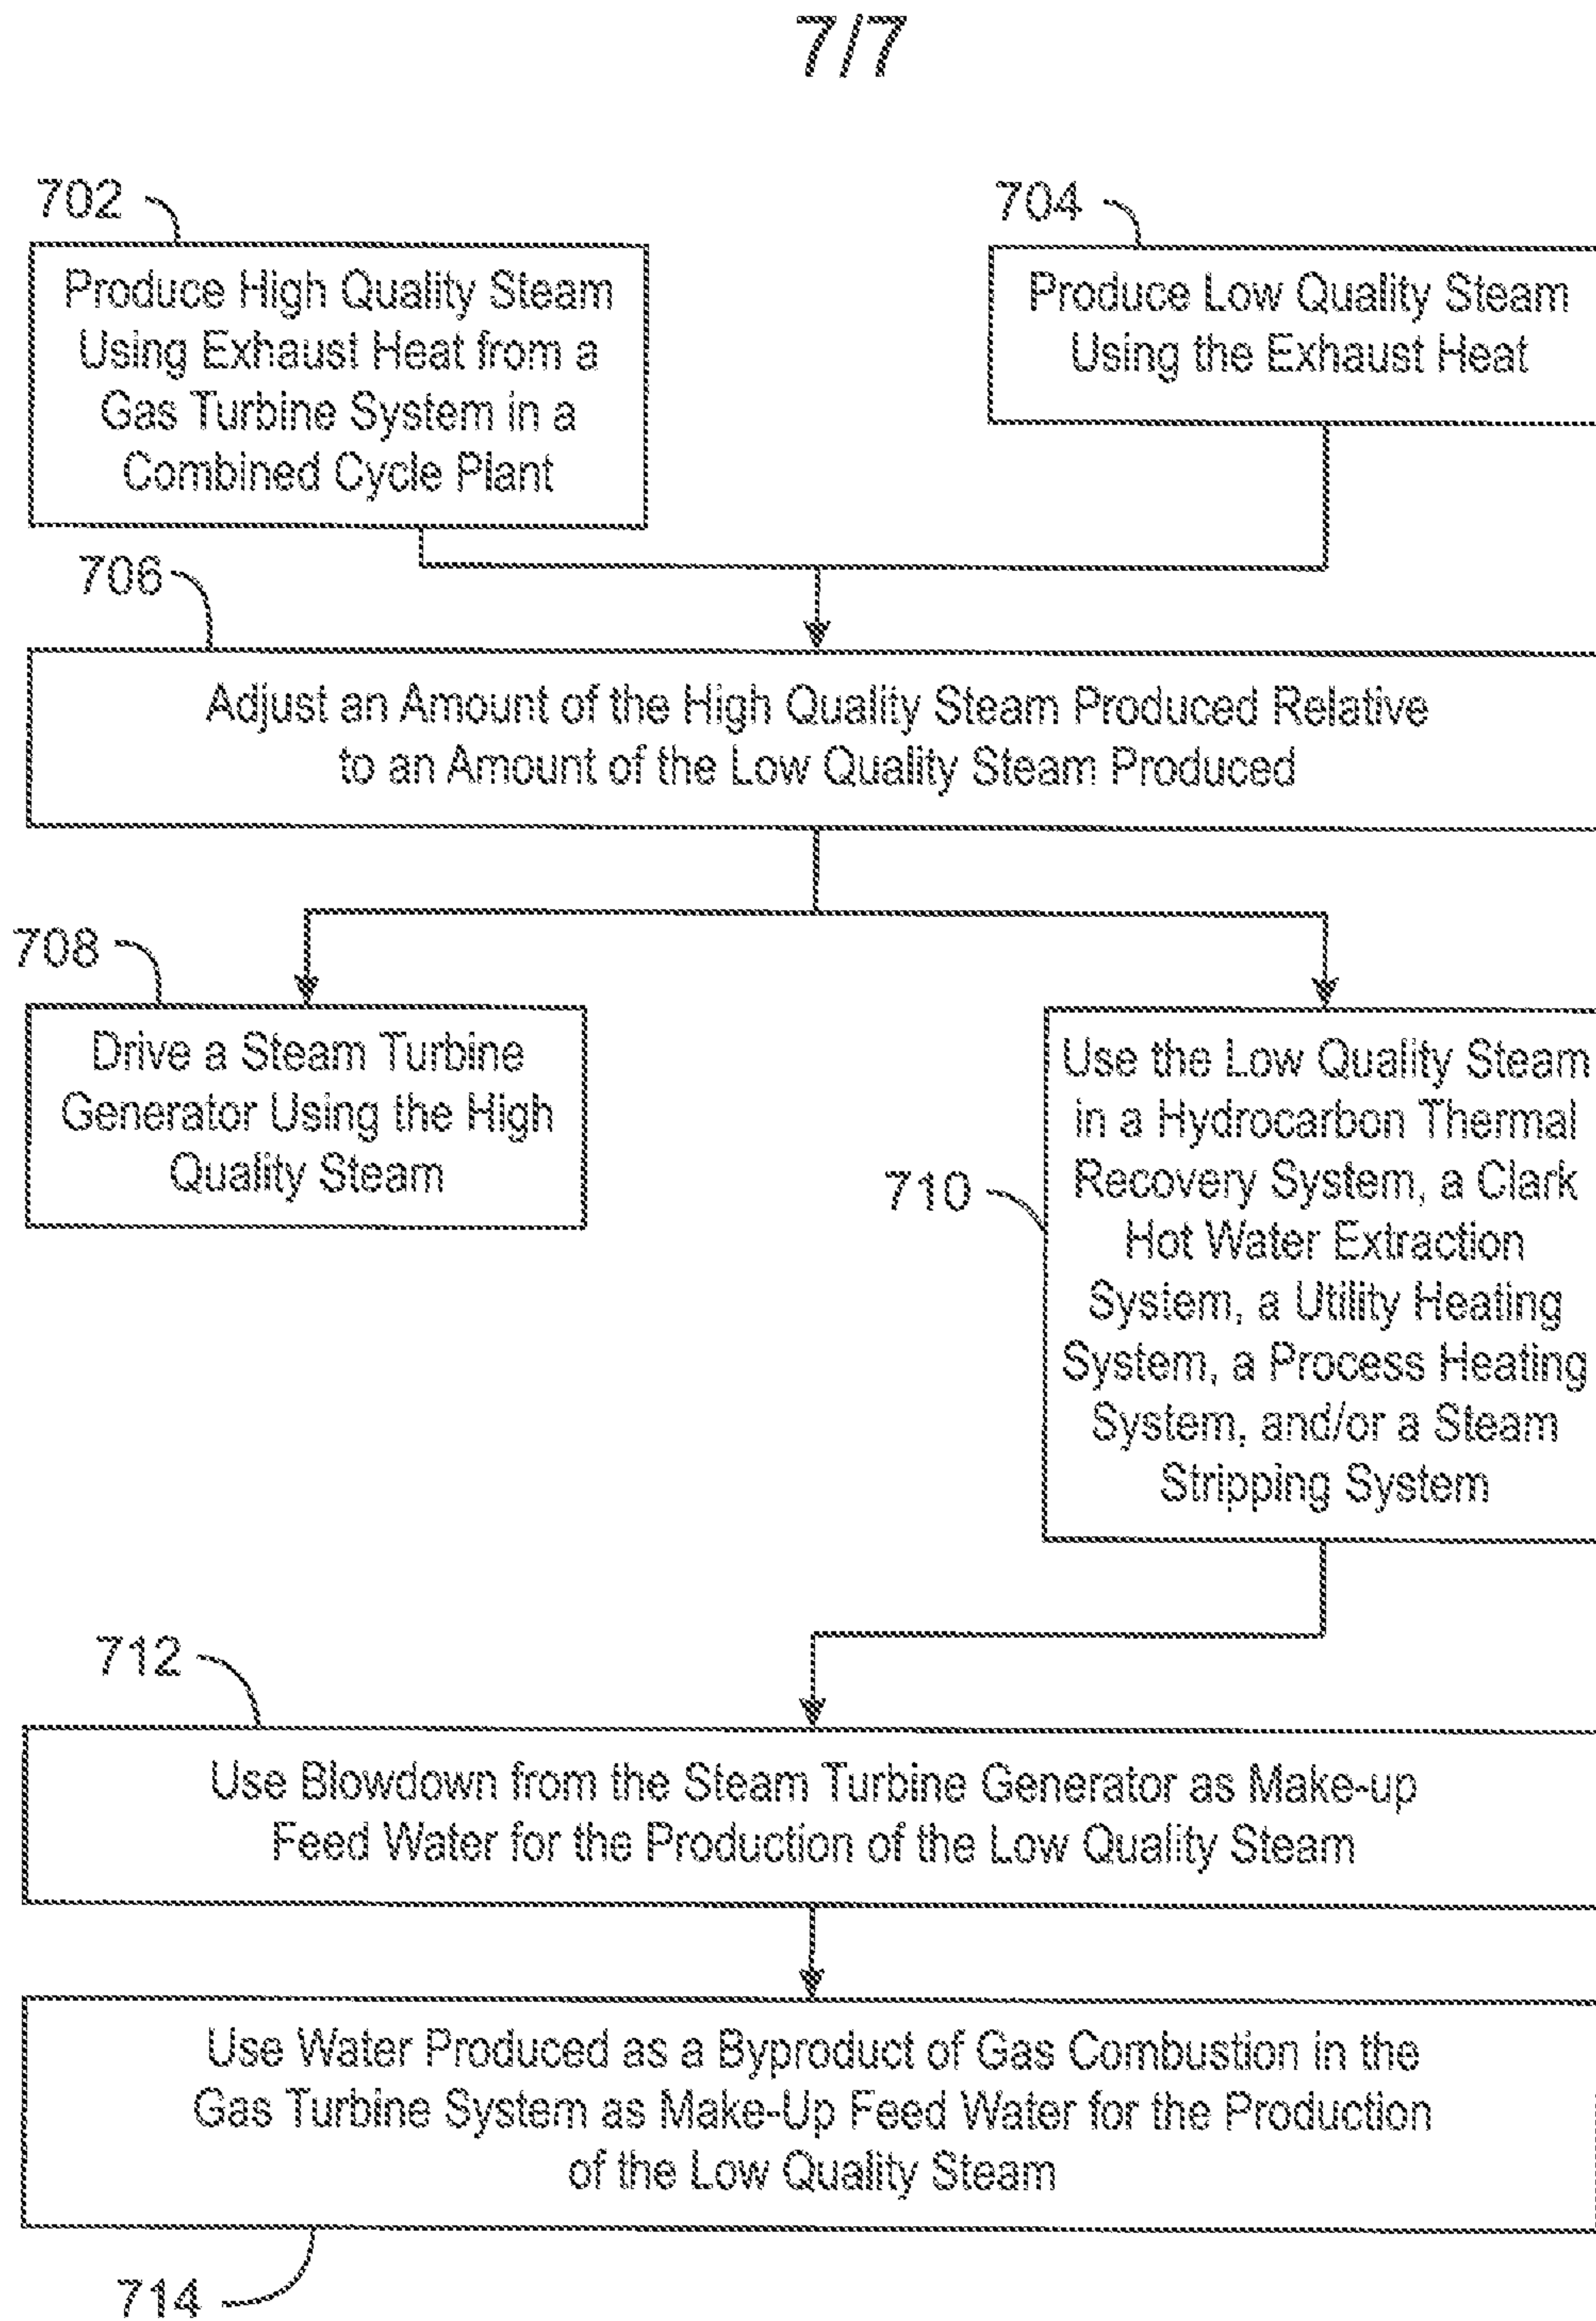

700
FIG. 7

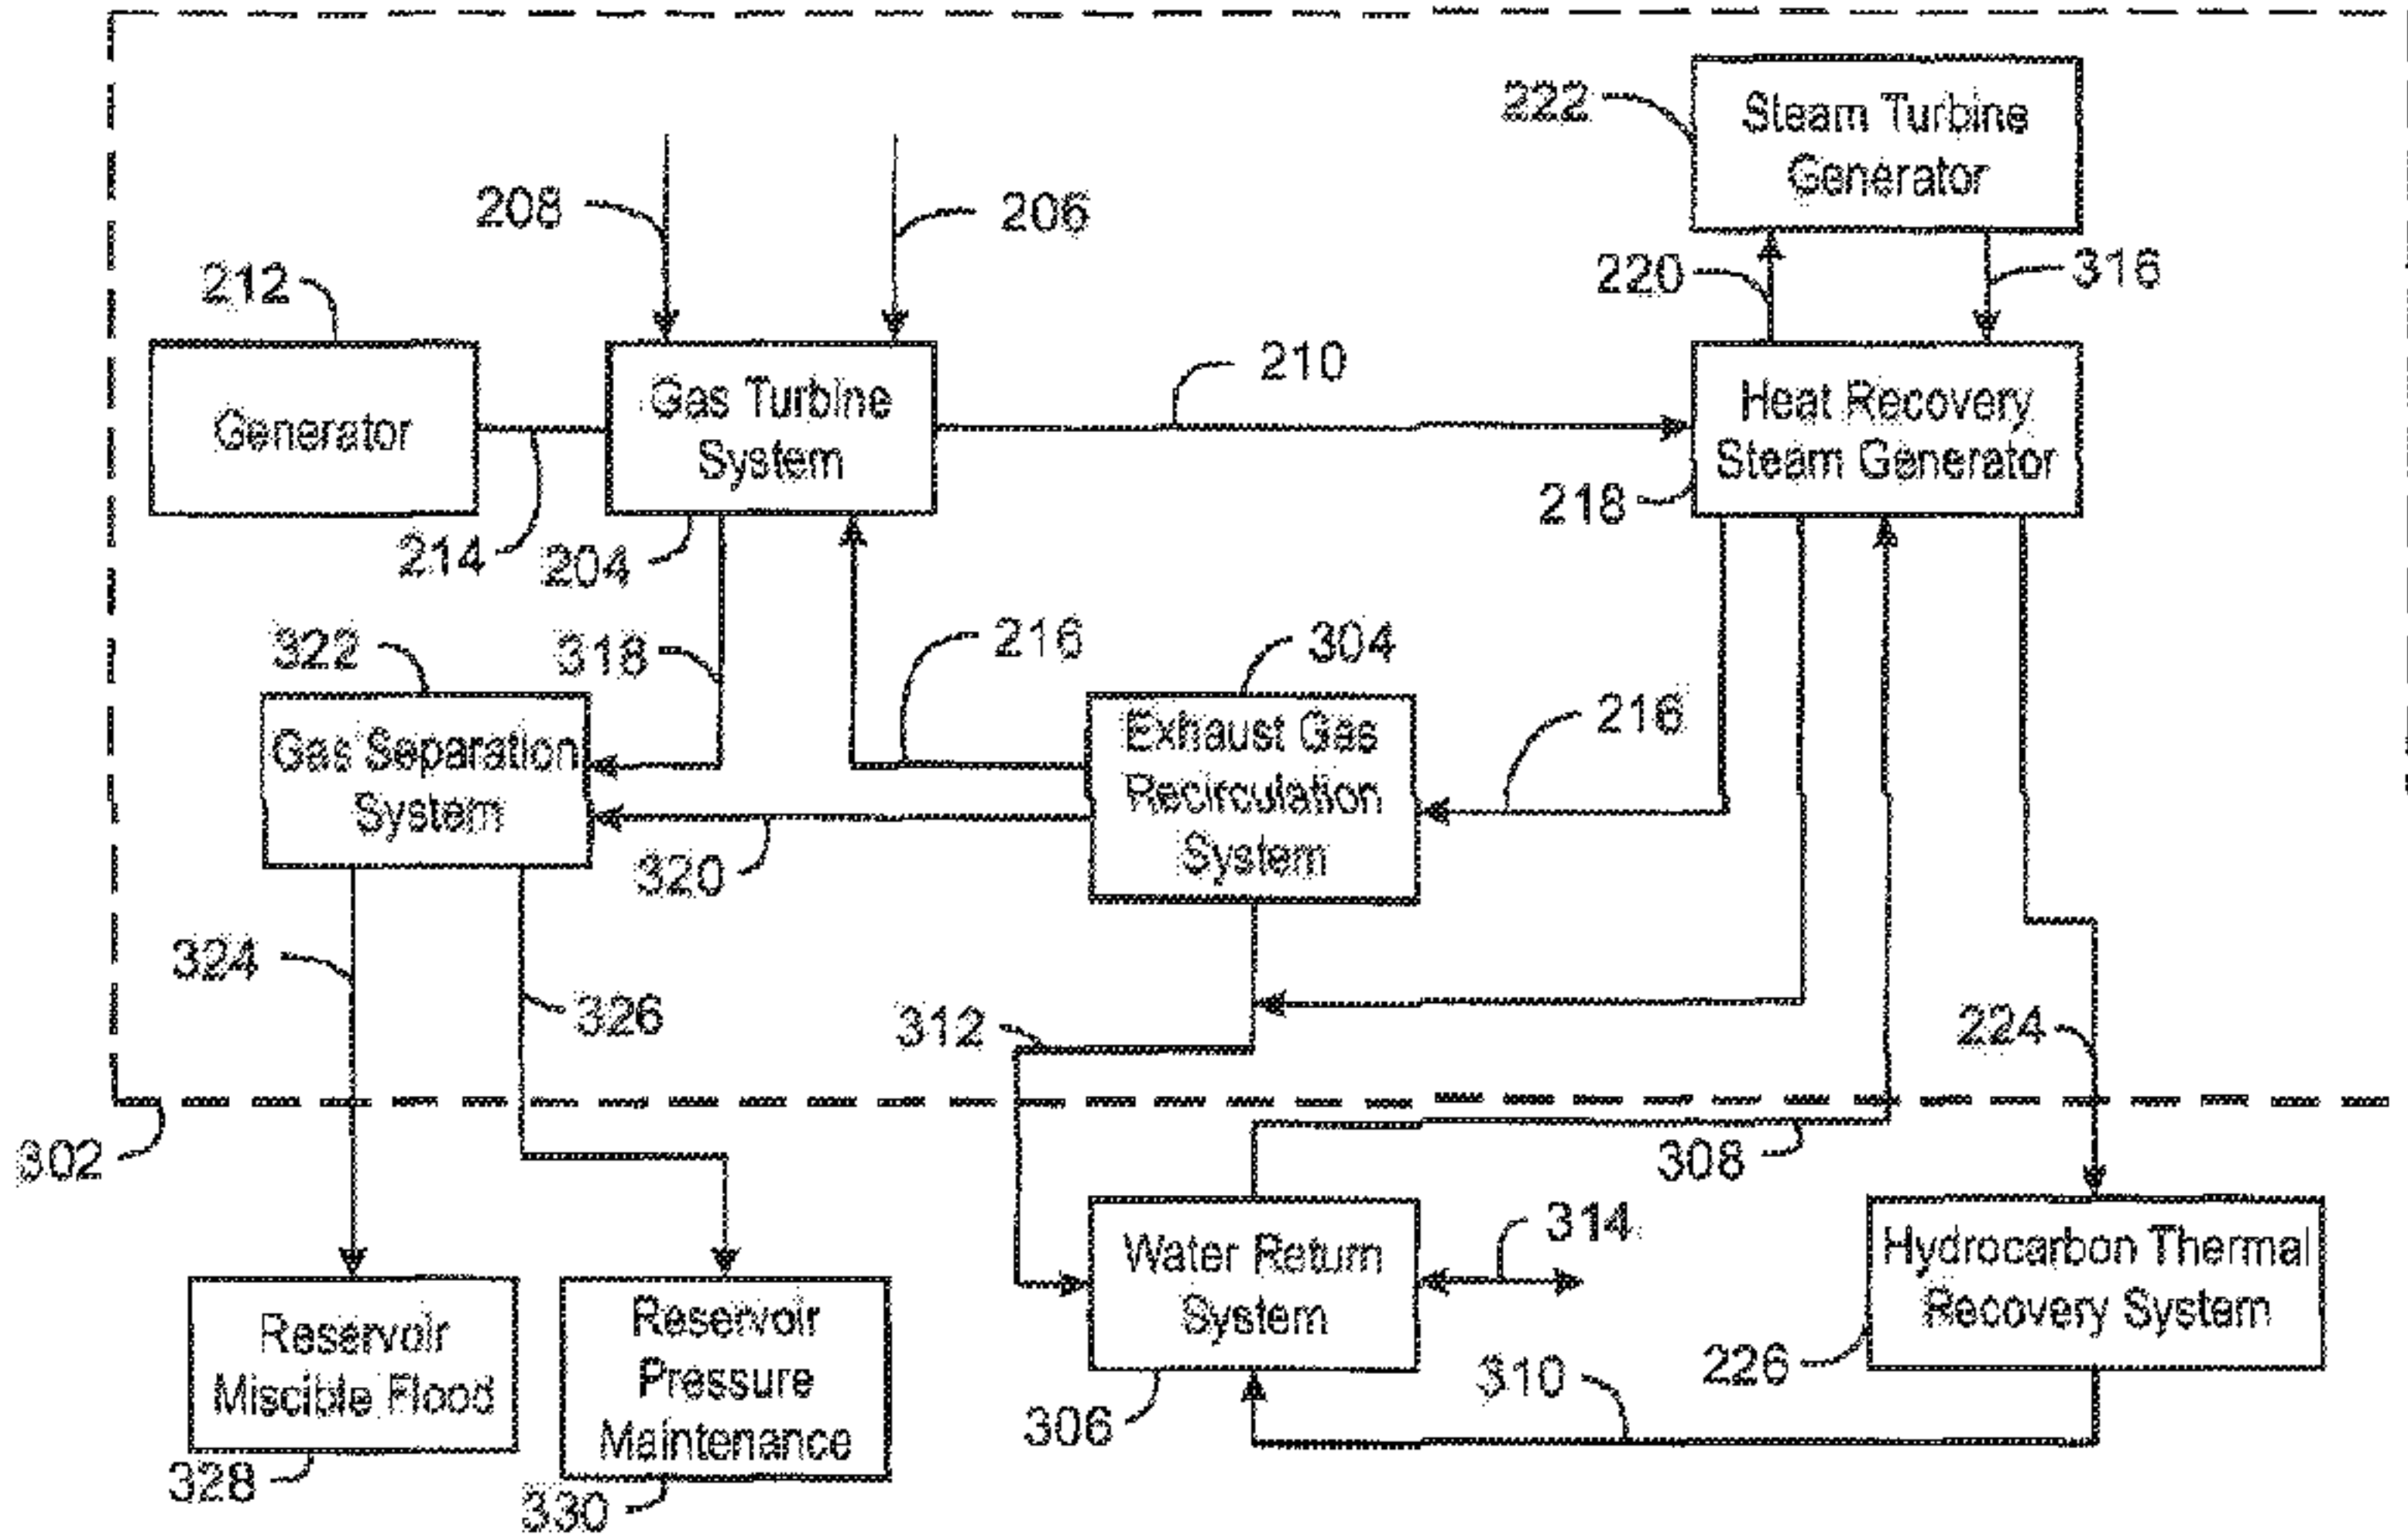

300