




(86) Date de dépôt PCT/PCT Filing Date: 2020/09/24
 (87) Date publication PCT/PCT Publication Date: 2021/04/01
 (45) Date de délivrance/Issue Date: 2023/10/10
 (85) Entrée phase nationale/National Entry: 2022/03/18
 (86) N° demande PCT/PCT Application No.: US 2020/052373
 (87) N° publication PCT/PCT Publication No.: 2021/061896
 (30) Priorités/Priorities: 2019/09/27 (US62/906,954);
 2020/09/23 (US17/029,778)

(51) Cl.Int./Int.Cl. *C21B 11/02* (2006.01),
C21B 13/02 (2006.01)
 (72) Inventeurs/Inventors:
 BASTOW-COX, KEITH MARSHALL, US;
 CINTRON, ENRIQUE JOSE, US;
 HUGHES, GREGORY DAREL, US
 (73) Propriétaire/Owner:
 MIDREX TECHNOLOGIES, INC., US
 (74) Agent: GOWLING WLG (CANADA) LLP

(54) Titre : PROCESSUS DE REDUCTION DIRECTE UTILISANT DE L'HYDROGENE
 (54) Title: DIRECT REDUCTION PROCESS UTILIZING HYDROGEN

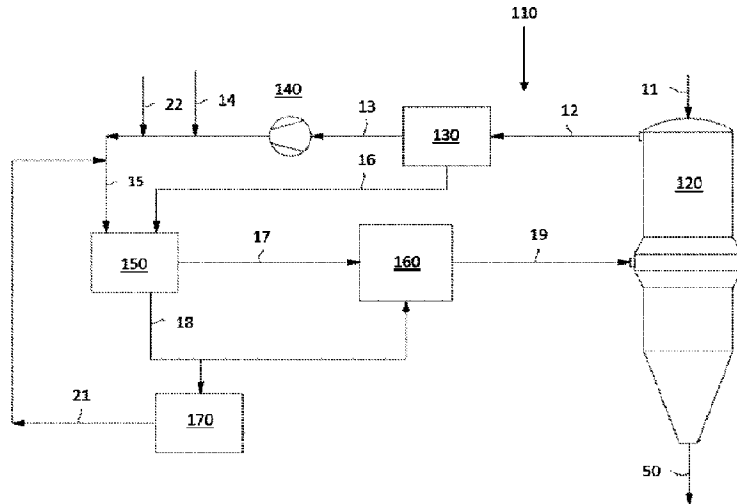

(57) **Abrégé/Abstract:**

A direct reduction method/system, including: adding variable amounts of natural gas, hydrogen, and a carbon-free oxidizing gas to a feed gas stream upstream of a reformer; reforming the feed gas stream in the reformer to form a reformed gas stream, and delivering the reformed gas stream to a shaft furnace, where the reformed gas stream is used to reduce a metallic ore material to a direct reduced metallic material. The feed gas stream includes a top gas stream recycled from the shaft furnace. Optionally, the carbon-free oxidizing gas includes steam and the method further includes controlling a steam flow rate of the steam to maintain a maximum k-factor value of the feed gas stream of 0.74 or lower. Optionally, the variable amount of hydrogen is selected to replace 20-90% of the natural gas by fuel value. The variable amount of hydrogen is selected based upon an available supply of hydrogen.

Date Submitted: 2022/03/18

CA App. No.: 3151730

Abstract:

A direct reduction method/system, including: adding variable amounts of natural gas, hydrogen, and a carbon-free oxidizing gas to a feed gas stream upstream of a reformer; reforming the feed gas stream in the reformer to form a reformed gas stream, and delivering the reformed gas stream to a shaft furnace, where the reformed gas stream is used to reduce a metallic ore material to a direct reduced metallic material. The feed gas stream includes a top gas stream recycled from the shaft furnace. Optionally, the carbon-free oxidizing gas includes steam and the method further includes controlling a steam flow rate of the steam to maintain a maximum k-factor value of the feed gas stream of 0.74 or lower. Optionally, the variable amount of hydrogen is selected to replace 20-90% of the natural gas by fuel value. The variable amount of hydrogen is selected based upon an available supply of hydrogen.

DIRECT REDUCTION PROCESS UTILIZING HYDROGEN

TECHNICAL FIELD

[0002] The present disclosure relates generally to the direct reduction (DR) and steelmaking fields. More particularly, the present disclosure relates a method and system for converting a DR process, such as a MIDREX process or the like, utilizing natural gas to a DR process utilizing a variable mixture of natural gas (NG) and hydrogen (H₂), resulting in direct reduced iron (DRI) having reduced carbon content and lower overall carbon dioxide (CO₂) emissions.

BACKGROUND

[0003] The current MIDREX NG and similar processes utilize a highly-optimized reformer to generate syngas from NG for the reduction of iron ore. Such processes emit a large amount of CO₂ due to the presence of carbon in the NG. Specific efforts are sought to decarbonize parts of the steel industry, as different regions look to reduce their CO₂ emissions. One such effort is to replace feed NG with H₂. While other methods and systems exist to do this, most require a total upfront replacement of both the reducing gas source and equipment. This places considerable limits on the adoption of H₂ as the reducing gas source, as H₂ is not yet economically viable and there exist significant uncertainties in the timeline and growth of the H₂ supply. One key challenge is that the H₂ supply may be subject to fluctuations of renewable energy sources, such as solar and wind. Under these conditions, the standard MIDREX and similar plant flowsheets are unable to operate with H₂ without dramatically impacting DRI quality, limiting reformer life, and degrading catalyst stability. Thus, the problems to be solved include: operating a conventional DR NG plant with an intermittent H₂ supply; effectively transitioning existing DR NG plants to H₂-based reduction; and protecting equipment during such transitions.

SUMMARY

[0004] In one illustrative embodiment, the present disclosure provides a direct reduction method, including: adding variable amounts of natural gas, hydrogen, and a carbon-free oxidizing gas to a feed gas stream upstream of a reformer; reforming the feed gas stream in the reformer to form a reformed gas stream, and delivering the reformed gas stream to a shaft furnace, where the reformed gas stream is used to reduce a metallic ore material to a direct reduced metallic material. The feed gas stream includes a top gas stream recycled from the shaft furnace. Optionally, the method also includes one or more of wet scrubbing and compressing the top gas stream. Optionally, the method includes adding the variable amounts of the natural gas, the hydrogen, and the carbon-free oxidizing gas to the feed gas stream upstream of the reformer and a preheater disposed upstream of the reformer. Optionally, the carbon-free oxidizing gas includes steam. Optionally, the method further includes controlling a flow rate of the steam to maintain a maximum k-factor value of the feed gas stream of 0.74 or lower. Optionally, the variable amount of hydrogen is selected to replace 20-90% of the natural gas by fuel value. Alternatively, the variable amount of hydrogen is selected to replace 30-70% of the natural gas by fuel value. The variable amount of hydrogen is selected based upon an available supply of hydrogen. Optionally, the variable amount of hydrogen is selected based upon the available supply of hydrogen from a renewable hydrogen source.

[0005] In another illustrative embodiment, the present disclosure provides a direct reduction system, including: external gas sources operable for adding variable amounts of natural gas, hydrogen, and a carbon-free oxidizing gas to a feed gas stream upstream of a reformer operable for reforming the feed gas stream to form a reformed gas stream, and a shaft furnace operable for receiving the reformed gas stream and using the reformed gas stream to reduce a metallic ore material to a direct reduced metallic material. The feed gas stream includes a top gas stream recycled from the shaft furnace. Optionally, the system also includes one or more of wet scrubber operable for wet scrubbing and a compressor

operable for compressing the top gas stream. Optionally, the external gas sources are operable for adding the variable amounts of the natural gas, the hydrogen, and the carbon-free oxidizing gas to the feed gas stream upstream of the reformer and a preheater disposed upstream of the reformer. Optionally, the carbon-free oxidizing gas includes steam. Optionally, the system further includes a flow controller operable for controlling a flow rate of the steam to maintain a maximum k-factor value of the feed gas stream of 0.74 or lower. Optionally, the variable amount of hydrogen is selected to replace 20-90% of the natural gas by fuel value. Alternatively, the variable amount of hydrogen is selected to replace 30-70% of the natural gas by fuel value. The variable amount of hydrogen is selected based upon an available supply of hydrogen. Optionally, the variable amount of hydrogen is selected based upon the available supply of hydrogen from a renewable hydrogen source.

[0006] The hydrogen and natural gas ratios are determined by the total energy requirements to produce DRI at a specified product quality and the availability of hydrogen. The typical product qualities that are controlled for are percent metallization, that is the amount of metallic iron as a percent by weight of the total iron, and product carbon, that is the amount of carbon in the product by weight percent. Sufficient flow of gas in the inlet feed is required to ensure that reducing gas quality is maintained and energy requirements are met in the furnace to drive the reducing reactions to achieve metallization. The percent metallization is the main driver as it determines the amount of reductant required to remove the oxygen from the iron oxide. The total process energy requirements, including carbon addition, account for ~70% of the energy required. The remaining ~30% is mainly sensible heat losses from various process steps, such as at the top gas scrubber or from the flue gas stack. The combination and selection of the natural gas and hydrogen flowrate will depend on hydrogen availability, costs associated with CO₂ emissions, and desired product carbon.

BRIEF DESCRIPTION OF THE DRAWING

[0007] The present disclosure is illustrated and described with reference to the various drawings, in which like reference numbers are used to denote like system components/method steps, as appropriate, and in which:

[0008] FIG. 1 is a schematic diagram illustrating one embodiment of the H₂-based direct reduction process of the present disclosure; and

[0009] FIG. 2 is a k-factor curve for a water-carbon reaction.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

[0010] The present disclosure relates generally to an improvement of the Midrex NG and similar processes for the reduction of iron ores. The overall process described herein presents modifications to the associated plants that allow for on-stream variation of the fuel gas source for the reducing gas feed. In one illustrative embodiment, H₂ gas is fed interchangeably with NG to the process depending on hour-to-hour changes in H₂ availability. This process stands in contrast with other processes designed for specific fuel compositions.

[0011] Referring now specifically to FIG. 1, in one illustrative embodiment, a flow diagram of the DR process 110 of the present disclosure is provided. Iron oxide 11 enters via the top of the shaft furnace 120, where it reduces to DRI from reactions with H₂ and carbon monoxide (CO). The DRI leaves the shaft furnace via gravity as cold DRI (CDRI), hot DRI (HDRI), hot briquetted iron (HBI), etc. 50. These processes are well known to those of ordinary skill in the art and are not described in greater detail here. Low pressure spent reducing gas 12 (also referred to as top gas) with a temperature of about 350 °C exits from the top of the shaft furnace 120 and is sent to a wet scrubber 130 for removal of dust and carry-over fines. After dedusting, the top gas 12 is split into two streams; process gas

13 and top gas fuel 16. The process gas 13 is recycled and compressed in a compressor 140, to pressure of about 2.0 bar g with a temperature of about 150 °C. NG 14, H₂ 22, and steam 21 are then added to the process gas 13. The NG 14 has a temperature of about 25 °C, the H₂ 22 has a temperature of about 25 °C, and the steam 21 has a temperature of about 300 °C. This feed gas 15 is preheated to a temperature of about 560 °C in a heat recovery unit 150 and the preheated feed gas 17 is sent to the reformer 160. The reformed gas 19, with a pressure of about 1.8 bar g and a temperature of about 950 °C, is sent to the shaft furnace 120. The top gas fuel 16 is used as burner fuel 18 for the reformer 160 or optionally the steam boiler 170. In this illustrative embodiment, external gases 14, 22, and 21 are added to the feed gas 15 and are mixed into the feed gas 15 upstream of the heat recovery unit 150, but they can also be fed into the preheated feed gas stream 17 downstream of the heat recovery unit 150, and upstream of the reformer 160. The flow of steam 21 is controlled based on the inlet chemistry of the preheated feed gas stream 17 at the inlet of the reformer 160 and adjusts depending on the availability of H₂ 22.

[0012] Here, the preferred chemistry of the preheated feed gas stream 17 at the inlet of the reformer 160 is mixture of hydrogen, carbon monoxide, carbon dioxide, water and natural gas, with a temperature of about 450 - 600 °C and a pressure of about 1.6 – 1.9 bar g. The preferred chemistry of the reformed gas 19 at the outlet of the reformer 160 is predominately hydrogen and carbon monoxide, with a gas quality of > 10, a temperature of about 850 – 1000 °C and a pressure of about 1.7 – 2.0 bar g. The amount of NG 14 added to the feed gas 15 is based on the total energy requirements to produce DRI at the specified production rate and quality. Likewise, the amount of H₂ 22 added to the feed gas 15 is based on availability of the hydrogen source and the energy requirements to produce DRI at the specified production rate and quality. Likewise, the amount of steam 21 added to the feed gas 15 is based on chemistry requirements to prevent carbon degradation at the inlet of the reformer. These additions of external gases 14, 22, and 21 are variable and may fluctuate based on chemistry preferences and H₂ 22 availability in general. The feed mix composition of natural gas 14 and hydrogen 22 is determined by the total energy

requirements of the reduction process and to a lesser extent the flows required to tailor the product carbon. For the conventional natural gas based process, the energy needed is about 2.5 net Gcal per ton product. For small variations of hydrogen input, a mol of hydrogen replaces roughly 0.3 mols of natural gas due to their differing net heating values of 2500 kcal / Nm³ for hydrogen and 8500 kcal / Nm³ for natural gas. However, as the hydrogen input increases along the full range of replacement, energy is no longer needed for the reforming of natural gas and the total requirement approaches about 1.8 net Gcal per ton product with full replacement. For example, a flow of 440 Nm³ of hydrogen per ton product is able to supply ~50% of the new total energy requirement to produce one ton of DRI. The remaining ~50% of the energy is supplied by natural gas at a rate of ~140 Nm³ of natural gas per ton product. Other ratios can be selected via similar means depending on the hour to hour availability of hydrogen. In addition to the reduction energy requirements, there are a few subsystems that use natural gas. The most important is the natural gas added to achieve the desired product carbon. An example subsystem is transition zone natural gas addition, or natural gas that is added directly to the shaft furnace below the bustle. The transition zone natural gas flowrate can vary greatly from 10 – 60 Nm³ of natural gas per ton product depending on desired product carbon, solid feed material carburizing characteristics and furnace operation. In order to maintain the desired product carbon, a similar range of natural gas is required even as hydrogen is added to the process. Since carbon deposition is dependent on the methane and CO concentrations, in some cases the natural gas feed may increase in these systems to maintain the same product carbon. In general, this effect typically occurs in the higher natural gas replacement rates. The heat recovery efficiency also impacts the total energy required and thus influences the selection of feed gas mix. In general, due to the fixed in-place equipment, the efficiency for heat recovery changes as higher hydrogen addition replaces the natural gas feed. The impact of hydrogen addition to the conventional MIDREX NG process is discussed in detail later in the method disclosure.

[0013] The process of the present disclosure has key advantages over conventional reduction processes. The conventional NG process requires tight control of feed flow and composition. Abrupt changes can have dire effects on the plant: clustering in the shaft furnace, reformer tube degradation, etc. The most significant of these is the catastrophic deactivation of catalyst that occurs when carbon deposits on and physically breaks down the catalyst.

[0014] In the present disclosure, the controlled introduction of water vapor to the feed gas mitigates the above effects while minimizing disruption to product iron quality. This, in effect, allows multiple varying reducing feed gas sources, for example NG and H₂, to be used simultaneously when availability is not constant for one or both. Positive effects of this include helping existing NG-based reduction technologies realize the utilization of H₂ from renewable sources as a method for reducing CO₂ emissions. The present disclosure can be used in different scenarios, such as: H₂ sources that have variable production rates, such as solar or wind-based H₂ generation; or the stepwise implementation of fixed H₂ production, such as electrolysis. This allows for flexibility in the fuel source that existing NG-based plants can use; specifically H₂ from green sources where supply will vary based on daily changes, such as solar or wind.

[0015] For NG-based iron reduction processes, NG is generally reformed into syngas, which in turn reacts with iron oxide to product DRI. The basic methane reforming reactions are:



[0016] In principle, this means that H₂ can directly replace NG in the process feed gas. However, the affinity for carbon deposition in the reformer needs to be considered. Gasses with higher carbon content can lead to more chance of deposition, but this alone is

insufficient to determine carbon formation. Of the different carbon reactions, the following are the ones most relevant for consideration:



[0017] Because of equation (4), the presence of H₂ or CO increases the favorability of carbon. Water, on the other hand, prevents the formation of carbon. CO₂ tends to have little effect on shifting carbon favorability because it reacts with methane to produce CO, thereby nullifying its response as an oxidant. The equilibrium constant, as defined by activity, for equation (4) is:

$$K_{\text{eq}} = \frac{\{\text{H}_2\text{O}\}}{\{\text{CO}\}\{\text{H}_2\}} \quad (5)$$

[0018] From commercial experience, MIDREX has developed a simplified version of the equilibrium constant as defined in equation (6). This equation, referred to as the k-factor, is defined as follows, where x_i is the respective mol fraction of the gas i in the gas composition and excludes the system pressure terms:

$$\text{k-factor} = \frac{x_{\text{CO}}x_{\text{H}_2}}{x_{\text{H}_2\text{O}}} \quad (6)$$

[0019] This equation helps determine the likelihood of carbon deposition. Generally, through commercial experience and research, plants have been able to operate with k-factors around 0.5, with the theoretical maximum being 0.74.

[0020] For conventional technology, the reformer inlet operates within the region where carbon deposition is thermodynamically favored. This method of operation requires fine control over the temperature and composition of the inlet gas to prevent carbon deposition

from occurring. The catalyst undergoes a sulfur passivation process to decrease its activity at the tube inlet, where the carbon reactions are heavily favored due to the lower temperature. Lower activity allows the feed gas to remain out of equilibrium until the gas has sufficiently heated to no longer favor carbon deposition. Because the system is out of equilibrium, each carbon reaction must be evaluated separately for safe operation of the reformer. By commercial experience, equation (4) is the most constraining. As mentioned before, and as illustrated in FIG. 2, the MIDREX reformer operates with a k-factor of 0.5 (dashed line) for the NG-based flowsheet. The carbon deposit region is favored by equilibrium in the <650 °C region of FIG. 2, which is a typical temperature region of feed gas preheats.

[0021] The combination of these factors means that special consideration must be made when adding H₂ with partial replacement of NG. Adding external H₂ further pushes the reaction towards carbon deposition. The only way to counter this is with a higher water content at the reformer inlet.

[0022] In the conventional process, water content is determined by the saturation condition at the process gas scrubber. There, process water is used to dedust, cool, and condense excess water from the top gas. Because of constraints within the system, the operating temperature is typically in the range of 55 – 65 °C. This limits the amount of water present in the process gas, which in turn limits the amount of H₂ that can be added and achieve k-factors below 0.7. To safely operate at all ranges of H₂ addition, more water needs to be added than can be achieved from the conventional scrubber operating condition. Thus, the conventional MIDREX NG flowsheet can handle a maximum of 200 Nm³ of H₂ per ton DRI produced to the process loop without adverse effects at the reformer. This represents only a replacement of roughly 20% NG by fuel value in the traditional process. The conventional technology can also operate on the H₂-rich side, replacing 550 – 650 Nm³ of H₂ per ton DRI, or roughly 70% of the NG with H₂ by fuel value. However, this can only be done after a lengthy shutdown to modify existing equipment. The remaining 30% of

the plant fuel is used to feed the reformer burners, but this fuel is difficult to replace. The burners used in the furnace are sensitive to the molecular weight of the gas and difficult to turn down, limiting fuel flexibility in this area.

[0023] In an illustrative embodiment of the present disclosure, the steam generation system adds steam directly to the process gas. This steam addition allows for the feed gas water composition to be maintained directly, independent of the top gas scrubber dust removal requirements. With this inclusion, the present disclosure can freely change between low, medium and high addition of H₂ dependent on the availability from an external supply, unlike the conventional process. This is illustrated in FIG. 1, with the steam generation system. The steam requirements are low pressure steam, 5 bar g, with a temperature of > 160°C. If any external sources of such steam are available, then the steam generation system is not required. The location in FIG. 1 is the preferred location of the steam addition; downstream of the process gas compressor and upstream of the reformer, but so long as steam is added upstream of the reformer and achieves good mixing then the addition is acceptable. The steam addition allows for this embodiment to provide sufficient water to create a steady value for the k-factor even with hydrogen additions in excess of 200 Nm³ of hydrogen per ton product. Further, control action for steam valves allows for quick and precise control of the water content to take full advantage of changes in H₂ availability throughout the day.

[0024] The present disclosure requires additional changes to equipment design and control requirements. Specifically, the process gas compressor and heat recovery unit are greatly impacted. Solutions to these problems already exist in the art and are worth mentioning here. As H₂ is added, the reduction reactions become more endothermic. With a fixed energy requirement to achieve the same DRI quality (metallization, carbon, etc.), the endothermic H₂ reactions in the furnace require more sensible heat than would normally be provided by reaction heat due to the CO reduction reactions. This means that the reducing gas flowrate needs to increase as H₂ is added as the reducing gas temperature is

limited by what the solid material (DRI) can handle (typically $<900\text{ }^{\circ}\text{C}$ is the maximum achievable bed temperature before clustering becomes an issue). This, in turn, means that the process gas compressor will be required to handle the larger reducing gas flowrate, as well as the changes to the process gas molecular weight as H_2 is added to the flowsheet. Furthermore, considerations are also required due to the large variation between molecular weights, especially for the operation of centrifugal type compressors. Steam added downstream of the process gas compressor would unload the total gas flow requirements for the unit.

[0025] The plant heat recovery is affected due to the decreased flue gas from the reformer. The main driver for this effect is that, as external hydrogen is added, less reforming is required. The net result is that the fuel gas flowrate (post-combustion top gas fuel and burner natural gas) decreases as hydrogen is added. This has a large impact on the amount of recoverable waste heat that the heat recovery unit. The heat recovery unit is a series of tubular heat exchangers, each with fixed heat transfer coefficients and areas. As the flue gas flowrate decreases, the amount of recoverable waste heat also decreases, thus, due to the fixed heat transfer geometry, the preheats of the various process streams, such as feed gas, also decrease. A major consideration in the conventional MIDREX NG process and the heat recovery design is to maintain a flue gas stack temperature of $> 180\text{ }^{\circ}\text{C}$, ideally above $250\text{ }^{\circ}\text{C}$, to protect downstream equipment, such as hot fans, from the detrimental effects of acid gases, such as H_2SO_4 , that can develop at these lower temperatures. This consideration is still required, as H_2 is added to the flowsheet because sulfur is removed from the solid product in the reduction process, so these acid gas reactions can still occur. The solution to the changing fuel source for the heat recovery piece of equipment includes individual bundle bypass or dilution air in order to maintain proper bundle and stack temperatures.

[0026] The transition period between NG-based reduction and H_2 -based reduction requires unique considerations if existing facilities want to take advantage of decreasing

CO₂ emissions via external H₂. The current embodiment considers these types of process and equipment constraints in order to fully utilize H₂ addition to a conventional MIDREX NG plant or the like. The present disclosure allows the conventional MIDREX NG flowsheet or the like to operate with intermittent hydrogen availability with the possibility to convert to complete H₂-based reduction capabilities.

[0027] Although the present disclosure is illustrated and described herein with reference to illustrative embodiments and specific examples thereof, it will be readily apparent to those of ordinary skill in the art that other embodiments and examples may perform similar functions and/or achieve like results. All such equivalent embodiments and examples are within the spirit and scope of the present invention, are contemplated thereby, and are intended to be covered by the following non-limiting claims for all purposes.

What is claimed is:

1. A direct reduction method, comprising:
 - adding via separate streams variable amounts of natural gas, hydrogen, and a carbon-free oxidizing gas to a feed gas stream upstream of a reformer, and a preheater disposed upstream of the reformer;
 - reforming the feed gas stream in the reformer to form a reformed gas stream, and
 - delivering the reformed gas stream to a shaft furnace, where the reformed gas stream is used to reduce a metallic ore material to a direct reduced metallic material.
2. The direct reduction method of claim 1, wherein the feed gas stream comprises a top gas stream recycled from the shaft furnace.
3. The direct reduction method of claim 2, further comprising one or more of wet scrubbing and compressing the top gas stream.
4. The direct reduction method of claim 1, wherein the carbon-free oxidizing gas comprises steam.
5. The direct reduction method of claim 4, further comprising maintaining a steam flow rate of the steam to a maximum k-factor value of the feed gas stream of 0.74 or lower.
6. The direct reduction method of claim 1, wherein the variable amount of hydrogen is selected to replace 20-90% of the natural gas by fuel value.
7. The direct reduction method of claim 1, wherein the variable amount of hydrogen is selected to replace 30-70% of the natural gas by fuel value.
8. The direct reduction method of claim 1, wherein the variable amount of hydrogen is selected based upon an available supply of hydrogen.
9. The direct reduction method of claim 8, wherein the variable amount of hydrogen is selected based upon the available supply of hydrogen from a renewable hydrogen source.

10. A direct reduction system, comprising:

external gas sources operable for adding in separate streams variable amounts of natural gas, hydrogen, and a carbon-free oxidizing gas to a feed gas stream upstream of a reformer operable for reforming the feed gas stream to form a reformed gas stream, and a preheater disposed upstream of the reformer, and

a shaft furnace operable for receiving the reformed gas stream and using the reformed gas stream to reduce a metallic ore material to a direct reduced metallic material.

11. The direct reduction system of claim 10, further comprising a flow controller operable for maintaining a steam flow rate of the steam to a maximum k-factor value of the feed gas stream of 0.74 or lower.

12. The direct reduction system of claim 10, wherein the stream of the variable amount of hydrogen is operable to replace 20-90% of the natural gas by fuel value.

13. The direct reduction system of claim 10, wherein the stream of the variable amount of hydrogen is operable to replace 30-70% of the natural gas by fuel value.

14. The direct reduction method of claim 1, wherein the hydrogen is fed interchangeably with the natural gas to the method depending on hour-to-hour changes in hydrogen availability.

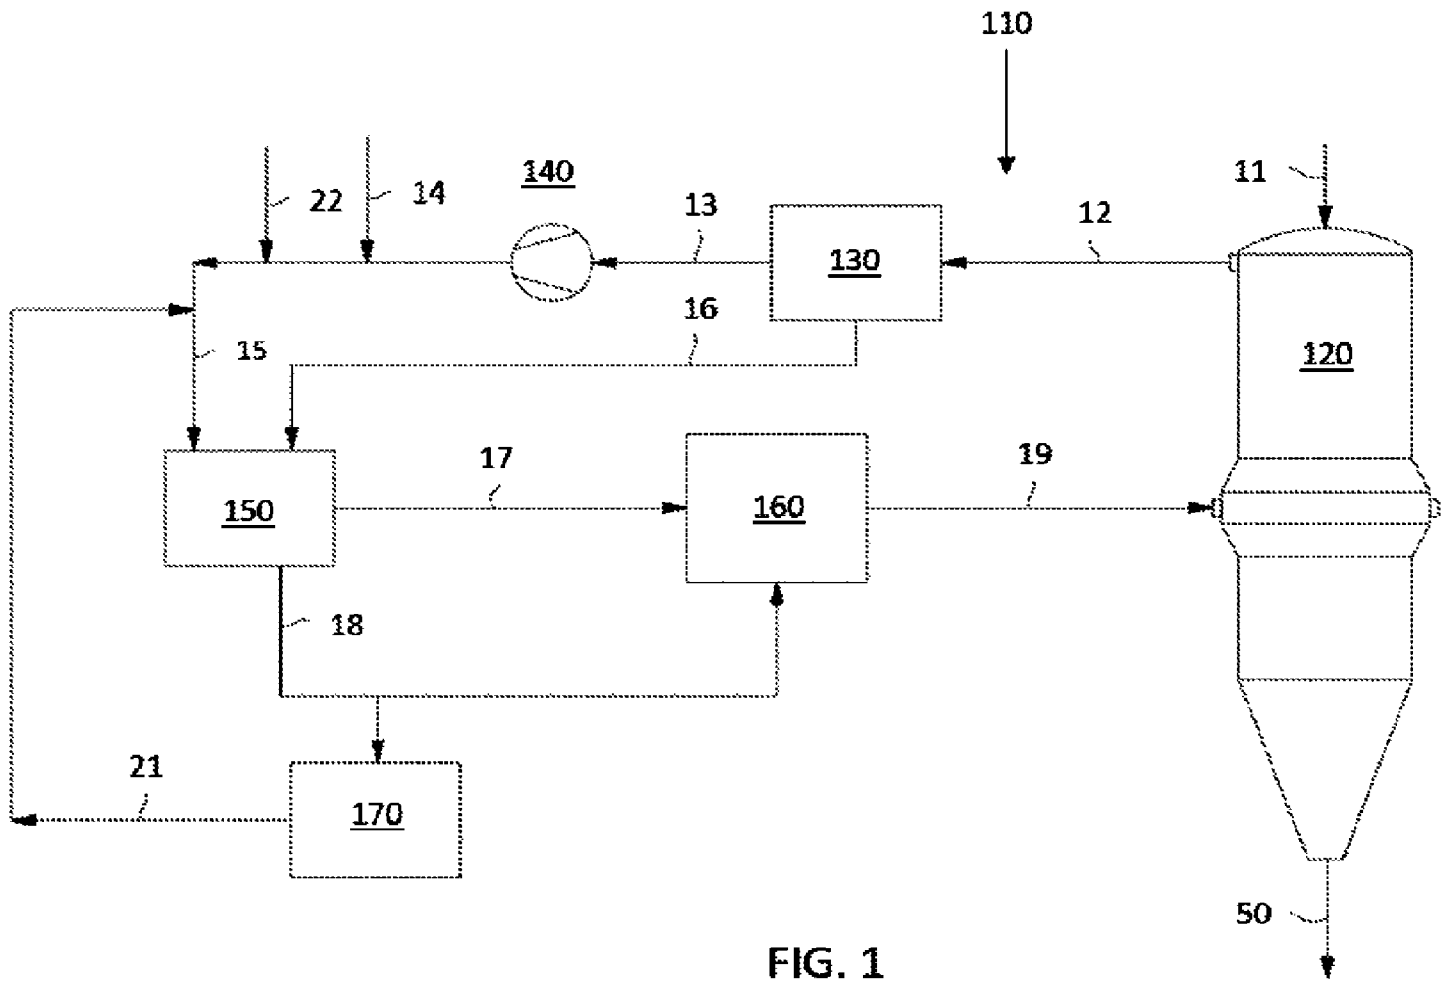


FIG. 1

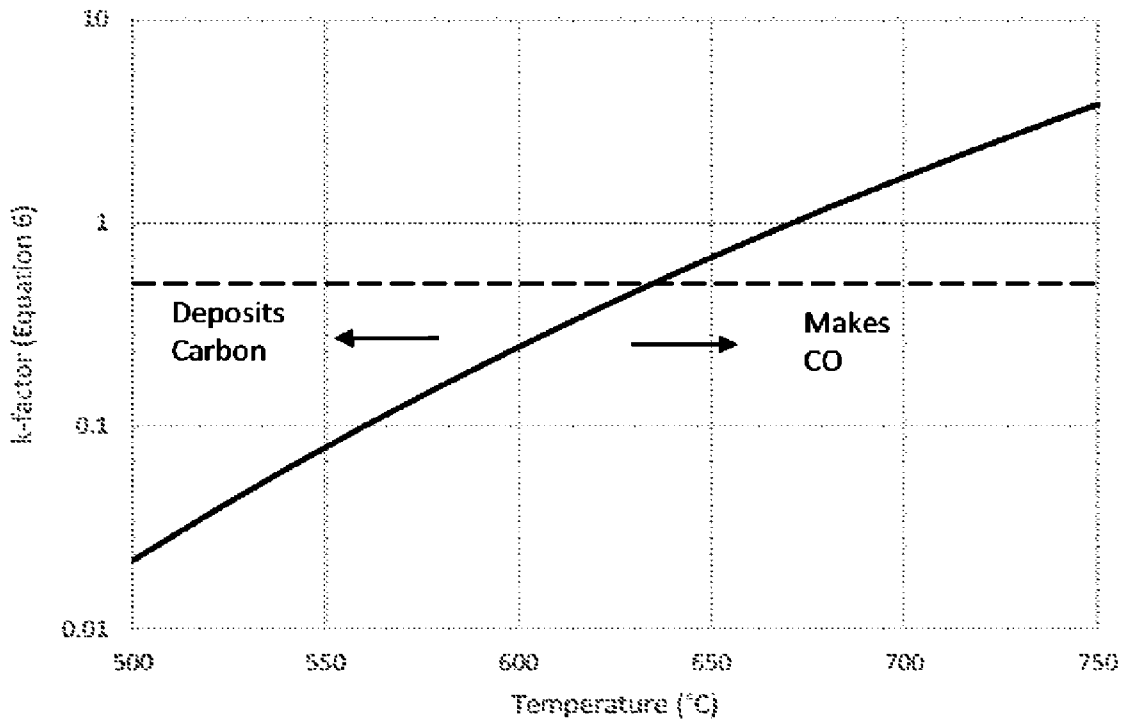


FIG. 2

