

**(12) PATENT**  
**(19) AUSTRALIAN PATENT OFFICE**

**(11) Application No. AU 200024383 B2**  
**(10) Patent No. 759847**

**(54) Title**  
Portable data carrier with a break-off mini-smart card

**(51)<sup>6</sup> International Patent Classification(s)**  
G06K 019/077

**(21) Application No:** 200024383 **(22) Application Date:** 2000 . 01 . 18

**(87) WIPO No:** WO00/43950

**(30) Priority Data**

**(31) Number** 19901965 **(32) Date** 1999 . 01 . 19 **(33) Country** DE

**(43) Publication Date :** 2000 . 08 . 07

**(43) Publication Journal Date :** 2000 . 10 . 12

**(44) Accepted Journal Date :** 2003 . 05 . 01

**(71) Applicant(s)**  
Giesecke and Devrient GmbH

**(72) Inventor(s)**  
Klaus Vedder; Renee-Lucia Barak

**(74) Agent/Attorney**  
F B RICE and CO, 605 Darling Street, BALMAIN NSW 2041

**(56) Related Art**  
EP 495216  
DE 19726203  
EP 535436

00/243 83



**PCT** WELTOrganisation FÜR GEISTIGES EIGENTUM  
Internationales Büro  
INTERNATIONALE ANMELDUNG VERÖFFENTLICHT NACH DEM VERTRAG ÜBER DIE  
INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES PATENTWESENS (PCT)

(51) Internationale Patentklassifikation 7 : <b>G06K 19/077</b>		A1	(11) Internationale Veröffentlichungsnummer: <b>WO 00/43950</b>
			(43) Internationales Veröffentlichungsdatum: 27. Juli 2000 (27.07.00)
(21) Internationales Aktenzeichen: PCT/EP00/00366		(81) Bestimmungsstaaten: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO Patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), eurasisches Patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), europäisches Patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI Patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) Internationales Anmeldedatum: 18. Januar 2000 (18.01.00)			
(30) Prioritätsdaten: 199 01 965.7 19. Januar 1999 (19.01.99) DE			
(71) Anmelder (für alle Bestimmungsstaaten ausser US): GIESECKE & DEVRIENT GMBH [DE/DE]; Prinzregentenstrasse 159, D-81677 München (DE).			
(72) Erfinder; und (75) Erfinder/Anmelder (nur für US): VEDDER, Klaus [DE/DE]; Ailmillerstrasse 38, D-80801 München (DE). BARAK, Renée-Lucia [DE/DE]; Säulenstrasse 2, D-82008 Unterhaching (DE).		Veröffentlicht Mit internationalem Recherchenbericht. Vor Ablauf der für Änderungen der Ansprüche zugelassenen Frist; Veröffentlichung wird wiederholt falls Änderungen eintreffen.	
(74) Anwalt: KLUNKER, SCHMITT-NILSON, HIRSCH; Winzerstrasse 106, D-80797 München (DE).			
<p>(54) Title: PORTABLE DATA SUPPORT WITH A BREAK-OFF MINI-CHIP CARD <i>Carrier</i> <b>Smart</b></p> <p>(54) Bezeichnung: TRAGBARER DATENTRÄGER MIT AUSBRECHBARER MINICHPKARTE</p> <p>(57) Abstract</p> <p>The invention relates to a portable data support (1) with a break-off mini-chip card (2) placed therein. Said mini-chip card (2) is separated from the rest of the card body by a free punch (3) which extends over considerable parts of the mini-chip card (2). According to the invention, another predetermined break line (5) is provided inside the mini-chip card (2). This predetermined break line (5) preferably consists of a perforation line and enables the mini-chip card (2) to be made even smaller.</p> <p>(57) Zusammenfassung</p> <p>Die Erfindung betrifft einen tragbaren Datenträger (1) mit darin eingelagerter, ausbrechbarer Minichipkarte (2). Die Minichipkarte (2) ist durch einen Freischlitz (3), der sich über wesentliche Teile der Minichipkarte erstreckt, vom restlichen Kartenkörper getrennt. Gemäß der Erfindung ist innerhalb der Minichipkarte (2) eine weitere Sollbruchlinie (5) vorgesehen, welche vorzugsweise aus einer Perforationslinie besteht und eine weitere Verkleinerung der Minichipkarte zulässt.</p>			

Portable data carrier with a break-out mini smart card

Technical Field

The present invention relates to a portable data carrier with a break-out mini  
5 smart card.

Background Art

In known mobile radio systems, for example a GSM mobile radio system, the  
10 SIM (subscriber identity module) can be present in two different card formats. Mobile  
phones intending frequent change of the SIM usually employ the ID-1 card format  
since the large card simplifies handling during a change. For mobile phones intending  
a change of SIM only rarely or not at all, or for very small mobile phones, the so-called  
15 plug-in SIM in the ID-000 format has become established. In order to make it easier to  
provide substantially prepersonalized smart cards for mobile radio use, smart cards for  
mobile radio use are normally provided with a punching permitting the plug-in (mini  
smart card) to be broken out without much trouble.

From the German print DE-A 40 07 221 or the European print EP-A 0 535 436  
it is known to dispose a mini smart card in the ID-000 format in a card with the  
standard ID-1 format, the mini smart card being surrounded by a punching, i.e. a free  
20 punch, with only one or more bars being retained to hold the mini smart card in the  
card body.

European patent application EP-A 0 495 216 furthermore discloses an ID card  
with a microprocessor, the microprocessor with its contact surfaces being disposed on a  
25 standard smart card (ID-1 format) at the place fixed by the standard. The  
microprocessor and its contact surfaces are surrounded on three sides by a free punch in  
the form of a plug-in (mini smart card in the ID-000 format) while the fourth side of the  
carrier has hinge-like notching.

This makes it possible for the standard card to be used with the plug-in not  
broken out in mobile radio devices which intend frequent change of the SIM, while the  
30 break-out plug-in is used as a "mini smart card" in smaller mobile radio devices or  
devices usually not intending a change of SIM.

With increasing miniaturization of mobile radio devices, however, the problem  
arises that even the mini smart card in the ID-000 format is still too large.



Summary of the Invention

The present invention is a portable data carrier with a break-out mini smart card, the mini smart card being largely separated from the remaining card body by a free punch surrounding most of the mini smart card, characterized in that a rated breaking line is disposed within the mini smart card for further reducing the size of the mini smart card.

An advantage of at least one embodiment of the invention is that a smart card is provided with a plug-in which permits further reduction in size of the mini smart card, all card formats being reliably separable from each other or it being readily possible to 10 remove the plug-in from the remaining card body, while at the same time plug-in and card body form a stable unit in case the plug-in stays in the remaining card body.

Advantageous embodiments of the invention are stated in the dependent claims.

The basic idea of the invention is that the plug-in in the ID-000 format contains a rated breaking point which permits further miniaturization of the mini smart card by 15 removal of part of the plug-in. This additional rated breaking line can be realized by notching, a free punch with bars, etc.

Said rated breaking line is realized in advantageous fashion by a perforation. Perforation constitutes a more stable connection than notching so that the plug-in in the ID-000 format can be broken out of the card in the ID-1 format without breakage of the 20 rated breaking line for further miniaturization.

Brief Description of the Drawings

In the following the invention will be explained in more detail with reference to FIGS. 1 to 2, in which:

25 FIG. 1 shows a card with a rated breaking line in the plug-in,  
FIG. 2 shows a card with two rated breaking lines for plug-ins of different sizes.

Detailed Description of the Drawings

FIG. 1 shows card body 1 with plug-in 2 containing an integrated circuit and 30 contact surface 4. The contour of plug-in 2 is defined by free punch or punching 3 within remaining card body 1 and connected therewith only by one or more bars 6. Bars 6 are designed so as to permit plug-in 2 to be easily broken out of card body 1. Within the plug-in there is furthermore a rated breaking line in the form of perforated line 5 which allows further reduction in size of the plug-in by breaking off remaining 35 piece 8. Perforation 5 constitutes a more stable connection than connecting bars 6 so that perforation 5 does not break when plug-in 2 in the ID-000 format is



broken out of card body 1. After the plug-in is broken out, a further reduction in size of the mini smart card can be obtained by bending on perforated line 5.

FIG. 2 shows a smart card similar to FIG. 1 whereby plug-in 2 in the ID-000 format is separated from remaining card body 1 on three sides by free punch 3 and a connection with the remaining card body exists on the fourth side only by means of perforated line 7. Perforation 7 has smaller perforation holes and a lesser distance between the holes so that perforated line 7 breaks before perforated line 5 when pressure is exerted on the plug-in.

The size and density of perforations 7 is dependent on the desired stability of the completed card. Advantageously, free punch 3 extends around the corners of the fourth side and perforation 7 yields a straight line in order to make it easier to break out mini smart card 2.

This connection of plug-in 2 with remaining card body 1 has higher stability compared to the prior art. When slight pressure is exerted on plug-in 2 this does not lead to a change of position of the plug-in with respect to the surface of remaining card body 1 since the connection with card body 1 exists throughout the thickness of the card body. Nevertheless, perforations 7 produce a rated breaking line which causes the plug-in to break out upon firmer pressure. The inventive solution leads substantially to two stable states. In the first the plug-in is disposed in a firm position with respect to the remaining card body, while in the second the plug-in is broken out.



AMENDED SHEET

## THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:-

1. A portable data carrier with a break-out mini smart card, the mini smart card being largely separated from the remaining card body by a free punch surrounding most of the mini smart card, characterized in that a rated breaking line is disposed within the 5 mini smart card for further reducing the size of the mini smart card.
2. A portable data carrier according to claim 1, characterized in that the free punch extends over three sides of the mini smart card and a fourth side is perforated.
3. A portable data carrier according to claim 2, characterized in that the free punch extends around the corners of the fourth side and the perforation yields a straight line.
- 10 4. A portable data carrier according to any one of claims 1 to 3, characterized in that the rated breaking line is formed by perforation.
5. A portable data carrier according to claim 4, characterized in that the rated breaking line has higher strength than the fourth perforated side of the punch.
6. A portable data carrier according to claim 4 or 5, characterized in that a bar-15 shaped connection is preferably disposed on the side opposite the perforation for additionally stabilizing the position of the mini smart card in the card body.
7. A portable data carrier with a break out mini smart card, substantially as herein described with reference to the accompanying drawings.

Dated this fourth day of February 2003

Giesecke & Devrient GmbH  
Patent Attorneys for the Applicant:

F B RICE & CO



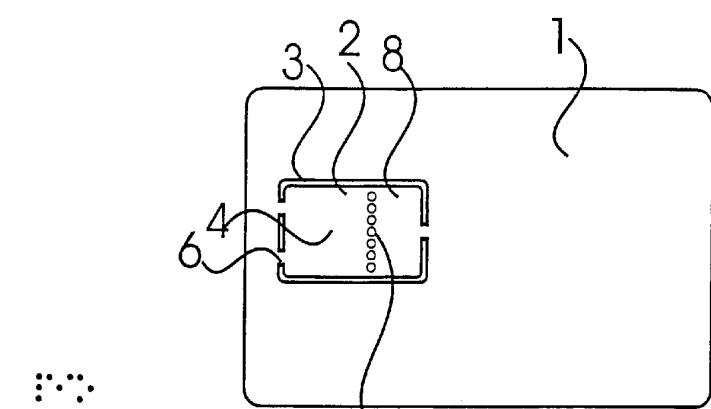


Fig. 1

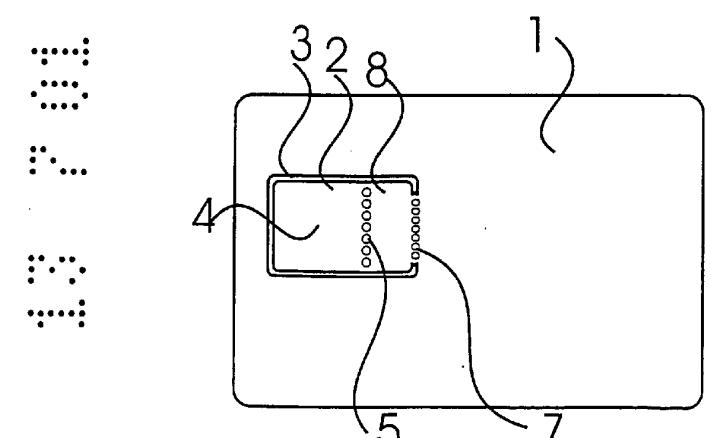


Fig. 2