



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 955 905 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
11.01.2006 Bulletin 2006/02

(51) Int Cl.:
A61B 17/08 (2006.01) **A61B 17/064** (2006.01)
A61B 17/10 (2006.01)

(21) Application number: **96941349.1**

(86) International application number:
PCT/US1996/018255

(22) Date of filing: **15.11.1996**

(87) International publication number:
WO 1997/018761 (29.05.1997 Gazette 1997/23)

(54) **SURGICAL FASTENING SYSTEM**

CHIRURGISCHES KLAMMERSYSTEM

SYSTEME D'AGRAFE CHIRURGICALE

(84) Designated Contracting States:
DE ES FR IT

• **RICE, John, T.**
Lincoln, MA 01773 (US)

(30) Priority: **17.11.1995 US 560111**

(74) Representative: **Draudt, Axel Hermann Christian**
et al

(43) Date of publication of application:
17.11.1999 Bulletin 1999/46

Dr. Sturies - Eichler - Füssel
Patentanwälte
Lönsstrasse 55
42289 Wuppertal (DE)

(73) Proprietor: **INNOVASIVE DEVICES, INC.**
Marlborough, MA 01752-3032 (US)

(56) References cited:
US-A- 4 895 148 **US-A- 5 312 360**
US-A- 5 562 704

(72) Inventors:
• **HART, Rickey, D.**
Plainville, MA 02762 (US)

EP 0 955 905 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Field Of The Invention

[0001] This invention relates to surgical fastening systems in general, and more particularly to surgical fastening systems of the sort comprising tack-like fasteners for attaching one piece of tissue to another piece of tissue.

Background Of The Invention

[0002] In many medical applications, it is necessary (or at least desirable) to fasten one piece of tissue to another piece of tissue.

[0003] In the case of soft tissue, this fastening is traditionally accomplished by sewing the two pieces of tissue together using needle and suture.

[0004] Unfortunately, in certain situations it can be extremely difficult, or even impossible, to suture two pieces of tissue together. In many cases this is due to the natural constraints imposed by the patient's anatomical structure. By way of example, it can be extremely difficult to suture meniscal cartilage, which is located within the interior of the knee joint. Unfortunately, this presents a serious problem, inasmuch as many injuries involve tears to the meniscal cartilage, and suturing would provide an otherwise preferred manner of repair.

[0005] With this and other situations in mind, a variety of different surgical fastening systems have been developed to replace, or at least supplement, conventional suturing.

[0006] See, for example, U.S. Patents Nos. 3,716,058 (Tanner, Jr.); 4,532,926 (O'Halla); 4,548,202 (Duncan); 4,635,637 (Schreiber); 4,669,473 (Richards et al.); 4,873,976 (Schreiber); 4,884,572 (Bays et al.); 4,895,148 (Bays et al.); 4,924,865 (Days et al.); 4,976,715 (Bays et al.); 5,053,047 (Yoon); and 5,059,206 (Winters); French Patent Publication No. 2,573,647 (Catier); and Japanese Patent Publication No. 58-160013.

[0007] See also, for example, U.S. Patents Nos. 4,688,561 (Reese); 4,935,028 (Drews); 5,013,316 (Goble et al.); 5,129,906 (Ross et al.); 5,246,441 (Ross et al.); and 5,370,646 (Reese et al.).

[0008] Unfortunately, none of the prior art surgical fastening systems have proven to be entirely satisfactory, for a wide variety of different reasons. The inadequacy of prior art surgical fastening systems has proven to be particularly significant with respect to repairing tears in meniscal cartilage within the interior of the knee joint.

Objects Of The Invention

[0009] Accordingly, one object of the present invention is to provide a novel surgical fastening system for attaching one piece of tissue to another piece of tissue, wherein the novel surgical fastening system overcomes the various deficiencies associated with prior art surgical fastening systems by providing a novel surgical fastener for

attaching one piece of tissue to another piece of tissue.

[0010] Still another object of the present invention is to provide a novel installation tool for deploying the aforementioned surgical fastener in tissue.

[0011] Yet another object of the present invention is to provide a novel surgical fastening system which is particularly well suited for use in repairing tears in meniscal cartilage.

[0012] And another object of the present invention is to provide a novel surgical fastener being provided for the novel fastening system and which is particularly well suited for use in repairing tears in meniscal cartilage.

[0013] And still another object of the present invention is to provide a novel installation tool which is particularly well suited for use in deploying the aforementioned surgical fastener in meniscal cartilage.

Summary Of The Invention

[0014] These and other objects are addressed by the present invention, which comprises a surgical fastening system

[0015] The surgical fastening system generally comprises a novel surgical fastener and a novel installation tool.

[0016] The novel surgical fastener generally comprises a solid shaft of substantially uniform diameter having a distal end and a proximal end; a bar at the proximal end of the shaft, the bar extending outwardly from the shaft; the distal end of the shaft being rounded and devoid of a cutting edge and devoid of a penetration point; and a fin extending outwardly from the shaft proximate the distal end, the fin having a distal edge inclined outwardly and proximally from the shaft and a proximal edge inclined outwardly and proximally from the shaft. Instead a ball can be provided in with the features of claim 1.

[0017] The novel installation tool generally comprises an elongated inserter which includes a carrier portion, the carrier portion being adapted to retain the fastener and having at a distal end thereof a sharpened edge, the carrier portion having an open side from which extend end portions of the fastener's bar and fin.

[0018] The surgical fastening system is generally used as follows. First, the surgical fastener is fitted to the installation tool's carrier portion so that the end portions of the fastener's bar ball and fin protrude from the carrier portion's open side. Then the installation tool is manipulated so that its carrier portion and the surgical fastener are projected into tissue until the protruding portion of the fastener's bar ball engages the outer surface of the tissue. Finally, the installation tool is manipulated so that the installation tool's carrier portion is withdrawn from the tissue, whereupon the protruding portion of the fastener's fin resists proximal movement of the fastener, causing the fastener to be left in the tissue.

[0019] In order to facilitate initial handling of the surgical fastener and loading the fastener into the installation tool's carrier portion, the surgical fastener may initially

be connected to a grip by one or more tabs, and the surgical fastener and its associated grip may initially be loaded into a holder, with the fastener being accessible in the holder through an opening. Thereafter, the surgical fastener can be loaded into the installation tool's carrier portion by inserting the distal end of the installation tool into the holder's opening, whereby the distal end of the installation tool will serially sever any tabs holding the surgical fastener to the grip as the surgical fastener is simultaneously loaded into the installation tool's carrier portion. The installation tool and the surgical fastener can thereafter be withdrawn from the holder as a unit, ready for use in attaching one piece of tissue to another piece of tissue.

Brief Description Of The Drawings

[0020] These and other objects and features of the present invention will be more fully disclosed or rendered obvious by the following detailed description of the preferred embodiments of the invention, which are to be considered together with the accompanying drawings wherein like numbers refer to like parts, and further wherein:

Fig. 1 is a side view of a surgical fastener formed in accordance with the present invention;

Fig. 2 is a top view of the same surgical fastener;

Fig. 3 is a front end view of the same surgical fastener;

Fig. 4 is a partial side view, partially in section, of an installation tool formed in accordance with the present invention, with the view having been taken along line 4-4 in Fig. 6;

Fig. 5 is a partial top view, partially in section, of the same installation tool, with the view having been taken along line 5-5 in Fig. 6;

Fig. 6 is a front end view of the same installation tool;

Fig. 7 is a partial side view, partially in section, showing the surgical fastener of Figs. 1-3 loaded into the installation tool of Figs. 4-6;

Fig. 8 is a partial top view, partially in section, of the assembly shown in Fig. 7;

Fig. 9 is a front end view of the assembly shown in Figs. 7 and 8;

Fig. 10 is a schematic view showing the assembly of Figs. 7-9 approaching a tear located in a piece of meniscal cartilage;

Fig. 11 is a schematic view showing the assembly of Figs. 7-9 spanning the aforementioned tear;

Fig. 12 is a schematic view showing the surgical fastener of Figs. 1-3 holding the aforementioned tear closed as the fastener's associated installation tool is withdrawn from the piece of meniscal cartilage;

Fig. 13 is side view of the same surgical fastener shown in Figs. 1-3, wherein the fastener is shown attached to a grip by a pair of tabs;

Fig. 14 is a front end view of the same surgical fas-

tener and its associated grip;

Fig. 15 is a side view of a holder for holding the surgical fastener and its associated grip prior to loading the surgical fastener into its associated installation tool;

Fig. 16 is a rear end view of the same holder, i.e., as seen from the right side in Fig. 15;

Fig. 17 is a side view of a second installation tool for deploying the surgical fastener of the present invention, with this installation tool being shown with its inserter positioned in a first, retracted position;

Fig. 18 is a side view of the second installation tool, but with the installation tool being shown with its inserter positioned in a second, partially-extended position;

Fig. 19 is a side view of the second installation tool, but with the installation tool being shown with its inserter positioned in a third, fully-extended position;

Fig. 20 is a side view showing the surgical fastener and grip of Figs. 13 and 14 mounted in the holder of Figs. 15 and 16, with selected portions of the holder being shown broken away;

Fig. 21 is a side view of the same assembly as that shown in Fig. 20, except that the distal end of the second installation tool of Figs. 17-19 is shown positioned adjacent to the proximal end of the surgical fastener, with the installation tool's inserter being positioned in its first, retracted position in preparation for loading the surgical fastener onto the inserter;

Fig. 22 is a side view of the same assembly as that shown in Fig. 21, except that the installation tool has had its inserter advanced from its first, retracted position to its third, fully-extended position so as to load the surgical fastener onto the inserter;

Fig. 23 is a front end view showing the surgical fastener loaded onto the second installation tool's inserter;

Fig. 24 is a side view of the same assembly as that shown in Fig. 22, except that the installation tool has had its inserter retracted from its third, fully-extended position to its first, retracted position so as to carry the surgical fastener back into the interior of the installation tool;

Fig. 25 is a side view showing the second installation tool, carrying the surgical fastener, approaching a tear located in a piece of meniscal cartilage, with the installation tool's inserter being positioned in its first, retracted position so that the surgical fastener is fully withdrawn into the interior of the installation tool;

Fig. 26 is a side view like that of Fig. 25, except that the installation tool's inserter has been advanced into its second, partially-extended position as the surgical fastener is inserted into the piece of meniscal cartilage at the near side of the tear;

Fig. 27 is a side view like that of Fig. 26, except that the installation tool's inserter has been advanced into its third, fully-extended position as the surgical fastener is extended across the tear;

Fig. 28 is a side view showing the surgical fastener holding the aforementioned tear closed, with the installation tool having been removed from the surgical site;

Fig. 29 is a side view like that of Fig. 28, except showing three surgical fasteners closing a tear in a piece of meniscal cartilage;

Fig. 30 is a side view of a second surgical fastener formed in accordance with the present invention;

Fig. 31 is a side view of a third surgical fastener formed in accordance with the present invention;

Fig. 32 is a side view of a fourth surgical fastener formed in accordance with the present invention;

Fig. 33 is a side view of a fifth surgical fastener formed in accordance with the present invention;

Fig. 34 is a side view of a sixth surgical fastener formed in accordance with the present invention;

Fig. 35 is a side view showing the surgical fastener of Fig. 34 attaching a piece of surgical mesh to a piece of tissue;

Fig. 36 is a perspective view showing the surgical fastener of Fig. 34 attaching the piece of surgical mesh to the piece of tissue;

Fig. 37 is a partial side view showing the distal end of a third installation tool formed in accordance with the present invention;

Fig. 38 is a side view showing the distal end of the third installation tool, with the third installation tool having been rotated 90 degrees from the position shown in Fig. 37;

Fig. 39 is a partial side view, partially in section, of an assembly comprising a seventh surgical fastener formed in accordance with the present invention and an installation tool for deploying the same;

Fig. 40 is a partial top view, partially in section, of the assembly shown in Fig. 39;

Fig. 41 is a partial top view, partially in section, of an assembly comprising an eighth surgical fastener formed in accordance with the present invention and an installation tool for deploying the same;

Fig. 42 is a side view showing the eighth surgical fastener of Fig. 41 closing a tear in a piece of meniscal cartilage;

Fig. 43 is a side view of a ninth surgical fastener formed in accordance with the present invention;

Fig. 44 is a side view of a tenth surgical fastener formed in accordance with the present invention;

Fig. 45 is a front end view showing the tenth surgical fastener of Fig. 44 being carried by an appropriate installation tool; and

Fig. 46 is a side view of an eleventh surgical fastener formed in accordance with the present invention.

Detailed Description Of The Preferred Embodiments

[0021] Looking first at Figs. 1-3, there is shown a surgical fastener 5 which is formed in accordance with the present invention. Surgical fastener 5 comprises a shaft

10 extending along a longitudinal axis 15 and having a top surface 20, a bottom surface 25, a distal end surface 30 and a proximal end surface 35. Distal end surface 30 is formed so as to have a blunt configuration, devoid of a cutting edge and devoid of a penetration point. Preferably distal end surface 30 is formed so as to have a substantially rounded configuration, for reasons which will hereinafter be disclosed in further detail. Proximal end surface 35 is preferably also formed so as to have a rounded configuration, for reasons which will hereinafter be disclosed in further detail.

[0022] At least one fin or barb 40 extends out of the fastener's top surface 20, adjacent to distal end surface 30. Each fin 40 is configured so as to (i) present the least possible resistance to tissue when the fastener is being passed, distal end first, through tissue, and (ii) present the greatest possible resistance to tissue when the fin is being withdrawn, proximal end first, from tissue. To this end, each fin 40 generally projects radially outwardly, and longitudinally rearwardly, from shaft 10. Preferably each fin 40 comprises a leading surface 45 and a trailing surface 50, where leading surface 45 is disposed at a significantly more acute angle to the shaft's longitudinal axis 15 than trailing surface 50. By way of example, leading surface 45 might be disposed at a 30 degree angle to the shaft's longitudinal axis 15, whereas trailing surface 50 might be disposed at a 75 degree angle to the shaft's longitudinal axis 15. Preferably leading surface 45 and trailing surface 50 meet at a sharp point 55.

[0023] Surgical fastener 5 also comprises a bar 60 which projects radially outwardly from the fastener's top surface 20, adjacent to proximal end surface 35. Bar 60 is adapted to present the greatest possible resistance to tissue when the fastener is being passed, distal end first, through tissue. To this end, bar 60 extends generally radially outwardly from shaft 10, and comprises a distal surface 65 and a proximal surface 70. Preferably bar 60 leans slightly distally, in the manner shown in Figs. 1 and 2, as will hereinafter be disclosed in further detail. By way of example, bar 60 preferably extends at a 75 degree angle to the shaft's longitudinal axis 15.

[0024] As seen in Figs. 2 and 3, each fin 40 and the bar 60 is preferably sized so as to have a width slightly less than the width of shaft 10, for reasons which will hereinafter be disclosed in further detail. Furthermore, as seen in Fig. 1, it is preferred that the fastener's bar 60 sit higher above the fastener's top surface 20 than fins 40, for reasons which will hereinafter also be disclosed in further detail.

[0025] Surgical fastener 5 may be formed in a variety of different sizes, according to its intended use. By way of example, where surgical fastener 5 is to be used to close a tear in a piece of meniscal tissue, surgical fastener 5 might be formed with the following dimensions:

total length	10.0 mm
barb height	2.0 mm

Table continued

bar height	2.5 mm
shaft width	1.0 mm
barb width	0.8 mm
bar width	0.8 mm

[0026] Surgical fastener 5 is formed out of a bio-compatible material, whereby it may be installed in living tissue without causing adverse reaction. By way of example, surgical fastener 5 may be formed out of a non-absorbable bio-compatible material of the sort well known in the art, e.g., acetal or polyethylene. Alternatively, surgical fastener 5 may be formed out of an absorbable bio-compatible material of the sort well known in the art, e.g., polylactic acid (PLA) or polyglycolic acid (PGA) or polycaprolactone (PCL) or trimethylene carbonate (TMC) or a blend, mix or copolymer of these or the like.

[0027] Surgical fastener 5 may be manufactured by any manufacturing process consistent with its composition. By way of example, but not limitation, where surgical fastener 5 is formed out of acetal or polyethylene, it may be molded in a mold or stamped and formed from a large sheet. Alternatively, where surgical fastener 5 is formed out of PLA or PGA or PCL or TMC or a blend, mix or copolymer of these or the like, they may be molded in a mold.

[0028] Looking next at Figs. 4-6, there is shown an installation tool 75. Installation tool 75 comprises an inserter 80 extending along a longitudinal axis 85 and having a top surface 90 and a bottom surface 95. The distal end of inserter 80 comprises a carrier portion 83 which terminates in a sharp point 100. Preferably sharp point 100 is formed by sloping the inserter's distal end surface 101 (Fig. 4) at an angle of 30 degrees relative to longitudinal axis 85.

[0029] The inserter's carrier portion 83 is adapted to carry surgical fastener 5 for deployment of that fastener in tissue. More particularly, the inserter's carrier portion 83 comprises a recess 105 which is formed in the distal end of inserter 80, extending proximally from sharp point 100. Recess 105 provides a seat for surgical fastener 5 as will hereinafter be disclosed in further detail. To this end, recess 105 defines a floor 110 and terminates at a shoulder 115. Preferably recess 105 is created by forming a proximally-extending bore 120 (Fig. 6) in the distal end of inserter 80, and then cutting a slot 125 (Fig. 6) in the inserter's top surface 90. By forming slot 125 so that it has a width slightly less than the diameter of bore 120 (Fig. 6), recess 105 can be provided with a keyway-type configuration.

[0030] Looking next at Figs. 7-9, surgical fastener 5 is intended to be seated in the installation tool's carrier portion 83 prior to deployment of the fastener into tissue. More particularly, surgical fastener 5 is intended to be backed into the installation tool's distal recess 105 so that the fastener's shaft 10 is received in the inserter's

bore 120 and the fastener's fins 40 and bar 60 protrude out the top of inserter 80, through the inserter's slot 125. As seen in Figs. 7 and 8, surgical fastener 5 and installation tool 75 are sized so that when the surgical fastener's proximal end surface 35 engages the installation tool's shoulder 115, the surgical fastener's distal end surface 30 will sit completely within the inserter's bore 120, withdrawn from the installation tool's sharp point 100. Furthermore, as seen in Fig. 9, surgical fastener 5 and installation tool 75 are sized so that only the fastener's fins 40 and bar 60, and not its shaft 10, will be able to protrude out through the shaft's top slot 125. This construction ensures that surgical fastener 5 can enter and exit the inserter's recess 105 only via the distal end of the recess, adjacent to the installation tool's sharp point 100. Surgical fastener 5 and installation tool 75 are also sized so that the surgical fastener will make a close sliding fit with the walls of the inserter's recess 105, whereby the fastener will be supported by the inserter, yet be able to move axially along recess 105.

[0031] A handle (not shown) is attached to the proximal end of inserter 80 by which the installation tool may be grasped by a user. By way of example, but not limitation, a screwdriver sort of handle, or a pistol grip sort of handle, might be attached to the proximal end of the inserter.

[0032] It will be appreciated that the dimensions of installation tool 75 are carefully coordinated with the dimensions of surgical fastener 5, and that these dimensions may vary according to the fastener's intended use. By way of example, where surgical fastener 5 has a total length of 10mm, a barb height of 2mm, a bar height of 2.5 mm, a shaft width of 1mm, a barb width of 0.8mm and a bar width of 0.8mm, installation tool 75 might be formed with the following dimensions:

inserter height	1.5 mm
inserter width	1.5 mm
recess length (to point 100)	10.5 mm
slot width	0.85 mm
bore diameter	1.1 mm

[0033] Surgical fastener 5 and installation tool 75 can be used to fasten one piece of tissue to another piece of tissue. By way of example, but not limitation, surgical fastener 5 and installation tool 75 can be used to close a tear in a piece of meniscal cartilage located within the interior of a knee joint.

[0034] More particularly, and looking now at Fig. 10, surgical fastener 5 and installation tool 75 can be used to close a tear 130 formed in a piece of meniscal cartilage 135 in the following manner.

[0035] First, surgical fastener 5 is loaded into installation tool 75 by backing the fastener into the installation tool's recess 105 so that the fastener sits in the inserter in the manner shown in Figs. 7-9. In this arrangement, the only portions of surgical fastener 5 that protrude out of installation tool 75 are the upper portions of the fas-

tener's fins 40 and bar 60.

[0036] Next, the distal end of installation tool 75 is positioned on the proximal side of tear 130, with the inserter's sharp point 100 adjacent to the outer surface of meniscal cartilage 135. Then the inserter's sharp point 100 is forced into the meniscal cartilage and across tear 130 (Fig. 11). As this occurs, surgical fastener 5 is carried through meniscal tissue 135 by inserter 80. It should be appreciated that surgical fastener 5 passes through the meniscal tissue without appreciable hindrance since the portions of fins 40 protruding from the inserter's recess 105 are configured to slide easily through the tissue in a distal direction. Forward movement of inserter 80 and surgical fastener 5 continues until the portion of the fastener bar 60 protruding from the inserter's recess 105 engages the outer surface of meniscal tissue 135. This engagement inhibits further movement of the assembly into the cartilage, since bar 60 is configured so as to inhibit movement through tissue in a distal direction. In this respect it should be appreciated that this is particularly true inasmuch as bar 60 is oriented with a slight distal lean, so as to increase the bar's resistance to distal movement through tissue. At this point the force of the fastener's bar 60, pressing against the outer surface of meniscal cartilage 135, will tend to close up tear 130 (Fig. 11).

[0037] Next, installation tool 75 is withdrawn from meniscal cartilage 135. As this occurs, the portions of the fastener's fins 40 protruding from the inserter's recess 105 catch on the meniscal cartilage disposed on the distal side of tear 130. This causes surgical fastener 5 to remain in place within meniscal cartilage 135 as the installation tool is withdrawn from the cartilage. Surgical fastener 5 sits within meniscal cartilage 135, with the meniscal cartilage on the distal side of tear 130 being prohibited from moving in a distal direction by the fastener's fins 40, and with the meniscal cartilage on the proximal side of tear 130 being prohibited from moving in a proximal direction by the fastener's bar 60. This effectively keeps tear 130 closed so as to facilitate healing of the meniscal cartilage (Fig. 12).

[0038] It is to be appreciated that surgical fastener 5 is preferably sized so as to ensure that the fastener's distal end surface 30 is completely buried within the receiving tissue. This will prevent the distal end of the surgical fastener from engaging, and possibly interfering with, any bodily structures which may lie on the far side of the receiving tissue. Thus, for the exemplary meniscal cartilage application discussed above, surgical fastener 5 would be sized so that its distal end surface 30 is buried within the meniscal cartilage 135 when the fastener's bar 60 bears against the outer surface of the meniscal cartilage. As a result, the distal end of the fastener will be insulated from engagement with any bodily structures which may lie on the far side of the cartilage.

[0039] However, in this respect it is also to be appreciated that, even if the distal end of surgical fastener 5 should inadvertently protrude from the far side of the car-

tilage, the deliberately rounded configuration of the fastener's distal end surface 30 will permit it to gently engage any such bodily structures, without any adverse consequences to such structures. This is an extremely important feature and a major advance over prior art fastening systems, which generally utilize surgical fasteners having sharply pointed distal end structures. Thus the present invention can be used safely in many situations (e.g., joint surgery) where prior art fasteners cannot be used safely. In this respect it is also to be appreciated that it is possible to provide surgical fastener 5 with its aforementioned rounded distal end surface 30 inasmuch as the present invention relies on the installation tool's sharp point 100, and not on the fastener's distal end surface 30, to open a way in the tissue.

[0040] Furthermore, inasmuch as it is the installation tool's sharp point 100 which opens a way in the tissue for the fastener, and not the surgical fastener's distal end surface 30, the fastener's shaft does not have to be made particularly rigid. Rather, some or all of the surgical fastener's shaft 10 can be made somewhat flexible, if desired, so long as the fastener's barbs 40 and bar 60 are given sufficient structural support to permit them to maintain their orientation vis-a-vis the receiving tissue. This is another extremely important feature and another significant advantage over prior art fastening systems, which generally require that a rigid shaft be provided to permit tissue penetration.

[0041] It is also to be appreciated that inasmuch as surgical fastener 5 is formed with a rounded proximal surface 35, and inasmuch as the fastener's bar 60 is configured so as to lean slightly in a distal direction, the proximal end of fastener 5 will present a non-obtrusive presence on the surface of meniscal cartilage 135. As a result, the proximal end of the fastener will not pose a threat to any bodily structures which may lie on the near side of the cartilage.

[0042] Since it is intended that surgical fastener 5 may be formed fairly small (e.g., a length of about 1 cm in the meniscal cartilage application), it is preferred that means be provided to facilitate handling of the fastener, both during manufacture of the fastener and during loading of the fastener into installation tool 75 or into some other installation tool formed in accordance with the present invention.

[0043] To this end, it is preferred that (i) a grip 140 (Figs. 13 and 14) be provided in association with surgical fastener 5, whereby the fastener can be more easily manipulated during manufacture of the fastener, and (ii) a holder 145 (Figs. 15 and 16) be provided for holding surgical fastener 5 and its associated grip 140 prior to loading the surgical fastener into its associated installation tool. In accordance with the present invention, a second installation tool 150 (Figs. 17-19) is also disclosed for use in conjunction with surgical fastener 5, grip 140 and holder 145.

[0044] More particularly, and looking now at Figs. 13 and 14, a surgical fastener 5 is shown attached to a grip

140 via a pair of tabs 155. Grip 140 essentially comprises a relatively large, generally rectangular mass or plate 160 which, due to its relative size, is more easily manipulated by hand than fastener 5. Thus, the provision of grip 140 will facilitate handling of fastener 5 during manufacture of the fastener 5. Tabs 155 extend between grip 140 and fastener 5. As seen in Fig. 14, tabs 155 have a reduced thickness adjacent to fastener 5, so as to facilitate separation of the fastener from the tabs, as will hereinafter be disclosed in further detail. It is preferred that fastener 5, grip 140 and tabs 155 all be formed at the same time, out of the same material, as part of a single complete assembly, e.g., by molding.

[0045] As noted above, the assembly shown in Figs. 13 and 14 is preferably used in conjunction with the holder 145 shown in Figs. 15 and 16. More particularly, it is envisioned that surgical fastener 5 and grip 140 will be packaged in holder 145 at the time of manufacture, and then removed from the holder at the time that the fastener is to be used in a surgical procedure. To this end, holder 145 includes a first recess 165 for accommodating shaft 10 of fastener 5, an adjacent opening 170 for accommodating fins 40 and bar 60 of surgical fastener 5, and an adjacent opening 175 for accommodating grip 140 associated with fastener 5. Holder 145 also comprises an opening 180 for permitting an installation tool to enter holder 145 and to engage, and then withdraw, the surgical fastener 5 from the holder, as will hereinafter be disclosed in further detail. To this end, opening 180 communicates with both opening 165 and opening 170. A shoulder 185 is formed at the point where openings 165, 170 and 180 meet. Preferably holder 145 is formed out of two mirror halves 145A and 145B (Fig. 16) so as to facilitate the manufacture of holder 145 and the positioning of surgical fastener 5 and grip 140 in the holder.

[0046] Looking next at Figs. 17-19, a second installation tool 150 is shown which may be used in conjunction with the present invention. Second installation tool 150 comprises an inserter 80 (Figs. 18 and 19) similar to the inserter 80 disclosed above. Inserter 80 is slidably disposed with an elongated tube 190. Tube 190 includes a distal end 195 terminating in a distal end surface 200, and a proximal end 205. Distal end surface 200 is preferably flat, whereby tube 190 will present a blunt distal end. The proximal end 205 of tube 190 is connected to a handle 210. Handle 210 includes a button 215 which is connected to the proximal end of inserter 80 via selected means of the sort well known in the art (not shown) whereby button 215 may be used to position inserter 80 in (i) a first retracted position, wherein the distal end of the inserter is withdrawn into the interior of tube 190 (Fig. 17), (ii) a second, partially-extended position, wherein the inserter's sharp point 100 and a portion of its recess 105 will be projected out of the distal end of the installation tool's tube 190 (Fig. 18), and (iii) a third, fully-extended position, wherein all of the inserter's recess 105 will be projected out of the distal end of the installation tool's tube 190 (Fig. 19). In addition to the foregoing, the instal-

lation tool's tube 190 is sized so that it can accommodate a surgical fastener 5 carried by inserter 80. By way of example, where surgical fastener 5 and inserter 80 have the exemplary dimensions recited previously, tube 190 might have the following dimensions:

tube inner diameter height	3.2 mm
tube inner diameter width	1.8 mm
tube outer diameter height	3.7 mm
tube outer diameter width	2.3 mm

[0047] Thus it will be appreciated that when the installation tool's inserter 80 is in (i) its first, retracted position (Fig. 17), a surgical fastener 5 carried by the inserter's carrier portion 83 will be disposed completely within tube 190, (ii) its second, partially-extended position (Fig. 18), a surgical fastener 5 carried by the inserter's carrier portion 83 will have its fins 40 exposed out the distal end of tube 190 but its bar 60 shielded within tube 190, and (iii) its third, fully-extended position (Fig. 19), a surgical fastener 5 carried by the inserter's carrier portion 83 will have its fins 40 and bar 60 exposed out the distal end of tube 190.

[0048] As seen in Figs. 17-19, tube 190 is preferably bent slightly near its distal end 195, so as to facilitate deployment of surgical fastener 5. To this end, inserter 80 is formed so as to have sufficient flexibility to permit it to move easily through this bend as the inserter is moved between its aforementioned first, second and third position (i.e., the positions shown in Figs. 17, 18 and 19, respectively). At the same time, however, inserter 80 is formed so as to have sufficient structural integrity to permit it to penetrate the receiving tissue, so as to deploy the surgical fastener in that tissue.

[0049] As noted above, the surgical fastener and grip assembly shown in Figs. 13 and 14 is intended to be positioned within holder 145 at the time of manufacture, and then the surgical fastener loaded into second installation tool 150 at the time that the fastener is to be used in a surgical procedure.

[0050] More particularly, and looking next at Fig. 20, surgical fastener 5 and its associated grip 140 are intended to be positioned within holder 145 at the time of manufacture so that the fastener's shaft 10 is disposed in holder opening 165, the fastener's fins 40 and bar 60 are disposed in holder opening 170, and grip 140 is disposed in holder opening 175. As seen in Fig. 20, holder 145 is sized so that the proximal end of fastener 5 protrudes slightly beyond the holder's shoulder 185 and into holder opening 180.

[0051] Looking next at Fig. 21, surgical fastener 5 is intended to be loaded into second installation tool 150 at the time that the fastener is to be used in a surgical procedure. More particularly, surgical fastener 5 is loaded into second installation tool 150 in the following manner.

[0052] First, the second installation tool 150 has its inserter 80 positioned in its first, retracted position (Fig.

17). Then the distal end 195 of the installation tool is inserted into holder opening 180 until the tube's distal end surface 200 engages holder shoulder 185. At this point recess 105 of the installation tool's inserter will be aligned with surgical fastener 5.

[0053] Next, the installation tool's inserter 80 is advanced from its first, retracted position to its third, fully-extended position (Fig. 22). As this occurs, the inserter's sharp point 100 will sequentially engage and then sever each of the tabs 155 holding surgical fastener 5 to grip 140, so as to free surgical fastener 5 from grip 140. At the same time that this occurs, the advancing inserter 80 will also envelope fastener 5 so that the fastener will be loaded into the inserter's recess 105. It is to be appreciated that, as the inserter severs tabs 155 and picks up fastener 5 in recess 105, small nibs 155A (Fig. 23) of tabs 155 remain attached to the fastener's bottom surface 25. These small nibs 155A give fastener 5 a slight upward bias within recess 105 of inserter 80, so as to cause fastener 5 to make a snug fit within that recess.

[0054] Next, inserter 80 is withdrawn back into tube 190 (Fig. 24). As this occurs, surgical fastener 5 is carried away from grip 140, and into tube 190, by the retreating inserter 80. Finally, installation tool 150 is withdrawn from holder 145. At this point, surgical fastener 5 will be loaded in the installation tool's inserter 80, ready to be deployed into tissue.

[0055] Once surgical fastener 5 has been loaded into second installation tool 150, the surgical fastener and the installation tool can be used to fasten one piece of tissue to another piece of tissue. By way of example, but not limitation, surgical fastener 5 and installation tool 150 can be used to close a tear in a piece of meniscal cartilage.

[0056] More particularly, and looking now at Fig. 25, surgical fastener 5 and second installation tool 150 can be used to close a tear 130 formed in a piece of meniscal cartilage 135. This may be accomplished in the following manner.

[0057] First, the distal end of installation tool 150 is positioned on the proximal side of tear 130, with the tube's distal end surface 200 adjacent to the outer surface of the piece of meniscal cartilage 135 (Fig. 25). At this point, the installation tool's inserter 80 will be in its first, retracted position, so that fastener 5 will be completely encased in the installation tool's tube 190.

[0058] Next, the installation tool has its inserter 80 advanced into its second, partially-extended position, and the inserter's sharp point 100 is forced into the meniscal cartilage and across tear 130 (Fig. 26). As this occurs, surgical fastener 5 is carried through meniscal tissue 135 by inserter 80. As noted previously with respect to installation tool 75, inserter 80 is able to pass into the meniscal cartilage without significant impedance, since the portions of the fastener's fins 40 protruding from the inserter's recess 105 are configured to slide easily through the tissue in a distal direction. Forward movement of inserter 80 continues until the tube's distal end surface 200 engages the outer surface of meniscal tissue 135.

[0059] Next, the installation tool's inserter 80 is advanced from its second, partially-extended position to its third, fully-extended position. As this occurs, the installation tool's distal end surface 200 is kept pressed against the outer surface of the meniscal cartilage, compressing the tissue and thereby closing tear 130. Accordingly, the installation tool's inserter passes further into the tissue, until the fastener's bar 60 engages the outer surface of the meniscal cartilage (Fig. 27). At this point, further movement of the assembly into the cartilage is prohibited, since bar 60 is configured so as to prohibit movement through tissue in a distal direction.

[0060] Next, the installation tool's inserter 80 is moved from its third, fully-extended position (Fig. 27) to its first, fully retracted position. This causes the inserter to be withdrawn from meniscal cartilage 135. As this occurs, the portions of the fastener's fins 40 protruding from the inserter's recess 105 catch on the meniscal cartilage disposed on the distal side of tear 130. This causes fastener 5 to remain in place within meniscal cartilage 135 as the inserter is retracted back into the installation tool's tube 190. At the same time, the installation tool's distal end surface 200 is kept pressed tightly against the near surface of the cartilage, whereby tear 130 in meniscal cartilage 135 is kept closed as the retreating inserter 80 is withdrawn from the cartilage. Fastener 5 remains in meniscal cartilage 135, with the meniscal cartilage on the distal side of tear 130 being prohibited from moving in a distal direction by the fastener's fins 40, and the meniscal cartilage on the proximal side of tear 130 being prohibited from moving in a proximal direction by the fastener's bar 60. This effectively keeps tear 130 closed so as to facilitate healing of the meniscal cartilage (Fig. 28). Installation tool 150, which has its sharp inserter 80 safely sheathed within its tube 190, may then be withdrawn from the surgical site.

[0061] It is anticipated that in some situations (e.g., the situation shown in Figs. 12 and 28), a single fastener 5 may be sufficient to effect the desired tissue attachment. However, it is also anticipated that in other situations (e.g., the situation shown in Fig. 29) multiple fasteners may be used to effect the desired tissue attachment.

[0062] It is to be appreciated that the particular construction of installation tool 150 permits the installation tool to be moved to the surgical site while its sharp inserter 80 is safely sheathed within blunt tube 190, and thereafter removed from the surgical site while its sharp inserter 80 is safely sheathed within blunt tube 190. This is an important feature, particularly where the installation tool must be maneuvered around delicate bodily structures on its way to, and away from, the surgical site.

[0063] As disclosed above, surgical fastener 5 can be used to attach one piece of tissue to another piece of tissue. This was illustrated above in connection with closing a tear 130 in a piece of meniscal cartilage 135. However, it should also be appreciated that surgical fastener 5 can be used to effect many other types of tissue attachment. By way of further illustration, but not limitation,

surgical fastener 5 might be used to repair a tear in a rotator cuff. Or surgical fastener 5 might be used to attach together other types of tissue, e.g., surgical fastener 5 might be used to attach skin to an underlying tissue structure, or it might be used in other types of plastic surgery, or it might be used to attach vascular tissue to an adjacent tissue structure, or it might be used to attach ocular tissue to an adjacent tissue structure. It is also possible to use surgical fastener 5 to attach a piece of "seed" tissue to an underlying tissue structure, where that "seed" tissue will be used to grow a predetermined body part onto that underlying tissue structure.

[0064] It is also to be appreciated that surgical fastener 5 can be used to attach bio-compatible inanimate objects to tissue. By way of example, surgical fastener 5 might be used to attach an inanimate device to soft tissue. In such a case, the inanimate device can be either absorbable or non-absorbable. By way of further example, surgical fastener 5 might be used to attach a woven material, or a filament, or a film-like material to tissue.

[0065] Conversely, it is also possible to use surgical fastener 5 to attach tissue to a bio-compatible inanimate object. For example, surgical fastener 5 might be used to attach a piece of tissue to a bio-compatible substrate, and then that substrate might in turn be attached to another piece of tissue.

[0066] Still other variations of this sort will be obvious to a person skilled in the art.

[0067] As noted above, the dimensions of surgical fastener 5 will vary according to its particular use.

Modifications Of The Preferred Embodiments

[0068] It is, of course, possible to modify the preferred embodiments disclosed above without departing from the scope of the present invention.

[0069] Thus, for example, it is possible to provide a surgical fastener 5 such as that shown in Fig. 30. Surgical fastener 5 is identical to the surgical fastener 5 disclosed above, except that it has its bar 60 set at a substantially right angle to the axis 15 of its shaft 10.

[0070] It is also anticipated that one might provide a surgical fastener 5 such as that shown in Fig. 31. Surgical fastener 5 is identical to the surgical fastener 5 disclosed above, except that three fins 40 are provided at the distal tip of the fastener. Alternatively, more than three fins might be provided at the distal tip of the fastener.

[0071] It is also possible to provide a surgical fastener 5 such as that shown in Fig. 32. Surgical fastener 5 is identical to the surgical fastener 5 disclosed above, except that only one fin 40 is provided at the distal tip of the fastener.

[0072] Of course, fins 40 may have other shapes and/or sizes so as to be appropriate for particular tissue attachment procedures.

[0073] It is also anticipated that one might provide a surgical fastener 5 such as that shown in Fig. 33. Surgical fastener 5 is identical to the surgical fastener 5 disclosed

above, except that the fastener's bar 60 includes a distally projecting portion 60D' which extends parallel to the fastener's shaft 10. Thus, fastener 5 is essentially provided with a hook-shaped rear end, where that hook is formed by the proximal end of shaft 10, bar 60, and return 60D'.

[0074] It is, of course, possible to provide the fasteners 5 with similar hook-shaped rear ends. Thus, for example, a fastener 5 is shown in Fig. 34, where fastener 5 is identical to fastener 5 shown in Fig. 32, except that fastener 5 here includes a hook-shaped rear end of the sort disclosed above, i.e., a hook formed by the proximal portion of shaft 10, bar 60 and return 60D'.

[0075] By providing a hook-shaped rear end on the surgical fastener, it is possible to attach objects to tissue using the fastener's hook-shaped rear end. By way of example, but not limitation, it is possible to use a fastener such as the fastener 5 of Fig. 34 to attach a piece of surgical mesh to tissue, e.g., to abdominal tissue. More particularly, and looking now at Figs. 35 and 36, in this situation a surgical fastener 5 is set so that its hook-shaped rear end captures a filament 220 of the surgical mesh 225 to tissue 230, with the filament being captured by the hook formed by the proximal end of fastener shaft 10, bar 60 and return 60D'.

[0076] Surgical fastener 5 might also be used to attach other objects to tissue, e.g., to capture a single long strand or filament to tissue.

[0077] It is also anticipated that, in certain circumstances, installation tool 75 or second installation tool 150 might be provided with a particular geometry to facilitate applying the fastener in hard-to-reach places. By way of example, in Figs. 4-12, installation tool 5 is shown to have a substantially straight distal end; and in Figs. 17-19 and 21-27, second installation tool 150 is shown to have a simple curve at its distal end. However, certain situations may call for a more complex shaft geometry to permit the distal end of the installation tool to reach a particular location. For example, and looking now at Figs. 37 and 38, it is anticipated that one might form the second installation tool 150 so that it has an elongated tube 190 which includes compound curves. Such compound curves can prove exceedingly useful in navigating around various anatomical structures found within the body, e.g., in navigating around the condyles when closing a tear in a piece of meniscal cartilage within the knee joint.

[0078] It is also possible to form a staple-type of fastener out of two or more surgical fasteners of the sort disclosed above. Thus, for example, and looking now at Figs. 39 and 40, a staple-type surgical fastener 240 can be formed out of two fasteners 5 of the sort disclosed above. In this situation, a bridge section 60C" extends between the two bars 60 so as to link the two fasteners 5 together. A modified installation tool 245, formed out of two installation tools 75 connected together in ways well known in the art (not shown), is used to insert the staple-type surgical fastener 240.

[0079] Yet another possible variation is shown in Fig. 41. Here two surgical fasteners 5 are combined so as to

form a staple-type fastener 240. This is done by turning each of the surgical fasteners on its side so that their top-surfaces 20 face each other, extending the bar of each fastener, and then joining the two bars together so as to form a bridge 60C". In this situation, the staple-type fastener 240 can be set by a modified installation tool 260. Installation tool 260 comprises two installation tools 75 of the sort described above, wherein the installation tools are turned on their sides so that their slots 125 face one another, and then connected together in ways well known in the art (not shown).

[0080] Fig. 42 shows the staple-like fastener 240 closing a tear 130 in a piece of meniscal cartilage 135.

[0081] Fig. 43 shows another surgical fastener 5. Surgical fastener 5F is identical to the surgical fastener 5 described above, except that (i) the fastener's bar 60 extends on both sides of the fastener's shaft 10, and (ii) shaft 10 has its proximal portion 10F' laterally displaced from its distal portion 10F", so that the fastener's surface 265 is coplanar with its surface 25F. Such lateral displacement of shaft 10 at the proximal end of the shaft permits fastener 5 to fit in inserter 80, with surfaces 25F and 265 resting on inserter surface 110 (Figs. 4 and 5).

[0082] Fig. 44 shows yet another surgical fastener 5. Fastener 5 is similar to the surgical fastener, except that the fastener's bar 60 extends on both sides of the fastener's shaft 10. In order to install fastener 5 in tissue, it is desirable to use an installation tool comprising an inserter 80G (Fig. 45). Inserter 80 is identical to the inserter 80 described above, except that the inserter has an elliptical cross-section, and a bottom groove 270 is disposed in the bottom surface of recess 105. Groove 270 accepts the lower portion of bar 60.

[0083] Still another surgical fastener 5 is shown in Fig. 46. Surgical fastener 5 is identical to the fastener 5 described above, except that bar 60 has been replaced with a relatively large round ball 60H. It will be appreciated that fastener 5 can be deployed into tissue using an inserter very similar to the inserter 80 shown in Fig. 45, except that the bottom groove 270 of inserter 80 would be modified so as to match the lower half of round ball 60H.

[0084] Further, while in foregoing description and drawings the surgical fastener's shaft is disclosed as having a round cross-section, other cross-sections (e.g., square or rectangular) could also be used, so long as the carrier portion of that fastener's installation tool is provided with a corresponding cross-section.

[0085] It is also to be appreciated that the present invention has utility in non-medical applications as well. Thus, for example, any one of the fasteners 5, 240 could be used in a non-medical setting to attach one object to another object. For example, such a fastener might be used to attach a piece of fabric to a cushion, or a planar sheet to substrate, etc.

[0086] Still other embodiments and uses of the present invention will be obvious to a person skilled in the art without departing from the scope of the present invention.

[0087] It is also to be understood that the present invention is by no means limited to the particular constructions disclosed herein and/or shown in the drawings, but also comprises any other modification, changes or equivalents within the scope of the claims.

Advantages Of The Invention

[0088] Numerous advantages are obtained through the provision and use of the present invention.

[0089] For one thing, a novel surgical fastening system is provided for attaching one piece of tissue to another piece of tissue, wherein the novel surgical fastening system overcomes the various deficiencies associated with prior art surgical fastening systems.

[0090] For another thing, a novel surgical fastener is provided for attaching one piece of tissue to another piece of tissue.

[0091] And a novel installation tool is provided for deploying the aforementioned surgical fastener in tissue.

[0092] Also, a novel surgical fastening system is provided which is particularly well suited for use in repairing tears in meniscal cartilage.

[0093] And a novel surgical fastener is provided which is particularly well suited for use in repairing tears in meniscal cartilage.

[0094] Furthermore, the installation tool is particularly well suited for use in deploying the aforementioned surgical fastener in meniscal cartilage.

[0095] Still other advantages will be apparent to those skilled in the art.

Claims

1. A surgical fastening system comprising a surgical fastener, said surgical fastener (5,5H) comprising:

a shaft (10) of substantially uniform diameter having a distal end (30) and a proximal end (35), wherein said proximal end (35) having either a bar (60) or a ball (60H), said bar (60) extending outwardly from or said ball (60H) extending radially outwardly from and equally around said shaft (10);

a fin (40) extending outwardly from said shaft proximate said distal end, said fin having a distal edge and a proximal edge each being inclined outwardly and longitudinally rearwardly from said shaft; **characterised by** said shaft being solid and said distal end of said shaft being rounded and devoid of a cutting edge and devoid of a penetration point.

2. The fastener (5,5H) being provided for the use in a surgical fastening system in accordance with claim 1 wherein said fin (40) includes two parallel sides extending axially of said shaft (10).

3. The fastener (5) being provided for the use in a surgical fastening system in accordance with claim 1 wherein said bar (60) having a sidewise thickness or wherein said fin (40) having a thickness that is no more than the diameter of said shaft (10,10F). 5
4. The fastener (5) being provided for the use in a surgical fastening system in accordance with claim 2 or 3 wherein said fin (40) and said bar (60) are adapted to protrude from a single elongated slot (125) in said shaft. 10
5. The fastener (5) in accordance with claim 4 wherein a side of said shaft (10) opposite from a side on which are disposed said bar (60) and said fin (40) is provided with a pair of nibs (155) in alignment with each other axially of said shaft. 15
6. The fastener (5,5H) in accordance with claim 3, further comprising a grip portion connected to said shaft (10) by frangible tabs (155), said tabs extending from a side of said shaft (10) opposite from a side on which are disposed said bar (60) and said fin (40), a portion of said tabs, upon said tabs being severed to separate said grip portion from said shaft, remaining on said shaft to provide a pair of nibs in alignment with each other axially of said shaft along said opposite side of said shaft (10). 20 25
7. The fastener (5,5H) in accordance with claim 4 wherein a side of said shaft (10) opposite from a side on which are disposed said bar (60) and said fin (40) is provided with a plurality of nibs in alignment axially of said shaft (10). 30 35
8. The fastener (5) being provided for the use in a surgical fastening system in accordance with claim 1, further comprising a second fin disposed on said shaft (10) proximally of and in alignment with said fin disposed proximate said distal end, said second fin having side walls in alignment with said sides of said fin proximate said distal end. 40
9. The fastener (5) being provided for the use in a surgical fastening system in accordance with claim 1 wherein said bar (60) leans distally relative to said shaft (10). 45
10. The fastener (5) being provided for the use in a surgical fastening system in accordance with claim 1 wherein said bar (60) includes a first portion extending in a first direction radially outwardly from said shaft (10) and a second portion extending in an opposite second direction radially outwardly from said shaft, said fin (40) extending outwardly from only one side of said shaft, said fin and said first portion of said bar being adapted to protrude from a single elongated slot (125) in said shaft (10). 50 55
11. The fastener (5) in accordance with claim 10 wherein said shaft (10) includes a first proximal shaft portion contiguous to and centered between said bar first and second portions, a second distal shaft portion from which extends said fin (40), and a third shaft portion interconnecting said first and second shaft portions and off-setting said first and second shaft portions such that a side of said second shaft portion opposite from said one side is in the same plane as an end of said bar second portion.
12. The fastener (5) being provided for the use in a surgical fastening system in accordance with claim 1 wherein said bar (60) includes a portion (60D') which extends distally and generally parallel to said shaft (10).
13. The fastener (5) being provided for the use in a surgical fastening system in accordance with claim 1, further comprising:
a second solid shaft of substantially uniform diameter having a distal end and a proximal end; said bar (60) extending to, and being fixed to, said second shaft at said proximal end of said second shaft;
said distal end of said second shaft being rounded and devoid of a cutting edge and devoid of a penetration point; and a second fin extending outwardly from said second shaft proximate said distal end of said second shaft, said second fin having a distal edge inclined outwardly and proximally from said second shaft and a proximal edge inclined outwardly and proximally from said second shaft;
said diameters of said shafts being substantially equal to each other.
14. The fastener (5) being provided for the use in a surgical fastening system in accordance with claim 13 wherein said fins (40) are substantially parallel to each other.
15. The fastener (5) in accordance with claim 13 wherein said fins (40) are opposed to each other.
16. The fastener (5) in accordance with claim 13 wherein said fin extending from said first shaft and a portion of said bar (60) at said proximal end of a first of said shafts are adapted to protrude from a single elongated slot (125) in said first shaft and wherein said second fin and a portion of said bar (60) at said proximal end of said second shaft are adapted to protrude from a single elongated slot (125) in said second shaft.
17. The surgical fastening system in accordance with claim 1, said system further comprising a dispenser

for said surgical fastener, the fastener (5,5H) being adapted for engagement with an installation tool (75,150,245,260) carrier portion, said dispenser comprising a storage compartment for retaining the fastener, said storage compartment being provided with an opening through which said fastener is movable, wall structure extending from said storage compartment opening to an opening in a dispenser side wall and configured to guide a distal end (195) of said installation tool with said carrier portion (83) therein to said storage compartment, the remainder of said installation tool remaining outside of said dispenser, whereby said fastener may be engaged by said carrier portion (83) of said installation tool and withdrawn from said dispenser by withdrawal of said installation tool distal end (195) from said dispenser opening.

- 18.** The surgical fastening system in accordance with claim 1, said system further comprising a dispenser for said fastener (5,5H) wherein said fin (40) and said bar (60) are in alignment with each other along a side of said shaft (10), and a grip portion connected to said shaft by tabs (155) joined to an opposite side of said shaft, said dispenser comprising:

a housing having disposed therein a chamber for retaining said fastener, and an entry way for receiving an installation tool (75,150,245,260) having a carrier portion (83) thereon adapted to receive and retain said fastener, said carrier portion having cutting means thereon; said entry way and chamber being configured to guide said installation tool carrier portion cutting means into cutting engagement with said fastener legs to sever said grip portion from said shaft, and to facilitate said carrier portion sliding around and into engagement with said fastener; whereby upon withdrawal of said installation tool from said housing, said fastener, less said grip portion, is removed from said dispenser and is disposed in said installation tool carrier portion.

- 19.** The surgical fastening system in accordance with claim 1, said system further comprising a dispenser for said fastener (5,5H) comprising a said shaft portion and a grip portion interconnected by integral tabs (155), said dispenser comprising:

a housing having a chamber therein for holding said fastener, said chamber including a first chamber portion for holding said fastener shaft portion and a second chamber portion for holding said grip portion, and having an entry way therein for guiding an installation tool (75,150,245,260) into said first chamber portion to surround said fastener shaft portion and for guiding a cutting edge portion of said installation

tool into serial engagement with said tabs (155) to sever said tabs to disconnect said fastener shaft portion from said grip fastener portion, to permit withdrawal of said shaft portion from said dispenser while leaving said grip portion in said dispenser.

- 20.** The surgical fastening system in accordance with claim 1, said system further comprising an installation tool (75,150,245,260) for said fastener (5,5H) wherein said fin (40) and said bar (60) are being in alignment with each other along a side of said shaft (10), said installation tool comprising:

an elongated inserter comprising a carrier portion adapted to retain said fastener and having at a distal end thereof a sharpened edge, said carrier portion having an open side from which extend end portions of said bar and said fin.

- 21.** The surgical fastening system in accordance with claim 1, said system further comprising an installation tool (75,150,245,260) for said fastener (5,5H) wherein said fin (40) and said bar (60) are in alignment with each other along a side of said shaft (10), said installation tool comprising:

an elongated rigid tube (190);
a carrier portion movable between a first position in said tube and a second position extended from a distal end of said tube, said carrier portion being adapted to retain said fastener and having at a distal end thereof a sharpened edge, said carrier portion having an open side from which extend end portions of said bar (60) and said fin; and
control means for moving said carrier portion in said tube between said first and second positions;
whereby said installation tool is manipulable to extend said carrier portion and said fastener therein into a body of tissue (135,230), and to withdraw said carrier portion from said tissue, whereupon said fin resists withdrawal of said fastener and said fastener remains in said tissue as said installation tool is withdrawn therefrom.

- 22.** The installation tool (75,150,245,260) in accordance with claim 21, wherein said carrier portion comprises a chamber having an opening (165,170,175,180) at said distal end (195) defined at least in part by said sharpened edge, said open side, a closed side opposite from said open side and adapted to receive a side of said shaft (10) opposite from said side of said shaft on which are mounted said fin and said bar (60), and a proximal wall for engagement with said proximal end of said shaft.

23. A surgical fastening system in accordance with claim 1, said system further comprises an installation tool 75,150,245,260), said installation tool comprising:

an elongated inserter (80) comprising a carrier portion (83) adapted to retain said fastener (5,5H) and having at a distal end (195) thereof a sharpened edge, said carrier portion having an open side from which extend end portions of said bar (60) and said fin (40). 5 10

24. A surgical fastening system in accordance with claim 1, said system further comprises a dispenser for housing at least one of said fasteners (5,5H) and an installation tool (75,150,245,260); said dispenser comprising:

a housing having disposed therein a chamber for retaining said fastener, and an entry way for receiving an installation tool having a carrier portion thereon adapted to receive and retain said fastener; said entry way and chamber being configured so as to facilitate said carrier portion sliding into engagement with said fastener; whereby upon withdrawal of said installation tool from said housing, said fastener is removed from said dispenser and is disposed in said installation tool carrier portion; and said installation tool comprising: 20 25 30

an elongated rigid tube (83); said carrier portion being movable between a first position in said tube and a second position extended from a distal end (195) of said tube, said carrier portion having at a distal end thereof a sharpened edge, said carrier portion having an open side from which extend end portions of said fastener bar and said fastener fin; and control means for moving said carrier portion and said fastener therein into a body of tissue, and to withdraw said carrier portion from said tissue, whereupon said fin resists withdrawal of said fastener and said fastener remains in said tissue as said installation tool is withdrawn therefrom. 35 40 45

Patentansprüche

1. Chirurgisches Kammersystem mit einer chirurgischen Klammer, wobei die chirurgische Klammer (5,5H) einen Schaft (10) mit im wesentlich gleichbleibendem Durchmesser umfaßt, welcher ein distales Ende (30) und ein proximales Ende (35) aufweist, wobei das proximale Ende (35) entweder einen Riegel (60) oder einen Ball (60H) aufweist, und sich der 50

Riegel (60) oder der Ball (60H) radial auswärts vom und gleichmäßig um den Schaft (10) erstrecken; sowie eine sich auswärts vom Schaft nahe des distalen Endes auswärts erstreckende Rippe umfaßt, wobei die Rippe eine distale Kante und eine proximale Kante aufweist, welche jeweils auswärts und rückwärts längs des Schafts geneigt sind, **dadurch gekennzeichnet, daß** der Schaft starr/massiv ist und das distale Ende des Schafts verrundet und frei von einer Schneidkante und frei von einem Eindringpunkt ist.

2. Für die Verwendung in einem chirurgischen Kammersystem nach Anspruch 1 bereit gestellte Klammer (5,5H), **dadurch gekennzeichnet, daß** die Rippe (40) zwei parallele, sich axial vom Schaft (10) erstreckende Seiten aufweist.

3. Für die Verwendung in einem chirurgischen Kammersystem nach Anspruch 1 bereitgestellte Klammer (5), **dadurch gekennzeichnet, daß** der Riegel (60) eine seitliche Dicke oder die Rippe (40) eine Dicke aufweist, die nicht größer ist als der Durchmesser des Schafts (10,10F).

4. Für die Verwendung in einem chirurgischen Kammersystem nach Anspruch 2 oder 3 bereitgestellte Klammer (5), **dadurch gekennzeichnet, daß** die Rippe (40) und der Riegel (60) zum Herausschieben aus einem einzelnen langgestreckten Schlitz (125) in dem Schaft angepaßt sind.

5. Klammer (5) nach Anspruch 4, **dadurch gekennzeichnet, daß** eine Seite von dem Schaft (10), gegenüber von einer Seite an welcher der Riegel (60) und die Rippe (40) angeordnet sind, mit einem Paar von Nasen (155) versehen ist, die axial zum Schaft zueinander in Reihe sind.

6. Klammer (5,5H) nach Anspruch 3, **dadurch gekennzeichnet, daß** weiterhin ein Griffstück mit dem Schaft (10) mittels zerbrechlicher Streifen (155) verbunden ist, wobei sich die Streifen von einer Seite des Schafts (10), gegenüber von einer Seite auf welcher der Riegel (60) und die Rippe (40) angeordnet sind, erstrecken und wobei ein Teil der Streifen, nachdem der Streifen zum Trennen des Griffstücks von dem Schaft durchtrennt ist, an dem Schaft verbleibt, um axial zum Schaft, entlang der gegenüberliegenden Seite des Schafts (10) zueinander in Reihe angeordnet ein Paar von Nasen bereit zu stellen. 50

7. Klammer (5,5H) nach Anspruch 4, **dadurch gekennzeichnet, daß** eine Seite von dem Schaft (10), gegenüber von einer Seite auf welcher der Riegel (60) und die Rippe (40) angeordnet sind, mit einer Vielzahl von axial zum Schaft (10) in Reihe stehender Nasen versehen ist. 55

8. Für die Verwendung in einem chirurgischen Kammersystem nach Anspruch 1 bereitgestellte Klammer (5), **dadurch gekennzeichnet, daß** weiterhin eine zweite Rippe auf dem Schaft (10) proximal zur und in Reihe mit der nahe zum distalen Ende angeordneten Rippe angeordnet ist, wobei die zweite Rippe Seitenwände aufweist, die in Reihe mit den Seiten der nahe zum distalen Ende angeordneten Rippe sind.
9. Für die Verwendung in einem chirurgischen Kammersystem nach Anspruch 1 bereitgestellte Klammer (5), **dadurch gekennzeichnet, daß** sich der Riegel (60) relativ zum Schaft (10) distal neigt.
10. Für die Verwendung in einem chirurgischen Kammersystem nach Anspruch 1 bereitgestellte Klammer (5), **dadurch gekennzeichnet, daß** der Riegel (60) ein erstes Stück, das sich radial auswärts vom Schaft (10) in eine erste Richtung erstreckt, und ein zweites Stück beinhaltet, das sich radial auswärts von dem Schaft in eine entgegengesetzte zweite Richtung erstreckt und die Rippe (40) sich auswärts von lediglich einer Seite des Schafts erstreckt, wobei die Rippe und das erste Stück zum Herausschieben aus einem einzelnen langgestreckten Schlitz (125) im Schaft (10) angepaßt sind.
11. Klammer (5) nach Anspruch 10, **dadurch gekennzeichnet, daß** der Schaft (10) ein proximales Schaftstück beinhaltet, das angrenzend zu und zentriert zwischen den ersten und zweiten Stücken des Riegels sitzt, sowie ein zweites distales Schaftstück, von dem sich die Rippe (40) erstreckt, und ein drittes Schaftstück, das das erste und das zweite Schaftstück verbindet und erstes und zweites Schaftstücke derart gegeneinander versetzt, daß eine Seite des zweiten Schaftstückes gegenüber von der einen Seite in derselben Ebene ist, wie ein Ende von dem zweiten Riegelstück.
12. Für die Verwendung in einem chirurgischen Kammersystem nach Anspruch 1 bereitgestellte Klammer (5), **dadurch gekennzeichnet, daß** der Riegel (60) ein sich distal und generell parallel zum Schaft (10) erstreckendes Stück (60D') beinhaltet.
13. Für die Verwendung in einem chirurgischen Kammersystem nach Anspruch 1 bereitgestellte Klammer (5), **dadurch gekennzeichnet, daß** dieses einen zweiten starren/massiven Schaft mit im wesentlichen gleichbleibendem Durchmesser umfaßt, der ein distales Ende und ein proximales Ende aufweist; sich der Riegel (60) zum zweiten Schaft erstreckt und am proximalen Ende des zweiten Schafts angeordnet ist; das distale Ende des zweiten Schafts verrundet und frei von einer Schneidkante und frei von einem Eindringpunkt ist;
- und sich eine zweite Rippe auswärts von dem zweiten Schaft nahe dem distalen Ende des zweiten Schafts erstreckt, wobei die zweite Rippe eine sich auswärts und proximal vom zweiten Schaft geneigte Kante aufweist;
- und die Durchmesser der Schäfte im wesentlichen untereinander gleich sind.
14. Für die Verwendung in einem chirurgischen Kammersystem nach Anspruch 13 bereitgestellte Klammer (5), **dadurch gekennzeichnet, daß** die Rippen (40) im wesentlichen parallel zueinander sind.
15. Klammer (5) nach Anspruch 13, **dadurch gekennzeichnet, daß** die Rippen (40) zueinander entgegengesetzt sind.
16. Klammer (5) nach Anspruch 13, **dadurch gekennzeichnet, daß** die sich von dem ersten Schaft erstreckende Rippe und ein Teil des Riegels (60) an dem proximalen Ende von einem ersten der Schäfte zum Herausschieben aus einem einzelnen langgestreckten Schlitz (125) im ersten Schaft angepaßt sind, und wobei die zweite Rippe und ein Teil des Riegels (60) an dem proximalen Ende des zweiten Schafts zum Herausschieben aus einem einzelnen langgestreckten Schlitz (125) im zweiten Schaft angepaßt sind.
17. Chirurgisches Kammersystem nach Anspruch 1, **dadurch gekennzeichnet, daß** das System weiterhin ein Ausgabegerät für die chirurgische Klammer umfaßt, wobei die Klammer (5,5H) zum Ineingriffbringen mit einem Führungsteil eines Installationswerkzeugs (75,150,245,260) angepaßt ist, und wobei das Ausgabegerät ein Speicherfach zum Aufnehmen des Verbinders umfaßt, und das Speicherfach mit einer Öffnung versehen ist, durch welche die Klammer bewegbar ist und sich eine Wandstruktur von der Öffnung des Speicherfachs bis an eine Öffnung in einer Seitenwand des Ausgabegeräts erstreckt und so gestaltet ist, um mit dem Führungsteil (83) ein distales Ende (195) von dem Installationswerkzeug hierin zum Speicherfach zu führen und wobei der Rückhalter des Installationswerkzeugs außerhalb des Ausgabegeräts verbleibt, wodurch die Klammer mittels des Führungsteils (83) des Installationswerkzeugs in Eingriff bringbar ist und durch Zurückziehen des distalen Endes (195) des Installationswerkzeugs von der Ausgabegerätsöffnung vom Ausgabegerät zurückgezogen ist.
18. Chirurgisches Kammersystem nach Anspruch 1, **dadurch gekennzeichnet, daß** das System weiterhin ein Ausgabegerät für die Klammer (5,5H) umfaßt, wobei die Rippe (40) und der Riegel (60) entlang einer Seite des Schafts (10) in Reihe zueinander sind, und ein Griffstück mittels an gegenüberliegenden

- den Seiten des Schafts angeordneten Streifen (155) mit dem Schaft verbunden ist, und wobei das Ausgabegerät ein Gehäuse umfaßt, das hierin angeordnet eine Kammer zum Zurückhalten der Klammer aufweist, und einen Eintrittsweg zum Aufnehmen eines Installationswerkzeugs (75,150,245,260) umfaßt, welches hierauf ein Führungsteil (83) aufweist, das zur Aufnahme und Rückhalten der Klammer angepaßt ist, und wobei das Führungsteil Schneidmittel aufweist; wobei der Eintrittsweg und die Kammer ausgelegt sind, um die Schneidmittel des Führungsteils des Installationswerkzeugs in schneidenden Eingriff mit den Klammerbeinen zu führen, um das Griffstück vom Schaft zu trennen und es dem Führungsteil zu ermöglichen, in Eingriff mit und um die/der Klammer herum zu gleiten; wodurch beim Zurückziehen des Installationswerkzeugs aus dem Gehäuse die Klammer, weniger das Griffstück, von dem Ausgabegerät entfernt und im Führungsteil des Installationswerkzeugs angeordnet wird.
19. Chirurgisches Klammersystem nach Anspruch 1, **dadurch gekennzeichnet, daß** das System weiterhin ein Ausgabegerät für die Klammer (5,5H) umfaßt, welches ein Schaftteil und ein durch integrale Streifen (155) verbundenes Griffstück umfaßt, wobei das Ausgabegerät ein Gehäuse umfaßt, daß hierin eine Kammer zum Halten der Klammer aufweist, wobei die Kammer ein erstes Kammerteil zum Halten des Verbinderschaftteils und ein zweites Kammerteil zum Halten des Griffstücks beinhaltet, und hierin einen Eintrittsweg zum Führen eines Installationswerkzeugs (75,150,245,260) in dem ersten Kammerteil aufweist, um das Verbinderschaftteil zu umgeben und zum Führen eines Schneidkantenteils des Installationswerkzeugs in reiheweisen Eingriff mit den Nasen (155), um die Nasen zu durchtrennen, und um den Verbinderschaftteil von dem Verbindergriffstück zu trennen und um ein Zurückziehen des Schaftteils vom Ausgabegerät zu erlauben, während das Griffstück das Ausgabegerät verläßt.
20. Chirurgisches Klammersystem nach Anspruch 1, **dadurch gekennzeichnet, daß** das System weiterhin ein Installationswerkzeug (75,150,245,260) für die Klammer (5,5H) umfaßt, wobei die Rippe (40) und der Riegel (60) entlang einer Seite des Schafts (10) zueinander in Reihe angeordnet sind, und wobei das Installationswerkzeug eine langgestreckte Einsetzeinrichtung umfaßt, die ein Führungsteil umfaßt, das zum Aufnehmen der Klammer angepaßt ist und an einem distalen Ende hiervon eine geschärfte Kante aufweist, wobei das Führungsteil eine offene Seite aufweist, von welcher sich Endstücke des Riegels und der Rippe erstrecken.
21. Chirurgisches Klammersystem nach Anspruch 1, **dadurch gekennzeichnet, daß** das System weiterhin ein Installationswerkzeug (75,150,245,260) für den Verbinder (5,5H) umfaßt, wobei die Rippe (40) und der Riegel (60) entlang einer Seite des Schafts (10) zueinander in Reihe angeordnet sind und das Installationswerkzeug eine langgestreckte starre Röhre (190); ein zwischen einer ersten Position in der Röhre und einer sich vom distalen Ende der Röhre erstreckenden zweiten Position bewegbares Führungsteil umfaßt, das zum Zurückhalten der Klammer angepaßt ist und an einem distalen Ende hiervon eine geschärfte Kante aufweist, wobei das Führungsteil eine offene Seite aufweist, von welcher sich Endstücke des Riegel (60) und der Rippe erstrecken; und Steuermittel zum Bewegen des Führungsteils in der Röhre zwischen der ersten und zweiten Positionen umfaßt; wodurch das Installationswerkzeug bedienbar ist, um das Führungsteil und die Klammer hierin in einen Körper aus Gewebe (135,230) vorzustrecken und um das Führungsteil aus dem Gewebe zurück zu ziehen, worauf die Rippen ein Zurückziehen der Klammer verhindern und die Klammer in dem Gewebe verbleibt, wenn das Installationswerkzeug hieraus zurückgezogen wird.
22. Installationswerkzeug (75,150,245,260) nach Anspruch 21, **dadurch gekennzeichnet, daß** das Führungsteil eine Kammer umfaßt, die eine Öffnung (165,170,175,180) an dem distalen Ende (195) aufweist, welche mindestens teilweise mittels der geschärfen Kante definiert ist, und wobei die offene Seite eine gegenüber zur offenen Seite angeordnete geschlossene Seite aufweist und angepaßt ist, um eine Seite von dem Schaft (10) gegenüberliegend zu der Seite von dem Schaft aufzunehmen, an welcher die Rippe und der Riegel (60) angeordnet sind und eine proximale Wand zum Ineingriffbringen mit dem proximalen Ende des Schafts aufweist.
23. Chirurgisches Verbindungssystem nach Anspruch 1, **dadurch gekennzeichnet, daß** das System weiterhin ein Installationswerkzeug (75,150,245,260) umfaßt, wobei das Installationswerkzeug eine langgestreckte Einsetzeinrichtung (80) umfaßt, die ein zum Zurückhalten des Verbinders (5,5H) angepaßtes Führungsteil (83) umfaßt und ein distales Ende (195) mit einer geschärfen Kante aufweist, wobei das Führungsteil eine offene Seite aufweist, von welcher sich Endstücke des Riegel (60) und der Rippe (40) erstrecken.
24. Chirurgisches Verbindungssystem nach Anspruch 1, **dadurch gekennzeichnet, daß** das System weiterhin ein Ausgabegerät zum Umhüllen mindestens einer Klammer (5,5H) und ein Installationswerkzeug (75,150,245,260) umfaßt;

das Ausgabegerät ein Gehäuse aufweist, in dem eine Kammer zum Zurückhalten der Klammer angeordnet ist und einen Eintrittsweg zum Aufnehmen eines Installationswerkzeuges aufweist, welches hierauf ein zum Aufnehmen und Zurückhalten der Klammer angepaßtes Führungsteil aufweist; wobei der Eintrittsweg und die Kammer derart gestaltet sind, um es dem Führungsteil zu ermöglichen, in Eingriff mit der Klammer zu gleiten; wodurch bei Zurückziehen des Installationswerkzeugs aus dem Gehäuse, die Klammer aus dem Ausgabegerät entfernt wird und im Führungsteil des Installationswerkzeuges angeordnet wird; und das Installationswerkzeug eine langgestreckte starre Röhre (83) umfaßt; wobei das Führungsteil zwischen einer ersten Position in der Röhre und einer sich vom distalen Ende (195) der Röhre erstreckenden zweiten Position bewegbar ist, wobei das Führungsteil an einem distalen Ende hiervon eine geschärfte Kante aufweist und das Führungsteil eine offene Seite aufweist, von welcher sich Endstücke des Klammerriegels und der Klammerrippe erstrecken; und Steuermittel zum Bewegen des Führungsteils und der Klammer in einen Körper aus Gewebe und zum Zurückziehen des Führungsteils aus dem Gewebe umfaßt, worauf die Rippe ein Zurückziehen der Klammer verhindert und die Klammer in dem Gewebe verbleibt, wenn das Installationswerkzeug hieraus zurückgezogen wird.

Revendications

1. Système d'agrafage chirurgical comprenant une agrafe chirurgicale, l'agrafe chirurgicale (5, 5H) étant composée :
 - d'une tige (10) présentant un diamètre sensiblement uniforme et comportant une extrémité distale (30) et une extrémité proximale (35), l'extrémité proximale (35) ayant une barrette (60) ou une boule (60H), laquelle barrette (60) s'étend vers l'extérieur à partir de la tige (10) tandis que la boule (60H) s'étend radialement vers l'extérieur à partir de ladite tige (10) et également autour de celle-ci ; et
 - d'une ailette (40) qui s'étend vers l'extérieur à partir de la tige, près de l'extrémité distale, cette ailette présentant un bord distal et un bord proximal qui sont inclinés vers l'extérieur et longitudinalement vers l'arrière à partir de la tige ;
 caractérisé en ce que la tige est pleine et son extrémité distale est arrondie et sans bord coupant et sans point de pénétration.
2. Agrafe (5, 5H) destinée à être utilisée dans un sys-

tème d'agrafage chirurgical selon la revendication 1, dans laquelle l'ailette (40) comprend deux côtés parallèles qui s'étendent axialement à partir de la tige (10).

3. Agrafe (5) destinée à être utilisée dans un système d'agrafage chirurgical selon la revendication 1, dans laquelle la barrette (60) a une épaisseur transversale et l'ailette (40) a une épaisseur qui n'est pas supérieure au diamètre de la tige (10, 10F).
4. Agrafe (5) destinée à être utilisée dans un système d'agrafage chirurgical selon la revendication 2 ou 3, dans laquelle l'ailette (40) et la barrette (60) sont aptes à dépasser d'une fente oblongue unique (125) prévue dans la tige.
5. Agrafe (5) selon la revendication 4, dans laquelle un côté de la tige (10) situé à l'opposé d'un côté sur lequel sont disposées la barrette (60) et l'ailette (40) est pourvu de deux saillies (155) alignées l'une sur l'autre axialement par rapport à la tige.
6. Agrafe (5, 5H) selon la revendication 3, comprenant également une partie de préhension qui est reliée à la tige (10) par des pattes destinées à la rupture (155), ces pattes s'étendant à partir d'un côté de la tige (10) qui est opposé au côté sur lequel sont disposées la barrette (60) et l'ailette (40), étant précisé que lorsqu'on détache ces pattes pour séparer la partie de préhension et la tige, une partie des pattes reste sur la tige pour former deux saillies alignées l'une sur l'autre axialement par rapport à la tige, le long dudit côté opposé de la tige (10).
7. Agrafe (5, 5H) selon la revendication 4, dans laquelle un côté de la tige (10) opposé au côté sur lequel sont disposées la barrette (60) et l'ailette (40) est pourvu de plusieurs saillies alignées axialement par rapport à la tige (10).
8. Agrafe (5) destinée à être utilisée dans un système d'agrafage chirurgical selon la revendication 1, comprenant également une seconde ailette disposée sur la tige (10) sur le côté proximal et dans l'alignement de l'ailette prévue près de l'extrémité distale, cette seconde ailette ayant des parois latérales dans l'alignement des côtés de l'ailette proche de l'extrémité distale.
9. Agrafe (5) destinée à être utilisée dans un système d'agrafage chirurgical selon la revendication 1, dans laquelle la barrette (60) est inclinée par rapport à la tige (10) vers le côté distal.
10. Agrafe (5) destinée à être utilisée dans un système d'agrafage chirurgical selon la revendication 1, dans laquelle la barrette (60) comprend une première par-

tie qui s'étend dans une première direction, radialement vers l'extérieur à partir de la tige (10), et une seconde partie qui s'étend dans une seconde direction opposée, radialement vers l'extérieur à partir de la tige, l'aillette (40) s'étendant vers l'extérieur à partir d'un seul côté de la tige, et l'aillette et la première partie de la barrette étant aptes à dépasser d'une fente allongée unique (125) prévue dans la tige (10).

11. Agrafe (5) selon la revendication 10, dans laquelle la tige (10) comprend une première partie de tige proximale voisine des première et seconde parties de barrette et centrée entre celles-ci, une deuxième partie de tige distale à partir de laquelle s'étend l'aillette (40), et une troisième partie de tige qui relie la première et la deuxième et qui décale celles-ci de telle sorte qu'un côté de la deuxième partie de tige opposé au premier côté se trouve dans le même plan qu'une extrémité de la seconde partie de barrette.

12. Agrafe (5) destinée à être utilisée dans un système d'agrafage chirurgical selon la revendication 1, dans laquelle la barrette (60) comprend une partie (60D') qui s'étend vers le côté distal, sensiblement parallèlement à la tige (10).

13. Agrafe (5) destinée à être utilisée dans un système d'agrafage chirurgical selon la revendication 1, comprenant également :

une seconde tige pleine présentant un diamètre sensiblement uniforme et comportant une extrémité distale et une extrémité proximale ;
la barrette (60) s'étendant vers la seconde tige et étant fixée à l'extrémité proximale de celle-ci ;
l'extrémité distale de la seconde tige étant arrondie et sans bord coupant et sans point de pénétration ; et une seconde ailette qui s'étend vers l'extérieur à partir de la seconde tige, près de l'extrémité distale de celle-ci, la seconde ailette ayant un bord distal qui est incliné vers l'extérieur et côté proximal à partir de la seconde tige, et un bord proximal qui est incliné vers l'extérieur et côté proximal à partir de la seconde tige ;
les diamètres des tiges étant sensiblement égaux.

14. Agrafe (5) destinée à être utilisée dans un système d'agrafage chirurgical selon la revendication 13, dans laquelle les ailettes (40) sont sensiblement parallèles.

15. Agrafe (5) selon la revendication 13, dans laquelle les ailettes (40) sont opposées les unes aux autres.

16. Agrafe (5) selon la revendication 13, dans laquelle l'aillette qui s'étend à partir de la première tige et une

partie de la barrette (60) prévue sur l'extrémité proximale d'une première tige sont aptes à dépasser d'une fente oblongue unique (125) prévue dans ladite première tige, et la seconde ailette et une partie de la barrette (60) prévue sur l'extrémité proximale de la seconde tige sont aptes à dépasser d'une fente oblongue unique (125) prévue dans la seconde tige.

17. Système d'agrafage chirurgical selon la revendication 1, comprenant également un distributeur pour ladite agrafe chirurgicale, l'agrafe (5, 5H) étant apte à venir en contact avec une partie de support d'un outil de mise en place (75, 150, 245, 260), le distributeur comprenant un réservoir destiné à contenir l'agrafe, ce réservoir étant pourvu d'une ouverture à travers laquelle l'agrafe peut se déplacer, une structure de paroi s'étendant de l'ouverture du réservoir jusqu'à une ouverture prévue dans une paroi latérale du distributeur et étant conçue pour guider une extrémité distale (195) de l'outil de mise en place, avec la partie de support (83) contenue dans celui-ci, jusqu'au réservoir, le reste de l'outil de mise en place restant à l'extérieur du distributeur, moyennant quoi l'agrafe peut être mise en contact avec la partie de support (83) dudit outil et extraite du distributeur grâce à l'extraction de l'extrémité distale d'outil (195) à partir de l'ouverture du distributeur.

18. Système d'agrafage chirurgical selon la revendication 1, comprenant également un distributeur pour l'agrafe (5, 5H), l'aillette (40) et la barrette (60) étant alignées l'une par rapport à l'autre le long d'un côté de la tige (10), et une partie de préhension qui est reliée à la tige par des pattes (155) rattachées au côté opposé de la tige, le distributeur comprenant :

un boîtier dans lequel est prévue une chambre destinée à contenir l'agrafe, et une entrée destinée à recevoir un outil de mise en place (75, 150, 245, 260) portant une partie de support (83) qui est apte à recevoir et à contenir l'agrafe, la partie de support portant des moyens de coupe ;
l'entrée et la chambre étant conçues pour guider les moyens de coupe de la partie de support de l'outil de mise en place et les mettre en contact de coupe avec les branches de l'agrafe afin de séparer la partie de préhension et la tige, et pour faciliter le coulisement de la partie de support autour de l'agrafe et le contact avec celle-ci ;

étant précisé que lorsqu'on extrait du boîtier l'outil de mise en place, l'agrafe moins la partie de préhension est enlevée du distributeur et est disposée dans la partie de support d'outil de mise en place.

19. Système d'agrafage chirurgical selon la revendication 1, comprenant également un distributeur pour l'agrafe (5, 5H) composée d'une partie de tige et

d'une partie de préhension reliées par des pattes réalisées d'une seule pièce (155), le distributeur comprenant :

un boîtier renfermant une chambre pour tenir l'agrafe, laquelle chambre comprend une première partie de chambre pour tenir la partie de tige d'agrafe et une seconde partie de chambre pour tenir la partie de préhension, et pourvu d'une entrée pour guider un outil de mise en place (75, 150, 245, 260) jusque dans la première partie de chambre afin d'entourer la partie de tige d'agrafe, et pour guider une partie de bord coupant de l'outil de mise en place pour qu'il vienne en contact successivement avec les pattes (155) afin de séparer celles-ci et de détacher la partie de tige d'agrafe de la partie de préhension, pour permettre d'enlever ladite partie de tige du distributeur tout en laissant dans celui-ci la partie de préhension.

- 20.** Système d'agrafage chirurgical selon la revendication 1, comprenant également un outil de mise en place (75, 150, 245, 260) pour l'agrafe (5, 5H), l'aillette (40) et la barrette (60) étant alignées l'une par rapport à l'autre le long d'un côté de la tige (10), l'outil de mise en place comprenant :

un élément d'insertion allongé comprenant une partie de support apte à retenir l'agrafe et présentant à une extrémité distale un bord taillé en pointe, la partie de support ayant un côté ouvert à partir duquel s'étendent les parties d'extrémité de la barrette et de l'aillette.

- 21.** Système d'agrafage chirurgical selon la revendication 1, comprenant un outil de mise en place (75, 150, 245, 260) pour l'agrafe (5, 5H), l'aillette (40) et la barrette (60) étant alignées l'une par rapport à l'autre le long d'un côté de la tige (10), l'outil de mise en place comprenant :

un tube rigide allongé (190) ;
une partie de support mobile entre une première position dans le tube et une seconde position sortie d'une extrémité distale du tube, ladite partie de support étant apte à retenir l'agrafe et présentant à une extrémité distale un bord taillé en pointe, et la partie de support ayant un côté ouvert à partir duquel s'étendent les parties d'extrémité de la barrette (60) et de l'aillette ; et des moyens de commande pour déplacer la partie de support dans le tube entre les première et seconde positions ;
étant précisé que l'outil de mise en place est apte à être manipulé pour amener la partie de support et l'agrafe qu'elle contient dans un corps de tissu (135, 230) et pour retirer ladite partie

de support du tissu, l'aillette résistant à l'extraction de l'agrafe et l'agrafe restant dans le tissu quand l'outil de mise en place est retiré de celui-ci.

- 22.** Outil de mise en place (75, 150, 245, 260) selon la revendication 21, dans lequel la partie de support comprend une chambre pourvue d'une ouverture (165, 170, 175, 180) sur l'extrémité distale (195) définie au moins en partie par le bord taillé en pointe, le côté ouvert, un côté fermé opposé à celui-ci et apte à recevoir un côté de la tige (10) opposé au côté de la tige sur lequel sont montées l'aillette et la barrette (60), et une paroi proximale destinée à venir en contact avec l'extrémité proximale de la tige.

- 23.** Outil d'agrafage chirurgical selon la revendication 1, comprenant également un outil de mise en place (75, 150, 245, 260), l'outil de mise en place comprenant :

un élément d'insertion allongé (80) qui comprend une partie de support (83) apte à retenir l'agrafe (5, 5H) et présentant à une extrémité distale (195) un bord taillé en pointe, la partie de support présentant un côté ouvert à partir duquel s'étendent les parties d'extrémité de la barrette (60) et de l'aillette (40).

- 24.** Système d'agrafage chirurgical selon la revendication 1, comprenant également un distributeur pour loger l'une au moins des agrafes (5, 5H), et un outil de mise en place (75, 150, 245, 260) ;
le distributeur comprenant :

un boîtier dans lequel sont prévues une chambre pour contenir l'agrafe et une entrée pour recevoir un outil de mise en place portant une partie de support apte à recevoir et à retenir l'agrafe ;
l'entrée et la chambre étant conçues pour faciliter le coulisement de la partie de support pour l'amener en contact avec l'agrafe ;
étant précisé que lorsqu'on retire l'outil de mise en place du boîtier, l'agrafe est enlevée du distributeur et est disposée dans la partie de support de l'outil ; et
l'outil de mise en place comprenant :

un tube rigide allongé (83) ;
la partie de support étant mobile entre une première position dans le tube et une seconde position sortie d'une extrémité distale (195) du tube, présentant à une extrémité distale un bord taillé en pointe et présentant un côté ouvert à partir duquel s'étendent les parties d'extrémité de la barrette et de l'aillette de l'agrafe ; et
des moyens de commande pour amener

dans un corps de tissu la partie de support
et l'agrafe contenue dans celle-ci, et pour
retirer dudit tissu la partie de support, l'aillet-
te résistant à l'extraction de l'agrafe et
l'agrafe restant dans le tissu quand l'outil de
mise en place est retiré de celui-ci.

5

10

15

20

25

30




35




40




45

50

55

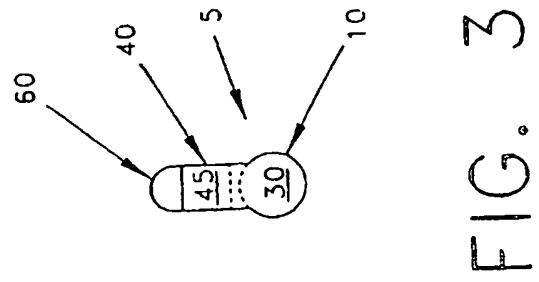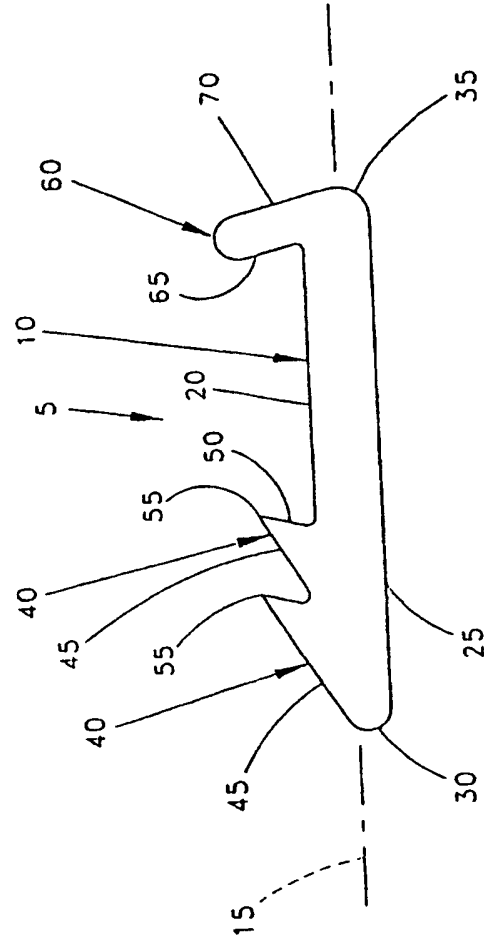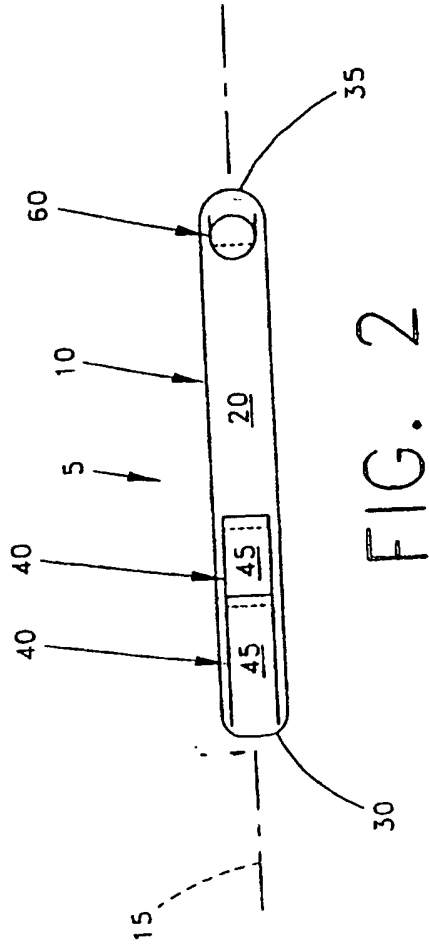

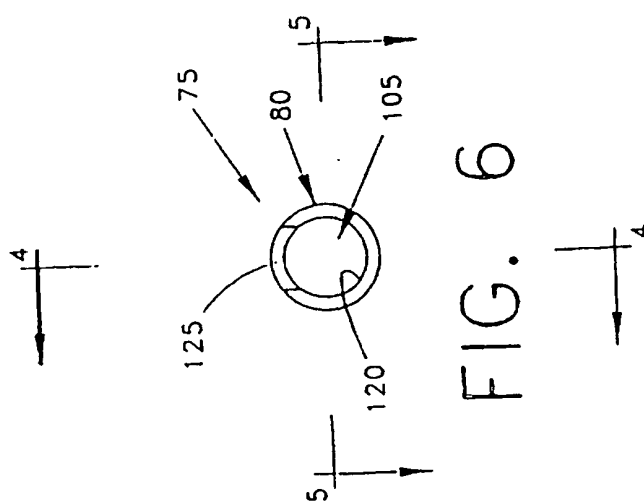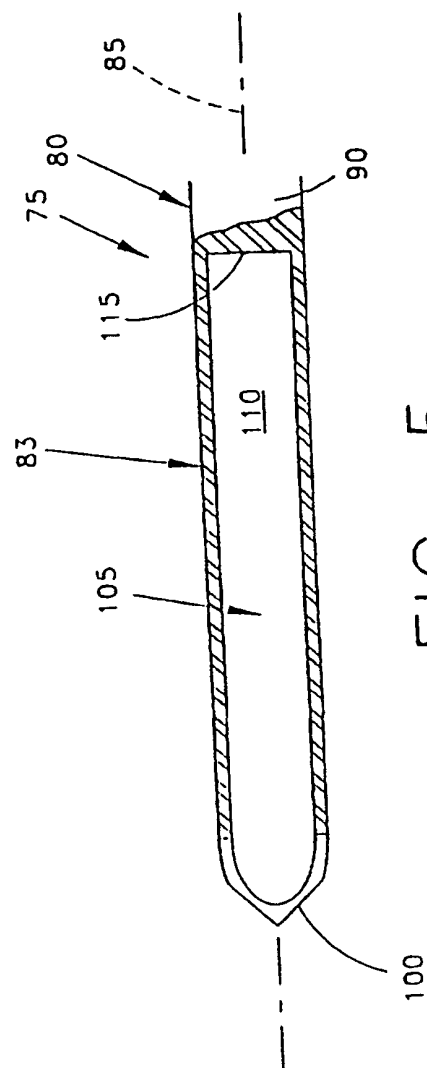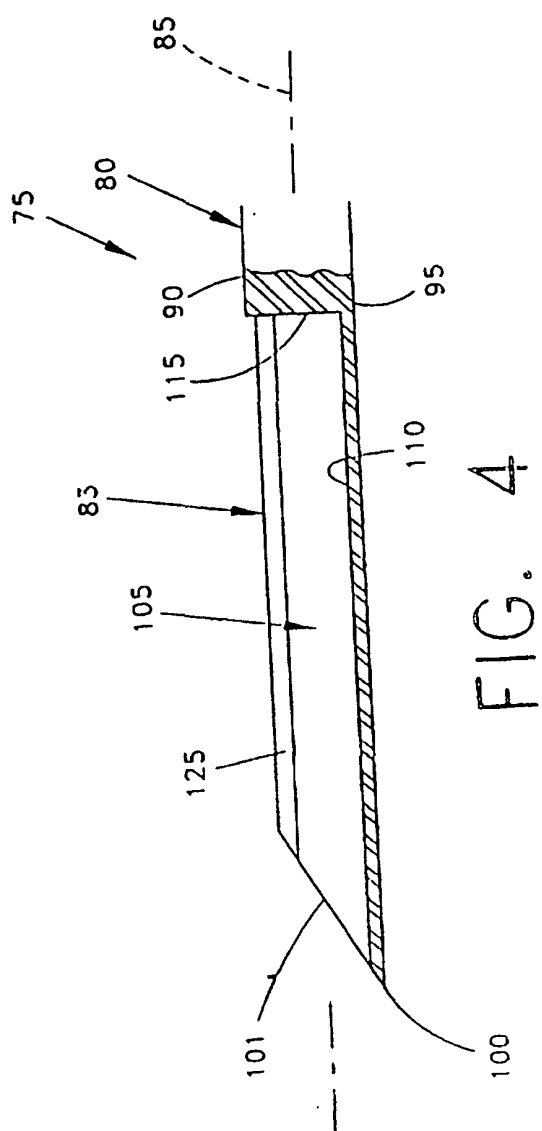

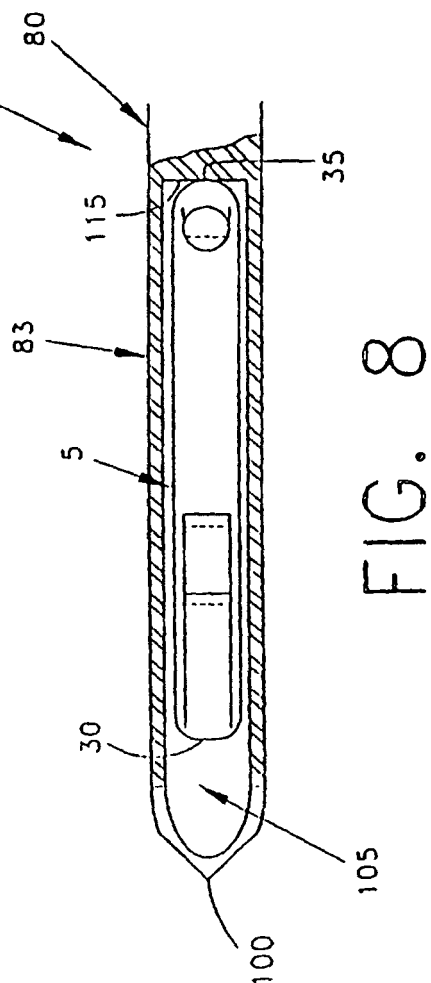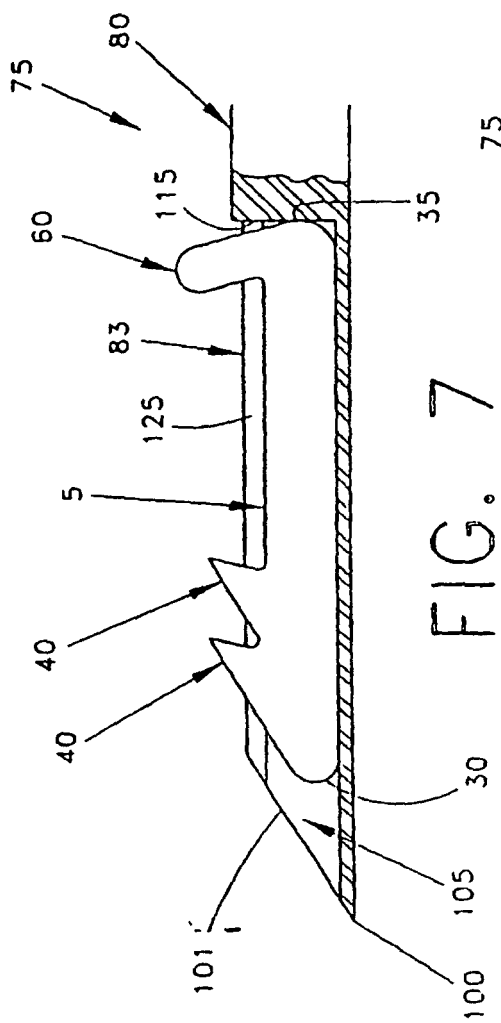

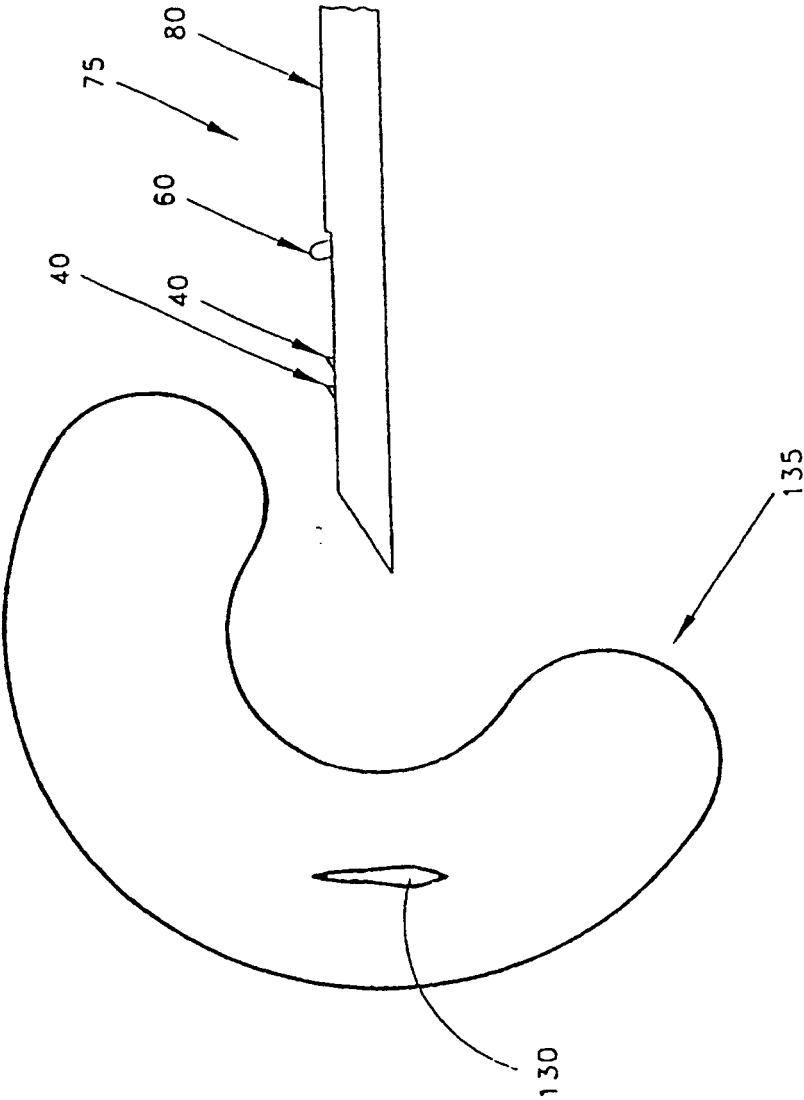


FIG. 10

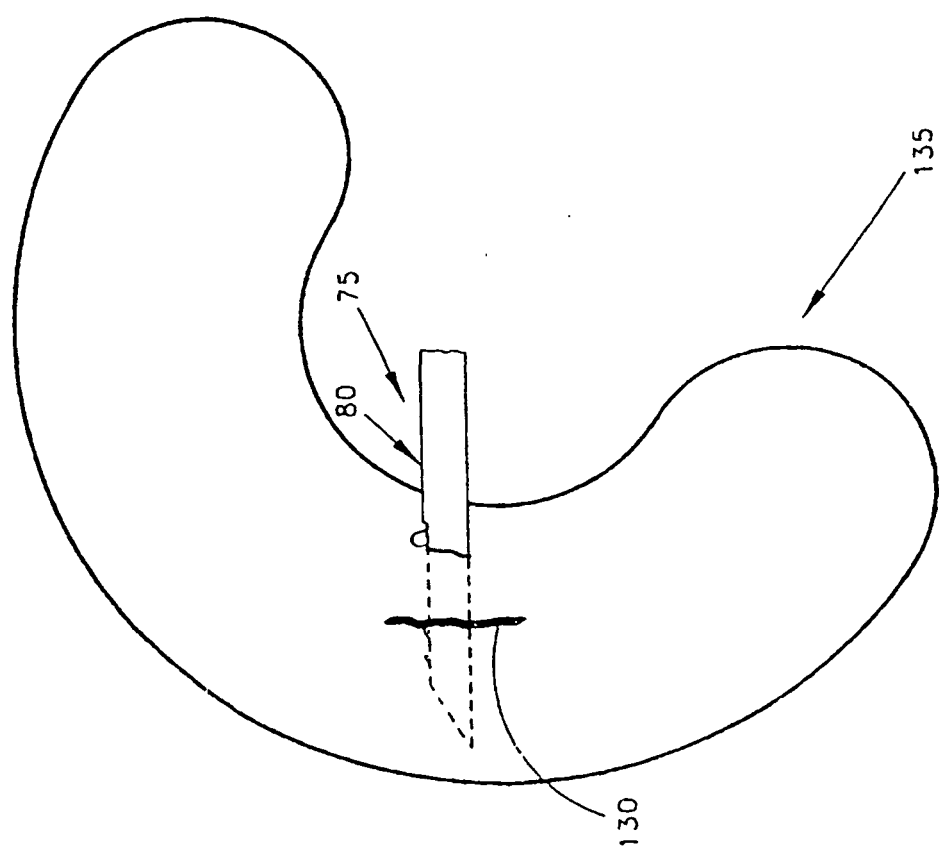


FIG. 11

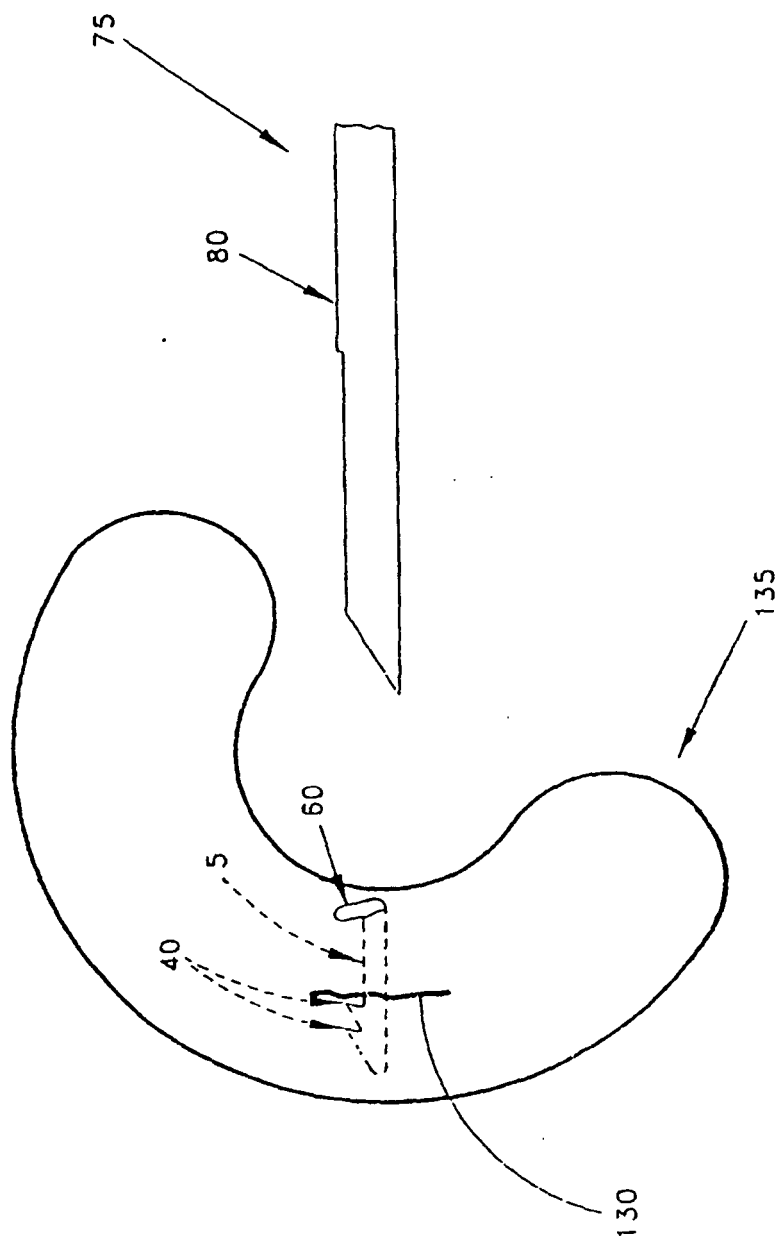


FIG. 12

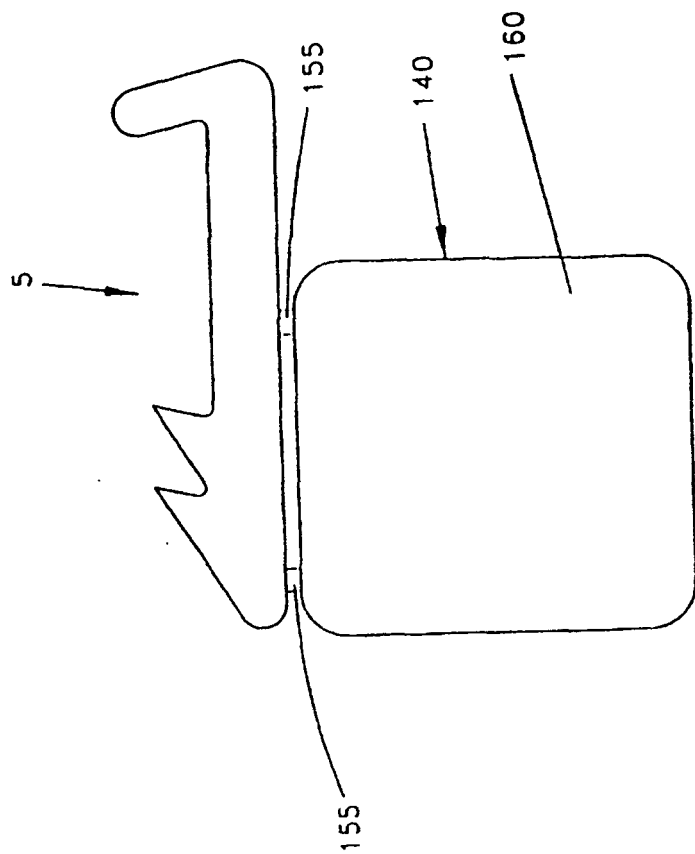


FIG. 13

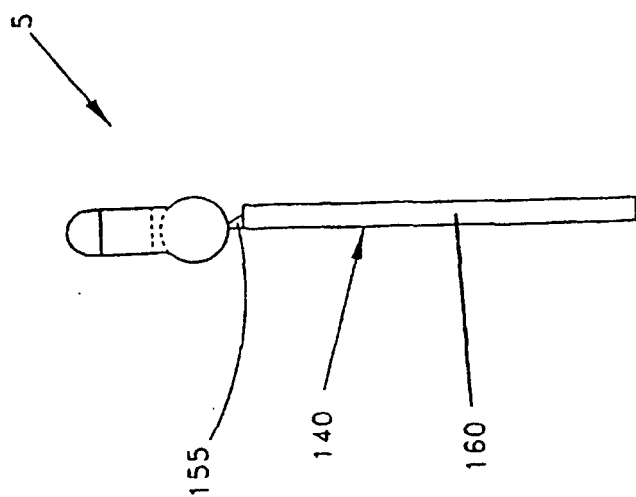


FIG. 14

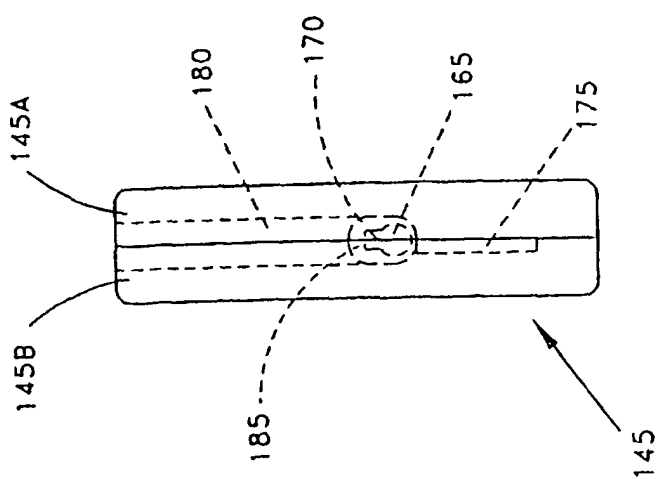
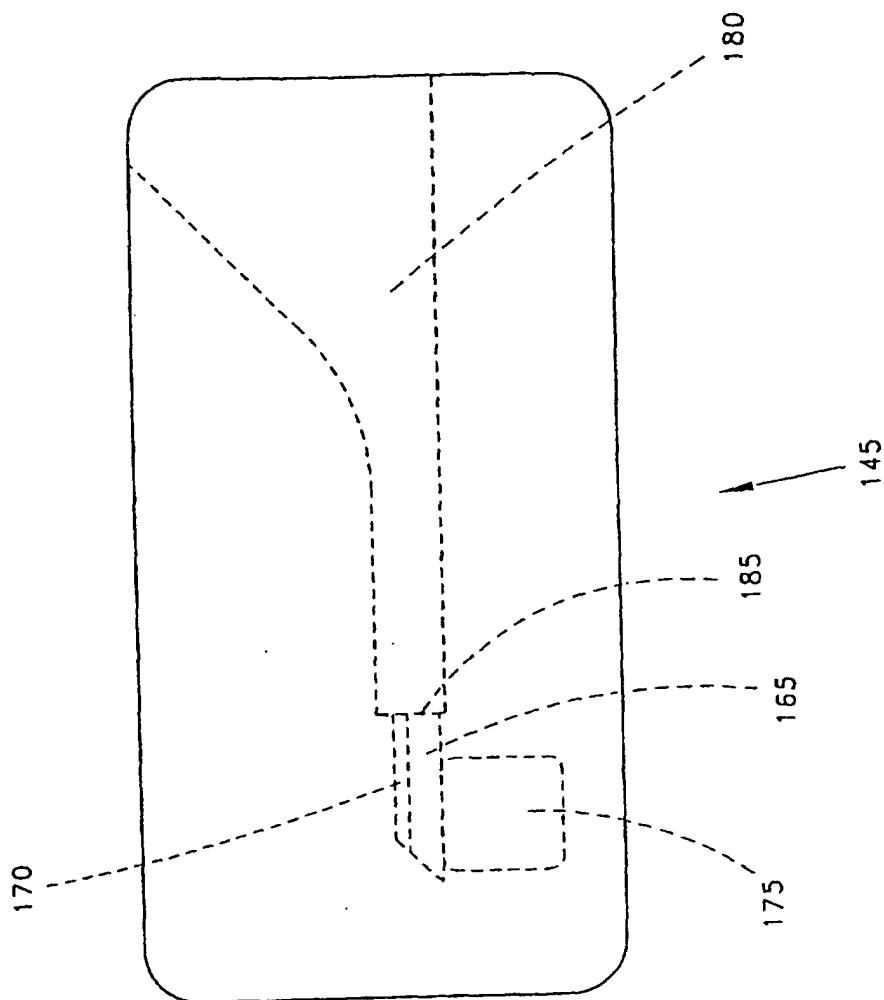


FIG. 15

FIG. 16

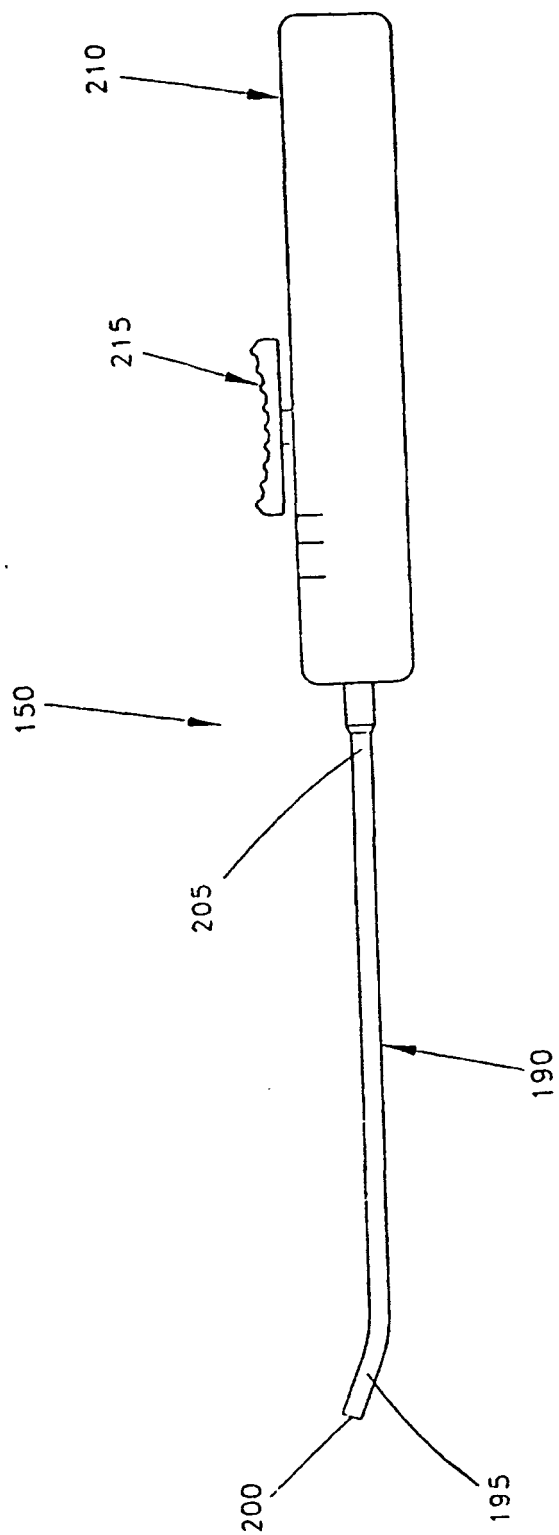


FIG. 17

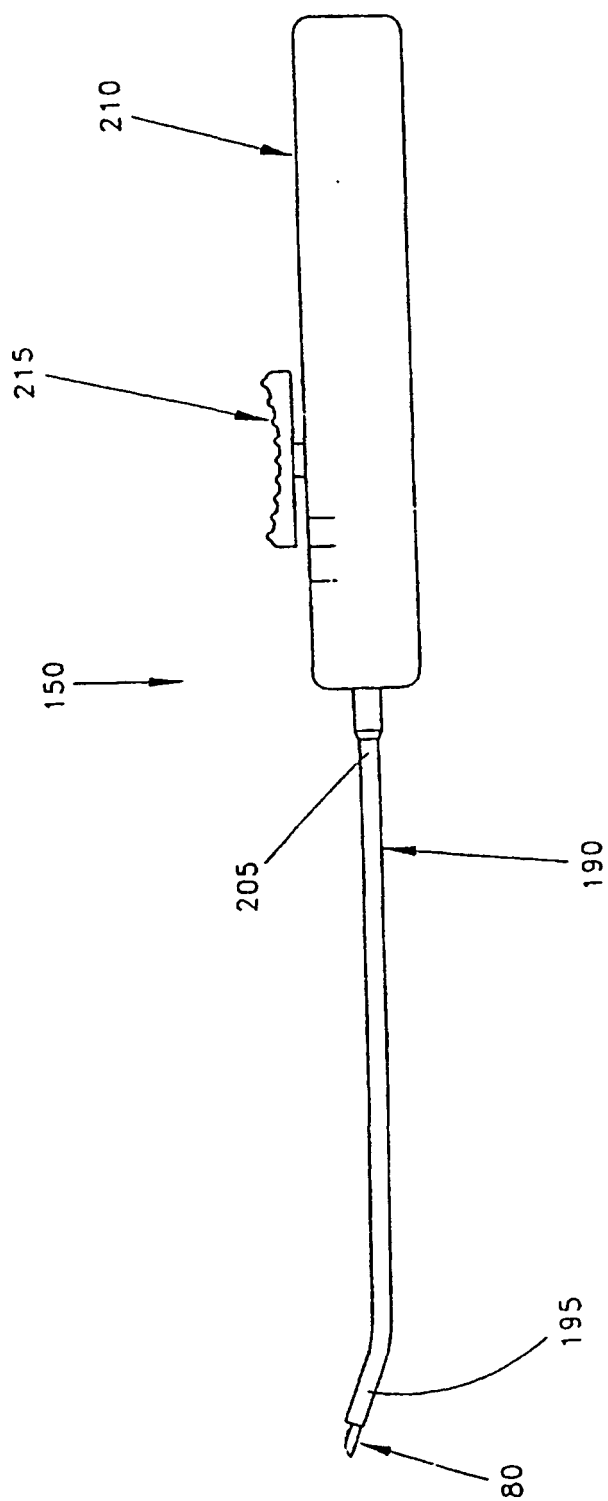


FIG. 18

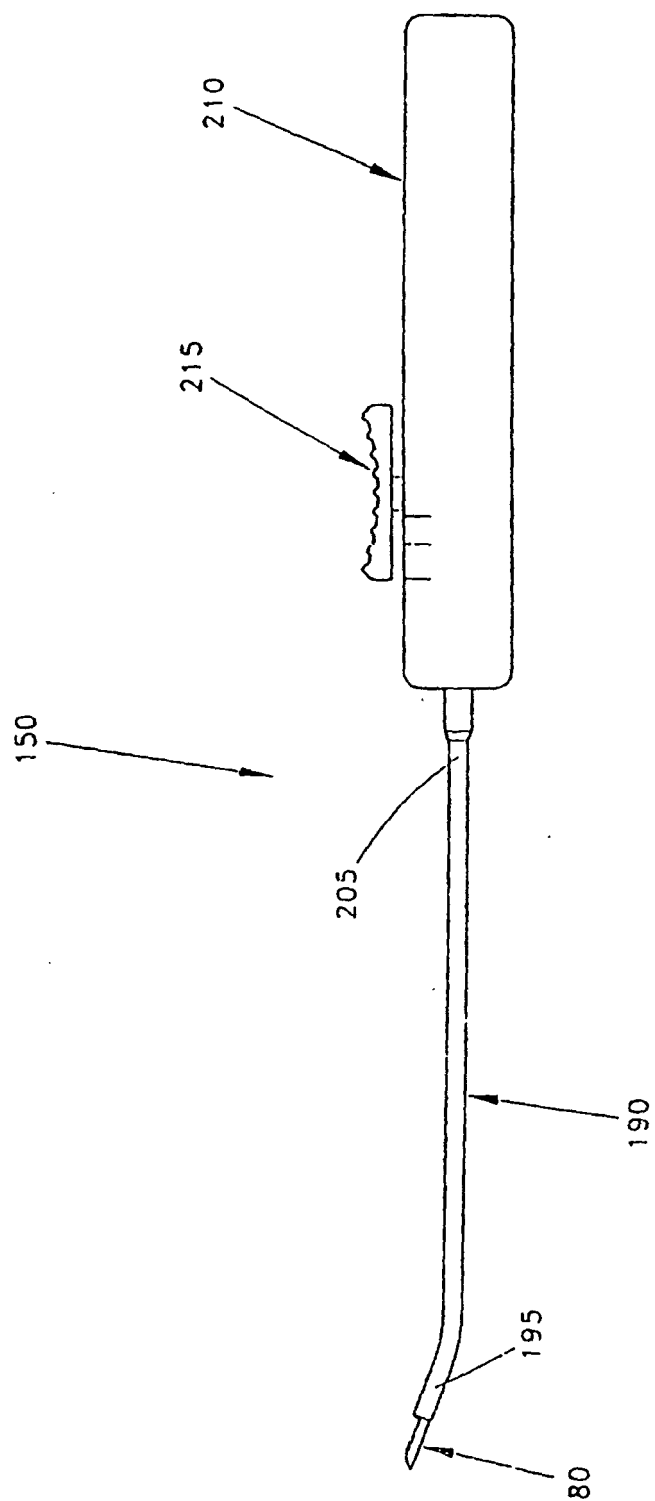


FIG. 19

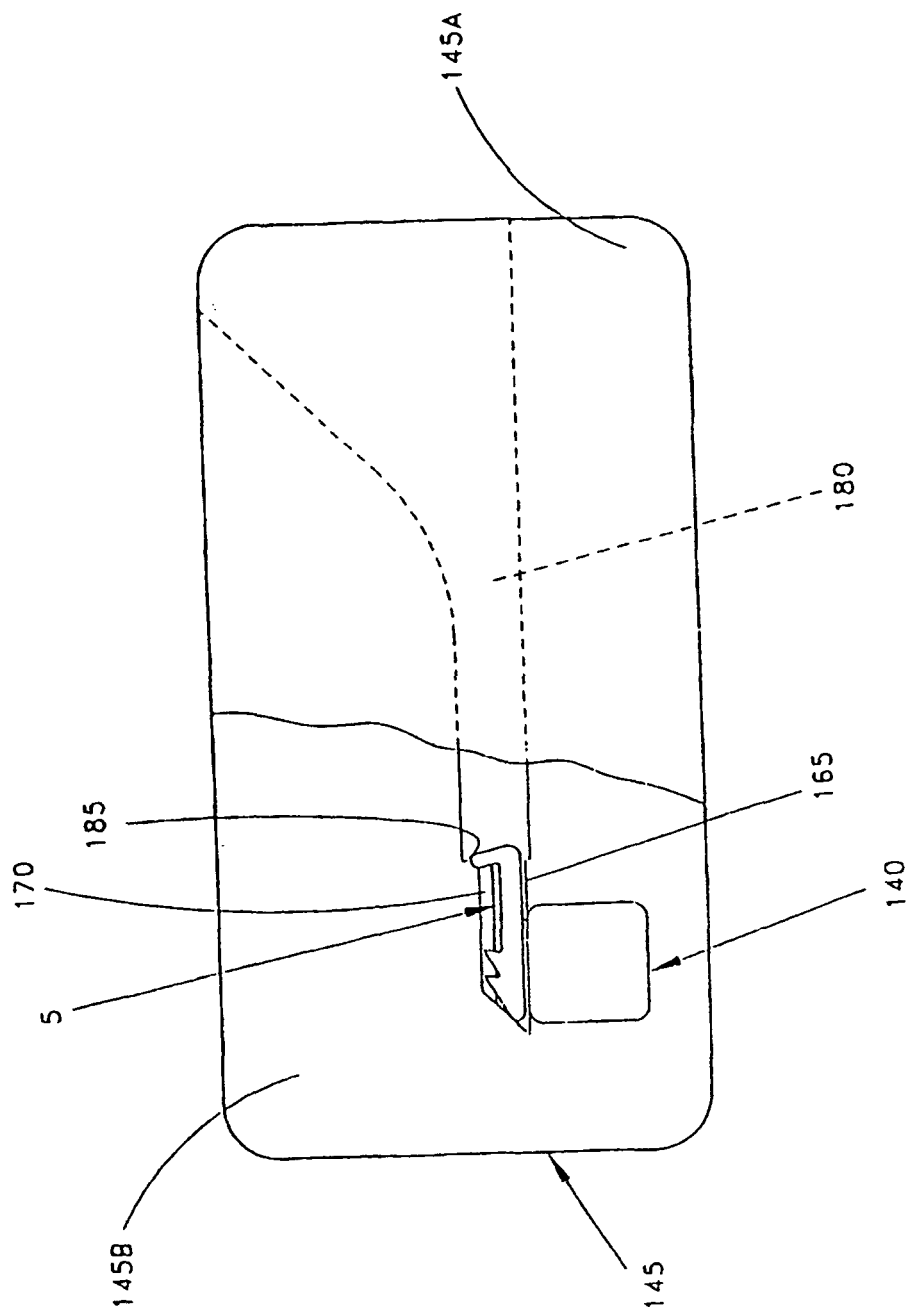


FIG. 20

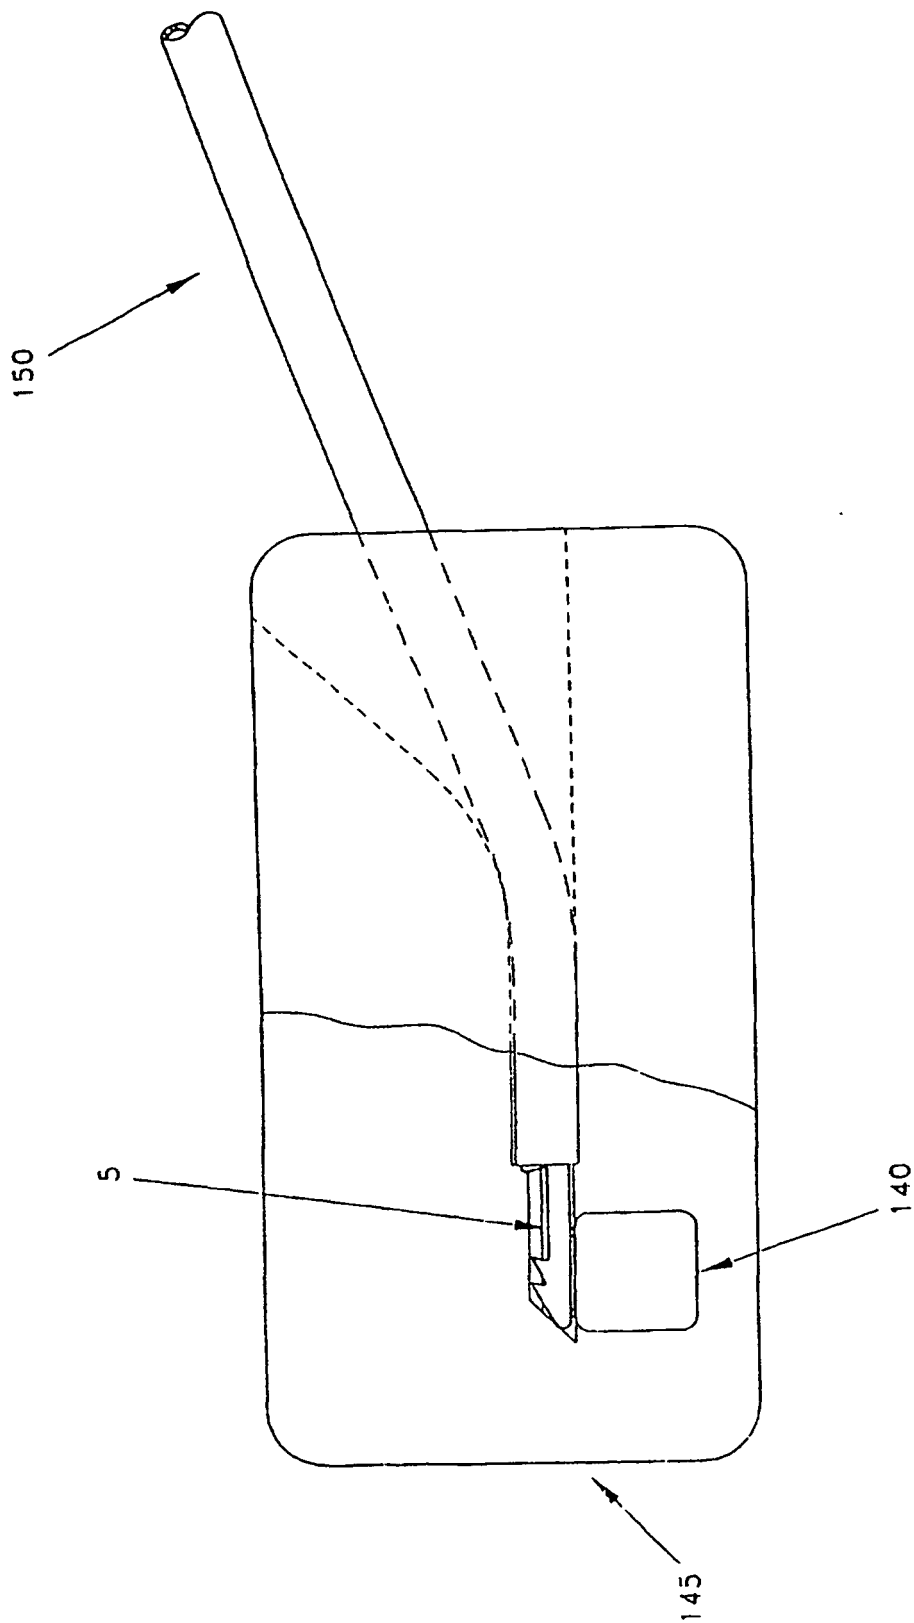


FIG. 21

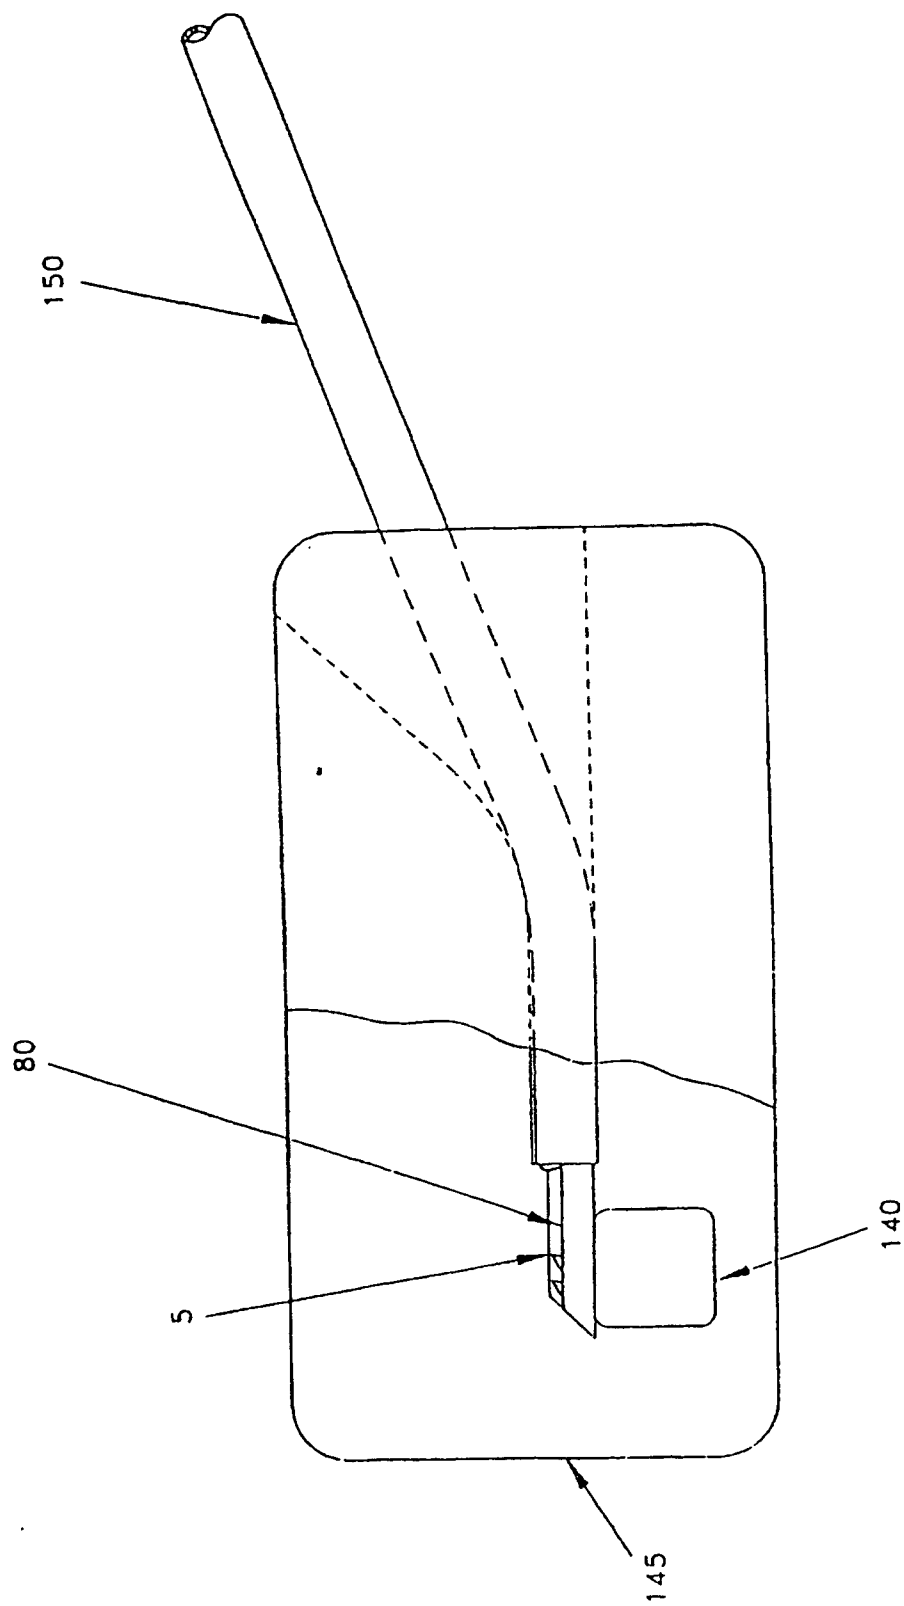


FIG. 22

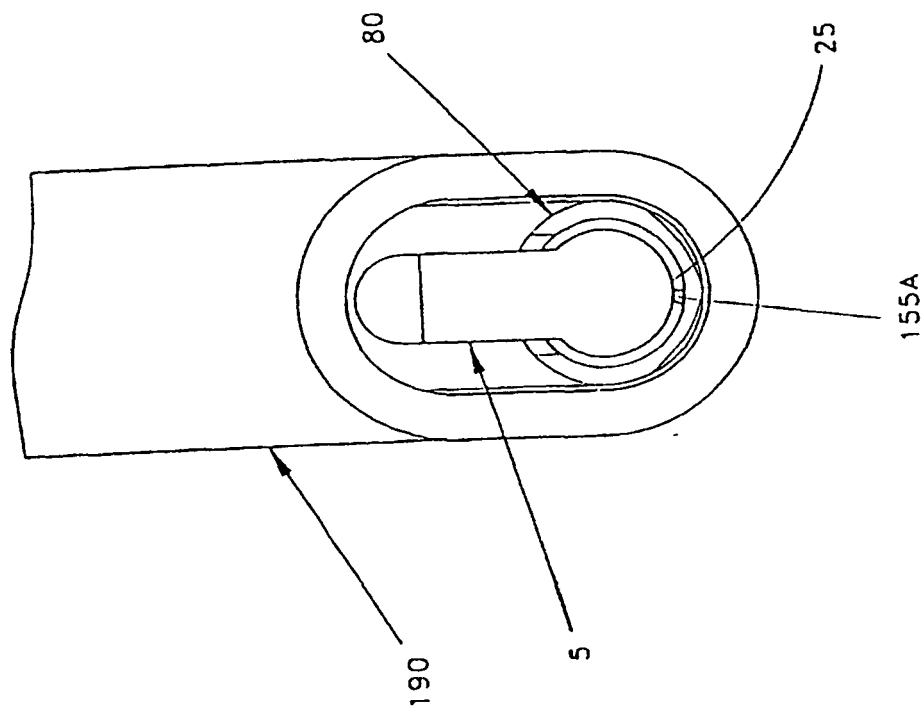


FIG. 23

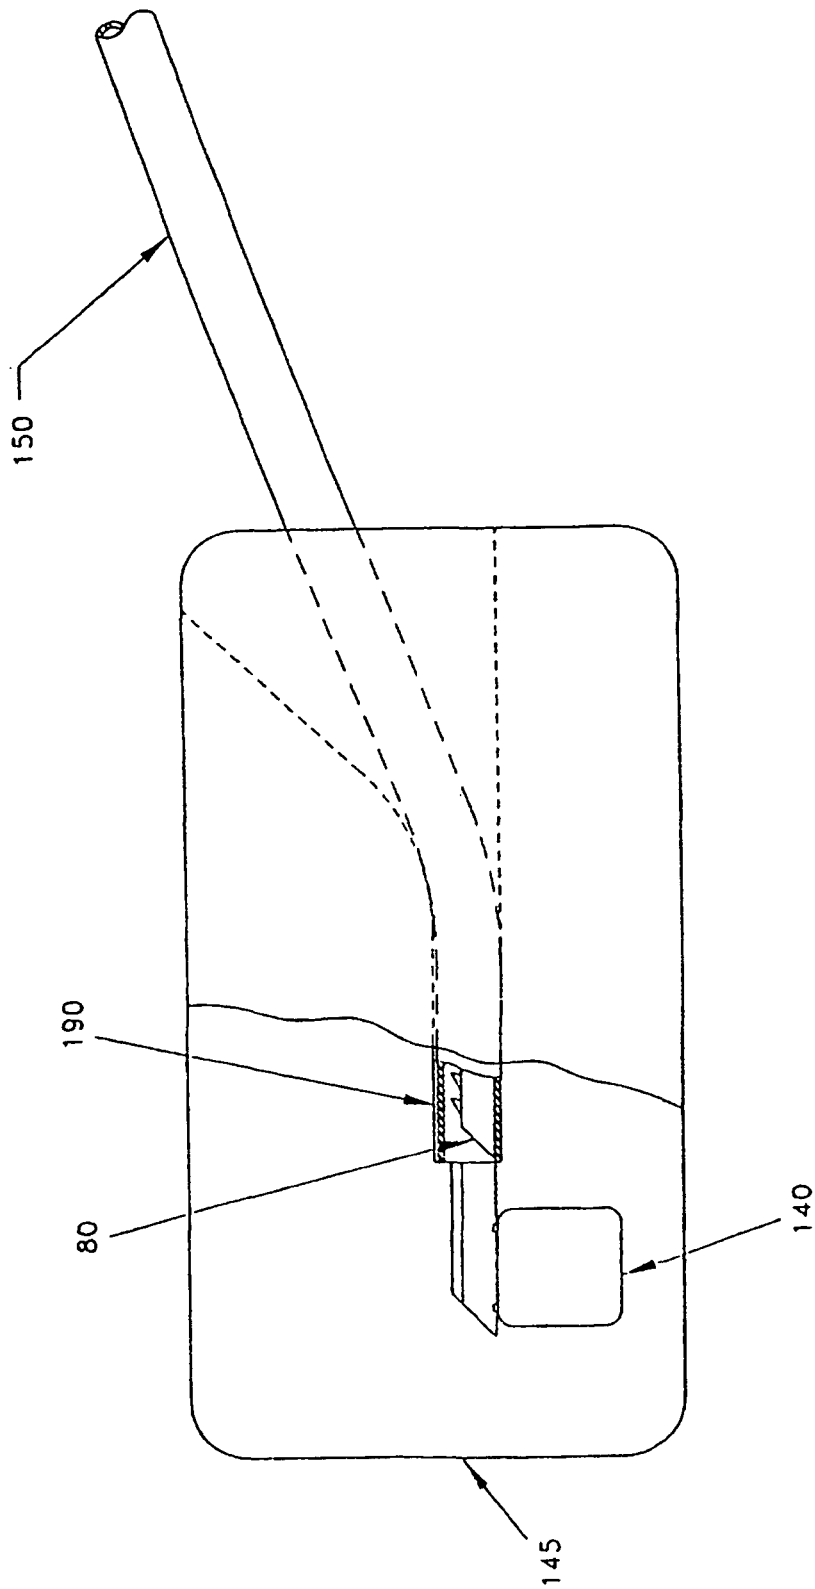


FIG. 24

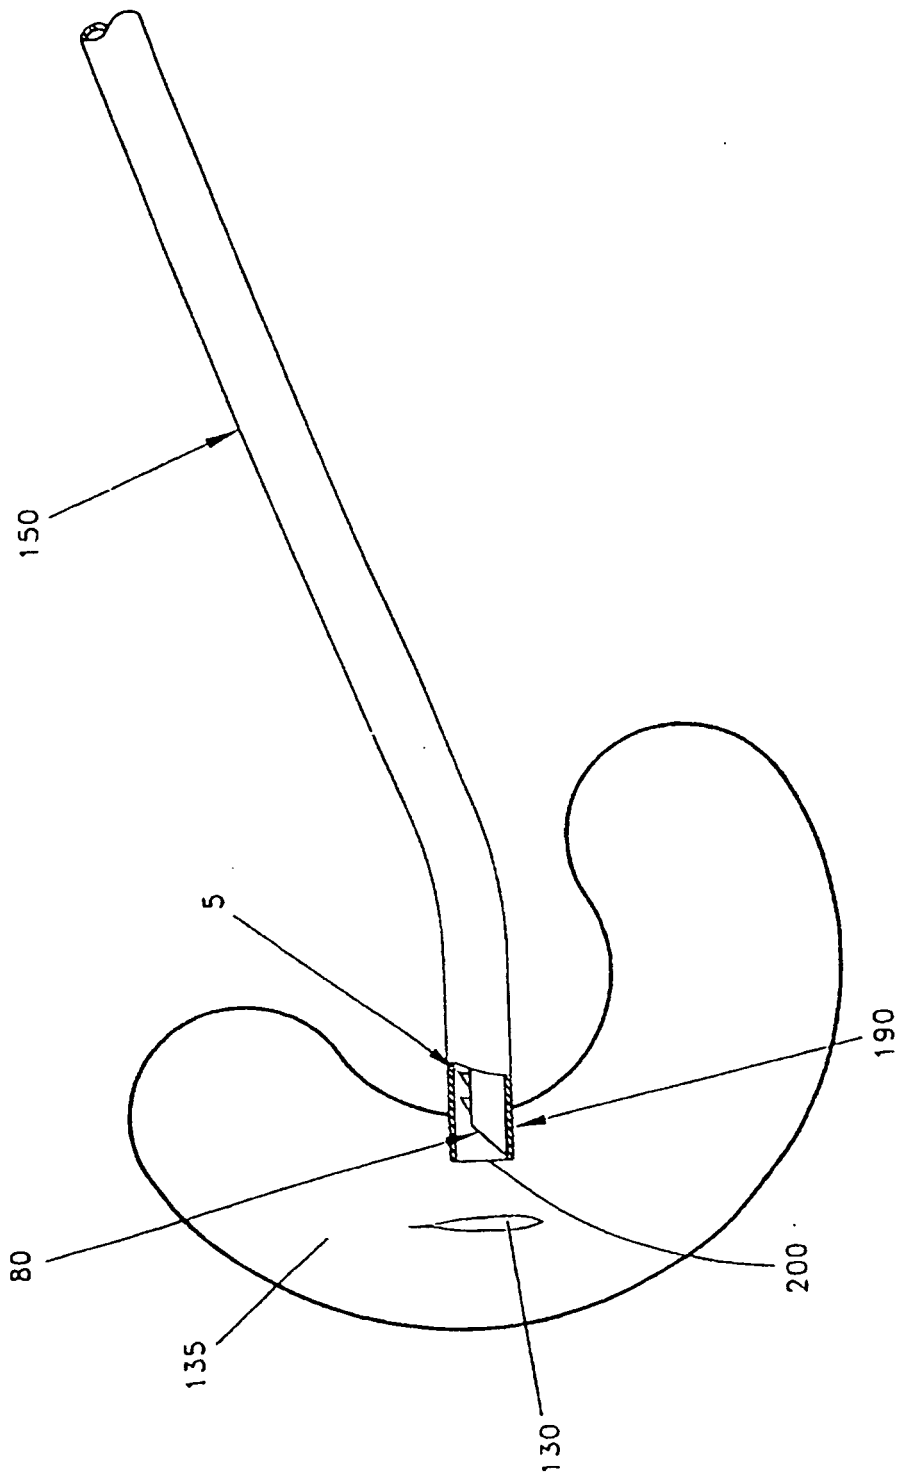


FIG. 25

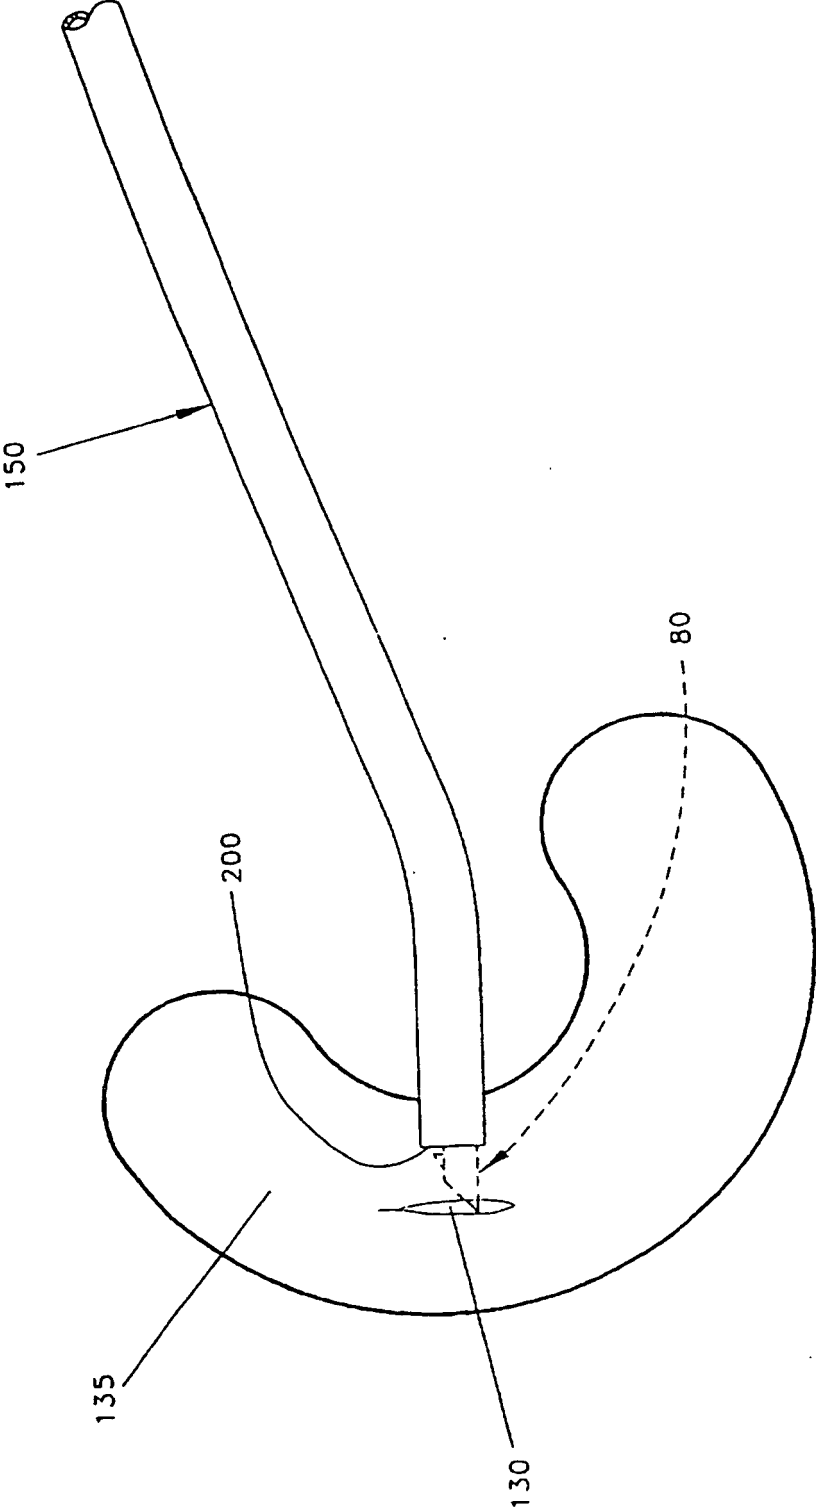


FIG. 26

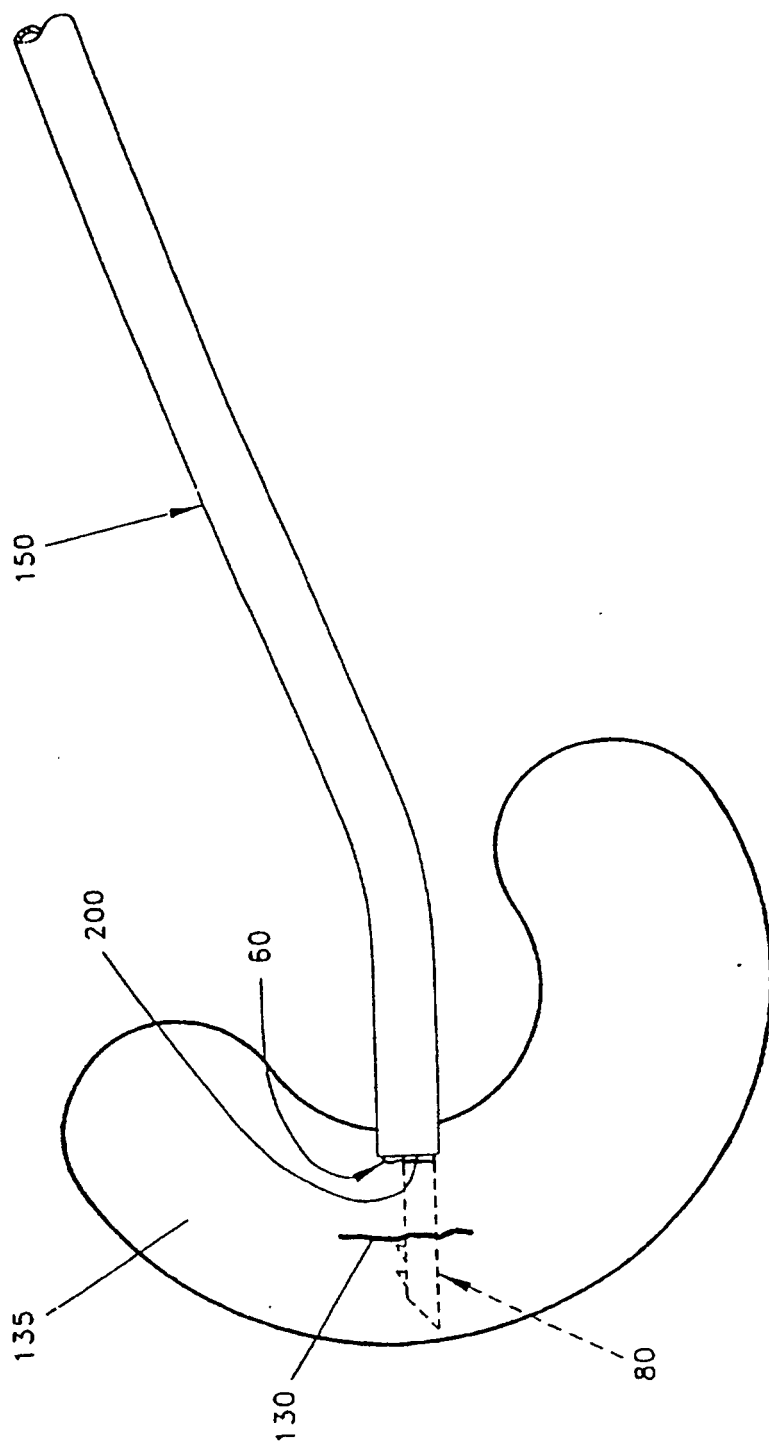


FIG. 27

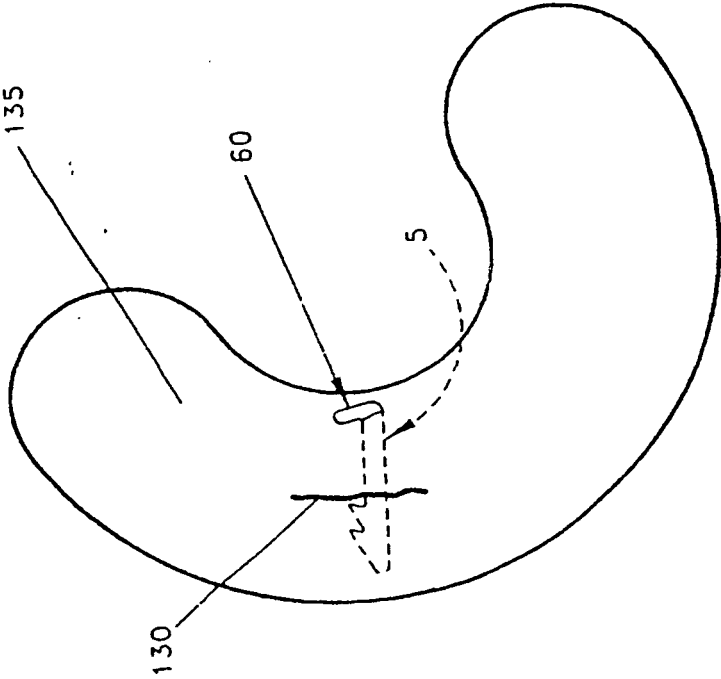


FIG. 28

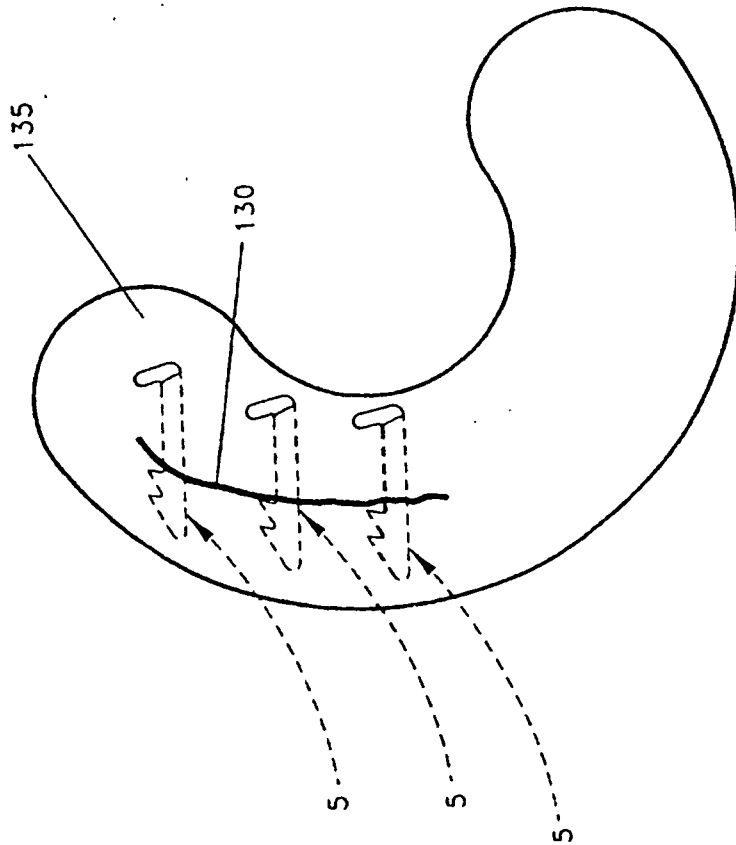


FIG. 29

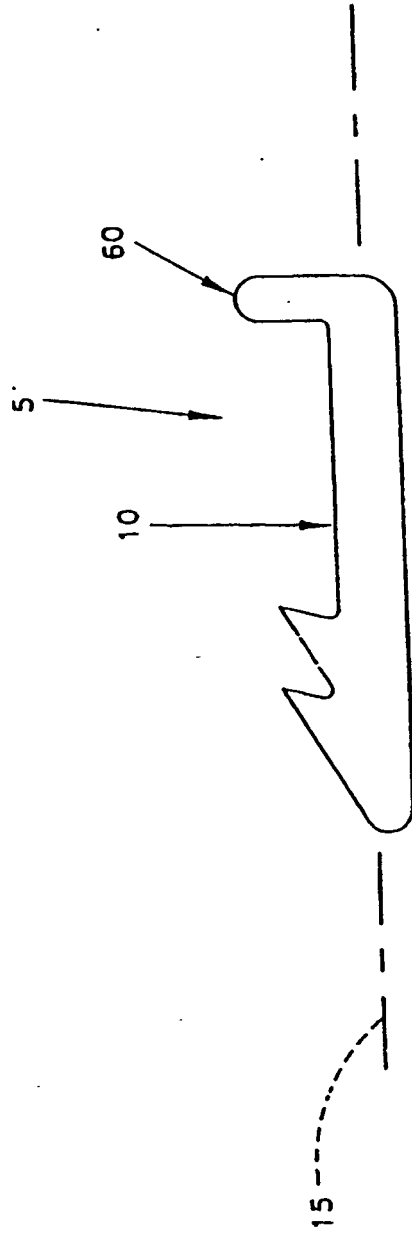


FIG. 30

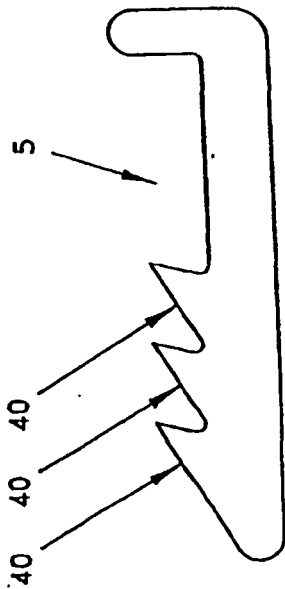


FIG. 31

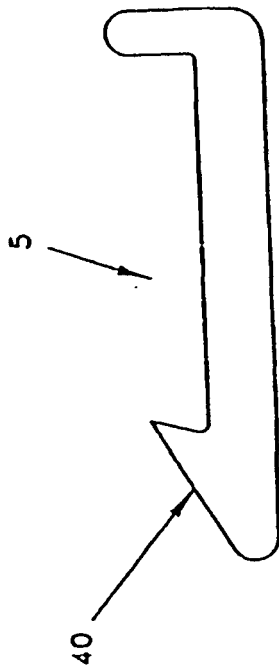


FIG. 32

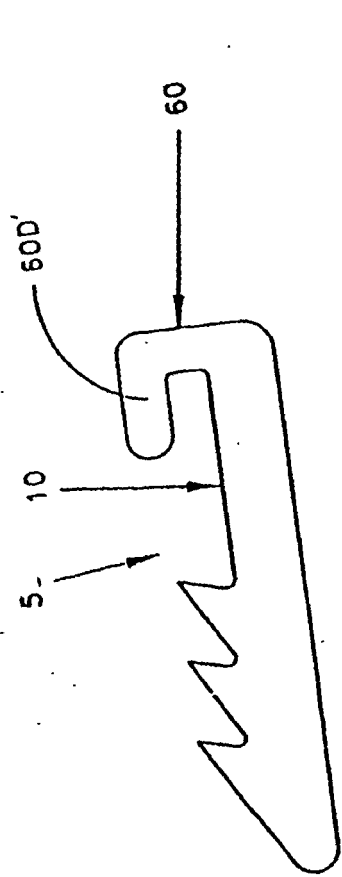


FIG. 33

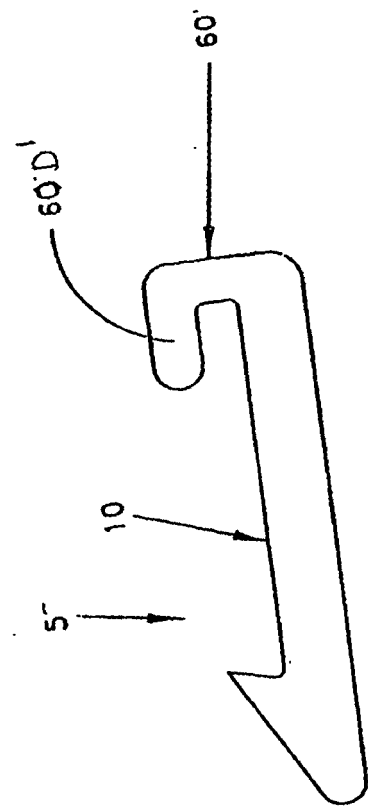


FIG. 34

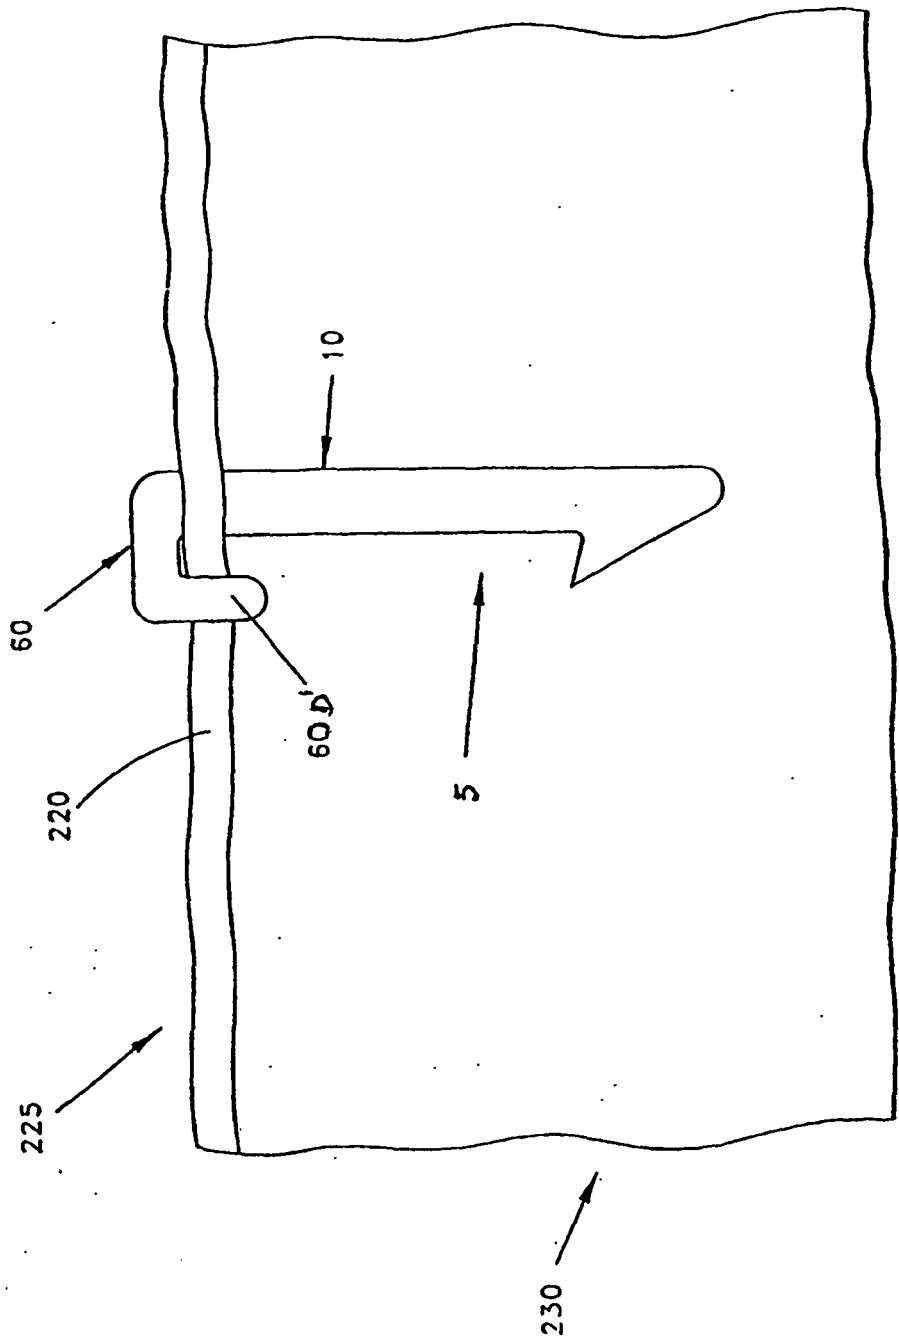


FIG. 35

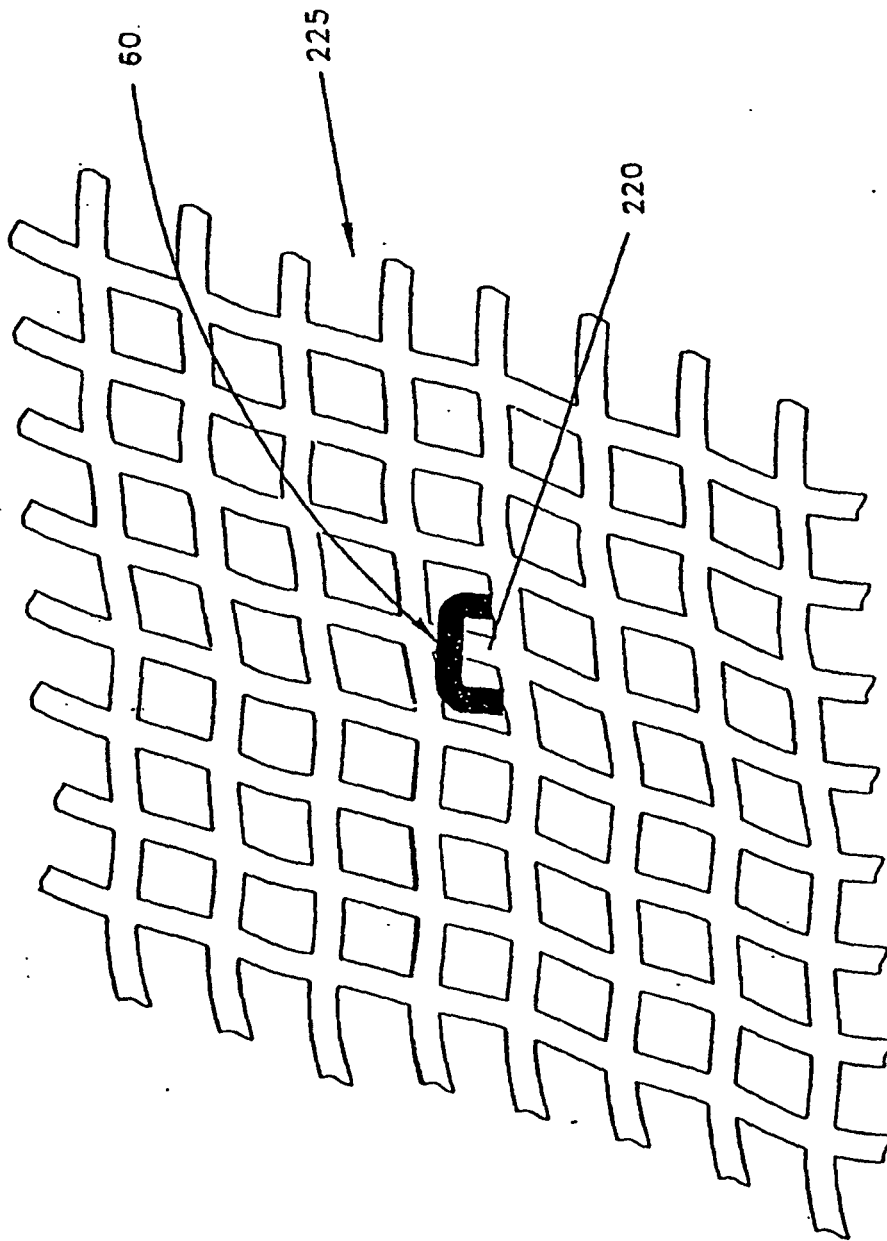


FIG. 36



FIG. 38

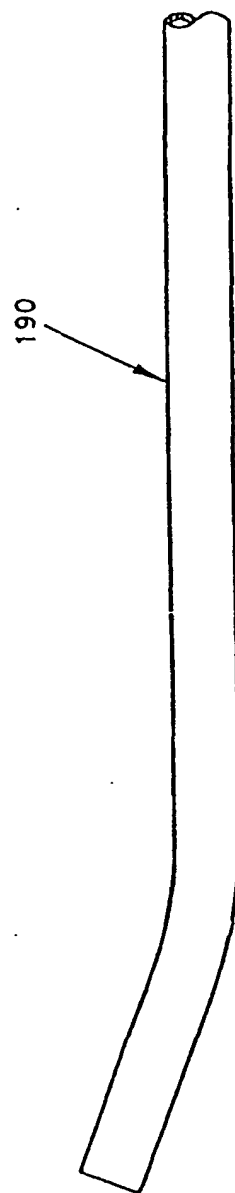


FIG. 37

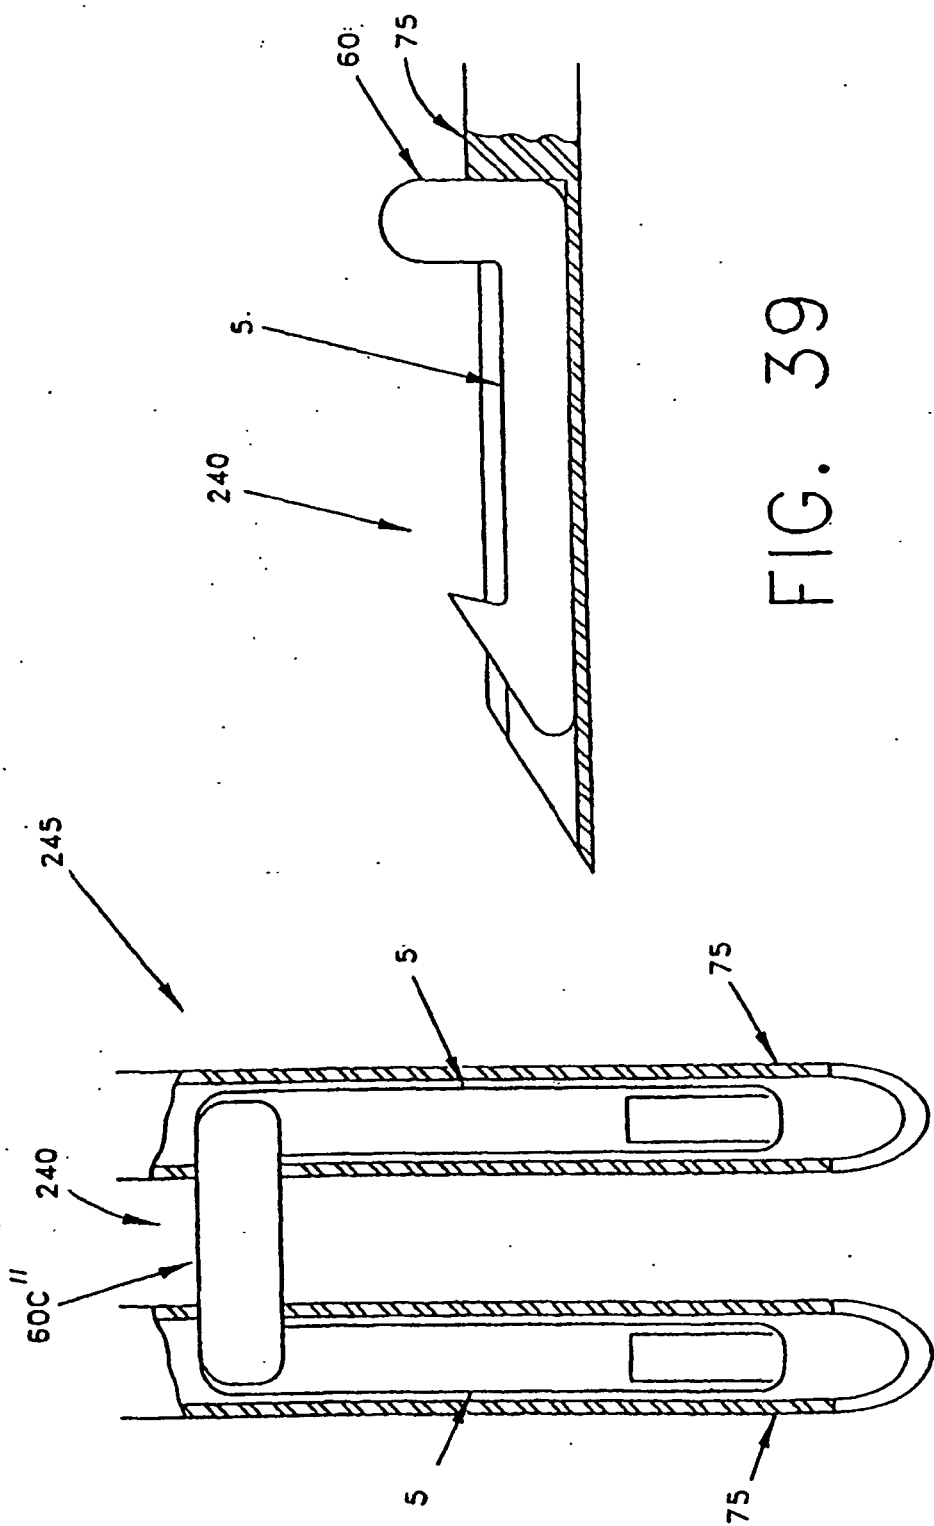


FIG. 39

FIG. 40

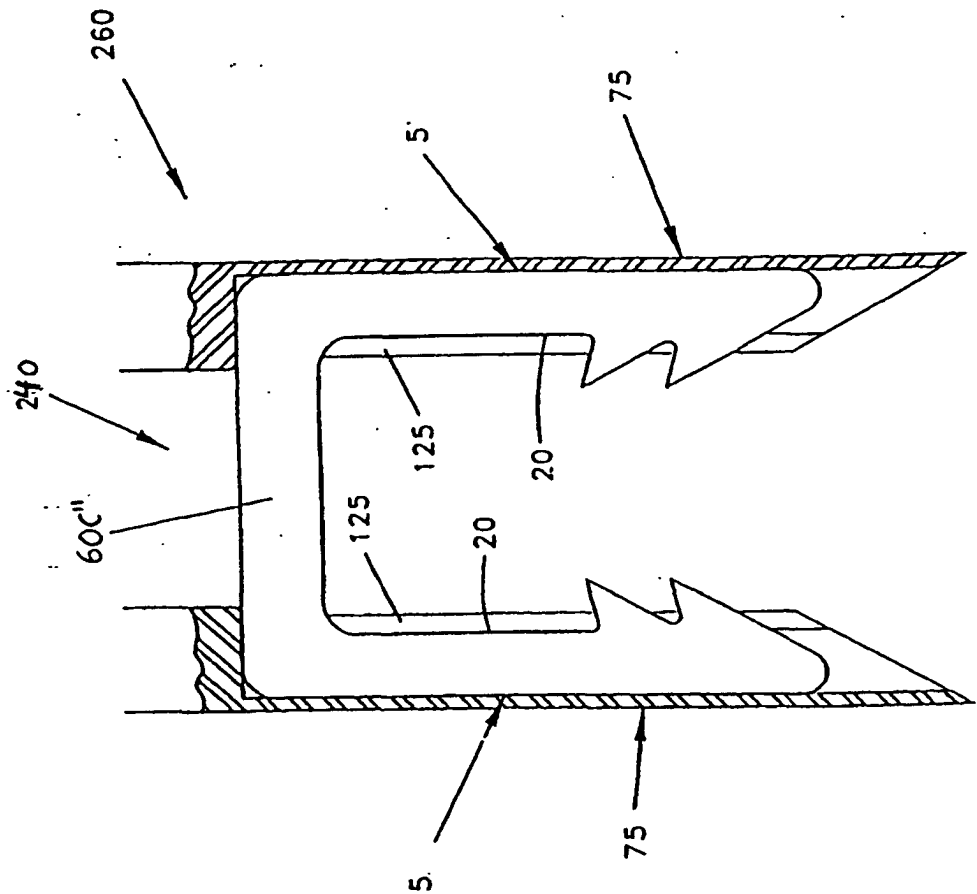


FIG. 41

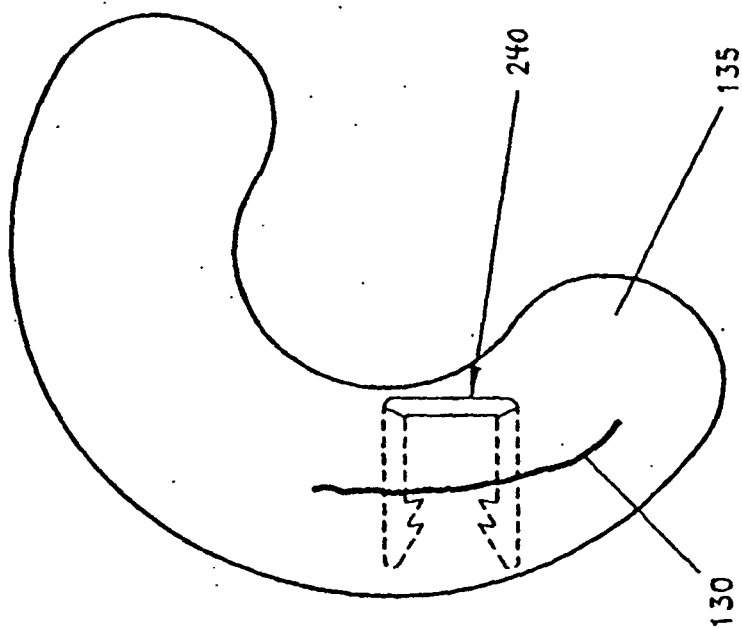


FIG. 42

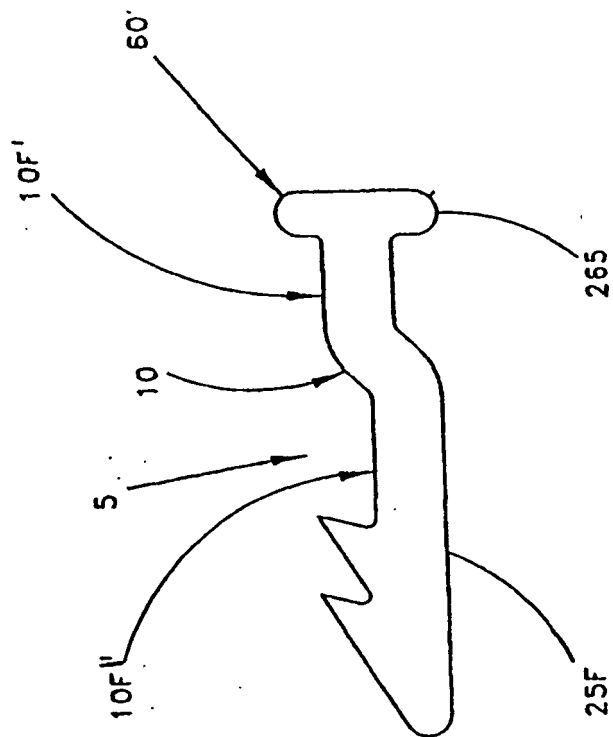


FIG. 43

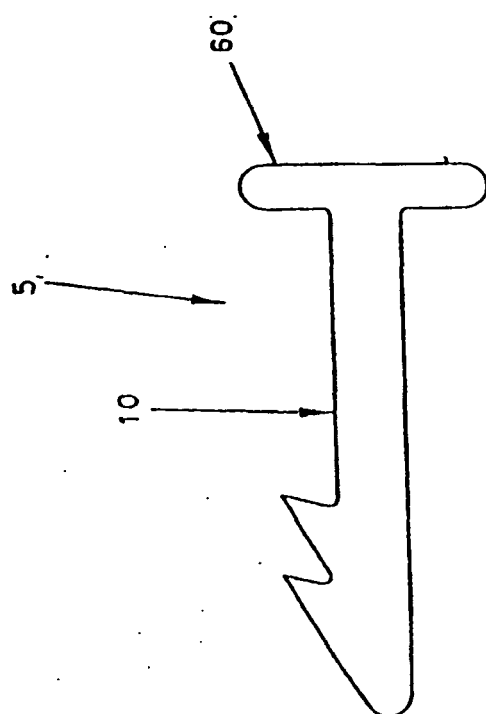


FIG. 44

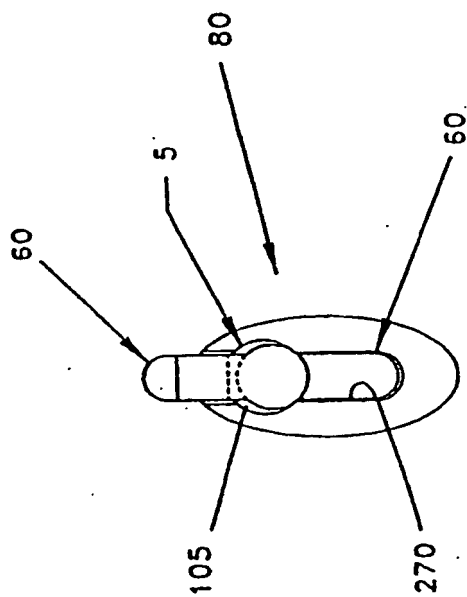


FIG. 45

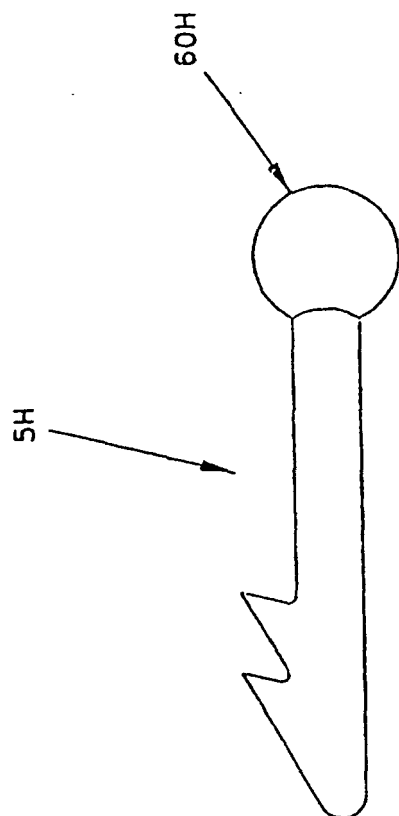


FIG. 46