(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
28 September 2006 (28.09.2006)

PCT

(10) International Publication Number
WO 2006/099897 A1

(51) International Patent Classification:
G03G 21/04 (2006.01) *H04N 1/00* (2006.01)

(21) International Application Number:
PCT/EP2005/013784

(22) International Filing Date:
21 December 2005 (21.12.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

05006182.9	22 March 2005 (22.03.2005)	EP
05006183.7	22 March 2005 (22.03.2005)	EP
05006184.5	22 March 2005 (22.03.2005)	EP

(71) Applicant *(for all designated States except US)*: **EASTMAN KODAK COMPANY** [US/US]; 343 State Street, Rochester, NY 14650 (US).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **SCHULZE-HAGENEST, Detlef** [DE/DE]; Dorfstede 51, D-24113 Molfsee (DE). **TYAGI, Dinesh** [US/US]; 18 White Alder Circle, Fairport, NY 14450us (US). **CHOWDRY, Arun** [US/US]; 6 Trotters Field Run, Pittsford, NY 14534 (US).

(74) Agents: **LAUERWALD, Jörg** et al.; NexPress GmbH, Am Kiel-Kanal 2, 24106 Kiel (DE).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WO 2006/099897 A1

(54) Title: METHOD AND DEVICE FOR CONTROLLING DIFFERENTIAL GLOSS AND PRINT ITEM PRODUCED THEREBY

(57) Abstract: The invention describes a method to control differential gloss of halftone areas produced using substantially clear or low-pigmented toner. It is an objective of this invention to provide a method which allows to produce digital watermarks on paper without being limited in the gloss properties of the toner, the paper or and selected fusing technology. The present invention relates to a method producing clear, low density or highdensity watermarks using Glossmark technology using low-pigmented toner or clear toner. Glossmark technology is for controlling the differential gloss of an image using the steps selecting a first halftone image having a first anisotropic structure, selecting a second halftone image having a second structure different from that of the first halftone, applying the first halftone to at least some portion of the halftone image and applying the second halftone to another portion of the halftone image.

METHOD AND DEVICE FOR CONTROLLING DIFFERENTIAL GLOSS AND PRINT ITEM PRODUCED THEREBY

The invention describes a method to control differential gloss of halftone areas. More specifically it describes a method to produce digital watermarks and gloss-mark by control of the print gloss when halftone images of substantially clear toner are printed on a substrate alone or together with low density or high-density halftone images.

It is desirable to protect a document against copying. This could be done in a manner that part of the content can be readily observed by a human reader but not by a copier or scanner. An image that is printed using clear toner or ink, creating a difference in reflected light and diffused light that can be distinguished by a human reader by looking the paper at an angle, but cannot be detected by a copier or scanner that is restricted to reading at right angles to the page.

Since some time clear or white toner is used to produce digital watermarks that cannot be copies or scanned but can be observed by a human reader.

US4210346 and US5695220 describes a method to achieve different diffused light characteristic at different angles using particular white paper and particulat white toner. This methods needs specific designed toners and papers.

US6108512 describes non-copyable prints printing text using clear toner. It can be detected by human eye due to the differential gloss but not with a conventional scanner. This method needs again specifically matched paper and toner having a large difference in gloss. It works in the combination glossy toner on matte paper and matte toner on glossy paper but not using e.g. glossy paper and toner in the same gloss range that is common in the field of digital commercial printing.

US5788285 describes a method and product for making non-reproducible documents, in which nearly invisible indicia on the document is printed. It consists of continuous screened lines of a desired pitch, and a background that will not reproduce by copying. It is formed by orthogonal reproduction of positive/negative images of continuous lines to produce broken lines of a desired width and pitch

US5853197 describes a security document, which is provided comprising a substrate having a top surface for carrying indicia. The security term is composed of a pattern of security term elements. The background elements and/or the security term elements differ in element size, shape, angle, density, and/or frequency between adjacent areas.

US5583660 describes a screen comprises columns and rows of halftone dot centers in which there is equal spacing in row to row, column to column, and column to rows relationships, but the columns are not geometrically orthogonal (perpendicular) to the rows.

US5506671 describes an electrophotographic printing process for forming one or more colorless toner images in combination with at least one color toner image produced in an electrophotographic way on a receptor element.

US 20030231349, US20040000786 and US20040001233 describe a method to manipulate differential gloss of an image (picture or text) by selectively applying halftones with anisotropic structure characteristics that are significantly different in orientation while remaining identical in density (Glossmark). A gloss image is thus superimposed within an image without the need for special toners/inks or paper. The teaching of these documents is limited to color halftone images. It cannot be used for low-density images or image areas specifically below 50% more specifically below 30% or most specifically below 20% area density. It cannot be used as well for high-density images or image areas specifically above 60% more specifically above 70% or most specifically above 80% area density as the effect is too week in these cases to be detected by human eye.

All of the above are herein incorporated by reference in their entirety for their teaching.

It is an objective of this invention to provide a method which allows to produce digital watermarks on paper without the limitations described above that means without being limited in the gloss properties of the toner, the paper or and selected fusing technology.

The problem is solved by providing a method for controlling the differential gloss of an image using the steps selecting a first halftone image having a first anisotropic structure, selecting a second halftone image having a second structure different from that of the first halftone, applying the first halftone to at least some portion of the halftone image and applying the second halftone to another portion of the halftone image characterized in that a toner is used that is substantially colorless to realize the first and second halftone images.

The problem is solved as well by providing a method for controlling the differential gloss of in a low density image produced with pigmented toners using the steps selecting a first halftone image having a first anisotropic structure, selecting a second halftone having a second structure orientation different from that of the first halftone, applying the first halftone to at least some portion of the halftone image and applying the second halftone to another portion of the halftone image characterized in that substantially colorless toner is added to the pigmented toner structures so that the total area coverage of pigmented plus substantially unpigmented toners is in the range of 20% to 80%, more preferable in the range 30% to 70% and most preferable in the range 40 to 60%. Alternatively the concentration of pigment in the toner is reduced so that the total area coverage of the toner is in the range 30% to 70%. For this alternative solution all improvements and modifications are valid as well.

The problem is solved as well by providing a method for controlling the differential gloss of in a low density image produced with pigmented toners using the steps selecting a first halftone image having a first anisotropic structure, selecting a second halftone having a second structure orientation different from that of the first halftone, applying the first halftone to at least some portion of the halftone image and applying the second halftone to another portion of the halftone image characterized in that that substantially colorless toner is added to the pigmented toner structures so that the total area coverage of pigmented plus substantially unpigmented toners is > 100%.

The present invention relates to a method producing clear watermarks, low-density watermarks and high-density watermarks using Glossmark technology and clear toner/ink. Glossmark technology is for controlling the differential gloss of an image using the steps selecting a first halftone image having a first anisotropic structure, selecting a second halftone image having a second structure different from that of the first halftone, applying the first halftone to at least some portion of the halftone image and applying the second halftone to another portion of the halftone image. The second structure maybe anisotropic as well.

The number of structures is not limited. In a specific embodiment two halftone structures are used. The second halftone maybe applied to the remaining part of the halftone image or to apart of it only. It may cover part of the print or the remaining part of the print area not covered by the first anisotropic structure. The first anisotropic structure and the second anisotropic structure orientation maybe 90 degrees apart.

Halftone in this context means screened structures of toner layers with a preferred area coverage of app. 20% to 80% or more preferable 30% - 70% and most preferable in the range 40% - 60%. This range they do exhibit anisotropic structures for solid areas and toner/ink-less areas. In areas with low (10%) or high (90%) area coverage the effect is not sufficient to be observable by human eye.

The present invention also relates to a process where the gloss of the paper and the gloss of the toner measured separately on 100% covered areas are to be about the same. In this cases the existing methods achieve differential gloss using clear toners without using anisotropic structures fail, as there no differential gloss is existing.

Low-density areas in this context mean areas with a area coverage too low to observe anisotropic structures by human eye. These are area coverage below the area coverage limits mentioned above especially area coverage of 30%, 20% or even 10%.

High-density areas in this context mean areas with an area coverage too high to observe anisotropic structures by human eye. These are area coverage above the area coverage limits mentioned above especially area coverage of 80%, 70% or even 60%.

The substantially clear toners in the present invention are essentially the same composition as color toners used in the art, except for the dyes and pigments. The clear toners are substantially transparent, such that the inherent colors of the applied color toners are not materially masked and the relative amount of reflected light from the image is essentially maintained and not materially diminished by the clear toner. The clear toner may be slightly tinted, pigmented or dyed up to a degree where it is substantially transparent uniformly over the visible spectrum (400 to 700 nm).

The method is particularly suitable for electrophotographic printers using dry toners as these toners having a median particle size in the range 5 – 10 µm, which, when fused may show a pregnant glossmark behavior.

In particular the present invention relates to a method to produce clear watermarks, low density or high-density watermarks where the structure of the second halftone has an anisotropic orientation as well.

This technology allows producing visible watermarks using toners that produce image of about the same gloss as the paper with the appropriate fusing technology.

In a specific embodiment the low pigmented toner specifically either low-pigmented cyan or low-pigmented toner is applied using the fifth print module of an electrophotographic printer equipped with 5 print modules. Five image units are installed along the paper pass and transfer their color separation to the paper either one after the other directly or via a blanket cylinder or jointly via a transfer belt.

The image units contain for example the different toners in the following order: black, yellow, dark magenta, dark cyan and light magenta, light cyan or light black (gray). The dark black, cyan and magenta image unit are equipped with a toner that results in a image density of 1.6 or more, the image unit equipped with light cyan or magenta toner or gray toner results in a image density of 1.0 or less preferably half of the image density achieved with dark cyan or magenta black toner. Low density yellow toner maybe used as well.

Both values relate to development of full area coverage, which means area coverage above app. 95% depending on the morphology of the substrate.

The mean particle size of the toner particles is 4 – 10µm preferably 5 – 9µm most preferably 6 – 8µm.

The light cyan, light magenta and gray image stations in the fifth position can be easily exchanged including their toner hopper. The selection of the light toner in the fifth imaging unit is based on the image content and is either done by the operator or by the color separation software.

The area coverage of the anisotropic halftone images is enhanced using either low-pigmented cyan or low-pigmented magenta or low pigmented yellow toner or low pigmented black (gray) toner of similar gloss so that the total area coverage

of the pigmented toner is in the range of 20% to 80% preferably in the range of 30% to 70% and most preferably in the range of 40% to 60%. Using low-pigmented toner the area coverage to achieve the same image density can be increased by the relation:

R=CN/ CL

Where CN is the concentration of the pigment in the normal pigmented toner and CL is the concentration of the same pigment in the lower pigmented toner. The reduction of image density at the same area coverage can be achieved as well by using pigments with lower tinting strength or by addition of other pigments that reduce the image density at the same area coverage. This maybe white or silver pigment or another light colored pigment (e.g. titanium oxide, zinc oxide, or Titanium strontium oxide).

The gray toners maybe low pigmented black toners with a low percentage of black pigment (typically 0.1% - 2%) – preferably carbon black, magnetite or black non-magnetic composite particles comprising hematite or black iron oxide hydroxide particles as core particles optionally surface treated. If white or silver pigments are used as described before the black pigment concentration is in the range 0.2 – 5% and the white or silver pigments in the range 5% to 10%.

The visibility of an anisotropic impression of the human eye depends on the total coverage of toner/ink of the same gloss level on the paper independent of the pigmentation.

Figure 1 shows the measured gloss level at an angle of 60°. A standard glossy paper is used showing a measured gloss of 39°. The gloss value at area coverage 0% is the paper gloss. The toner is a standard color toner fused to the paper using a standard hot roller fuser. The temperature of the hot roller was 160°C. The paper speed when passing through the fuser was 30cmls.

Figure 1 shows that the gloss decreases with increasing area coverage. At 10% area coverage it reaches a value of 30. The gloss difference between paper and image gloss at 10% area coverage is 9 only. This difference is too small to observe a clear Glossmark effect with the human eye. Using low-pigmented toner or adding substantially clear toner enhances the gloss difference to paper and thus the visibility of the Glossmark effect. The measured gloss level decreases with increasing area coverage and reaches saturation at about 50%. If the area coverage is further increased the gloss level stays stable but the Glossmark effect decreases as the percentage of toner/ink covered paper decreases.

Figure 2 shows the dependence of gloss measured at an angle of 60° on the area coverage for another toner/paper combination. A standard glossy paper is used showing a measured gloss of 35°. The gloss value at area coverage 0% is the paper gloss. The toner is a color toner for non-contact fusing fused to the paper using a non-contact fusing in this case microwave fusing.

Figure 2 shows that the measured gloss level decreases and thus the gloss difference to the paper gloss increases with increasing area coverage. At 10% area coverage it reaches a value of 30. The gloss difference between paper and image gloss at 10% area coverage is 5 only. This difference is too small to observe a clear Glossmark effect with the human eye. Using low-pigmented toner or adding substantially clear toner enhances the gloss difference to paper and thus the visibility of the Glossmark effect. The measured gloss level decreases with increasing area coverage and reaches a value of 19 at 50% resulting in a gloss difference of 15 to the paper that is well detectable by the human eye. If the area coverage is further increased the gloss difference to the paper further increases but the Glossmark effect decreases again as the percentage of toner/ink covered paper decreases.

Claims

1. A method for controlling the differential gloss of an image using the steps selecting a first halftone image having a first anisotropic structure, selecting a second halftone image having a second structure different from that of the first halftone, applying the first halftone to at least some portion of the halftone image and applying the second halftone to another portion of the halftone image
characterized in that
a toner is used that is substantially colorless to realize the first and second halftone images.

2. The method of claim 1, **characterized in that** the second structure has an anisotropic orientation.

3. The method of claim 2, **characterized in that** the image comprises area densities of 20% to 80%.

4. The method of claim 3, **characterized in that** the gloss of the paper and the toner measured separately on 100% covered areas is to be about the same.

5. The method of claim 3 **characterized in that** the first anisotropic structure orientation and the second anisotropic structure orientation are 90 degrees apart.

6. The method of claim 3 **characterized in that** the halftone image is intended for an electrophotographic printer.

7. The method of claim 3 **characterized in that** the second halftone is applied to the remaining portion of the halftone image.

8. A method for controlling the differential gloss of in a low density image produced with pigmented toners using the steps
selecting a first halftone image having a first anisotropic structure, selecting a second halftone having a second structure orientation different from that of the first halftone, applying the first halftone to at least some portion of the halftone image and applying the second halftone to another portion of the halftone image
characterized in that,
substantially colorless toner is added to the pigmented toner structures so that the total area coverage of pigmented plus substantially unpigmented toners is in the range of 20% to 80%.

9. The method of claim 8, **characterized in that** the second structure has an anisotropic orientation.

10. A method of claim 9
characterized in that,
that the total area coverage of pigmented plus substantially unpigmented toners is in the range of 30% to 70%.

11. A method of claim 10
comprising,
that the total area coverage of pigmented plus substantially unpigmented toners is in the range of 40% to 60%.

12. The method of claim 9, **comprising** that the total area coverage of the pigmented toners alone is less or equal 20%.

13. The method of claim 9 **characterized in that** the first anisotropic structure orientation and the second anisotropic structure orientation are 90 degrees apart.

14. The method of claim 10 **characterized in that** the second halftone is applied to the remaining portion of the halftone image.

15. The method of claim 10 **characterized in that** the halftone image is intended for an electrophotographic printer.

16. A method for controlling the differential gloss of in a high density image produced with pigmented toners using the steps selecting a first halftone image having a first anisotropic structure, selecting a second halftone having a second structure orientation different from that of the first halftone, applying the first halftone to at least some portion of the halftone image and applying the second halftone to another portion of the halftone image **characterized in that**,
that substantially colorless toner is added to the pigmented toner structures so that the total area coverage of pigmented plus substantially unpigmented toners is > 100%.

17. A method for controlling the differential gloss of in a low density image produced with pigmented toners using the steps selecting a first halftone image having a first anisotropic structure, selecting a second halftone having a second structure orientation different from that of the first halftone, applying the first halftone to at least some portion of the halftone image and applying the second halftone to another portion of the halftone image **characterized in that**
a toner is used where the concentration of pigment is reduced so that the total area coverage of the toner is in the range 30% to 70%.

18. The method of claim 16 or 17, **characterized in that** the second structure has an anisotropic orientation.

19. A method of claim 18
characterized in that,
that the total area coverage of pigmented plus substantially unpigmented

toners is in the range of 30% to 70%.

20. A method of claim 19
comprising,
that the total area coverage of pigmented plus substantially unpigmented toners is in the range of 40% to 60%.

21. The method of claim 18, **comprising** that the total area coverage of the pigmented toners alone is less or equal 20%.

22. The method of claim 19 **characterized in that** the first anisotropic structure orientation and the second anisotropic structure orientation are 90 degrees apart

23. The method of claim 19 **characterized in that** the second halftone is applied to the remaining portion of the halftone image.

24. The method of claim 19 **characterized in that** the halftone image is intended for an electrophotographic printer.

25. A halftone image comprising: a first halftone having an anisotropic structure orientation; and at least one additional halftone type having a structure different lo from the first halftone, where the first halftone is applied to a portion of the halftone image and the at least one additional halftone type is applied to another portion of the image
characterized in that
a toner is used that is substantially colorless to realize the first and second halftone images.

26. A halftone image comprising: a first halftone having an anisotropic structure orientation; and at least one additional halftone type having a structure different lo from the first halftone, where the first halftone is applied to a portion of the halftone image and the at least one additional halftone type

is applied to another portion of the image
characterized in that
substantially colorless toner is added to the pigmented toner structures so that the total area coverage of pigmented plus substantially unpigmented toners is in the range of 20% to 80%.

27. A halftone image comprising: a first halftone having an anisotropic structure orientation; and at least one additional halftone type having a structure different lo from the first halftone, where the first halftone is applied to a portion of the halftone image and the at least one additional halftone type is applied to another portion of the image
characterized in that
a toner is used where the concentration of pigment is reduced so that the total area coverage of the toner is in the range 30% to 70%.

28. A halftone image comprising: a first halftone having an anisotropic structure orientation; and at least one additional halftone type having a structure different lo from the first halftone, where the first halftone is applied to a portion of the halftone image and the at least one additional halftone type is applied to another portion of the image
characterized in that
that substantially colorless toner is added to the pigmented toner structures so that the total area coverage of pigmented plus substantially unpigmented toners is > 100%.

29. A print item comprising: a substrate and a halftone image comprising: a first halftone having an anisotropic structure orientation; and at least one additional halftone type having a structure different lo from the first halftone, where the first halftone is applied to a portion of the halftone image and the at least one additional halftone type is applied to another portion of the image
characterized in that
a toner is used that is substantially colorless to realize the first and second

halftone images.

30. A print item comprising: a substrate and a halftone image comprising: a first halftone having an anisotropic structure orientation; and at least one additional halftone type having a structure different lo from the first halftone, where the first halftone is applied to a portion of the halftone image and the at least one additional halftone type is applied to another portion of the image
characterized in that
substantially colorless toner is added to the pigmented toner structures so that the total area coverage of pigmented plus substantially unpigmented toners is in the range of 20% to 80%.

31. A print item comprising: a substrate and a halftone image comprising: a first halftone having an anisotropic structure orientation; and at least one additional halftone type having a structure different lo from the first halftone, where the first halftone is applied to a portion of the halftone image and the at least one additional halftone type is applied to another portion of the image
characterized in that
a toner is used where the concentration of pigment is reduced so that the total area coverage of the toner is in the range 30% to 70%.

32. A print item comprising: a substrate and a halftone image comprising: a first halftone having an anisotropic structure orientation; and at least one additional halftone type having a structure different lo from the first halftone, where the first halftone is applied to a portion of the halftone image and the at least one additional halftone type is applied to another portion of the image
characterized in that
that substantially colorless toner is added to the pigmented toner structures so that the total area coverage of pigmented plus substantially un-

pigmented toners is > 100%.

33. A device for producing a print item comprising: a substrate and a halftone image comprising: a first halftone having an anisotropic structure orientation; and at least one additional halftone type having a structure different lo from the first halftone, where the first halftone is applied to a portion of the halftone image and the at least one additional halftone type is applied to another portion of the image
characterized in that
a toner is used that is substantially colorless to realize the first and second halftone images.

34. A device for producing a print item comprising: a substrate and a halftone image comprising: a first halftone having an anisotropic structure orientation; and at least one additional halftone type having a structure different lo from the first halftone, where the first halftone is applied to a portion of the halftone image and the at least one additional halftone type is applied to another portion of the image
characterized in that
substantially colorless toner is added to the pigmented toner structures so that the total area coverage of pigmented plus substantially unpigmented toners is in the range of 20% to 80%.

35. A device for producing a print item comprising: a substrate and a halftone image comprising: a first halftone having an anisotropic structure orientation; and at least one additional halftone type having a structure different lo from the first halftone, where the first halftone is applied to a portion of the halftone image and the at least one additional halftone type is applied to another portion of the image
characterized in that
a toner is used where the concentration of pigment is reduced so that the total area coverage of the toner is in the range 30% to 70%.

36. A device for producing a print item comprising: a substrate and a halftone image comprising: a first halftone having an anisotropic structure orientation; and at least one additional halftone type having a structure different lo from the first halftone, where the first halftone is applied to a portion of the halftone image and the at least one additional halftone type is applied to another portion of the image

characterized in that

that substantially colorless toner is added to the pigmented toner structures so that the total area coverage of pigmented plus substantially unpigmented toners is > 100%.

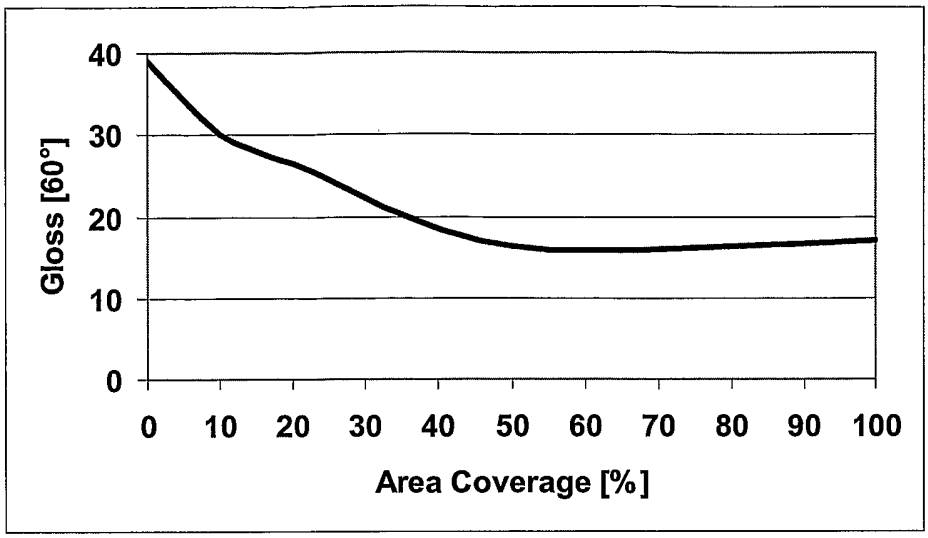

Figure 1

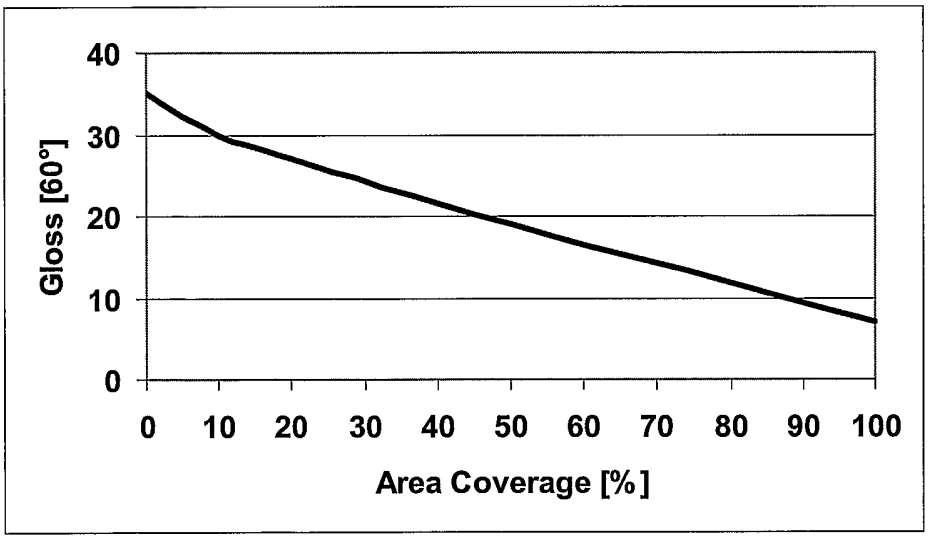

Figure 2

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2005/013784

A. CLASSIFICATION OF SUBJECT MATTER
INV. G03G21/04 H04N1/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G03G H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y X A	EP 1 367 810 A (XEROX CORPORATION) 3 December 2003 (2003-12-03) cited in the application paragraphs [0004], [0007] - [0009], [0011], [0013], [0015] - [0020]; figures 1-6 & US 2003/231349 A1 (WANG SHEN-GE ET AL) 18 December 2003 (2003-12-18)	1-16, 18-26, 28-30,32 33,34,36 17,27, 31,35
Y A	US 6 108 512 A (HANNA ET AL) 22 August 2000 (2000-08-22) cited in the application column 1, lines 5-10 column 2, lines 15-50 figures 1,2	1-16, 18-26, 28-30,32 17,27, 31,35

-/--

[X] Further documents are listed in the continuation of Box C.

[X] See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
22 May 2006	02/06/2006

Name and mailing address of the ISA/	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL – 2280 HV Rijswijk Tel. (+31–70) 340–2040, Tx. 31 651 epo nl, Fax: (+31–70) 340–3016	Laeremans, B

2

Form PCT/ISA/210 (second sheet) (April 2005)

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2005/013784

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	EP 1 541 368 A (XEROX CORPORATION) 15 June 2005 (2005-06-15)	1-16, 18-26, 28-30, 32-34,36
P,X	paragraphs [0010], [0014], [0015], [0022] - [0025]; claim 9; figures 1-6	17,27, 31,35

INTERNATIONAL SEARCH REPORT

International application No.
PCT/EP2005/013784

Box II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.

2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

☐ The additional search fees were accompanied by the applicant's protest.

☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-16, 18-24 (when dependent on 16), 25, 26, 28-30, 32-34, 36

Method for controlling the differential gloss in an image, wherein substantially colorless toner is used.

1.1. claims: 1-7, 25, 29, 33

A method for controlling the differential gloss in an image, wherein a toner is used that is substantially colorless to realize the first and second halftone images;
a halftone image and a print item produced thereby; and a device for producing the print item.

1.2. claims: 8-15, 26, 30, 34

A method for controlling the differential gloss of in a low density image produced with pigmented toners, wherein substantially colorless toner is added to the pigmented toner structures so that the total area coverage of pigmented plus substantially unpigmented toners is in the range of 20% to 80%;
a halftone image and a print item produced thereby; and a device for producing the print item.

1.3. claims: 16, 18-24 (when dependent on 16), 28, 32, 36

A method for controlling the differential gloss of in a high density image produced with pigmented toners, wherein substantially colorless toner is added to the pigmented toner structures so that the total area coverage of pigmented plus substantially unpigmented toners is > 100%;
a halftone image and a print item produced thereby; and a device for producing the print item.

---

2. claims: 17, 18-24 (when dependent on 17), 27, 31, 35

A method for controlling the differential gloss of in a low density image produced with pigmented toners, wherein a toner is used where the concentration of pigment is reduced so that the total area coverage of the toners is in the range of 30% to 70%;
a halftone image and a print item produced thereby; and a device for producing the print item.

INTERNATIONAL SEARCH REPORT

nformation on patent family members

International application No
PCT/EP2005/013784

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 1367810 A	03-12-2003	CA 2429446 A1	30-11-2003
		JP 2004058655 A	26-02-2004
		MX PA03004682 A	04-10-2005
		US 2003231349 A1	18-12-2003
US 2003231349 A1	18-12-2003	CA 2429446 A1	30-11-2003
		EP 1367810 A2	03-12-2003
		JP 2004058655 A	26-02-2004
		MX PA03004682 A	04-10-2005
US 6108512 A	22-08-2000	NONE	
EP 1541368 A	15-06-2005	JP 2005176377 A	30-06-2005
		US 2005128524 A1	16-06-2005