




(86) Date de dépôt PCT/PCT Filing Date: 2017/10/20
(87) Date publication PCT/PCT Publication Date: 2018/05/31
(45) Date de délivrance/Issue Date: 2022/10/25
(85) Entrée phase nationale/National Entry: 2019/05/22
(86) N° demande PCT/PCT Application No.: CA 2017/000232
(87) N° publication PCT/PCT Publication No.: 2018/094500
(30) Priorité/Priority: 2016/11/25 (US62/426,418)

(51) Cl.Int./Int.Cl. *F02G 1/043* (2006.01),
F01K 27/00 (2006.01), *F02G 1/053* (2006.01)
(72) Inventeurs/Inventors:
MEDARD DE CHARDON, BRIAC, CA;
STEINER, THOMAS WALTER, CA
(73) Propriétaire/Owner:
ETALIM INC., CA
(74) Agent: SMART & BIGGAR LLP

(54) Titre : APPAREIL DE REALISATION D'UNE TRANSFORMATION D'ENERGIE ENTRE UNE ENERGIE THERMIQUE ET UNE ENERGIE ACOUSTIQUE
(54) Title: APPARATUS FOR PERFORMING ENERGY TRANSFORMATION BETWEEN THERMAL ENERGY AND ACOUSTIC ENERGY

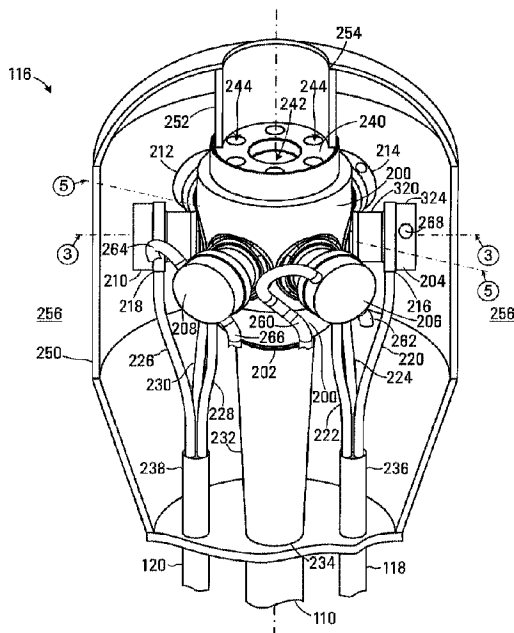

(57) Abrégé/Abstract:

An apparatus for performing energy transformation between thermal energy and acoustic energy is in a thermoacoustic transducer apparatus is disclosed. The acoustic energy is associated with a periodic flow of a working fluid within an acoustic power loop of the thermoacoustic transducer. The apparatus includes a common central plenum having a first fluid port for providing fluid communication with the acoustic power loop, and a plurality of discrete cylindrical thermal converters radially arranged about the plenum, each thermal converter including a regenerator. The apparatus also includes a second fluid port for providing fluid communication between the thermal converter and the acoustic power loop, and fluid flow passages in fluid communication with the plenum and extending through the regenerator to the second fluid port.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
31 May 2018 (31.05.2018)



(10) International Publication Number
WO 2018/094500 A1

(51) International Patent Classification:

F02G 1/043 (2006.01) *F02G 1/053* (2006.01)
F01K 27/00 (2006.01)

(21) International Application Number:

PCT/CA2017/000232

(22) International Filing Date:

20 October 2017 (20.10.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/426,418 25 November 2016 (25.11.2016) US

(71) Applicant: **ETALIM INC.** [CA/CA]; Suite 400 - 62 West 8th Avenue, Vancouver, British Columbia V5Y 1M7 (CA).

(72) Inventors: **MEDARD DE CHARDON, Briac**; 1042 East 11th Avenue, Vancouver, British Columbia V5T 2G2 (CA).
STEINER, Thomas Walter; 3718 Triumph Street, Burnaby, British Columbia V5C 1Y4 (CA).

(74) Agent: **CRAMER, Owen W.** et al.; Smart & Biggar, 1055 West Georgia Street Suite 2300, Box 11115 Royal Centre, Vancouver, BC V6E 3P3 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

(54) Title: APPARATUS FOR PERFORMING ENERGY TRANSFORMATION BETWEEN THERMAL ENERGY AND ACOUSTIC ENERGY

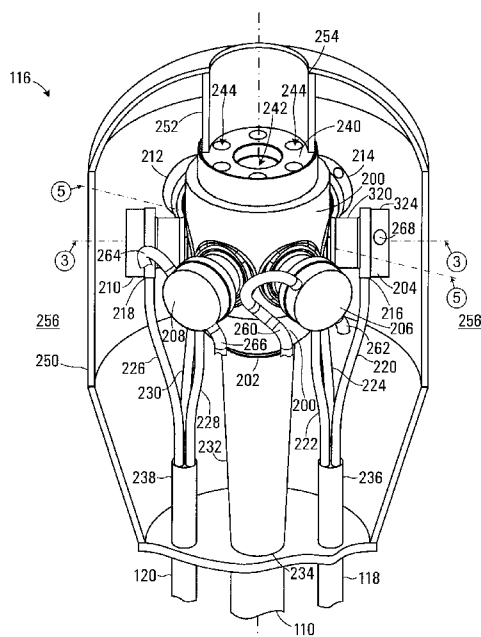


FIG. 2

(57) Abstract: An apparatus for performing energy transformation between thermal energy and acoustic energy is in a thermoacoustic transducer apparatus is disclosed. The acoustic energy is associated with a periodic flow of a working fluid within an acoustic power loop of the thermoacoustic transducer. The apparatus includes a common central plenum having a first fluid port for providing fluid communication with the acoustic power loop, and a plurality of discrete cylindrical thermal converters radially arranged about the plenum, each thermal converter including a regenerator. The apparatus also includes a second fluid port for providing fluid communication between the thermal converter and the acoustic power loop, and fluid flow passages in fluid communication with the plenum and extending through the regenerator to the second fluid port.

WO 2018/094500 A1

Published:

— *with international search report (Art. 21(3))*

APPARATUS FOR PERFORMING ENERGY TRANSFORMATION BETWEEN THERMAL ENERGY AND ACOUSTIC ENERGY

BACKGROUND

1. Field

This disclosure relates generally to a thermoacoustic transducer, and more particularly to a thermal apparatus for performing energy transformation between thermal energy and acoustic energy.

2. Description of Related Art

Thermoacoustic transducers may be configured to convert between mechanical energy and thermal energy. In operation as a heat engine, higher temperature thermal energy is received and lower temperature thermal energy rejected while the transducer converts a portion of the thermal energy into mechanical energy, which may be used to drive an electrical generator, for example. Alternatively a thermoacoustic transducer may be configured to operate as a heat pump where mechanical energy is received and the transducer converts the mechanical energy into a thermal energy transfer from lower temperature to higher temperature.

Thermoacoustic transducers generally include a thermal module that performs energy transformation between thermal energy and acoustic energy. When configured as a heat engine, increases in efficiency may be achieved by increasing a temperature differential between a hot side and a cold side of the transducer. The thermal module is subjected to this temperature differential, which may be several hundred degrees Celsius and will cause significant material stresses within the module. There is also a need to minimize losses within the thermal module to increase the overall efficiency of the thermoacoustic transducer.

SUMMARY

In accordance with one disclosed aspect there is provided an apparatus for performing energy transformation between thermal energy and acoustic energy, the acoustic energy being associated with a periodic flow of a working fluid within an acoustic power loop of a thermoacoustic transducer. The apparatus includes an enclosure defining a common central plenum, the central plenum having a first fluid port for providing fluid communication with the acoustic power loop, and a plurality of discrete cylindrical thermal converters radially positioned on the enclosure and about the central plenum, each thermal converter including a regenerator. The apparatus also includes a second fluid port for providing fluid communication between

each of the thermal converters and the acoustic power loop, and fluid flow passages in fluid communication with the central plenum and extending through the regenerator to the second fluid port.

5 The apparatus may include a thermally conductive core disposed within the central plenum and thermally coupled to each of the plurality of thermal converters for transferring heat between the thermally conductive core and the thermal converters.

10 Each thermal converter may include a first heat exchanger having a thermally conductive body defining a portion of the fluid flow passages extending between the central plenum and the regenerator, the thermally conductive body being thermally coupled to the thermally conductive core and being operable to transfer thermal energy between the working fluid and the thermally conductive body.

15 The thermally conductive core may be operably configured to transfer thermal energy between an external environment and the working fluid flowing through the fluid passages within the thermally conductive body of the first heat exchanger.

20 Each of the thermal converters may include a second heat exchanger having a thermally conductive body defining a portion of the fluid flow passages extending between the regenerator and the second fluid port, the thermally conductive body being operably configured to transfer thermal energy between the working fluid and the thermally conductive body.

The thermally conductive body may be thermally coupled to transfer heat between the thermally conductive body and one of a heat transfer fluid and a heat pipe.

25 The thermally conductive core may include a centrally located conduit for receiving a heat source or heat sink.

30 The centrally located conduit may be oriented either aligned with a cylindrical axis associated with the central plenum, or transverse to a cylindrical axis associated with the central plenum.

The centrally located conduit may terminate in a plurality of return conduits extending back through the thermally conductive core adjacent to the centrally located conduit and the return conduits may be

configured to transfer heat between the heat source or the heat sink and the thermally conductive core.

5 The thermally conductive core may include a copper material and may further include an insert defining the centrally located conduit and the plurality of return conduits, the insert including a corrosion resistant material having sufficient strength at an operating temperature to withstand a pressure difference between the working fluid and an ambient pressure.

10 The acoustic power loop may include a thermal buffer in fluid communication with the first fluid port, the thermal buffer being shaped to reduce convective heat transfer from the working fluid due to circulating gas flows within the thermal buffer.

15 The apparatus may include a housing extending from an end of the thermal buffer distal to the first fluid port and enclosing the central plenum and the plurality of thermal converters, the housing being operable to hold a charge of insulating gas at a pressure substantially equivalent to a pressure of the working fluid, the insulating gas being operable to reduce parasitic heat transfer between the working fluid and a surrounding environment.

20 The apparatus may include a thermally conductive core disposed within the central plenum and thermally coupled to each of the plurality of thermal converters for transferring heat between the thermally conductive core and the thermal converters, the thermally conductive core having a centrally located conduit for receiving a heat source or heat sink and the housing may include a standoff sleeve providing access to the centrally located conduit from outside the housing for exchanging thermal energy between the heat source or heat sink and the thermally conductive core.

25 The acoustic power loop may include a plurality of compliant tubes each compliant tube being connected to one of the second fluid ports of the plurality of thermal converters, the compliant tubes being operable to deflect under thermally induced strains caused by a temperature differential across the thermal converter during operation.

30 The plurality of thermal converters may be radially arranged about the central plenum in a plurality of adjacent rows, the first row being disposed proximate the first fluid port and each successive row being spaced further from the first fluid port.

The central plenum may include one of a generally spherically shaped central plenum and each of the plurality of thermal converters may be oriented in a substantially radial direction with respect to a center of the spherically shaped central plenum or a generally cylindrically shaped plenum and each of the plurality of thermal converters may be oriented in a substantially radial direction with respect to a center of the cylindrically shaped central plenum.

The thermal converters in successive rows may be configured to operate at a different working fluid temperatures than the thermal converters in the first row.

The regenerators of the thermal converters in successive rows may have at least one of a differing length in the radial direction and a different cross-sectional area than the respective regenerators of the thermal converters in the first row.

The central plenum may have a tapered cross-sectional flow area such that a flow area of the central plenum proximate the first row differs from a flow area of the central plenum proximate subsequent rows.

Each regenerator of the plurality of thermal converters may include a sleeve enclosing the regenerator, and the number of thermal converters in the plurality of thermal converters may be selected to provide a combined regenerator area that reduces fluid flow losses within the regenerator while reducing thermal stresses experienced by the sleeve due to a thermal gradient established across the regenerator during operation.

A thermoacoustic transducer apparatus may include the apparatus above and may include a mechanical converter operable to provide power conversion between acoustic power and mechanical power, the mechanical converter including at least one diaphragm defining a first chamber and a second chamber within the mechanical converter, and the acoustic power loop may include a first transmission duct extending between the first fluid port and the first chamber and a second transmission duct extending between the second fluid ports of the plurality of discrete thermal converters and the second chamber.

The second transmission duct may include a plurality of ducts extending from the respective second fluid

ports and merging into one or more transmission ducts in fluid communication with the second chamber.

5 The plurality of ducts may include one of a compliant bellows section and an o-ring sealed section that facilitates accommodation of thermally induced strains caused by a temperature differential across the thermal converter during operation.

10 The acoustic power loop may include a thermal buffer in fluid communication with the first fluid port, the thermal buffer being shaped to reduce convective heat transfer from the working fluid due to circulating gas flows within the thermal buffer and may further include a housing extending from an end of the thermal buffer distal to the first fluid port and enclosing the central plenum and the plurality of thermal converters, the housing being operable to hold a charge of insulating gas at a pressure substantially equivalent to a pressure of the working fluid, the insulating gas being operable to reduce parasitic heat transfer between the working fluid and a surrounding environment.

15 The housing may include one of a bellows seal and a sliding compliant seal between the housing and the respective distal ends of the thermal buffer and the second transmission duct.

20 Other aspects and features will become apparent to those ordinarily skilled in the art upon review of the following description of specific disclosed embodiments in conjunction with the accompanying figures.

BRIEF DESCRIPTION OF THE DRAWINGS

In drawings which illustrate disclosed embodiments,

Figure 1 is a schematic diagram of a thermoacoustic transducer apparatus;

Figure 2 is a perspective cut-away view of a thermal apparatus of the thermoacoustic transducer apparatus shown in Figure 1;

Figure 3 is a first cross-sectional view of a portion of the thermal apparatus shown in Figure 2;

Figure 4 is a partially cut away perspective view of a portion of a thermal converter of the thermal apparatus taken along the line 3 – 3 in Figure 2;

Figure 5 is a second cross-sectional view of a portion of the thermal apparatus taken along the line 5 – 5 in Figure 2;

Figure 6 is a further cross-sectional view of a portion of the thermal apparatus shown in Figure 2 taken along the line 6 – 6 in Figure 5;

Figure 7 is another cross-sectional view of a portion of the thermal apparatus shown in Figure 2 taken along the line 7 – 7 in Figure 5;

Figure 8 is an elevational view of an alternative disclosed embodiment of a thermal apparatus;

Figure 9 is a plan view of an another disclosed embodiment of a thermal apparatus;

Figure 10 is an elevational view of the embodiment of the thermal apparatus shown in Figure 8; and

Figure 11 is a cross-sectional view of another disclosed embodiment of a thermal apparatus.

DETAILED DESCRIPTION

Referring to Figure 1, a thermoacoustic transducer apparatus according to a first embodiment of the invention is shown schematically at **100**. The thermoacoustic transducer **100** includes a mechanical converter **102** operable to provide power conversion between acoustic power and mechanical power. The mechanical converter **102** includes a diaphragm **104** defining a first chamber **106** and a second chamber **108** within the mechanical converter. The thermoacoustic transducer **100** also includes a first transmission duct **110** in fluid communication with the first chamber **106** and a second transmission duct **112** in fluid communication with the second chamber **108**. In the embodiment shown the second transmission duct **112** includes two separate transmission duct portions **118** and **120**, but in other embodiments the second transmission duct **112** may be implemented using a single transmission duct or using more than two transmission ducts.

The first transmission duct **110**, mechanical converter **102**, and second transmission duct **112** form an acoustic power loop **114** having a working volume for containing a working gas operable to facilitate acoustic power flow between the second chamber and the first chamber. In one embodiment the working gas in the working volume comprises helium at a static pressure p_m of about **120** bar. Further details of the acoustic power loop are disclosed in commonly owned PCT Patent application PCT/CA2013/000794 published as WO **2014/043790** and entitled "Thermoacoustic Transducer Apparatus Including a Transmission Duct".

The thermoacoustic transducer **100** also includes a thermal apparatus **116** for performing energy transformation between thermal energy and acoustic energy, the acoustic energy being associated with a periodic flow of a working fluid within the acoustic power loop **114**. The thermal apparatus **116** is in thermal communication with an external thermal source **122** and external thermal sink **124** for transferring thermal energy into or out of the apparatus.

During operation of the apparatus **100** as an engine, the diaphragm **104** undergoes resilient displacement to cause pressure oscillations within the acoustic power loop **114**, and the working gas pressure within the working volume will thus swing between $p_m \pm |p|$, where $|p|$ is a differential pressure swing amplitude. When the diaphragm **104** is displaced so as to cyclically reduce and expand a volume of the second chamber **108**, the resulting compression and rarefaction in the working gas produces acoustic power which propagates through the second transmission duct **112** to the thermal apparatus **116**. The thermal

apparatus **116** operates to convert thermal energy Q_{in} provided by the external thermal source **122** into acoustic energy, thereby amplifying the acoustic power traveling through the thermal apparatus **116**. The amplified acoustic power leaving the thermal apparatus **116** propagates along the first transmission duct **110** back to the mechanical converter **102**, where it is received in the first chamber **106**. Pressure oscillations due to the amplified acoustic power in the first chamber **106** are operable to cyclically displace the diaphragm **104**, thereby transferring acoustic power back to the second chamber **108**. The diaphragm **104** may be coupled to transmit mechanical power to an external system (not shown in Figure 1). The amplification of acoustic power in the thermal apparatus **116** thus provides sufficient power for sustaining periodic movement of the diaphragm **104**, while also providing useful mechanical output power. The process described above operates at a natural frequency associated with the apparatus **100**.

Alternatively for operation of the apparatus **100** as a heat pump, an externally provided mechanical power is transmitted to the diaphragm **104** to cause the cyclic displacement of the diaphragm **104**. For acoustic power flowing from second chamber **108** to first chamber **106**, the thermal apparatus **116** is configured to receive acoustic energy generated within the apparatus **100** and to convert the acoustic energy into a transfer of thermal energy from the external thermal source **122** to the external thermal sink **124** at higher temperature than the temperature of the external thermal source. Alternatively for acoustic power flow in the reverse direction, the functions of the external thermal source and external thermal sink are interchanged.

The thermal apparatus **116** is shown in greater detail in Figure 2. Referring to Figure 2, the thermal apparatus **116** includes an enclosure **200** defining a common central plenum (not visible in Figure 2) having a first fluid port **202** for providing fluid communication with the acoustic power loop **114**. In this embodiment, the acoustic power loop **114** includes a thermal buffer **232** in fluid communication between the first fluid port **202** and the first transmission duct **110**. The thermal buffer **232** has a tapered shape, which is selected to reduce convective heat transfer from the working fluid due to circulating gas flows within the thermal buffer.

The thermal apparatus **116** also includes a plurality of discrete cylindrical thermal converters **204**, **206**, **208**, **210**, **212**, and **214** radially arranged about the plenum on the enclosure **200**. Each thermal converter **204** – **214** includes a sleeve and a cap, of which the sleeve **320** and cap **324** of the first thermal converter **204** are indicated in Figure 2. In this embodiment the thermal apparatus **116** is implemented using six discrete

cylindrical thermal converters **204 – 214**, but in other embodiments a greater or fewer number of thermal converters may be used. Each of the thermal converters **204 – 214** includes a second fluid port, of which second fluid ports **216** and **218** of the thermal converters **204** and **210** are visible in Figure 2.

5 In this embodiment, the second fluid port **216** is coupled to a compliant tube **220** and the second fluid port **218** to a compliant tube **226**. The second fluid ports of the thermal converters **206, 208, 212, and 214** are similarly connected to respective compliant tubes **222, 228, 230, and 224**. The plurality of compliant tubes **220, 222, and 224** merge into a duct **236** in fluid communication with the second chamber **108** (shown in Figure 1) via the portion **118** of the second transmission duct **112**. Similarly, the plurality of compliant tubes **226, 228, and 230** merge into a duct **238** in fluid communication with the second chamber **108** via the portion **120** of the second transmission duct **112**. In this embodiment, the second transmission duct **112** thus includes the plurality of compliant tubes **220 – 230** extending from the respective second fluid ports of the thermal converters **204 – 214**, the ducts **236** and **238** into which the plurality of ducts merge, and the two separate transmission duct portions **118** and **120**. The plurality of compliant tubes **220 – 230** are able to deflect under thermally induced strains caused by a temperature differential across the thermal converter during operation, which may be several hundred degrees Celsius.

Each thermal converter **204 – 214** further includes a pair of compliant tubes for circulating a heat transfer fluid to the respective thermal converters. Portions of the compliant tubes are shown in Figure 2 to avoid obscuring other details of the thermal apparatus **116**. Compliant tubes **260** and **262** are associated with the thermal converter **206** and compliant tubes **264** and **266** are associated with the thermal converter **208**. The thermal converter **204** receives heat transfer fluid at an inlet **268** from a respective compliant tube (not shown). The remaining thermal converters **210, 212, and 214** each have a respective pair of compliant tubes for circulating heat exchange fluid through the thermal converters to the external thermal sink **124** (shown in Figure 1). The compliant tubes are operable to deliver the heat transfer fluid to the thermal converters as described in more detail later herein. In one embodiment the heat transfer fluid may be a liquid coolant such as water. Like the compliant tubes **222 – 230**, the compliant tubes **260 – 264** are able to deflect under thermally induced strains caused by the operating temperature differential. In other embodiments the thermal converters may be thermally coupled to the external thermal sink **124** via heat pipes.

-10-

The thermal apparatus **116** further includes an insert **240** disposed within the enclosure **200** defining a centrally located conduit **242** for receiving a heat source or heat sink (not shown) and return conduits **244**. The insert **240** is described in more detail later herein.

5 In the embodiment shown the thermal apparatus **116** includes a housing **250**, which is shown partially cut away in Figure 2. In other embodiments the housing **250** may be omitted. The optional housing **250** extends from an end **234** of the thermal buffer **232** distal to the first fluid port **202** and encloses the enclosure **200** and the plurality of thermal converters **204 – 214** while providing access to the centrally located conduit **242** of the insert **240** for inserting the heat source or heat sink. In the embodiment shown,
10 the thermal apparatus **116** includes a standoff sleeve **252** that extends upwardly from the insert **240** and couples to the housing **250** at a junction **254**. The junction **254** provides a seal between the housing **250** and the standoff sleeve **252**. The end **234** of the thermal buffer **232** and the transmission duct portions **118** and **120** and are also sealed at the point where these ducts pass through the housing **250** such that the housing is operable to hold a volume of insulating gas at a pressure substantially equivalent to a pressure of
15 the working fluid. The insulating gas within the housing **250** is operable to reduce parasitic heat transfer between non-ambient temperature portions of the thermal apparatus **116** and a surrounding environment **256** primarily by reducing a required wall thickness of the sleeves **320** of the thermal converters **204 – 214**. The charge of insulating gas reduces the pressure difference between the working volume and the interior of the housing **250**. This also has the effect of reducing the required wall thicknesses of the plurality of
20 compliant tubes **220 – 230**. If these tubes were required to withstand the full pressure differential between the working fluid and an ambient pressure of the surrounding environment **256**, the tubes would need to have a substantially thicker wall thickness and hence also be significantly longer to provide sufficient compliance to accommodate thermally induced strains.

25 In one embodiment the insulating gas may be the same gas as the working gas, having the advantage that a perfect seal would not be required between insulating gas and the working gas. A small leak may be provided between the housing **250** and a portion of the working volume of the acoustic power loop **114** enclosed within the housing to prevent a static pressure difference being established between the insulating gas and the working gas. The provided leak may be sufficiently small to reduce any unwanted
30 dissipation of acoustic power.

In other embodiments, where the working gas is a gas such as helium or hydrogen, the relatively high

thermal conductivity of these gasses makes them less suitable as insulating gases. In some embodiments the insulating gas may be chosen to be a heavier, less thermally conductive gas, such as argon. In this case complete sealing would be required between the interior volume of the housing **250** and the working volume and these volumes would need to be tailored such that near equal pressure rise occurs in each volume as the apparatus is heated.

The housing **250** holding a volume of pressurized insulating gas facilitates the accommodation of thermal strains due to the temperature difference in the thermal converters. For example the compliant tubes **220** – **230** and thermal buffer **232** may include a bellows section for accommodating strains. Since the insulating gas and working gas would be at substantially similar pressures, the bellows would only have to withstand a smaller pressure differential due to operating pressure swings within the working gas. In other embodiments where the same gas is used for both the insulating gas and working gas, sliding o-ring seals may be provided at the end **234** of the thermal buffer **232** and other interfaces, such as where the transmission duct portions **118** and **120** pass through the housing **250**.

In embodiments that do not implement the housing **250**, the insulating gas would be ambient air. In such cases the regenerator sleeves **320** and inner enclosure **200** would be implemented as a pressure vessel, having sufficiently thick walls to withstand the difference between the static pressure of the working gas and the ambient pressure. This results in an increase in thermal stresses and wall thermal conduction, but has the advantage of substantially reduced pressurized volume and overall mass of the thermoacoustic transducer **100**. The compliant tubes **220** – **230** and thermal buffer **232** would also need to have substantially thicker walls. However the standoff sleeve **252** would not have to withstand a pressure differential and could thus have a reduced wall thickness. The compliant tubes **220** – **230** would need to be longer to provide sufficient compliance to accommodate thermal strains. With ambient pressure air as an insulating gas, gas convection suppression is simplified due to the lower density of the insulating gas.

The enclosure **200**, insert **240**, and plurality of discrete cylindrical thermal converters **204** – **214** are shown in cross sectional view in Figure 3. The cross section in Figure 3 is taken along the line 3 – 3 in Figure 2. Referring to Figure 3, a thermally conductive core **300** is disposed within the enclosure **200** and defines the central plenum **302** between the enclosure and the core. The thermal converter **204** includes a regenerator **304** having fluid flow passages **306** in fluid communication with the plenum **302** and extending through the regenerator to the second fluid port **216**. Similarly, the thermal converter **210** and the remaining thermal

converters **206, 208, 212, and 214** each include a regenerator having fluid flow passages in fluid communication with the plenum **302** and extending through the regenerator to the respective second fluid ports. The second fluid ports (**216, 218** etc.) provide fluid communication between the thermal converters **204 – 214** and the acoustic power loop **114** (shown in Figure **1**) via the respective compliant tubes **220 – 230, 236, 238**, and the transmission duct portions **118** and **120**.

In the embodiment shown each thermal converter **204 – 214** includes a first heat exchanger **308** having a thermally conductive body defining a portion of the fluid flow passages extending between the plenum **302** and the regenerator **304**. The body of the first heat exchanger **308** is thermally coupled to the thermally conductive core **300** and operable to transfer thermal energy between the working fluid flowing through the fluid passages and the body. The fluid flow into the first heat exchanger **308** is in a direction generally aligned with a cylindrical axis **310** of the enclosure **200** defining the plenum **302**. The first heat exchanger **308** causes the fluid flow to change direction generally aligned with the cylindrical axis **310** to a direction generally aligned with a radial axis **312** of the thermal converter **204**. The body of the first heat exchanger **308** is further operable to conduct heat between the first heat exchanger and the thermally conductive core **300** in a heat flow direction (indicated by arrows **314**) generally aligned with the radial axis **312**.

In the embodiment shown each thermal converter **204 – 214** also includes a second heat exchanger **316** having a thermally conductive body defining a portion of the fluid flow passages extending between the regenerator **306** and the second fluid port **216**. The second heat exchanger **316** is enclosed within the cap **324**. The body of the second heat exchanger **316** is operably configured to transfer thermal energy between the working fluid flowing through the fluid passages in a heat flow direction (indicated by arrows **318**) that is generally aligned with radial axis **312**. The heat transfer fluid flows into the inlet **268** (shown in Figure **2**) and through a finned portion **270** of the second heat exchanger **316** for exchanging heat with the external thermal sink **124** via the heat transfer fluid.

In one embodiment the first heat exchanger **308** and second heat exchanger **316** may be implemented using a heat exchange apparatus configured as disclosed in commonly owned US Provisional Patent Application No. **62/281548** by Steiner et al. filed on January **21, 2016** and entitled “APPARATUS AND SYSTEM FOR EXCHANGING HEAT WITH A FLUID”. A thermal converter configured generally in accordance with the disclosure in the above-referenced US Provisional Patent Application is shown in partially cut away perspective view in Figure **4**. Referring to

-13-

Figure 4, the first heat exchanger 308 includes a manifold 400 and a heat exchange material 402. The manifold 400 has an interface surface 404 in thermal contact with the heat exchange material 402. The heat exchange material 402 is shown partially cut away to reveal the surface 404. The manifold 400 includes a thermally conductive body 406 operable to conduct heat between the surface 404 and a distally located heat transmitting surface 408 in a heat flow direction generally aligned with the radial axis 312 (i.e. as indicated by arrows 314 in Figure 3). The manifold 400 includes a plurality of feed passages 410 extending through the thermally conductive body 406 in a generally transverse direction with respect to radial axis 312. The feed passages 410 are in communication with the central plenum 302 (shown in Figure 3) for receiving or discharging fluid. The manifold 400 also includes a plurality of distribution passages 412, each having an end in fluid communication with at least one of the feed passages 410 and having respective openings 414 distributed over the surface 404.

The heat exchange material 402 may be fabricated from a permeable material having high thermal conductivity. In one embodiment the heat exchanger material may include a plurality of copper or carbon fibers that are oriented in a direction generally aligned with the radial axis 312.

In operation the distribution passages 412 in the manifold 400 are configured to cause the change in fluid flow direction between the transversely directed flow in the feed passages 410 and the radially directed flow at the openings 414 of the distribution passages and through the heat exchange material 402. The fibers of the heat exchange material 402 provide a large heat exchange surface area and small fluid passages within the heat exchange material. The heat flow 314 in the first heat exchanger 308 is via the shorter (i.e. radial) dimension taking advantage of the larger cross-sectional area and short distance through the manifold 400 to minimize a temperature drop due to the heat flux and a finite thermal conductivity of the materials.

The second heat exchanger 316 has a generally similar configuration to the first heat exchanger 308, having a manifold 418 and heat exchange material 420, but includes an additional heat transfer layer 428 having a fluid inlet 430 and a fluid outlet 432. The manifold 418 includes a plurality of feed passages 424 and a plurality of distribution passages 426 in fluid communication with the heat exchange material 420. The fluid inlet 430 is in fluid communicating with the inlet 268 in the cap 324 for receiving the flow of heat transfer fluid from the respective compliant tube. The heat transfer fluid thus flows into the fluid inlet 430, through the additional heat transfer layer 428, and is discharged through the outlet 432 and back through a

respective compliant tube to the external heat source or sink.

The regenerator **304** (shown partially cut away in Figure **4**) is enclosed within the sleeve **320** that provides a sealed fluid flow passage between the first and second heat exchangers **308** and **316**. As best shown in Figure **3**, a perimeter of the sleeve **320** is coupled to the enclosure **200** at **322** and is coupled to the cap **324** at **326**. In one embodiment the sleeve is welded to the cap **324** at **326**. In operation, fluid flowing through the first heat exchanger **308** may be at a temperature of about **700 °C**, while fluid flowing through the second heat exchanger **316** may be at about **50 °C**. The sleeve **320** has a relatively thin wall thickness to reduce heat flow along the wall between the first heat exchanger **308** and the second heat exchanger **316**, and bears the stresses associated with the large temperature gradient to which it is subjected. In one embodiment, the sleeve **320** may be fabricated from Inconel or stainless steel or other materials that retains strength over a wide temperature range and have relatively low thermal conductivity.

When operated as an engine the regenerator **304** converts thermal energy Q_m provided from the external thermal source **122** into acoustic energy, thereby amplifying the acoustic power traveling through the regenerator **304**. The fluid flow through the regenerator **304** is predominantly aligned with the radial axis **312**. The number of thermal converters in the plurality is selected to provide a combined regenerator area for the thermal converters **204 – 214** that reduces fluid flow losses within the fluid flow passages **306** of the respective regenerators while reducing thermal stresses experienced by the sleeve **320** due to the large thermal gradient. Fluid flow loss considerations dictate that the area of the regenerator should be relatively large, while a length along the radial axis **312** should be as small as is compatible with other constraints. Having a plurality of regenerators in discrete cylindrical thermal converters **204 – 214** distributes the overall regenerator area among the plurality of thermal converters such that each individual regenerator has an aspect ratio of in the region of about 1:1 (i.e. a ratio of diameter to radial length). A plurality of regenerators with this aspect ratio effectively reduces fluid flow losses through the regenerator **304** without excessive thermal stresses. The stresses experienced by the sleeve **320** under the operating thermal gradient increase with diameter and having multiple sleeves of reduced diameter reduces the stress experienced by each sleeve. The number of thermal converters **204 – 214** thus represents a trade-off between at least the above factors and in some embodiments there may be more or less thermal converters in the plurality depending on operating requirements. Embodiments that facilitate a further increase in the number of discrete thermal converters are described later herein.

-15-

The thermally conductive core **300** is operably configured to transfer thermal energy between the external environment (i.e. the external thermal source **122**) and the working fluid flowing through the fluid passages within the body of the first heat exchanger **308**. In Figure **5** the thermally conductive core **300** and the insert **240** are shown in a further cross-sectional view taken along the line **5 – 5** in Figure **2**. Referring to Figure **5**, the centrally located conduit **242** receives the external thermal source **122**, which in one embodiment may comprise a burner fueled by a combustible fluid that produces a flame within the conduit **242**. In other embodiments, the thermal source may be remotely located with respect to the conduit **242** and may include a heat pipe or a heat transfer fluid for transporting heat to the central conduit.

The thermally conductive core **300** may be fabricated from a high thermal conductivity material such as copper, which is susceptible to corrosion due to combustion products associated with the flame. In this embodiment, the insert **240** protects the thermally conductive core **300** by covering the centrally located conduit **242** and the return conduits **244** in a corrosion resistant material. In one embodiment the corrosion resistant material may be Inconel, which has sufficient strength at an operating temperature of the thermoacoustic transducer **100** to withstand a pressure difference between the working fluid and an ambient pressure. Inconel also has excellent oxidization resistance at elevated temperature, which protects surfaces from corrosion.

The centrally located conduit **242** has an opening **500** for receiving the external thermal source **122** and terminates in a plurality of return conduits **244** (shown individually as return conduits **502**, **504**, **506**, **508**, **510**, and **512** in Figure **5**) that extend back through the insert **240** adjacent to the centrally located conduit and have respective openings proximate the centrally located conduit opening **500**. In the cross-sectional view of Figure **5**, only a portion of return conduits **504** and **506** are shown at the terminating end of the centrally located conduit **242**. The return conduits **502** and **508** are shown in full cross-sectional detail along with their respective openings **514** and **516**. A further cross sectional view is shown in Figure **6** taken along the line **6 – 6** in Figure **5** showing an additional pair of return conduits on the back of the insert **240** at **510** and **512** and another pair at the front at **504** and **506**. The return conduits **510** and **512** are obscured in the cross-section of Figure **5**.

The plurality of return conduits **502 – 512** are located within the core **300** for transfer of heat between the heat source or heat sink in the centrally located conduit **242** and the core. In one embodiment with operation of the thermoacoustic transducer **100** as an engine, a burner or a burner flame is received within

-16-

the centrally located conduit **242** and produces a heat flux that impinges on a terminal end surface **518** of the conduit. The terminal end surface **518** redirects the hot exhaust products into the plurality of return conduits **502 – 512**. In one embodiment the return conduits **502 – 512**, which are located adjacent to the thermally conductive core **300**, include fins in order to control the heat flux along the length of the return conduits. The thermally conductive core **300** in turn is thermally coupled to each of the plurality of thermal converters **204 – 214** for transferring heat between the thermally conductive core **300** and the thermal converters.

Referring to Figure **7**, a further cross sectional view is shown taken along the line **7 – 7** in Figure **5**. In this embodiment the return conduits **502, 504, 506, 508, 510, and 512** each include fins **520** inserted along at least a portion of their length for enhancing heat transfer between the external thermal source **122** to the insert **240** and to the thermally conductive core **300**. In one embodiment the thermally conductive core **300** may be a copper material that encloses the insert **240** to provide a good thermal contact with the insert material.

When a burner provides the external thermal source **122**, hot exhaust gases are discharged from the openings **514** and **516** of the respective return conduits **502 – 512**. As best shown in Figure **2**, the disposition of the centrally located conduit **242** and the openings in the return conduits **244** conveniently facilitate coupling of heat from the external thermal source **122** and also discharge of exhaust products via a single opening in the housing **250** provided by the standoff sleeve **252**. The disposition of openings in the return conduits **244** also facilitates the inclusion of a recuperator (not shown) partially or entirely within the standoff sleeve, where the discharged hot exhaust gasses preheat the combustible fluid and combustion air used to fuel the burner.

The thermal apparatus **116** shown in Figures **2 – 6** has a generally cylindrically shaped plenum **302** the plurality of thermal converters **204 – 214** are oriented in a substantially radial direction with respect to a center of the cylindrically shaped plenum (i.e. radially oriented with respect to the cylindrical axis **310** shown in Figure **3**).

Referring to Figure **8**, an alternative disclosed embodiment of the thermal apparatus is shown generally at **700**. The thermal apparatus **700** includes an enclosure **702** having a first fluid port **704** and an opening **706** to a centrally located conduit (not shown) for receiving heat from an external thermal source or rejecting

-17-

heat to an external thermal sink **708**. The thermal apparatus **700** also includes a thermally conductive core **710** shown in partially cut-away view in Figure 8. A plenum **712** is defined between the core and a wall **714** of the enclosure **702**. In this embodiment a plurality of thermal converters **716** are radially arranged about the plenum **712** in a plurality of adjacent rows and are in fluid communication with the plenum. A first row **718** of thermal converters **716** are disposed proximate the first fluid port **704** and a second row **720** of thermal converters is spaced further along the enclosure **702** from the first fluid port. In other embodiments, additional rows of thermal converters **716** may be successively spaced further along the enclosure **702** from the first fluid port **704**. The multiple rows of thermal converters **716** provide a greater overall regenerator area, which may be required for some thermal apparatus embodiments.

In the embodiment shown, a regenerator portion **722** of the thermal converters in the second row **720** has a different length (L_2) in a radial direction than the length L_1 of the regenerator portion **724** of the thermal converters in the first row **718**. In this embodiment the length L_1 of the regenerator portion **724** is longer than the length L_2 of the regenerator portion **722**. The thermal converters **716** in the second row **720** are thus configured to operate at a different working fluid temperatures than the thermal converter in the first row. To permit heat transfer at different temperatures between the thermally conductive core **710** and the thermal converters in the respective first and second rows **718** and **720**, the thermally conductive core is divided into two portions **728** and **730** by a thermal insulating material **732**. The thermal core portions **728** and **730** are thus capable of operating at differing temperatures.

Generally, if the temperature in given row is higher, the row would be configured with a longer regenerator portion to prevent an excessive temperature gradient across the regenerator. Regenerator length thus represents a tradeoff between flow friction, heat exchange effectiveness, and thermal stresses as the temperature gradient across the regenerator increases. In other embodiments the regenerators **722** and **724** in the respective rows may have substantially the same length in the radial direction.

In this embodiment, the plenum **712** also has a tapered cross-sectional flow area. A flow area of the plenum **712** proximate the first row **718** differs from a flow area of the plenum proximate the second row **720**. The greater cross-sectional area proximate the first fluid port **704** serves both rows **718** and **720** of thermal converters **716**, while the cross sectional area of a plenum portion **726** between the first row **718** and the second row **720** has a tapering cross-sectional area, since this plenum portion only serves the second row **720** of thermal converters **716**. The tapered plenum results in increased fluid velocity with

-18-

reducing cross-sectional area to match the Bernoulli pressures, which could otherwise drive a streaming flow between rows **718** and **720**.

In Figure **8**, the plurality of thermal converters **716** are disposed such that thermal converters in the first and second rows **718** and **720** are disposed vertically above each other. In other embodiments the rows **718** and **720** may be radially staggered to offset thermal converters in adjacent rows.

Referring to Figure **9** and Figure **10**, an alternative embodiment of a thermal apparatus is shown generally at **800**. The thermal apparatus **800** includes an enclosure **802** having a first fluid port **804**. The thermal apparatus **800** also includes a thermally conductive core **806** shown in cut-away view in Figure **10**. A tapered plenum **808** is defined between the core **806** and a wall **810** of the enclosure **802**. In this embodiment, a plurality of thermal converters **812** are radially arranged about the plenum **808** in adjacent rows **814** and **816** and are in fluid communication with the plenum. The first row **814** is disposed proximate the first fluid port **804** and the second row **816** is spaced further along the enclosure **802** from the first fluid port. A conduit **820** runs transversely through the enclosure **802** with respect to a cylindrical axis **824** of the enclosure **802** and plenum **808**. The conduit **820** channels a heat transfer fluid **822** through the conduit **820**, which transfers heat with the thermally conductive core **806**.

Referring to Figure **11**, another embodiment of a thermal apparatus is shown in cross sectional view generally at **1000**. The thermal apparatus **1000** includes an enclosure **1002** having a first fluid port **1004**. The thermal apparatus **1000** also includes a thermally conductive core **1006**. A generally spherically shaped plenum **1008** is defined between the core **1006** and a wall **1010** of the enclosure **1002**. In this embodiment, a plurality of thermal converters **1012** are radially arranged about the plenum **1008** in three adjacent rows **1014**, **1016**, and **1018** and are all in fluid communication with the plenum. Each thermal converter **1012** is oriented in a substantially radial direction indicated by the line **1024** with respect to a center **1026** of the spherically shaped plenum **1008**. A centrally located conduit **1020** receives thermal energy from external thermal source **122** and terminates in a plurality of return conduits **1022**, as described in connection with the Figure **2** embodiment above. The spherically shaped plenum **1008** may be beneficial when the external housing **250** is omitted, since wall thicknesses of the enclosure would need to be substantially greater to withstand the pressure differential. The spherical shape is advantageous when implementing pressure vessels due to inherently lower hoop stresses and thus comparatively thinner walls due to the spherical symmetry. The thinner enclosure wall allowed by the increased symmetry indirectly also leads to lower

thermal stresses.

The above disclosed embodiments provide sufficiently configuration flexibility to provide a required overall regenerator area while minimizing losses associated with fluid flow and accommodating inherent thermal stresses during operation of the thermoacoustic transducer **100**.

While specific embodiments have been described and illustrated, such embodiments should be considered illustrative of the invention only and not as limiting the invention as construed in accordance with the accompanying claims.

EMBODIMENTS IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. An apparatus for performing energy transformation between thermal energy and acoustic energy, the acoustic energy being associated with a periodic flow of a working fluid within an acoustic power loop of a thermoacoustic transducer, the apparatus comprising:

an enclosure defining a common central plenum, the central plenum having a first fluid port for providing fluid communication with the acoustic power loop;

a plurality of discrete cylindrical thermal converters radially positioned on the enclosure and about the central plenum, each thermal converter comprising:

a regenerator;

a second fluid port for providing fluid communication between each of the thermal converters and the acoustic power loop; and

fluid flow passages in fluid communication with the central plenum and extending through the regenerator to the second fluid port.

2. The apparatus of claim 1 further comprising a thermally conductive core disposed within the central plenum and thermally coupled to each of the plurality of thermal converters for transferring heat between the thermally conductive core and the thermal converters.

3. The apparatus of claim 2 wherein each thermal converter comprises a first heat exchanger having a thermally conductive body defining a portion of the fluid flow passages extending between the central plenum and the regenerator, the thermally conductive body being thermally coupled to the thermally conductive core and being operable to transfer thermal energy between the working fluid and the thermally conductive body.

4. The apparatus of claim 3 wherein the thermally conductive core is operably configured to transfer thermal energy between an external environment and the working fluid flowing through the fluid passages within the thermally conductive body of the first heat exchanger.

5. The apparatus of claim 3 wherein each of the thermal converters comprises a second heat exchanger having a thermally conductive body defining a portion of the fluid flow passages extending between the regenerator and the second fluid port, the thermally conductive body being operably configured to transfer thermal energy between the working fluid and the thermally conductive body.
- 5 6. The apparatus of claim 5 wherein the thermally conductive body is thermally coupled to transfer heat between the thermally conductive body and one of a heat transfer fluid and a heat pipe.
7. The apparatus of claim 2 wherein the thermally conductive core comprises a centrally located conduit for receiving a heat source or heat sink.
8. The apparatus of claim 7 wherein the centrally located conduit is oriented either:
10 aligned with a cylindrical axis associated with the central plenum; or
transverse to a cylindrical axis associated with the central plenum.
9. The apparatus of claim 7 where the centrally located conduit terminates in a plurality of return conduits extending back through the thermally conductive core adjacent to the centrally located conduit and wherein the return conduits are configured to transfer heat between the heat source or
15 the heat sink and the thermally conductive core.
10. The apparatus of claim 7 wherein the thermally conductive core comprises a copper material and further comprising an insert defining at least one of the centrally located conduit and the plurality of return conduits, the insert comprising a corrosion resistant material having sufficient strength at an operating temperature to withstand a pressure difference between the working fluid and an ambient
20 pressure.
11. The apparatus of claim 1 wherein the acoustic power loop comprises a thermal buffer in fluid communication with the first fluid port, the thermal buffer being shaped to reduce convective heat transfer from the working fluid due to circulating gas flows within the thermal buffer.
12. The apparatus of claim 11 further comprising a housing extending from an end of the thermal buffer
25 distal to the first fluid port and enclosing the central plenum and the plurality of thermal converters, the housing being operable to hold a charge of insulating gas at a pressure substantially equivalent

to a pressure of the working fluid, the insulating gas being operable to reduce parasitic heat transfer between the working fluid and a surrounding environment.

13. The apparatus of claim 12 further comprising a thermally conductive core disposed within the central plenum and thermally coupled to each of the plurality of thermal converters for transferring heat between the thermally conductive core and the thermal converters, the thermally conductive core having a centrally located conduit for receiving a heat source or heat sink and wherein the housing comprises a standoff sleeve providing access to the centrally located conduit from outside the housing for exchanging thermal energy between the heat source or heat sink and the thermally conductive core.

14. The apparatus of claim 1 wherein the acoustic power loop comprises:

a plurality of compliant tubes each compliant tube being connected to one of the second fluid ports of the plurality of thermal converters, the compliant tubes being operable to deflect under thermally induced strains caused by a temperature differential across the thermal converter during operation.

15. The apparatus of claim 1 wherein the plurality of thermal converters are radially arranged about the central plenum in a plurality of adjacent rows, the first row being disposed proximate the first fluid port and each successive row being spaced further from the first fluid port.

16. The apparatus of claim 1 wherein the central plenum comprises one of:

a generally spherically shaped central plenum and wherein each of the plurality of thermal converters is oriented in a substantially radial direction with respect to a center of the spherically shaped central plenum; or

a generally cylindrically shaped plenum and wherein each of the plurality of thermal converters is oriented in a substantially radial direction with respect to a center of the cylindrically shaped central plenum.

17. The apparatus of claim 15 wherein the thermal converters in successive rows are configured to operate at a different working fluid temperatures than the thermal converter in the first row.

18. The apparatus of claim 17 wherein the regenerators of the thermal converters in successive rows have at least one of a differing length in the radial direction and a different cross-sectional area than the respective regenerators of the thermal converters in the first row.
- 5 19. The apparatus of claim 15 wherein the central plenum has a tapered cross-sectional flow area such that a flow area of the central plenum proximate the first row differs from a flow area of the central plenum proximate subsequent rows.
- 10 20. The apparatus of claim 1 wherein each regenerator of the plurality of thermal converters comprises a sleeve enclosing the regenerator, and wherein the number of thermal converters in the plurality of thermal converters is selected to provide a combined regenerator area that reduces fluid flow losses within the regenerator while reducing thermal stresses experienced by the sleeve due to a thermal gradient established across the regenerator during operation.
- 15 21. A thermoacoustic transducer apparatus comprising the apparatus of claim 1 and further comprising:
a mechanical converter operable to provide power conversion between acoustic power and mechanical power, the mechanical converter including at least one diaphragm defining a first chamber and a second chamber within the mechanical converter; and
wherein the acoustic power loop comprises a first transmission duct extending between the first fluid port and the first chamber and a second transmission duct extending between the second fluid ports of the plurality of discrete thermal converters and the second chamber.
- 20 22. The apparatus of claim 21 wherein the second transmission duct comprises a plurality of ducts extending from the respective second fluid ports and merging into one or more transmission ducts in fluid communication with the second chamber.
- 25 23. The apparatus of claim 21 wherein the plurality of ducts comprise one of a compliant bellows section and an o-ring sealed section that facilitates accommodation of thermally induced strains caused by a temperature differential across the thermal converter during operation.
24. The apparatus of claim 20 wherein the acoustic power loop comprises a thermal buffer in fluid communication with the first fluid port, the thermal buffer being shaped to reduce convective heat transfer from the working fluid due to circulating gas flows within the thermal buffer and further

comprising a housing extending from an end of the thermal buffer distal to the first fluid port and enclosing the central plenum and the plurality of thermal converters, the housing being operable to hold a charge of insulating gas at a pressure substantially equivalent to a pressure of the working fluid, the insulating gas being operable to reduce parasitic heat transfer between the working fluid and a surrounding environment.

5

- 25.** The apparatus of claim **23** wherein the housing comprises one of a bellows seal and a sliding compliant seal between the housing and the thermal buffer and the second transmission duct.

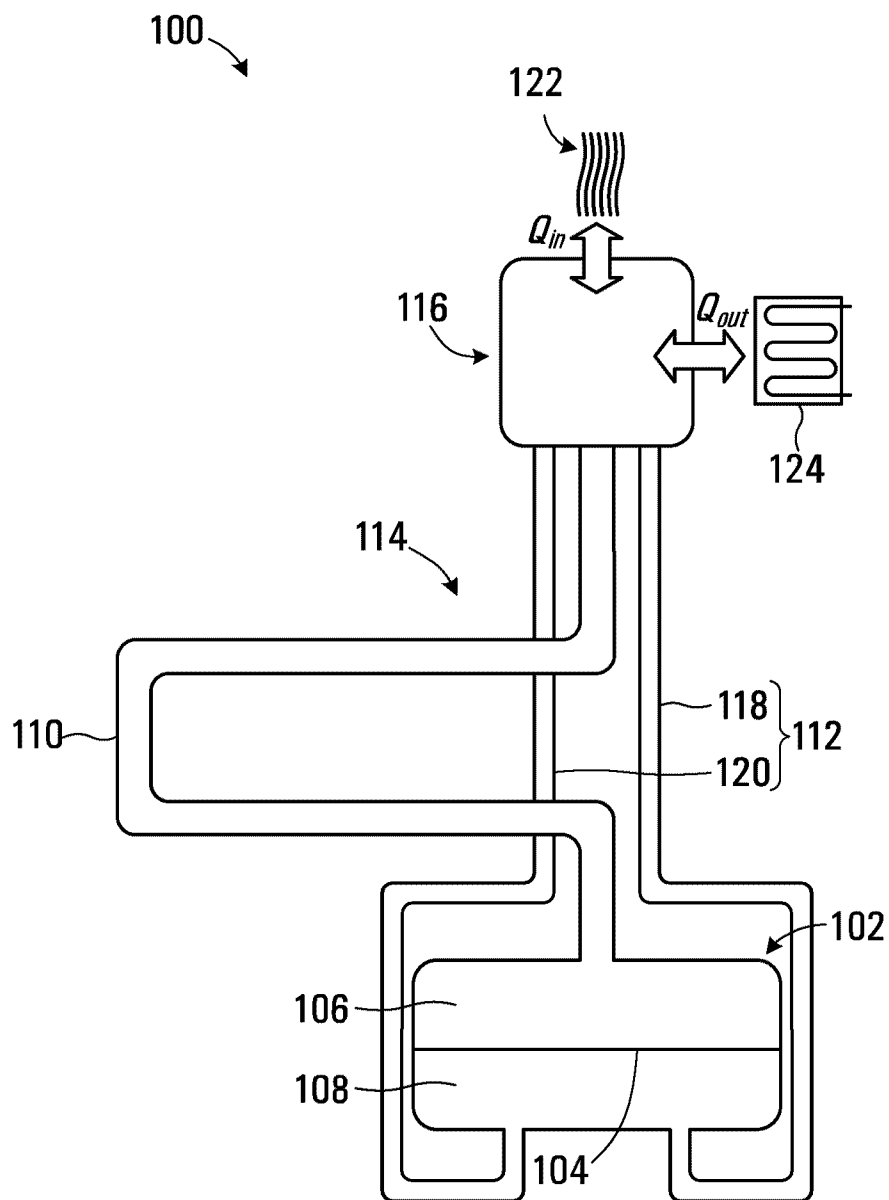


FIG. 1


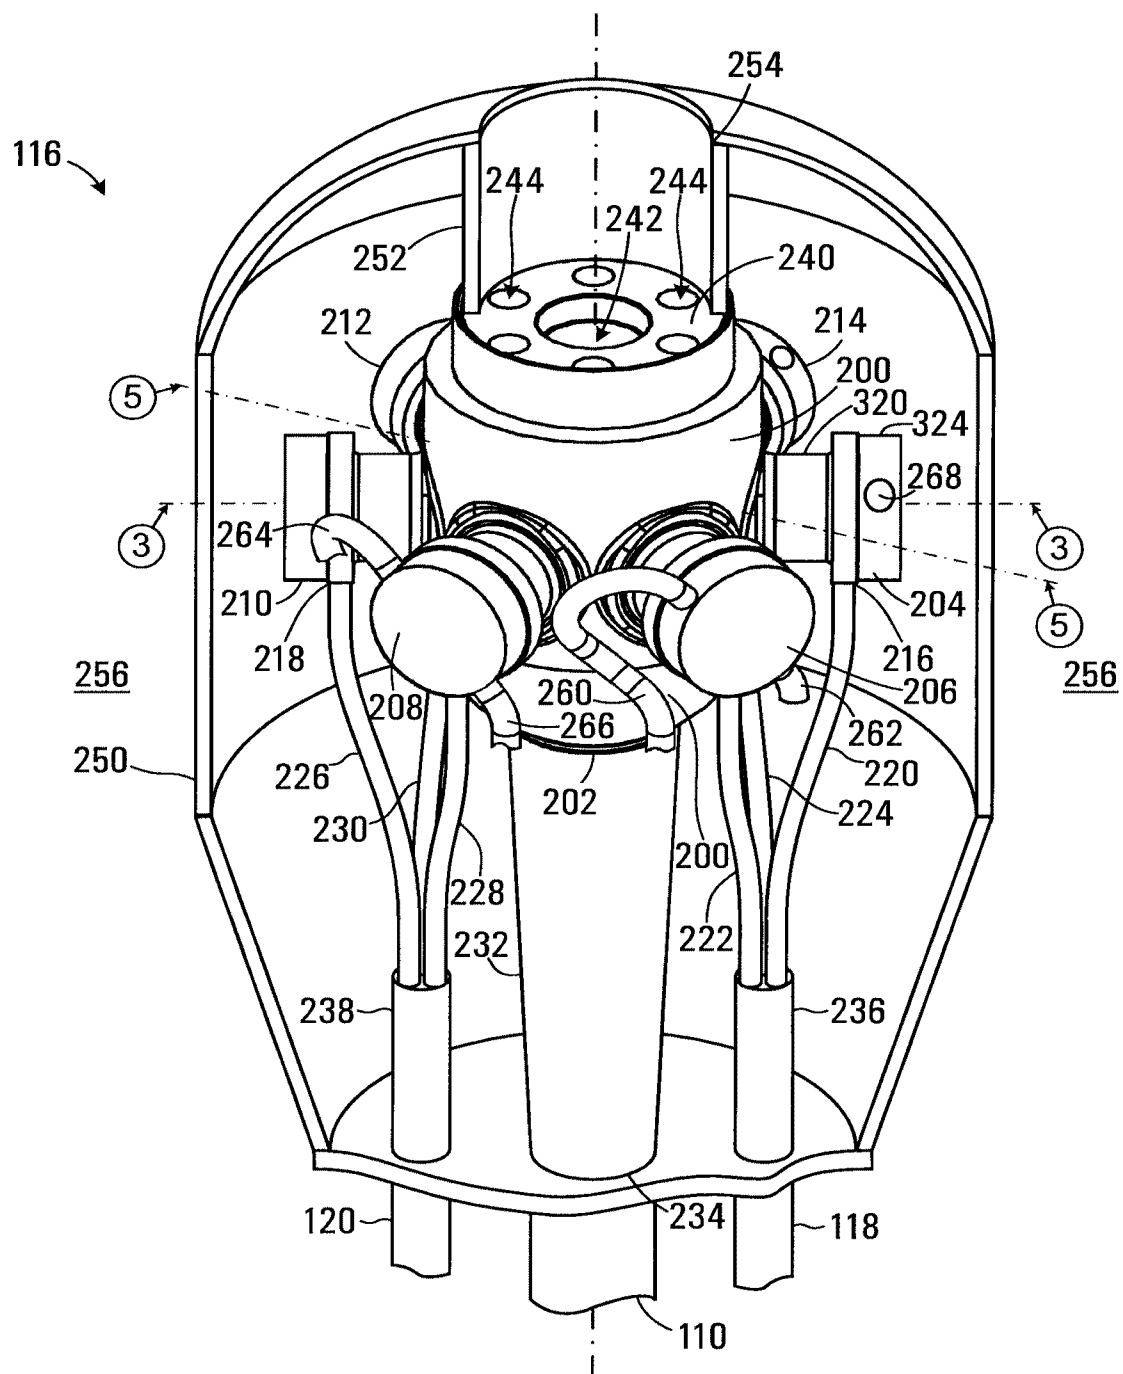



FIG. 2

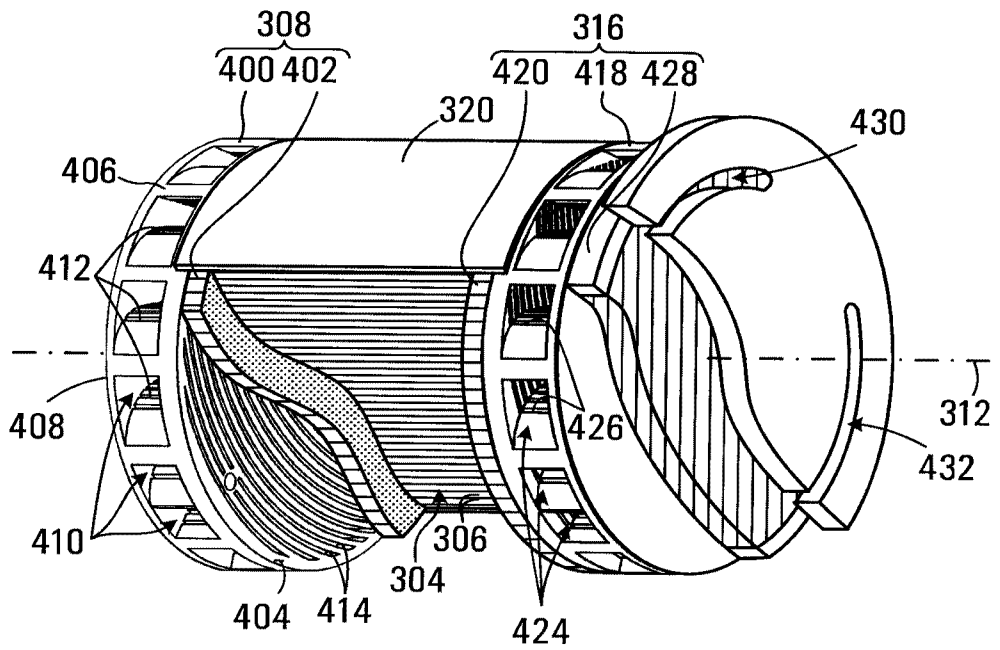

4/9

**FIG. 4**

5/9

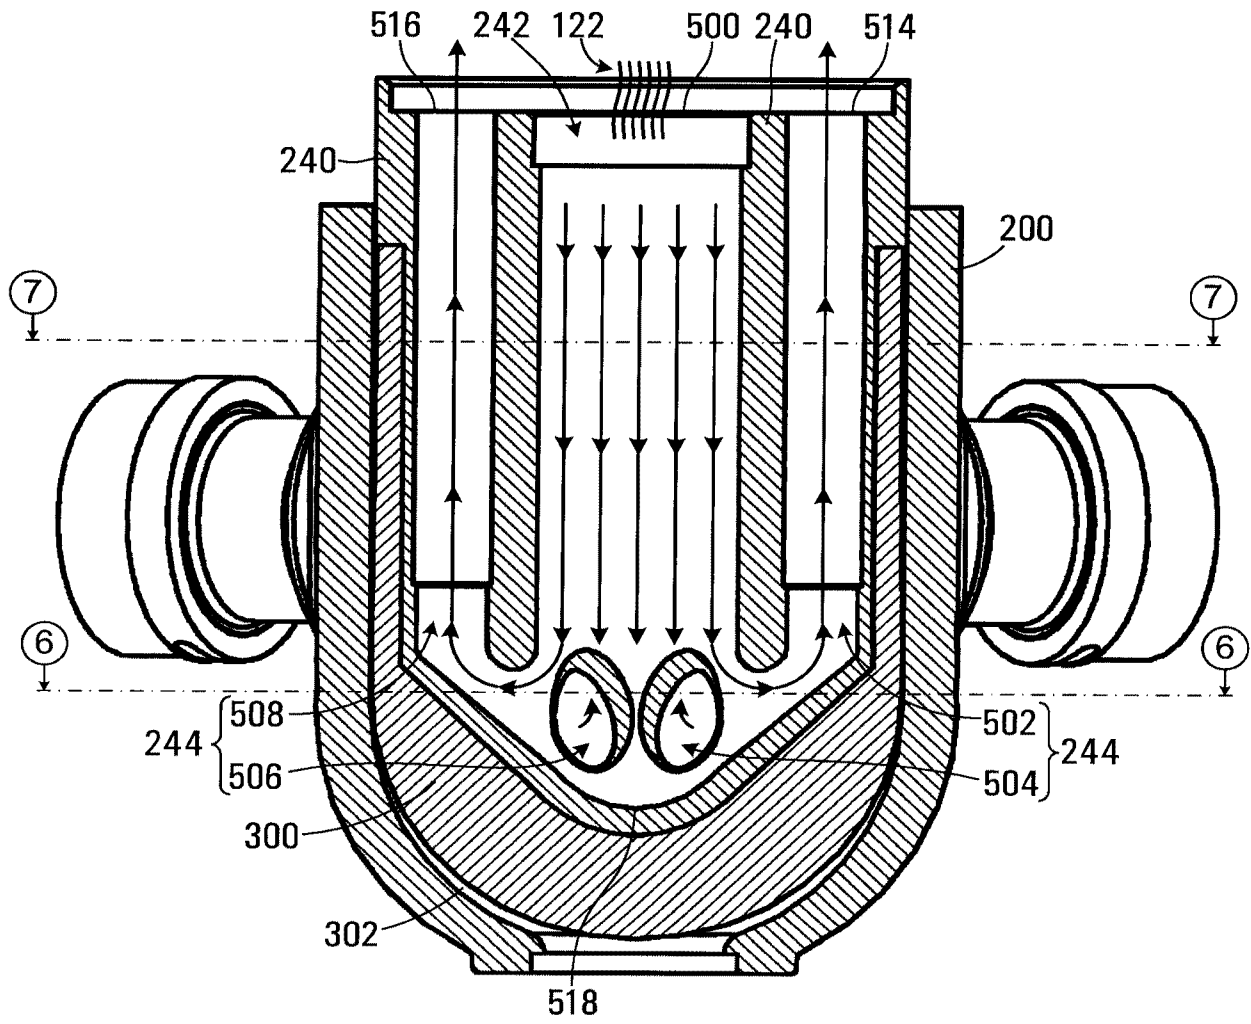**FIG. 5**

6/9

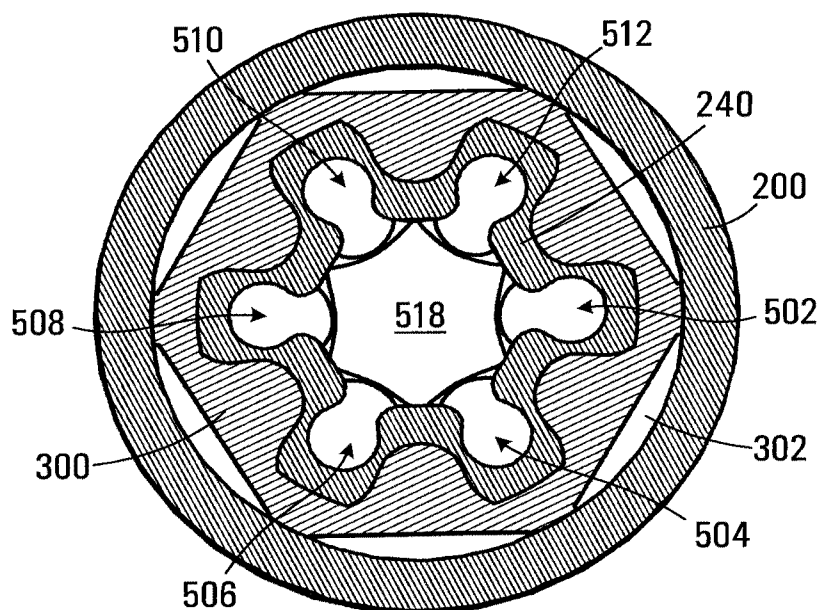


FIG. 6

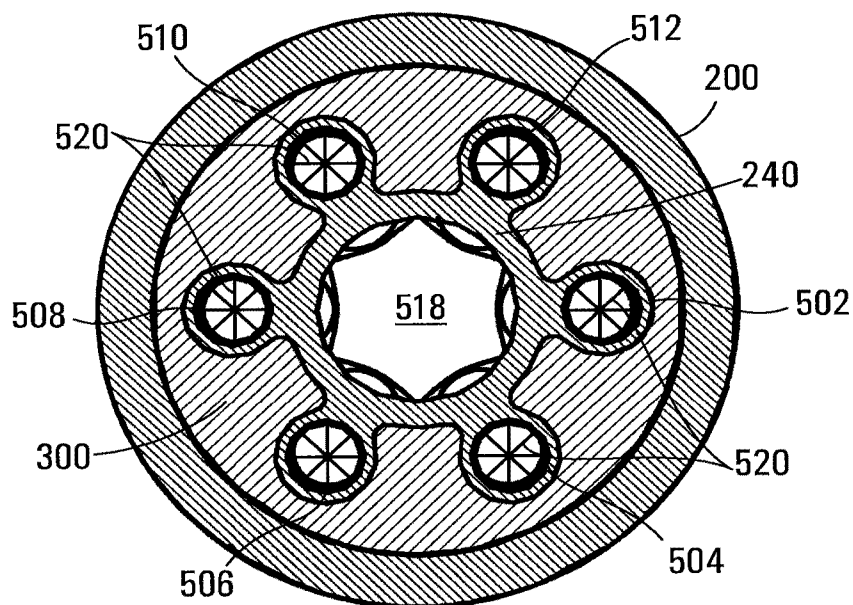
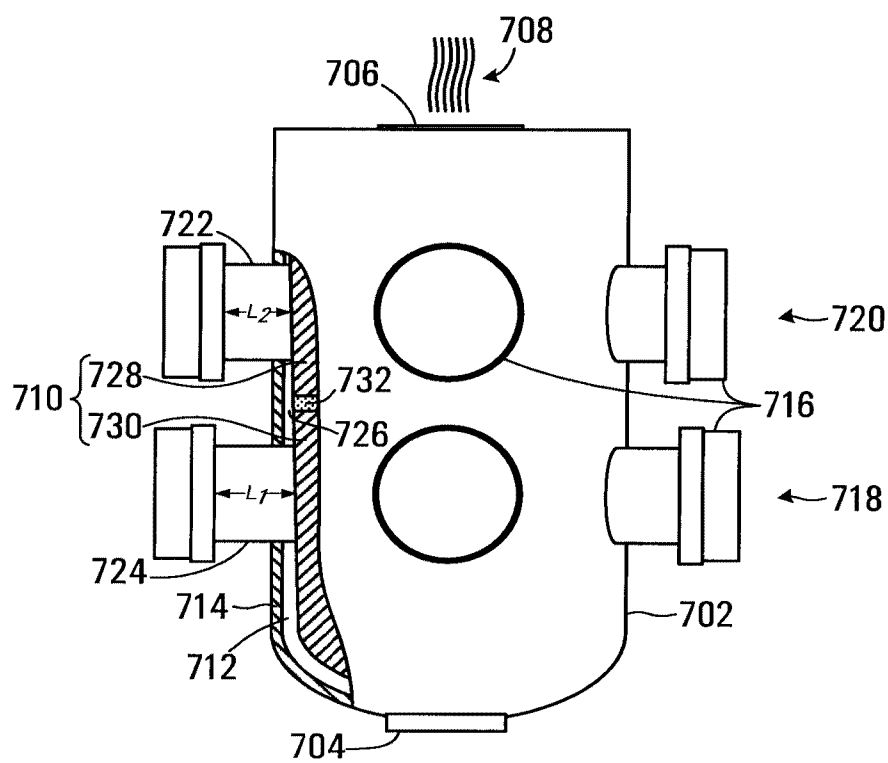


FIG. 7

7/9

**FIG. 8**

+

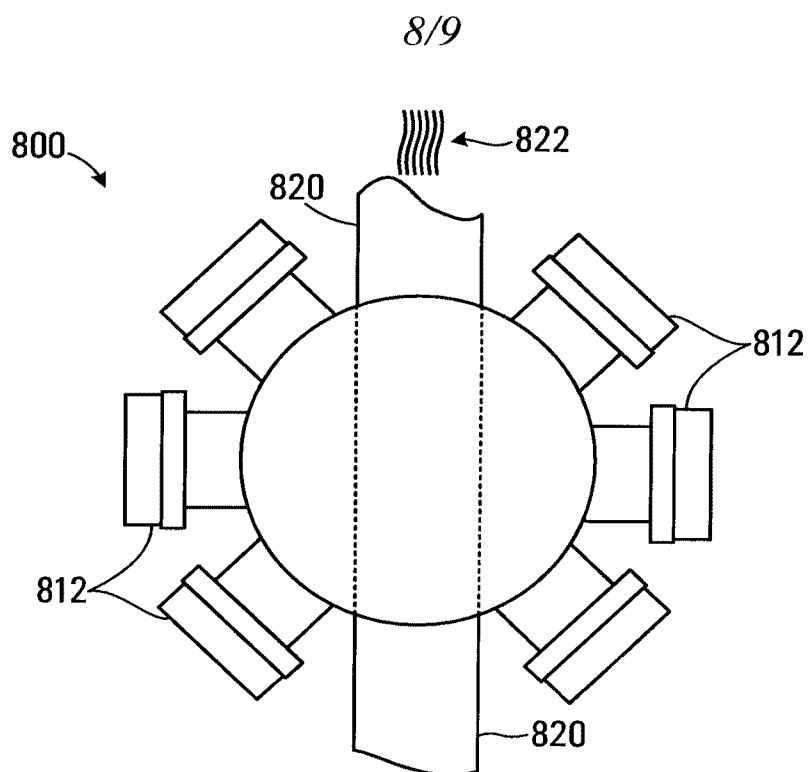


FIG. 9


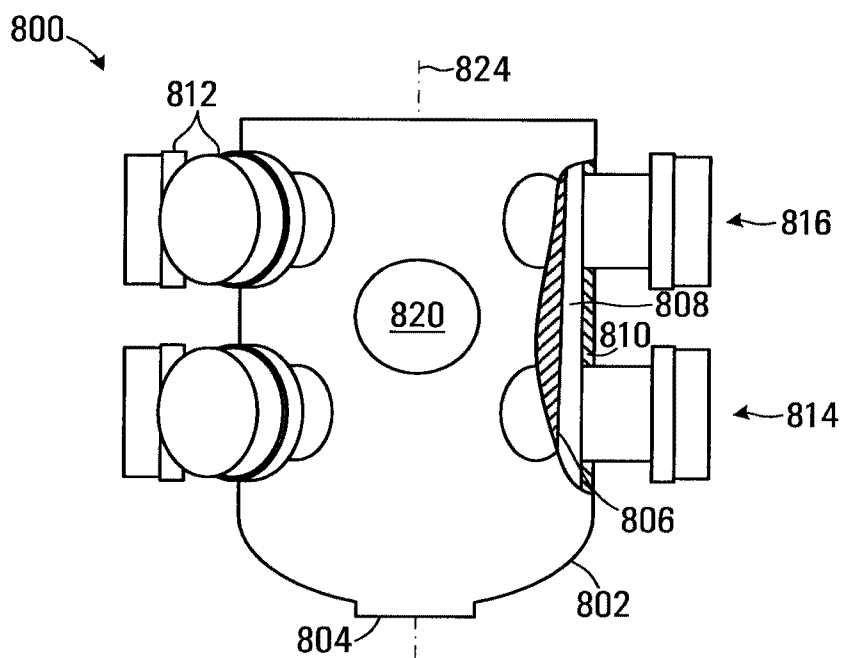


FIG. 10

+

9/9

**FIG. 11**

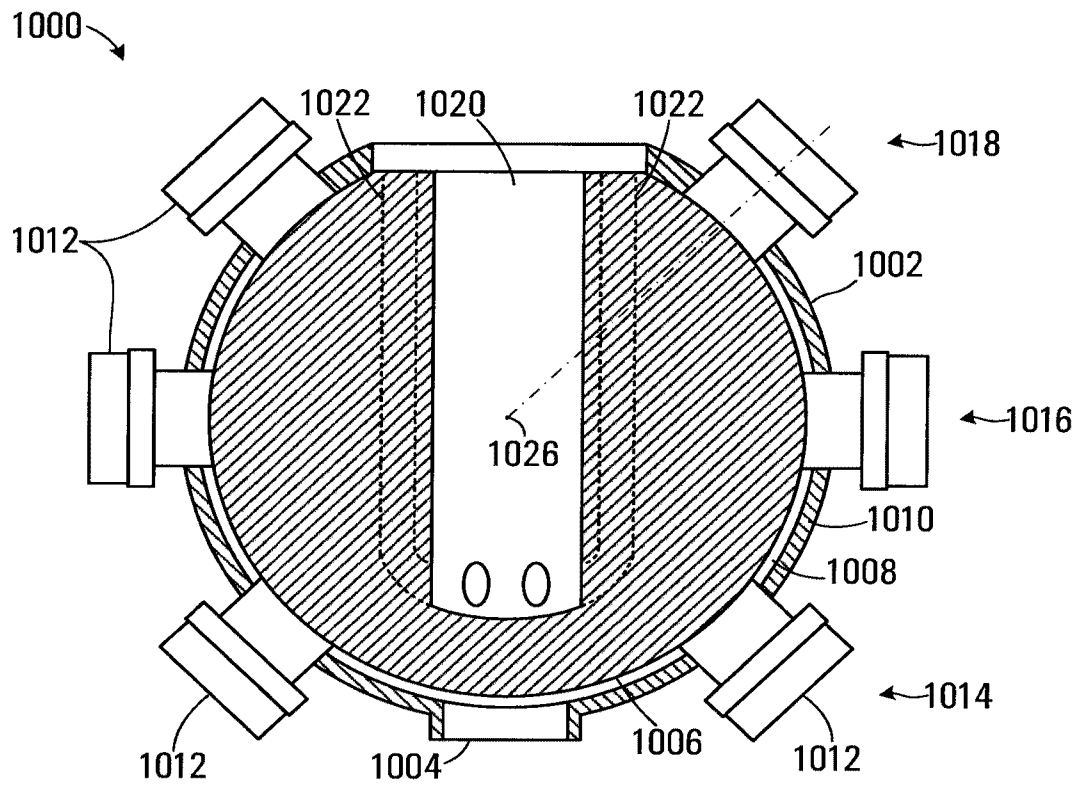