




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B23B 27/16	A1	(11) International Publication Number: WO 98/24578 (43) International Publication Date: 11 June 1998 (11.06.98)
(21) International Application Number: PCT/IL97/00398 (22) International Filing Date: 3 December 1997 (03.12.97) (30) Priority Data: 119776 6 December 1996 (06.12.96) IL (71) Applicant (for all designated States except US): ISCAR LTD. [IL/IL]; P.O. Box 11, 24959 Migdal Tefen (IL). (72) Inventors; and (75) Inventors/Applicants (for US only): BETMAN, Benjamin [IL/IL]; Harishonim Street 31A, 26302 Kiryat Chaim (IL). BOIANJIU, Gideon [IL/IL]; Marva Street 12, 24960 Kfar Vradim (IL). (74) Agent: REINHOLD COHN AND PARTNERS; P.O. Box 4060, 61040 Tel Aviv (IL).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the</i> <i>claims and to be republished in the event of the receipt of</i> <i>amendments.</i>

(54) Title: CUTTING TOOL ASSEMBLY AND CUTTING INSERT THEREFOR

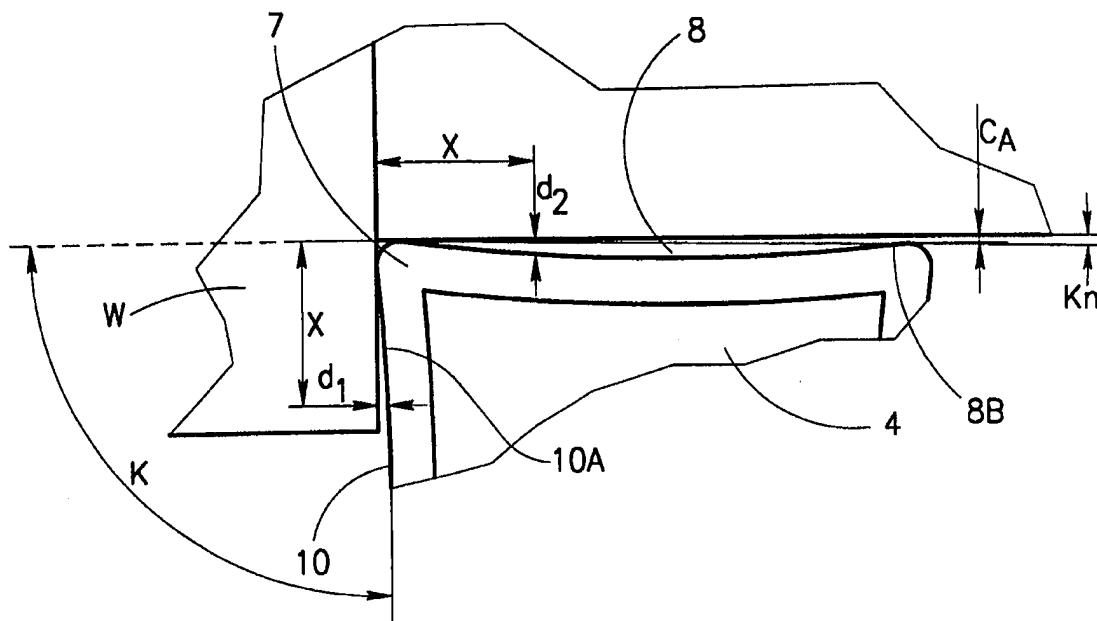

(57) Abstract

A cutting tool assembly (1, 1') for turning a stepped square shoulder on a workpiece of a limited maximum depth of cut, the cutting tool assembly (1, 1') including a toolholder for replaceably receiving a substantially square cutting insert (13) with concave side edges (13) and acute insert cutting corners (17).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

CUTTING TOOL ASSEMBLY AND CUTTING INSERT THEREFOR

FIELD OF THE INVENTION

The invention is in the field of cutting tool assemblies for turning operations. In particular, the invention relates to cutting tool assemblies and cutting inserts therefor for turning stepped square shoulders.

5

BACKGROUND OF THE INVENTION

For turning a stepped square shoulder on a workpiece, a cutting tool assembly requires a cutting insert with an acute operative insert cutting corner, a tool back clearance angle κ_n along its inoperative cutting edge and
10 an obtuse entering angle κ along its operative cutting edge. Such an entering angle enables an outwardly directed feed out movement to square out a shoulder, in particular, an outwardly directed radial feed out movement in the case of external longitudinal turning operations and an outwardly directed axial feed out movement in the case of external radial turning operations.

15 In view of these restrictions, cutting inserts for turning stepped square shoulders are either rhomboidal or triangular, thereby having respectively two or three indexable insert cutting corners when single-sided. Such cutting inserts are, for example, as illustrated and described in EP 0 162 029 A2, each insert cutting corner being formed as a protruding nose portion
20 at the juncture between centrally depressed insert sides. The cutting inserts are preferably double sided so as to be respectively formed with four or six indexable insert cutting corners.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a cutting tool assembly for turning stepped square shoulders, the cutting tool assembly being adapted for use with a cutting insert formed with more indexable insert cutting corners.

In accordance with a broad aspect of the present invention, there is provided a cutting tool assembly for turning a stepped square shoulder on a workpiece, the cutting tool assembly comprising a toolholder for replaceably receiving a cutting insert presenting an acute insert cutting corner at the juncture of substantially concave operative and inoperative cutting edges, characterized in that

said cutting insert is substantially square shaped and is so disposed in a top view of the cutting tool assembly that a clearance between said operative cutting edge and a first surface of the stepped square shoulder is less than a clearance between said inoperative cutting edge and a second surface of the stepped square shoulder at equal distances along said cutting edges whereby the location along the operative cutting edge whereat there is a minimal clearance from said first surface limits the maximal depth of cut of the cutting tool assembly to less than the length of the cutting insert's side.

The present invention is based on the realization that a fully indexable substantially square cutting insert with concave side edges can be employed for turning a stepped square shoulder on a workpiece in such cases where a maximum desired depth of cut in a direction substantially transverse to an initial feed direction of the cutting tool assembly is less than the length of the cutting insert's side.

In accordance with a further aspect of the present invention, there is provided a cutting insert comprising a substantially square upper surface, a lower surface and side surfaces intersecting with said upper surface at four substantially concave side edges each having a central portion between adjacent lateral portions, each pair of adjacent lateral portions meeting at an acute insert cutting corner,

characterized in that each of said central portions is substantially straight and the angle of each of said acute insert cutting corners is in the range of about $83^{\circ} \pm 5^{\circ}$.

5 A cutting insert according to the pre-characterizing portion of Claim 4 has been illustrated and described with reference to Figure 3 of US Patent 5,503,509, however, for drilling applications which require that the entire length of a cutting edge be operative. As shown, the side edges of the cutting insert do not have substantially straight central portions and, moreover, the angle of each of its acute insert cutting corners denoted "c" is in the
10 region of 70° .

The cutting insert of the present invention is characterized by virtue of each of its side edges having a substantially straight central portion and the angle of each of its acute insert cutting corners being in the region of $83^{\circ} \pm 5^{\circ}$. This construction ensures that, on the one hand, the strength of the cutting
15 insert is maximized both at its insert cutting corners and at its weakest portion where its cross section area is minimal, namely, at its throughgoing bore and, on the other hand, the angle of an operative insert cutting corner remains acute when the cutting insert is suitably mounted in a toolholder.

The cutting insert is preferably double sided, thereby being formed
20 with a total of eight indexable insert cutting corners. The cutting insert can be of either a negative or a double positive relief flank geometry. Alternatively, the cutting insert can be single sided and of a positive relief flank geometry.

25 BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the present invention and to show how the same can be carried out in practice, reference will now be made to the accompanying drawings, in which:

Fig. 1 is a plan view of a cutting tool assembly for external
30 longitudinal turning of a stepped square shoulder on a workpiece in accordance with a first embodiment of the present invention;

Fig. 2 is a close-up view of the operative insert cutting corner of the cutting tool assembly of Figure 1;

Figs. 3 and 4 are respectively side and end views of the cutting tool assembly of Figure 1;

5 **Fig. 5** is a plan view of a cutting tool assembly for external face turning of a stepped square shoulder on a workpiece in accordance with a second embodiment of the present invention;

Fig. 6 is a close-up view of the operative insert cutting corner of the cutting tool assembly of Figure 5;

10 **Fig. 7** is a plan view of a cutting insert for use in the cutting tool assemblies of Figures 1 and 5; and

Figs. 8-10 are various possible cross sections of the cutting insert of Figure 7 along line E-E.

15 **DETAILED DESCRIPTION OF THE DRAWINGS**

Turning now to Figures 1-4, a cutting tool assembly 1 is adapted for external longitudinal turning of a stepped square shoulder S on a workpiece W rotatable about an axis of rotation A up to a limited radial depth of cut as described hereinbelow.

20 The cutting tool assembly 1 includes a double negative rake toolholder 2 having an insert receiving pocket 3 at its leading end for replaceably receiving a double sided cutting insert 4 secured via a clamping device 5 (not shown), the cutting insert 4 being of the type shown in Figures 7-9.

25 The cutting tool assembly 1 presents an acute operative insert cutting corner 7 to the workpiece W, the operative insert cutting corner 7 being at the juncture of an inoperative concave cutting edge 8 and an operative concave cutting edge 10, the cutting edge 10 having a lateral portion 10A adjacent the operative insert cutting corner 7.

30 As shown in Figure 2, the cutting insert 4 is so disposed that a clearance d_1 between the cutting edge 10 and the shoulder's end face is less

than a clearance d_2 between the cutting edge 8 and the shoulder's cylindrical face at equal distances X along the cutting edges 8 and 10, the square shoulder's end and cylindrical faces respectively constituting its first and second surfaces.

5 Thus, in this arrangement, the inoperative cutting edge's trailing end 8B has a back clearance C from the shoulder's cylindrical face whilst the operative cutting edge's lateral portion 10A delimits an obtuse entering angle κ which enables an outwardly directed radial feed out movement P.

10 As shown in Figures 1 and 2, due to the concavity of the operative cutting edge 10, there is a location therealong at which there is a minimal clearance from the shoulder's end face. This limits the maximal radial depth of cut of the cutting tool assembly 1 to less than the length of the cutting insert's side when squaring out a stepped shoulder in the direction P.

15 As shown in Figures 3 and 4 respectively, typical rake angles imparted by the toolholder 2 are a so-called "negative back rake angle" α_1 to provide relief along an exposed side surface 9 of the cutting edge 8 and a so-called "negative side rake angle" α_2 to provide relief along an exposed side surface 11 of the cutting edge 10 from the workpiece. Typical values of the rake angles are as follows: $\alpha_1 \approx \alpha_2 \approx 6^\circ$.

20 Turning now to Figures 5 and 6, a cutting tool assembly 1' with the same cutting insert 4 is adapted for external face turning of a stepped square shoulder S' on a workpiece W' rotatable about an axis of rotation B. In this arrangement, the cutting insert 4 is so disposed that a clearance d_3 between the operative cutting edge 8' and the shoulder's cylindrical face is less than a
25 clearance d_4 between the inoperative cutting edge 10' and the shoulder's end face at equal distances X along the cutting edges 8' and 10', the square shoulder's cylindrical and end faces respectively constituting its first and second surfaces.

30 As a consequence, as shown in Figure 6, the cutting edge's trailing end 10'B has a clearance C' from the shoulder's end face whilst the operative cutting edge's lateral portion 8'A adjacent the operative insert cutting corner

7' delimits an obtuse entering angle κ which enables an outwardly directed axial feed out movement Q.

Thus, in this case, as shown in Figure 5, due to the concavity of the operative cutting edge 8', there is a location therealong at which there is a minimal clearance from the shoulder's cylindrical face. This limits the maximal axial depth of cut of the cutting tool assembly 1' to less than the length of the cutting insert's side when squaring out a stepped shoulder in the direction Q.

Turning now to Figure 7, a generally square cutting insert 13 has a central throughgoing bore 14 and an upper surface 15 having four side edges 16, each pair of adjacent side edges 16 meeting at an insert cutting corner 17.

Each side edge 16 is recessed with respect to an imaginary line 19 of a length l constituting one side of an imaginary square 20 in which the cutting insert 13 is inscribed in its plan view.

Each side edge 16 has a straight central portion 21 between adjacent lateral portions 22, a lateral portion 22 constituting the lateral portions 10A and 8'A respectively of the cutting tool assemblies 1 and 1'. The juncture of adjacent lateral portions 22 define an acute insert cutting corner angle B of 83° .

Each central portion 21 is coextensive with the throughgoing bore 14 and tangential to an imaginary central inscribed circle 23.

The cutting insert 13 can be a double sided cutting insert, thereby being formed with a total of eight insert cutting corners, and of a negative relief flank geometry 13A (see Figure 8) or a double positive relief geometry 13B (see Figure 9) for use in either of the cutting tool assemblies 1 or 1' with suitable adapted pocket therefor.

Alternatively, the cutting insert 13 can be a single sided positive cutting insert 13C (see Figure 10), thereby being formed with four insert cutting corners, and built in relief flank geometry for mounting in a neutral toolholder having $\alpha_1 \approx \alpha_2 \approx 0^\circ$ and adapted for turning stepped square shoulders of either limited maximum radial or axial depth of cut.

Alternatively, such an insert can possess a large relief angle whereby it can be mounted on a positive type toolholder.

While the invention has been described with respect to a limited number of embodiments, it will be appreciated that many variations, modifications and other applications of the invention can be made. Thus, in addition to external operations as shown and described hereinabove, similar cutting tool assemblies can be adapted for internal boring of stepped square shoulders. In addition, the same cutting insert can be equally employed in both right and left hand directions in turning operations. Whilst, the cutting insert can be modified such that its acute insert cutting corner angle β lies in the range $83^\circ \pm 5^\circ$.

CLAIMS:

1. A cutting tool assembly for turning a stepped square shoulder on a workpiece, the cutting tool assembly comprising a toolholder for replaceably receiving a cutting insert presenting an acute insert cutting corner at the juncture of substantially concave operative and inoperative cutting edges,

characterized in that

said cutting insert is substantially square shaped and is so disposed in a top view of the cutting tool assembly that a clearance between said operative cutting edge and a first surface of the stepped square shoulder is less than a clearance between said inoperative cutting edge and a second surface of the stepped square shoulder at equal distances along said cutting edges whereby the location along the operative cutting edge whereat there is a minimal clearance from said first surface limits the maximal depth of cut of the cutting tool assembly to less than the length of the cutting insert's side.

2. A cutting tool assembly according to claim 1 wherein the square shoulder's end and cylindrical faces respectively constitute its said first and second surfaces and whereby the cutting tool assembly is adapted for turning stepped square shoulders of a limited maximum radial depth of cut.



3. A cutting tool assembly according to claim 1 wherein the square shoulder's cylindrical and end faces respectively constitute its said first and second surfaces and whereby the cutting tool assembly is adapted for turning stepped square shoulders of a limited maximum axial depth of cut.

4. A cutting insert having a substantially square upper surface, a lower surface and side surfaces intersecting with said upper surface at four substantially concave side edges each having a central portion between adjacent lateral portions, each pair of adjacent lateral portions meeting at an acute insert cutting corner,

characterized in that each of said central portions is substantially straight and the angle of each of said acute insert cutting corners is in the range of about $83^{\circ} \pm 5^{\circ}$.

5. A cutting insert according to claim 4 wherein the cutting insert has a central throughgoing bore transversing said upper and lower surfaces and each central portion is at least co-extensive with said throughgoing bore.
6. A cutting insert according to claim 4 wherein the cutting insert is double sided and of a negative relief flank geometry.
7. A cutting insert according to claim 4 wherein the cutting insert is double sided and of a double positive relief flank geometry.
8. The cutting insert according to claim 4 wherein the cutting insert is single sided and of a positive relief flank geometry.

1/4

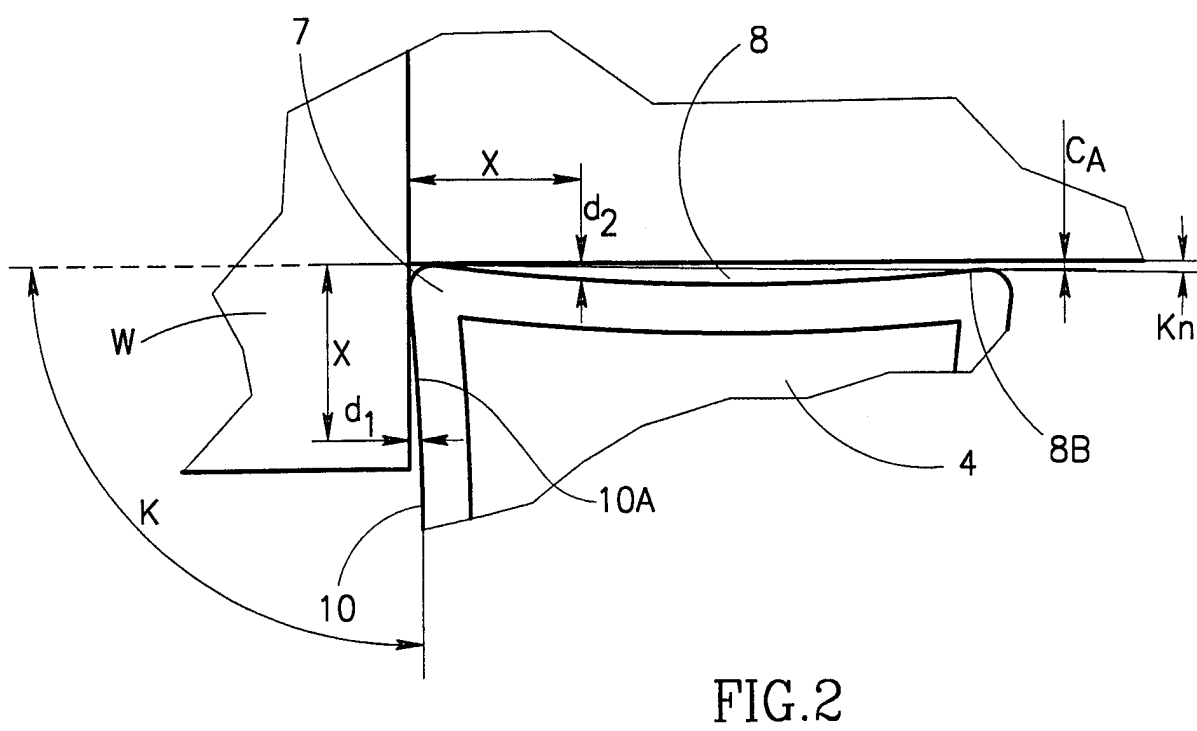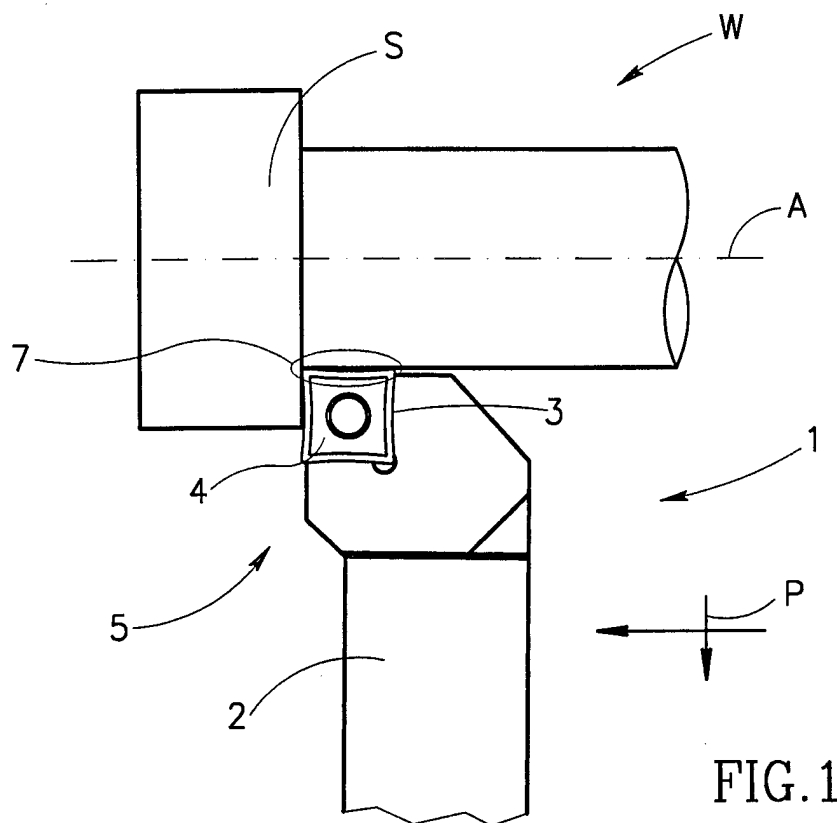

2/4

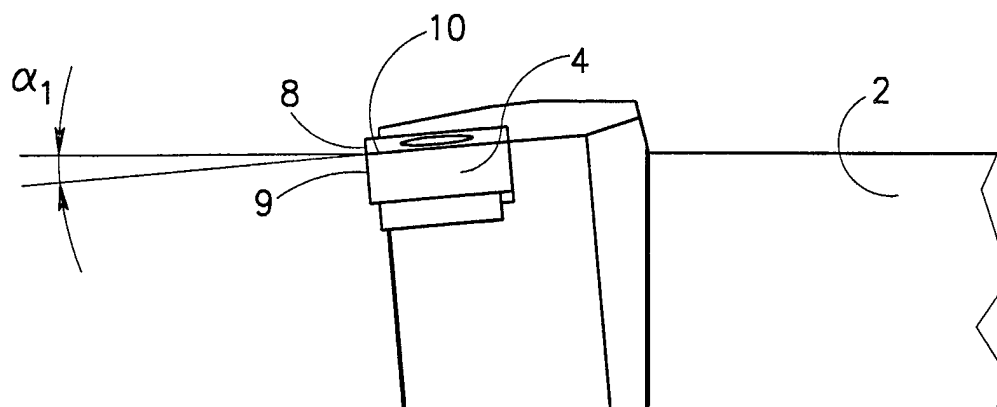


FIG. 3

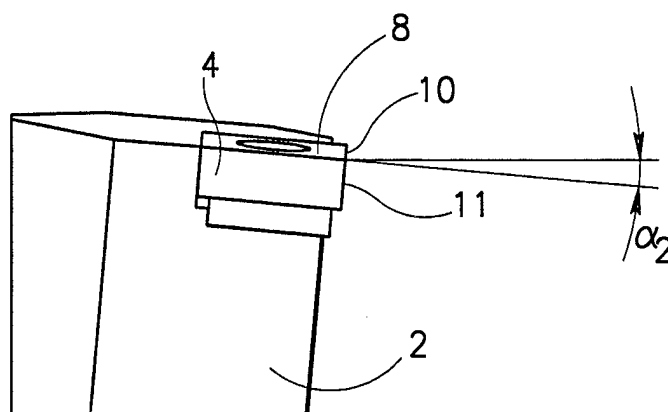


FIG. 4

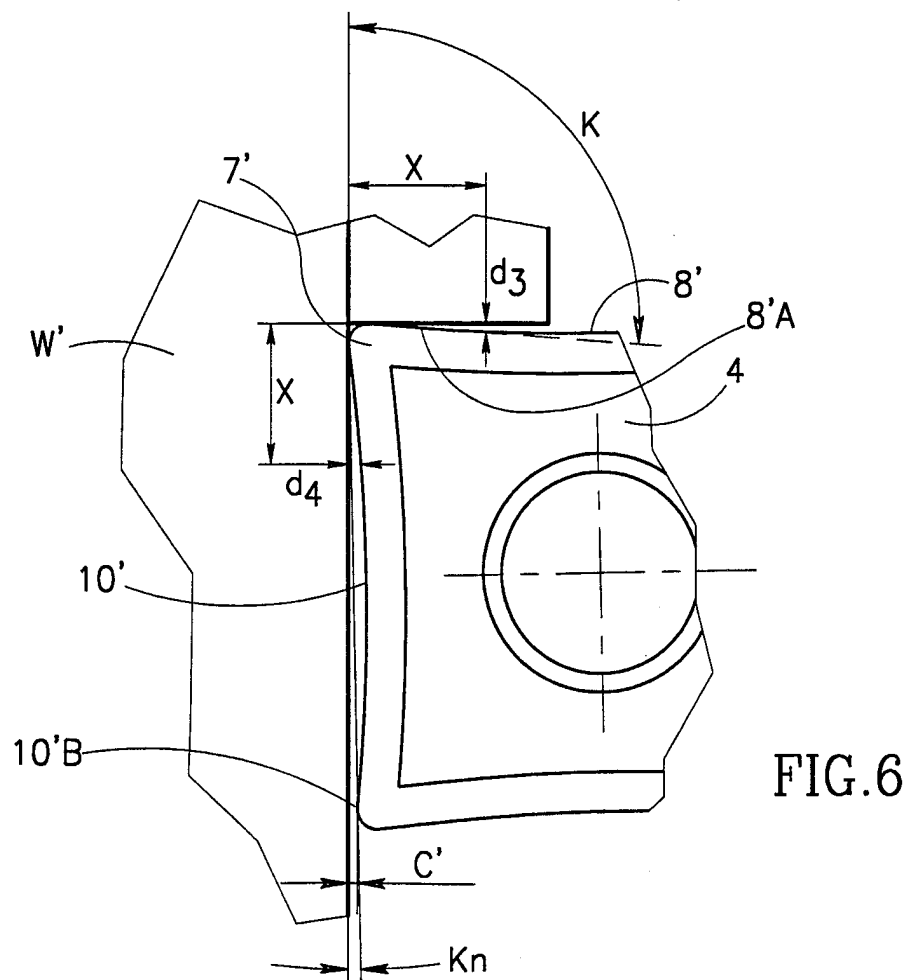
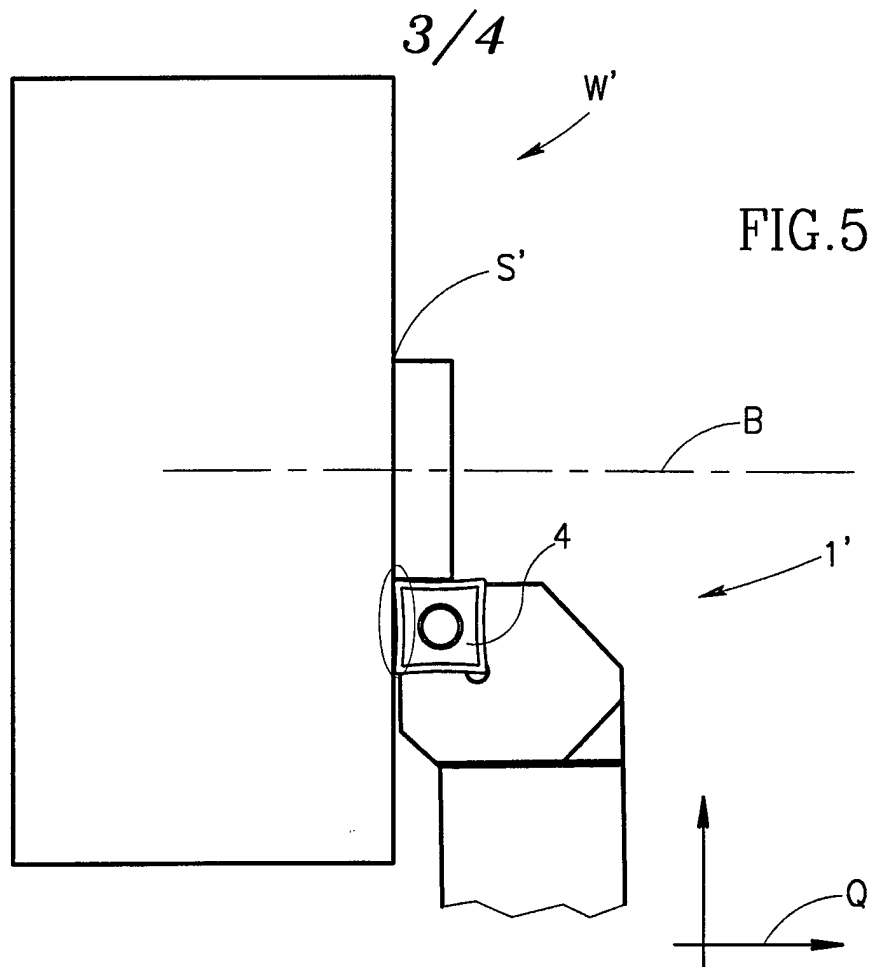


FIG. 6

4/4

FIG.7

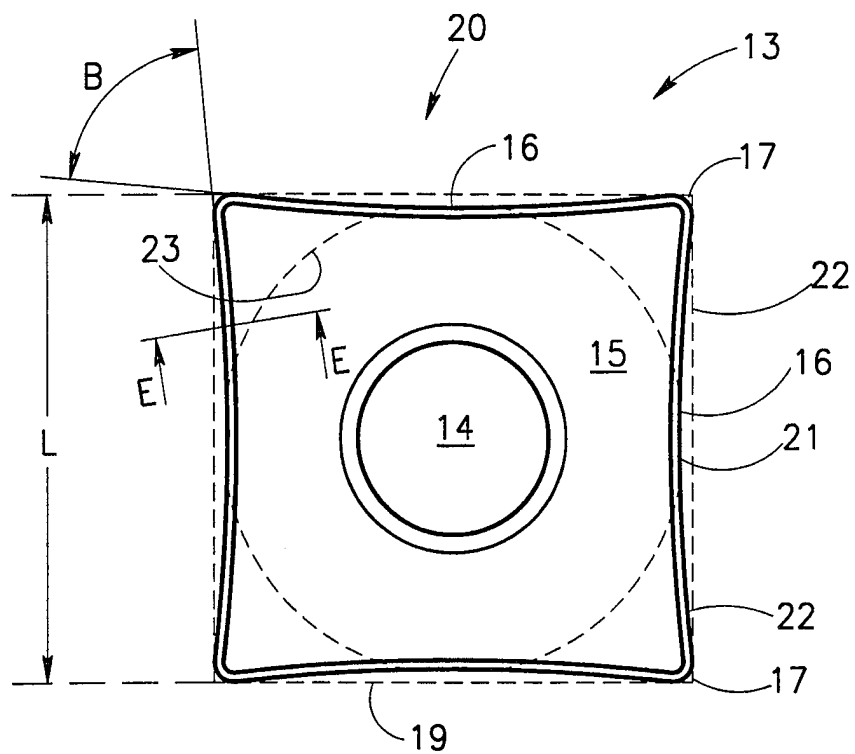


FIG.8

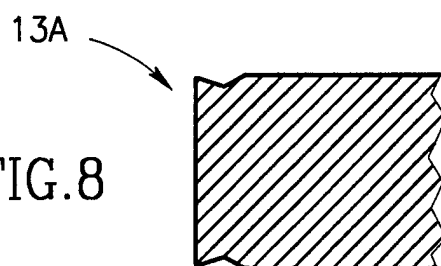


FIG.9


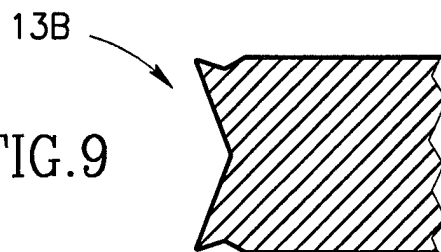


FIG.10

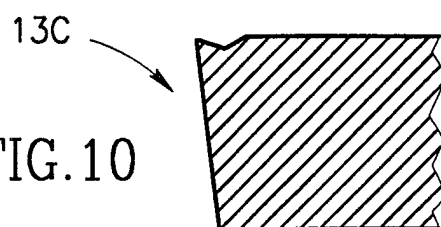

INTERNATIONAL SEARCH REPORT

Internat'l Application No

PCT/IL 97/00398

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 B23B27/16

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B23B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 91 01839 A (BARRACLOUGH) 21 February 1991 see figure 6 ----	1,4
A	WO 96 08331 A (HINTZE) 21 March 1996 ----	
A	GB 2 081 142 A (WIMET) 17 February 1982 ----	
A	US 4 084 917 A (STUMPP) 18 April 1978 -----	

☐ Further documents are listed in the continuation of box C.


Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

20 March 1998

Date of mailing of the international search report

01/04/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Bogaert, F

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IL 97/00398

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9101839 A	21-02-91	NONE	
WO 9608331 A	21-03-96	DE 4434297 A DE 4437689 A EP 0781182 A	14-03-96 25-04-96 02-07-97
GB 2081142 A	17-02-82	NONE	
US 4084917 A	18-04-78	NONE	