



**THERAPEUTIC SKIN LIFTING DEVICE  
AND RELATED SYSTEMS AND METHODS**

**FIELD OF INVENTION**

[0001] The present invention relates to a medical device for reducing symptoms of physical ailments and conditions, including pain and discomfort associated with Carpal Tunnel Syndrome (CTS), migraine headaches and other pressure-related ailments and conditions.

**BACKGROUND**

[0002] Carpal Tunnel Syndrome (CTS) is idiopathic median neuropathy at the carpal tunnel of a human hand. With reference to FIG. 1, a human hand 100 is illustrated with muscles in a proximate portion, below thumb 106 and pinky finger 108, including abductor pollicis brevis 102 and abductor digit minimi 104, respectively. The muscles 102 and 104 define transverse carpal arch 110 with a recess 112 therebetween that is generally aligned with third finger 114. In tissues below the recess 102 is carpal tunnel 116 where median nerve 118 enters the hand 100. This tunnel is normally narrow as it is also occupied by flexor tendons 120, so any swelling of adjacent tissue, including the flexor retinaculum ligament 122, can pinch the nerve and cause pain, numbness, tingling or weakness.

[0003] The pathology of CTS is not completely understood but can be considered compression of the median nerve traveling through the carpal tunnel. Many studies have been conducted to identify causes but the evidence is not clear. Various results published in the 1990's found strong associations between the prevalence of CTS and forceful and repetitive wrist movements such as work on keyboard and computers. However, more recent research has cited genetics and obesity as possibly larger factors than use, and has encouraged caution in ascribing causality.

[0004] Pregnant women, especially those in their third trimester, may experience hand pain and discomfort, for example, numbness, tingling sensation, or aching in the hands and wrists, particularly at night when bodily fluids are more equally distributed throughout the body and not just in the lower extremities. Because pregnancy causes swelling in many parts of the body, extra pressure may be present on the nerves in the hands and wrists, including the median nerve.

[0005] The only scientific established disease modifying treatment is surgery to cut or divide the transverse carpal ligament. However, one study found that within two years of surgery, 75% of the patients showed recurrence of pain symptoms. Moreover, surgery has many risks and is not suitable for temporary CTS, such as that experienced by pregnant

1 women. Palliative treatments for CTS include use of night splints and corticosteroid  
injection. Other nonsurgical treatment methods include hand braces, exercises, ergonomic  
equipment, oral diuretics and nonsteroidal anti-inflammatory drugs (NSAIDs). Websites  
including [www.mycarpaltunnel.com](http://www.mycarpaltunnel.com) discusses different treatment options. Other approaches  
5 include gloves, such as described in U.S. Patent No. 6,006,751 and the prior art cited therein.  
Obviously, such gloves may be relatively expensive and are not disposable. Gloves may also  
limit manual dexterity and tactile sensitivity.

10 [0006] Kinesio tape has also been used as a nonsurgical treatment for CTS. Conventional  
kinesio tape is manufactured from a highly elastic strand wrapped in cotton fibers. It is  
employed as a gentle stretching therapy for soft tissue disorders and repetitive strain injuries.  
Kinesio tape has elasticity intended to match that of a person's skin, muscles, cartilage and  
connective fascia tissue. However, there are many different methods of taping around the  
hand and wrist and improper taping may cause further discomfort or even further damage to  
15 the median nerve. Moreover, proper taping often requires the use of two hands making it  
difficult if not impossible for a patient to apply the tape without assistance.

20 [0007] Hand braces and splints and temporary, removable devices worn on the hand are  
also known, for example, a stretching hand device described in U.S. Patent No. 6,315,748  
and sold under the mark THE CARPAL SOLUTION. The device includes a central,  
resilient, stretchable tensioning segment with a plurality of relatively less stretchable adhesive  
straps secured to the segment. In use, the segment is placed on the back of a patient's hand,  
whereupon the straps are pulled and adhered to the patient's palm in a fashion to expand the  
segment. In this orientation, the control segment exerts continuous yielding or tensile forces  
25 through the straps which in turn reduces carpal tunnel syndrome nerve compression and  
alleviates symptoms.

30 [0008] Another severe condition suffered by a significant portion of the population is  
migraine headaches. The pain of migraine occurs when excited brain cells trigger the  
trigeminal nerve to release chemicals that irritate and cause swelling of blood vessels on the  
surface of the brain. These swollen blood vessels send pain signals to the brainstem, an area  
of the brain that processes pain information. The pain of migraine is referred pain that is  
typically felt around the eye or temple area.

35 [0009] In addition to prescription and over-the-counter drugs, there are many remedies  
for migraines, including sleeping, taking caffeine, ice packs, and avoiding sunlight or certain  
foods. Kinesio tape has also been used to alleviate severe headaches. Experts believe that  
taping can significantly help reduce headaches by repositioning the muscles that are under  
stress and therefore helping to relieve tension in the neck.

1 [0010] Indeed, the adhesive tape or strips have many medical uses and applications  
beyond bandaging wounds. For example, nasal snoring strips are pieces of elastic plastic that  
are embedded in a sticking plaster for attachment across the outside of the nose. Shape-  
memory causes the plastic to straighten which effectively widens the nasal passages to allow  
5 for improved airflow. These strips are disposable and simplistic in design, construction and  
use.

[0011] Accordingly, there is a desire for a device that can reduce the symptoms of  
pressure-related conditions and ailments, including CTS and migraines. There is also a desire  
10 for the device to be simplistic in design, construction and use and be able to lift skin above a  
sensitive underlying site.

#### SUMMARY OF THE INVENTION

15 [0012] The device of the present invention is primarily intended for use in those suffering  
from Carpal Tunnel Syndrome (CTS), but also has application for relieving migraine  
headaches and other situations where lifting the skin and tissue above a sensitive underlying  
site would provide benefits.

20 [0013] The present invention provides for an inexpensive, reliable and easy to use device  
which lifts an area of skin upwardly in a direction generally perpendicular to the skin surface.  
It does not interfere with the sleep of the user and is a low cost disposable item. In a  
preferred embodiment, used for CTS, the device comprises a thin, generally rectangular  
member with a long dimension and a short dimension. The member is made from a plastic  
material, with "shape memory", which in its normal configuration is generally flat. When  
25 pressure is applied orthogonally to the member, the member deforms. When released from  
pressure, the "shape memory" member has spring and rebounds to its normal configuration as  
much as possible. On a bottom (skin-facing) surface of the device, adhesive or adhesion  
member (used interchangeably herein) is provided on at least part of a central portion. A  
removable protective cover (e.g., release liner of wax paper) is applied over the adhesive.

30 [0014] In use, the protective cover is removed and the adhesive is applied to the palm  
proximate the wrist by a force depressing the center portion of the member toward the palm  
and fixes the center portion of the member to the palm. The member is oriented with the long  
dimension of the member across the palm between the thumb and the pinky finger. Since the  
adhesive is applied to a concave portion of the palm, the device forms a bridge across the  
35 palm. Side portions of the member supporting the center portion are not adhered to the palm  
so they can slide freely in contact with the palm. The skin of the palm adhering to the  
adhesive of the member is pulled upwardly as a result of negative pressure when the member  
is released and rebounds with its "shape memory".

1 [0015] The adhesive can be applied to the device by any conventional means so that the  
adhesive remains on the member when the protective backing is removed. Alternatively, the  
adhesive can be applied by a user directly to the member or to the palm or skin of the user.  
Lifting and/or stretching the skin in the area of the palm or treatment site relieves symptoms,  
5 including the symptoms of CTS.

[0016] While a preferred embodiment envisions use of a single piece of spring-type  
plastic material, it is possible to incorporate other designs to provide a resilient or shape-  
memory member, such as synthetic whalebone, polyester boning material, metal, metal  
10 alloys, such as nitinol, and the like.

[0017] Accordingly, the present invention is directed a therapeutic device adapted for  
application to skin covering a treatment site on a patient's body, having a generally rigid but  
elastically deformable body with at least one support portion and a bridge portion, the support  
portion adapted to rest on the skin, the bridge portion having an adhesive adapted to adhere to  
15 at least a portion of the skin, wherein the body is adapted to assume a neutral configuration  
with the adhesive and the portion of the skin separated by an air gap, and an adhesion  
configuration with the portion of the skin adhering to the adhesive being lifted and/or  
stretched at the treatment site. The body is also adapted to assume a depressed configuration  
the wherein the body is deformed from the neutral configuration with the bridge portion  
20 being depressed to bring the adhesive into contact with the portion of the skin.

[0018] The body while in its neutral configuration supports the bridge portion at a highest  
elevation relative to the skin surface of the treatment site, where as the body while in its  
depressed configuration supports the bridge portion at a lowest elevation. Moreover, the  
25 body while in its adhesion configuration supports the bridge portion at an in-between  
elevation greater than the lowest elevation and lesser than the greatest elevation. The  
adhesive provided on an inner, skin-facing surface may include a coating or layer of adhesive  
material, double sided adhesive tape, at least one suction cup, and/or micro-suction cup tape.

[0019] In a more detailed embodiment, the therapeutic device has a thin sheet body with  
30 a "butterfly" configuration wherein the support portion supporting the bridge portion includes  
side planar portions adapted to rest on the skin. The butterfly configuration is well-suited for  
application to a palm of the patient's hand with the device positioned on the palm and the  
bridge portion longitudinally aligned with a median nerve of the palm. The adhesive is  
adapted for adhesion to skin below the device and above the median nerve.

35 [0020] The thin sheet body may also be configured rectangularly with rounded corners  
and one or more curved edges. As such, the device is also adapted for application on other  
areas of the patient's body. The rounded corners are atraumatic and the curved edge(s)

1 accommodate features, curves and contours of the face or body, for example, nose, eyes,  
knuckles, elbows, knees and ankles.

5 [0021] In another more detailed embodiment, the therapeutic device has a thin sheet  
preformed body having an outer surrounding rim and a raised center bridge portion. The rim  
and the bridge portion may have a common shape, for example, circular, rectangular, square  
or polygonal. The bridge portion is supported by at least three legs extending upwardly from  
the rim.. The preformed body is well-suited for application to a forehead, e.g., a temple  
10 leg portion. Each leg may be L-shaped including a radial leg portion and an axial leg  
portion. The radial leg portion extends between the bridge portion and the axial leg  
portion, and the axial leg portion extends between the radial leg portion and the outer rim.

15 [0022] In accordance with a feature of the present invention, the body of the device may  
have one or more predetermined curvatures in one or more directions. The curvature(s) serve  
to ensure that the bridge portion is elevated and separated from the skin below by an air gap  
when the device in its normal or neutral configuration. The curvature(s) also serve to  
strengthen the bridge portion against the pull of the adhered skin when the device has been  
depressed and applied to the treatment site and allowed to rebound to or toward its neutral  
configuration under its body's shape memory. In a more detailed embodiment, the bridge  
20 portion of the device has a curvature or concavity in at least one direction toward the inner,  
skin-facing surface.

25 [0023] The device may also be configured as a flexible band or sleeve or semi-rigid cuff  
to be worn on an appendage. The body is adapted to encircle or wrap around the appendage,  
e.g., an arm or a leg, with an inner, skin-facing surface having at least two projections or  
ridges with an adhesive positioned therebetween for adhesion to the skin, wherein the skin is  
lifted when adhered to the adhesive.

[0024] The present invention also includes a method and system for manufacturing the  
aforementioned therapeutic device. The manufacturing process includes:

30 [0025] 1. A sheet of plastic material is passed through a heating tunnel to flatten or  
smooth the material.

[0026] 2. The material is passed through rollers, for example, silicone coated rollers, to  
curve the material with a desired radius.

35 [0027] 3. The material is passed through an adhesive applicator which applies adhesive,  
including adhesive tape, with or without a release liner.

1     **[0028]**     4. The material is passed through a cutting chamber, for example a die set, which cuts bodies of the devices out of the material.

**[0029]**     Sequence of the above steps may be varied as desired or appropriate.

5     **[0030]**     The method of manufacturing may also include custom-fitting the therapeutic device by making a mold of a body part to be fitted with the device and customizing the die set to the mold.

#### 10     BRIEF DESCRIPTION OF THE DRAWINGS

**[0031]**     These and other features and advantages of the present invention will be better understood by reference to the following detailed description when considered in conjunction with the accompanying drawings. It is understood that selected structures and features have not been shown in certain drawings so as to provide better viewing of the remaining structures and features.

**[0032]**     FIG. 1 is a perspective view of a hand with a cross-sectional view of a proximal portion including a median nerve and a carpal tunnel.

20     **[0033]**     FIG. 2A is a top plan view of a therapeutic device, in accordance with one embodiment of the present invention.

**[0034]**     FIG. 2B is a bottom plan view of the therapeutic device of FIG. 2A.

25     **[0035]**     FIG. 2C is a lateral cross-sectional view of the therapeutic device of FIG. 2A, taken along line C—C.

**[0036]**     FIG. 2D is a longitudinal cross-sectional view of the therapeutic device of FIG. 2A, taken along line D—D.

30     **[0037]**     FIG. 3 is a top plan view of the therapeutic device of FIG. 2A, as applied to a user's palm.

**[0038]**     FIG. 3A is a cross-sectional view of the therapeutic device of FIG. 2A, in a neutral configuration.

35     **[0039]**     FIG. 3B is a cross-sectional view of the therapeutic device of FIG. 2A, in a depressed configuration.

**[0040]**     FIG. 3C is a cross-sectional view of the therapeutic device of FIG. 2A, in an adhesion configuration.

1     [0041]     FIG. 4A is a top plan view of a therapeutic device, in accordance with another embodiment of the present invention.

          [0042]     FIG. 4B is a bottom plan view of the therapeutic device of FIG. 4A.

5     [0043]     FIG. 4C is a lateral cross-sectional view of the therapeutic device of FIG. 4A, taken along line C—C.

          [0044]     FIG. 4D is a longitudinal cross-sectional view of the therapeutic device of FIG. 4A, taken along line D—D.

10    [0045]     FIG. 5A is a top plan view of a therapeutic device, in accordance with another embodiment of the present invention.

          [0046]     FIG. 5B is a bottom plan view of the therapeutic device of FIG. 5A.

15    [0047]     FIG. 5C is a lateral cross-sectional view of the therapeutic device of FIG. 5A, taken along line C—C.

          [0048]     FIG. 5D is a longitudinal cross-sectional view of the therapeutic device of FIG. 5A, taken along line D—D.

20    [0049]     FIG. 6 is a top plan view of the therapeutic devices of FIGS. 4A and 5A, as applied to a forehead of a user.

          [0050]     FIG. 7 is a schematic diagram of a system implementing a method of manufacture in accordance with an embodiment of present invention.

25    [0051]     FIG. 7A is a perspective view of a machine system for manufacturing and packaging the therapeutic device of FIG 2A, in one stage of operation in accordance with an embodiment of the present invention.

30    [0052]     FIG. 7B is a perspective view of the machine system of FIG. 7A in another stage of operation in accordance with an embodiment of the present invention.

          [0053]     FIG. 8A is a perspective view of a therapeutic device, in accordance with another embodiment of the present invention.

35    [0054]     FIG. 8B is a top plan view of the therapeutic device of FIG. 8A, in a neutral configuration.

          [0055]     FIG. 8C is a bottom plan view of the therapeutic device of FIG. 8A.

1 [0056] FIG. 8D is a cross-sectional view of the therapeutic device of FIG. 8B, taken along line D—D.

5 [0057] FIG. 8E is a cross-sectional view of the therapeutic device of FIG. 8A, in a depressed configuration, as applied to skin.

[0058] FIG. 8F is a cross-sectional view of the therapeutic device of FIG. 8A, in an adhesion configuration, as applied to skin.

10 [0059] FIG. 8G is a cross-sectional view of a therapeutic device, in accordance with another embodiment of the present invention.

[0060] FIG. 9 is a top plan view of the therapeutic device of FIG. 8A, as applied to a temple region of a user.

15 [0061] FIG. 10 is a schematic diagram of a system for implementing a method of manufacturing a therapeutic device in accordance with another embodiment of the present invention.

[0062] FIG. 11 is a perspective view of a therapeutic device in accordance with another embodiment of the present invention.

20 [0063] FIG. 12 is a perspective view of the devices of FIGS. 11 and 14, as applied to forearm of a user.

25 [0064] FIG. 13 is a perspective view of the device of FIG. 11, as applied to a thigh and a foot of a user.

[0065] FIG. 14 is a perspective view of a therapeutic device in accordance with another embodiment of the present invention.

#### DETAILED DESCRIPTION OF THE INVENTION

30 [0066] The present invention is directed to a device having a bridge portion adapted for releasable adherence to a patch of skin so as to lift the patch of skin above a sensitive underlying treatment site in reducing discomfort or pain associated with tissue compression at the treatment site. The device is positioned on the patient such that the bridge portion is  
35 elevated above the treatment site in a direction generally perpendicular to the patch of skin with an exposed adhesive facing the patch of skin to be lifted and/or stretched outwardly. With the application of pressure to elastically deform the device from its original neutral configuration, the bridge portion is brought into contact with the patch of skin, adhering the

1 skin to the adhesive. When the pressure is removed, the device rebounds and generally  
reassumes its original configuration with the bridge portion lifting the attached patch of skin  
as it returns to an elevation at or near its original elevation.

5 **[0067]** With reference to FIGS. 2A-2D, a device 200 has a thin sheet body 202 with a  
longer length dimension L and a shorter width dimension W. The body 202 has an outer  
surface 204 and an inner (skin-contacting or skin-facing) surface 206. The body 202 may be  
constructed of any suitable material with “memory” such that the body can be deformed  
under application of a force or load from an original shape or configuration and elastically  
10 return to the original shape or configuration after removal of the force or load. Depending on  
the underlying material of which the body 202 is constructed, the body 202 may have a  
thickness T ranging between about 0.012 and 0.018 inches (0.30mm – 0.45mm), and  
preferably about 0.015 inches (0.40mm). The body 202 may also be provided with one or  
more predetermined curvatures C, such as concavity or convexity, in one or both axes L and  
15 W.

**[0068]** Suitable materials for the body 102 include materials that are biocompatible or  
FDA-approved plastics, acrylate, polymers, metal, such as aluminum or stainless steel, or  
even wood or wood composites. A presently preferred material is polyethylene terephthalate  
(PET).  
20

**[0069]** For use of the device 200 to treat the symptoms of CTS, the thin sheet body 202 of  
the device has a “butterfly” configuration adapted affixation to a palm 113 of a user, as  
illustrated in FIG. 3. The body 202 of the device 200 has two larger side support portions or  
“wings” 120 and an elevated bridge portion 208 extending between the support portions 120.  
25 The body 202 spans between about 1 ½ inches and 1 ¾ inches, and preferably about 1 ¼  
inches in the direction of the shorter/width dimension or axis W, and about 2 ½ inches and 2  
¾ inches, and preferably about 2 ¼ inches in the direction of the longer/length dimension or  
axis L.

30 **[0070]** The bridge portion 208 is rectangular, being elongated along the axis W and  
spanning about 3/8 inch in the L axis. Each of the side portions 220 has a rounded “petal”  
shape with a greater outer width 221 that tapers slightly to a lesser inner width 122 adjacent  
the body 208.

35 **[0071]** Moreover, the body 202 is provided with at least one predetermined curvature  
relative to an axis to conform to contours of the palm 113 near the wrist and location of the  
carpal tunnel (FIG. 1). In the illustrated embodiment of FIGS. 2C and 3, the body 202 has a  
predetermined concavity in the axis W toward the inner surface 206 to correspond with the  
convexity at the proximal end of the palm 113 (FIG. 1). The predetermined concavity of the

1 body relative to the axis W may generally trace a circle defined by a radius R ranging  
between about 4 to 6 inch diameter, preferably about a 5 inch diameter.

5 [0072] The inner surface 206 of the bridge portion 208 is provided with an adhesion  
member or adhesive 226, for example, a coating or layer of adhesive for releasably affixing  
the device 200 to the palm. The adhesive 226 is covered and protected by a release liner 228  
that is removed prior to use of the device 200 and application onto the user's skin.

10 [0073] With reference to FIGS. 3 and 3A-3C, use of the device 200 is described as  
follows. After the release liner 228 has been removed to expose the adhesive 226, the device  
200 is placed over the palm 113 with the inner surface 106 and the adhesive 226 facing the  
palm 113. The device 200 is oriented with its longer axis L being generally transverse to  
middle finger 114. As shown in FIG. 3A, the device is positioned with each wing portion  
220 resting on a respective convexity of the palm near muscles 102 and 104. With the device  
15 in its original and neutral configuration, the bridge portion 208 spans linearly in between the  
muscles 102 and 104, and elevated from the recess 112 and the median nerve 118.  
Advantageously, the slight but predetermined concavity of the device 100 in the lateral or W  
axis (FIG. 2C) enables the device to conform to the convexity of the palm 113, with the  
bridge portion 108 being elevated and separated from the skin below by an air gap G. As  
20 shown in FIG. 3B, to apply the device, pressure P is then applied, for example, by the user's  
other hand or that of an assistant, to the outer surface 204 of the bridge portion 208 above the  
adhesive 226 toward the skin so as to deform the bridge portion 208 (and any other portions  
of the body 202), bring the adhesive 226 into contact with the skin and allow the adhesive  
226 to adhere to the skin, reducing or eliminating the air gap G.

25 [0074] When the pressure P is removed and the body 202 is released, the elastically  
deformable body 202 generally returns to its original neutral state in reassuming the  
predetermined concavity and the linearity between the bridge portion 208 and the wing  
portions 220, with at least a portion of the skin of the recess 112 adhering to the adhesive  
226, as shown in FIG. 3C. Advantageously, the linearity or "bridging" of the bridge portion  
30 208 when the body 202 rebounds pulls the adhered skin and adjacent tissue in the region of  
the recess 112 outwardly or away from the median nerve 118 to result in negative pressure  
and reduction of compression of the median nerve. In accordance with a feature of the  
invention, the lifted skin or tissue may be raised or repositioned from its original position a  
distance ranging between 1.0mm to 5mm, preferably 2.0mm to 4.0mm, and more preferably  
35 about 3.0 mm. To that end, the concavity of the body 202 which extends across the bridge  
portion 208 further strengthens the bridge portion 208 when lifting the skin against the pull of  
adjacent skin. Moreover, opposing ends 208E of the portion 208, each with three sides  
unattached to the body 102, allow the device 200 to be more flexible and comfortable while

1 affixed to the palm, while providing additional bridging strength to the bridge portion 208  
against the pull of adjacent skin, as well as providing additional surface area for the adhesive  
226 to adhere with the skin.

5 **[0075]** In the disclosed embodiment, the bridge portion 208 is adhered to the skin,  
whereas the wing portions 220 are without adhesive and are not attached but are free to move  
and slide relative to the skin. This freedom of movement increases comfort to the user of the  
device by minimizing pinching or poking that may otherwise resulting discomfort if the wing  
10 portions (or any portions thereof) were also adhered to the skin. In that regard, a layer of  
fabric or liner or a coating of friction reducing gel may be provided on the inner surface of  
the wing portions 220 to prevent chafing. However, it is understood that the adhesive and  
adhesion member may be applied to one or more regions on the inner surface of the body and  
configured to cover beyond the bridge portion, for example, all or portion(s) of each or both  
wing portions 220.

15 **[0076]** It is understood that the bridge portion 208 need not be centered between the wing  
portions 220. That is, the size and/or shape of each wing portion 220 need not be equal or  
matching to the other. One wing may be larger, wider and/or longer than the other, as need  
or appropriate. There need not be symmetry about the axis L or W.

20 **[0077]** In an alternative embodiment of the present invention, a device 300 to treat the  
symptoms of a migraine headache is illustrated in FIGS. 4A- 4D. Similarities between the  
devices 200 and 300 (as well as other devices described herein) are denoted by similar  
reference numerals. However, each device has different adaptations for application and  
affixation to the patient's body. For example, the device 300 has adaptations for application  
25 and affixation to a generally flat skin site such as forehead 130 (FIG. 6), although it is  
understood that the device 200 may also be used to treat migraine headaches. A body 302 of  
the device 300 has a generally rectangular configuration with rounded corner 340, and a  
bridge portion 308 contiguous with two opposing rectangular or square side support portions  
320. The body 302 spans between about 3/4 inches and 1-1/4 inches, and preferably about  
30 1.0 inches in the direction of the shorter/width dimension or axis W, and about 2.0 inches and  
2-1/2 inches, and preferably about 2-1/4 inches in the direction of the longer/length  
dimension or axis L. The bridge portion 308 is rectangular, being elongated relative to the  
axis W and spanning about 3/8 inch in the L axis.

35 **[0078]** The body 302 has at least two predetermined curvatures (same or different degree  
of curvatures), one in the axis W (FIG. 4C) and another in the axis L (FIG. 4D), to provide  
concavity toward the inner surface 304 in at least two directions.

1 [0079] In another embodiment of the present invention for treatment of migraine symptoms, especially in the center of the forehead above the nose as illustrated in FIG. 6, a similar device 300' of FIGS. 5A-5D may have one or more arcuate longitudinal edges 342 which can accommodate placement of the device around eyes, nose or ears.

5 [0080] For either device 300 or 300', inner surface 206 of the bridge portion 208 is provided with adhesion member or adhesive, which may include one or more suction cups 330 (FIGS. 4A-4D) or micro suction cup tape 332 (FIGS. 5A-5D) having a surface with a multitude of microscopic craters 334 that work by creating many partial vacuums between the tape and target surface. The tape 332 can rebond repeatedly, and leaves no residue on the skin. A preferred tape is No. MSX-6800, DC Conformable Hi-Tack Type tape manufactured by 3M.

10 [0081] Moreover, for either device 300 or 300', on the inner surface 306 at or near lateral edges 344, each side support portion 320 includes a projection, such as a raised ridge 346 with a height H (FIGS. 5A-5B) which elevates the body 302 away from the skin so that the bridge portion 308 forms a bridge that is separated from the skin with an air gap in between. In that regard, the body 302 has sufficient rigidity to provide linearity between the portions 308 and 320. Each ridge 346 may have a different height, depending on the contour of the site. The ridges 346 may be constructed of the same material as the body 302 or of any other suitable material that provides sufficient form and structure to lift the body 302. Where the body 302 spans about 1-7/16 inches along the axis L, and about 1-3/16 inches along the axis W, each ridge 346 may have a thickness of about 3/16 inch and a width ranging between about 1/8 inch and 1/4 inch. Ends of each ridge may terminate a distance of about 1/8 inch from the longitudinal edges 240.

20 [0082] It is noted that the concavity/ies of the bodies (actual or as effectuated by the ridges 346) should be of a sufficient degree such that peripheral edges, including longitudinal edges 340 and lateral edges 344 extend beyond the adhesive (e.g., adhesive coating, adhesive tape, suction cups, or micro-suction cup tape) so as to elevate the adhesive from skin and provide an initial air gap before the skin is adhered to the device (as shown in FIGS. 4C, 4D and 5D).

25 [0083] In use, the adhesive 326 is exposed and the device 300' is placed over the target skin site with the inner surface 306 and the adhesive 326 facing the skin. The device 300 is oriented with the ridges 346 straddling the skin site so that the bridge portion 308 and the adhesive 326 is directly over the sensitive skin site. Elevated by the ridges 346, the bridge portion 308 is situated above the skin, separated by an air gap. With the device so positioned, pressure is then applied by the user (or an assistant) to the outer surface 304 of the bridge

1 portion 208 directly above the adhesive 326 toward the skin so as to deform the bridge  
portion 308 (and any other portions of the body 302), bring it into contact with the skin and  
allow the adhesive 326 to adhere to the skin.

5 [0084] When the pressure is removed and the body 302 is released, the elastically  
deformable body 302 generally returns to its original neutral state in reassuming the linearity  
between the bridge portion 308 and the side portions 320, thereby lifting the adhered skin and  
tissue and reducing compression at the site. The device can be situated around the eyes, near  
a temple, or above the nose on the forehead, as facilitated by the arcuate longitudinal edges  
10 240, as shown in FIG. 6.

[0085] With reference to FIG. 7, the foregoing devices may be manufactured in  
accordance with the following method:

15 [0086] 1. Providing a single flat sheet 150 of suitable material;

[0087] 2. Heating the sheet to smooth the sheet 150 and remove wrinkles and bends;

[0088] 3. Stamping, die-cutting or otherwise cutting the sheet 150 to form the device.

20 [0089] 4. Applying the adhesive to the inner surface of the bridge portion.

[0090] The method may include forming the sheet 270 with at least one predetermined  
curvature.

25 [0091] Heating the sheet may include passing the sheet 170 through a heat tunnel 151,  
and/or under or between heated roller(s) 152. Forming the sheet 150 with at least one  
predetermined curvature may include passing the sheet through heated roller(s) 154.  
Stamping, die-cutting or otherwise cutting the sheet into device bodies may be performed by  
a die set including roller 154 and a movable punch 156. The movable punch 156 may be  
curved to conform to the curvature of the roller 154 to simultaneously form the device body  
with at least one or more predetermined curvature. Applying the adhesive 326 may occur at  
30 any stage, including before, during or after stamping, die-cutting or otherwise cutting the  
sheet. As mentioned, the adhesive may be medical grade adhesive suitable for topical use. It  
may take the form of a solid coating or layer (or a plurality of adhesive lines), double-sided  
adhesive tape, suction cup(s) or micro-suction cup tape. Any release liner may be applied  
35 simultaneously with the application of the adhesive or afterwards.

[0092] Where the device has ridges 246, the die set may have formations to stamp the  
ridges into the sheet, or they may be mounted after stamping. Alternatively, the method of

1 manufacture may include applying or adhering the ridges 246 to the inner surface of the bridge portion before, during or after application of the adhesive to the inner surface.

5 [0093] An embodiment of a machine system 160 implementing a method of manufacture and packaging of the device is illustrated in FIGS. 7A and 7B. The machine system 160 includes a longitudinal conveying platform 161 that defines a conveying pathway P from a first end 162 downstream to a second end 164. At or near the first end 162 is dispenser roller 166 of sheet material 167. Stored in roll form, the sheet material advantageously has a preformed curvature. To that end, the dispenser roller 166 in one embodiment of the invention has an initial diameter no greater than about 25 inches and more preferably no greater than about 20 inches.

10 [0094] Downstream of the dispenser roller 166 is a smooth roller 168 positioned to flatten the sheet material and remove wrinkles or bumps. Downstream of the smooth roller 168 is an adhesive tape applicator roller 172 which applies double-sided adhesive tape strips 174 onto an upward surface 175 of the sheet material (which becomes the inner/skin-facing surface of the device). The tape strips 174 are mounted on the applicator roller 172 with an exposed adhesive surface 171 facing outwardly so that it contacts and affixes to the upward surface 175 of the sheet material 167 upon pressure applied by the roller 172. Release liner strips 173 are affixed to the opposing surface of the applied tape strips 174 for subsequent removal by users when applying the devices.

15 [0095] Downstream of the applicator roller 172 is a die press 179 with upper platen 176 and lower platens 178A and 178B driven by air hydraulics assembly 180. The upper platen 176 is driven toward first lower platen 178A in a first stage operation of the die press and toward the second lower platen 178B in a second stage operation of the die press, as described below, to die cut a plurality of individual devices 10A and 10B from the sheet material 167 and the tape strips 174 affixed thereon.

20 [0096] The lower platens 178A and 178B are supported on a carrier 182 that is adapted for translational movement in opposition directions T1 and T2 along a pathway generally transverse to the conveying pathway P. In a first stage operation (FIG. 7A), the carrier 182 slides in direction T1 to position the first lower platen 178A directly below the upper platen 176 wherein the upper platen 176 engages the first lower platen 178A and cuts devices 10A in die recesses 181A, exposing the second lower platen 178B off one side of the conveying platform 161 and rendering it accessible to a transport member 184B. In the second stage (FIG. 7B), the carrier 182 slides in direction T2 to position the second lower platen 178B directly below the upper platen 176, wherein the upper platen 176 engages the second lower platen 178B and cuts devices 10B in die recesses 181B, exposing the first lower platen 178A

1 off the opposite side of the conveying platform 161 and rendering it accessible to an opposing  
transport member 184A. Accordingly, the carrier 182 translates each lower platen 178A and  
178B between an engagement position under the upper platen 176 and an unload position  
under respective a transport member 184A. Where a full die cut cycle of the die press  
5 involves the first stage operation followed by the second stage operation in sequence, the  
hydraulics assembly drives the die press 179 and carrier 182 in a manner whereby one of the  
lower platen is placed under the upper platen 176 for die cutting and while the other lower  
platen is exposed and accessible to a respective transport member 184. That is, in one stage  
of operation, the one lower platen is in the engagement position whereas the other lower  
10 platen is in the unload position, and in the other stage of operation, the other lower platen is  
in the engagement position whereas the one lower platen is in the unload position.

[0097] In addition to driving the die press 179 and the carrier 182, the hydraulics  
assembly 180 also drives support arms 185 to move the transport members 184A and 184B  
15 between at least three positions: a wait position, a load position, and an off-load position.  
The transport members are adapted to secure a load of devices and transport the devices from  
the lower platens 178A and 178B to packaging or dispensers 183 arranged on tray members  
186A and 186B arranged below the lower platens in their exposed positions. As shown in  
FIG. 7A, when lower platen 178B is exposed and accessible to transport member 184B, the  
20 transport member 184 is actuated by the hydraulics assembly 180 to move from its wait  
position to the load position where it picks up devices 10B from the lower platen 178B. In  
the illustrated embodiment, the transport member 184 includes grippers with vacuum/suction  
cups 189 mounted on posts 190 which are activated to grab the devices 10B individually.  
With a load of devices on board, the transport member 184B is actuated by the hydraulics  
25 assembly 180 to move into the off-load position toward the tray member 186B positioned  
below the exposed position of the lower platen 176B and release the devices 10B into  
dispensers 183B. The transport member 184B is then returned to its wait position for the next  
cycle when the lower platen 176B contains more cut devices and is exposed and accessible  
again.

30 [0098] The tray member 186B is supported on carrier 188B which translates the tray  
member 186B along direction C parallel with the conveying pathway P so that the tray  
member 186B can shift between different positions for efficient loading of the dispensers  
184. In the illustrated embodiment, the tray member is translated between two positions: a  
proximal position and a distal position.

35 [0099] It is understood that the actuation and movement of the die press 179, the carrier  
182, the transport members 184A and 184B and the carriers 188 may be coordinated and  
synchronized with each other, as desired or appropriate for efficient operation of the machine

1 system. For example, the upper platen 176 may be driven to engage lower platen 178A as the  
support arm 185B is driven to pick up devices 10B from the lower platen 178B, and as the  
support arm 185A is releasing devices into the dispensers 181A. A suitable system and  
5 machine for transporting work pieces is described in U. S. Patent No. 8230989, entitled  
SHUTTLE MACHINE FOR MACHINE TOOL, the entire contents of which are hereby  
incorporated by reference.

[00100] The spent sheet material 167 downstream of the die press 179 is drawn  
downstream by a servo drive rollers 190 and collected on a waste roller 192 at the second end  
10 164 of the conveying platform 161.

[00101] Another embodiment of the present invention is illustrated in FIGS. 8A-8C. A  
device 400 has a thin sheet body 402 which has been formed with a raised center profile. The  
body 402 has a support portion 402 and an elevated planar center bridge portion 408. The  
support portion 402 is adapted to rest on skin above a sensitive underlying site, such as  
15 temple 132, as shown in FIG. 9. The support portion 402 includes an outer rim or base 450  
and radially extending L-shaped legs or posts 454 projecting therefrom that connect the base  
450 and the bridge portion 408. The base 450 is adapted to rest on and generally surround  
skin of a sensitive underlying site, such as temple 132, as shown in FIG. 9. Between adjacent  
pairs of legs is an opening 456. As better seen in FIGS. 8D-8F, each leg has a radial portion  
20 460 coplanar with the bridge portion 408 and an axial portion 462 extending between the  
radial portion and the base 450. The axial portion 462 may extend at an angle ranging  
between about 45 to 120 degrees, preferably about 60 to 100 degrees, and more preferably  
about 90 degrees, from the base 450. The plurality of legs 454 ranges between about two and  
five.

[00102] With reference to FIGS. 8A-8F, the illustrated embodiment of the device has three  
legs 454 positioned equidistance from each other (e.g., centered at about 0, 120 and 240  
degrees), and three openings 456. Moreover, each leg presents a 90 degree angle between the  
radial portion 460 and the axial portion 462, and also between the axial portion 462 and the  
30 base 450. Width of the legs can vary depending on the plurality of legs and the desired  
flexibility of the bridge portion 408. An inner surface 406 of the bridge portion 408 has an  
adhesion member or adhesive 426, for example, a coating or layer of adhesive, an adhesive  
tape or a micro suction cup tape, as described above. An inner surface of the rim 450 may  
also be provided with an adhesion member or adhesive to help secure the device on the skin.

[00103] In one embodiment, the outer radius  $r$  of the base 450 is 1.375 inches, the radius  $R$   
of the bridge portion 408 is 0.5 inch, the width  $W_A$  of the axial portion 462 is 0.625 inch, and  
the width  $W_B$  of the base 450 is 0.125 inch. The height  $H$  of the bridge portion 408 from the

1 base 450 is 0.1875 inch and the thickness of the body 402 throughout the device 10 is 0.015 inch.

5 [00104] The base 450 and the bridge portion 408 may each be any shape, for example, rectangular, polygonal, oval, or circular. In the illustrated embodiment, both the base and the bridge portion are circular.

10 [00105] In use, the adhesive 426 is exposed and the device 400 is placed over the target skin site with the base generally surrounding the site and the adhesive 426 facing the skin and tissue, as shown in FIG. 8D. Elevated by the legs 454, the bridge portion 408 is situated above the skin, separated by an air gap generally equal to the height H. With the device so positioned, pressure P is applied by the user (or an assistant) to the outer surface 404 of the bridge portion 408 toward the skin so as to deform the upper body 452 (including the bridge portion 408 and/or any of the legs 454), bring the bridge portion 408 into contact with the skin and allow the adhesive 426 to adhere to the skin, as shown in FIG. 8E.

15 [00106] When the pressure is removed and the upper body 452 is released, the elastically deformable body 402 rebounds and generally returns to an elevation at or near its original elevation wherein the bridge portion 408 lifts the adhered skin and tissue and reducing compression at the site.

20 [00107] As shown in FIG. 8D, the bridge portion 408 and the radial leg portion 460 may extend perpendicularly relative to the axial leg portion 462, or the portions 408 and 460 may have at least one predetermined curvature in a direction. As illustrated in FIG. 8F, device 400' has an upper body 462' with curvature in more than one axial direction to provide a concavity toward the inner surface 406 that forms an elevated dome.

25 [00108] The devices of the present invention may be worn at all times, or only a specified time periods, such as night time, during sleep. Each device may be reused so long as the adhesive is functional. If not, the device may be discarded, or new adhesive may be applied to the device over or in place of the spent adhesive. Due to the inexpensive cost of the device and its components, the device may be economically discarded as trash or for recycling.

30 [00109] With reference to FIG. 10, the device 400 can be manufactured as follows:

[00110] 1. Forming the device;

35 (a) Injection, press or vacuum forming the base 450, bridge portion 408 and the legs 454; or

(b) Providing a single flat sheet 470 of suitable material;

- 1 (i) Heating the sheet to smooth the sheet 370 and remove wrinkles or  
bends;  
1. Heating by passing through a heat tunnel 471; and/or  
2. Heating by heated roller(s) 472.
- 5 (ii) Stamping, die-cutting or otherwise cutting sheet to form the base 450,  
the bridge portion 408 and the legs 454;  
1. Die punching out the openings 456 to form the legs with die set  
473;

10 **[00111]** 2. Applying the adhesive 426 to the inner surface 406 of the bridge portion 408.

**[00112]** The stamping, die-cutting or otherwise cutting of the sheet may include both  
cutting of the base 450, bridge portion 408 and legs 454 from the sheet and  
reforming/reshaping to provide the curvature of the upper body 452 and/or angulation or  
bend in the leg 454 for elevating the bridge portion 408 from the base 450. The application  
15 of the adhesive 426 may occur before, during or after stamping, die-cutting or otherwise  
cutting of the sheet.

**[00113]** In yet another embodiment of the present invention, a device 500 may be worn as  
a band or sleeve encircling a limb or a portion thereof. With reference to FIG. 10, the device  
20 500 is elongated defining a length axis L and a width axis W. The device 500 has a generally  
rigid yet flexible main body 511 having a planar, generally rectangular form, and two  
fastening side portions 513, each having a generally rectangular form and adjoined to an  
opposing side edge 515 of the main body 511. The main body 511 may be constructed of the  
same aforementioned suitable materials. The side portion 513 may be constructed of an  
25 elastic, stretchable material or fabric. On an inner surface 506 of the main body 511, an  
adhesion member 526 is provided and situated between at least two projections 546 defining  
an elevated bridge portion 508.

**[00114]** In use, the device 500 is positioned on a limb, for example, a forearm (FIG. 12), a  
30 thigh or a foot (FIG. 13), with the exposed adhesion member 526 and projections 546 facing  
the skin above the treatment site. The side portions 513 are wrapped around the limb and  
releasably fastened to each other by fasteners 517, e.g., hook and loop fasteners, eye and  
hook fasteners, snap fasteners, etc. The device 500 in a neutral configuration presents the  
bridge portion 508 at an elevated position above the skin, the two separated by an air gap.  
35 When pressure is applied to outer surface 504 of the bridge portion 508, the device assumes a  
deformed configuration so that the adhesion member comes 526 into contact with the skin.  
When the pressure is removed, the device rebounds and the skin is lifted by the bridge

1       portion. The device 500 may have a slight predetermined curvature or concavity in the L axis  
toward the inner surface 506 to better conform to the limb.

5       [00115]   In a further embodiment of the present invention, a device 500' may be worn as a  
cuff on the wrist, as shown in FIG. 12. The device 500', as illustrated in FIG. 11, has a  
construction similar to that of the device 500 of FIG. 10, except that the device is smaller and  
has a pronounced predetermined curvature or concavity in the L axis toward the inner surface  
506 to better conform to the wrist.

10       [00116]   The present invention also includes a method of manufacturing a custom-fitted  
therapeutic device, wherein a mold of the treatment site, e.g., a palm, a forearm, a thigh, is  
made and a die set for manufacturing the device is customized according to the mold.

15       [00117]   The preceding description has been presented with reference to presently preferred  
embodiments of the invention. Workers skilled in the art and technology to which this  
invention pertains will appreciate that alterations and changes in the described structure may  
be practiced without meaningfully departing from the principal, spirit and scope of this  
invention. As understood by one of ordinary skill in the art, the drawings are not necessarily  
to scale. Dimensions of the devices may be modified to fit different sized users. As noted  
above, the device may have more than one adhesive or adhesive member which may be  
20       applied to different areas of the device beyond the bridge portion. Accordingly, the foregoing  
description should not be read as pertaining only to the precise structures described and  
illustrated in the accompanying drawings, but rather should be read consistent with and as  
support to the following claims which are to have their fullest and fair scope.

## 1 WHAT IS CLAIMED IS:

1. A therapeutic device adapted for application to skin covering a treatment site on a patient's body, comprising:

5 a generally rigid but elastically deformable body having at least one support portion and a bridge portion, the support portion adapted to rest on the skin, the bridge portion having an adhesive adapted to adhere to at least a portion of the skin,

10 wherein the body is adapted to assume a neutral configuration with the adhesive and the portion of the skin separated by an air gap, and an adhesion configuration with the portion of the skin adhering to the adhesive being lifted at the treatment site.

2. The device of claim 1, wherein the body is also adapted to assume a depressed configuration wherein the body is deformed from the neutral configuration with the bridge portion being depressed to bring the adhesive into contact with the portion of the skin.

15 3. The device of claim 2, wherein the neutral configuration supports the bridge portion at a highest elevation from the treatment site, the depressed configuration supports the bridge portion at a lowest elevation from the treatment site and the adhesion configuration supports the bridge portion at an in-between elevation from the treatment site.

20 4. The device of claim 1, wherein the portion of the skin to which the adhesive is adhered is stretched outwardly from the treatment site when the body assumes the adhesion configuration.

25 5. The device of claim 1, wherein the adhesive includes double sided adhesive tape.

6. The device of claim 1, wherein the adhesive includes at least one suction cup.

7. The device of claim 1, wherein the adhesive includes micro-suction cup tape.

30 8. The device of claim 1, wherein the device is adapted for application to a palm of the patient's body with the device positioned on the palm and the bridge portion longitudinally aligned with a median nerve of the palm.

35 9. The device of claim 8, wherein the adhesive is adapted for adhesion to skin below the device and above the median nerve.

1           10. The device of claim 1, wherein the at least support portion includes a generally  
planar portion.

5           11. The device of claim 1, wherein the at least one support portion includes an outer  
rim and at least one L-shaped leg extending between the bridge portion and the rim.

          12. The device of claim 11, wherein the L-shaped leg portion includes a radial leg  
portion and an axial leg portion.

10          13. The device of claim 12, wherein the radial leg portion extends between the bridge  
portion and the axial leg portion, and the axial leg portion extends between the radial leg  
portion and the outer rim.

15          14. The device of claim 11, wherein the outer rim has a circular shape and the bridge  
portion has a circular shape.

          15. The device of claim 11, wherein the support portion has at least three L-shaped  
leg portions.

20          16. The device of claim 1, wherein the body has a butterfly configuration, with a first  
support portion extending from one side of the bridge portion and a second support portion  
extending from an opposing side of the bridge portion.

          17. The device of claim 1, wherein the body has a generally rectangular  
configuration.

25          18. The device of claim 1, wherein the body has at least one predetermined curvature.

          19. The device of claim 1, wherein the body has an outer surface and an inner  
surface, the body having a concavity toward the inner surface.

30          20. The device of claim 1, wherein the device is adapted for application to a forehead  
region of the patient's body.

35          21. The device of claim 20, wherein the device is adapted for application to a temple  
region of the forehead region.

          22. The device of claim 1, wherein at least one longitudinal edge of the body is  
curved.

1

23. A machine system for forming devices out of a sheet material, comprising:

a conveying platform defining a conveying pathway between a first end and a second end and a downstream direction from the first end to the second end;

5

a dispenser roller disposed at or near the first end, the dispenser roller adapted to dispense the sheet material;

an applicator roller disposed downstream of the dispenser roller, the applicator roller adapted to apply at least one adhesive tape to the sheet material;

10

a die press disposed downstream of the applicator roller, the die press having an upper platen and at least a first and a second lower platens to die cut the sheet material into the devices;

at least a first and second transport members;

15

a carrier supporting the first and second lower platens and configured to position the first and second lower platens in a first configuration wherein the first lower platen is below the upper platen and the second lower platen is below the first transport member, and a second configuration wherein the first lower platen is below the second transport member and the second lower platen is below the upper platen.

20

24. The machine system of claim 23, wherein the carrier is adapted to translate the first and second lower platens along a pathway generally transverse to the conveying pathway.

25

25. The machine system of claim 23, further comprising at least a dispenser tray member and a second carrier adapted translate the dispenser tray member along a pathway generally parallel to the conveying pathway.

30

26. The machine system of claim 23, wherein the first transport member is positioned off one side of the conveying pathway and the second transport member is positioned off an opposing side of the conveying pathway.

27. The machine system of claim 23, further comprising a smoother roller disposed between the dispenser roller and the applicator roller.

35

28. The machine system of claim 23, further comprising a waste roller disposed at or near the second end.

29. The machine system of claim 23, wherein each transport member comprises a support arm and a plurality of grippers, each gripper adapted to transport a device.

1/13

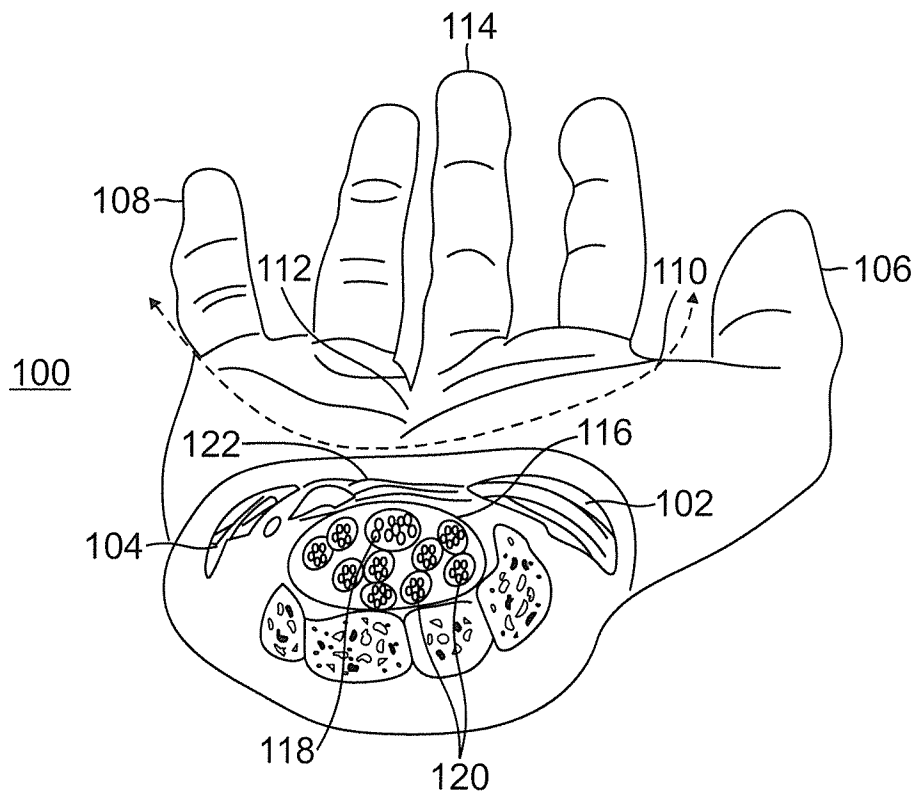


FIG. 1

2/13

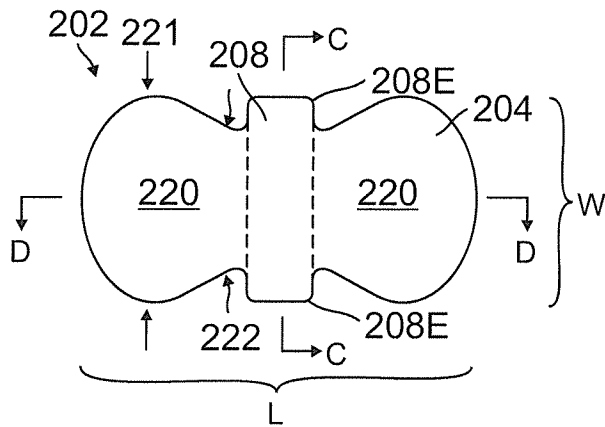


FIG. 2A

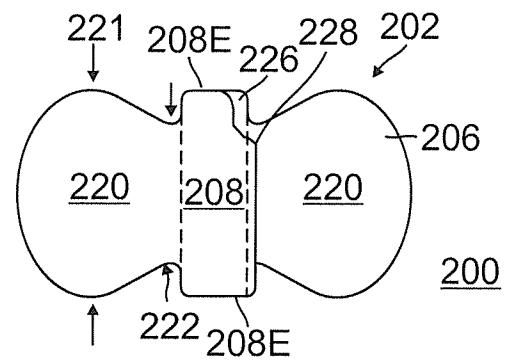


FIG. 2B

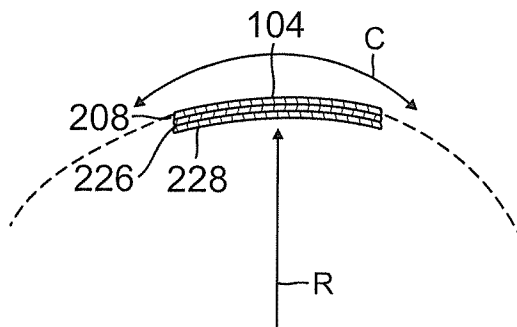


FIG. 2C

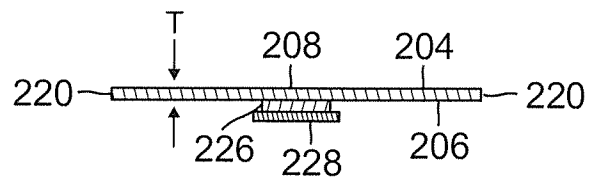


FIG. 2D

3/13

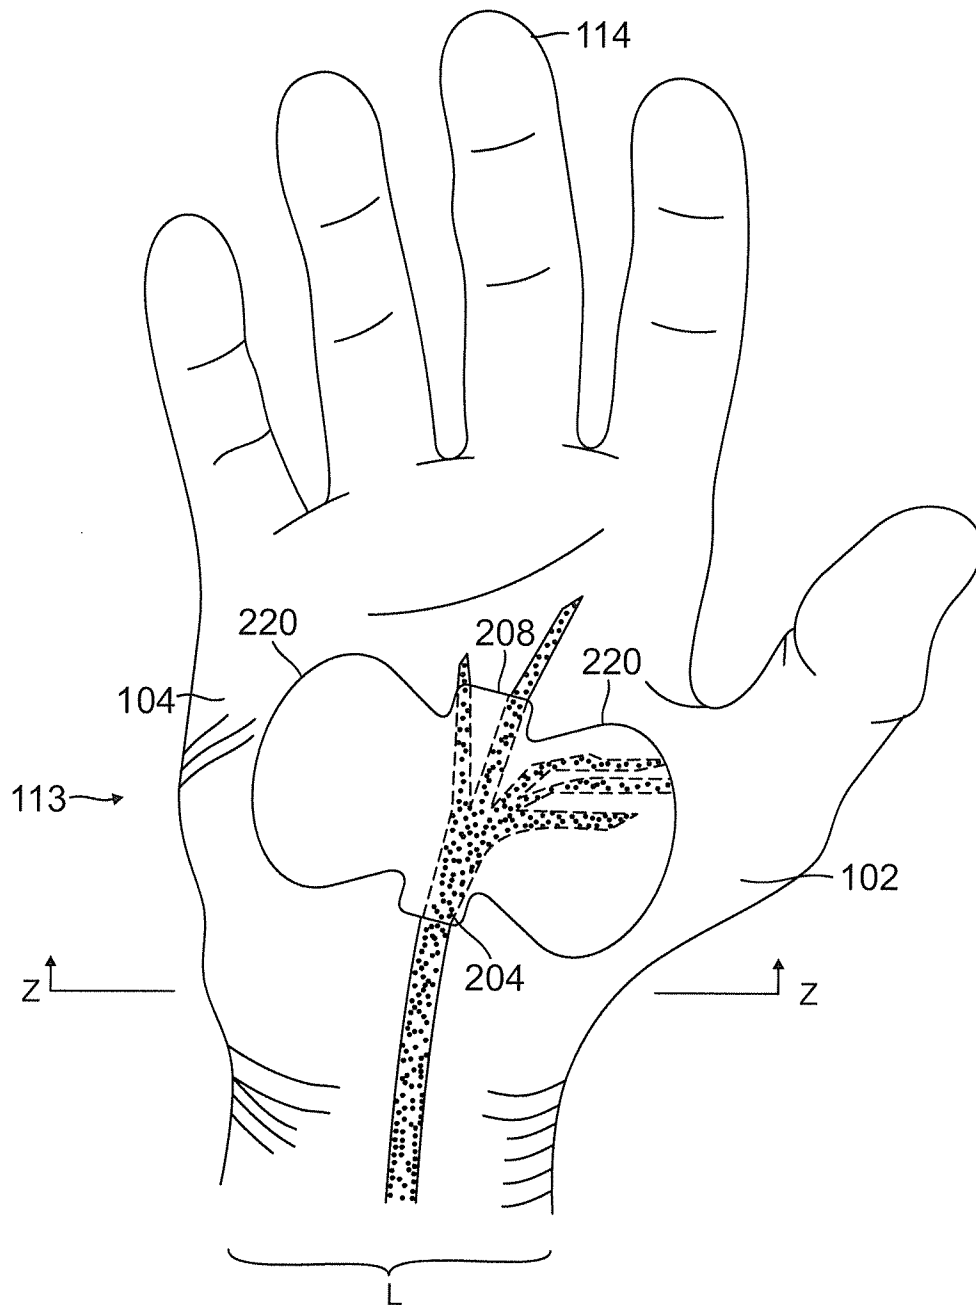


FIG. 3

4/13

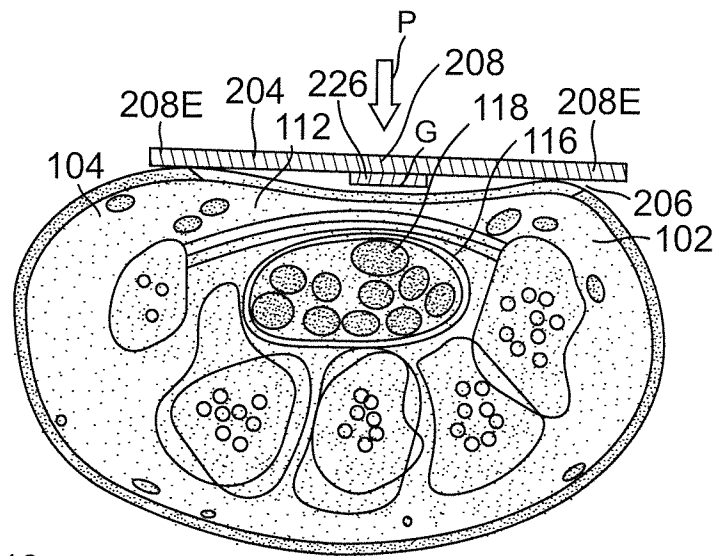


FIG. 3A

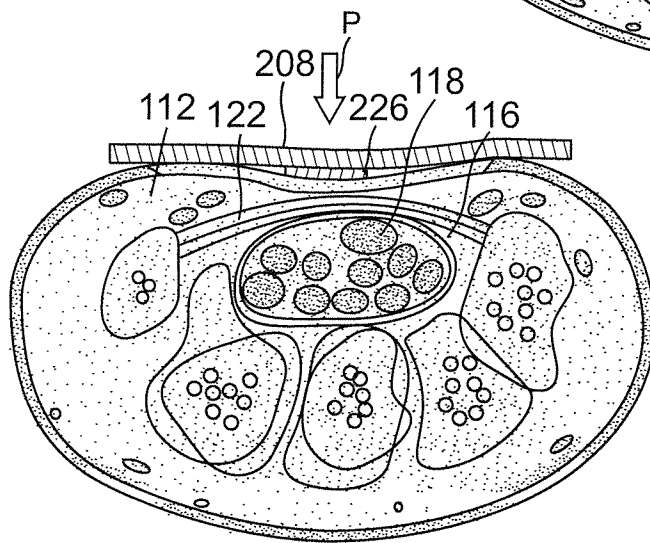


FIG. 3B

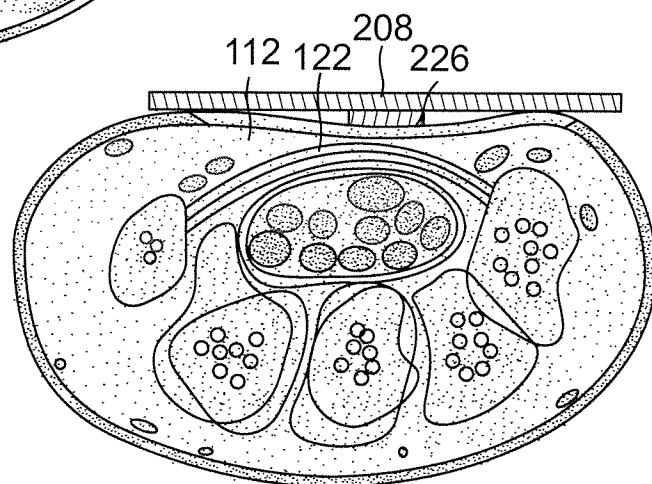


FIG. 3C

5/13

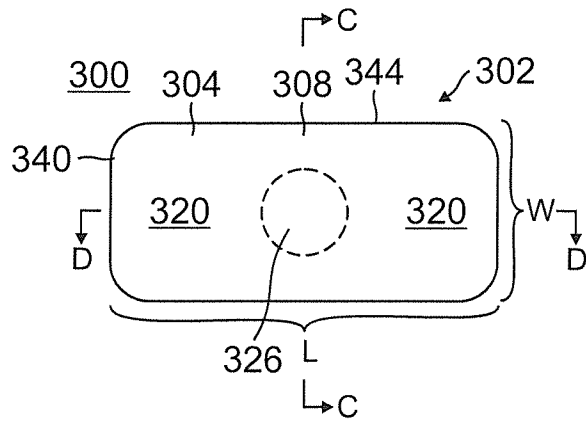


FIG. 4A

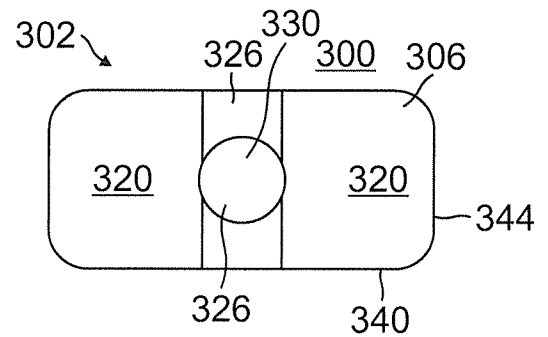


FIG. 4B




FIG. 4C

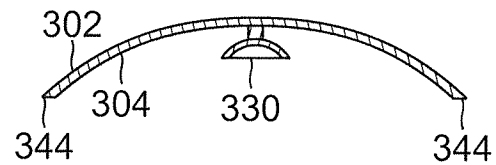


FIG. 4D

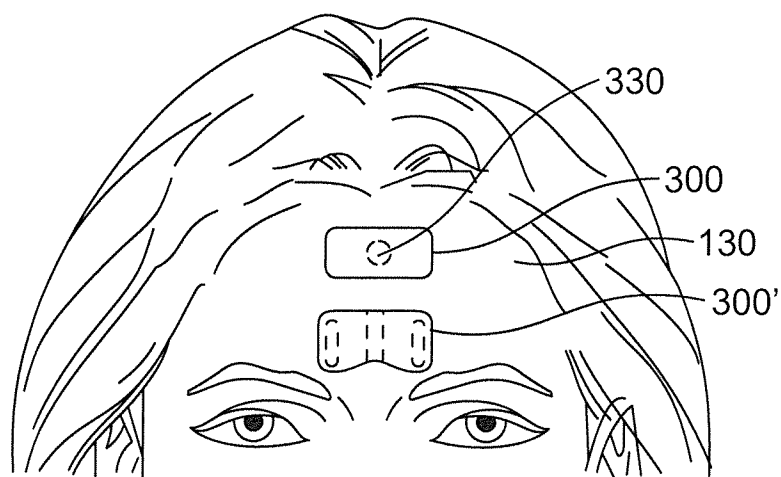


FIG. 6

6/13

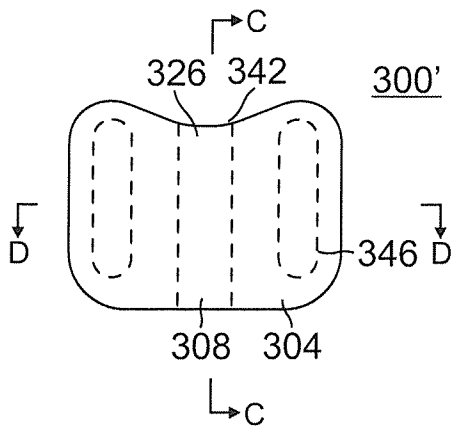


FIG. 5A

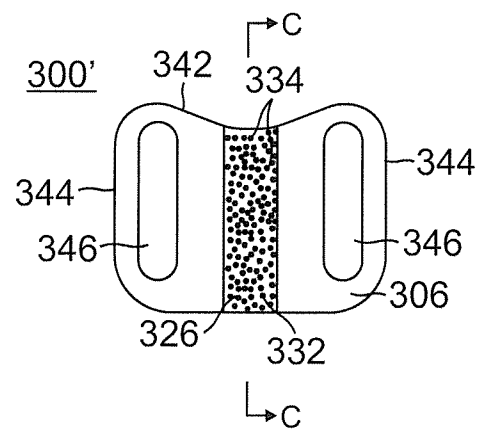


FIG. 5B




FIG. 5C




FIG. 5D

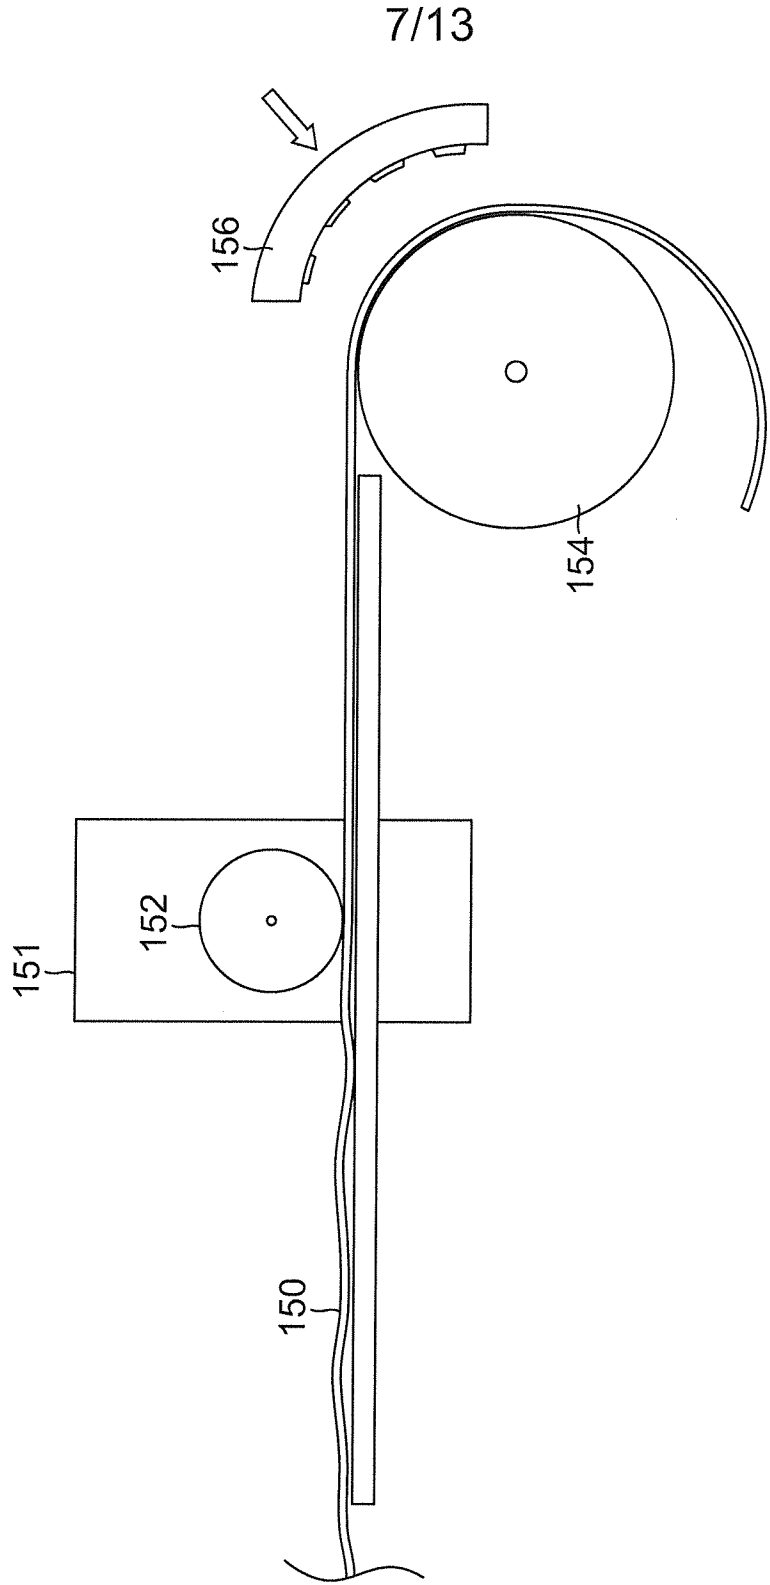


FIG. 7

8/13

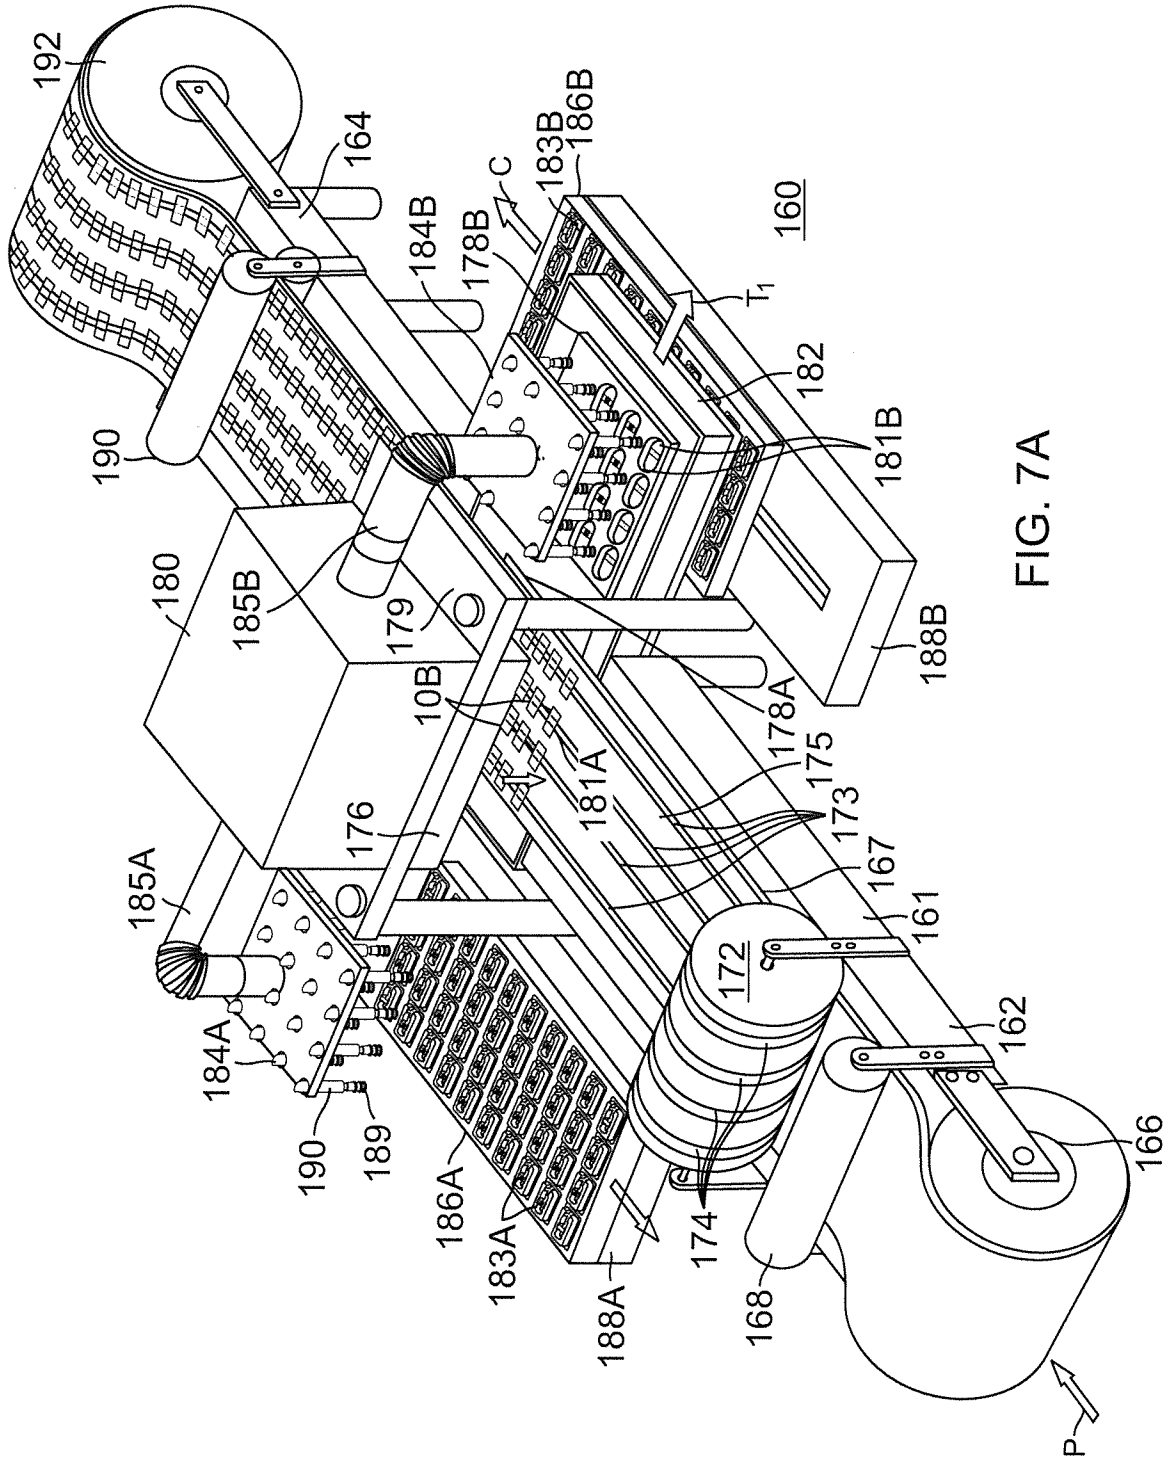


FIG. 7A

9/13

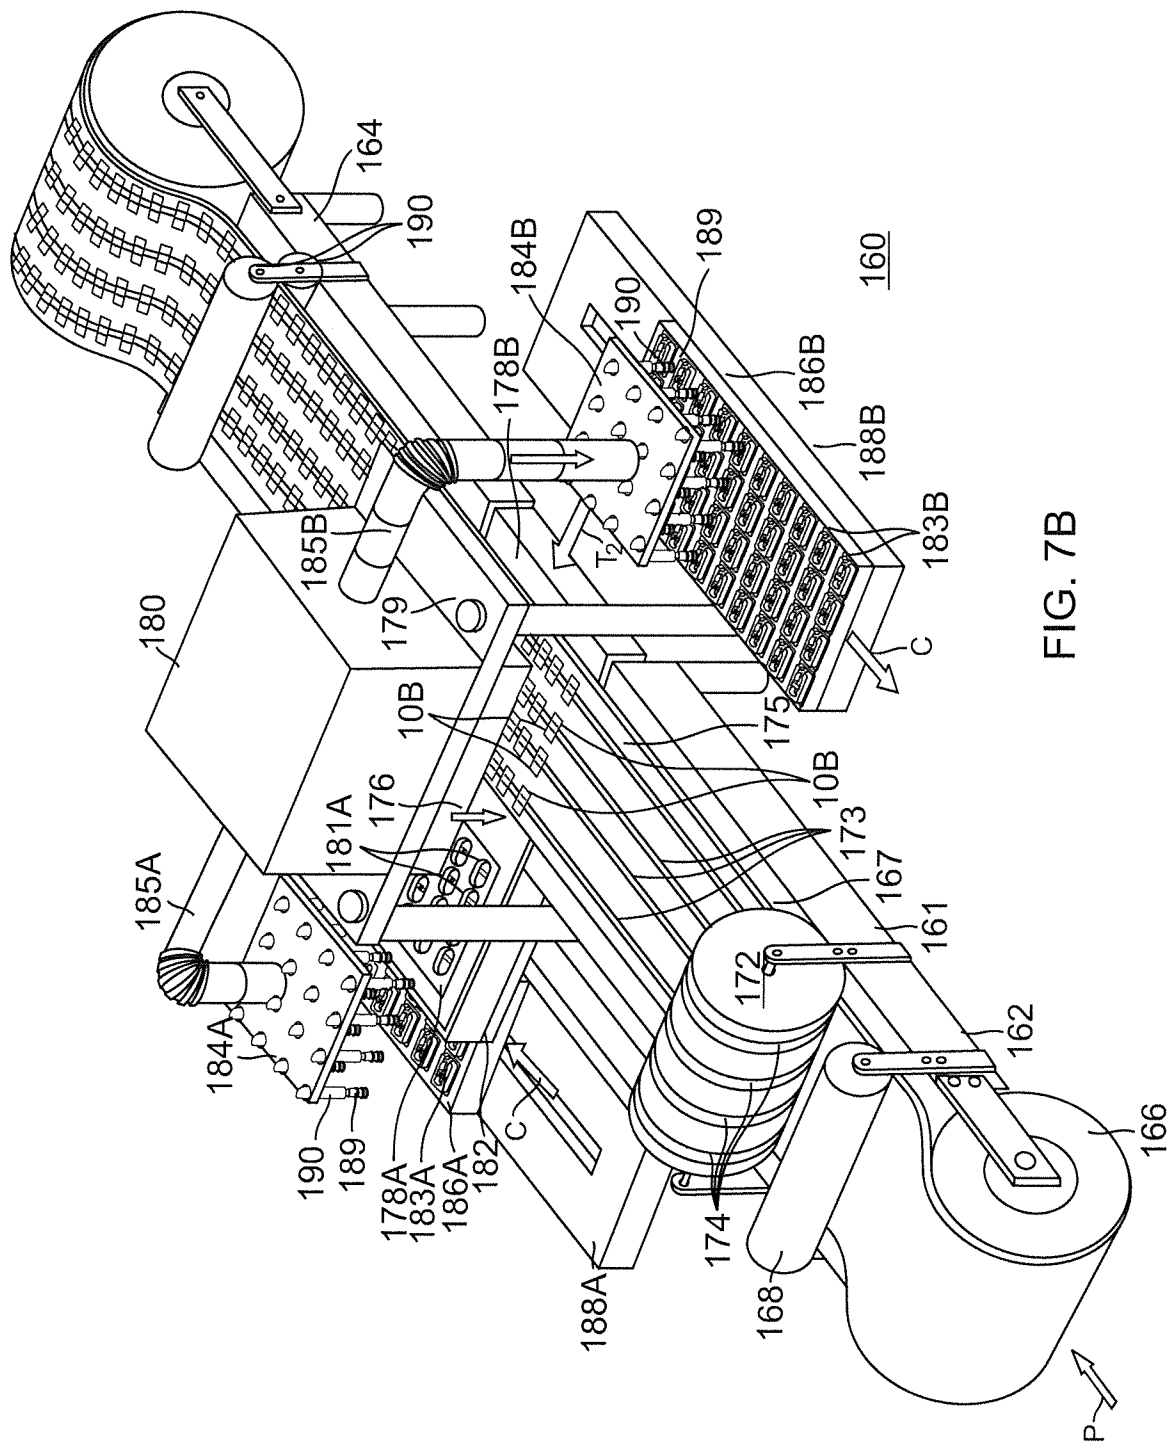


FIG. 7B

10/13

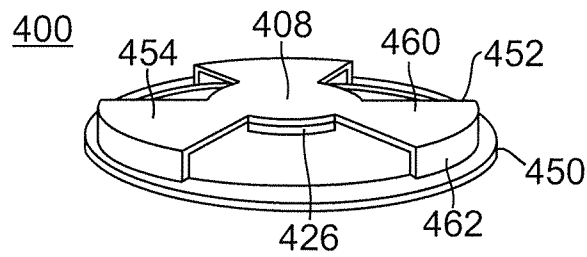


FIG. 8A

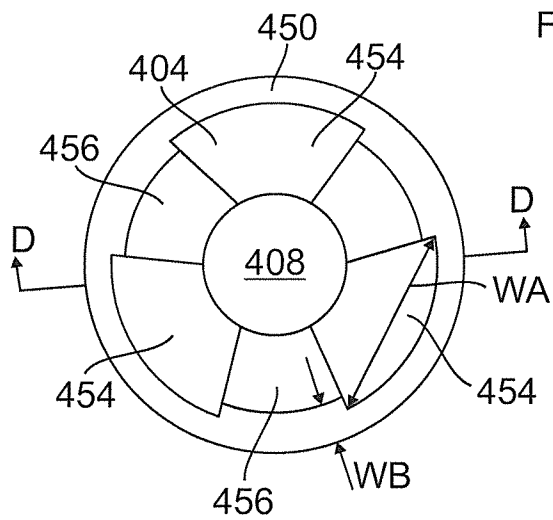


FIG. 8B

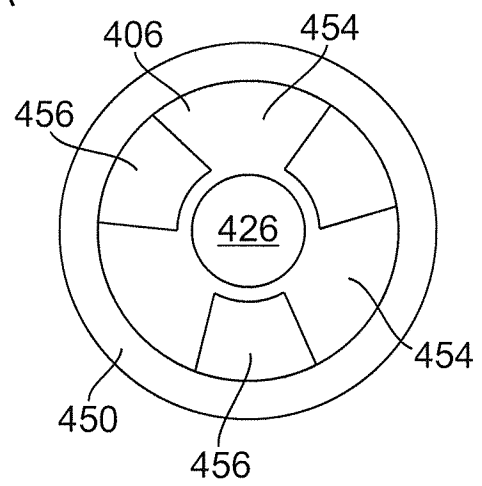


FIG. 8C

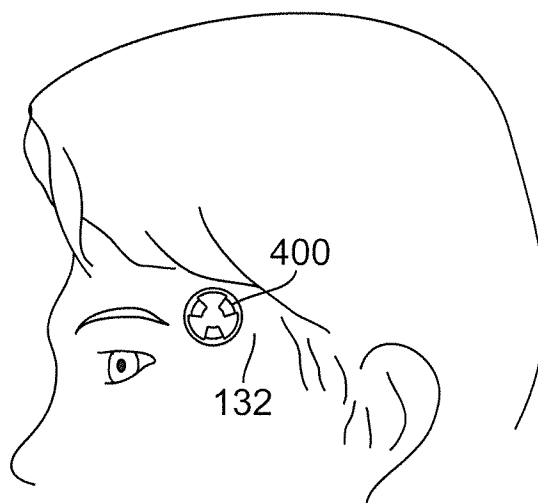


FIG. 9

11/13

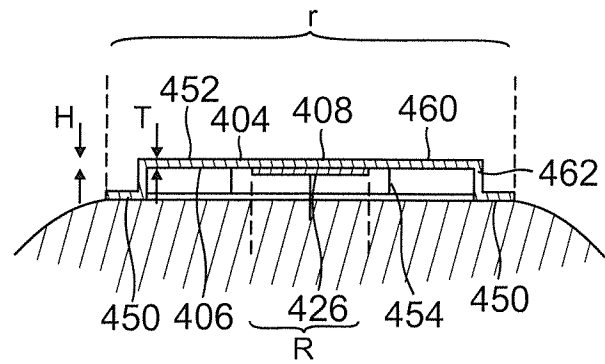


FIG. 8D

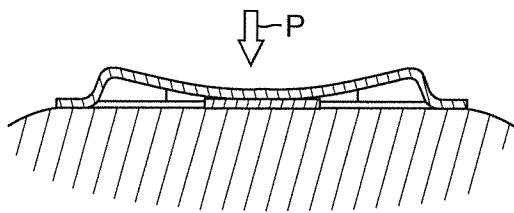


FIG. 8E

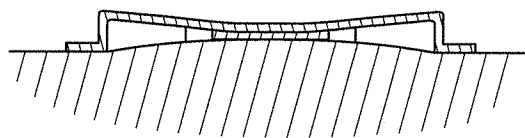


FIG. 8F

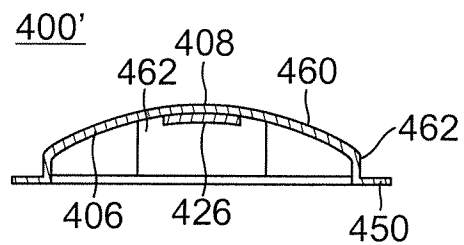


FIG. 8G

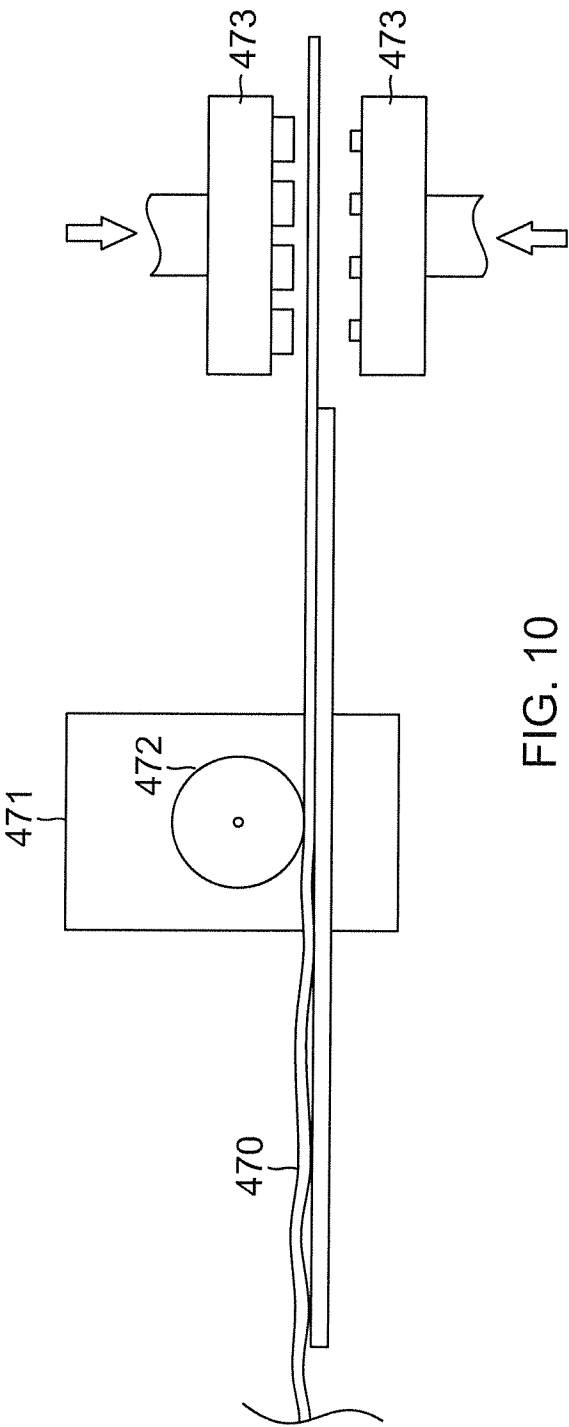


FIG. 10

13/13

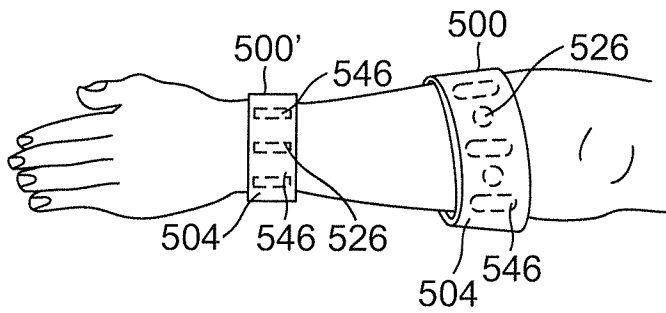


FIG. 12

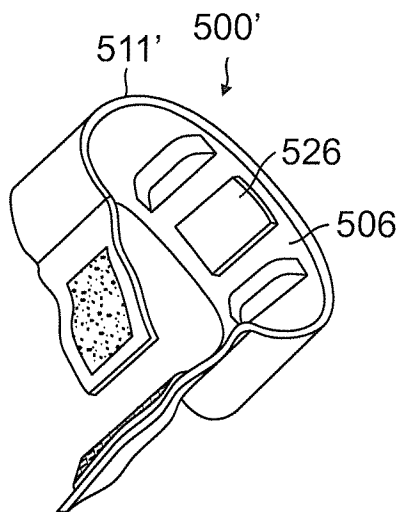


FIG. 14

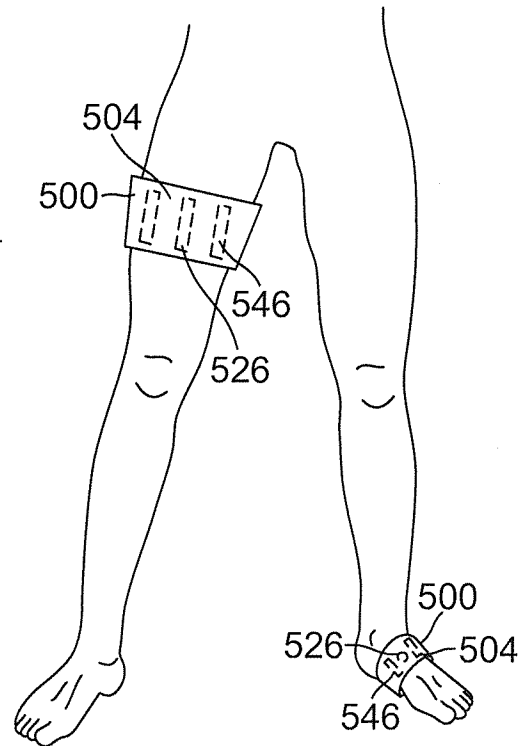


FIG. 13

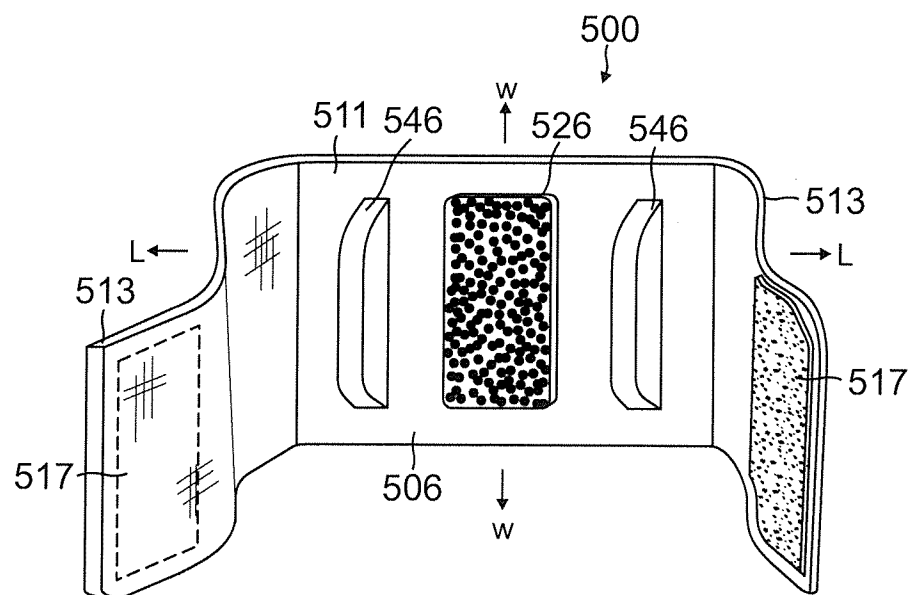


FIG. 11

**A. CLASSIFICATION OF SUBJECT MATTER****A61F 13/02(2006.01)i, A61K 9/70(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

A61F 13/02; A61F 5/37; A61F 13/00; A61F 5/00; A61K 9/70

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) &amp; Keywords: carpal tunnel syndrom, CTS, skin, lift, adhesive, tape

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

| Category* | Citation of document, with indication, where appropriate, of the relevant passages                                                   | Relevant to claim No. |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| A         | US 7195605 B1 (WHITE, C. H.) 27 March 2007<br>See abstract; figures 1-3; column 3, lines 26-29; and column 4, lines 19-25.           | 1-29                  |
| A         | US 6315748 B1 (MORGAN, JR. C. E.) 13 November 2001<br>See abstract; figures 1-3; column 3, line 60 - column 4, line 19; and claim 1. | 1-29                  |
| A         | US 6200286 B1 (ZAMANI, M. H.) 13 March 2001<br>See abstract; figure 1; and claim 1.                                                  | 1-29                  |
| A         | US 5810753 A (EBERBACH, M. A.) 22 September 1998<br>See abstract; figure 1; and claim 1.                                             | 1-29                  |
| A         | US 6006751 A (SPITZER, A. R.) 28 December 1999<br>See abstract; figure 1; and claim 1.                                               | 1-29                  |



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

26 June 2013 (26.06.2013)

Date of mailing of the international search report

**26 June 2013 (26.06.2013)**

Name and mailing address of the ISA/KR

Korean Intellectual Property Office  
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City,  
302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

HAN, In Ho

Telephone No. 82-42-481-3362



**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/US2013/028099**

| Patent document<br>cited in search report | Publication<br>date | Patent family<br>member(s)                                                                               | Publication<br>date                                                              |
|-------------------------------------------|---------------------|----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| US 7195605 B1                             | 27.03.2007          | None                                                                                                     |                                                                                  |
| US 6315748 B1                             | 13.11.2001          | AU 2001-85482 A1<br>CA 2422084 A1<br>WO 02-22058 A1                                                      | 26.03.2002<br>21.03.2002<br>21.03.2002                                           |
| US 6200286 B1                             | 13.03.2001          | None                                                                                                     |                                                                                  |
| US 05810753 A                             | 22.09.1998          | None                                                                                                     |                                                                                  |
| US 06006751 A                             | 28.12.1999          | AU 1998-88424 A1<br>AU 1998-88424 B2<br>CA 2278389 A1<br>EP 0988841 A2<br>EP 0988841 A3<br>EP 0988841 B1 | 17.02.2000<br>18.04.2002<br>22.01.2000<br>29.03.2000<br>03.01.2001<br>04.05.2005 |