



(22) Date de dépôt/Filing Date: 2012/06/01

(41) Mise à la disp. pub./Open to Public Insp.: 2013/02/03

(45) Date de délivrance/Issue Date: 2021/02/09

(30) Priorité/Priority: 2011/08/03 (GB1113378.2)

(51) Cl.Int./Int.Cl. *H01M 4/139* (2010.01),  
*H01M 4/04* (2006.01)

(72) Inventeurs/Inventors:  
BUQA, HILMI, CH;  
SCHEIFELE, WERNER, CH;  
BLANC, PIERRE, CH

(73) Propriétaire/Owner:  
LECLANCHE SA, CH

(74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : SUSPENSION AQUEUSE POUR ELECTRODES D'ACCUMULATEUR

(54) Title: AQUEOUS SLURRY FOR BATTERY ELECTRODES

(57) **Abrégé/Abstract:**

The present invention relates to a slurry or paste for the manufacture of electrodes for secondary batteries such as lithium ion containing electrochemical cells. The slurry comprises a water based binder with CMC, SBR and PVDF as binder materials.

**Abstract**

- 5 The present invention relates to a slurry or paste for the manufacture of electrodes for secondary batteries such as lithium ion containing electrochemical cells. The slurry comprises a water based binder with CMC, SBR and PVDF as binder materials.

## AQUEOUS SLURRY FOR BATTERY ELECTRODES

[0001] This application claims priority based on United Kingdom Patent Application  
5 1113378.2 entitled "AQUEOUS SLURRY FOR BATTERY ELECTRODES" filed  
August 3, 2011.

### Description

#### 10 Field of the invention

[0002] The present invention relates to electrodes for secondary batteries. In particular,  
the present disclosure relates to slurries or pastes for the use in lithium ion containing  
electrochemical cells.

#### 15 Introduction and Related art

[0003] Electrodes for electrochemical cells are often manufactured by attaching an  
electrochemically active electrode material to a current collector. Known current  
collectors are rigid supports or flexible foils made from a conducting material. Examples  
for widely used current collector materials include copper or aluminium but other  
20 materials may be used. Methods to attach the electrochemical active electrode material to  
the current collector comprise lamination, gluing using adhesives or coating. These  
methods for manufacturing electrodes are widely used in the art.

[0004] A large variety of electrochemically activatable or active electrode materials is  
25 known for manufacturing anodes and cathodes in different battery systems and  
depending on the application of the battery. The electrochemical active electrode  
material is manufactured as a slurry or paste and subsequently coated onto the current  
collector or the slurry is manufactured as a self-supporting layer which is later attached  
to the current collector.

30

[0005] The slurry or paste usually comprises a mixture of an electrochemically  
activatable or active material and a binder material for forming the paste/slurry. Further

components are often added, such as conductive additives (i.e. carbon black, graphite, carbon fibers, VGCF (vapour grown carbon fibers), etc.)

[0006] A large number of binder materials is known in the art. Polyvinylidene fluoride (PVDF) or polyvinyliden fluoride hexafluoropropylene (PVDF-HFP) copolymers have been found to have excellent chemical and mechanical properties when used as a binder material in a slurry for positive and negative electrodes. In particular, PVDF provides a good electrochemical stability and high adhesion to the electrode materials and to current collectors. PVDF is therefore a preferred binder material for electrode slurries. PVDF, however, has the disadvantage that it can only be dissolved in some specific organic solvent such as acetone has to be used which requires specific handling, production standards and recycling of the organic solvents in an environmentally-friendly way. PVDF is also known for some long term instability in the cell chemistry.

[0007] The use of aqueous solutions instead of organic solvents is preferred for environmental and handling reasons and water-based slurries have been considered. Possible binders for water-based slurries known in the art comprise carboxymethyl cellulose (CMC) and styrene-butadiene rubber (SBR). The publication of H. Buqa et al. "Study of a styrene butadiene rubber and sodium methyl cellulose as binder for negative electrodes in lithium-ion batteries" in Journal of Power Sources, 161 (2006), 617-622 describes the use of SBR and CMC as binders in aqueous solutions and their electrochemical performances compared to PVDF in organic solvent.

[0008] EP 0 907 214, corresponding to US 6,183,907, compares acrylonitrile-butadiene rubber combined with CMC, combinations of CMC and SBR as binder in an aqueous solution to polyvinylidene fluoride in an organic solvent.

[0009] JP 2000 357505A describes the use of PVDF in an aqueous dispersion acting as binder material. The organic solvent in N-methyl-2-pyrrolidone (NMP) is added to the solution.

[0010] JP 2008 135334 suggests to use a polymeric layer made from PVDF onto which a slurry comprising CMC and SBR as binder materials is coated.

[0011] These and other attempts have been made to combine PVDF with water based slurries in order to use the known advantages of PVDF as a binder for electrode slurries without using organic solvents that require specific treatment during manufacture, but no successful implementation has been shown up to now.

[0012] It is an object of the present invention to overcome the disadvantages of prior art.

#### Summary of the invention

[0013] The present disclosure provides a composition for a slurry or a slurry for the manufacture of an electrode for an electrochemical cell. The electrochemical cell can be an lithium ion cell and can be a primary or a secondary battery. The slurry comprises a combination of at least three of polyacrylic acid (PAA), carboxymethyl cellulose (CMC), styrene butadiene rubber (SBR) and polyvinylidene fluoride (PVDF) in an aqueous solution. The slurry further comprises an electrochemical active or activatable compound. In this way, PVDF can be used in a water-based slurry, which allows for easier handling and less environmental pollution and reduced costs while keeping the chemical and electrochemical advantages of PVDF, i.e. the electrochemical stability, possibility of lamination, lifetime stability, reduced binder content enables higher C-rates, etc. The combination of PVDF with SBR and CMC or PAA has also good adhesive properties allowing lamination and/or coating of the slurry without the use of additional adhesives.

[0014] It has been found that the combination consisting of PVDF with CMC and SBR in an aqueous solution can be used as binder in a positive or negative electrode slurry, wherein the CMC and SBR are used as binder and PVDF is used as lamination agent. .

30

[0015] Alternatively, CMC or SBR may be replaced by PAA as binder material. A combination of PVDF with PAA and SBR can equally be used in a positive or negative

electrode slurry. PAA may be used to reduce the PH of the slurry which helps to avoid or suppress corrosion.

5 [0016] A combination of PVDF with SBR, CMC and PAA may also be used in an aqueous solution combining the advantages of CMC and PAA.

[0017] A latex may be dispersed in this aqueous solution to stabilise the PVDF in the aqueous solution. Using a PVDF-latex dispersion makes it possible to use PVDF in aqueous solutions, keeping the advantages of PVDF as lamination agent and in the same  
10 time avoiding the use of organic solvents.

[0018] No organic solvents or other additional components besides latex are needed or used to dissolve the PVDF in the aqueous solution.

15 [0019] The aqueous solution is de-ionized water.

[0020] A concentration of about 0.5 % to about 10 % by weight of each one of the CMC, SBR and the PVDF may be used for a stable slurry with good chemical and electrical properties.

20

[0021] The composition of the slurry does not require organic solvents, but such solvents could be used without changing the spirit of the patent. The slurries may be free of any organic solvent and the expensive and restrictive and complicated handling of organic solvents is avoided or reduced during the manufacture of the slurry.

25

[0022] In many cases it is important to have a water free effective electrode material before the electrolyte is added. The slurry or the manufactured electrode may therefore be dried.

30 [0023] The electrochemically activatable material may comprise at least one of graphite, titanate, lithium metal oxides such as LMO (lithium manganese oxide), Li-NCA (lithium nickel cobalt aluminium oxide), LCO (lithium cobalt oxide), LNCM

(lithium nickel cobalt manganese oxide), LFP (lithium iron phosphate) and other metal oxides or other materials known in the art, as well as their blends. The slurry may be used for a positive electrode and/or for a negative electrode.

5 [0024] The present disclosure also relates to a method or the manufacture of an electrode for an electrochemical cell. The method comprises preparing a slurry comprising a combination of at least three of the PAA CMC, SBR and PVDF in an aqueous solution, coating or laminating the slurry on a current collector, and drying the slurry. Latex may be added to the aqueous solution to stabilise the slurry.

10

[0025] Latex may be used in a dispersion with the PVDF in the aqueous solution. The aqueous solution may further comprise at least two of the PAA; CMC, SBR may be added to the dispersion

15 [0026] The method may further comprise adding a non-aqueous electrolyte to the electrode.

[0027] The method and the slurry have the advantage that only aqueous solutions are used that can be easily handled and a less cost-intensive use.

20

#### Brief description of the figures

[0028] The present invention as defined by the claims will now be described with respect to detailed examples and with reference to the attached figures in which:

25 Figure 1 shows cycle life characteristics for electrochemical cells containing Li-NCO cathodes and graphite anode prepared with water based binder mixture; and

Figure 2 shows a discharge rate capability behaviour of the Li-NCO/Graphite electrochemical cell of Figure 1.

30

### Detailed Description

[0029] An electrochemical cell according to the present disclosure can be prepared by standard methods known to a person skilled in the art. It is common knowledge to a person skilled in the art to use slurries for manufacturing positive or negative electrodes i.e. cathodes or anodes. The slurry may be coated onto a current collector. The current collector can be a metal foil and can comprise materials such as copper or aluminium but other current collectors can be used with the present invention.

[0030] A slurry according to the present disclosure is prepared by mixing a binder with an active electrode material in an aqueous solution. Further components may be added.

[0031] The binder comprises a composition of carboxymethyl cellulose (CMC), styrene butadiene rubber (SBR) as binder and polyvinylidene fluoride (PVDF) as lamination agent. No other binder materials are used. Alternatively or in addition to CMC, polyacrylic acid (PAA) may be used to reduce the PH of the slurry. The total amount of binder in the slurry can be about 0.5 % to about 30 % by weight. Good results have been obtained with a total amount of binder in the slurry of about 10% by weight. The binder can be mixed in an aqueous solution made from de-ionized water. Latex at a concentration of about 0.5-10% may be added to stabilize the aqueous PVDF dispersion.

[0032] The slurry comprises an active electrode material and other components such as carbon black and optionally further additives.

[0033] Example for anode active electrode material may be graphite. Examples for a cathode active electrode material comprises LFP, LNCM, LCO, Li-NCA, LMO or other metal oxides and their blends.

### Example 1 - Anode electrode slurry

[0034] A graphite electrode slurry may comprise 2% CMC or PAA, 5% SBR, 3% PVDF, 2% carbon black and 88% graphite. The above components may be mixed to a



slurry in an aqueous solution. The aqueous solution may be deionised water. Latex may be added to the solution in order to maintain the PVDF in a stable dispersion. The materials used are commercially available. No other materials are used. The water contents depends on active materials, binder and other conductive materials and their concentration used in the slurry.

#### Example 2 - cathode electrode slurry

[0035] A cathode electrode slurry may be mixed by using 4% CMC or PAA, 6% SBR, 3% PVDF, 6% carbon black and 88% by weight of LFP or another metal oxide. Latex may be added to the solution in order to maintain the PVDF in a stable dispersion. The Li-NCO presented in this draft is prepared using PVDF as Binder and acetone as a solvent. Nevertheless, the Li-NCO electrodes can be prepared using: NMP, water, acetone, DMAC or other organic solvents.

[0036] The above slurries have been coated on an anode current collector and onto a cathode count collector, respectively. The current collector can be made from any known material such as for example aluminium or copper and can be in form of a foil. The cathode and the anode produced in this way were inserted in an electrochemical cell, separated by a separator.

[0037] Electrochemical cells produced in such a manner have been tested for their cycle life characteristics and for their discharge rate capability behaviour depending on the temperature.

[0038] Fig. 1 shows cycle life characteristics for electrochemical cells containing Li-NCO cathodes and graphite anodes prepared with a water based binder mixture. The slurry is prepared using PVDF as a binder and acetone as a solvent. The capacity retention is constant over at least two hundred charging and recharging cycles indicating a good cycle life of electrochemical cells based on water based slurries.

[0039] Fig. 2 shows a discharge rate capability behaviour of Li-NCO/graphite cells. The graphite electrodes were prepared with the water based binder mixture of example 1. The results indicate that there are no differences in using water based slurries compared to slurries based on organic solvents or other slurries. The use of the water based slurries therefore allows to reduce or avoid the use of organic solvents in the slurries facilitating the manufacture of the slurries.

[0040] It should be noted that organic solvent free slurries can be prepared. However, a certain concentration of organic solvents can be used in some applications of the present disclosure. The organic solvent is, however, not necessary for dissolving the binder material and the binder can be used in the aqueous solution.

[0041] While the above description of a detailed example has been given for illustrative purposes only, other active electrode materials can be used with, CMC, SBR and PVDF as binder materials in an aqueous solution. A person skilled in the art will optimize the concentrations of CMC, SBR and PVDF depending on the active electrode material used and on the desired properties of the slurry.

### **Claims**

- 5        1. A slurry for the manufacture of an electrode for a lithium ion containing  
electrochemical cell, an organic solvent free slurry comprising a combination of  
polyvinylidene fluoride (PVDF) and styrene-butadiene rubber (SBR) and at least  
one of polyacrylic acid (PAA) and carboxymethyl cellulose (CMC) in an aqueous  
solution, and an electrochemically active material.
- 10       2. The slurry of claim 1, further comprising latex in the aqueous solution.
3. The slurry of claim 2, comprising a dispersion of the polyvinylidene fluoride  
(PVDF) and the latex in the aqueous solution.
- 15       4. The slurry of any one of claims 1 to 3, wherein in the aqueous solution comprises  
de-ionized water.
- 20       5. The slurry of any one of claims 1 to 4, wherein the concentration of each one of  
the polyacrylic acid (PAA), the carboxymethyl cellulose, the styrene-butadiene  
rubber and the polyvinylidene fluoride is about 0.5% to about 10% by weight.
- 25       6. The slurry of any one of claims 1 to 5, wherein the electrochemically active  
material comprises at least one of graphite, titanate, lithium iron phosphate,  
lithium metal oxides including lithium manganese oxide, lithium nickel cobalt  
aluminium oxide, lithium cobalt oxide, lithium nickel cobalt manganese oxide, or  
other metal oxides, as well as their blends.
- 30       7. A method for the manufacture of an electrode for use in a lithium ion containing  
electrochemical cell, the method comprising the steps of:  
preparing an organic solvent free slurry comprising a combination of  
polyvinylidene fluoride (PVDF) and styrene-butadiene rubber (SBR) and at least

one of polyacrylic acid (PAA) and carboxymethyl cellulose (CMC) as binder and an electrochemically active material in an aqueous solution, coating or laminating the slurry on a current collector.

- 5        8. The method of claim 7, wherein preparing the slurry comprises dispersing latex  
in the aqueous solution in order to maintain the PVDF in a stable dispersion.
9. The method of claim 7 or 8, wherein the concentration of each one of the  
polyacrylic acid (PAA), the carboxymethyl cellulose, the styrene-butadiene  
10       rubber and the polyvinylidene fluoride is about 0.5% to about 10% by weight.
10. The method of any one of claims 7 to 9, further comprising drying the slurry.

1 / 2

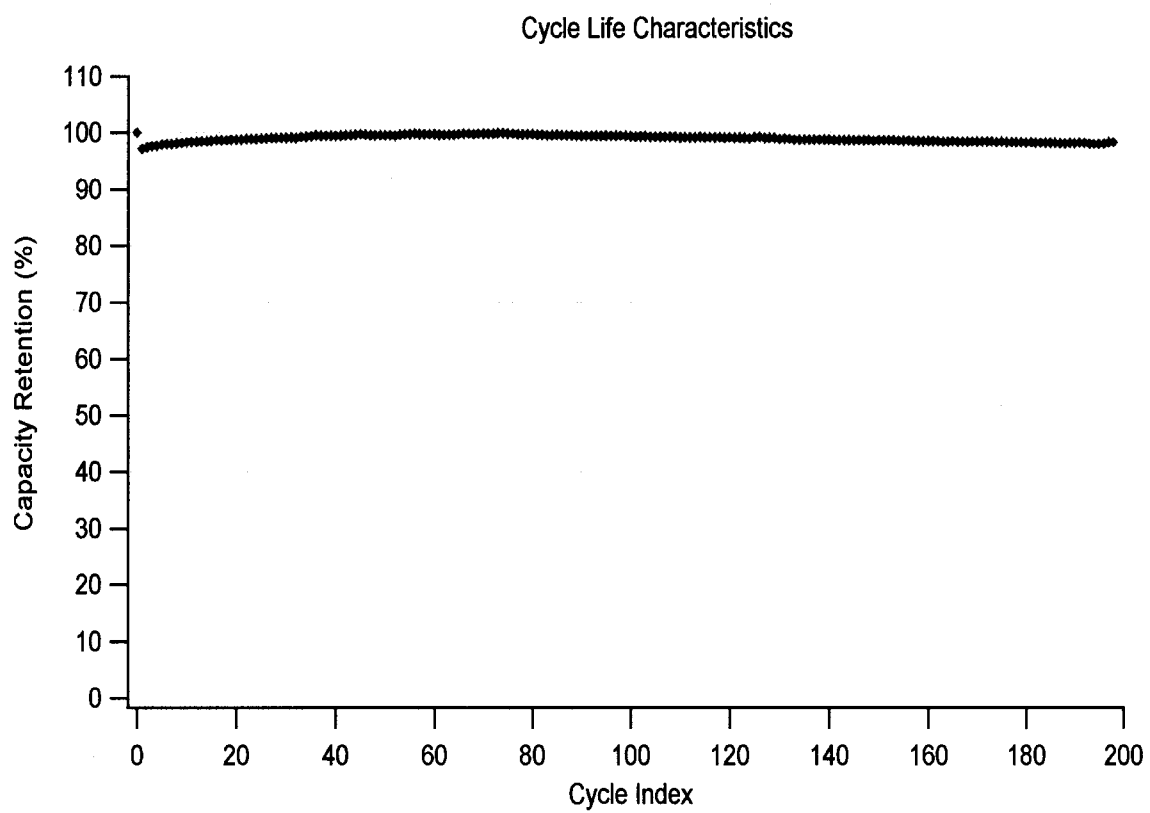


Fig. 1

2 / 2

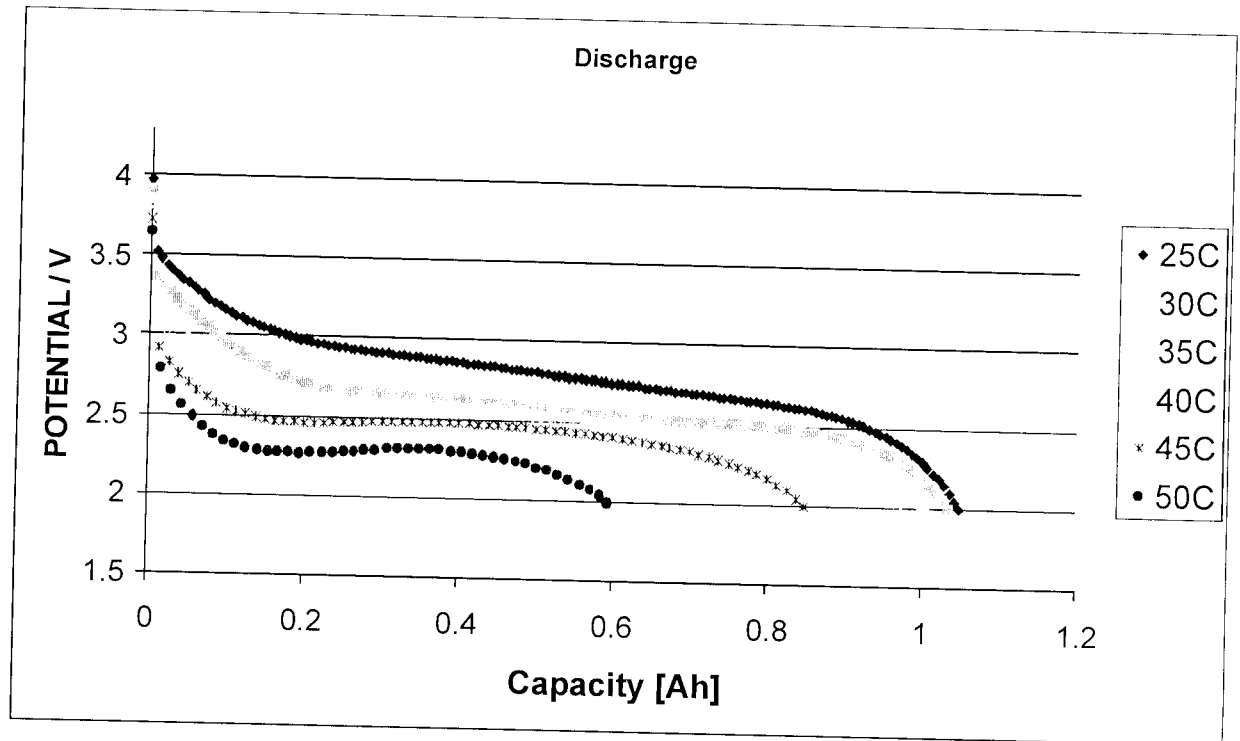


Fig. 2