




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> : <b>G06F 1/16, H05K 7/16</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 96/26479</b> (43) International Publication Date: 29 August 1996 (29.08.96)</p>
<p>(21) International Application Number: PCT/US96/01294 (22) International Filing Date: 2 February 1996 (02.02.96) (30) Priority Data: 08/391,110 21 February 1995 (21.02.95) US (71) Applicant: INTEL CORPORATION [US/US]; 2200 Mission College Boulevard, Santa Clara, CA 95052 (US). (72) Inventors: GEE, Homer, T.; 6320 Oak Hill Drive, Roseville, CA 95746 (US). STEERE, Daniel C., Jr.; 200 Keller Circle, Folsom, CA 95630 (US). MATTHEWS, Walter, S.; 465 Throwbridge Lane, Folsom, CA 95630 (US). (74) Agents: SALTER, James, H. et al.; Blakely, Sokoloff, Taylor &amp; Zafman, 7th floor, 12400 Wilshire Boulevard, Los Angeles, CA 90025-1026 (US).</p>	<p>(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AZ, BY, KG, KZ, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> <i>With international search report.</i></p>	

(54) Title: MODULAR PCMCIA CARD

(57) Abstract

A modular PCMCIA card comprises a base member (10) conforming to the Type I or Type II physical dimensions and an add on section which mechanically and electrically connects through pins (26) and sockets (28) with the base member and has dimensions such that when the base member and the add on section are joined, they conform to the dimensions of a PCMCIA Type III card. The add on section may contain one or more functional units of a stand alone computer system and may contain a battery, a modem, pager and/or an infrared transceiver for communicating with printers, computers or controlling devices.

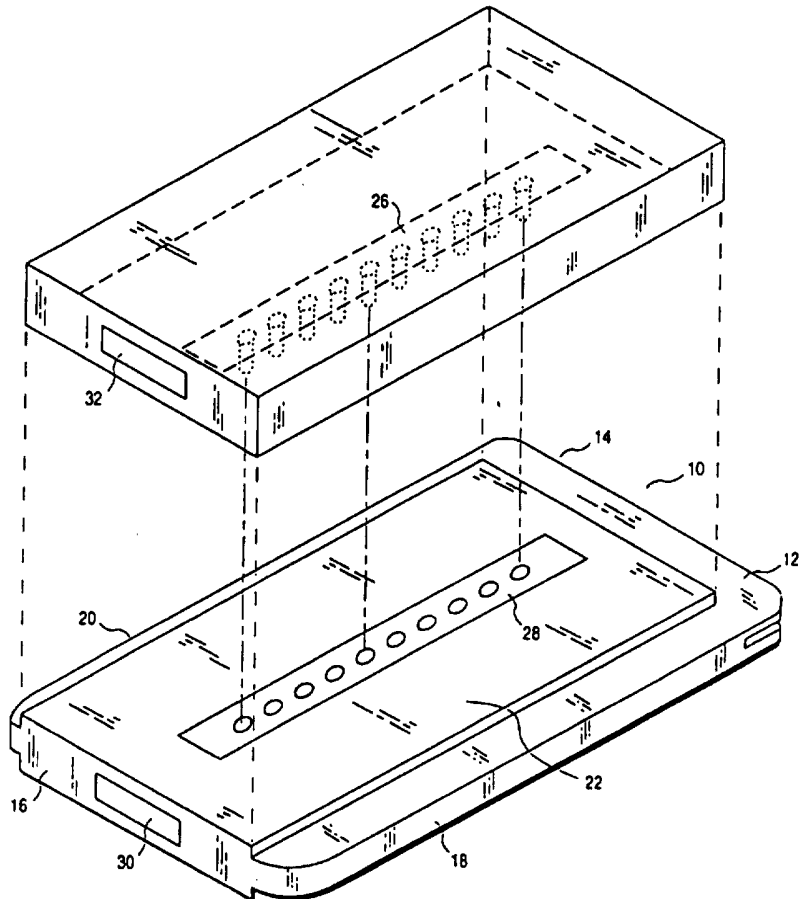

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgystan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## MODULAR PCMCIA CARD

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

The subject invention relates to PCMCIA cards. More particularly, it relates to a modular PCMCIA card comprising a base piece that conforms to the PCMCIA Type I or Type II physical dimensions and an interlocking second part that when added to the first piece conforms to the PCMCIA Type III dimensions.

#### 2. Description of the Prior Art

The PCMCIA (Personal Computer Memory Card International Association) standard was developed for the purpose of providing user installed memory and I/O functions for small form factor digital computer systems. The standard specifies a card containing a printed circuit board. This product is usually referred to as a PC card. There are three PC card formats: Types I, II and III. All three have external dimensions of 54 millimeters by 85.6 millimeters. Thicknesses vary. Type I is 3.3 millimeters thick. Type II is 5 millimeters thick and Type III is 10.5

millimeters thick. The cards look similar to a conventional credit card. The standard specifies a 68 position connector on one end. The 68 position connector plugs into a mating connector mounted on a header which is in turn mounted to a mother board or daughter board which is located inside the host. The header is typically U shaped with the 68 pins at the base of the U. There is a wide variation of headers including headers for different thickness cards; however, the 68 pin connector is common to all PCMCIA cards.

The original PC cards were for memory addition and thus had no interaction with external devices. I/O cards were developed later to add functions such as modems, faxes, network interfaces, multi-media interface, sound cards, etc. In order to handle I/O functions, a second connector is located on the end of the card opposite the 68 pin connector. The I/O connector reaches the outside world through a cable.

Type I and Type II PCMCIA cards fit into the same PCMCIA slots. A Type III card would occupy two vertically stacked PCMCIA Type I/II slots. Most notebook size computers have one or two PCMCIA Type I/II slots. Most subnotebook and handheld computers have but one Type I/II slot. Very few computers of any size have Type III slots yet. However, there is a strong need for the functionality that only the larger volume of a Type III card can provide such as to accommodate a harddisk drive. There is expected to be a strong trend to computers with Type III slots in the coming years, but there is currently a large installed base of computers with Type I/II slots only, and this installed base will

grow substantially. Thus there is a need for a modular PCMCIA card that can perform certain functionality as a Type I or II card for those computers that only have a Type I/II slot and at the same time provide Type III card functionality for computers that have a Type III slot.

In addition, as pointed out in the co-pending patent application referenced in the first section of this application, there is a need for a stand alone computer that fits the PCMCIA format. This computer acts as a companion to a desktop or other larger computer. When in the larger computer, the PCMCIA card acts as additional memory. When out of the larger computer, the PCMCIA card is a stand alone computer. Because this is very difficult to accomplish with a Type I or Type II card, it is desirable to have a way to get added volume for the additional components without sacrificing PCMCIA card, Type I or II compatibility.

#### SUMMARY

The present invention provides a modular PCMCIA card which includes a base member conforming to the Type I or Type II physical dimensions and an add on section adapted to mechanically and electrically connect with the base member and having dimensions such that when the base member and the add on section are joined, they conform to the dimensions of a PCMCIA Type III card. The add on section may contain one or more functional units of a stand alone

computer system and may contain a modem, pager and/or an infrared transceiver.

### BRIEF DESCRIPTION OF THE DRAWING

The preferred embodiments of the invention will now be described in conjunction with the Drawing, wherein:

Figure 1 is a perspective drawing of the modular PCMCIA card according to the present invention.

### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

According to one aspect of the present invention a modular Type III PCMCIA card consists of a base member that conforms to the PCMCIA Type I or Type II physical dimensions and an interlocking add on part that when attached to the base member conforms to the PCMCIA Type III dimensions.

Figure 1 is a perspective drawing of the modular PCMCIA card according to the present invention. Referring now to Figure 1, a base member 10 is a Type II PCMCIA card and consists of an edge area 12 that is 3.3 mm thick. Base member 10 has a rectangular top view with a short sides 14 and 16 and long sides 18 and 20. Over a center area 22 of base member 10, the thickness increases to 5.0 mm. An interlocking add on section 24 corresponds in length and width to center area 22. Add on section 24 is 5.5 mm thick. Add on section 24 connects mechanically to base member 10 by means of a connector consisting of

a plurality of pins 26 located in add on section 24 and a plurality of mating sockets 28 in center area 22 of base member 10.

Base member 10 has a PCMCIA 68 pin connector located in the edge of short side 14 (not shown) and an I/O connector 30 located in the edge of short side 16.

Electrical connection between add on section 24 and base member 10 may in the preferred embodiment be done with the same pins 26 and socket 28 as is used for mechanical connection. Or, alternatively, a small cable or clip (not shown) may be used to connect I/O connector 30 of base member 10 to a corresponding connector 32 in add on section 24.

In operation, the combination of PCMCIA base member 10 with add on section 24 attached will be plugged into a Type III slot if one is available. Otherwise, modular add on section 24 may be detached and PCMCIA base member 10 may be inserted into the more common Type I/II slot.

The modularity allows a Type I or Type II PCMCIA card to house additional capabilities such as a removable or additional battery, memory, a modem or a pager unit.

According to another aspect of the invention, add on section 24 when attached to base member 10 need not conform to the PCMCIA Type III specification since it will not be inserted into a Type III slot.

Rather it will provide the peripheral features of a stand alone computer as described in the copending application referenced in the first section of this application. These peripheral features include, a keyboard such as a qwerty keyboard, a display such as a touch screen display, an LCD display, flash or SRAM a microprocessor and/or extra battery power. Alternatively, voice recognition capability could be provided. This would include a microphone, a speaker and a digital signal processor and voice recognition software. Yet another capability that could be included is an infrared transceiver for communicating remotely to a printer, another computer or for controlling other devices.

In operation PCMCIA base member 10 performs in two separate modes. When the base member 10 is not plugged into a PCMCIA slot in a host computer, add on section 24 is connected to it and together they are a stand alone computer. This means that it has a CPU, memory, an input device, an output device, its own power and a software operating system. In stand alone mode, the computer may be used to access and update various data bases such as phone directories, appointment calendars, etc. In the second mode, add on section 24 is removed and base member 10 is inserted into a PCMCIA Type I/II slot in a host computer. In this mode, power is supplied by the host. In use, data bases such a phone directory, or an appointment calendar that are routinely kept on the host are down loaded into a flash memory in base member 10. Any changes to these data bases entered when base member 10 was used as a stand alone computer are up loaded by the host into the host's data base. Thus, when base member



10 is plugged into the host, the data in both are mutually updated so that they are the same.

The foregoing preferred embodiments are subject to numerous adaptations and modifications without departing from the concept of the invention. Therefore, within the scope of the appended claims, the invention may be practiced other than as specifically described herein.

## CLAIMS

What is claimed is:

1. A modular PCMCIA card comprising:  
a card section conforming to the Type I physical dimensions;  
an add on section adapted to mechanically and physically connect with said card section and having dimensions such that when said card section and said add on section are joined, they conform to the dimensions of a Type III card.
2. The system of claim 1 wherein said add on section contains an LCD display.
3. The system of claim 1 wherein said add on section contains a qwerty keyboard.
4. The system of claim 1 wherein said add on section contains a touch screen.
5. The system of claim 1 wherein said add on section contains flash memory.

6. The system of claim 1 wherein said add on section contains a battery.
7. The system of claim 6 wherein said battery is rechargeable.
8. The system of claim 1 wherein said add on section contains a modem.
9. The system of claim 1 wherein said add on section contains a pager unit.
10. The system of claim 1 wherein said add on section contains an infrared transceiver.
11. A modular PCMCIA card comprising:
  - a card section conforming to the Type II physical dimensions;
  - an add on section adapted to mechanically and physically connect with said card section and having dimensions such that when said card section and said add on section are joined, they conform to the dimensions of a Type III card.
12. The system of claim 8 wherein said add on section contains an LCD display.

13. The system of claim 8 wherein said add on section contains a qwerty keyboard.

14. The system of claim 8 wherein said add on section contains a touch screen.

15. The system of claim 8 wherein said add on section contains flash memory.

16. The system of claim 8 wherein said add on section contains a battery.

17. The system of claim 13 wherein said battery is rechargeable.

18. A modular PCMCIA card comprising:  
a card section conforming to the Type II physical dimensions; and  
an add on section adapted to mechanically and physically connect with said card section wherein said add on section contains at least one functional unit of a stand alone computer system.

19. The system of claim 15 wherein said add on section contains an LCD display.

20. The system of claim 15 wherein said add on section contains a qwerty keyboard.


21. The system of claim 15 wherein said add on section contains a touch screen.

22. The system of claim 15 wherein said add on section contains flash memory.

23. The system of claim 15 wherein said add on section contains a battery.

24. The system of claim 20 wherein said battery is rechargeable.

1/1

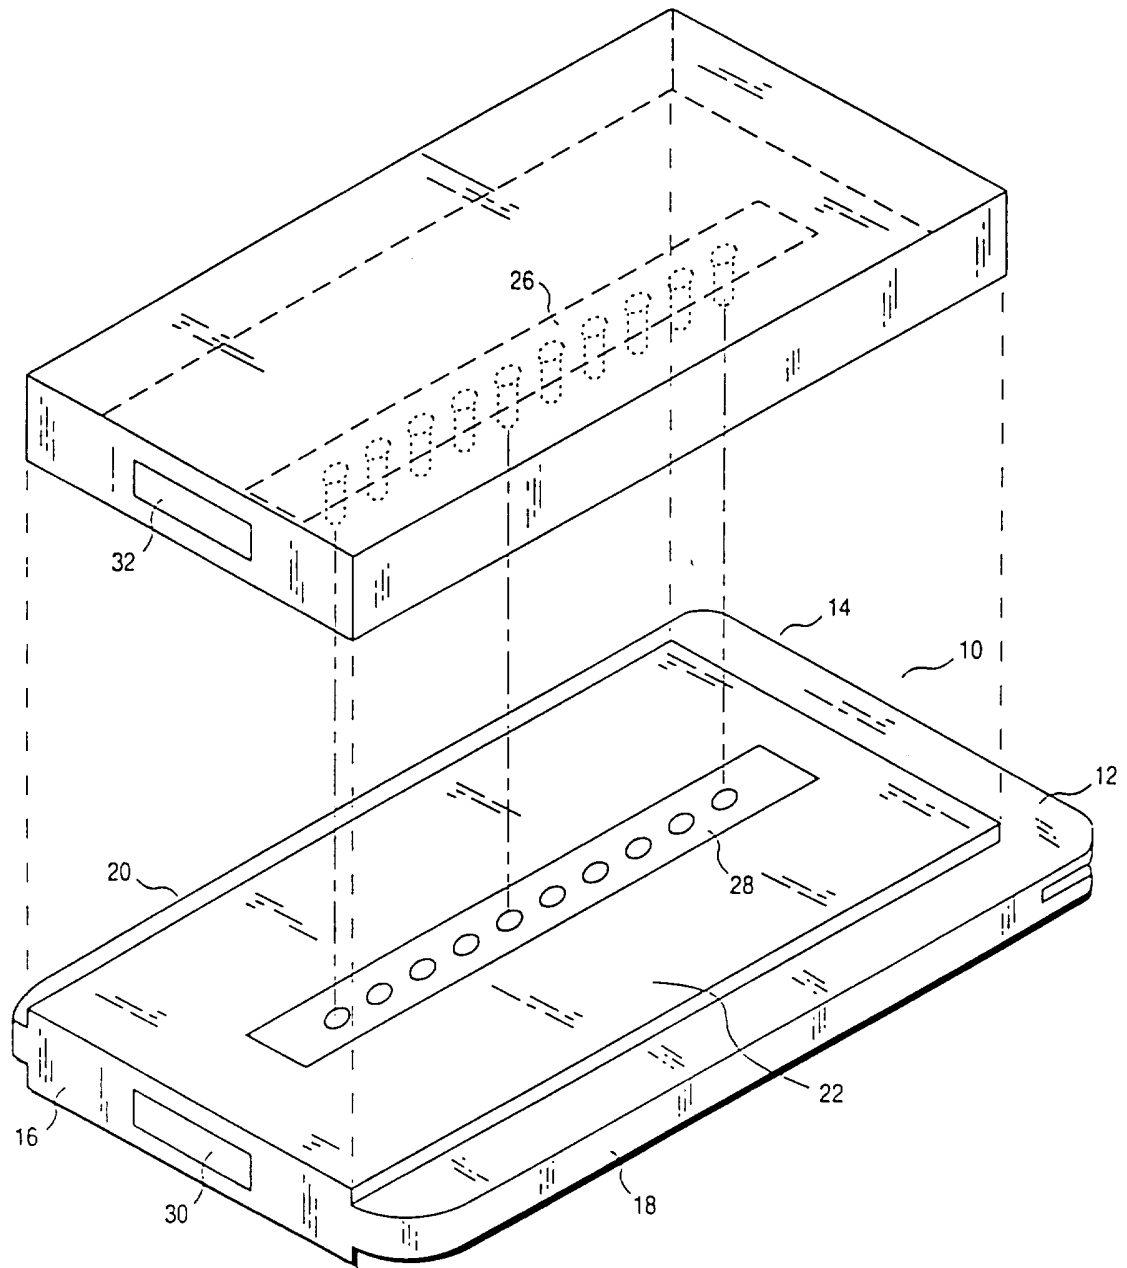

**FIG. 1**

INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US96/01294

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(6) :G06F 1/16; H05K 7/16  
US CL :361/686

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 361/686, 680, 681, 682, 683, 684, 685, 737, 736, 748; 364/708.1

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US, A, 5,373,149 (RASMUSSEN) 13 December 1994 see the entire document.	1-24

Further documents are listed in the continuation of Box C.  See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E* earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	* & * document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means	
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 09 APRIL 1996	Date of mailing of the international search report <b>30 MAY 1996</b>
--	--

Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer <i>Michael W. Phillips</i> MICHAEL W. PHILLIPS Telephone No. (703) 308-3191
---	---