



(22) Date de dépôt/Filing Date: 2001/03/07

(41) Mise à la disp. pub./Open to Public Insp.: 2002/09/07

(45) Date de délivrance/Issue Date: 2005/11/01

(51) Cl.Int.⁷/Int.Cl.⁷ E01H 5/02, A01B 1/02, B25G 1/10


(72) Inventeur/Inventor:
CHANG, WILLIAM NAI-JEN, CA

(73) Propriétaire/Owner:
CHANG, WILLIAM NAI-JEN, CA

(74) Agent: WONG, DAVID W.

(54) Titre : ACCESSOIRE DE PELLE POLYVALENT

(54) Title: A VERSATILE ATTACHMENT FOR A SHOVEL

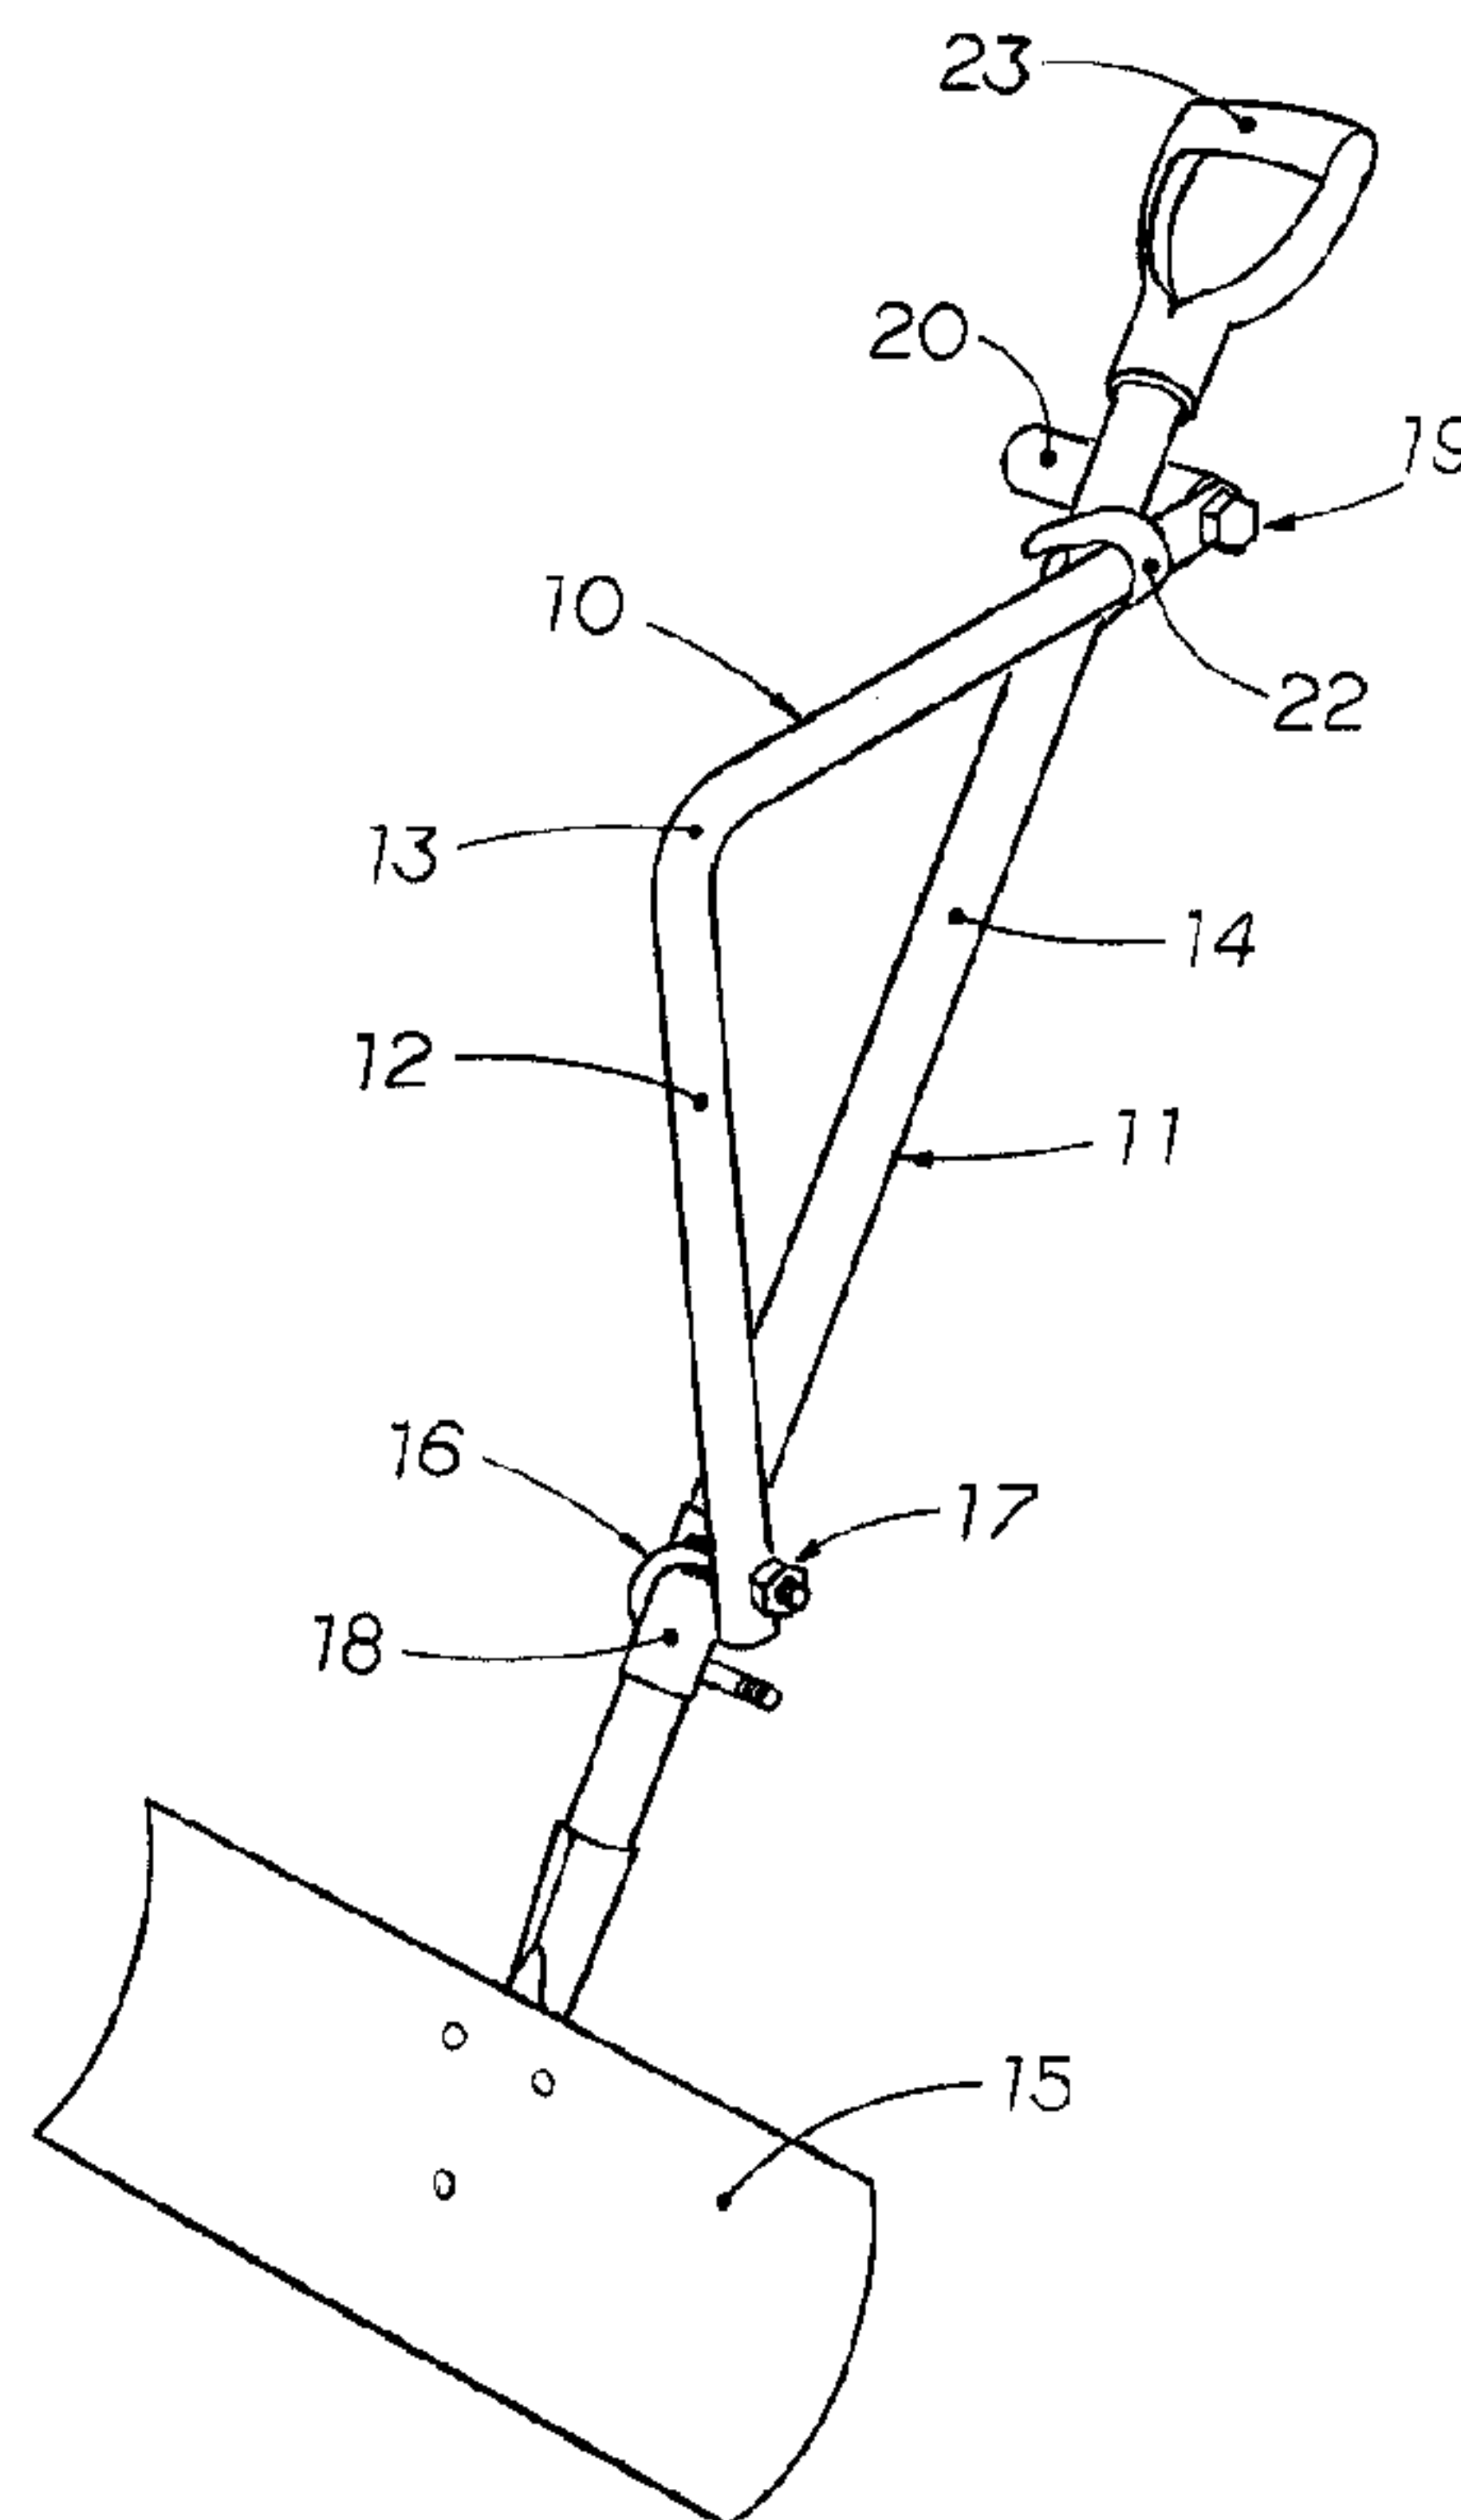

(57) Abrégé/Abstract:

A versatile attachment in the form of an elongated member having an obtuse angle is mounted on a shovel handle. The lower end of the elongated member is pivotally may be mounted in a cantilever manner to the lower portion of the shovel handle. The elongated member may be mounted with the obtuse angle portion of the elongated member located selectively either above or below the longitudinal axis of the shovel handle. A cross bar member is provided at the upper free end of the elongated member and a rotary wheel is rotatably mounted on the cross bar member. A strap is provided at the shovel handle and is operative for securing the attachment to the latter.



ABSTRACT OF THE DISCLOSURE

A versatile attachment in the form of an elongated member having an obtuse angle is mounted on a shovel handle. The lower end of the elongated member is pivotally may be mounted in a cantilever manner to the lower portion of the shovel handle. The elongated member may be mounted with the obtuse angle portion of the elongated member located selectively either above or below the longitudinal axis of the shovel handle. A cross bar member is provided at the upper free end of the elongated member and a rotary wheel is rotatably mounted on the cross bar member. A strap is provided at the shovel handle and is operative for securing the attachment to the latter.

This invention relates to a versatile attachment for use with a shovel to ease its use.

An implement such as a shovel is commonly used for manual digging and clearing operations of ground or snow. Such operations are strenuous and they exert severe strain in one's back since they require digging and pushing of the load to be carried out with one's back in a forward bending posture. Furthermore, considerable back strength is particularly required in lifting the soil or snow with a shovel. For this reason, back injuries are common in such operations.

Shovels having various handle configurations have been provided for alleviating the above problems. In one construction, the upper portion of the shovel handle is bent rearwards at an angle such that the pushing operation may be carried out with one's body in a more upright posture. However, such shovel is not conducive for digging and it has not resolved the problem of causing harmful strain on one's back in lifting the load with the shovel, since it still has to be carried out with one's body in a bent forward posture.

In another construction, an auxiliary straight bar is mounted on the shovel handle such that one may lift the weight of the load on the shovel by holding the shovel handle with one hand and the auxiliary straight bar with the other in order to lessen the strain on one's back. However, it still requires the pushing or plowing operation to be carried out with the body in a forward bending posture.

It is a principal object of the present invention to provide an attachment on a shovel which facilitates the digging and pushing operations to be carried out with the user's body in a substantially upright posture.

It is another object of the present invention to provide an attachment on a shovel which is operative to ease the digging and clearing operations.

It is another object of the present invention to provide an attachment which enables the load on the shovel to be unloaded without having to lift the shovel.

It is still another object of the present invention to provide an attachment which is versatile.

It is yet another object of the present invention to provide an attachment which is simple in construction and is convenient to use.

Other objects of this invention will appear in the following description and appended claims, reference being made to the accompanying drawings forming a part of the specification in which:

Figure 1 is a front perspective elevation of a snow shovel having the attachment according to the present invention provided thereon.

Figure 2 is a front perspective isolated view of the attachment according to the present invention.

Figure 3 is an isolated exploded elevation view of the attachment showing the component parts therein.

Figure 4 is a front perspective elevation view of the snow shovel with the attachment of the present invention in the operating position for pushing the load .

Figure 5 is a front perspective elevation view of the snow shovel with the attachment of the present invention located with its upper free end slidable on the ground to facilitate pushing as well as providing a leverage for plowing.

Figure 6 is a front perspective elevation view of the snow shovel with the attachment mounted in a position with its obtuse angle portion located below the handle shaft of the shovel.

Figure 7 is a front perspective elevation view of the snow shovel with the attachment turned to the position with the obtuse angle portion abutting the ground such that the an impact force may

be applied to the blade by kicking at the crossing bar of the attachment.

Figure 8 is a front perspective elevation view of the snow shovel with the attachment in the position as in Figure 6 and secured to the handle shaft of the shovel with the strap.

5 Figure 9 is a schematic illustration showing the bent back posture required when using a common shovel in the digging operation.

Figure 10 is a schematic illustration showing the digging operation may be carried out with a substantially upright posture with the shovel having the attachment of the present invention provide thereon.

10 Figure 11 is a schematic illustration showing the digging and plowing operations carried out in a body upright posture with the attachment of the present invention positioned above the shovel handle.

Figure 12 is a schematic illustration showing the use of the attachment as turning handle for removing the load from the shovel in a flipping action without having to lift the shovel.

15 Figure 13 is a schematic illustration showing the location of the attachment with its upper end pointing at the ground and urging with the operator's foot to facilitate the plowing and digging operations.

Figure 14 is a schematic illustration showing another position of the attachment with its free end slidable on the ground to facilitate transporting the load with the shovel.

20 Figure 15 is a schematic illustration showing the position of the attachment to facilitate lifting of the load with the operator's body is a substantially upright posture.

Figure 16 is a schematic illustration showing the position of the attachment with its angle portion resting against the ground to facilitate digging operation with the operator's foot while

standing in a substantially upright posture.

Figure 17 is a front perspective elevation view of a shovel having the attachment according to the present invention fixedly mounted thereon.

Figure 18 is a front perspective elevation view of the shovel with the attachment removably mounted to the handle shaft of the shovel with clamping brackets.

With reference to the drawings wherein like reference numeral designate corresponding parts in the several views, the attachment member 10 according to the present invention is provided on a snow shovel 11. A snow shovel is shown as an example to illustrate the present invention. It will be apparent to one skilled in the art that the same construction may be incorporated in any type of shovel to obtain the same desired results. The attachment member 10 is in the form of an elongated member 12 having an obtuse angle portion 13 formed therein. The lower end of the attachment member 10 is pivotally and removably mounted in a cantilever manner to the lower end of the handle shaft 14 of the shovel 11 adjacent to the shovel blade 15. A U-clamp 16 is shown as an example for mounting the attachment member 10 to the shovel handle shaft 14 and a nut 17 is used to secured the attachment member 10 in place. It can be appreciated by those skilled in the art that the attachment member 10 may be mounted by other means such as with a bolt provided on the shovel handle shaft 14 or other similar method to serve the same purpose. A short sleeve 18 may be provided on the shovel handle shaft 14 to facilitate the mounting of the attachment member 10. The attachment member 10 may be mounted in various positions as shown in Figures 4, 5, 6 and 7 to serve a variety of purposes which will become apparent in the following description.

As shown in Figure 1 the attachment member 10 is mounted in the storage position. A cross bar member 19 is located at the upper end of the attachment member 10. The cross bar member 19

may be provided simply by an elongated bolt extending perpendicular to the attachment member 10. A cylindrical rotary wheel 20 is rotatably mounted on the cross bar member 19 and is secured in place with a nut 21 mounted to the bolt. A strap 22 is provided on the handle shaft 14 and adapted to secure the attachment member 10 to the latter in the normal position with the rotary wheel 20 abutting the underside of handle shaft 14 and located adjacent to the hand grip 23 of the shovel.

Figure 9 shows the undesirable forward bending body posture of the operator in using a common shovel in the digging operation; whereas with the attachment provided on the shovel the same digging operation may be carried out easily with the body of the operator in a substantially upright position by holding the angle portion 13 of the attachment member 10 with one hand and the tilting the shovel with the other hand holding the handle grip 23 as best shown in Figure 10.

When the attachment member 10 is mounted in the position as shown in Figure 4 with its free end located above the handle shaft 14, digging and plowing operation may be performed by the operator in an upright body posture with one hand holding the rotary wheel 20 and the other hand holding the hand grip 23 as shown in Figure 11. Furthermore, the load on the shovel blade 15 may be unloaded by simply turning or flipping the blade 15 with the attachment member 10 against the handle shaft 14 so that the blade 15 flips over sideways against the ground as shown in Figure 12 without having to lift the load. Thus the unloading operation may be carried out easily without having to lift the load and throwing it off the blade as in using a common shovel. Thus, the unloading action may be conducted with ease with the operator's body maintained in a substantially upright position all the time, and no strain is exerted to the operator's back.

When the attachment member 10 is located in the position as shown in Figure 5 with its free end abutting the ground, plowing and lifting operations may be performed with the attachment

member 10 serving as a fulcrum to provide the leverage to obtain the mechanical advantage in carrying out these operations. The free end of the attachment member 10 may be held firmly in place by the foot of the operator in this operation as best shown in Figure 13 for prying and lifting the load upwards with a tilting manner. The attachment member 10 may also be turned to a forward position with the rotary wheel 20 contacting the ground such that the load on the shovel may be easily transported by pushing the shovel like a wheel barrel with the rotary wheel 20 sliding and rolling on the ground while the operator maintaining the body in the upright position as best shown in Figure 14.

As shown in Figures 15 and 16, the digging operation may be carried out with the attachment member 10 mounted in the upside down position with the angle portion 13 located below the handle shaft 14 of the shovel 10. Digging may be carried out by holding the handle grip 23 with one hand and the rotary wheel 20 with the other hand. Due to the extension provided by the attachment member 10, the digging operation may be carried out with the body of the operator in a substantially upright posture. Furthermore, plowing may be performed by stamping or striking the cross bar 20 with the foot to provide a large blow force for the shovel blade 15 as best shown in Figure 16 by mounting the attachment member 10 in the position as shown in Figure 7 with the angle portion 13 abutting the ground. This operation can be easily carried out with the operator body in the upright position.

Various modifications can be made without departing from the spirit of this invention or the scope of the appended claims. The mounting of the attachment member 10 set forth in the above description are given as examples and are in no way final or binding. For example, the attachment member 10 may be permanently mounted in a fixed position with the angle portion 13 positioned on

the top side of the shovel handle shaft 14 as shown in Figure 17 to obtain some of the desirable results of the above desirable results., Alternatively, the attachment 10 may be removably mounted to the handle shaft 14 with clamps 24 and 25 fastened to the handle shaft 14 with nuts and bolts 26 and 27. Each one of the clamps 24 and 25 may be in the form of two substantially C-shaped brackets as best shown in Figure 18. In view of the above, it will be seen that several objects of the invention are achieved and other advantages are obtained. As many changes could be made in the above construction and method without departing from the scope of the invention, it is intended that all matter contained in the above description shall be interpreted as illustrative and not in a limiting sense.

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A versatile attachment mountable to a handle shaft of a shovel comprising,

5 a short sleeve mountable on said handle shaft to locate adjacent to a blade portion of said shovel,

a U-clamp mounted on said short sleeve, said U-clamp having two spaced legs straddling and mounted to said sleeve,

10 a single elongated bar having a transverse opening formed adjacent to a lower end therein, said elongated bar being pivotally mounted in a cantilever manner to said U-clamp with said U-clamp engaging with said transverse opening of said elongated bar, and said elongated bar having an obtuse angle portion formed therein,

a cross bar formed at an upper free end of said elongated bar and extending perpendicular to said upper free end of said elongated bar,

15 a strap mounted on said handle shaft and operative for tying said elongated bar securely to said handle shaft.

2. A versatile attachment according to Claim 1 wherein said elongated bar is removably mounted to one leg of said legs of said U-clamp and is maintained in place by a nut mounted to said one leg, and a cylindrical rotary wheel rotatably mounted on said cross bar.

20 3. A versatile attachment according to Claim 1 wherein said elongated bar is pivotable selectively between a first position with said angle portion therein located above said handle shaft and a second position with said angle portion therein located below said handle shaft.

4. A versatile attachment according to Claim 3 wherein said cross bar is an elongated bolt mounted in a perpendicular manner at said upper free end of said elongated bar, and said cylindrical rotary wheel is secured in place by a second nut mounted to said bolt.

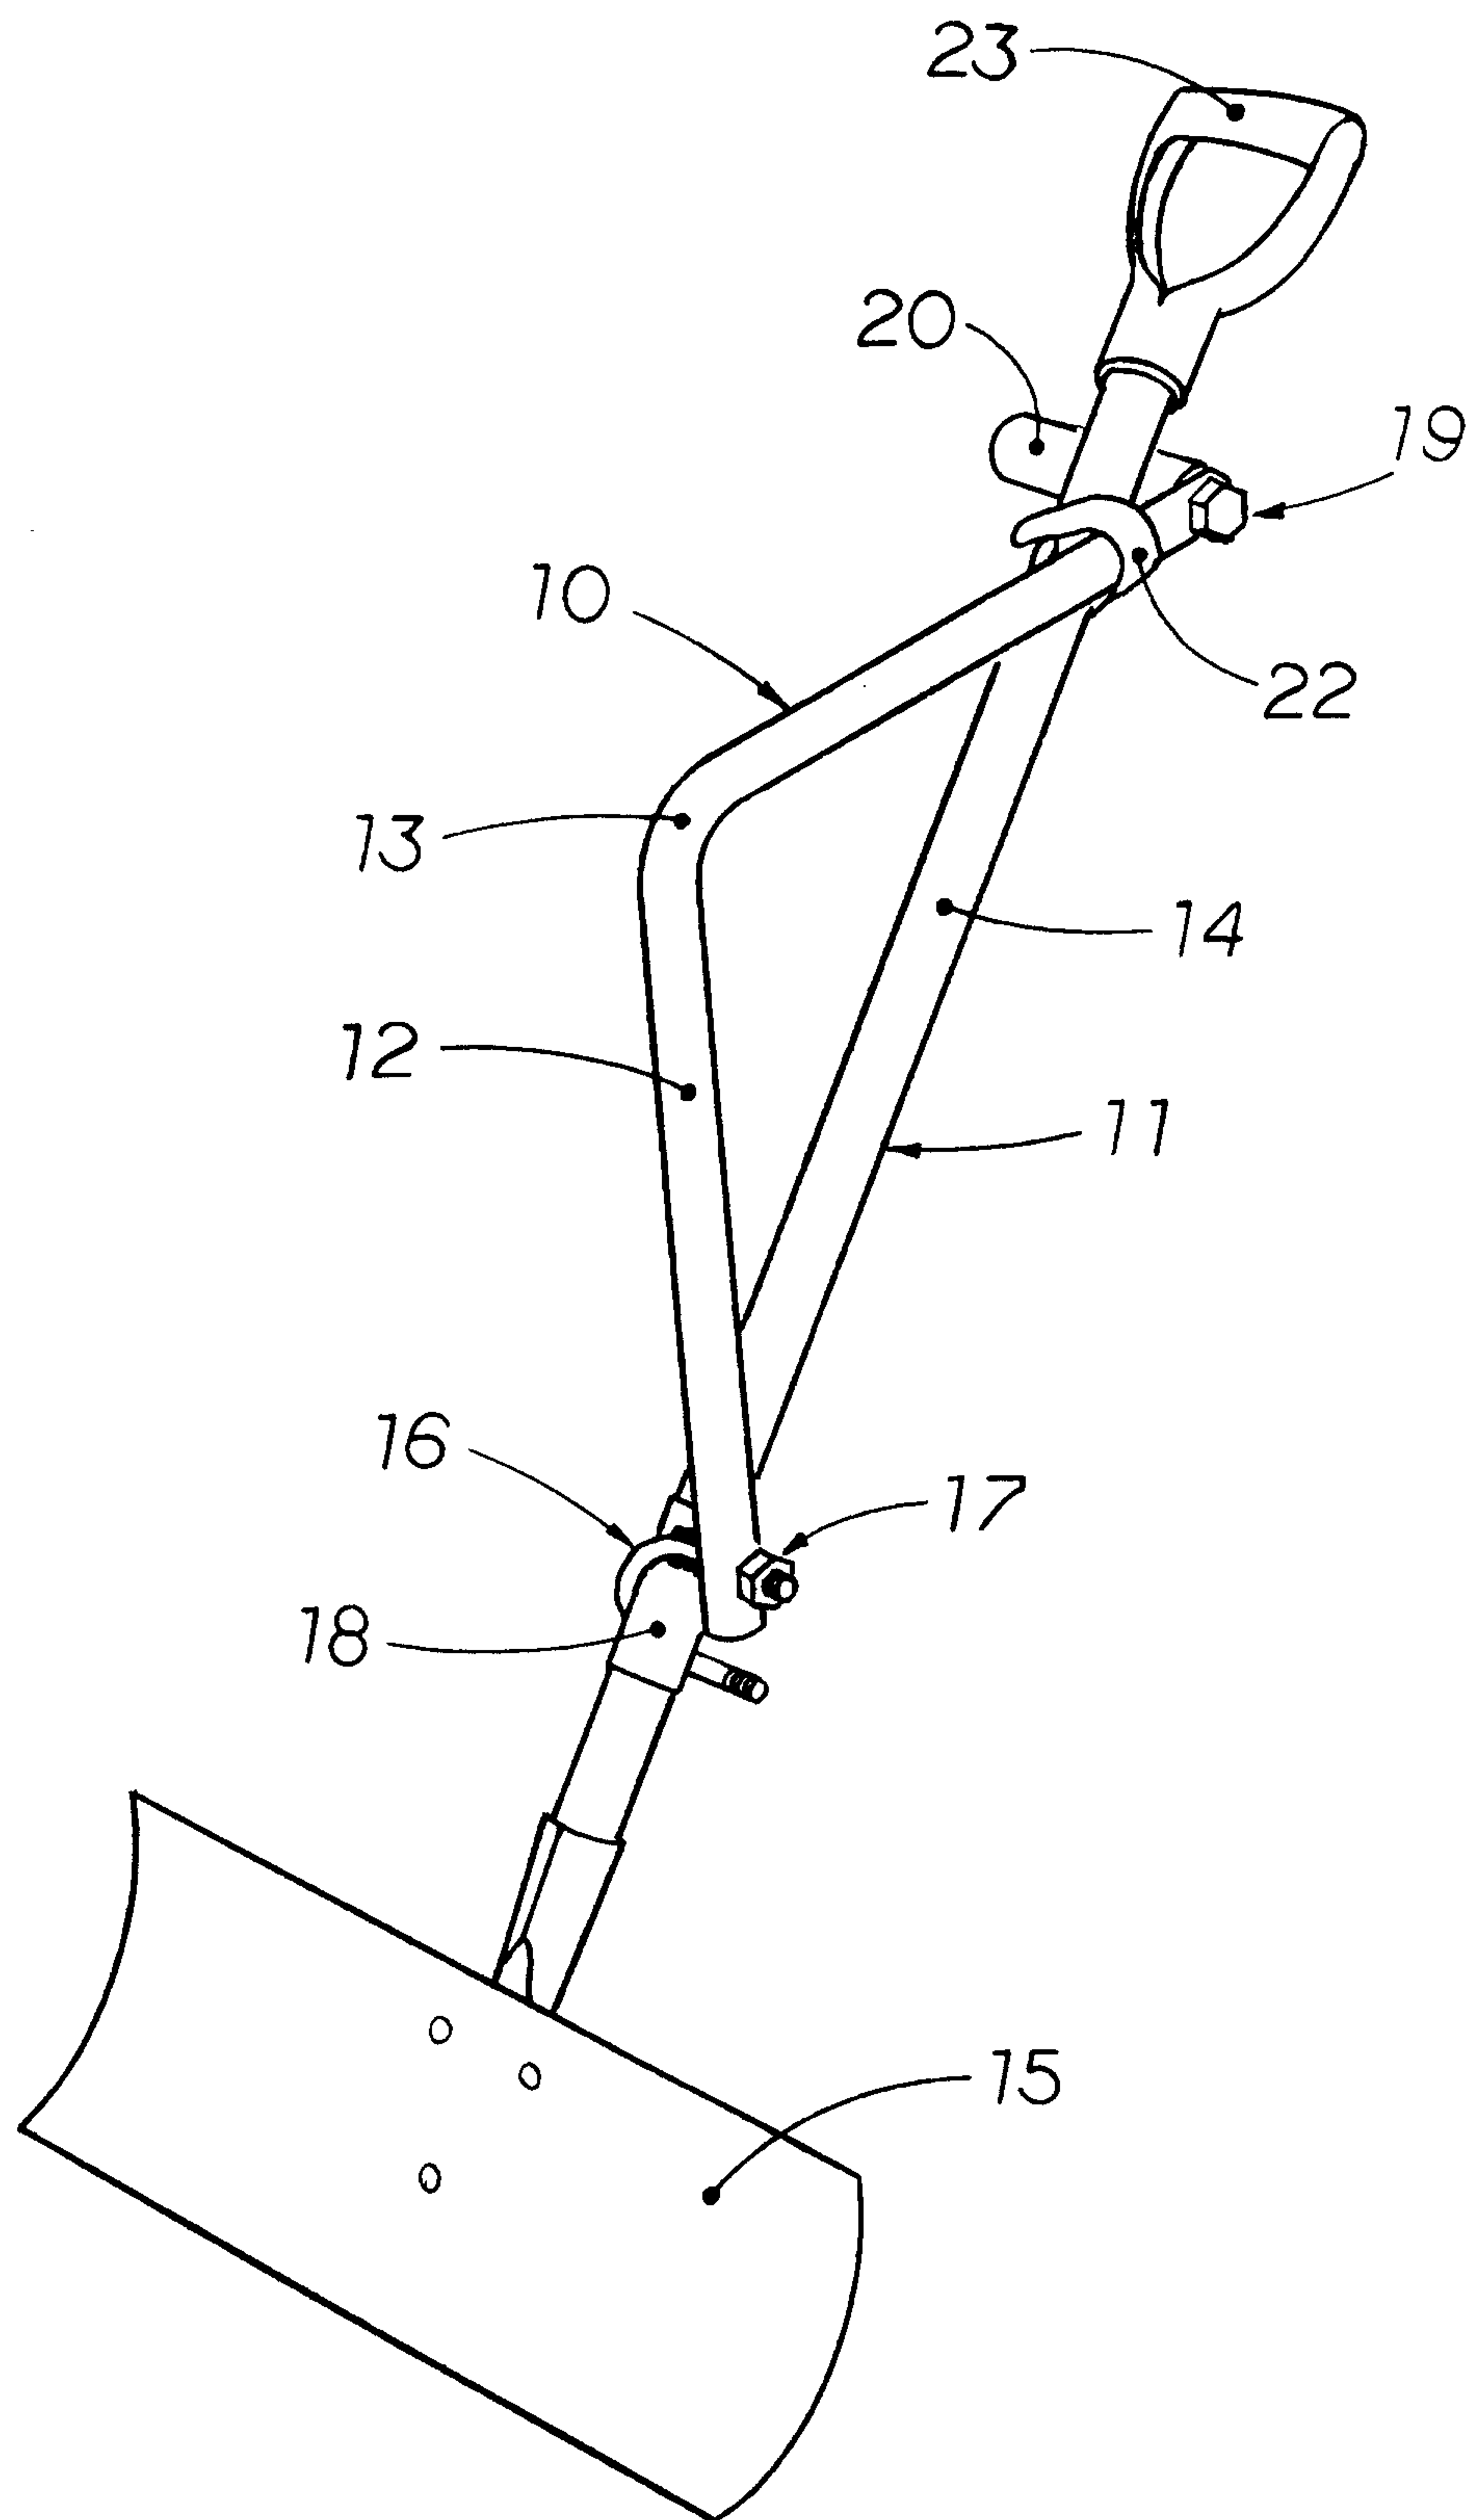


FIG. 1

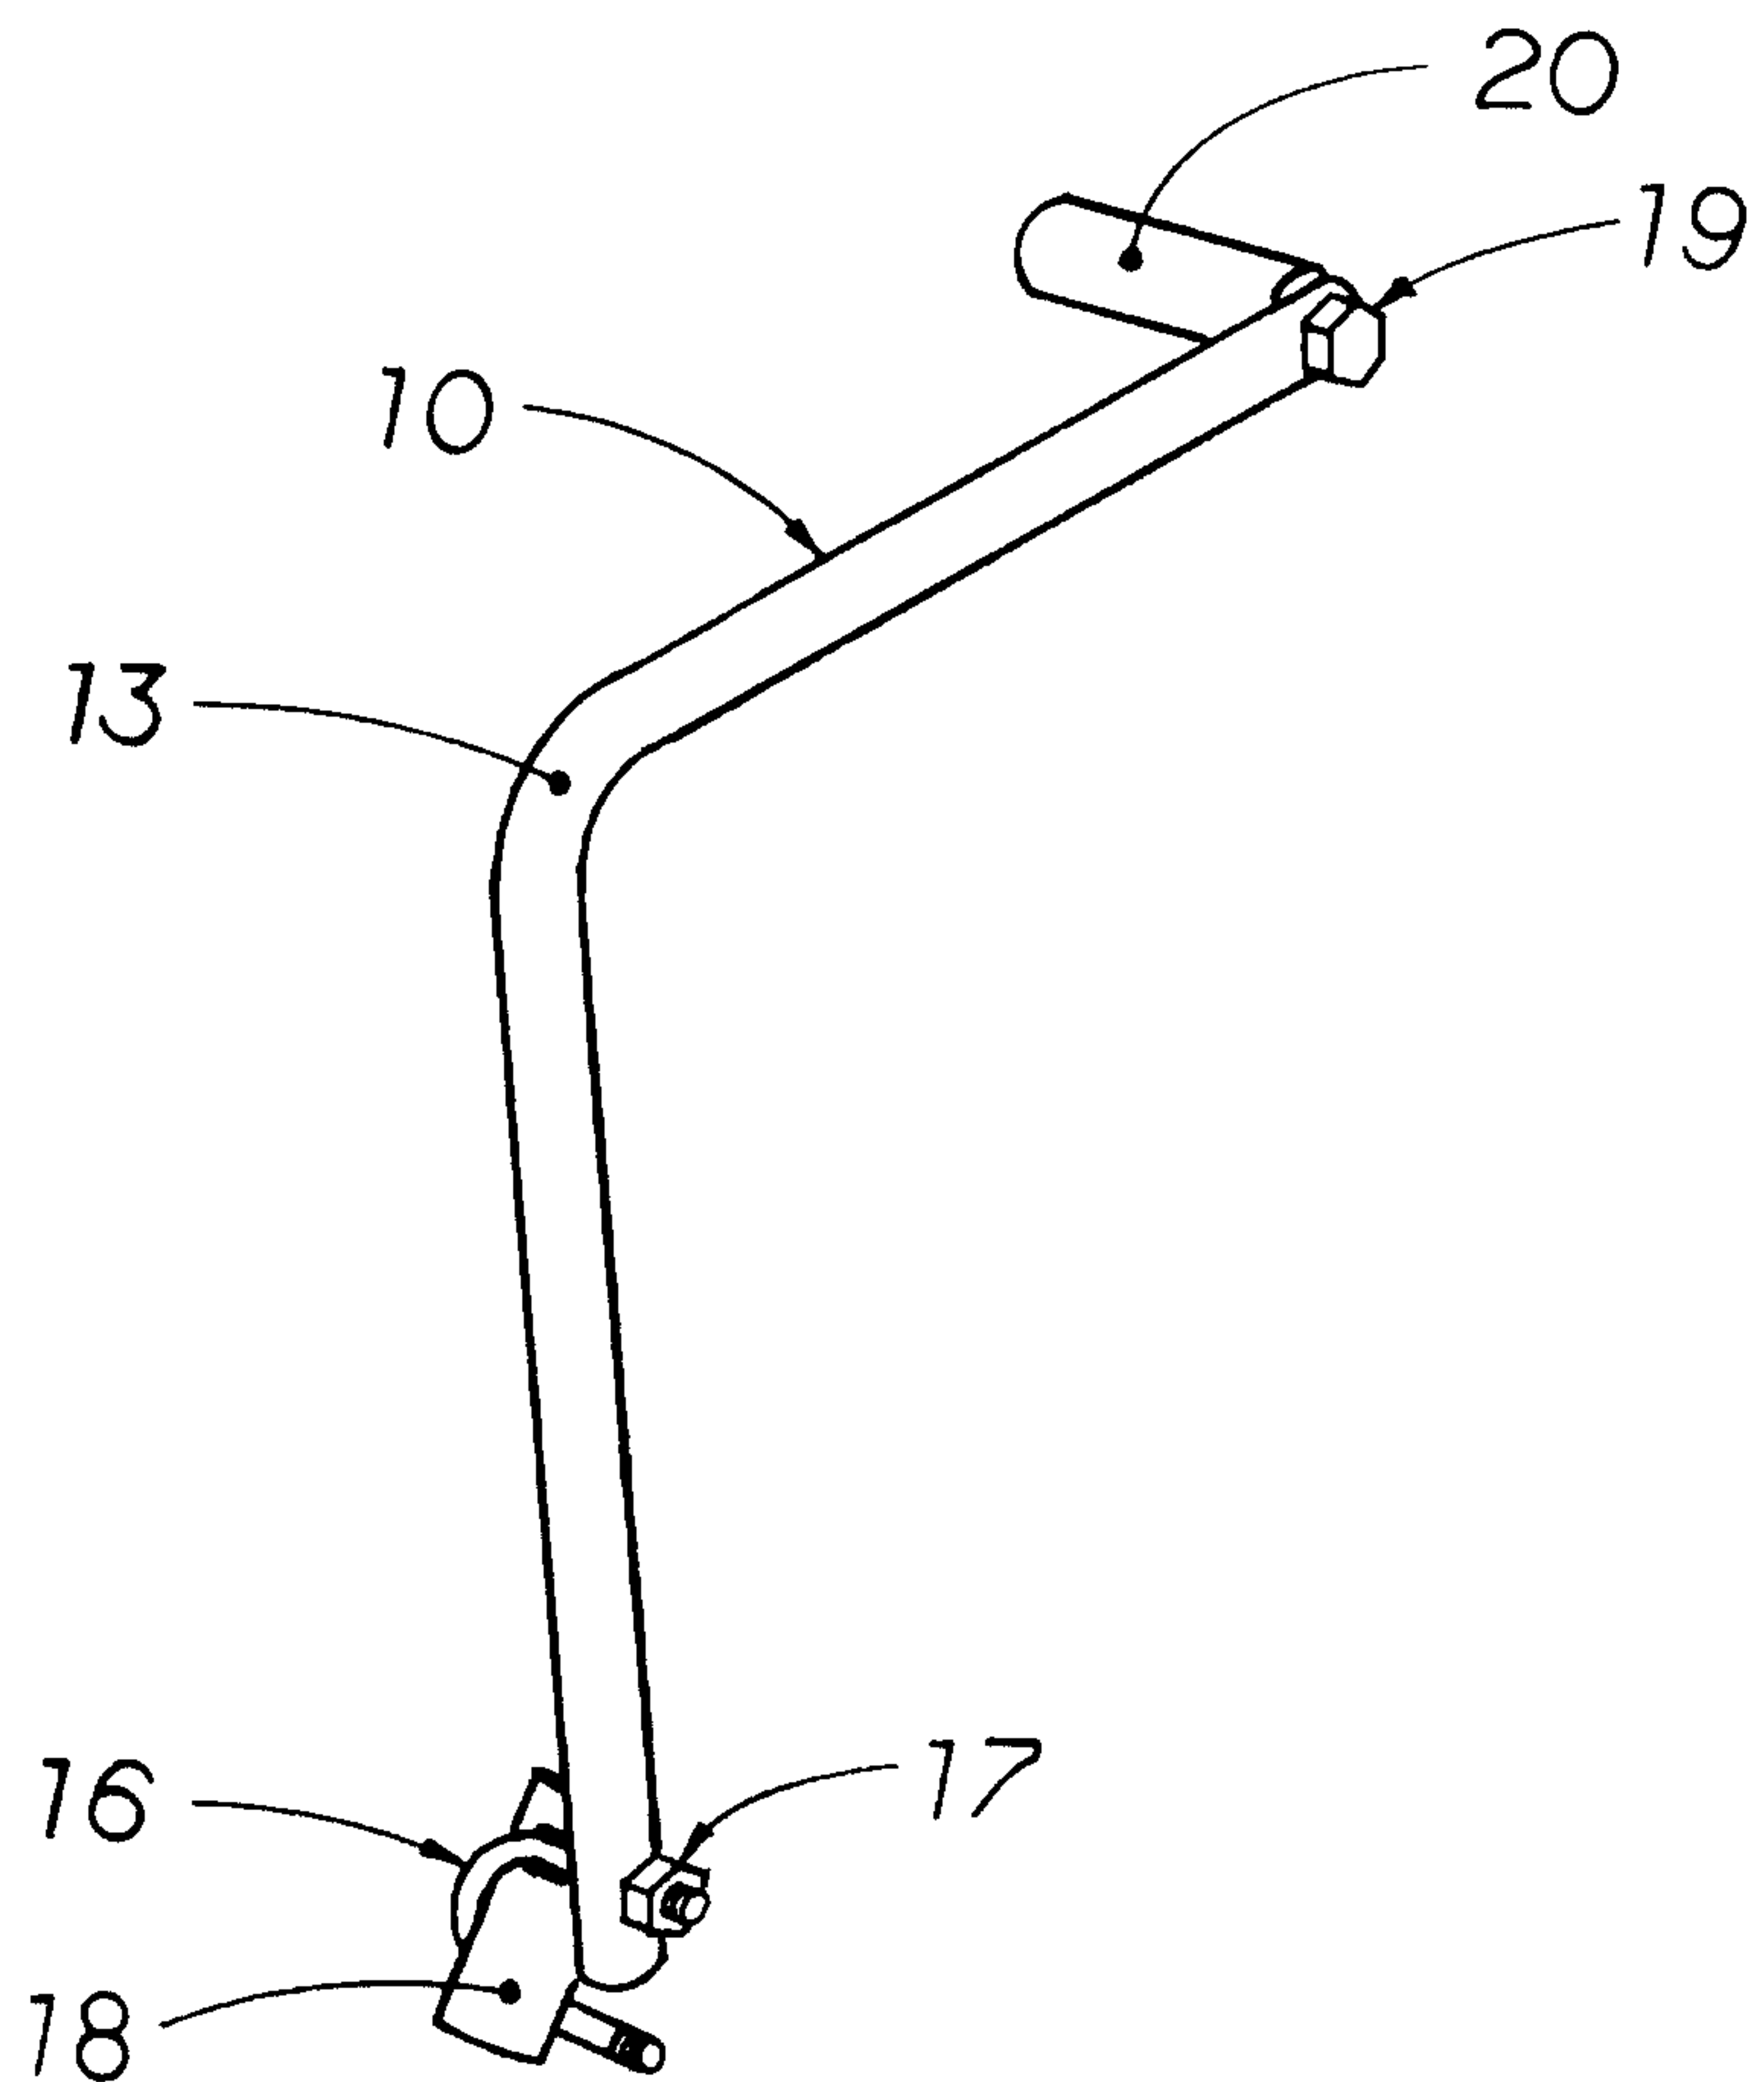


FIG. 2

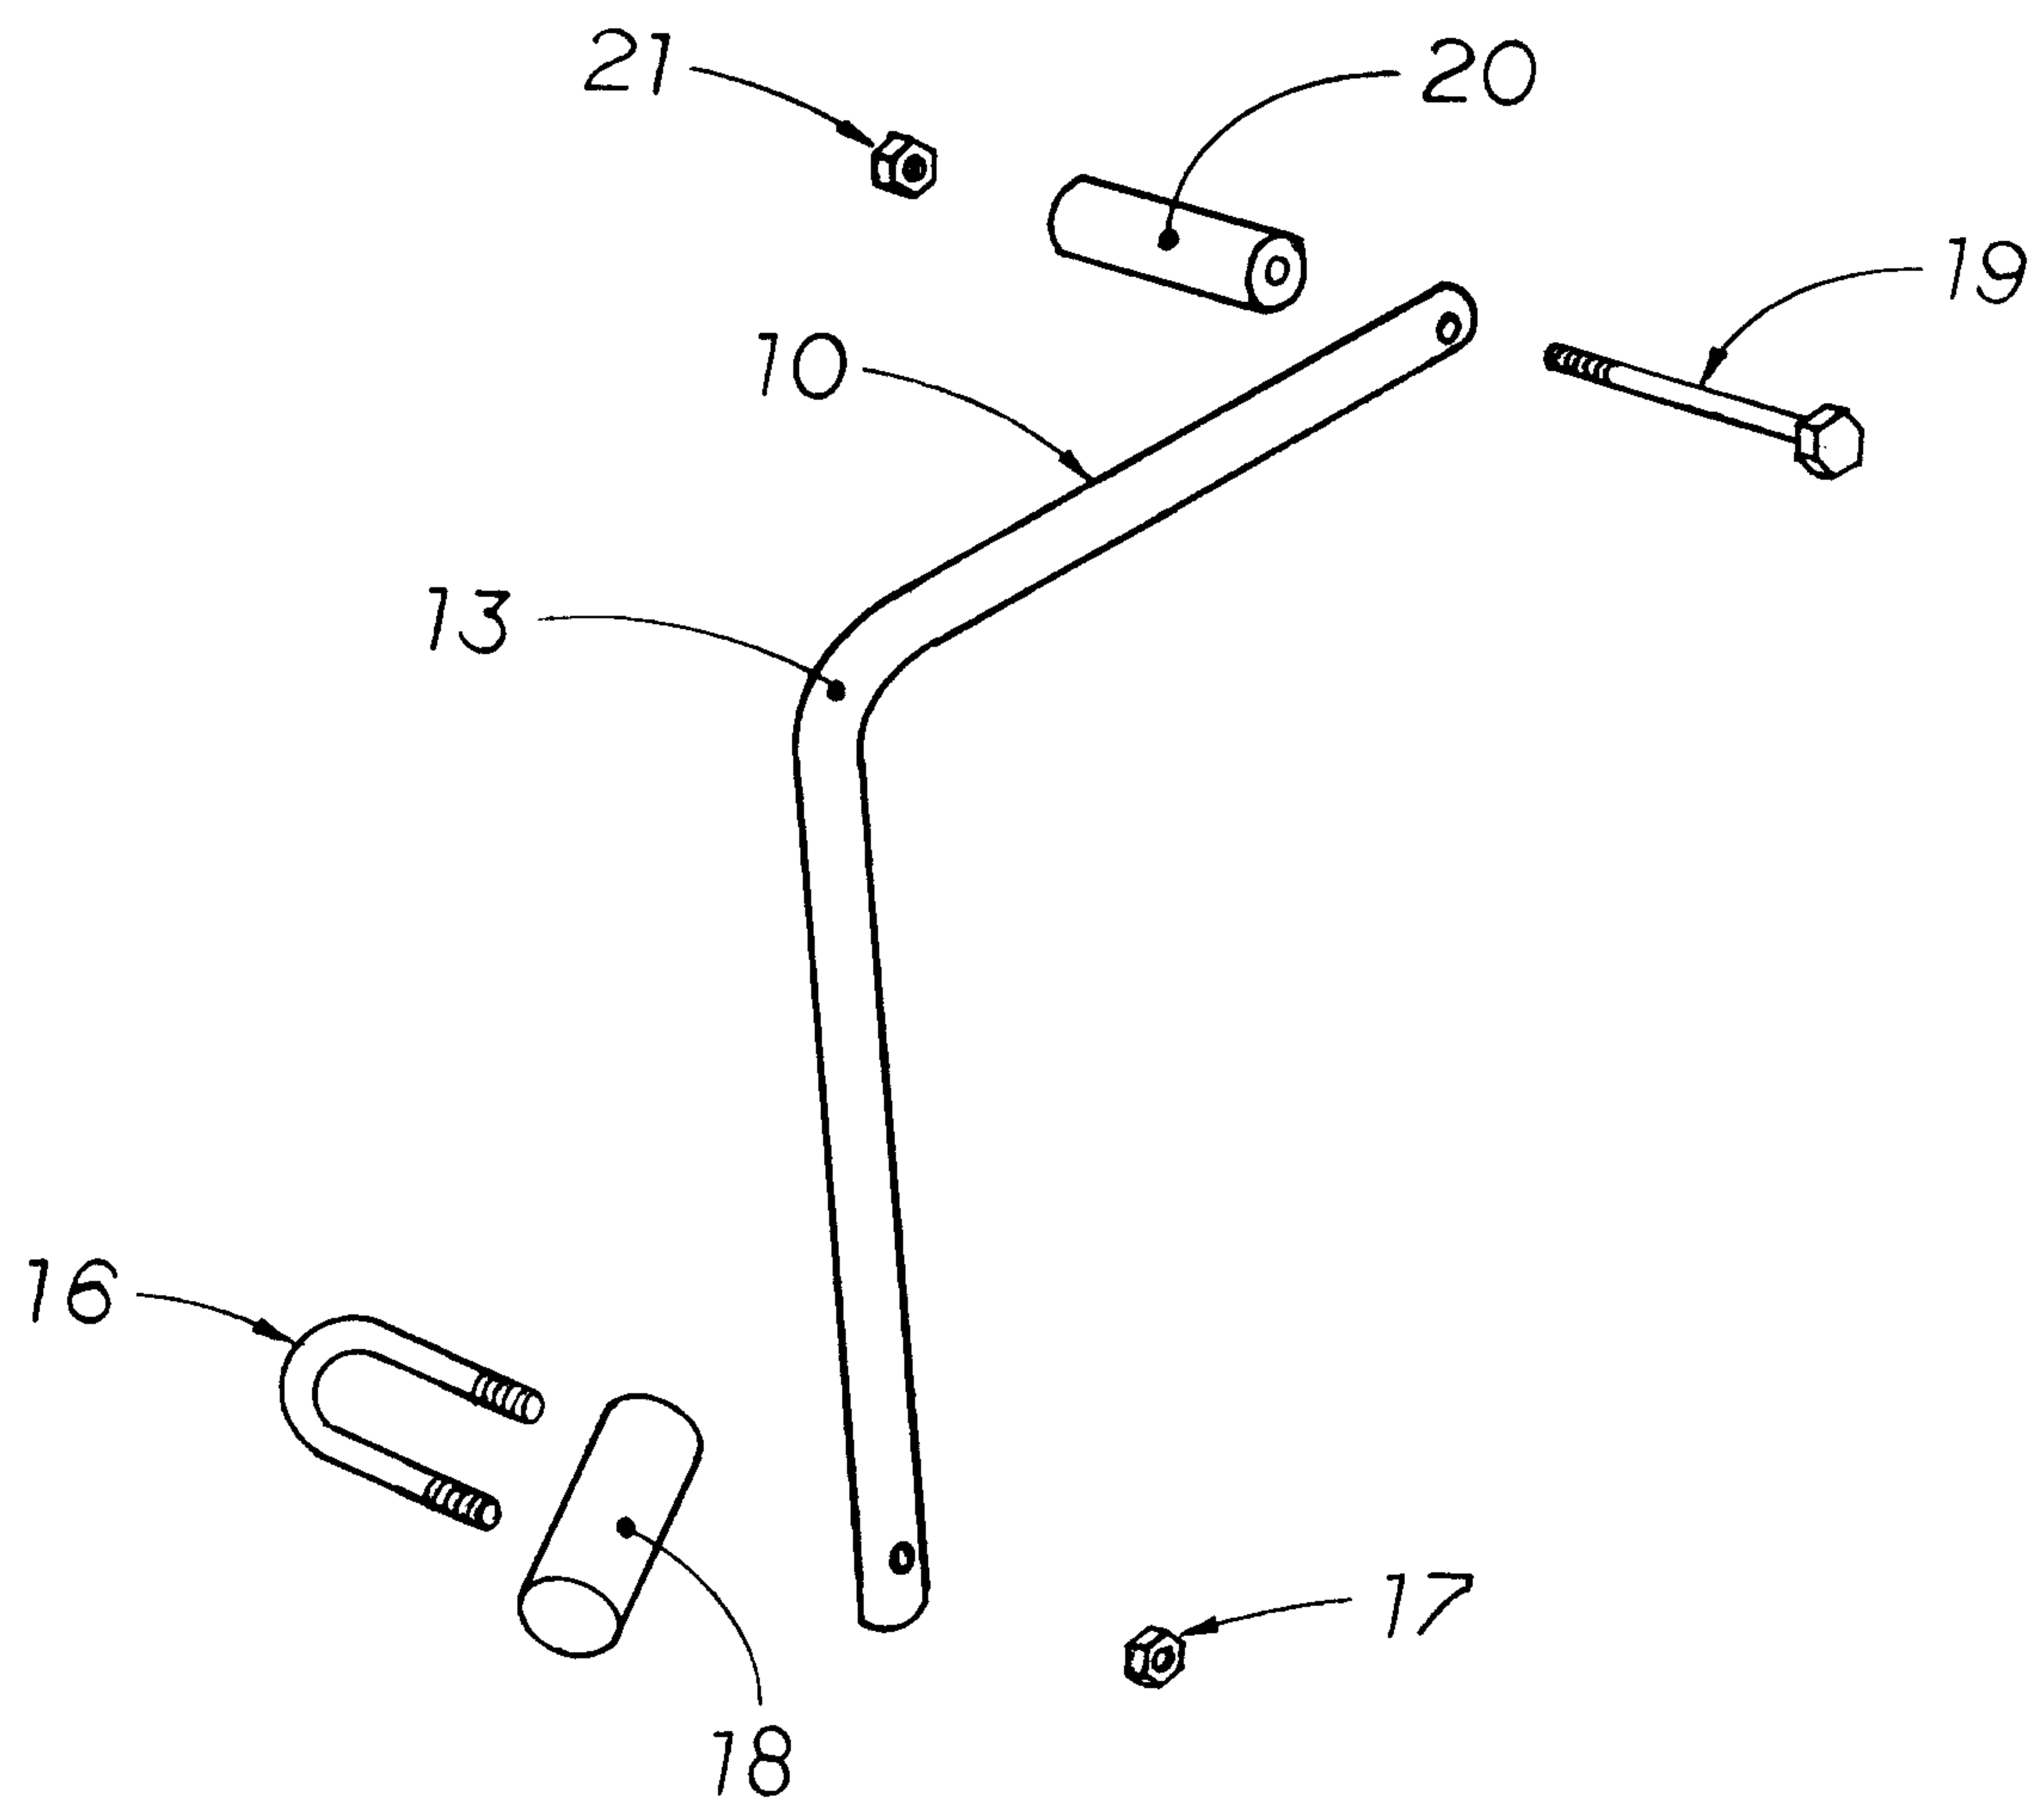


FIG. 3

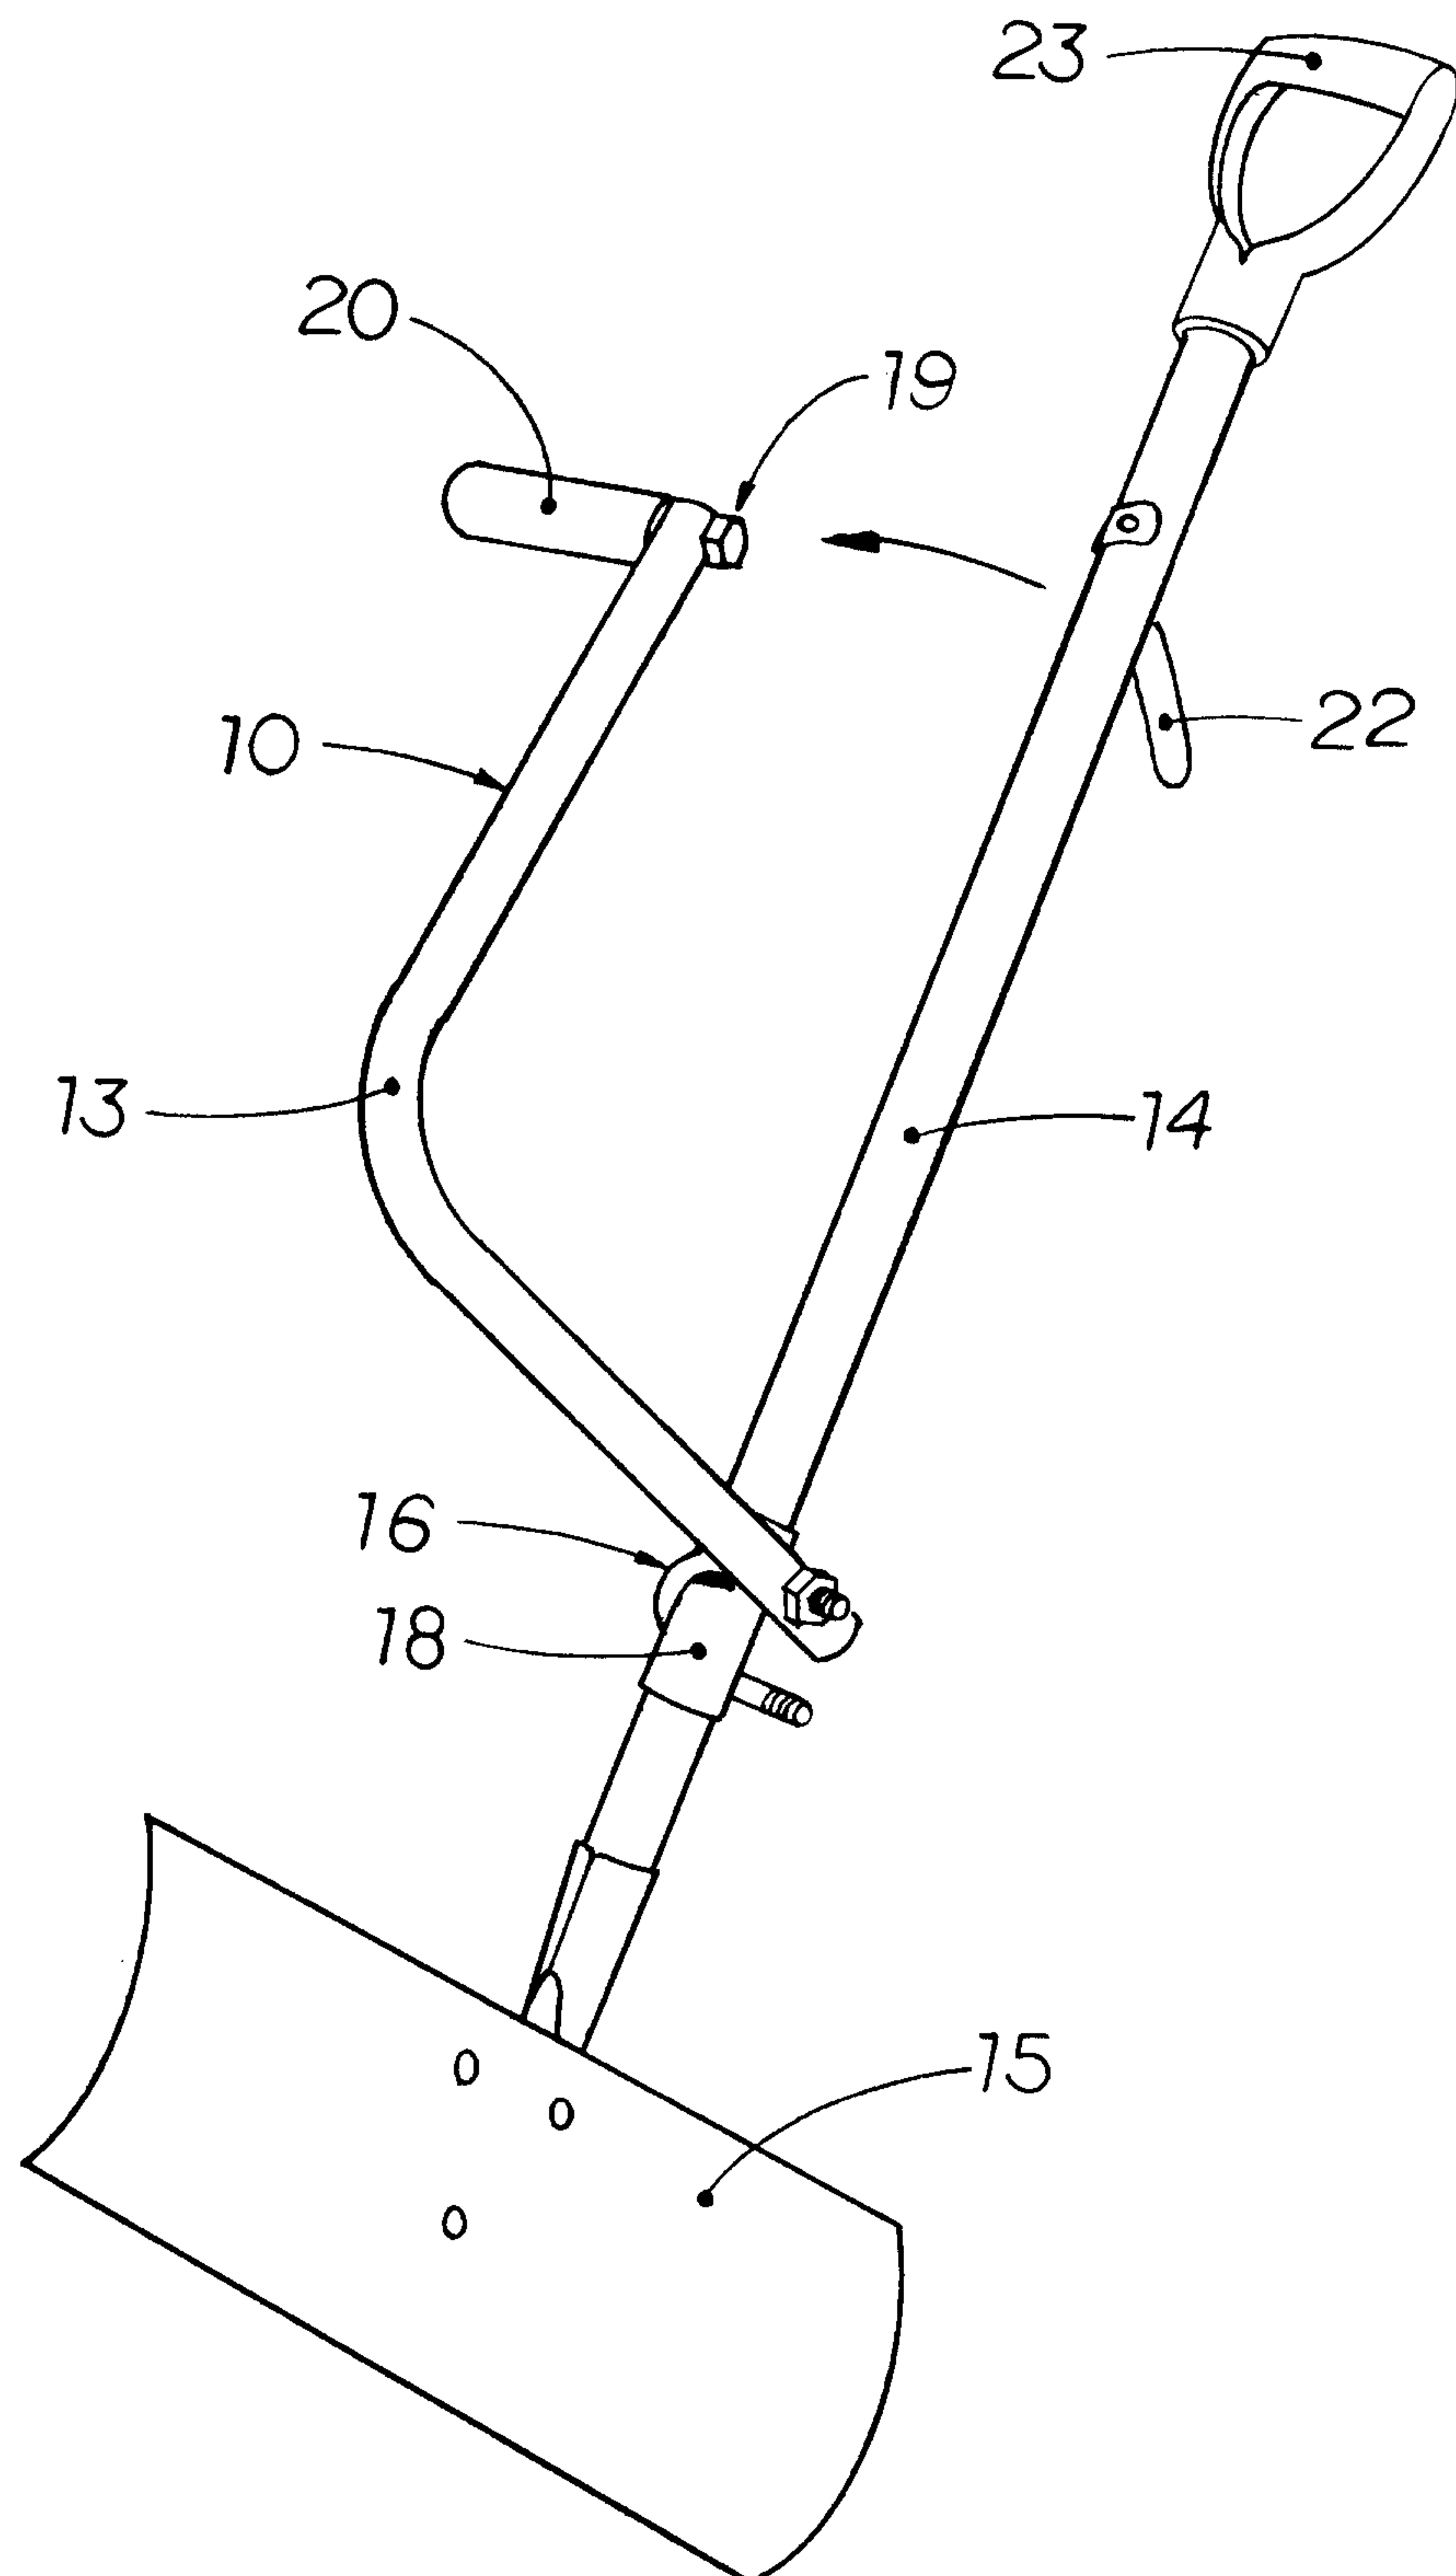


FIG. 4

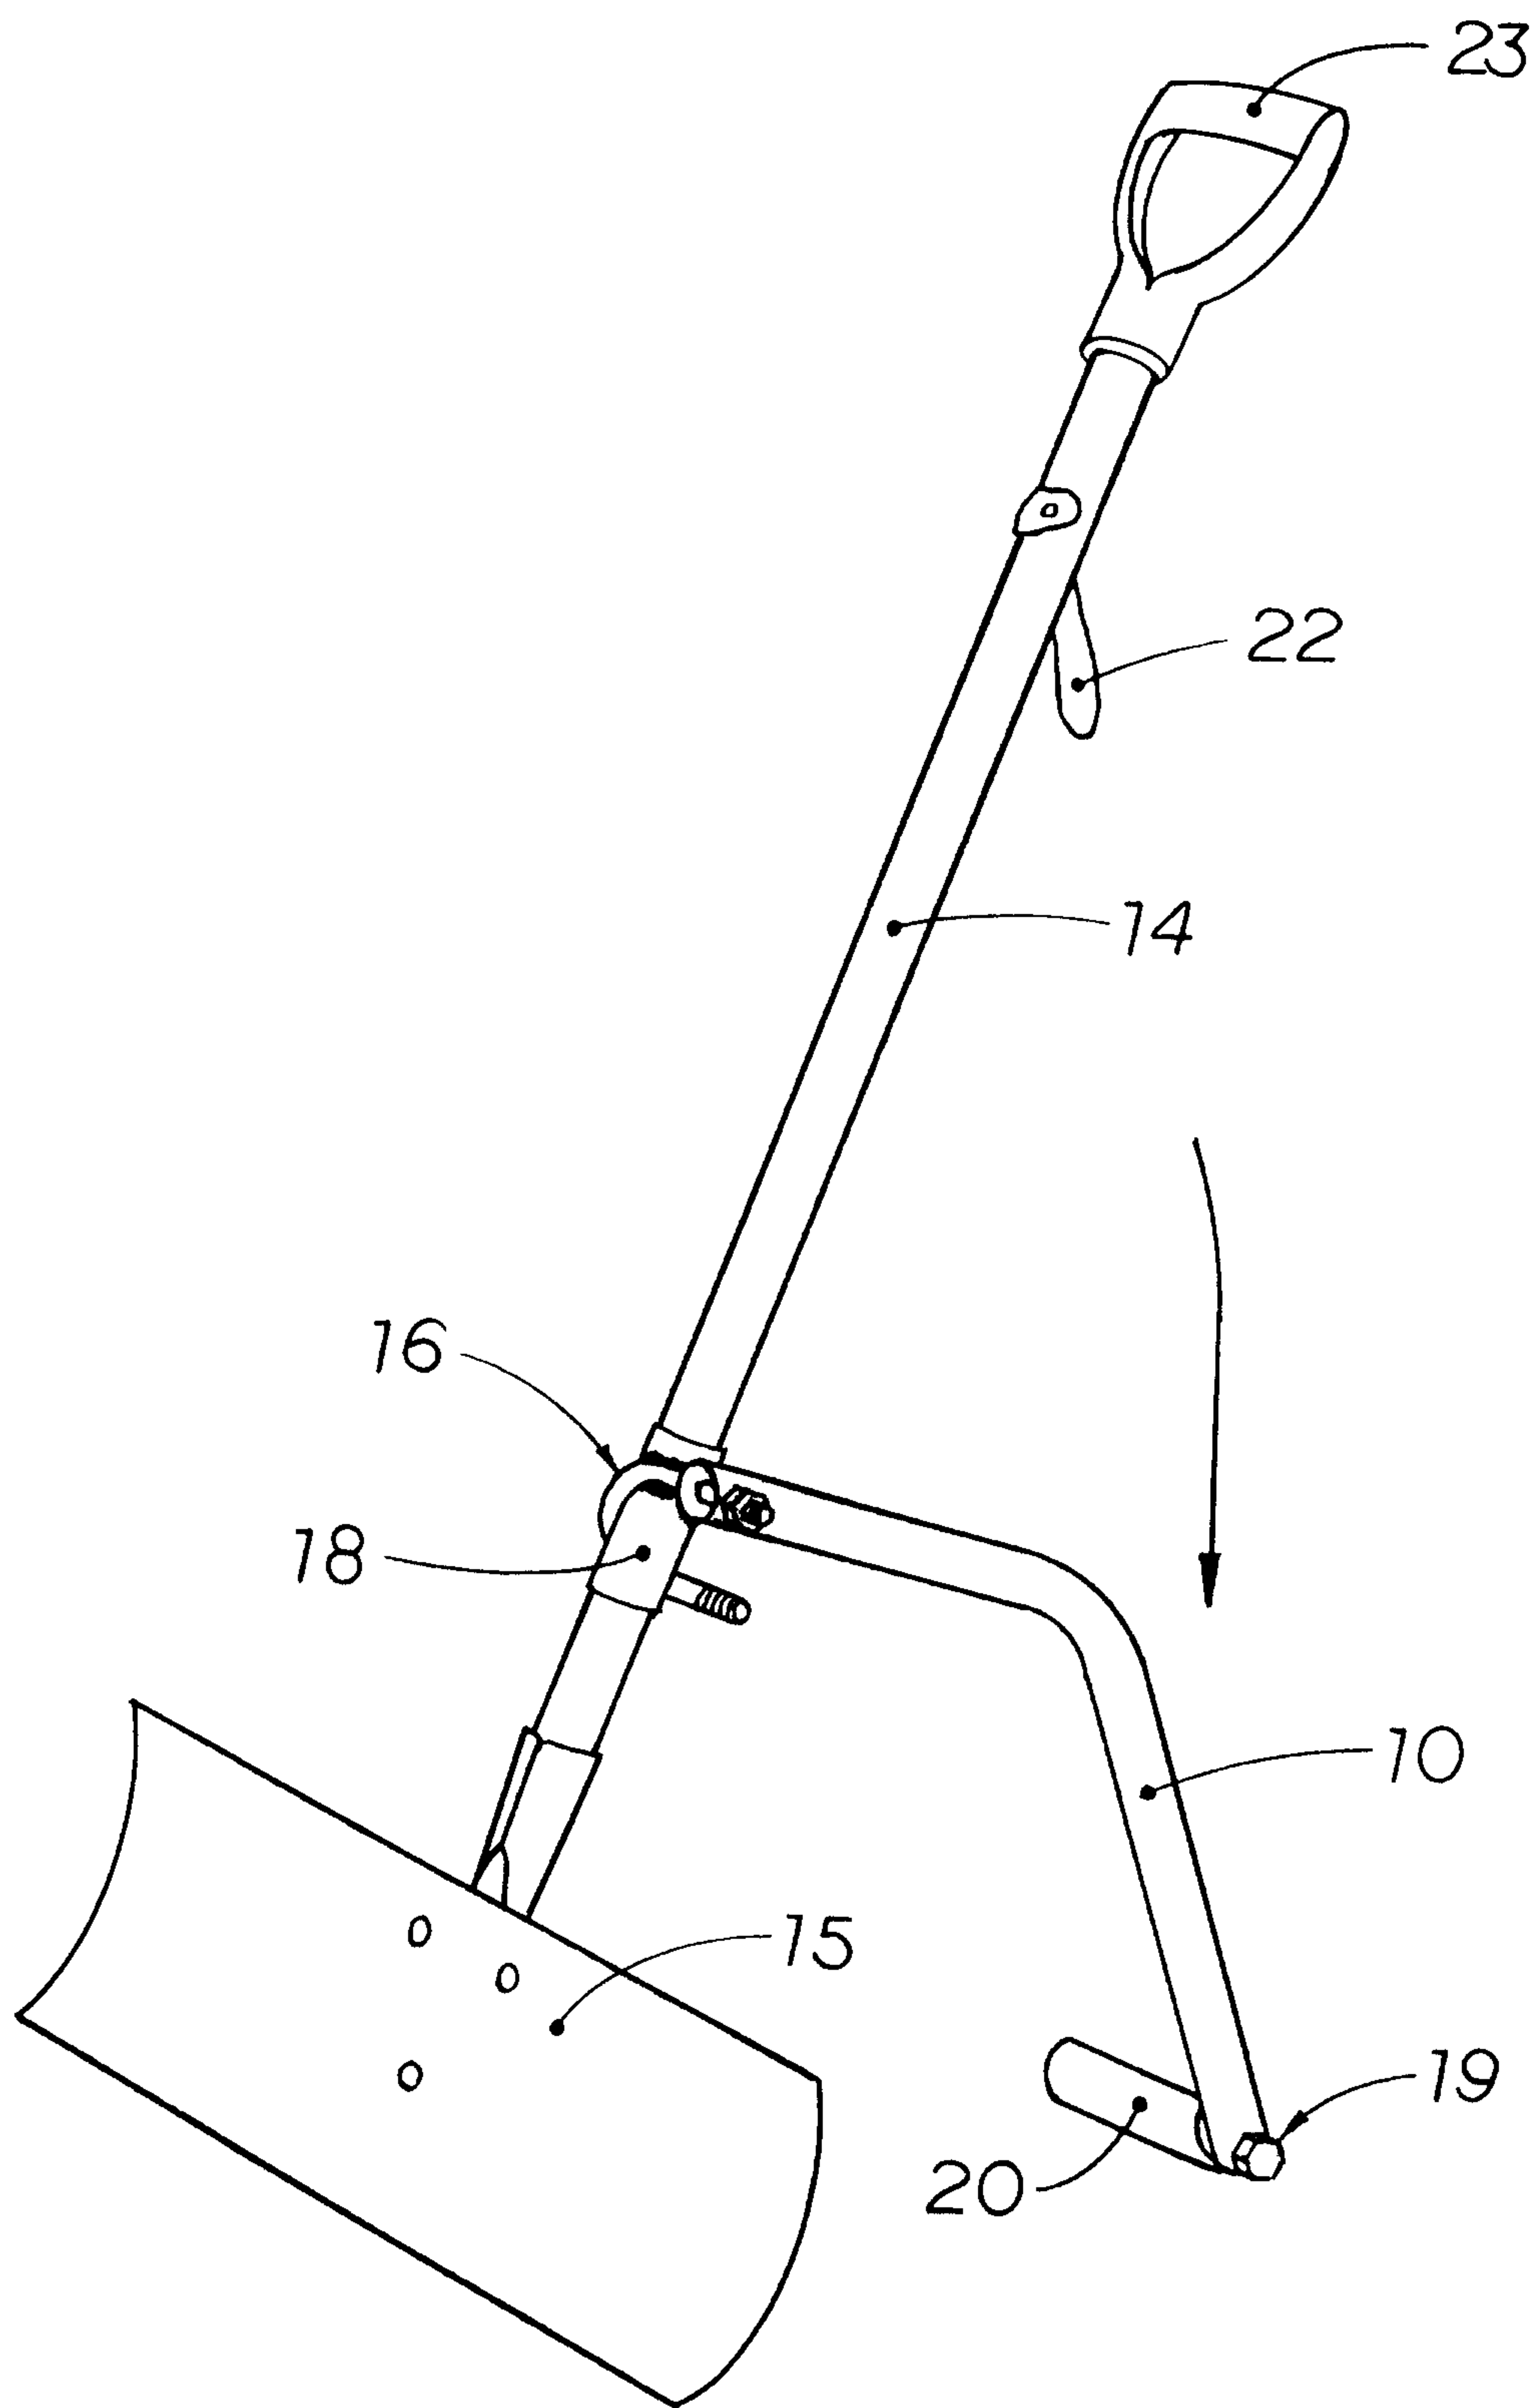


FIG. 5

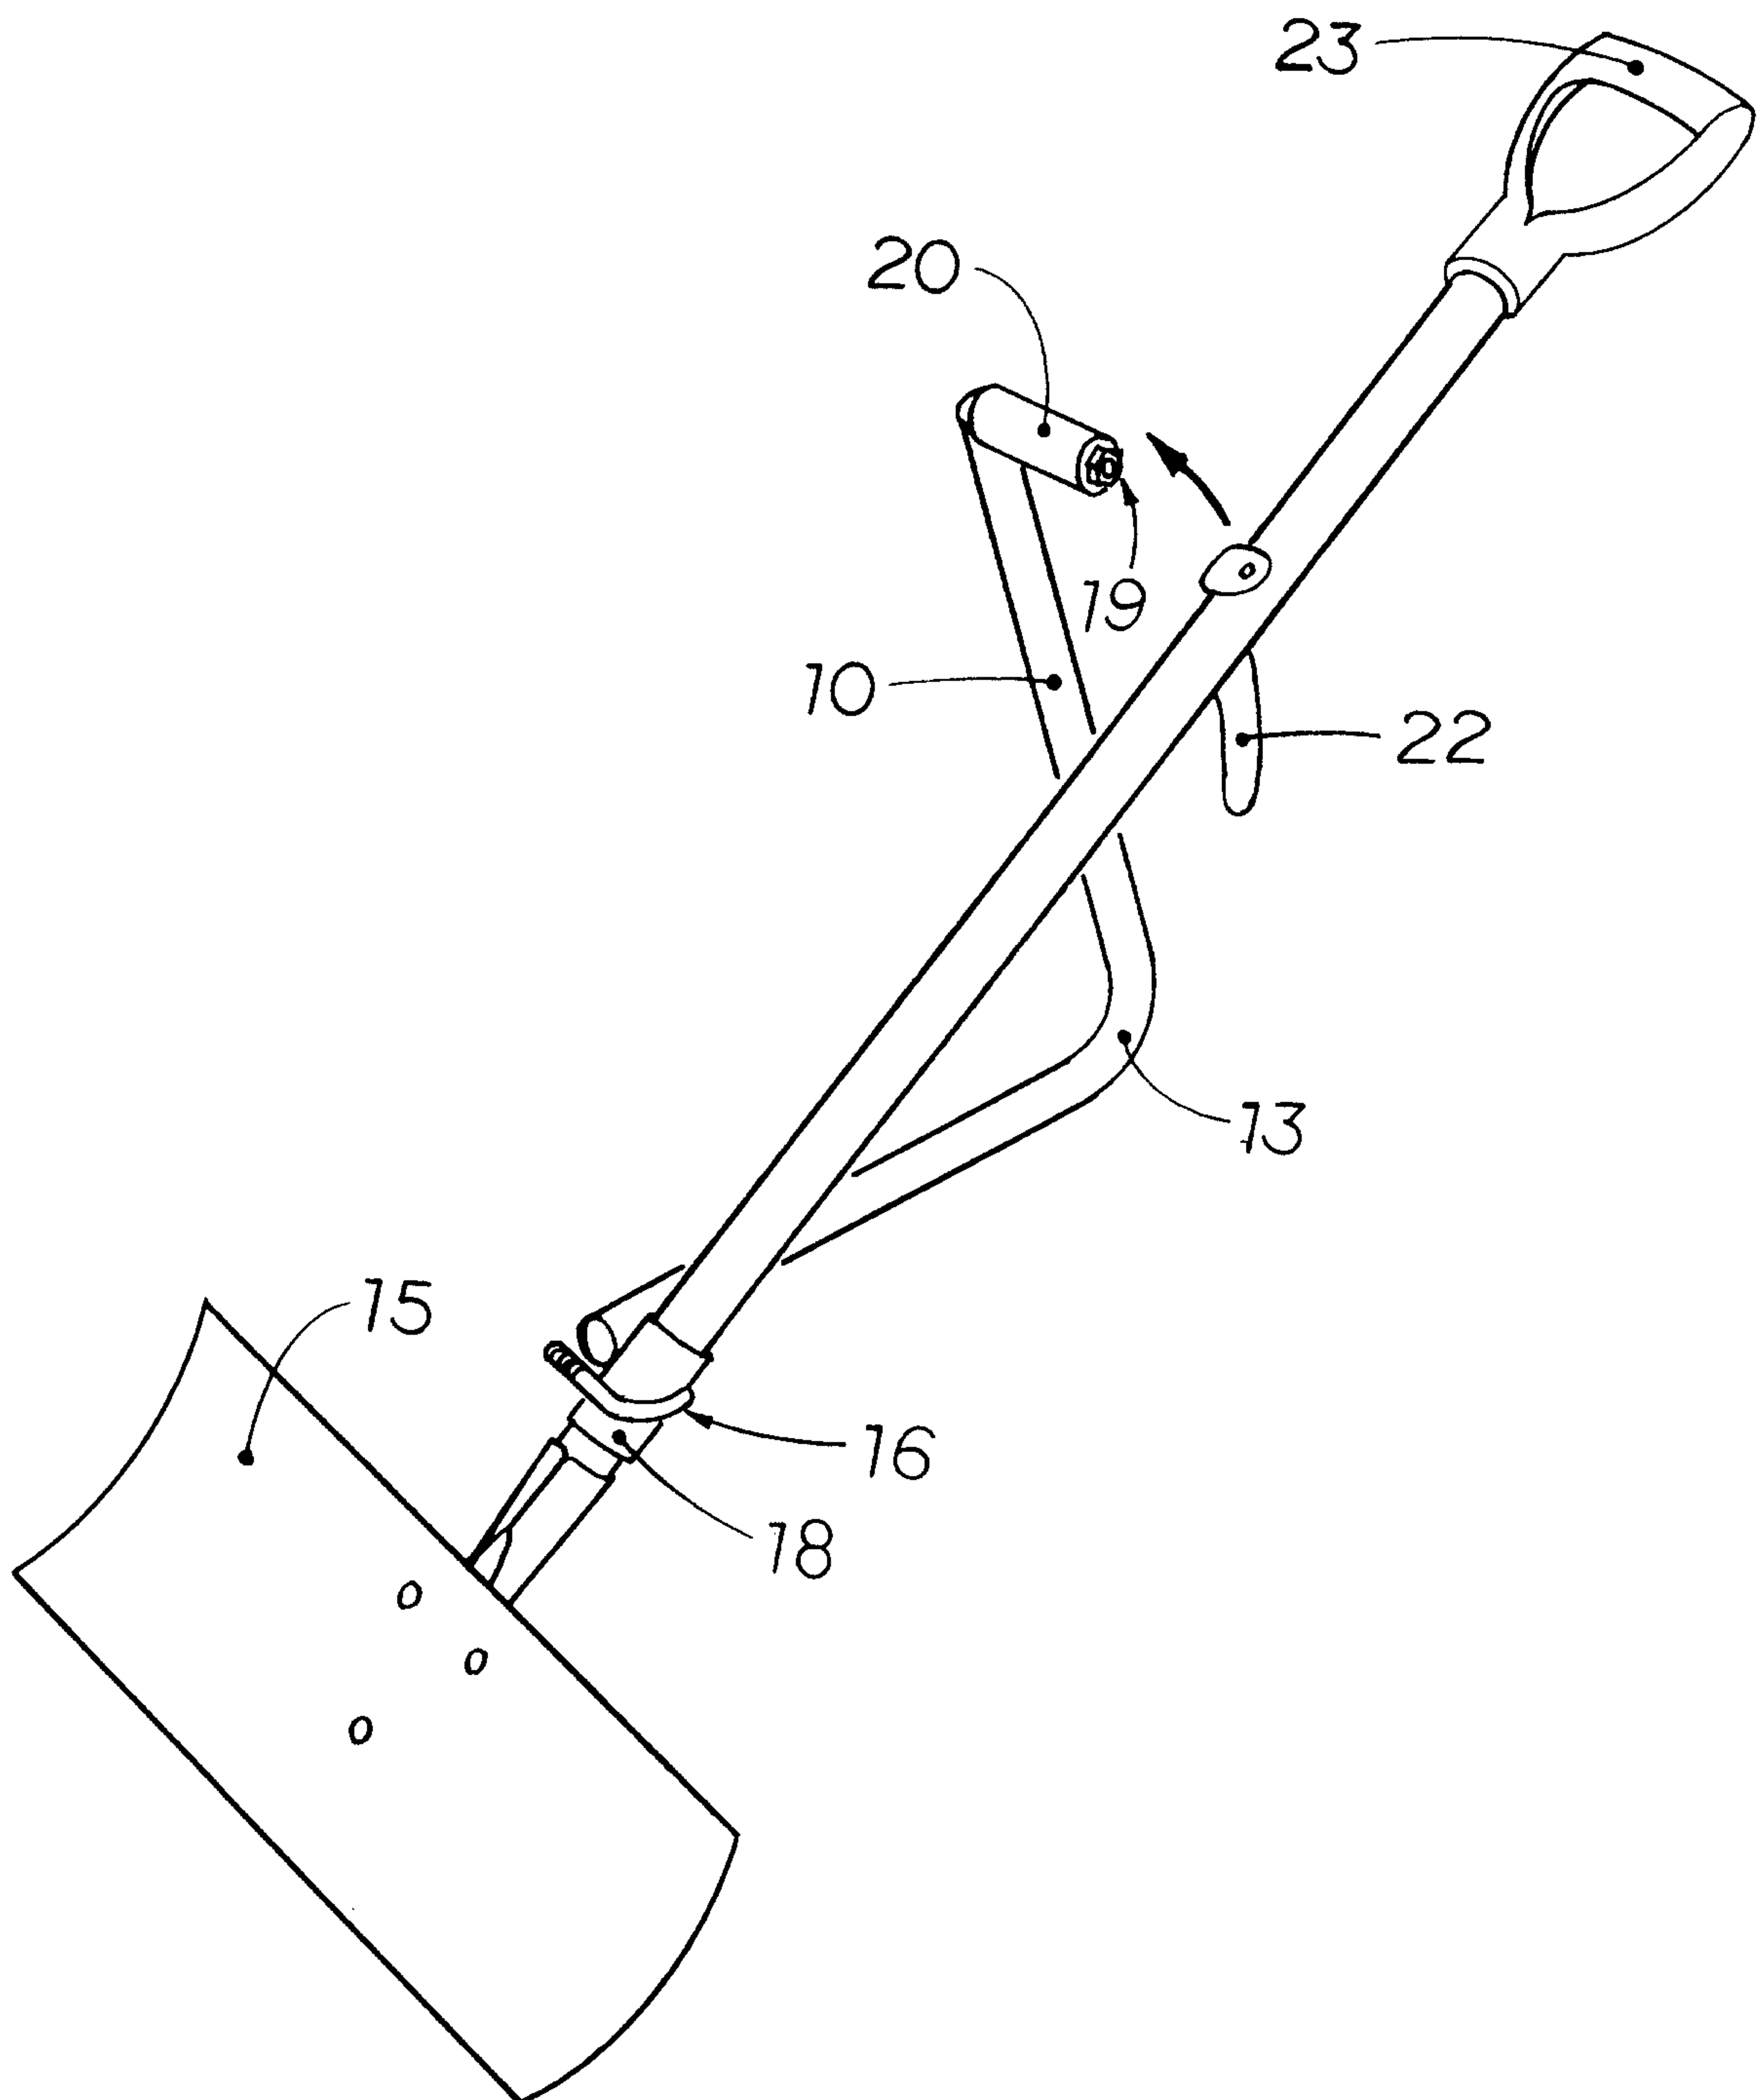


FIG. 6

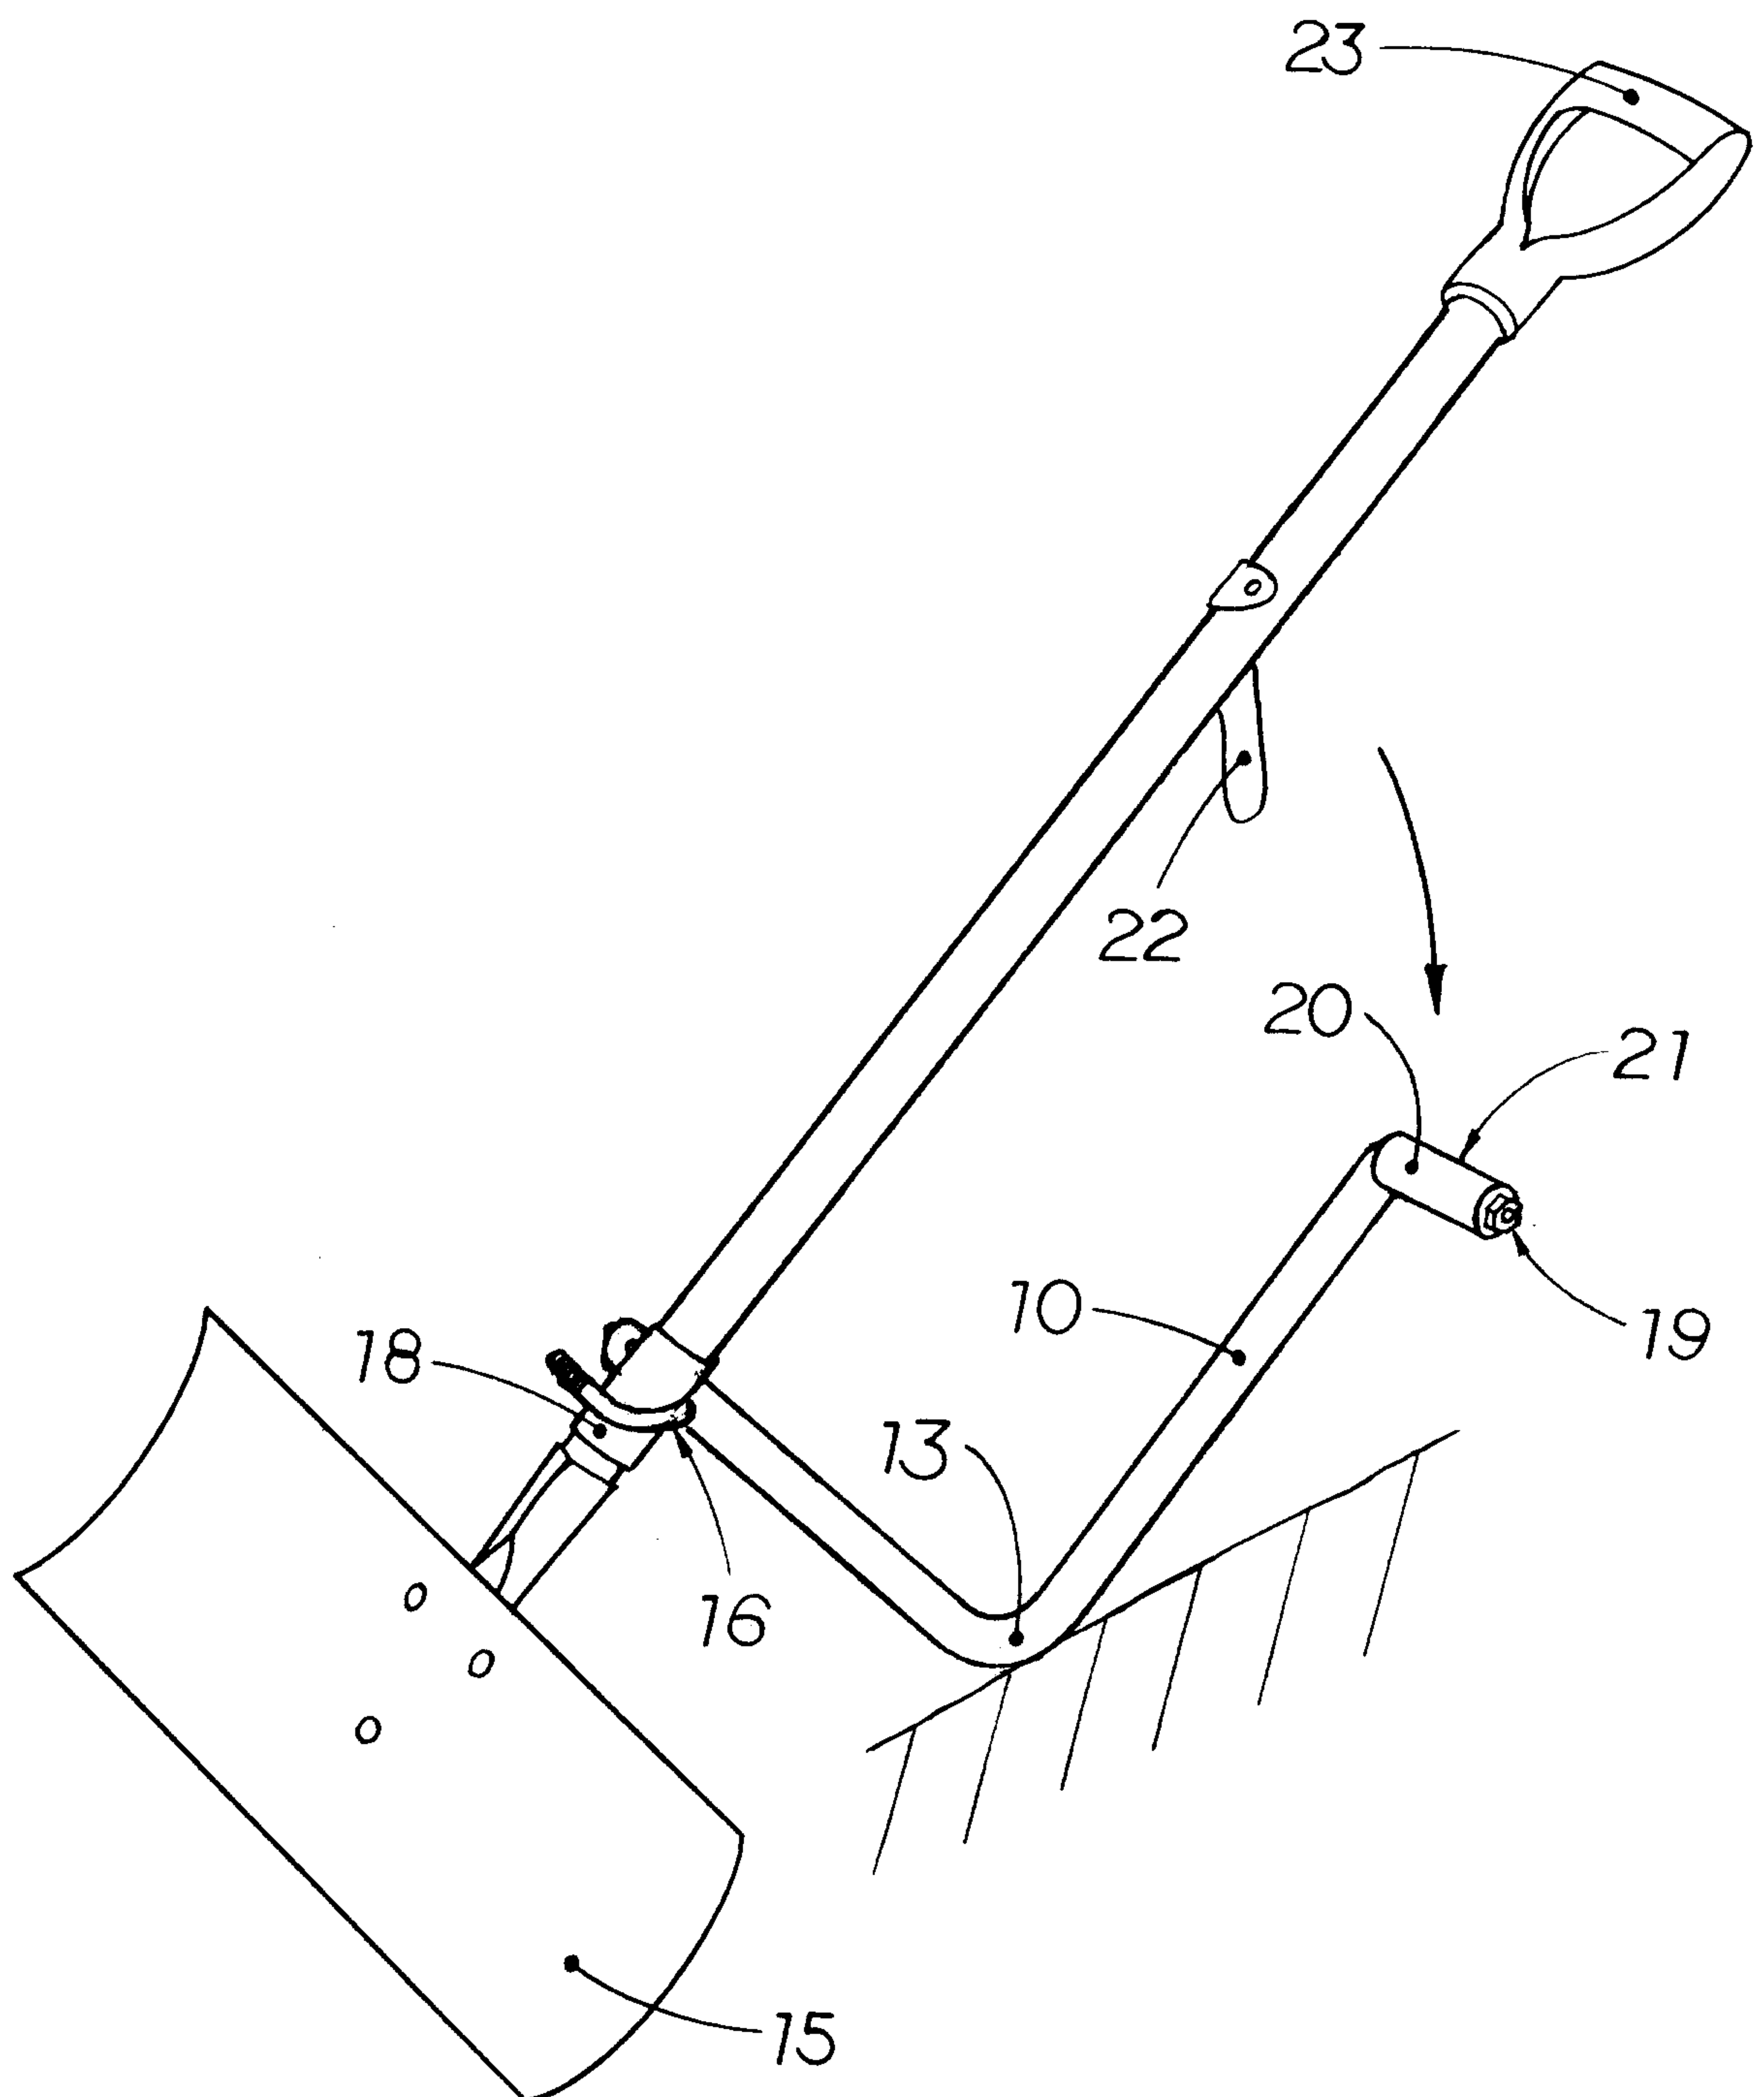


FIG. 7

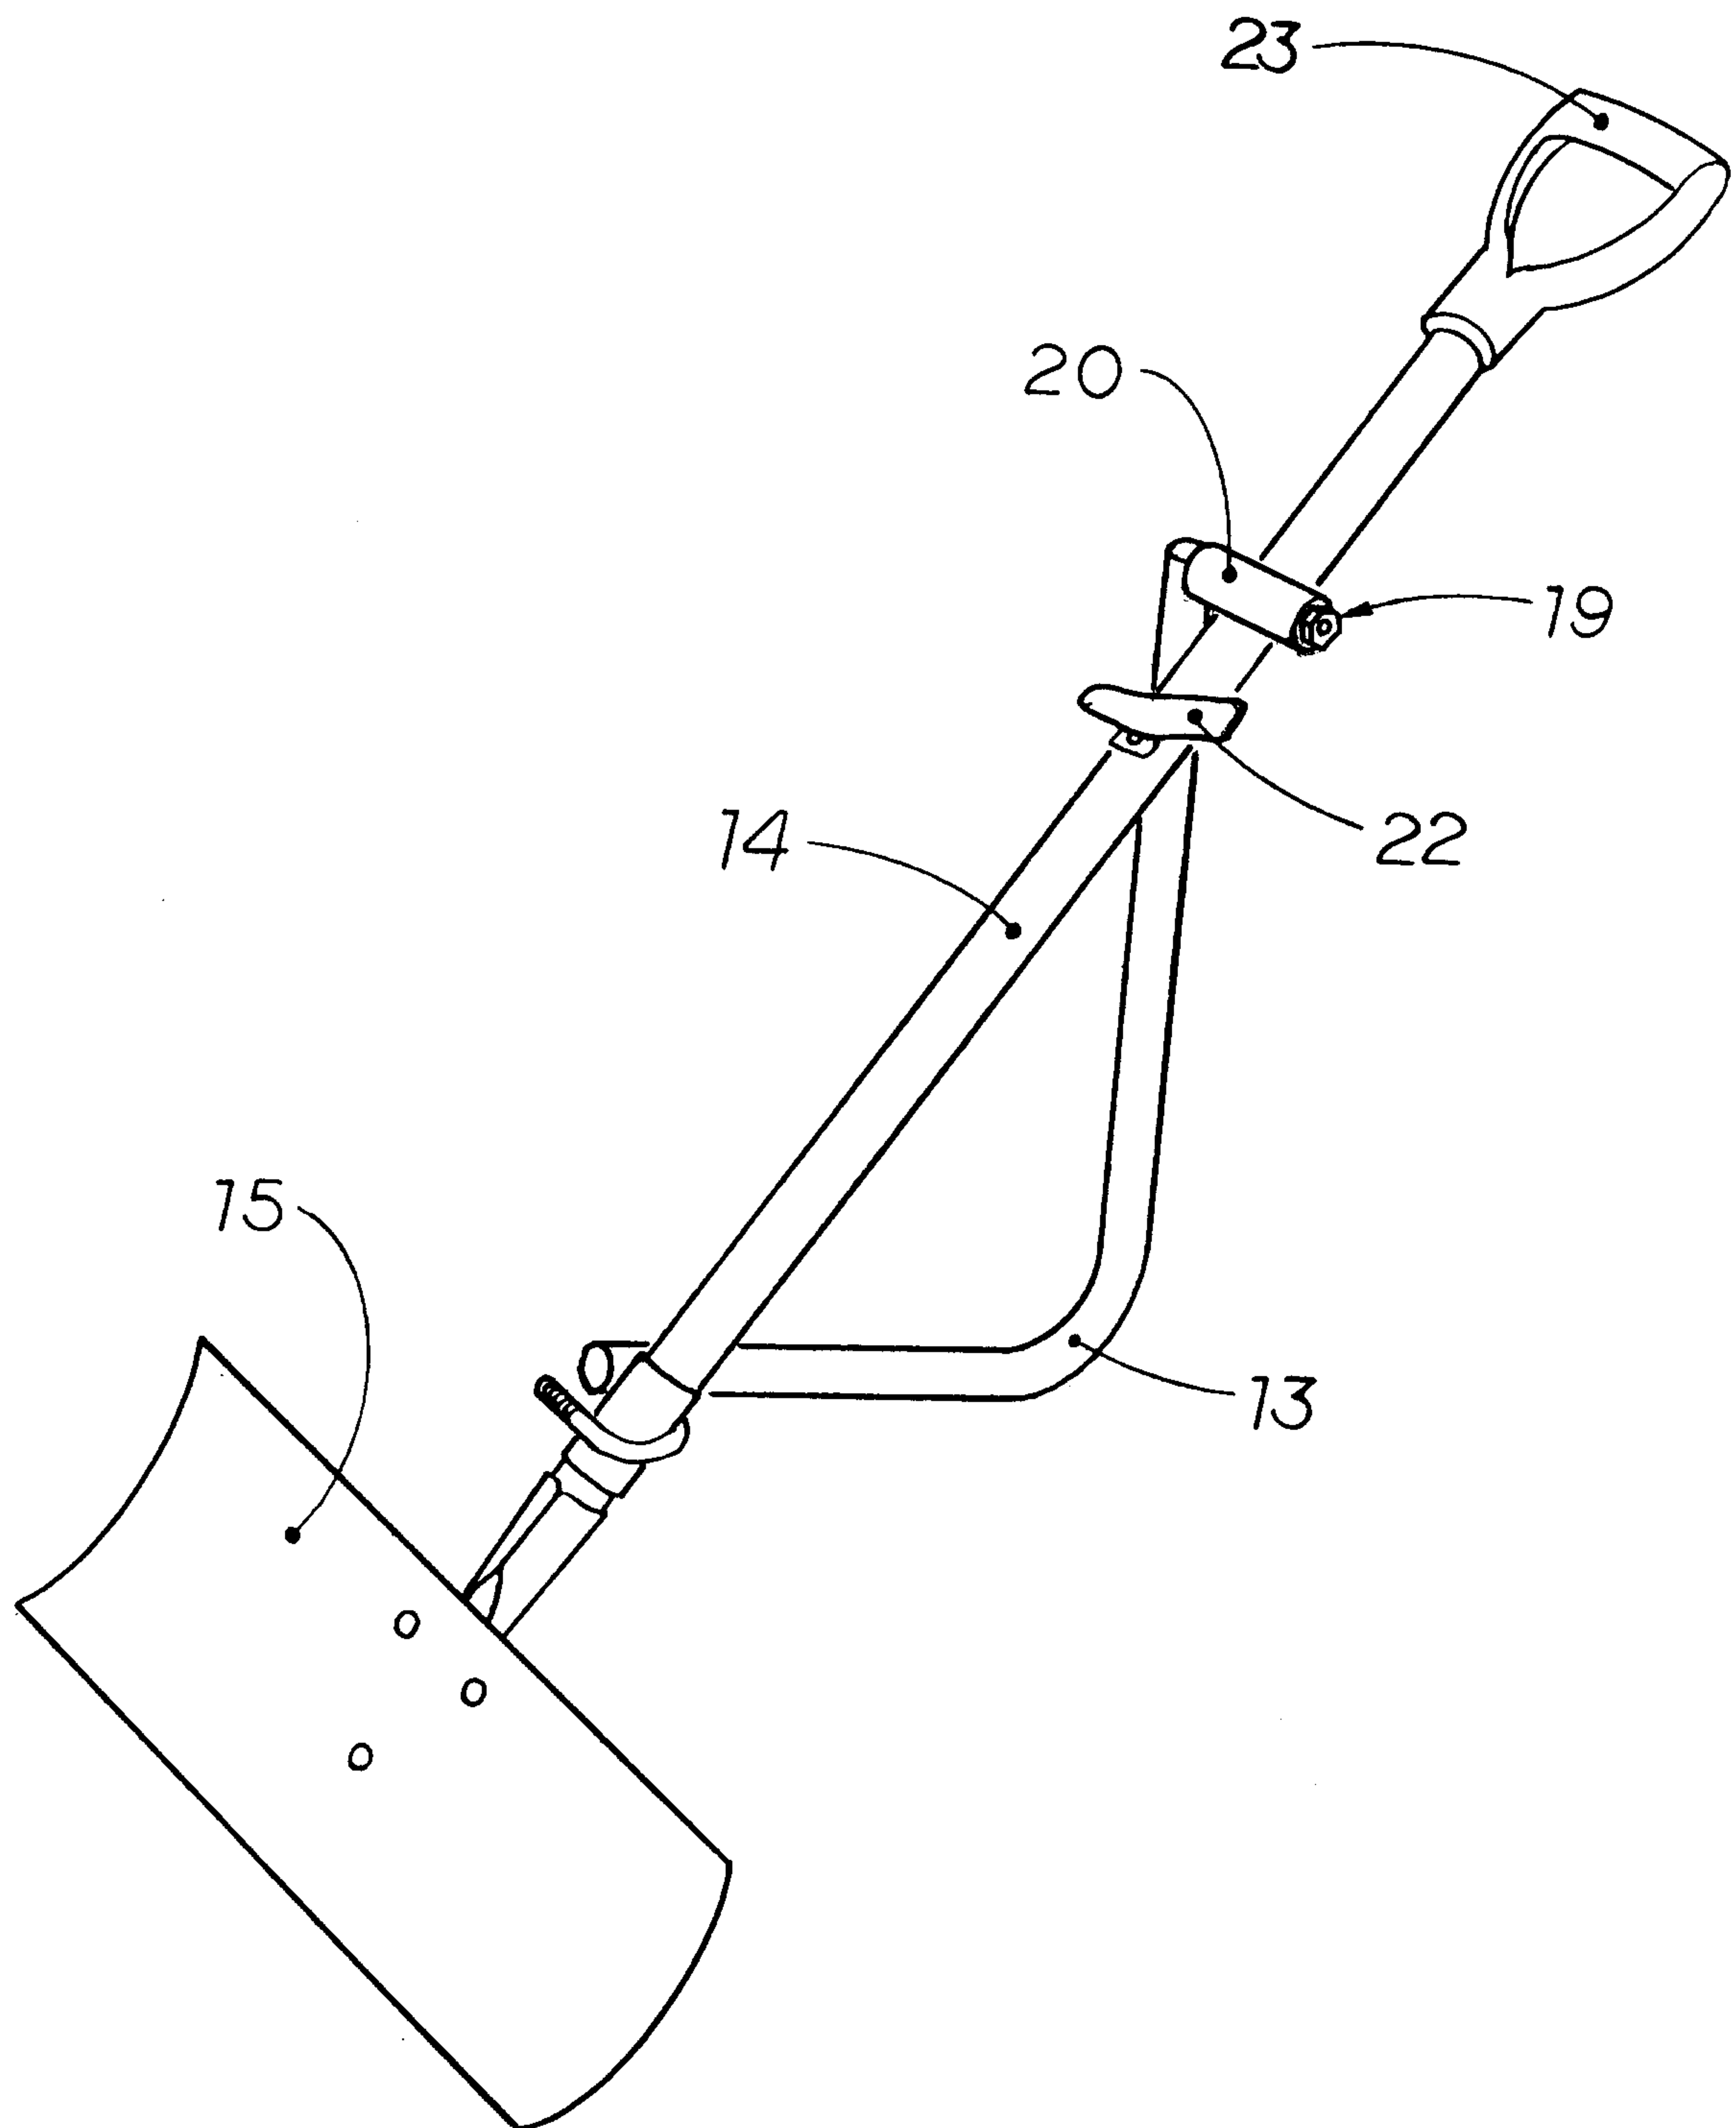


FIG. 8

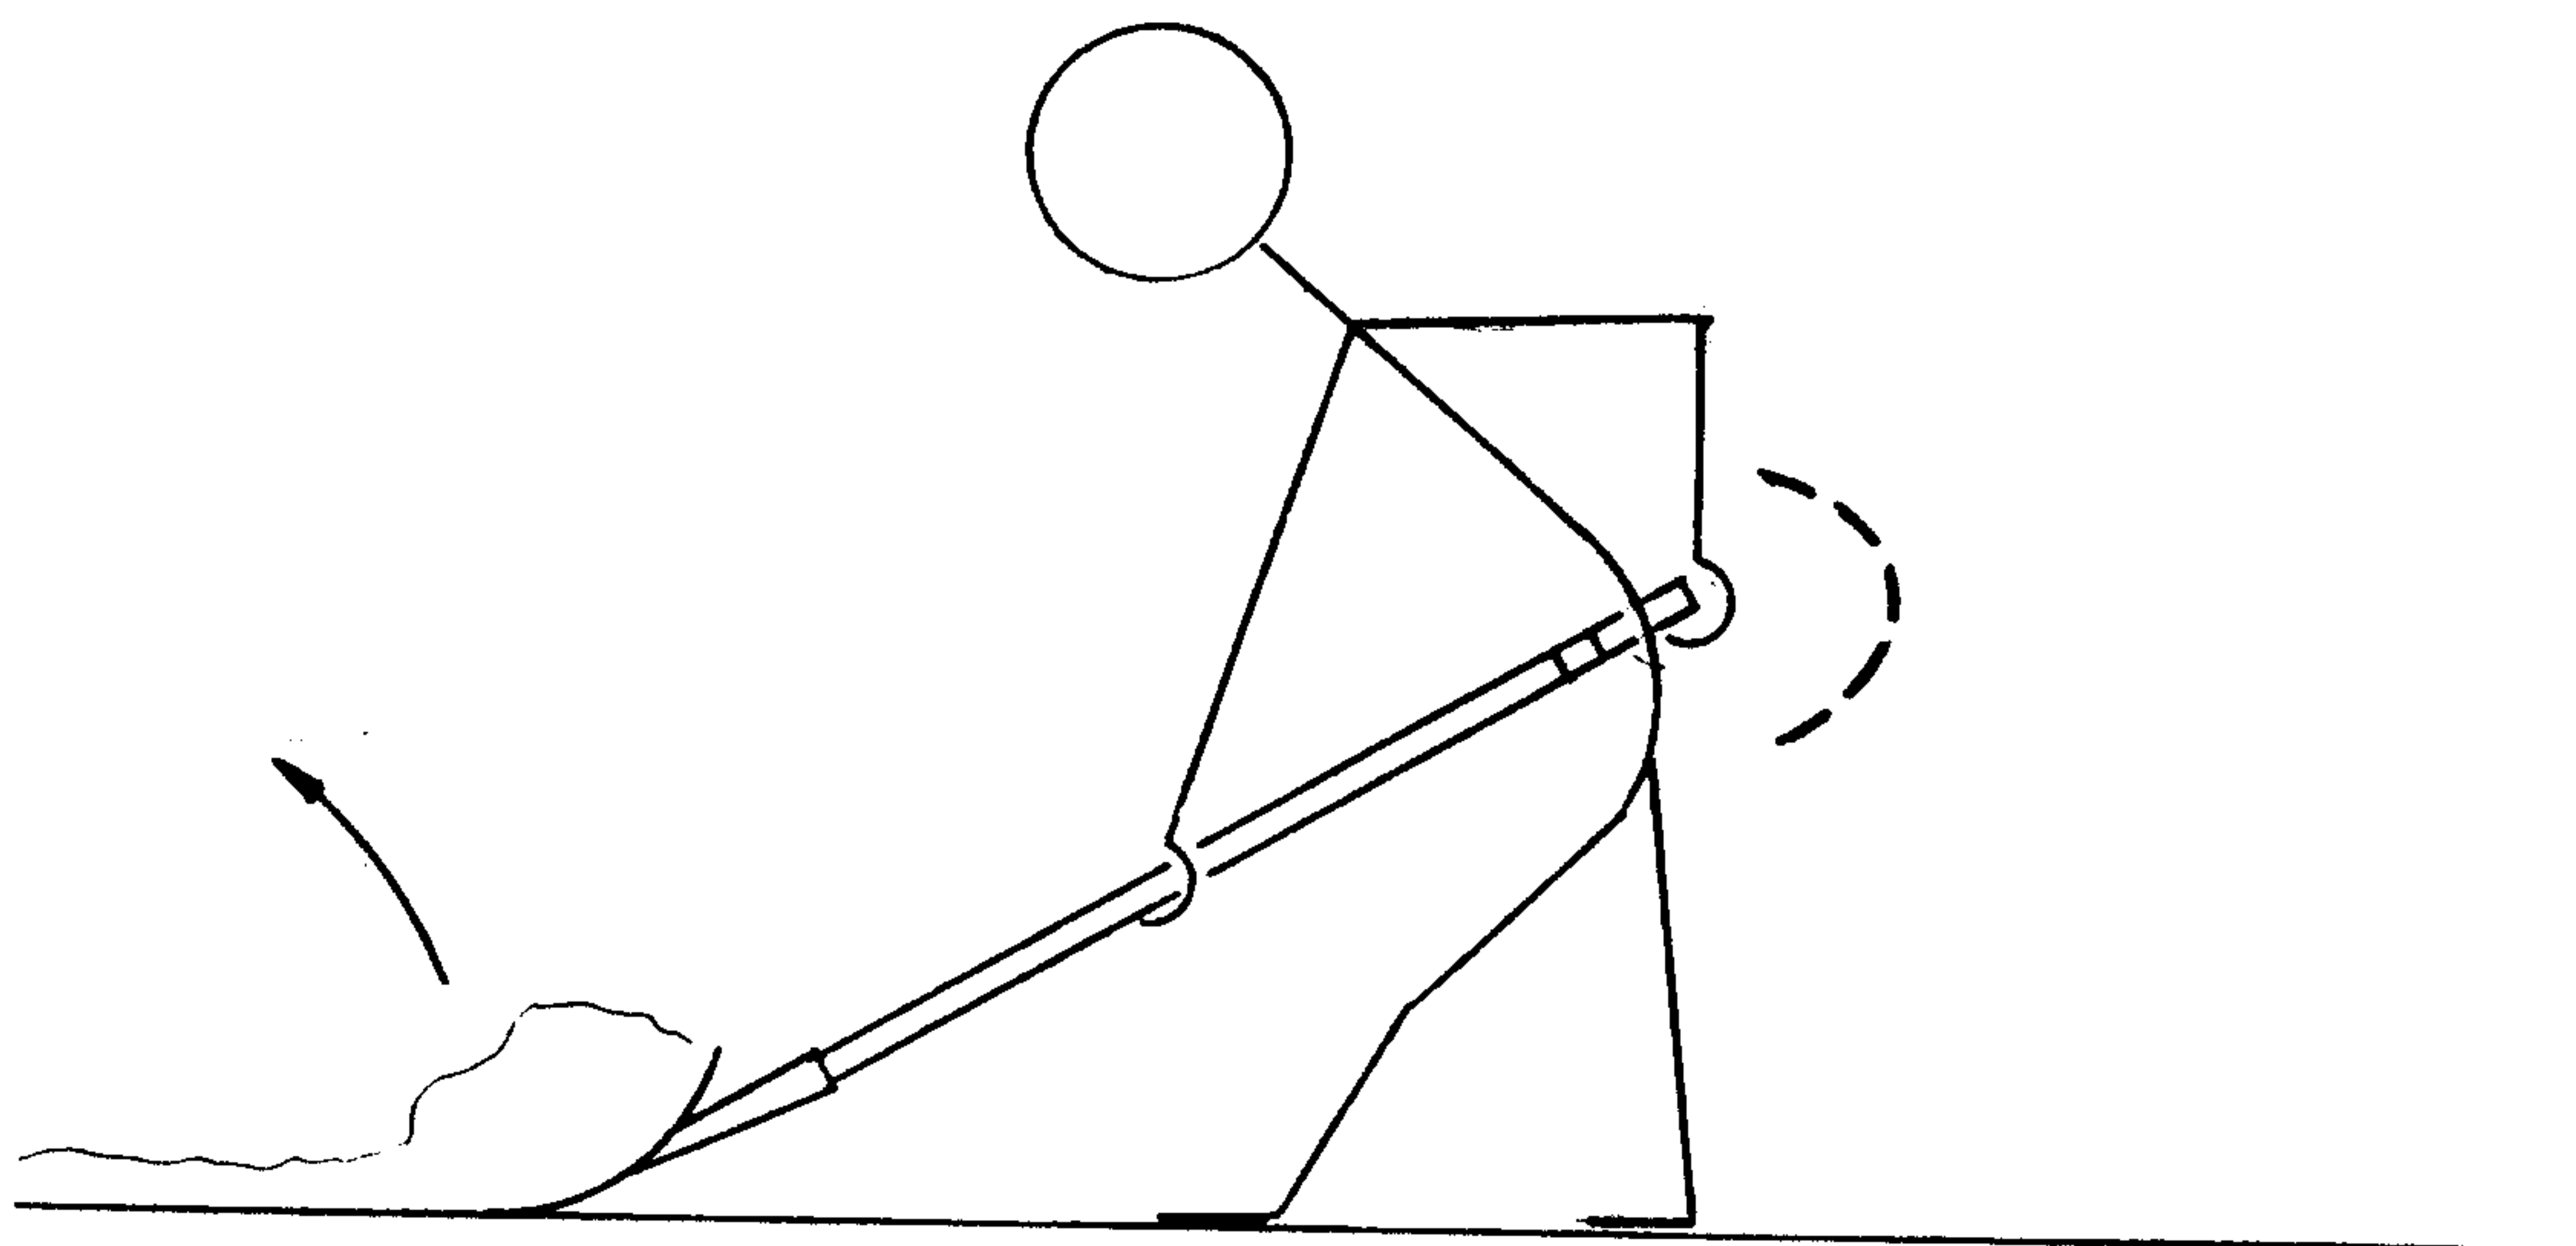


FIG. 9

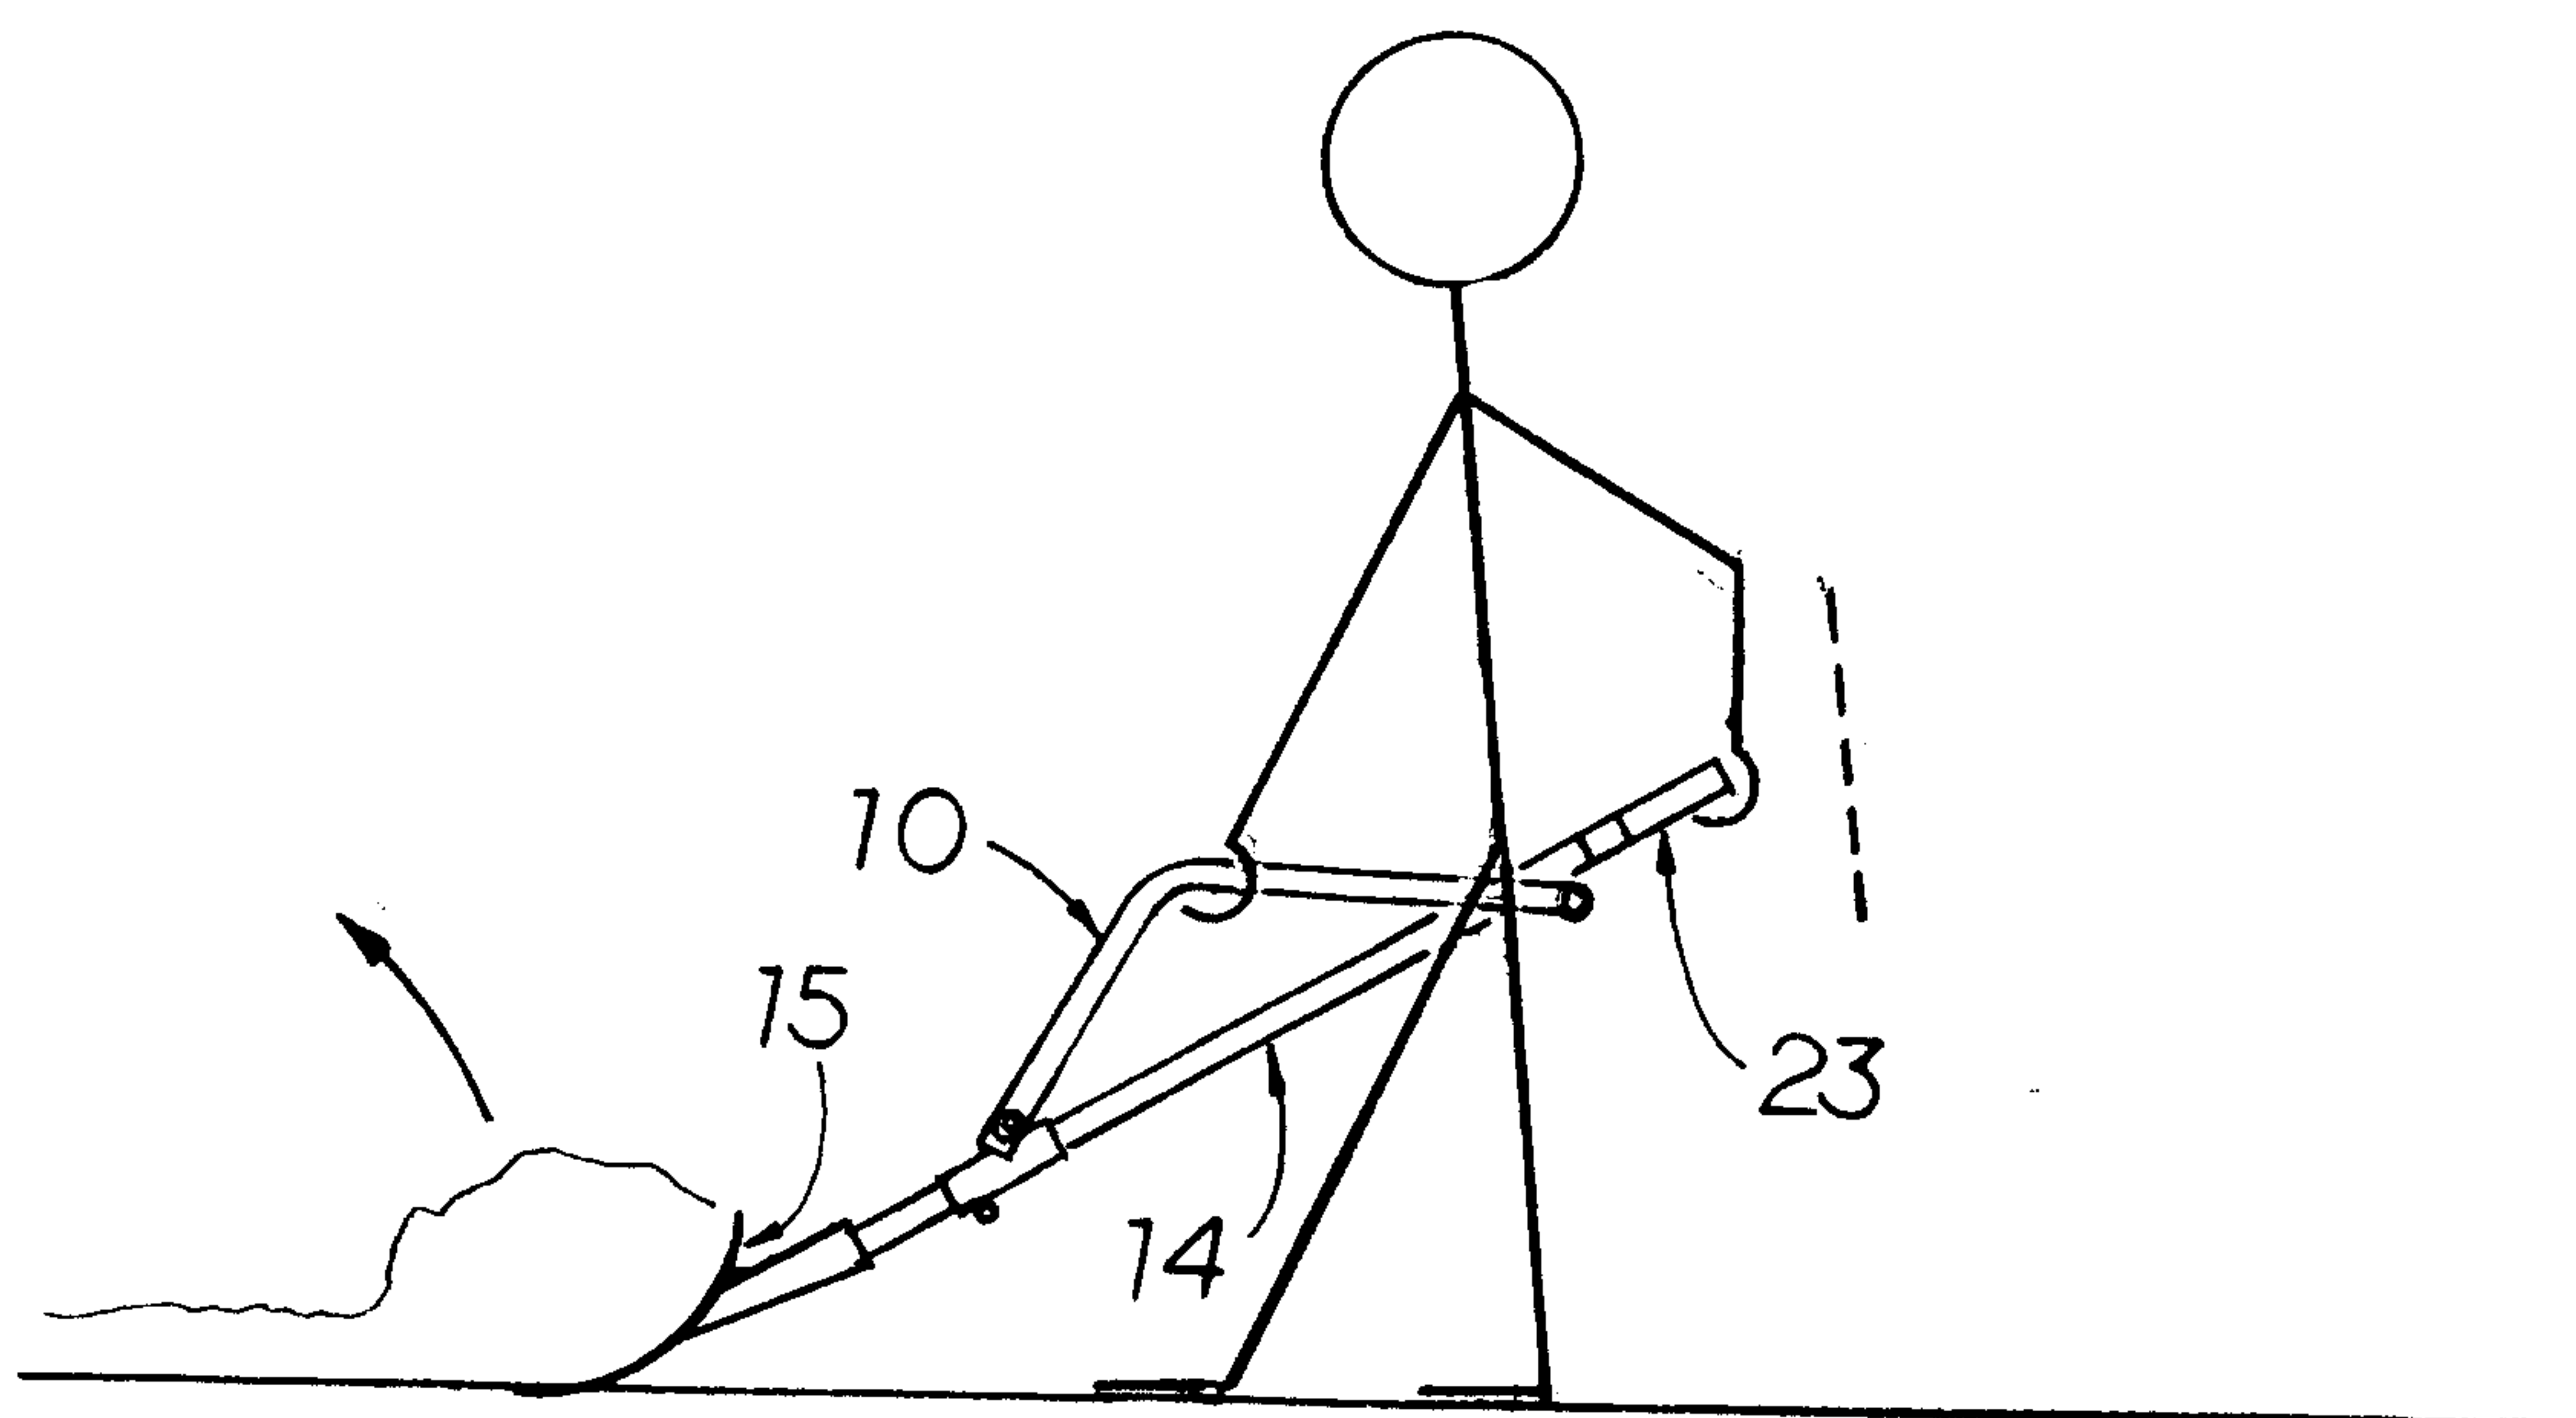


FIG. 10

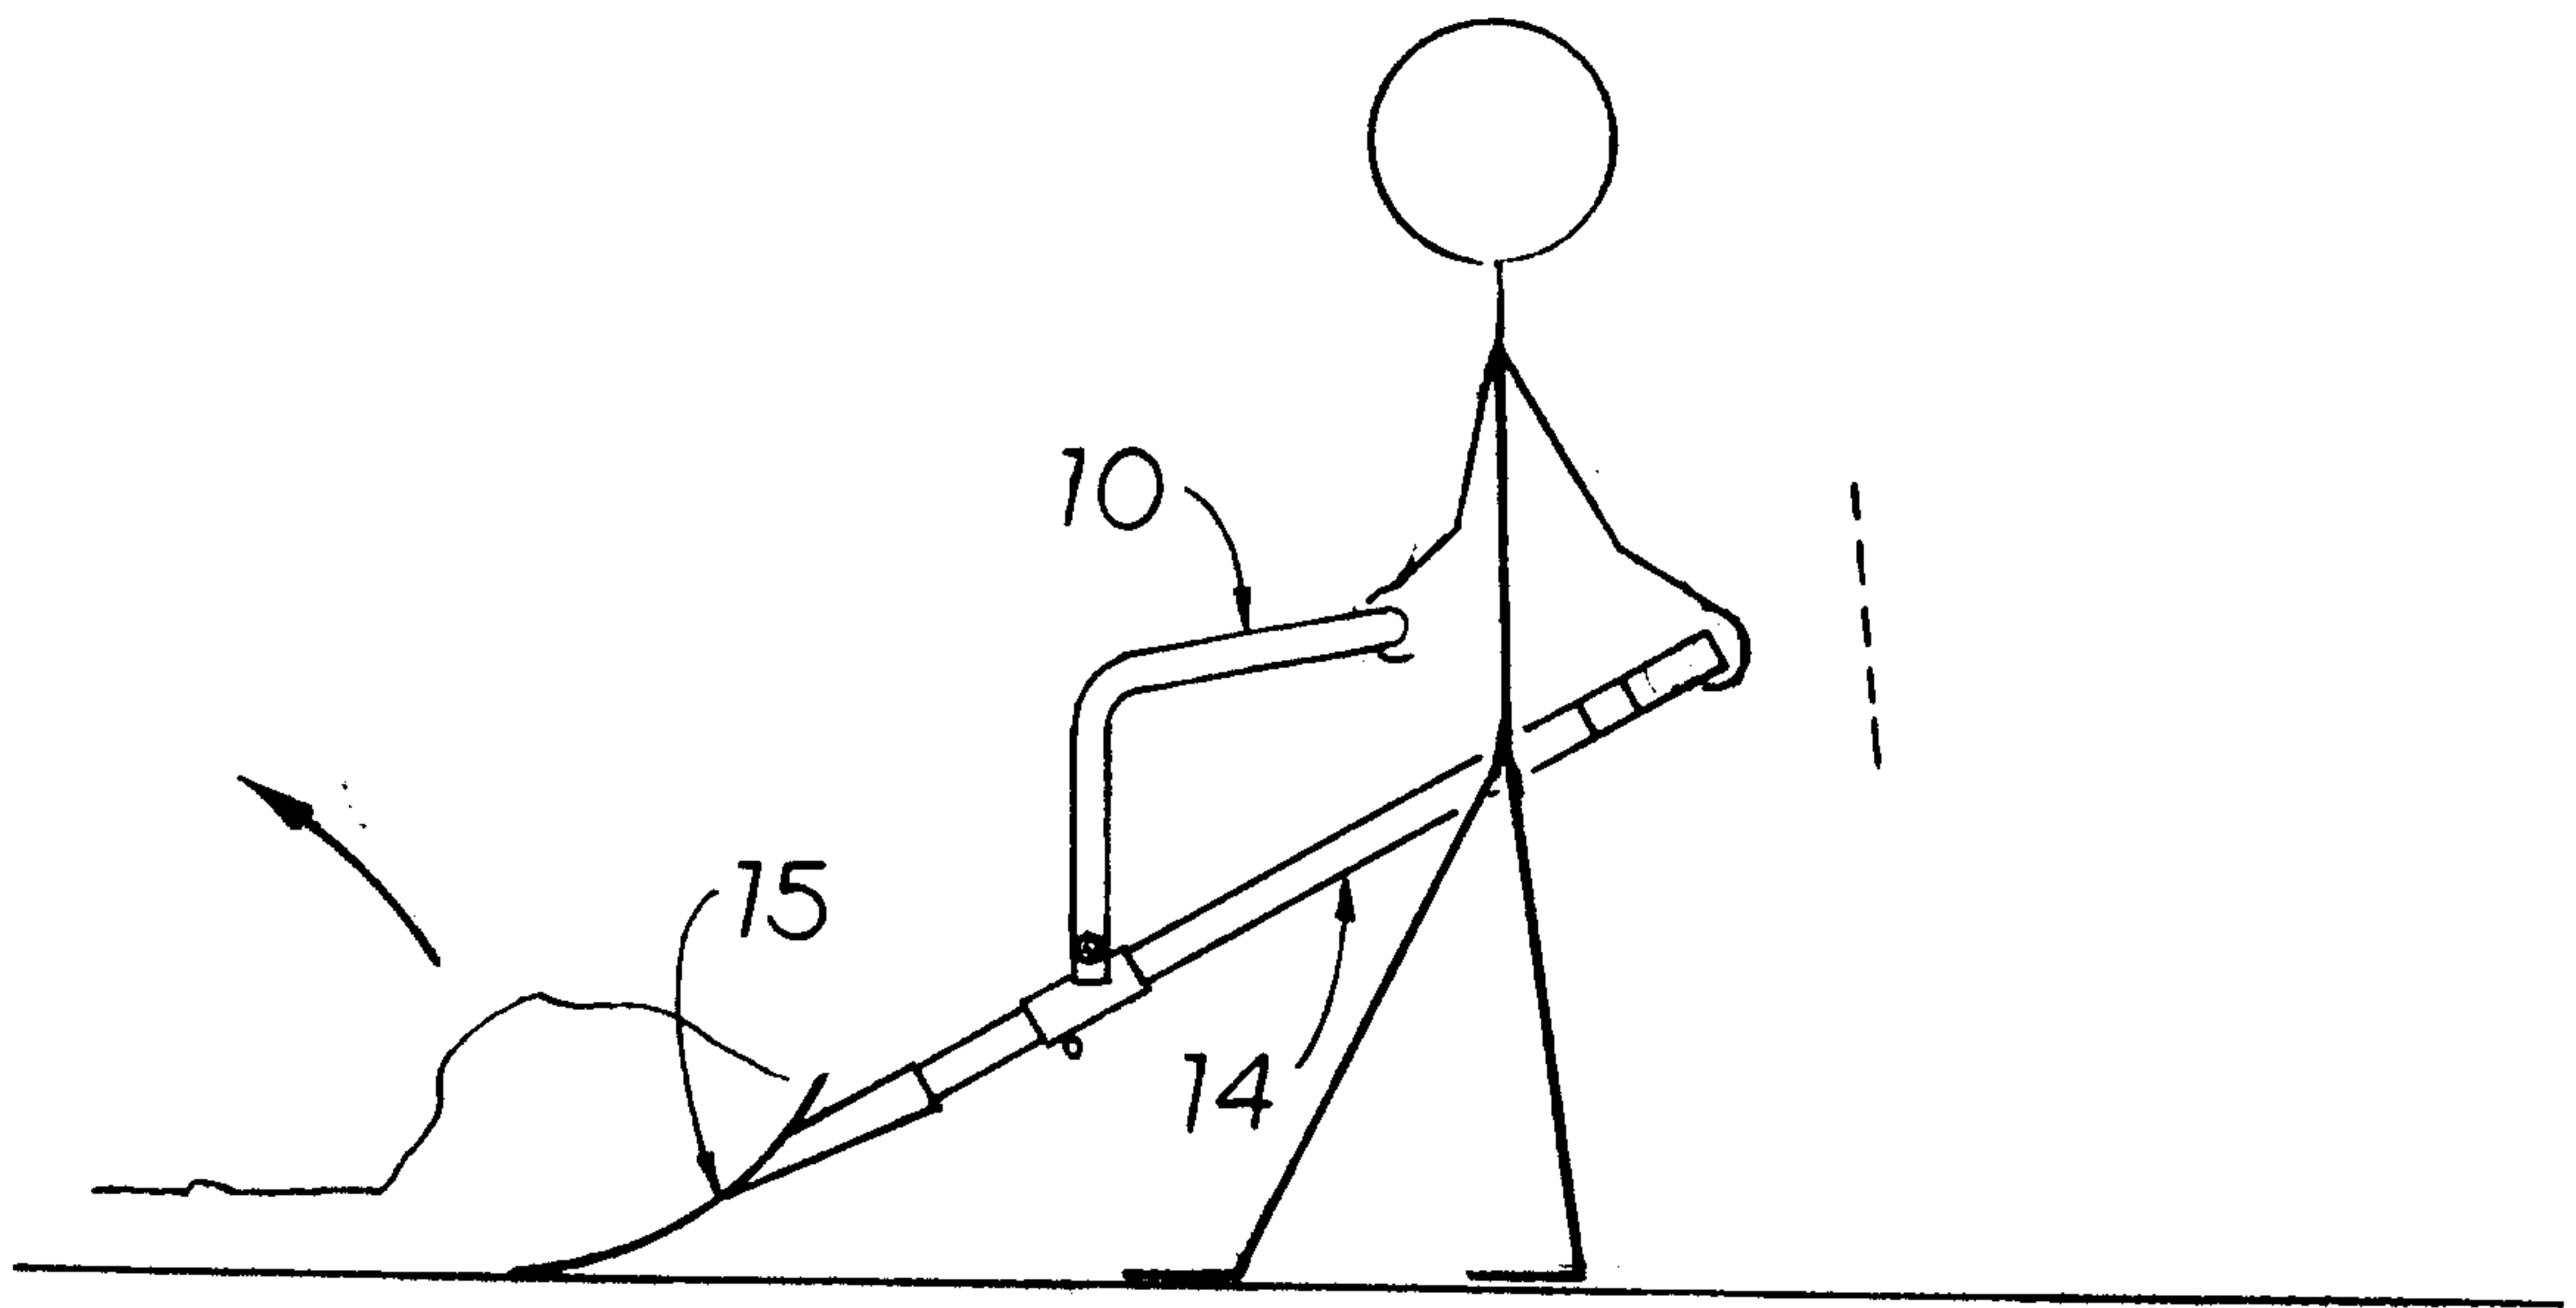


FIG. 11

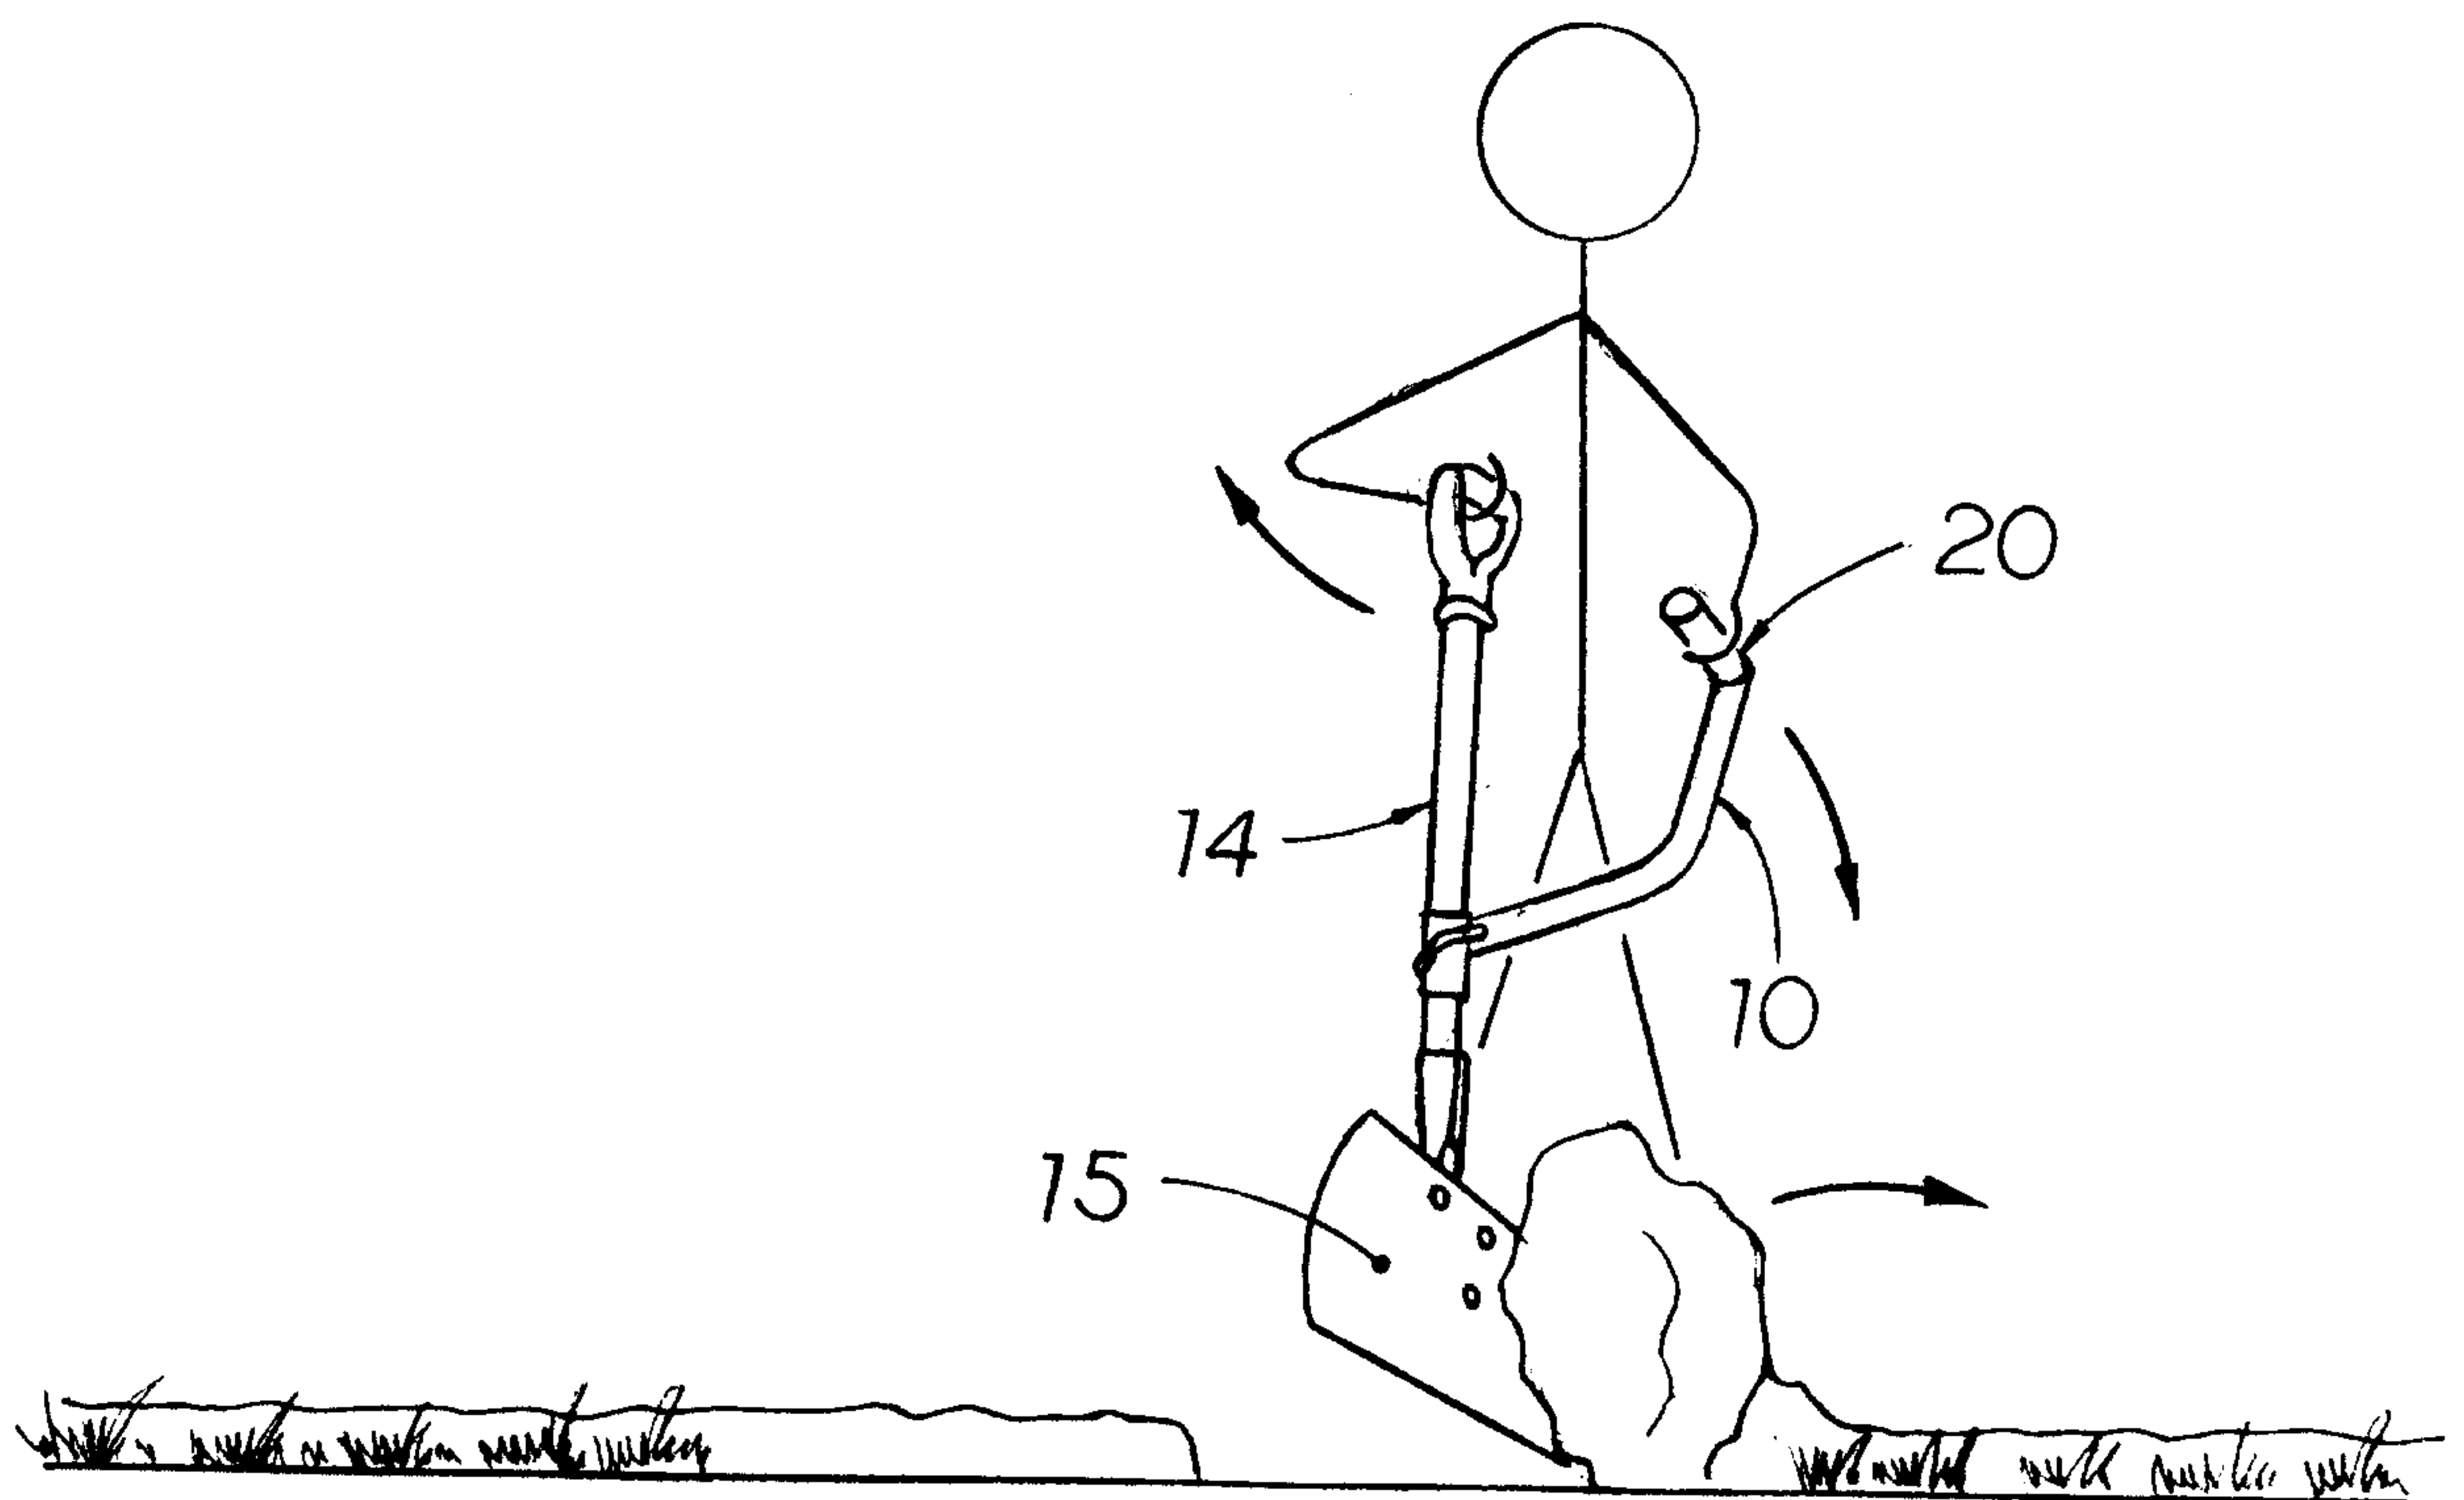


FIG. 12

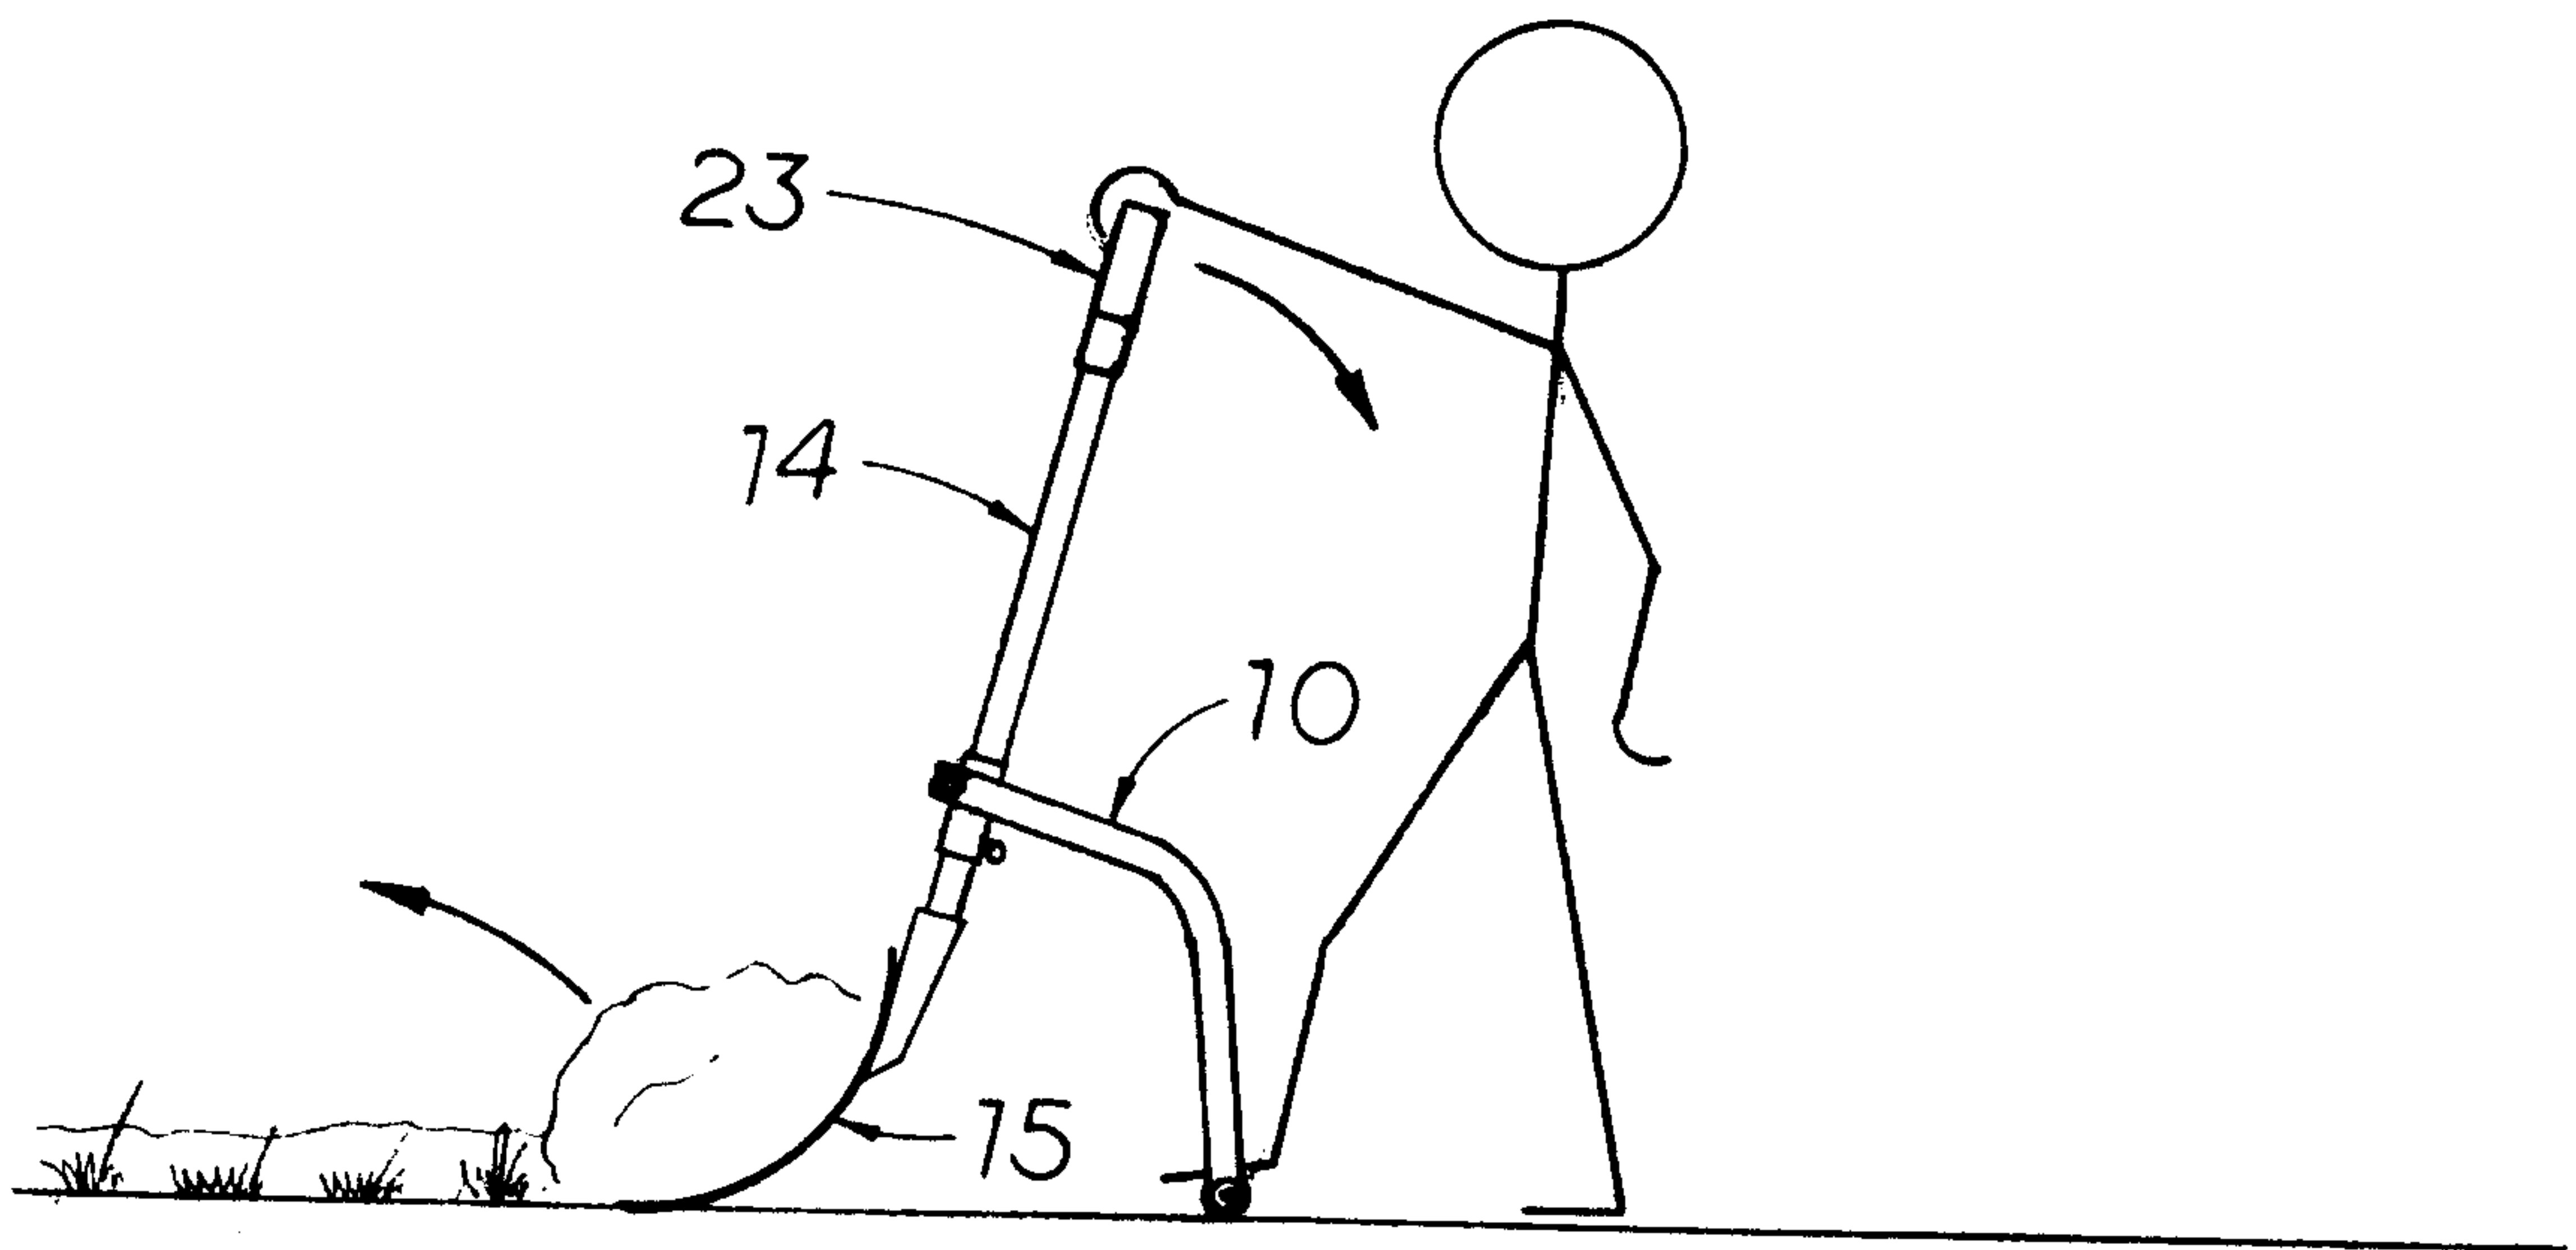


FIG. 13

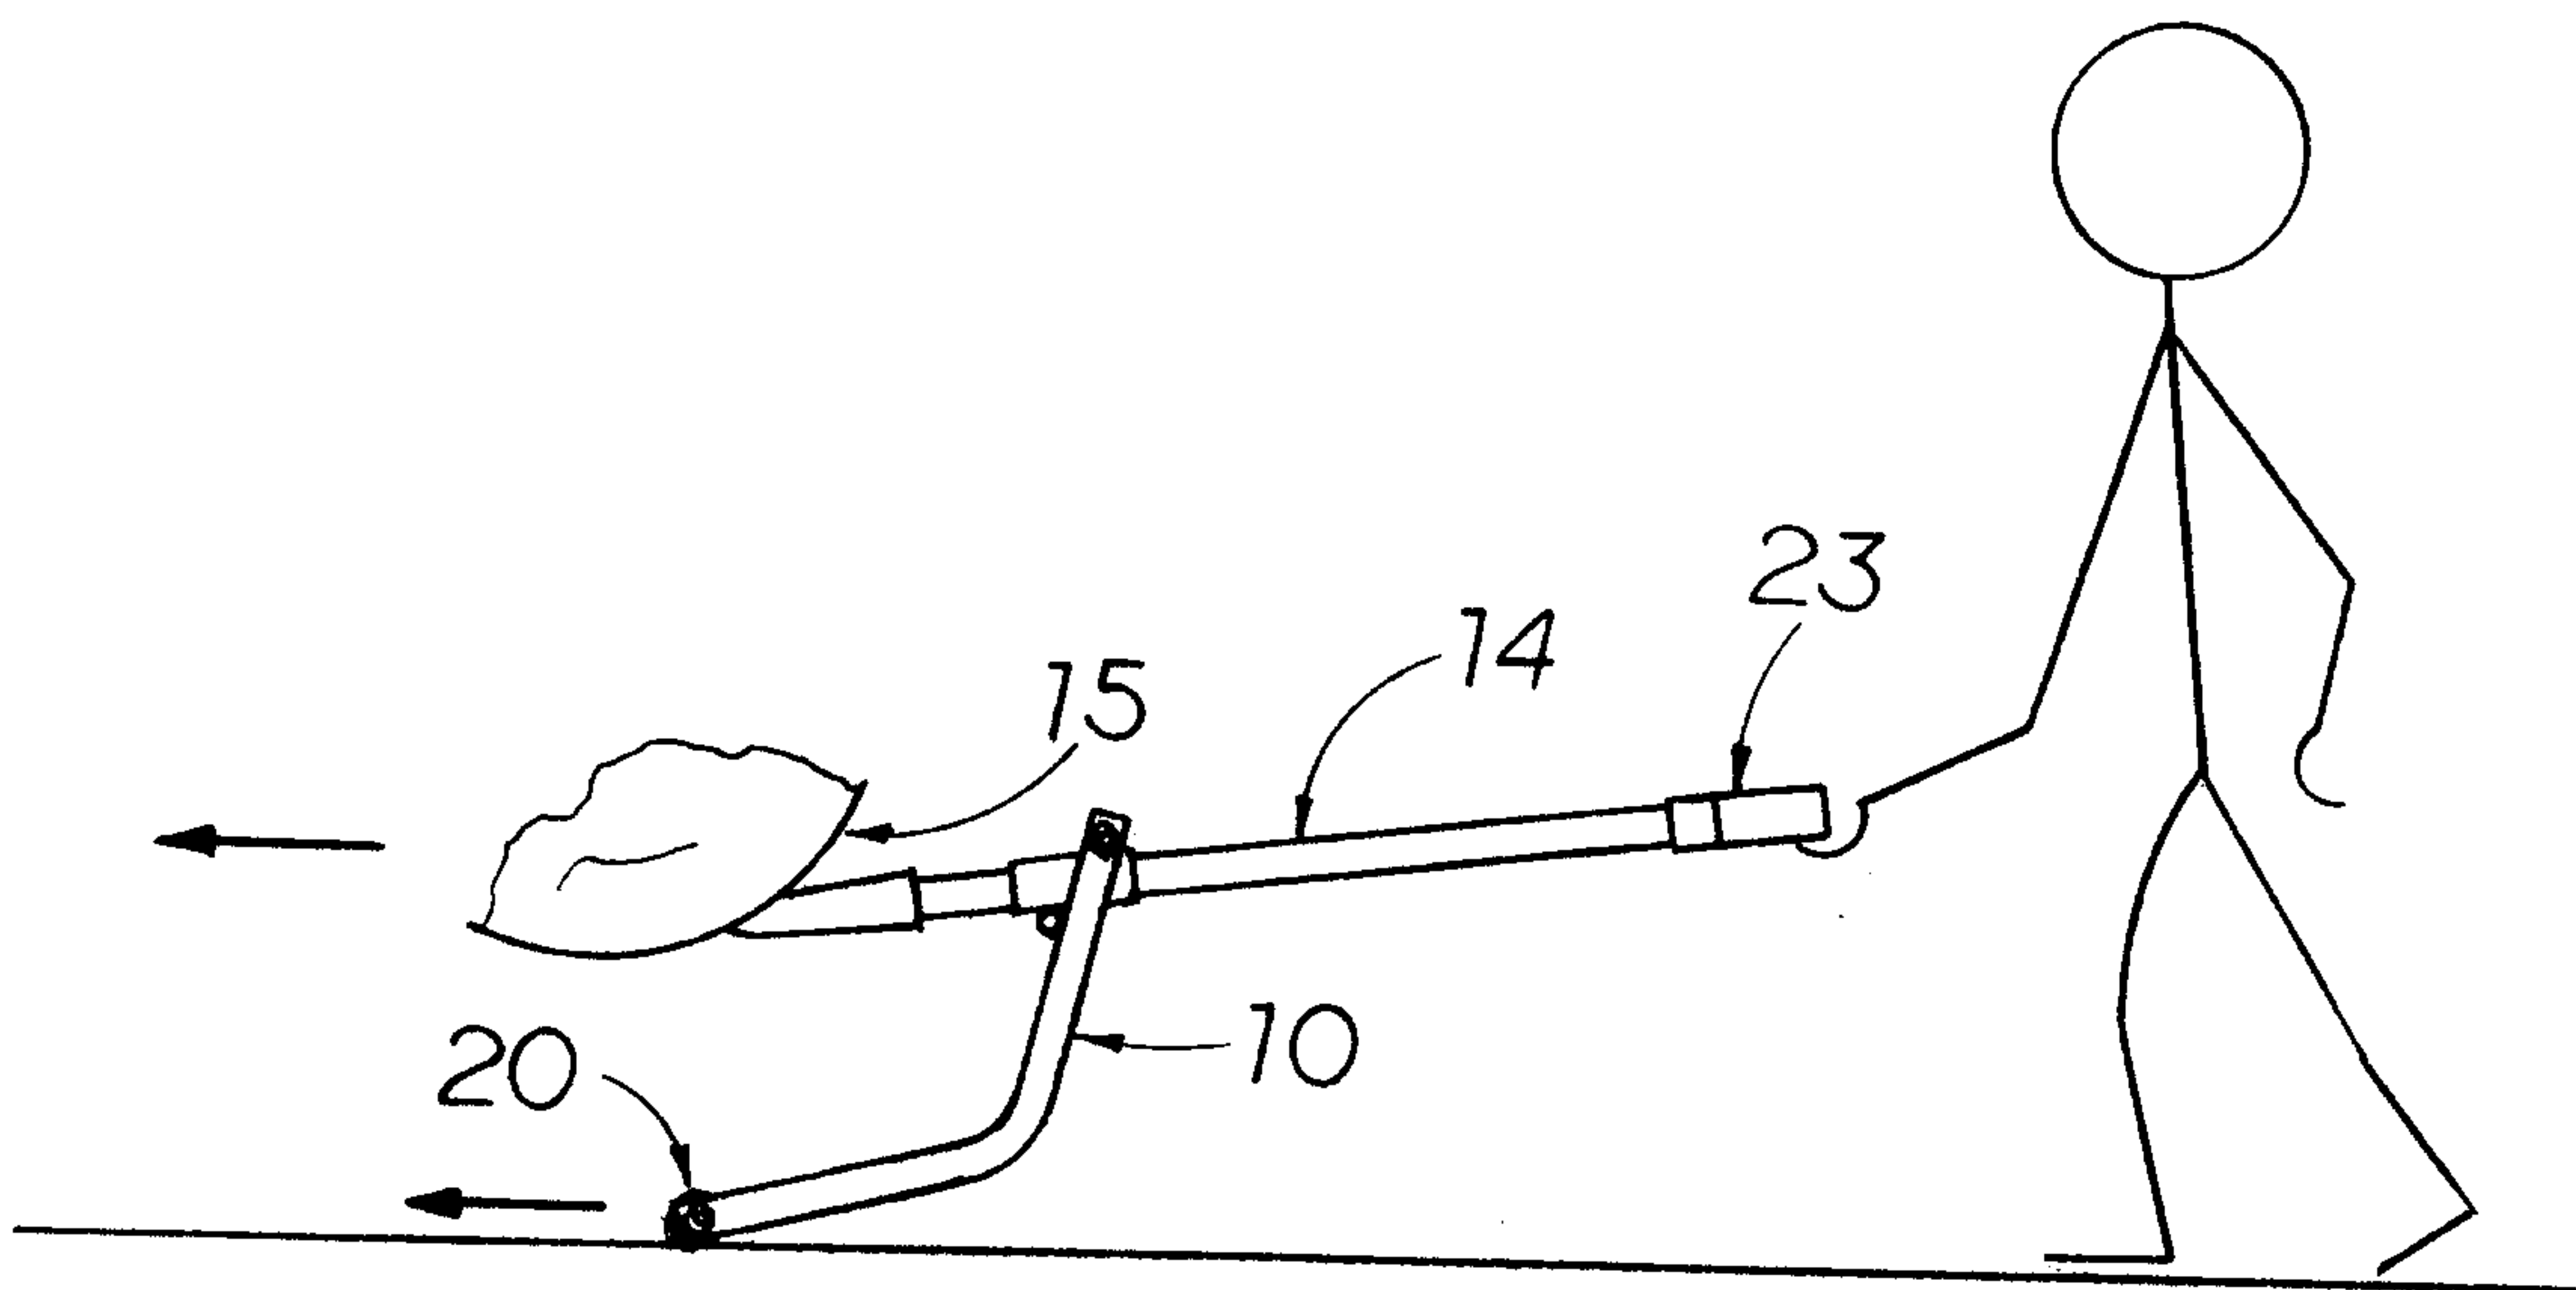


FIG. 14

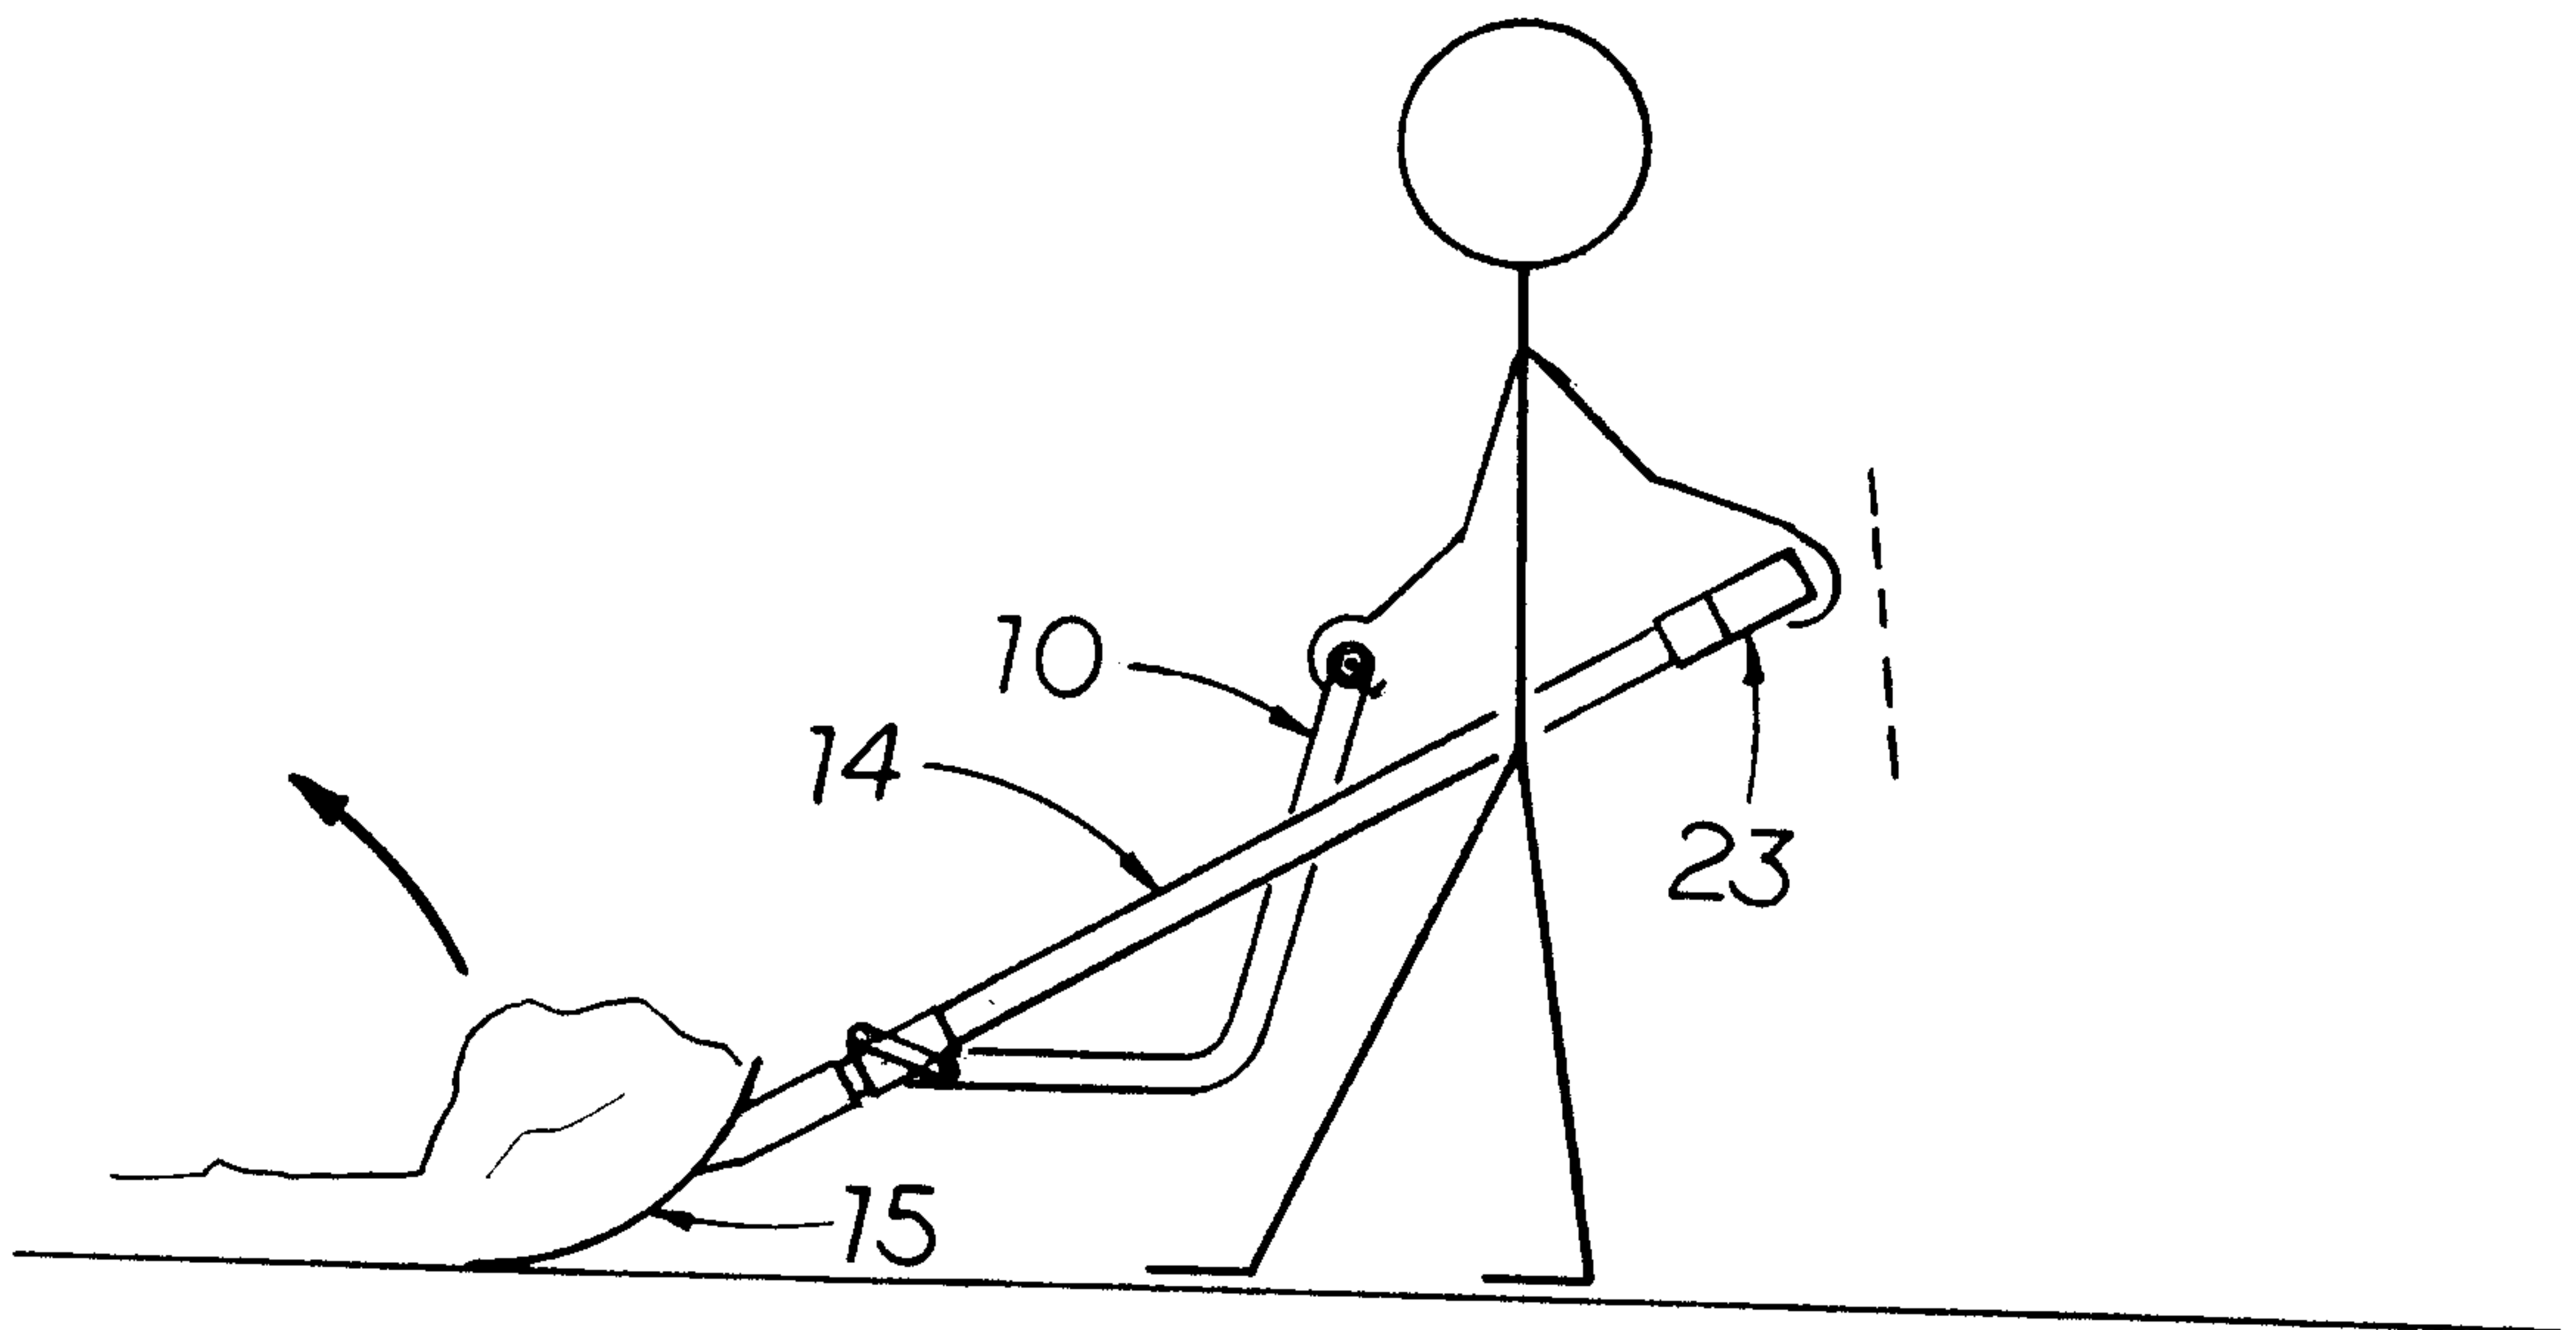


FIG. 15

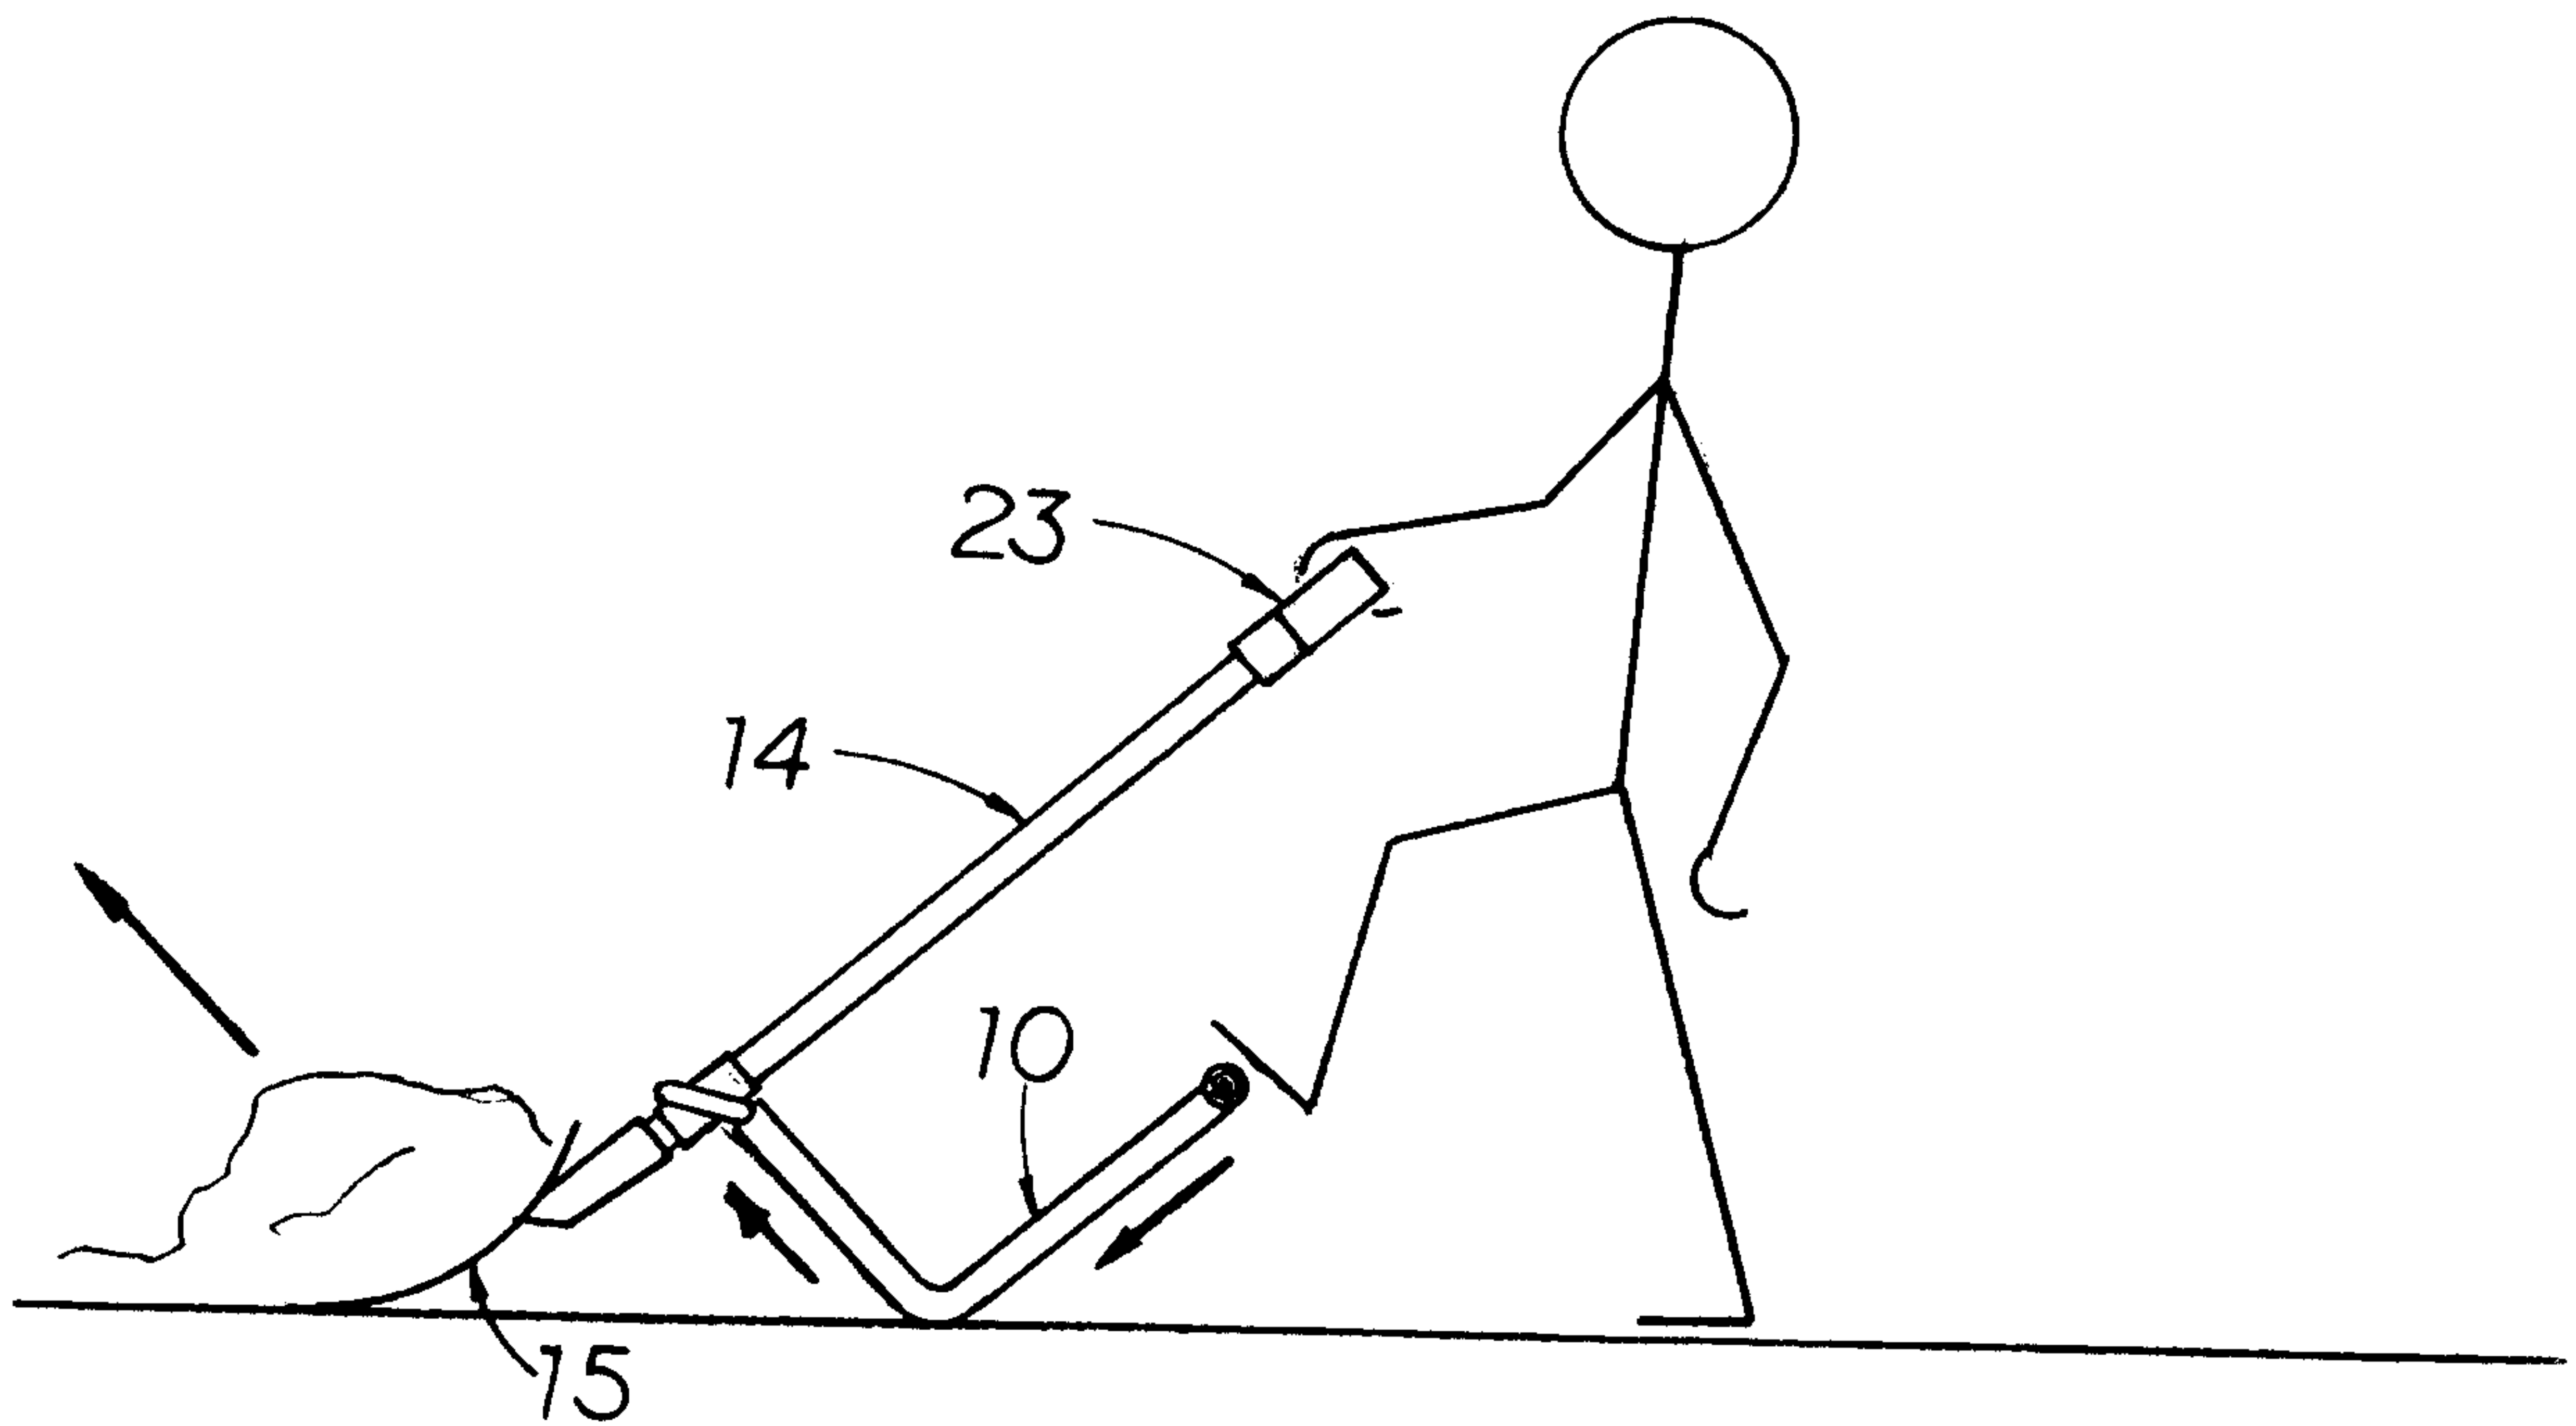


FIG. 16

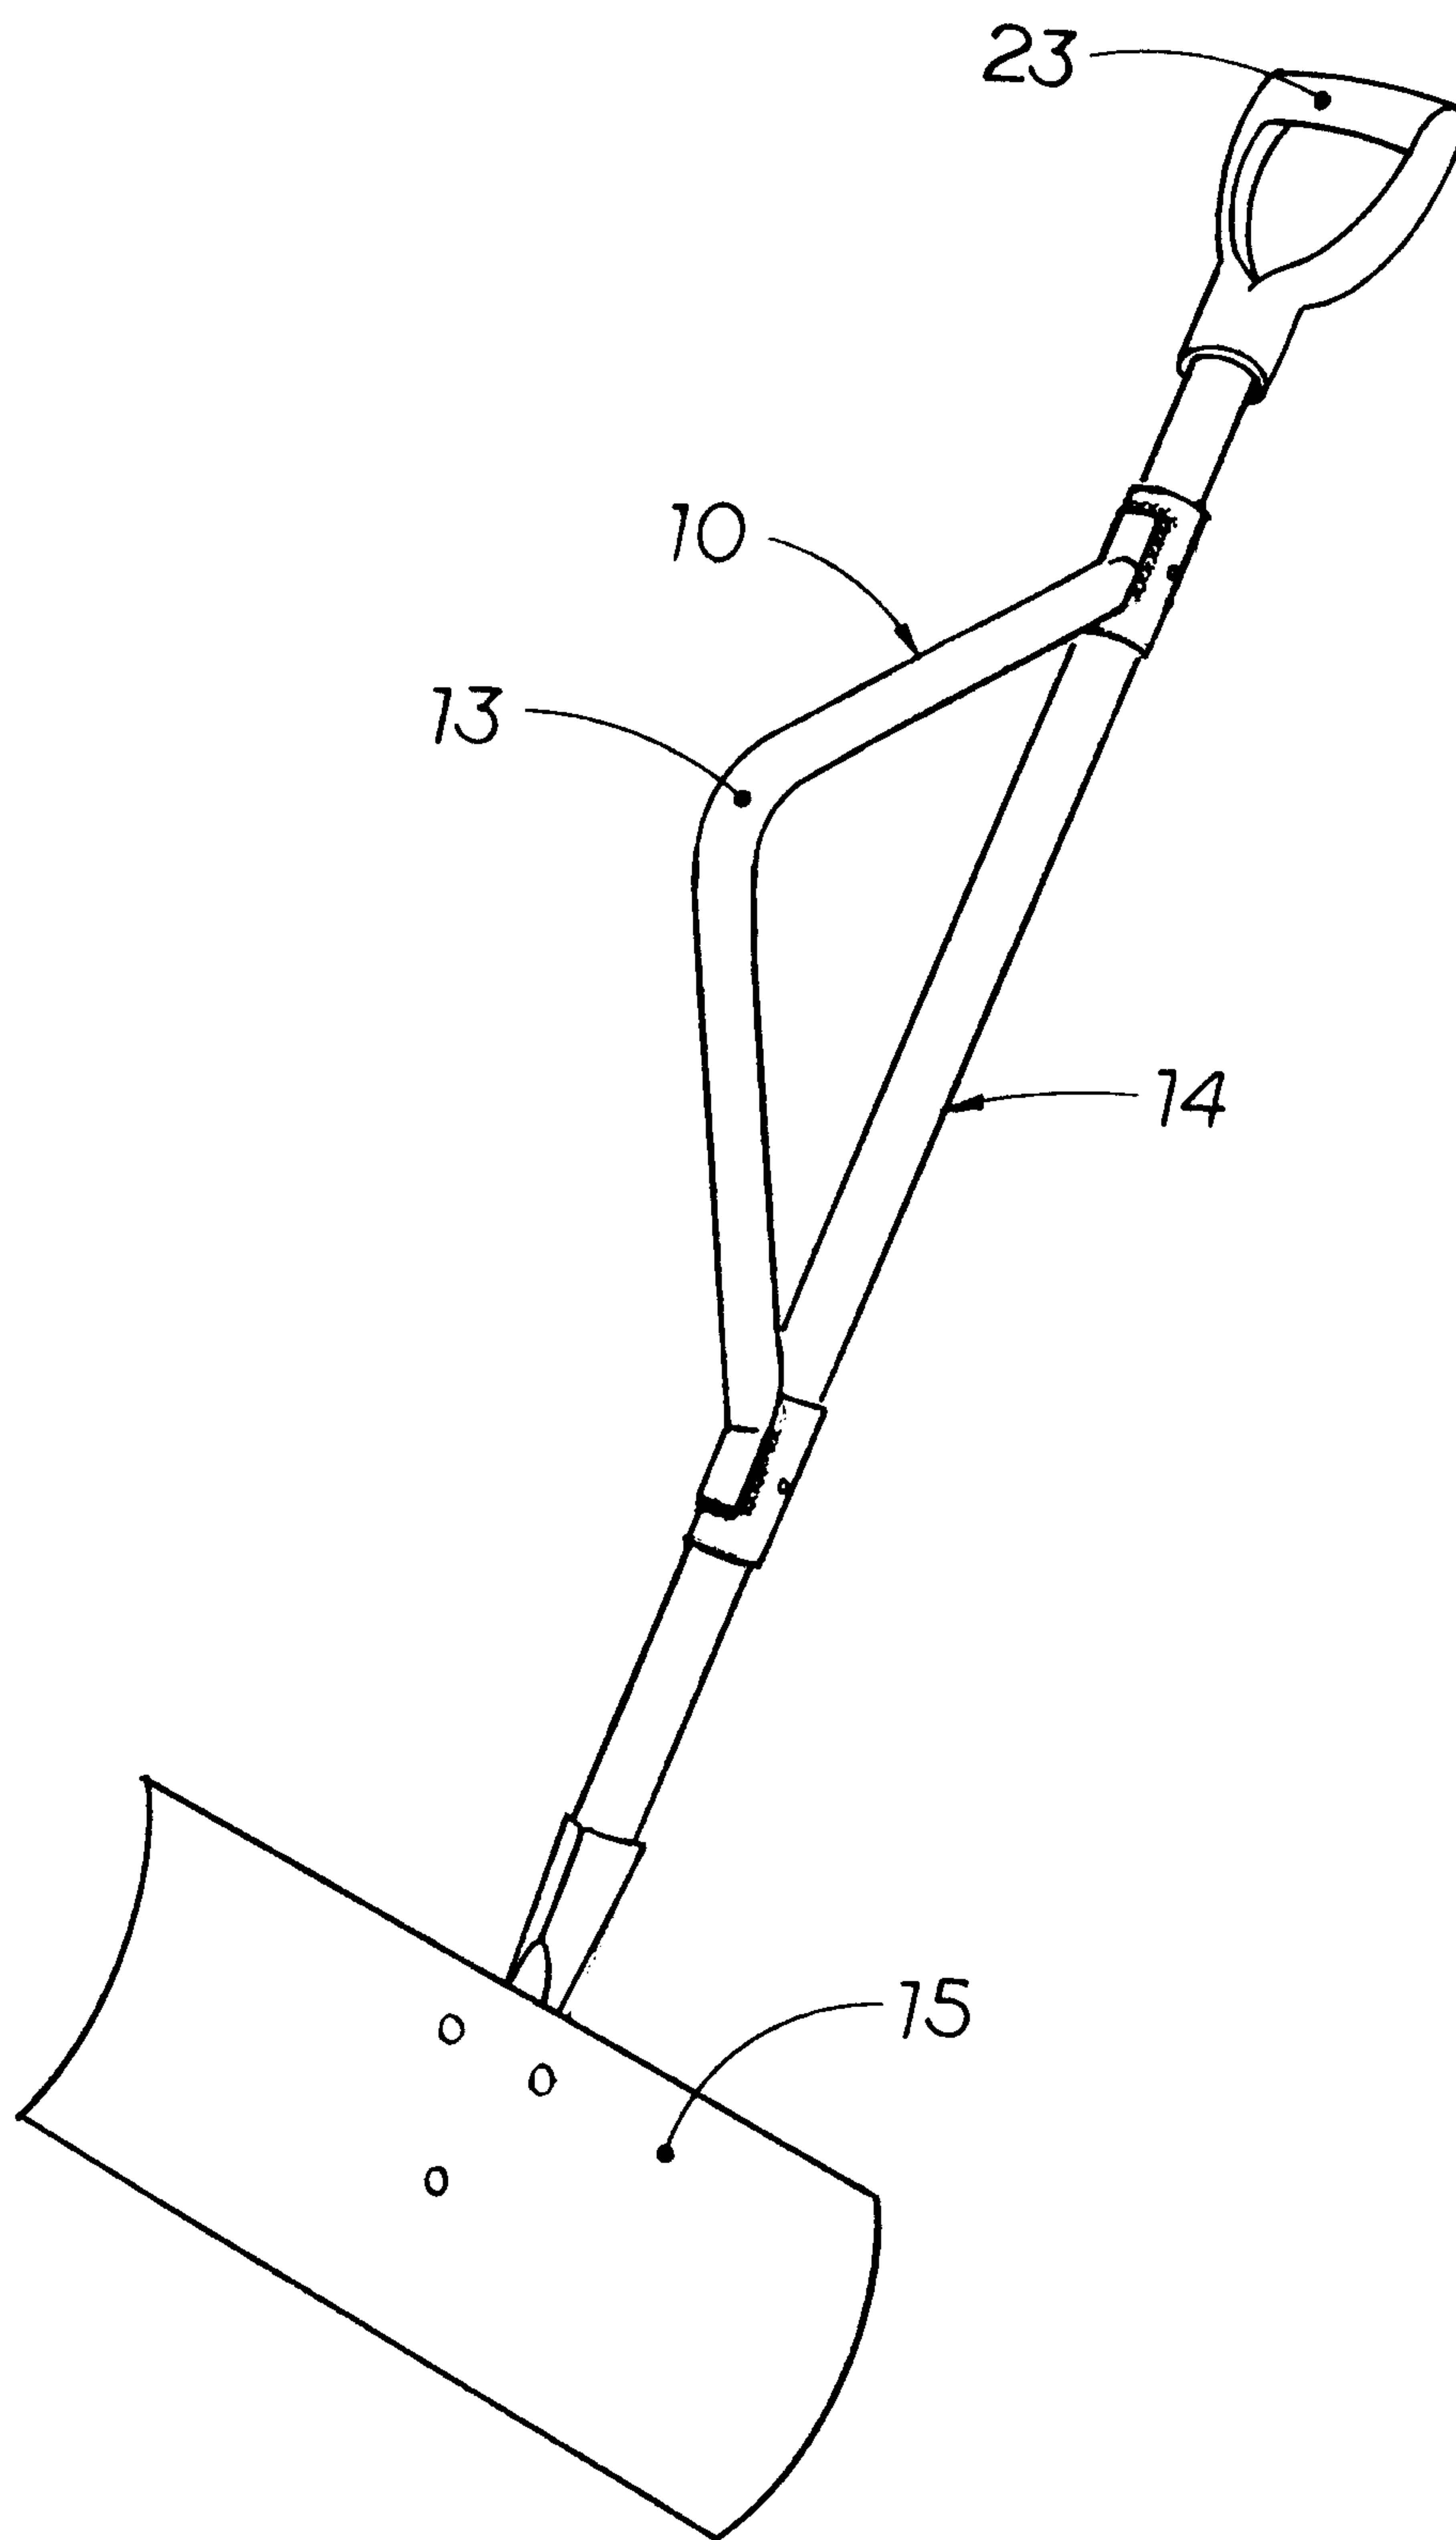


FIG. 17

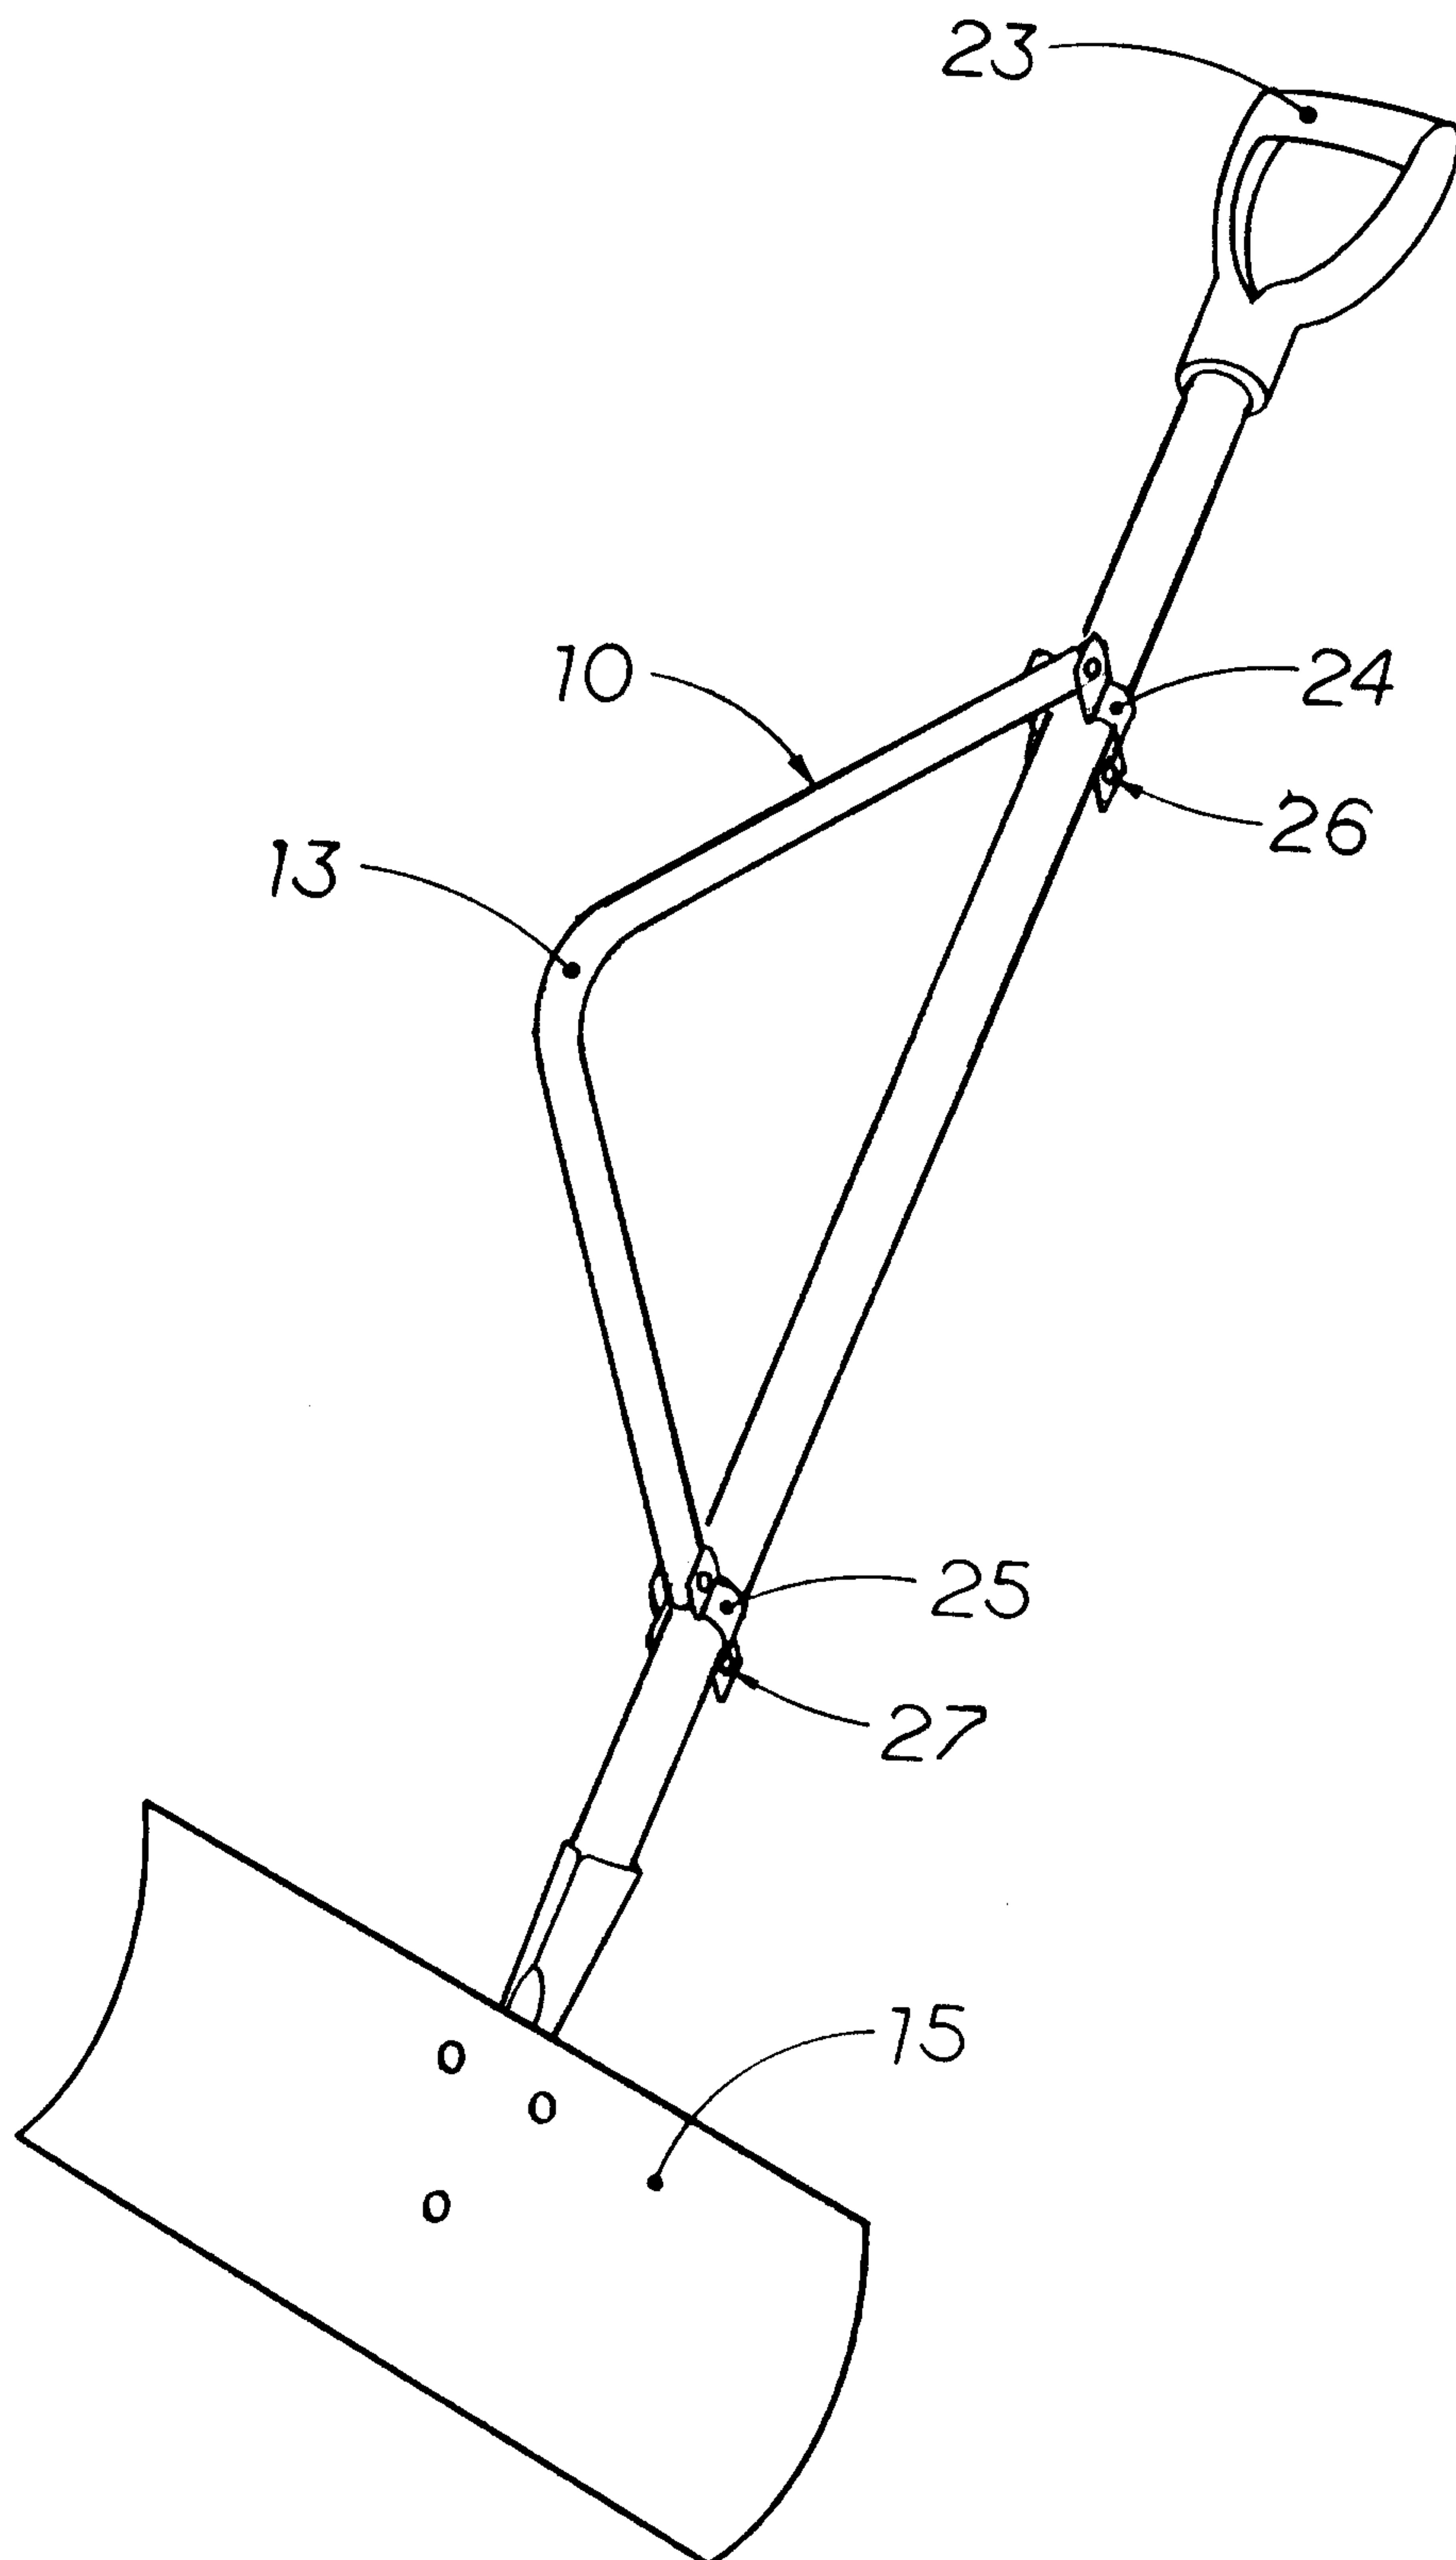


FIG. 18

