

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 2018223334 B2

(54) Title
Apparatus for processing organic products and other materials

(51) International Patent Classification(s)
B30B 9/04 (2006.01) **B30B 9/10** (2006.01)
A23N 1/02 (2006.01) **B30B 9/30** (2006.01)

(21) Application No: **2018223334** (22) Date of Filing: **2018.02.22**

(87) WIPO No: **WO18/154468**

(30) Priority Data

(31) Number (32) Date (33) Country
2017/01407 **2017.02.24** **ZA**

(43) Publication Date: **2018.08.30**
(44) Accepted Journal Date: **2023.09.21**

(71) Applicant(s)
Roy Walter Henderson;Jan Abraham Vlok

(72) Inventor(s)
Henderson, Roy Walter;Vlok, Jan Abraham

(74) Agent / Attorney
Pipers Intellectual Property, 1st Floor 3 Owens Road Epsom, Auckland, 1023, NZ

(56) Related Art
US 7513447 B2
US 2010/0071902 A1
US 3348778 A

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property

Organization

International Bureau



(10) International Publication Number

WO 2018/154468 A1

(43) International Publication Date

30 August 2018 (30.08.2018)

(51) International Patent Classification:

B30B 9/04 (2006.01) B30B 9/30 (2006.01)
B30B 9/10 (2006.01) A23N 1/02 (2006.01)

(74) Agent: BRIAN BACON INC.; 2nd Floor, Mariendahl House, Newlands on Main, Main Road, 7700 Newlands (ZA).

(21) International Application Number:

PCT/IB2018/051084

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:

22 February 2018 (22.02.2018)

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2017/01407 24 February 2017 (24.02.2017) ZA

(72) Inventors; and

(71) Applicants: HENDERSON, Roy Walter [ZA/ZA]; Unit C, 10 Product Street, Berkley Square, 7405 Ndabeni (ZA). VLOK, Jan Abraham [ZA/ZA]; Unit C, 10 Product Street, Berkley Square, 7405 Ndabeni (ZA).

(54) Title: APPARATUS FOR PROCESSING ORGANIC PRODUCTS AND OTHER MATERIALS

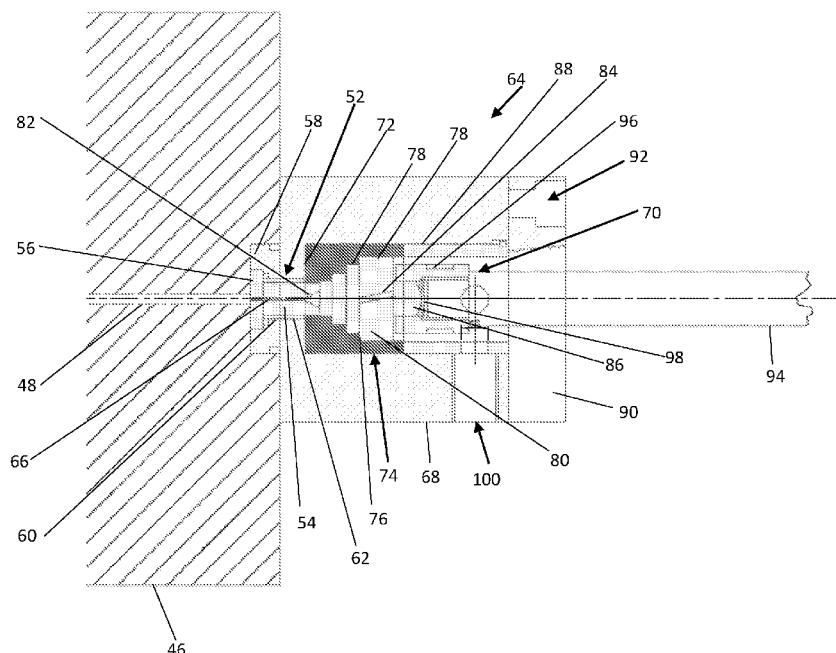


FIG. 2

(57) Abstract: Apparatus (10) for processing organic material is disclosed which breaks down the inedible components of fruit and vegetables (core, skin, pips, pithy material) into an edible substance with a cream-like consistency. The apparatus (10) includes a piston (28) in a barrel (13) for pressurizing the material and forcing it through a passage having a number of end-to-end sections which are at right angles to one another. There is an impact surface at the end of each section on which the flowing material impacts. The sections can be between a sleeve (74) having sections of different diameters and a bobbin (80) the outer surface of which is stepped to match the inner surface of the sleeve (74).



EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*

APPARATUS FOR PROCESSING ORGANIC PRODUCTS AND OTHER MATERIALS

FIELD OF THE INVENTION

THIS INVENTION relates to apparatus for processing organic products and other materials.

5

BACKGROUND TO THE INVENTION

Many vegetables have a skin which cannot be used as a food because of its indigestible nature. Pumpkins and squash are examples of such vegetables. These also have a central core comprising pips embedded in stringy material. The pips, the skin and the stringy material all have nutritional value but are currently discarded because it is not possible adequately to process them commercially.

10

Apples and pears have skins and cores with pips in them which are discarded even though they have nutritional value. The reason is again that the skin and cores cannot be adequately processed commercially. Oranges and grapefruit are further examples of agricultural products which have skins and seeds that are discarded because they cannot be adequately processed commercially even though they have nutritional value.

15

In the production of wine the skins and pips of the grapes are discarded as current methods of pressing do not convert these into a form in which they can be used further in the wine making process.

20

Apart from the obvious waste of products that have nutritional value, there is also the problem of disposing of the waste. As an example, in the production of orange juice, many tens of thousands of tons of skins and pulp have to be disposed of. Likewise, huge quantities of grape skins have to be dealt with during the relatively short grape picking period.

25

30 PCT specification WO 2012/162707 discloses apparatus which pressurises raw organic

products and causes rupturing of the cell walls of the product. The resultant product has a cream like consistency and contains, in accessible form, not only the nutrients which are in those parts of the organic products which would hitherto have been considered as edible but also the nutrients from the parts of the product previously considered unusable.

An object of the present invention is to provide improved apparatus for processing organic products in a way that eradicates waste or at least radically minimises waste and enables more of the nutritional value of the raw product to be accessed.

10

Whilst it is envisaged that preferably whole fruit or whole vegetables will be processed, it is possible to remove those parts which are inherently edible and only process the parts that would otherwise be discarded.

15

In the minerals industry, mineral bearing ore is ground using apparatus such as ball mills. The ground material is then treated with, for example, an acid in the process known as leaching to separate the minerals from the ore. The efficiency of the leaching process is dependent on the particle size of the ground ore. The smaller the particles, the more efficient is the leaching process.

20

Another object of the present invention is to provide apparatus which reduces the particle size of mineral bearing ore in preparation for its further or simultaneous processing to separate the mineral from the rock in which it is dispersed.

25

BRIEF DESCRIPTION OF THE INVENTION

According to one aspect of the present invention there is provided apparatus for processing organic products or other material which comprises a passage having a series of communicating sections each of which has an inlet end and an outlet end and each of which is at an angle with respect to the section which precedes it, an impact wall at the outlet end of each section, and means for pressurising said material so that,

30

in use, it flows into the inlet end of the first section of said passage, emerges from the outlet end of the first section, impacts on the impact wall at the outlet end of the first section, changes direction and then flows into the second section.

5 Said sections are preferably at right angles to one another.

One form of the apparatus according to the present invention comprises a sleeve with an internally stepped bore to provide alternating axially facing surfaces and inwardly facing surfaces the dimensions of which increase from one end of the bore to the other, and a bobbin which matches the shape of the bore and has axially facing surfaces alternating with outwardly facing surfaces, the dimensions of the outwardly facing surfaces increasing from one end of the bobbin to the other, there being an annular gap between each outwardly facing surface of the bobbin and the inwardly facing surface of the sleeve which lies outwardly of it.

10 15 The widths of the annular gaps preferably decrease in the direction from the smaller ends of the sleeve and bobbin towards their larger ends.

20 Means such as a spring, a pneumatic cylinder or an hydraulic cylinder, can be provided for forcing the axially facing surfaces of the bobbin against the axially facing surfaces of the sleeve.

25 The bobbin can have a sealing element at its smaller diameter end which fits into the end of a flow passage which leads from a chamber in which said material is, in use, pressurised to an outlet end which said element, in one of its positions, seals.

Said flow passage can comprise two or more sections, each section being of a smaller cross-sectional area than the section upstream of it.

Said bobbin can have skew grooves in its largest diameter cylindrical surface whereby, in use, the material flowing in these grooves causes the bobbin to turn.

5 The means for pressurising the material can comprise a barrel, a piston in the barrel, means for reciprocating the piston in alternating retraction strokes and forward pressurising strokes during the latter of which material is forced from the barrel through an outlet into said flow passage.

10 An inlet of the barrel is preferably located in the side wall of the barrel and the outlet in an end wall of the barrel, the inlet being between the outlet and the piston when the piston is at the end of its pressurizing stroke.

15 There can be an inlet valve having an open position in which organic product is permitted to enter the barrel and a closed position in which flow of organic material to the barrel is prevented, and a control system which maintains said inlet valve closed until after the piston has commenced a retraction stroke.

20 The means for reciprocating the piston can comprise an hydraulic or pneumatic cylinder in which there is a drive piston, a piston rod attached to the drive piston extending through an end wall of the pneumatic or hydraulic cylinder, across a gap and being attached to the piston in the barrel.

25 According to another aspect of the present invention there is provided a method of processing organic material which comprises forcing the material under a pressure of between 200 and 2000 bar into a bore so that it emerges from the bore at a speed of between 500 and 6000 kph, causing the material to flow from the bore through a passage comprising a plurality of sections each of which has an inlet end and an outlet end and each of which is at an angle with respect to the section which precedes it so that the material changes direction as it flows from one section to the next, and providing an impact wall at the outlet end of each section so that the material, as it

emerges from each section, impacts on the impact wall at the end of that section, changes direction and flows into the next section of the series.

5 The pressure is preferably between 300 and 1600 bar, with pressures of 350 to 1200 bar providing optimal results.

The preferred speed is in the range of 2000 to 4000 kph.

10 According to a further aspect of the present invention there is provided a method of processing organic material which comprises forcing the material at a pressure of at least 300 bar through a bore having a diameter of between 0.05 mm and 8 mm, causing the material to flow from the bore through a passage comprising a plurality of sections each of which has an inlet end and an outlet end and which is at an angle with respect to the section which precedes it so that the material changes direction as it flows from 15 one section to the next, and providing an impact wall at the outlet end of each section so that the material, as it emerges from each section, impacts on the impact wall at the end of that section, changes direction and flows into the next section of the series.

20 The preferred bore diameters are between 0.1mm and 6mm and the preferred pressure is between 300 and 1200 bar.

Preferably the bore is in two end-to-end sections, the upstream section being of larger diameter than the downstream section.

25 According to a still further aspect of the present invention there is provided a method of processing inorganic material material which comprises reducing the inorganic material to particulate form, dispersing the particulate material in a liquid to form a slurry, forcing the slurry under a pressure of between 200 and 2000 bar into a bore so that it emerges from the bore at a speed of between 500 and 6000 kph, causing the slurry to flow from 30 the bore through a passage comprising a plurality of sections each of which has an inlet

end and an outlet end and each of which is at an angle with respect to the section which precedes it so that the slurry changes direction as it flows from one section to the next, and providing an impact wall at the outlet end of each section so that the slurry, as it emerges from each section, impacts on the impact wall at the end of that section, changes direction and flows into the next section of the series.

BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the present invention, and to show how the same may be carried into effect, reference will now be made, by way of example, to the accompanying drawings in which:-

Figure 1 is an axial section through apparatus in accordance with the present invention for processing organic products and other materials;

Figure 2 is an axial section, to a larger scale, through part of the apparatus of Figure 1; and

Figure 3 is an axial section which additionally shows the inlet valve structure.

DETAILED DESCRIPTION OF THE DRAWINGS

The apparatus 10 illustrated in Figure 1 comprises a barrel 12 which is attached to a body 14 of the apparatus. The barrel 12 is externally threaded and the body 14 has internal threading compatible with the external threading of the barrel. In view of the pressures generated in the apparatus, the barrel and body are linked together by, for example, a nut and a castellated spring washer with an internal tab to prevent it rotating. These components are generally designated 16 and the slot along which the tab of the spring washer slides is designated 18. Any other means for ensuring that the body and barrel cannot shift with respect to one another in use, such as a split clamp, can be used.

The barrel is formed internally with a cylindrical bore 24 which is a constant diameter throughout its length except at the right hand end as viewed in Figure 1 where it has a short flared section 26.

5 A piston 28 slides in the bore 24. Axially spaced sealing rings 30, 32 positioned in grooves 34, 36 encircle the piston 28. The rings 30, 32 seal between the outer surface of the piston 28 and the surface of the bore 24.

10 An operating rod 38 is secured by a bolt 40 to the piston 28. The operating rod is the rod of an hydraulic cylinder (not shown) which reciprocates the piston 28 in the bore 24 as will be described below.

15 The body 14 defines a pressure chamber 42 which is co-axial with, and forms a continuation of, the bore 24 of the barrel 12. The diameter of the cylinder equals the maximum diameter of the flared section 26.

20 There is an inlet 44 to the chamber 42. The valve structure which controls flow of material to be processed from an inlet pipe (not shown) to the chamber 42 will be described below with reference to Figure 3.

25 A block 46 is secured by a ring of bolts (not shown) to the body 14. The block 46 has a passageway 48 therethrough one end of which communicates with the chamber 42.

25 A circular recess 50 is formed in the surface of the block 46 remote from the chamber 42 and the passageway 48 opens into this recess.

30 An insert 52 (see particularly Figure 2) comprising a cylindrical body 54 and a flange 56 is held in place by a circular retainer 58. The retainer 58 has a stepped central opening 60 the shape of which matches the shape of the insert 52. The body 54 of the insert 52 projects from the recess 50 and is located in a bore 62 of an outlet structure generally

designated 64. The insert 52 has an axially extending passageway 66 through it which is smaller in diameter than the passageway 48 and in axial alignment with it.

5 The outlet structure 64 comprises a block 68 in which the bore 62 is formed. Within the block 68 there is a cylindrical central cavity 70 into which the bore 62 opens. The bore 62 and cavity 70 are co-axial and there is a wall 72 which forms one end of the cavity 70. The bore 62 passes through the wall 72.

10 There is a sleeve 74 of a hard abrasion resistant material in the cavity 70, one end of the sleeve 74 being against the wall 72.

15 The sleeve 74 is internally stepped so as to provide a series of three circular surfaces 76 which face away from the wall 72 and, alternating with the surfaces 76, four cylindrical surfaces 78 the diameters of which increase from left to right.

20 A freely rotatable bobbin 80 of hard abrasion resistant material is located in the sleeve 74. The bobbin has a stepped shape which matches that of the sleeve 74. Three circular surfaces of the bobbin 80 press, in one operating condition, against the corresponding surfaces 76 of the sleeve 74. Four external cylindrical surfaces of the bobbin lie radially inwardly of the surfaces 78. The bobbin thus has four sections the diameters of which sections increase from left to right as viewed in Figure 2.

25 The smallest diameter part of the bobbin 80 is extended to the left by a cone 82 the shape of the apex of which matches the shape of the end of the passageway 66.

30 The largest diameter section of the bobbin has skew grooves 84 in the surface thereof. The function of these will be described below. The larger diameter section of the bobbin is extended to the right, as viewed in Figure 2, by a cylinder 86 which has a dome-shaped free end.

Each section of the bobbin 80 is smaller in diameter than the part of the sleeve 74 into which it fits. There is consequently an annular gap between each bobbin section and the cylindrical surface of the insert which lies radially outwardly of that section. The widths of the annular gaps decrease from left to right as viewed in the drawing. Thus the gap between the smallest diameter section of the bobbin and the cylindrical surface which lies radially outwardly of it is larger than the gap between the next section and the surface which lies radially outwardly of it, and so on.

5

The sleeve 74 is held in place by a tube 88, and the tube 88 is held in place by an end plate 90 which is secured by bolts (not shown) to the block 68. One of the recesses for receiving a bolt head is shown at 92.

10

15

20

A spring loaded rod 94 passes through the end plate 90 into the cavity 70. The end of the rod 94 which is in the cavity is turned down and threaded and a cylindrical bearing housing 96 is screwed onto the end of the rod. A thrust bearing 98 is located in the housing 96 at the end of the threaded section which into which the rod 94 is screwed. The right hand race of the bearing is fixed and the left hand race is free to turn. The dome of the cylinder 86 of the insert 52 is in contact with the rotatable race of the thrust bearing 98. The spring which loads the rod 94 can be replaced by a pneumatic or hydraulic cylinder.

25

The rod 94 carries a stop (not shown) which co-operates with a fixed abutment to limit movement of the rod to the right. The rod 94 can only move a distance which is sufficient to open the exit from the passageway 66 and separate the axially facing surfaces of the sections of the bobbin 80 from the surfaces 76 of the sleeve 74.

It will be understood that the cavity 70 forms an annular exit chamber between the tube 88 on the one hand and the rod 94 and the parts carried by it on the other hand. An outlet port 100 of the block 68 communicate with the cavity 70.

30

Whilst in the preferred form of the invention the sleeve 74 and the bobbin 80 are cylindrical it is possible for other shapes to be used. For example the sections could be square or triangular.

5 The ball valve structure between the inlet 44 and the source of organic material to be processed has an open position and a closed position. When the valve is opened chopped pieces of the organic material are pumped into the pressure chamber. After a timed interval the valve closes isolating the pressure chamber 42 from the source of organic material.

10

The piston 28 is shown in its fully retracted position in Figure 3. The valve structure is open and the organic material to be processed is at this time being pumped into the pressure chamber 42. There is no pressure in the passageways 48, 66, and consequently the spring or pressure cylinder acting on the rod 94 forces the apex of the cone 82 into the exit end of the passageway 66.

15

20

Once the pressure chamber 42 has been filled, the valve of the valve structure closes and the piston 28 begins to move to the right so that the pressure in the chamber 42 steadily increases. The movement of the piston 28 to the right is limited so that the right hand seal 30 is always to the left of the flared section 26 (as viewed in Figure 1).

25

The pressure in the chamber 42 causes organic product to flow along the passageways 48, 66 and towards the cone 82 which at this stage is closing the exit end of the passageway 66. The pressure builds at the exit end of the passageway 66 until it overcomes the closing force exerted by the spring or cylinder. The bobbin 80 then moves to the right, opening the exit end of the passageway 66 and separating the circular surfaces of the bobbin from those surfaces of the sleeve 74 against which they were pressed by the spring.

30

Organic material flows from the passageway 48 into the narrower passageway 66 with a

commensurate increase in the speed at which it is flowing. The speed can be between 500 and 6000 kph and is preferably in the range 2000 to 4000 kph. The material under high pressure and at high speed is spread by the cone 82 so that it flows radially outwardly in all directions into the annular gap between the smallest section of the 5 bobbin 80 and the smallest inwardly facing surface of the sleeve 74. This gap constitutes the inlet end of the first section. The material impacts on the circular impact surface which is between the smallest section of the bobbin and the adjacent section of the bobbin and which is consequently at the outlet end of the first section. It then flows outwardly again impacting on the surface of the sleeve 74 that encircles the second smallest bobbin section. The material impacts multiple times on surfaces of the bobbin 10 and the sleeve as it travels from section to section until it flows into the exit chamber constituted by the cavity 70. From this chamber it flows through the outlet port 100.

Once the piston 28 reaches the end of its travel, no further pressurisation is possible 15 and the piston is retracted (to the left as illustrated in Figure 1). Only once the piston has commenced to retract, and the pressure in the pressure chamber 42 has been relieved, does the ball of the valve structure in the inlet rotate to open the inlet and allow the next charge of organic material to flow into the pressure chamber 42.

20 Material being processed which flows along the grooves 84 causes the bobbin 80 to turn at the rate of a few (say 2 or 3) rpm. Experimental work has shown that this avoids uneven wear on the bobbin.

Pressure, flow rate and size parameters are:-

25 Maximum pressure in the pressure chamber – 200 to 2000 bar, preferably between 300 and 1600 bar, and more preferably 350 to 1200 bar.

Diameter of the passageway 66 – 0.05mm to 8mm preferably 0.1 to 6mm

30 Annular gaps between the bobbin 80 and the insert 72 – 100 micron, 100 micron, 75 micron, 50 micron, 25 micron

Maximum movement of the bobbin 100 micron

With appropriate selection of the parameters discussed, it is possible to process organic material with a viscosity of up to 250000 centipoise.

5

To treat metal bearing ores, the ore is initially crushed and then reduced to particulate form in a ball mill or the like. The particles are dispersed in an inert liquid such as water to form a slurry which is then fed through the apparatus as is described above. It is also possible to disperse the particles in the leaching acid so that the extraction process takes place whilst the particle size is being reduced.

10

CLAIMS:

1. Apparatus for processing material which comprises a passage having a series of communicating sections including at least a first section and a second section, each of said sections has an inlet end and an outlet end and each of said sections is at an angle with respect to the section which precedes it, an impact wall at the outlet end of each section, means for pressurising said material so that, in use, the material flows into the inlet end of the first section of said passage, emerges from the outlet end of the first section, impacts on the impact wall at the outlet end of the first section, changes direction and then flows into the second section; said apparatus comprising a first part that defines surfaces and a second part that defines surfaces corresponding to the surfaces of the first part, said passage being formed between said corresponding surfaces of the first and second parts, and said apparatus further comprising a bias mechanism that urges the second part towards the first part; wherein the means for pressurising the material comprises a pressure chamber which forms a continuation of a cylindrical bore, said pressure chamber having an outlet, a piston in the cylindrical bore, means for reciprocating the piston in the cylindrical bore in alternating forward pressurising strokes and retraction strokes so that material is forced by the forward pressurizing strokes of the piston from the cylindrical bore, directly through the pressure chamber and the outlet of the pressure chamber, towards said passage.
2. Apparatus as claimed in claim 1, wherein said sections are at right angles to one another.
3. Apparatus as claimed in claim 1 or 2, wherein the first part comprises a sleeve with an internally stepped bore to provide alternating axially facing surfaces and radially inwardly facing cylindrical surfaces the diameters of which increase from one end of the internally stepped bore to the other, and wherein the second part comprises

a bobbin which matches the shape of the internally stepped bore and has axially facing surfaces alternating with cylindrical surfaces, the diameters of the cylindrical surfaces increasing from one end of the bobbin to the other, there being an annular gap between each cylindrical surface of the bobbin and the cylindrical surface of the sleeve which lies radially outwardly of it.

4. Apparatus as claimed in claim 3, wherein the widths of the annular gaps decrease in the direction from the smaller end of the sleeve and bobbin towards their larger ends.
5. Apparatus as claimed in claim 3 or claim 4, wherein the bias mechanism comprises means selected from a spring or a hydraulic cylinder.
6. Apparatus as claimed in any one of claims 3 to 5, wherein the bobbin has a sealing element at its smaller diameter end which fits into an outlet end of a passageway that leads from the outlet of the pressure chamber, said sealing element, in one of its positions, sealing said outlet end of the passageway.
7. Apparatus as claimed in any one of the preceding claims, wherein each section of the passage is of a smaller cross-sectional area than the section upstream of it.
8. Apparatus as claimed in any one of claims 3 to 6, wherein said bobbin has skew grooves in its largest diameter cylindrical surface whereby, in use, the material flowing in these grooves causes the bobbin to turn.
9. Apparatus as claimed in any one of the preceding claims, wherein the pressure chamber has an inlet which is located in a side wall of the pressure chamber
10. Apparatus as claimed in claim 9, wherein said outlet of the pressure chamber is in an end wall of the pressure chamber, the inlet of the pressure chamber being

between the outlet of the pressure chamber and the piston when the piston is at the end of its pressurizing stroke.

11. Apparatus as claimed in claim 10 and including an inlet valve having an open position in which the material is permitted to enter the pressure chamber through the inlet of the pressure chamber and a closed position in which flow of the material to the pressure chamber is prevented, and a control system which maintains said inlet valve closed until after the piston has commenced a retraction stroke.
12. Apparatus as claimed in any one of the preceding claims, wherein the means for reciprocating the piston comprises an hydraulic or pneumatic cylinder in which there is a drive piston, a piston rod attached to the drive piston the piston rod extending through an end wall of the pneumatic or hydraulic cylinder, across a gap and being attached to the piston in the cylindrical bore.
13. A method of processing material which comprises:
providing a reciprocating piston in a cylindrical bore and a pressure chamber which forms a continuation of the cylindrical bore;
reciprocating the piston in the cylindrical bore in alternating forward pressurizing strokes and return strokes;
feeding the material to the pressure chamber and cylindrical bore, while the piston is retracted;
pressurizing the material in the cylindrical bore with the forward pressurizing strokes of the piston and forcing the material under pressure from the cylindrical bore, directly through the pressure chamber into a passageway under a pressure of between 20 and 200 MPa so that it emerges from the passageway at a speed of between 500 and 6000 kph;
causing the material to flow from the passageway through a passage comprising a plurality of sections including at least a first section and a second section, each of said sections having an inlet end and an outlet end and each of said sections

2018223334 25 Aug 2023

being at an angle with respect to the section which precedes it, said method being performed on apparatus comprising a first part that defines surfaces and a second part that defines surfaces corresponding to the surfaces of the first part, said passage being formed between said corresponding surfaces of the first and second parts;


urging the second part towards the first part with a bias mechanism, so that the material changes direction as it flows from one of said sections to the next: and providing an impact wall at the outlet end of each section so that the material, as it emerges from each section, impacts on the impact wall at the end of that section, changes direction and flows into the next section of the passage.

14. A method as claimed in claim 13, wherein the pressure is between 30 and 160 MPa.
15. A method as claimed in claim 14, wherein the pressure is between 35 and 120 MPa.
16. A method as claimed in claim 13, wherein the speed is between of 2000 and 4000 kph.
17. A method of processing material which comprises:
providing a reciprocating piston in a cylindrical bore and a pressure chamber which forms a continuation of the cylindrical bore;
reciprocating the piston in the cylindrical bore in alternating forward pressurizing strokes and return strokes;
feeding the material to the pressure chamber and cylindrical bore, while the piston is retracted;
pressurizing the material in the cylindrical bore with the forward pressurizing strokes of the piston and forcing the material by the forward pressurizing strokes of the piston from the cylindrical bore, directly through the pressure chamber into

a passageway at a pressure of at least 20 MPa through a passageway having a diameter of between 0,05 mm and 8 mm, causing the material to flow from the passageway through a passage comprising a plurality of sections including at least a first section and a second section, each of said sections having an inlet and an outlet and said sections being at an angle with respect to the section which precedes it, said method being performed on apparatus comprising a first part that defines surfaces and a second part that defines surfaces corresponding to the surfaces of the first part, said passage being formed between said corresponding surfaces of the first and second parts;
urging the second part towards the first part with a bias mechanism, so that the material changes direction as it flows from one of said sections to the next; and providing an impact wall at the outlet end of each section so that the material, as it emerges from each section, impacts on the impact wall at the end of that section, changes direction and flows into the next section of the passage.

18. A method as claimed in claim 17, wherein the passageway through which the material is forced has two end-to-end sections comprising an upstream section and a downstream section, the upstream section being of larger diameter than the downstream section.
19. A method as claimed in claim 17, wherein the diameter of the passageway is between 0.1mm and 8mm.
20. A method as claimed in claim 13, which includes the prior steps of forming a slurry of the material by reducing the material to particulate form and dispersing the material in particulate form in a liquid to form the slurry.
21. A method as claimed in claim 17, which includes the prior steps of forming a slurry of the material by reducing the material to particulate form and dispersing the material in particulate form in a liquid to form the slurry.

1/3

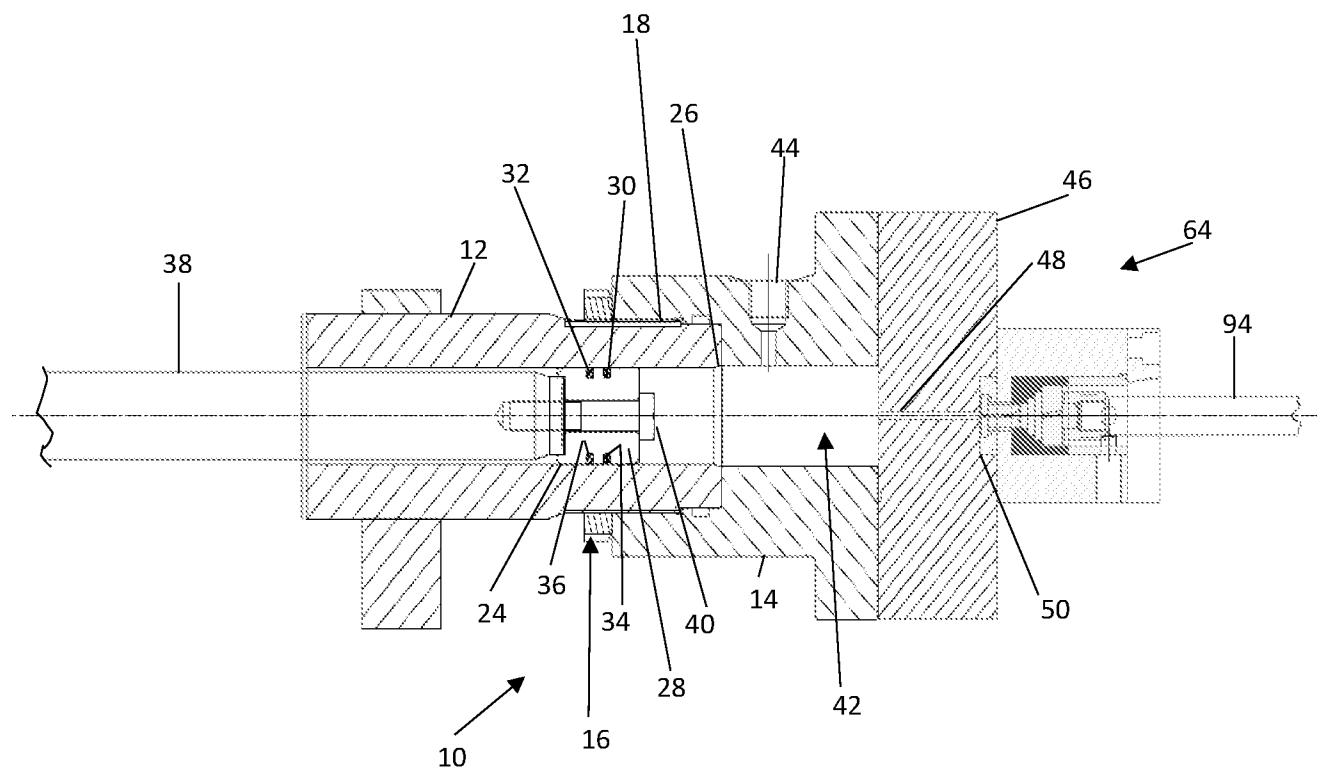**FIG. 1**

2/3

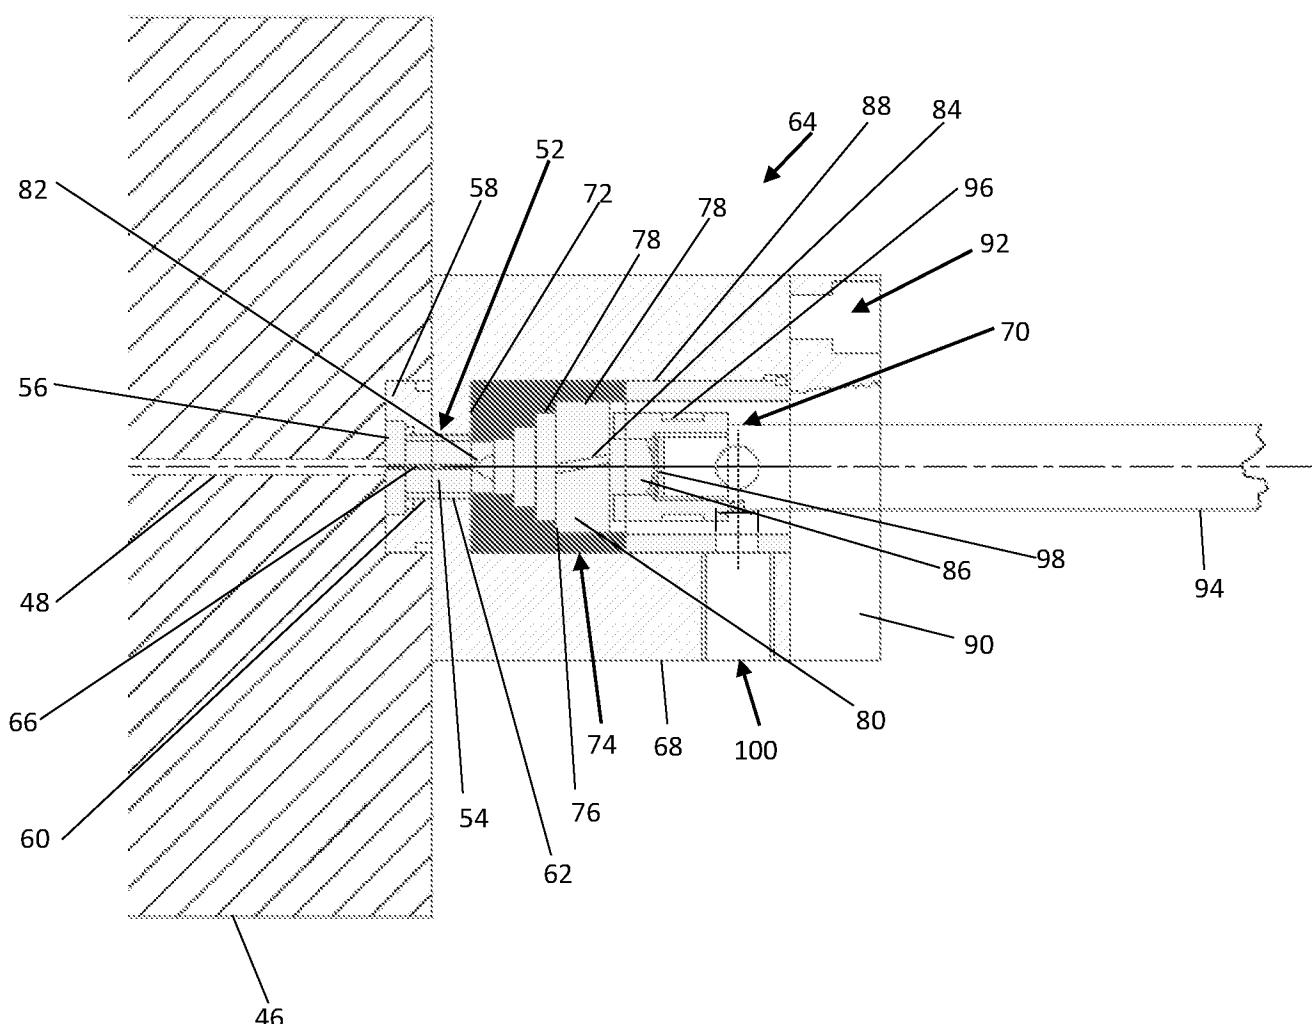


FIG. 2

3/3

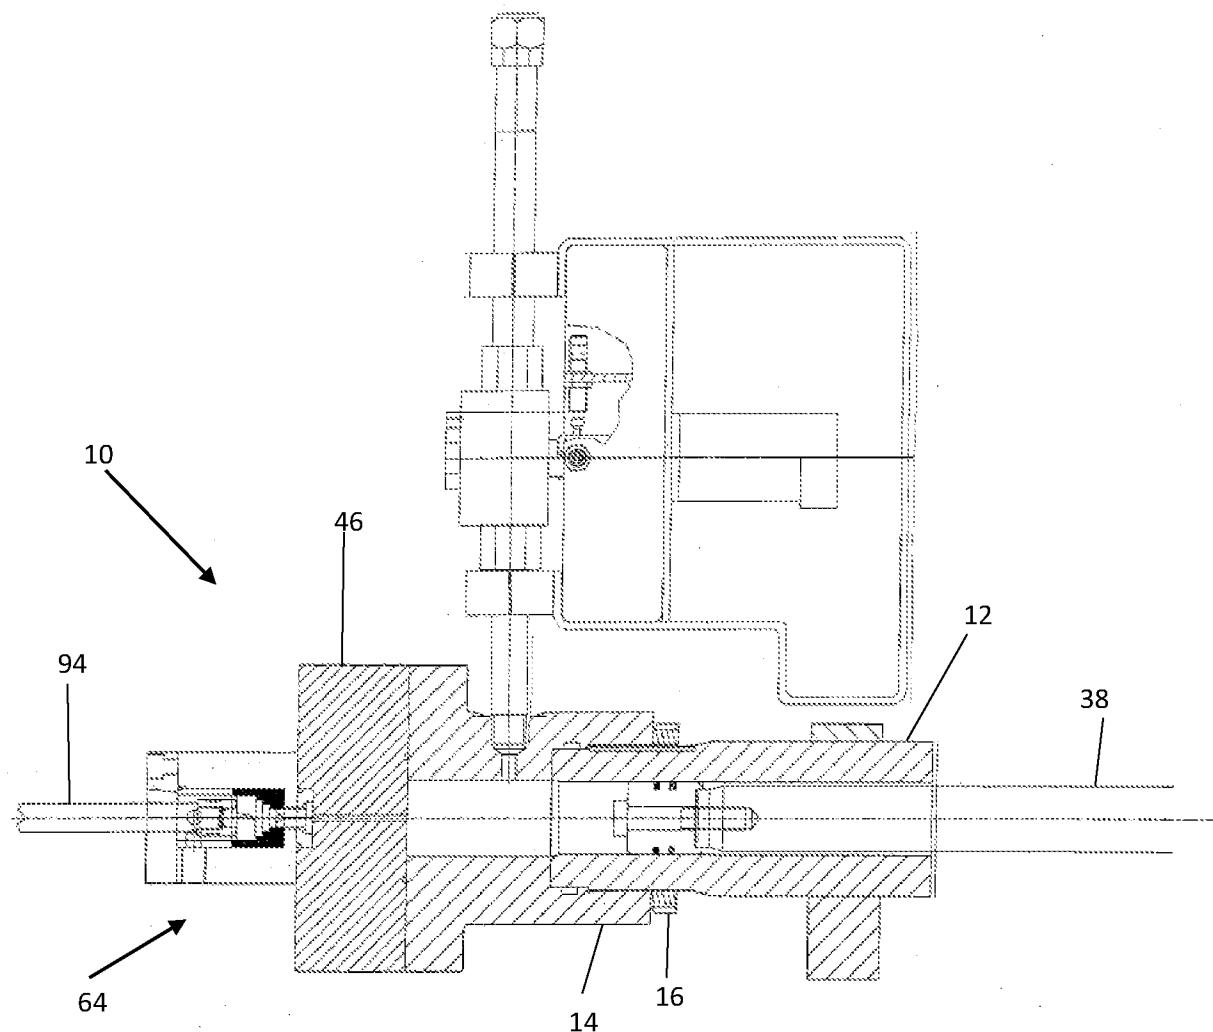


FIG. 3