



(43) International Publication Date
4 October 2012 (04.10.2012)

(51) International Patent Classification:
E21B 33/06 (2006.01)

(21) International Application Number:
PCT/US2011/048784

(22) International Filing Date:
23 August 2011 (23.08.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/470,911 1 April 2011 (01.04.2011) US

(71) Applicant (for all designated States except US): **HAL-LIBURTON ENERGY SERVICES, INC.** [US/US];
10200 Bellaire Boulevard, Houston, TX 77072 (US).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **ROANE, Thomas, O.** [US/US]; 2601 Beltline Road, Carrollton, TX 75006 (US). **PENNO, Andrew, D.** [AU/FR]; 144 Rue Alfred Nobel, F-64000 Pau (FR). **BOURGNEUF, Patrick, P.** [FR/FR]; 144 Rue Alfred Nobel, F-64000 Pau (FR).

(74) Agent: **HIGGINGS, Sheri, L.**; Innovation Development Associates, P.L.L.C., 4224 University Boulevard, Dallas, TX 75205 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

[Continued on next page]

(54) Title: METHODS OF RELEASING AT LEAST ONE TUBING STRING BELOW A BLOW-OUT PREVENTER

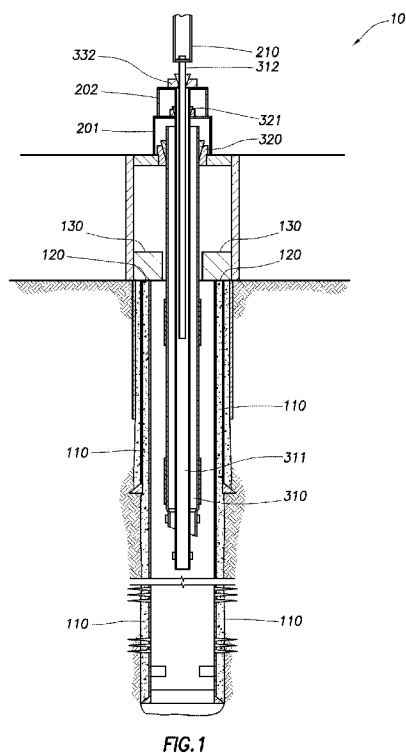

(57) Abstract: According to an embodiment, a method of controlling a blowout comprises: releasing at least a first tubing string into a portion of a well system, wherein the step of releasing comprises activating a release table; and causing or allowing a blowout preventer to close. According to another embodiment, the methods further comprise: compressing at least a portion of a second tubing string and a third tubing string together, wherein the step of compressing comprises activating a crimping device; cutting through the wall of at least a third tubing string, wherein the step of cutting comprises activating a cutting device, and wherein the step of cutting is performed after the step of compressing; and releasing at least the second tubing string and the third tubing string into a portion of a well system, wherein the step of releasing comprises activating a release table, and wherein the step of releasing at least the second and third tubing strings is performed after the step of cutting.



(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *of inventorship (Rule 4.17(iv))*

Published:

- *with international search report (Art. 21(3))*

METHODS OF RELEASING AT LEAST ONE TUBING STRING BELOW A BLOW-OUT PREVENTER

Technical Field

[0001] Methods of releasing at least a first tubing string to a point below a blow-out preventer are provided. According to an embodiment, at least the first tubing string is released into a wellbore. More than one tubing string can also be released. The release of the tubing string(s) can be used to assist a blow-out preventer in shutting in a well by reducing or eliminating the number of tubing strings the BOP must cut through when attempting to close.

Summary

[0002] According to an embodiment, a method of controlling a blowout comprises: releasing at least a first tubing string into a portion of a well system, wherein the step of releasing comprises activating a release table; and causing or allowing a blowout preventer to close.

[0003] According to another embodiment, a method of controlling a blowout comprises: releasing at least a first tubing string into a portion of a well system, wherein the step of releasing comprises activating a release table; cutting through the wall of at least a second tubing string, wherein the step of cutting comprises activating a cutting device; and causing or allowing a blowout preventer to close.

[0004] According to yet another embodiment, a method of controlling a blowout comprises: compressing at least a portion of a second tubing string and a third tubing string together, wherein the step of compressing comprises activating a crimping device; cutting through the wall of at least a third

tubing string, wherein the step of cutting comprises activating a cutting device, and wherein the step of cutting is performed after the step of compressing; releasing at least the second tubing string and the third tubing string into a portion of a well system, wherein the step of releasing comprises activating a release table, and wherein the step of releasing at least the second and third tubing strings is performed after the step of cutting; and causing or allowing a blowout preventer to close.

Brief Description of the Figures

[0005] The features and advantages of certain embodiments will be more readily appreciated when considered in conjunction with the accompanying figures. The figures are not to be construed as limiting any of the preferred embodiments.

[0006] **Fig. 1** is a diagram of a well system.

[0007] **Figs. 2A and 2B** depict the well system further including a crimping device positioned below the top of a first tubing string.

[0008] **Figs. 3A and 3B** depict the well system with the crimping device positioned between a release table and a running table.

[0009] **Figs. 4A and 4B** depict the well system further including a cutting device positioned between the release table and the running table.

[0010] **Figs. 5A through 5D** depict the cutting device located on a cutting table positioned above the running table.

[0011] **Figs. 6A and 6B** depict a well system including both, the crimping device and the cutting device.

Detailed Description

[0012] As used herein, the words "comprise," "have," "include," and all grammatical variations thereof are each intended to have an open, non-limiting meaning that does not exclude additional elements or steps.

[0013] It should be understood that, as used herein, "first," "second," "third," etc., are arbitrarily assigned and are merely intended to differentiate between two or more tubing strings, steps, etc., as the case may be, and does not indicate any sequence. Furthermore, it is to be understood that the mere use of the term "first" does not require that there be any "second," and the mere use of the term "second" does not require that there be any "third," etc.

[0014] Oil and gas hydrocarbons are naturally occurring in some subterranean formations. A subterranean formation containing oil or gas is sometimes referred to as a reservoir. A reservoir may be located under land or off shore. Reservoirs are typically located in the range of a few hundred feet (shallow reservoirs) to a few tens of thousands of feet (ultra-deep reservoirs).

[0015] A well system can include multiple components for drilling and producing oil or gas. Some of the components can include a rig floor, a rotary table, and an elevator. In order to produce oil or gas, a wellbore is drilled into a reservoir or adjacent to a reservoir. A wellbore includes a wellhead, which is typically located at ground level for land operations and is typically located at the top of the sea floor for off-shore operations. The rig floor is often located several feet to several thousands of feet above the wellhead. For example, in land operations, the rig floor can be located several feet, commonly anywhere from 10 to 60 feet, above the wellhead at ground level. By way of another example,

in off-shore drilling, the rig floor is usually located at the surface of the sea. For off-shore operations, the distance between the rig floor and the wellhead is determined by the depth of seawater from the surface of the sea to the sea floor. It is not uncommon for off-shore rig floors to be located several thousands of feet above the wellhead.

[0016] A portion of a wellbore may be an open hole or cased hole. In a cased-hole wellbore portion, a casing string is placed into the wellbore, which can also contain a tubing string. A well can include, without limitation, an oil, gas, water, or injection well. A well used to produce oil or gas is generally referred to as a production well. A wellbore can include vertical, inclined, and horizontal portions, and it can be straight, curved, or branched. As used herein, the term "wellbore" includes any cased, and any uncased, open-hole portion of the wellbore.

[0017] After a wellbore has been drilled, the wellbore is then completed. During completion of an open-hole wellbore, a tubing string may be placed into the wellbore. The tubing string allows fluids to be introduced into or flowed from a remote portion of the wellbore. A tubing is a section of tubular pipe, usually 30 feet in length. Examples of a pipe can include, but are not limited to, a blank pipe, a sand screen, or a washpipe. A tubing string refers to multiple sections of pipe connected to each other. A tubing string is created by joining multiple sections of pipe together. This is generally accomplished by picking up a first section of pipe with an elevator. If the section of pipe includes a ring, then the section of pipe can be lowered to a release table. The release table can include a ram that is capable of opening and closing. The ram can be opened or closed via hydraulic pistons. In the closed position, the inner diameter (I.D.) of the ram is less

than the outer diameter (O.D.) of the ring of the pipe. In this manner, a section of pipe fitted with a ring can be lowered on top of the closed ram such that the ring rests on top of the ram and the section of pipe is suspended from the release table. The elevator can be released and the pipe is prevented from falling into the wellbore via the ram and ring. A second section of pipe, also fitted with a ring, can now be joined to the first section. This is accomplished by picking up the second section with the elevator. The second section is lowered to an area above the top of the first section. The two sections of pipe are connected to each other via threaded joints. After connection, the ram is opened, the two sections are lowered such that the ring of the first section is located below the ram and the ring of the second section is located slightly above the ram. The ram is closed and the two sections are lowered until the ring of the second section rests on top of the closed ram. This process is repeated until the desired length of tubing string is achieved.

[0018] After any tubing string that contains rings is run, a running table can be added to the well system. The running table is generally located above the release table and can include a plate. Any tubing strings that do not include a ring can be run via the running table. This is generally accomplished by picking up a first pipe via the elevator. A collar (also called a collar clamp) is placed near the top of the first pipe. The first pipe is then lowered to the running table via the elevator. The collar on the first pipe rests on top of the plate of the running table. The pipe is released from the elevator and the pipe is prevented from falling into the wellbore via the collar and plate. A second section of pipe is picked up via the elevator and lifted to an area above the first pipe. The two pipes are then connected via threaded

joints. The collar is then removed from the first pipe and connected to the second pipe near the top of the pipe. The second pipe is then lowered to the running table and suspended via the collar and plate. The process continues in this fashion until the desired length of tubing string has been run.

[0019] After the tubing string is run at the running table to the desired length, the entire tubing string is generally lowered to the release table. The no-ring tubing string (*i.e.*, the second tubing string) can be suspended from the release table by suspending the second tubing string from the ringed tubing string (*i.e.*, the first tubing string). This can be accomplished via a slip, a bowl, or a no-go sub assembly. The O.D. of the slip, bowl, or sub assembly should not be greater than the O.D. of the first tubing string. In this manner, the second tubing string sits on top of the first tubing string and is suspended from the first tubing string. Both strings are suspended from the release table via the ram. The no-go sub assembly can include multiple components for suspending one tubing string from another tubing string. By way of example, the sub assembly can include a protector component that prevents damage to the first tubing string. By suspending the second tubing string from the first tubing string, the running table is available to run a third tubing string and so on.

[0020] A common completion technique for an open-hole wellbore is called sand control. During sand control, a string of sand screen pipes (which often include sections of blank pipe) is run into the wellbore. A sand screen and blank pipe usually include a ring on each section of pipe. As used herein, the present sense of the term "run," and all grammatical variations thereof, means the process of connecting sections of pipe together to form a tubing string. After the sand screen

string has been run and suspended from the release table, a new tubing string that does not include rings is run inside the sand screen string via the running table and into the wellbore. As used herein, the past sense of the term "run," and all grammatical variations thereof, means a tubing string that has already been placed in the wellbore. It is common for the new tubing string to be a washpipe. Tubing strings used in sand control can include a sand screen string (commonly 5 1/2 inches in diameter, but may be any size), a first washpipe (commonly 4 inches in diameter when used with a 5 1/2 inch screen), and optionally a second washpipe (commonly 2 7/8 inches in diameter when used with a 4 inch first washpipe).

[0021] Several problems can arise during the drilling and/or completion process. One problem is the occurrence of a formation kick. A kick can occur when the fluid (e.g., a liquid or a gas) in a reservoir prematurely enters a portion of the wellbore, for example, in an annular space of the wellbore. Prior to production, a sufficient hydrostatic pressure must be exerted on the subterranean formation in order to prevent the formation fluids from prematurely entering the wellbore. Hydrostatic pressure is the pressure exerted by a fluid at equilibrium due to the force of gravity. If the hydrostatic pressure exerted by the fluid is not great enough, then a kick could occur.

[0022] A common first response to detecting a kick would be to isolate the wellbore from the surface and try to shut in the well. If the well is not shut in, then a blowout could occur. A blowout is the uncontrolled release of crude oil and/or natural gas from a well after pressure control systems have failed. Traditional pressure control systems include the use of one or more blowout preventers (BOP). A BOP can be a ram-type BOP or an annular BOP. A ram-type BOP is commonly

located at the wellhead, which is located at the surface of land or at the surface of a subsea floor. There are several types of ram BOPs. Some ram BOPs are used when there is not a tubing string located within the area of the wellhead and other ram BOPs are used when there is a tubing string located within the area of the wellhead. For example, a shear ram can cut through a tubing string via hardened steel shears. A blind shear ram (also known as a shear seal ram, or a sealing shear ram) is intended to seal a wellbore, even when the wellbore is occupied by a tubing string, by cutting through the tubing string as the ram closes off the well. The upper portion of the severed tubing string is freed from the ram, while the lower portion may be crimped and the "fish tail" captured to hang the tubing string off the BOP.

[0023] It is not uncommon for a BOP to fail, which can result in a blowout of a well. An example of a potential failure is when there are multiple tubing strings or screens that a shear ram BOP must cut through before the wellbore can be sealed. It can be difficult at best, or impossible at worst, for a shear ram to effectively cut through two or more tubing strings or screens and/or seal when the strings or screens are being run. Even if a shear ram BOP is able to partially cut through more than one tubing string or screen, the BOP may not completely seal the wellbore due to the remaining un-cut pipe and/or screen.

[0024] The largest underwater blowout in U.S. history occurred on April 20, 2010, in the Gulf of Mexico at the Macondo Prospect oil field. One of the causes of the blowout was the failure of a shear ram BOP to seal the wellbore. The blowout caused the explosion of the Deepwater Horizon, an off-shore drilling rig. The explosion killed several workers and injured numerous others. Due to the ensuing fire on the rig,

the rig had to be evacuated. Workers were no longer able to try and contain the blowout due to the evacuation.

[0025] Thus, there is a need for a safety system that can be used in conjunction with a blowout preventer to shut in a well in emergency situations. A novel method of controlling a blowout utilizes releasing at least one tubing string such that the tubing string is no longer located in the area of a BOP. According to certain embodiments, the methods include crimping at least two tubing strings together before releasing the tubing strings. According to other embodiments, the methods include cutting through at least one tubing string before releasing the tubing string(s). One advantage to the methods is that a shear ram BOP may not have to cut through any tubing strings, or it does not have to cut through as many tubing strings in order to seal off the well. By eliminating, or at least reducing, the cutting of tubing strings by the BOP, the BOP can more effectively shut in a well.

[0026] According to an embodiment, a method of controlling a blowout comprises: releasing at least a first tubing string into a portion of a well system, wherein the step of releasing comprises activating a release table; and causing or allowing a blowout preventer to close.

[0027] According to another embodiment, a method of controlling a blowout comprises: releasing at least a first tubing string into a portion of a well system, wherein the step of releasing comprises activating a release table; cutting through the wall of at least a second tubing string, wherein the step of cutting comprises activating a cutting device; and causing or allowing a blowout preventer to close.

[0028] According to yet another embodiment, a method of controlling a blowout comprises: compressing at least a portion of a second tubing string and a third tubing string

together, wherein the step of compressing comprises activating a crimping device; cutting through the wall of at least a third tubing string, wherein the step of cutting comprises activating a cutting device, and wherein the step of cutting is performed after the step of compressing; releasing at least the second tubing string and the third tubing string into a portion of a well system, wherein the step of releasing comprises activating a release table, and wherein the step of releasing at least the second and third tubing strings is performed after the step of cutting; and causing or allowing a blowout preventer to close.

[0029] Any discussion of a particular component of the well system **10** (e.g., an activation device) is meant to include the singular form of the component and also the plural form of the component, without the need to continually refer to the component in both the singular and plural form throughout. For example, if a discussion involves "the activation device," it is to be understood that the discussion pertains to one activation device (singular) and two or more activation devices (plural). It is also to be understood that any discussion of a particular component or particular embodiment regarding a component is meant to apply to all of the method embodiments without the need to re-state all of the particulars for each method embodiment.

[0030] It is to be understood that any discussion regarding suspension of a tubing string from the release table can be accomplished by a variety of mechanisms including, but not limited to, a ring, a slip, a bowl, a no-go sub assembly, or combinations thereof. Moreover, two or more tubing strings can be suspended from the release table by first suspending a first tubing string to the release table via one mechanism (e.g., a ring) and then suspending a second tubing string from the first tubing string via another mechanism (e.g., a slip, bowl, or no-

go sub assembly). It is also to be understood that any discussion regarding suspension of a tubing string from the running table can be accomplished by a variety of mechanisms including, but not limited to, a collar and a plate.

[0031] Turning to the Figures, **Fig. 1** depicts a well system **10**. The well system **10** can include a wellbore **110** and a blowout preventer (BOP) **130**. As can be seen in **Fig. 1**, it is common for the wellbore **110** to be several hundreds of feet deeper than the total length of the longest tubing string. The BOP **130** can be located at the wellhead **120**. The well system **10** can also include a second BOP (not shown). According to an embodiment, the BOP **130** seals off the wellbore **110** at the wellhead **120** by the movement of two shears towards each other such that the two shears eventually close together. For example, the BOP **130** can be a shear ram BOP or a blind shear ram BOP.

[0032] The well system **10** can be a producing oil, gas, or water well, or an injection well. The well system **10** can be used for drilling operations, work-over operations, or completion operations. The well system **10** can include a rig floor **200**. The rig floor **200** can include a rotary table. The well system **10** can also include a release table **201**, a running table **202**, and an elevator **210**.

[0033] The well system **10** can include a first tubing string **310**. According to an embodiment, the first tubing string **310** includes sections of pipe, wherein each section of pipe includes a ring. The well system **10** can include anywhere from one to five tubing strings. An example of the first tubing string **310** is a screen and/or blank pipe assembly. A common diameter for a screen and/or blank pipe assembly is 5 1/2 inches. The well system **10** can also include a second tubing string **311** and can also include a third tubing string **312**. The

second tubing string **311**, the third tubing string **312**, and any additional tubing strings can include sections of pipe that do not include a ring. For example, the second and third tubing strings **311/312** can be a washpipe. Common diameters for a washpipe are 4 inches and 2 7/8 inches. According to an embodiment, the third tubing string **312** is positioned inside the second tubing string **311**, and the second tubing string **311** is positioned inside the first tubing string **310**. The first tubing string **310** can be suspended from the release table **201** via a ring, a first slip, bowl, or block assembly **320**. The second tubing string **311** can be suspended from the running table **202** via a second safety collar and plate **331**. After running, the second tubing string **311** can be suspended from the first tubing string **310** at the release table **201** via a second slip, bowl, or no-go sub assembly **321**. The third tubing string **312** can be suspended from the running table **202** via a third safety collar and plate **332**. After running, the third tubing string **312** can be suspended from the second tubing string **311** at the release table **201** via a third slip, bowl, or no-go sub assembly **322**.

[0034] The methods include the step of releasing at least a first tubing string **310** into the wellbore **110**, wherein the step of releasing comprises activating the release table **201**. The step of releasing at least the first tubing string **310** can be opening a ram of the release table **201** via hydraulic pistons. The methods are designed to be used at various points in the tubing string running process. For example, if the first tubing string **310** is in the process of being run and it becomes necessary to shut in the well, then the methods can further include the step of suspending the first tubing string **310** from the release table **201** prior to the step of releasing. The step of suspending can include any or all of the following steps. Lower the elevator **210**, set the first tubing string **310** onto the

ram via the ring, first slip, bowl, or block assembly **320**, and releasing the first tubing string **310** from the elevator **210**. Now, when the release table **201** is activated, the first tubing string **310** can fall below the BOP **130** into the wellbore **110**. In this manner, the BOP **130** would not have to cut through a tubing string in order to seal the wellbore **110**.

[0035] By way of another example, if the first tubing string **310** has already been run and the second tubing string **311** is currently in the process of being run, then the first tubing string **310** will already be suspended from the release table **201** via the ring, first slip, bowl, or block assembly **320**, and at least a portion of the second tubing string **311** can be attached to the elevator **210**, or the second tubing string **311** can be suspended from the running table **202** via the second safety collar and plate **331**. In the event it becomes necessary to shut in the wellbore **110**, then the first tubing string **310** can be released from the release table **201**. When the first tubing string **310** is released, the first tubing string **310** can fall below the BOP **130** into the wellbore **110**. In this manner, when the BOP **130** is activated, the BOP **130** only has to cut through the second tubing string **311** instead of having to cut through both, the first and the second tubing strings **310** and **311**. This helps to ensure that the BOP **130** will function properly to shut in the wellbore **110**, and ideally prevent a blowout. By way of yet another example, if the second tubing string **311** is being run and it becomes necessary to shut in the well, then the methods can further include the step of indirectly suspending the second tubing string **311** from the release table **201** prior to the step of releasing. As used herein, the phrase "indirectly suspending" means a tubing string is suspended from another tubing string, wherein the other tubing is directly suspended from the release table **201**, for

example, via the ram. The step of indirectly suspending the second tubing string **311** can include any or all of the following steps. Lower the elevator **210** to the release table **201**, set the second tubing string **311** in the second slip, bowl, or no-go sub assembly **321**, and release the second tubing string **311** from the elevator **210**. In this manner, the second tubing string **311** is suspended from the first tubing string **310** and indirectly suspended from the release table **201**. Now, when the release table **201** is activated, both the first and the second tubing strings **310** and **311** can fall below the BOP **130** into the wellbore **110**. As such, the BOP **130** will not have any tubing strings to cut through when closing.

[0036] The step of releasing can further include releasing at least two tubing strings into the wellbore **110**. For example, if the first tubing string **310** and the second tubing string **311** have already been run and the third tubing string **312** is in the process of being run, then the first and the second tubing strings **310** and **311** can be suspended from the release table **201** via the ring, first slip, bowl, or block assembly and the second slip, bowl, or no-go sub assembly **320/321**. The methods can further include the step of indirectly suspending the second tubing string **311** from the release table **201** after the second tubing string **311** has been run. In the event it becomes necessary to shut in the wellbore **110**, then the release table **201** can be activated such that the first and the second tubing strings **310** and **311** fall below the BOP **130** into the wellbore **110**. In this manner, the BOP **130** only has to cut through the third tubing string **312** instead of having to cut through all three tubing strings. Again, this helps to ensure that the BOP **130** will function properly to shut in the wellbore **110**, and ideally prevent a blowout. Of course, the third tubing string **312** can also be indirectly suspended from the release

table **201** in the same manner as the second tubing string **311**. Upon activation of the release table **201**, all three tubing strings can fall below the BOP **130**.

[0037] The step of activating the release table **201** can include manually activating a binary activation device (not shown). Examples of the activation device include, but are not limited to, a toggle switch or a push-button switch. Any of the activation devices (e.g., to activate the release table, the crimping device, or the cutting device) can be located near the rig floor **200** or located at a remote location away from the rig floor **200**. There can also be two activation devices. One of the activation devices can be located near the rig floor **200** and the other device can be located at the remote location away from the rig floor **200**. One of the advantages to having an activation device located away from the rig floor **200** is that the device can be activated at a safe distance away from the rig floor **200**. For example, if the workers on the rig are injured to such an extent that they are incapable of manually activating the activation device near the rig floor, then a worker at the remote location can manually activate the activation device. The activation device can include a safety mechanism whereby it is extremely difficult or impossible to accidentally activate the activation device. For example, the activation device can include a cover or a key slot. In the first example, the cover would have to be lifted in order to manually activate the activation device. In the second example, a corresponding key would have to be inserted into the key slot, and the key would have to be rotated in order to manually activate the activation device.

[0038] As can be seen in **Figs. 2A through 3B, 6A and 6B**, the well system **10** can further include a crimping device **301**. The crimping device **301** can be designed such that it is

capable of compressing a portion of at least two tubing strings together. According to an embodiment, the crimping device **301** does not cut through the walls of the tubing strings, but rather squeezes the walls of at least two tubing strings to the point where the tubing strings are compressed together. In this manner, the at least two tubing strings are connected to each other at the compression point. The crimping device **301** can be made of a variety of materials including, but not limited to, tungsten carbide, P-110 alloy, and hardened steel.

[0039] The methods can include the step of compressing at least a portion of two or more tubing strings together, wherein the step of compressing includes activating the crimping device. The crimping device **301** can be positioned below the top of the first tubing string **310**, as shown in **Figs. 2A and 2B**. According to this embodiment, the step of compressing can include compressing at least the first tubing string **310** and the second tubing string **311** together. The crimping device **301** can be used when there is more than one tubing string being run. Although shown with three tubing strings, the crimping device **301** can be used with only two tubing strings, or with four or more tubing strings. The step of compressing can be performed prior to the step of releasing at least the first tubing string or it can be performed after the step of releasing. If the step of activating the crimping device **301** is performed after the step of releasing at least the first tubing string, then the methods can further include the step of releasing at least a second tubing string. The step of releasing at least the second tubing string can be performed after the step of activating the crimping device **301**. The crimping device **301** can be activated using a first activation device. If only one activation device is used, then the sequence of activation can be programmed into the device. For

example, the activation device can be programmed to release any tubing strings suspended from the release table **201** first and then activate the crimping device **301** and/or a cutting device **302** or vice versa. The activation device can also be programmed such that there is a delay between the first activation and a second activation. The crimping device **301** can also be activated using a second binary activation device. If the well system **10** also includes a second activation device, then the second activation device(s) can be located adjacent to the first activation device(s) (*i.e.*, near the rig floor **200** or at a remote location away from the rig floor **200**), or at a different location from the first activation device. In this manner, the first and second activation devices can be manually activated at the same location. The second activation device can also include a safety feature to limit or prevent accidental activation of the second activation device (*e.g.*, a safety cover or a key slot).

[0040] The following examples illustrate the possible methods of using the crimping device **301** as shown in **Figs. 2A and 2B**. If the first tubing string **310** has been run and the second tubing string **311** is being run and it becomes necessary to shut in the well, then any or all of the following steps can be performed. Stop running the second tubing string **311**, manually activate the crimping device **301**, release the crimping device **301**, remove the second safety collar or plate **331**, install the second slip, bowl, or no-go sub assembly **321** to the top portion of the second tubing string **311**, set the second tubing string **311** down onto the first tubing string **310** at the location of the release table **201**, and remove the elevator **210** from the second tubing string **311**. As can be seen in **Fig. 2B**, at least the first and the second tubing strings **310** and **311** are compressed together. The first and the second tubing strings

310 and 311 can now be released from the release table **201** via the activation device. Both of the tubing strings can fall below the BOP **130** into the wellbore **110**. As a result, the BOP **130** does not have to cut through any tubing strings during closing.

[0041] By way of another example, if the first and the second tubing strings **310 and 311** have already been run and the third tubing string **312** is in the process of being run, then any or all of the following steps can be performed. Stop running third tubing string **312**, manually activate the crimping device **301**, release the crimping device **301**, remove the second slip, bowl, or no-go sub assembly **321**, remove the third safety collar or plate **332**, set the third tubing string **312** down onto the release table **201**, and remove the elevator **210** from the third tubing string **312**. As can be seen in **Fig. 2B**, the first, second, and third tubing strings **310, 311, and 312** are compressed together. All three of the tubing strings can now be released from the release table **201** via the activation device. The tubing strings can fall below the BOP **130** into the wellbore **110**.

[0042] By way of yet another example, the first tubing string **310** can be released from the release table **201** via activation of the activation device, the crimping device **301** can then be activated (which compresses the second and third tubing strings **311 and 312** together), any of the aforementioned steps can be performed, and then the second and third tubing strings **311 and 312** can be released from the release table **201** via activation of the activation device. Of course the crimping device **301** can be used in situations in which there are more than three tubing strings, following the same procedures as outlined above.

[0043] Turning to **Figs. 3A and 3B**, the crimping device **301** can be located above the top of the first tubing string **310** at a location between the release table **201** and the running table **202**. According to this embodiment, the step of compressing can include compressing at least the second and third tubing strings **311 and 312** together. According to this embodiment, any or all of the following steps can be performed. The first tubing string **310** can be released from the release table **201** and allowed to fall into the wellbore **110**, the crimping device **301** is activated and then released to compress the second and third tubing strings **311 and 312** together, the second slip, bowl, or no-go sub assembly **321** is removed, the third safety collar or plate **332** is removed, the third tubing string **312** is set down onto the release table **201**, the elevator **210** is removed from the third tubing string **312**, and the second and third tubing strings **311 and 312** are released from the release table **201**. The second and third tubing strings **311 and 312** can now fall below the BOP **130** into the bottom of the wellbore **110**. Again, the BOP **130** does not have to cut through any tubing strings during closing. This method can be used to compress and release four or more tubing strings. If there are four or more tubing strings, then one of skill in the art can determine which tubing strings can be released prior to compression, which tubing strings to compress together, and which compressed tubing strings to release after compression.

[0044] According to an embodiment, a method of controlling a blowout comprises: releasing at least a first tubing string into a portion of a well system, wherein the step of releasing comprises activating a release table; cutting through the wall of at least a second tubing string, wherein the step of cutting comprises activating a cutting device; and causing or allowing a blowout preventer to close.

[0045] The well system **10** can further include a cutting device **302**. The methods can further include the step of cutting through the wall of at least the second tubing string **311**, wherein the step of cutting comprises activating the cutting device **302**. The cutting device **302** can be designed such that it is capable of cutting through at least one wall of a tubing string. Preferably, the cutting device **302** is designed such that it is capable of completely cutting through the entire wall circumference of at least one tubing string. More preferably, the cutting device **302** is designed such that it is capable of completely cutting through the entire wall circumference of at least two or more tubing strings. The cutting device **302** can be made of a variety of materials including, but not limited to, tungsten carbide, P-110 alloy, and hardened steel. According to an embodiment, the cutting device **302** is made from a material such that the cutting device **302** is capable of completely cutting through two or more tubing strings. Preferably, the cutting device **302** is capable of completely cutting through the two or more tubing strings such that the top portions of the tubing strings are completely severed from the bottom portions of the tubing strings. Reference to the top portion of a tubing string refers to the part of the tubing string located above the cutting device **302** and the bottom portion refers to the part of the tubing string located below the cutting device **302**.

[0046] The cutting device **302** can be part of a cutting table **300**. The cutting table **300** can be removably attached to the running table **202**. The cutting table **300** can be removably attached to the running table **202** at various times in the process of running a tubing string(s). For example, after running the first tubing string **310**, the cutting table **300** can be removably attached to the running table **202**. The cutting

table 300 can also be removably attached after the second tubing string 311 has been run. As can be seen in **Figs. 4A and 4B**, the cutting device 302 can be positioned above the top of the first tubing string 310 at a location between the release table 201 and the running table 202. Although **Figs. 4A and 4B** depict three tubing strings, the cutting device 302 can be also used with only two tubing strings or four or more tubing strings. According to another embodiment and as can be seen in **Figs. 5A through 5D**, the cutting device 302 can be located above the running table 202. The following discussion regarding the cutting device 302 is meant to apply to all the method embodiments that include the cutting device 302 regardless of the exact location of the cutting device 302.

[0047] The step of cutting can be performed before the step of releasing at least the first tubing string or it can be performed after the step of releasing at least the first tubing string. The methods can further include the step of releasing at least a second tubing string after the step of releasing at least the first tubing string. The step of cutting can also be performed after the step of releasing at least the first tubing string and before the step of releasing at least the second tubing string. The cutting device 302 can be activated using the first or second activation device.

[0048] The following examples illustrate the possible methods of using the cutting device 302. If the first tubing string 310 has been run and the second tubing string 311 is being run and it becomes necessary to shut in the well, then any or all of the following steps can be performed. Stop running the second tubing string 311 and manually activate the cutting device 302. According to this embodiment, when the cutting device 302 is activated, then preferably the cutting device 302 severs the second tubing string 311 such that the

second tubing string **311** falls below the BOP **130** into the wellbore **110**. The BOP **130** can then be used to cut through the first tubing string **310** upon closure. Alternatively, either before or after the cutting device **302** has been activated and the second tubing string **311** falls below the BOP **130**, the first tubing string **310** can be released from the release table **201** such that the BOP **130** does not have to cut through any tubing strings upon closure.

[0049] In another embodiment, the cutting device **302** is used to cut through two or more tubing strings. According to this embodiment, the step of cutting comprises cutting through the wall of at least the second and third tubing strings **311** and **312**. This may be useful when three or more tubing strings are being run. For example, and as shown in **Figs. 4A and 4B**, if the first and the second tubing strings **310** and **311** have been run and the third tubing string **312** is being run, then the cutting device **302** can be used to cut through the second and third tubing strings **311** and **312**. According to this embodiment, when the cutting device **302** is activated, the cutting device **302** preferably severs the second and third tubing strings **311** and **312** such that the second and third tubing strings **311** and **312** fall below the BOP **130** into the wellbore **110**. The BOP **130** can then be used to cut through the first tubing string **310** upon closure. Alternatively, either before or after the cutting device **302** has been activated and the second and third tubing strings **311** and **312** fall below the BOP **130**, the first tubing string **310** can be released from the release table **201** such that the BOP **130** does not have to cut through any tubing strings upon closure.

[0050] As mentioned above and as illustrated in **Figs. 5A through 5D**, the cutting device **302** can be located above the running table **202**. According to this embodiment, the

cutting device **302** can be used to cut through only one tubing string. For example, depending on the stage of running, the cutting device **302** can either cut through the second tubing string **311** or the third tubing string **312** or a fourth tubing string (not shown) and so on. An example of cutting the second tubing string **311** is shown in **Figs. 5A and 5B**. As can be seen, the first tubing string **310** is suspended from the release table **201** and the second tubing string **311** is suspended from the running table **202** via the second safety collar and plate **331**. After activation of the cutting device **302**, the second tubing string **311** can be severed such that it falls below the BOP **130**. An example of cutting the third tubing string **312** is shown in **Figs. 5C and 5D**. As can be seen, the first and the second tubing strings **310 and 311** are suspended from the release table **201** and the third tubing string **312** is suspended from the running table **202** via the third safety collar and plate **332**. After activation of the cutting device **302**, the third tubing string **312** can be severed such that it falls below the BOP **130**. The BOP **130** can then be used to cut through the first tubing string **310** or the first and the second tubing strings **310 and 311** upon closing. Alternatively, the first tubing string **310** or the first and the second tubing strings **310 and 311** can be released prior to, or after the step of, activating the cutting device **302** such that the first tubing string **310** or the first and the second tubing strings **310 and 311** fall below the BOP **130**, which prevents the BOP **130** from having to cut through any tubing string.

[0051] According to an embodiment, a method of controlling a blowout comprises: compressing at least a portion of a second tubing string and a third tubing string together, wherein the step of compressing comprises activating a crimping device; cutting through the wall of at least a third tubing

string, wherein the step of cutting comprises activating a cutting device, and wherein the step of cutting is performed after the step of compressing; releasing at least the second tubing string and the third tubing string into a portion of a well system, wherein the step of releasing comprises activating a release table, and wherein the step of releasing at least the second and third tubing strings is performed after the step of cutting; and causing or allowing a blowout preventer to close.

[0052] As can be seen in **Figs. 6A and 6B**, the well system **10** can include both, the crimping device **301** and the cutting device **302**. The inclusion of both devices can be useful when there are three or more tubing strings being run. By compressing at least two tubing strings together, the compressed tubing strings can fall below the BOP **130** as one unit. The crimping device **301** can be located above the top of the first tubing string **310** at a location between the release table **201** and the running table **202**. The cutting device **302** can be located above the running table **202**. The following scenarios illustrate some of the uses of both devices. The first and the second tubing strings **310 and 311** have been run and the third tubing string **312** is being run. An event occurs which requires shutting in the well. The running of the third tubing string **312** is stopped. The crimping device **301** is activated which compresses the second and third tubing strings **311 and 312** together. The cutting device **302** is activated which severs the third tubing string **312**. The second and third tubing strings **311 and 312** are then released via activation of the release table **201**. The first tubing string **310** can be released prior to the step of activating the crimping device **301**. According to this embodiment, the first tubing string **310** is released first to a point below the BOP **130** and then the second and third tubing strings **311 and 312** are released to a point below the BOP

130. The BOP **130** would not have to cut through any tubing strings upon closing. Alternatively, the first tubing string **310** can be released along with the second and third tubing strings **311 and 312** after the step of cutting.

[0053] Therefore, the present invention is well adapted to attain the ends and advantages mentioned as well as those that are inherent therein. The particular embodiments disclosed above are illustrative only, as the present invention may be modified and practiced in different but equivalent manners apparent to those skilled in the art having the benefit of the teachings herein. Furthermore, no limitations are intended to the details of construction or design herein shown, other than as described in the claims below. It is, therefore, evident that the particular illustrative embodiments disclosed above may be altered or modified and all such variations are considered within the scope and spirit of the present invention. While compositions and methods are described in terms of "comprising," "containing," or "including" various components or steps, the compositions and methods also can "consist essentially of" or "consist of" the various components and steps. Whenever a numerical range with a lower limit and an upper limit is disclosed, any number and any included range falling within the range is specifically disclosed. In particular, every range of values (of the form, "from about a to about b," or, equivalently, "from approximately a to b," or, equivalently, "from approximately a to b") disclosed herein is to be understood to set forth every number and range encompassed within the broader range of values. Also, the terms in the claims have their plain, ordinary meaning unless otherwise explicitly and clearly defined by the patentee. Moreover, the indefinite articles "a" or "an", as used in the claims, are defined herein to mean one or more than one of the element that

it introduces. If there is any conflict in the usages of a word or term in this specification and one or more patent(s) or other documents that may be incorporated herein by reference, the definitions that are consistent with this specification should be adopted.

WHAT IS CLAIMED IS:

1. A method of controlling a blowout comprising:
releasing at least a first tubing string into a portion of
a well system, wherein the step of releasing comprises
activating a release table; and
causing or allowing a blowout preventer to close.
2. The method according to Claim 1, wherein the portion of the
well system is a wellbore.
3. The method according to Claim 1, further comprising the
step of suspending the first tubing string from the release
table prior to the step of releasing.
4. The method according to Claim 1, wherein the well system
further comprises a second tubing string.
5. The method according to Claim 4, further comprising the
step of indirectly suspending the second tubing string from the
release table prior to the step of releasing, wherein the step
of indirectly suspending the second tubing string from the
release table is performed after the second tubing string has
been run.
6. The method according to Claim 4, wherein the well system
further comprises a running table.
7. The method according to Claim 6, wherein the well system
further comprises a crimping device.

8. The method according to Claim 7, wherein the well system further comprises a third tubing string.

9. The method according to Claim 8, further comprising the step of compressing at least a portion of at least the second and third tubing strings together, wherein the step of compressing comprises activating the crimping device.

10. The method according to Claim 9, wherein the crimping device is positioned below the top of the first tubing string and wherein the first tubing string is suspended from the release table.

11. The method according to Claim 10, wherein the step of compressing is performed prior to the step of releasing at least the first tubing string.

12. The method according to Claim 9, wherein the crimping device is located above the top of the first tubing string at a location between the release table and the running table.

13. The method according to Claim 12, wherein the step of compressing is performed after the step of releasing at least the first tubing string.

14. The method according to Claim 13, further comprising the step of releasing the at least the second and third tubing strings after the step of compressing.

15. A method of controlling a blowout comprising:
releasing at least a first tubing string into a portion of
a well system, wherein the step of releasing comprises
activating a release table;
cutting through the wall of at least a second tubing
string, wherein the step of cutting comprises activating a
cutting device; and
causing or allowing a blowout preventer to close.
16. The method according to Claim 15, wherein the cutting
device is designed such that it is capable of completely cutting
through the entire wall circumference of at least two or more
tubing strings
17. The method according to Claim 15, wherein the step of
cutting is performed prior to the step of releasing at least the
first tubing string.
18. The method according to Claim 15, wherein the step of
cutting is performed after the step of releasing at least the
first tubing string.

19. A method of controlling a blowout comprising:
compressing at least a portion of a second tubing string
and a third tubing string together, wherein the step of
compressing comprises activating a crimping device;
cutting through the wall of at least the third tubing
string,
 wherein the step of cutting comprises activating a
 cutting device, and
 wherein the step of cutting is performed after the
 step of compressing;
releasing at least the second tubing string and the third
tubing string into a portion of a well system,
 wherein the step of releasing comprises activating a
 release table, and
 wherein the step of releasing at least the second and
 third tubing strings is performed after the step of
 cutting; and
causing or allowing a blowout preventer to close.

20. The method according to Claim 19, wherein the step of
releasing further comprises releasing a first tubing string.

21. The method according to Claim 19, further comprising the
step of releasing at least a first tubing string, wherein the
step of releasing at least the first tubing string comprises
activating a release table, and wherein the step of releasing at
least the first tubing string is performed prior to the step of
compressing.

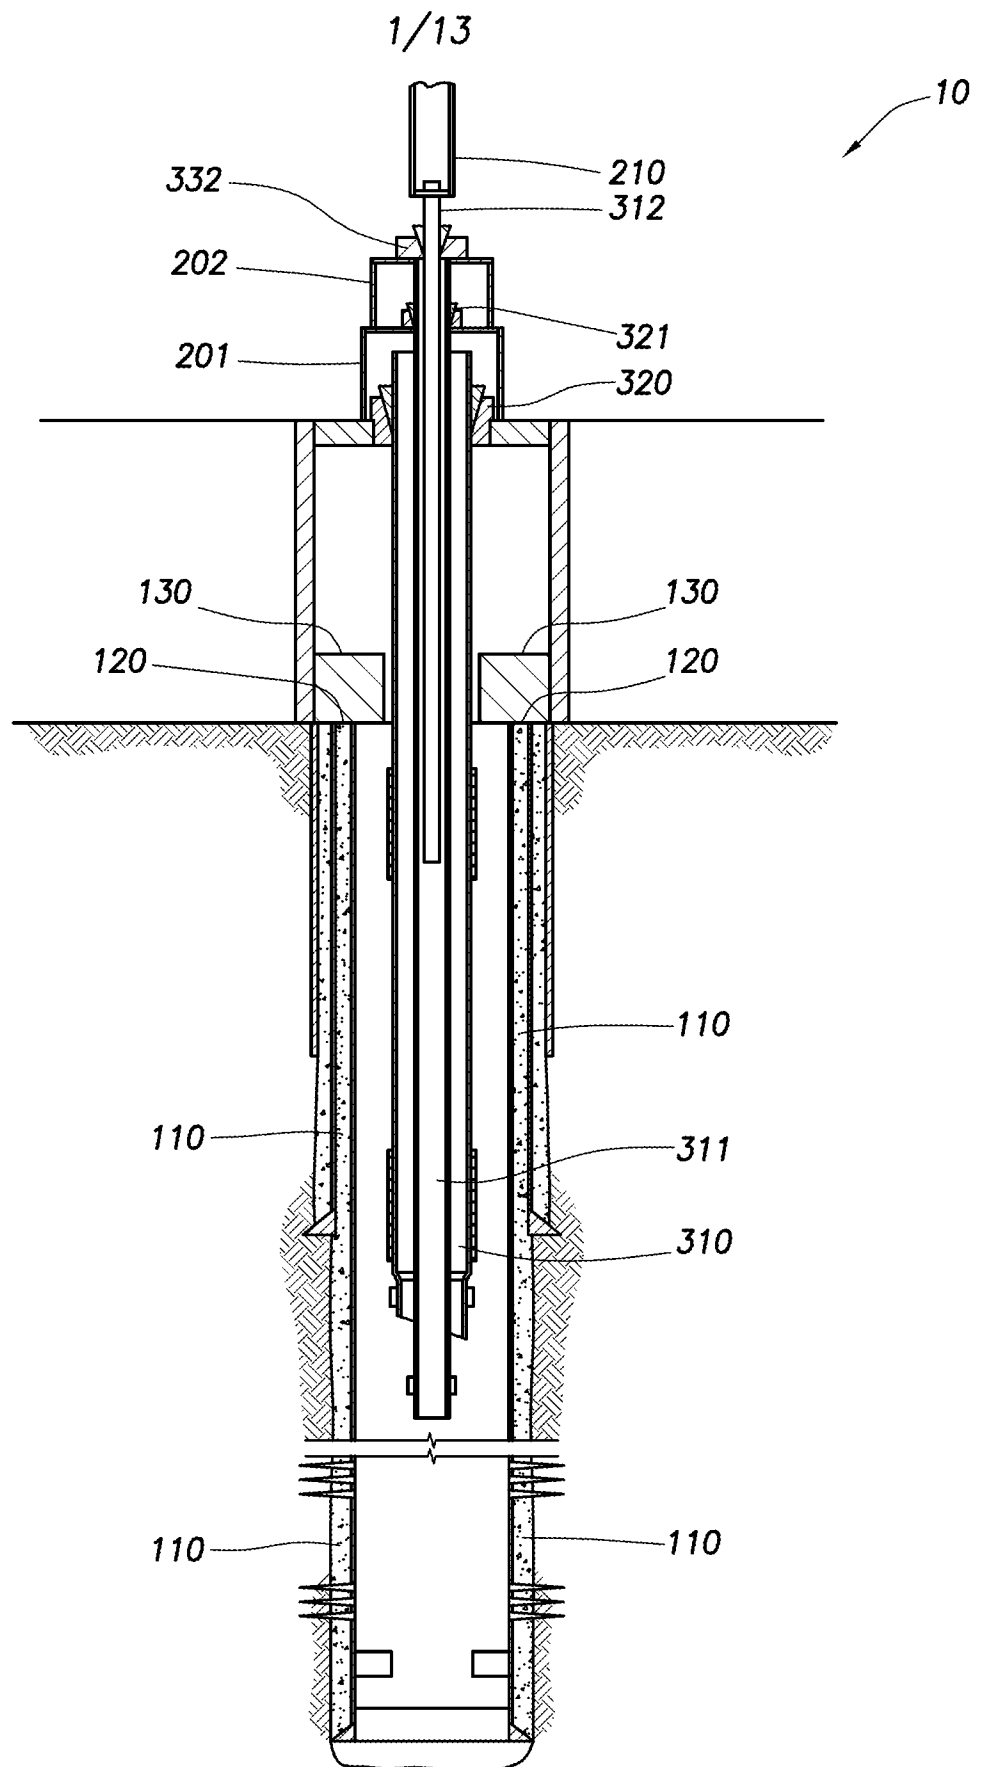


FIG. 1

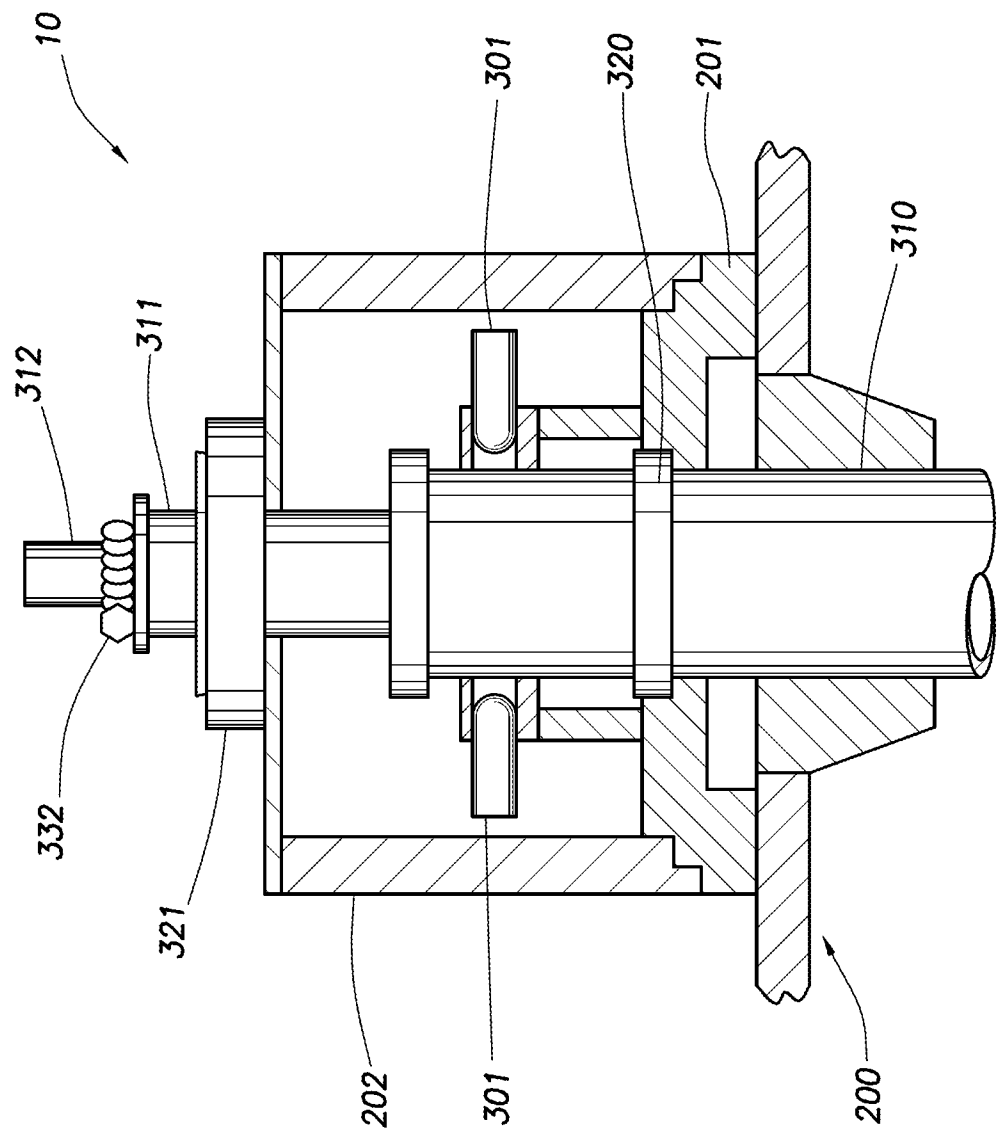


FIG.2A

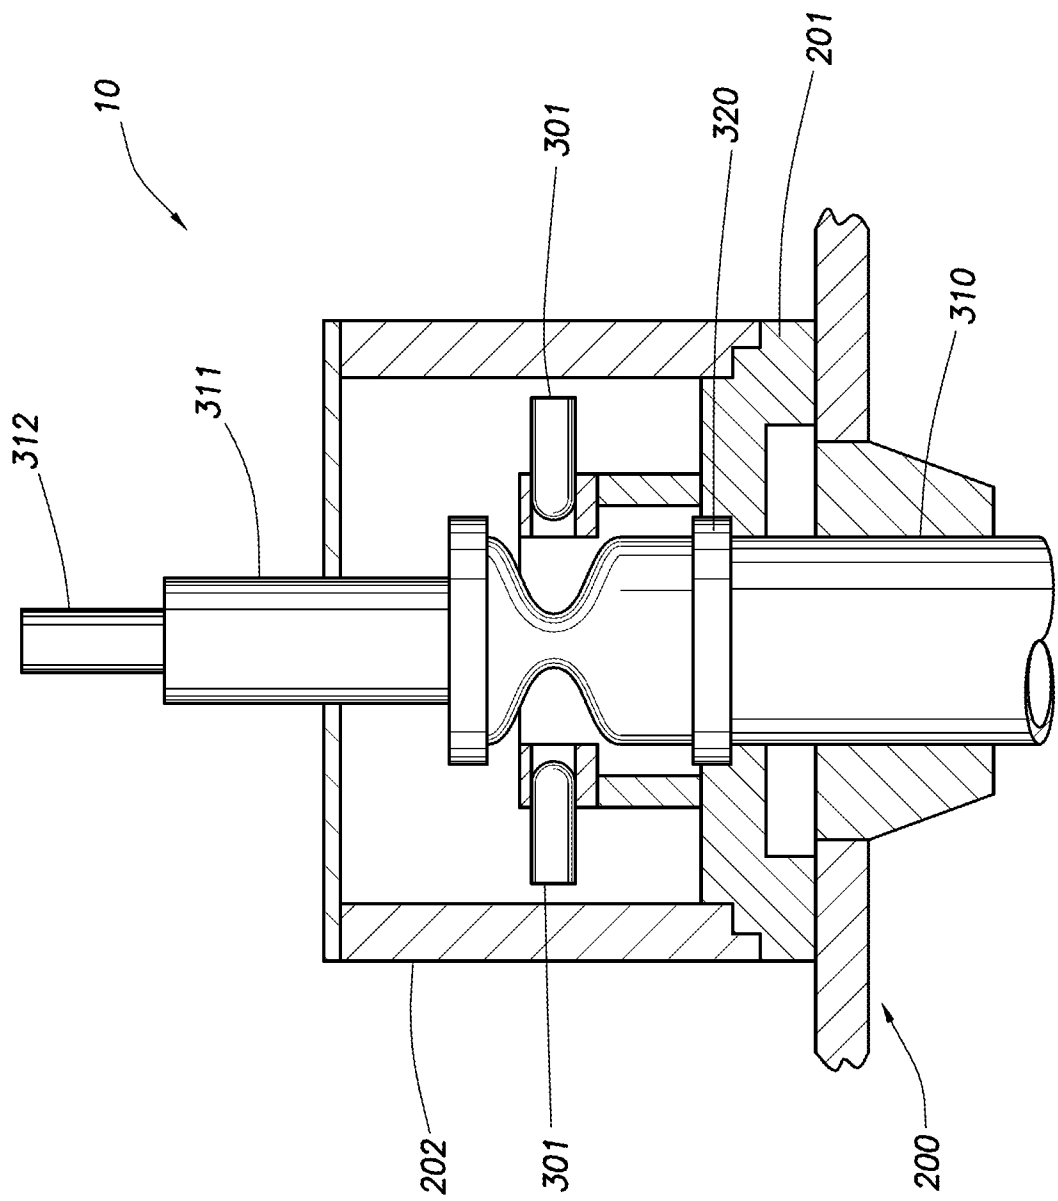


FIG.2B

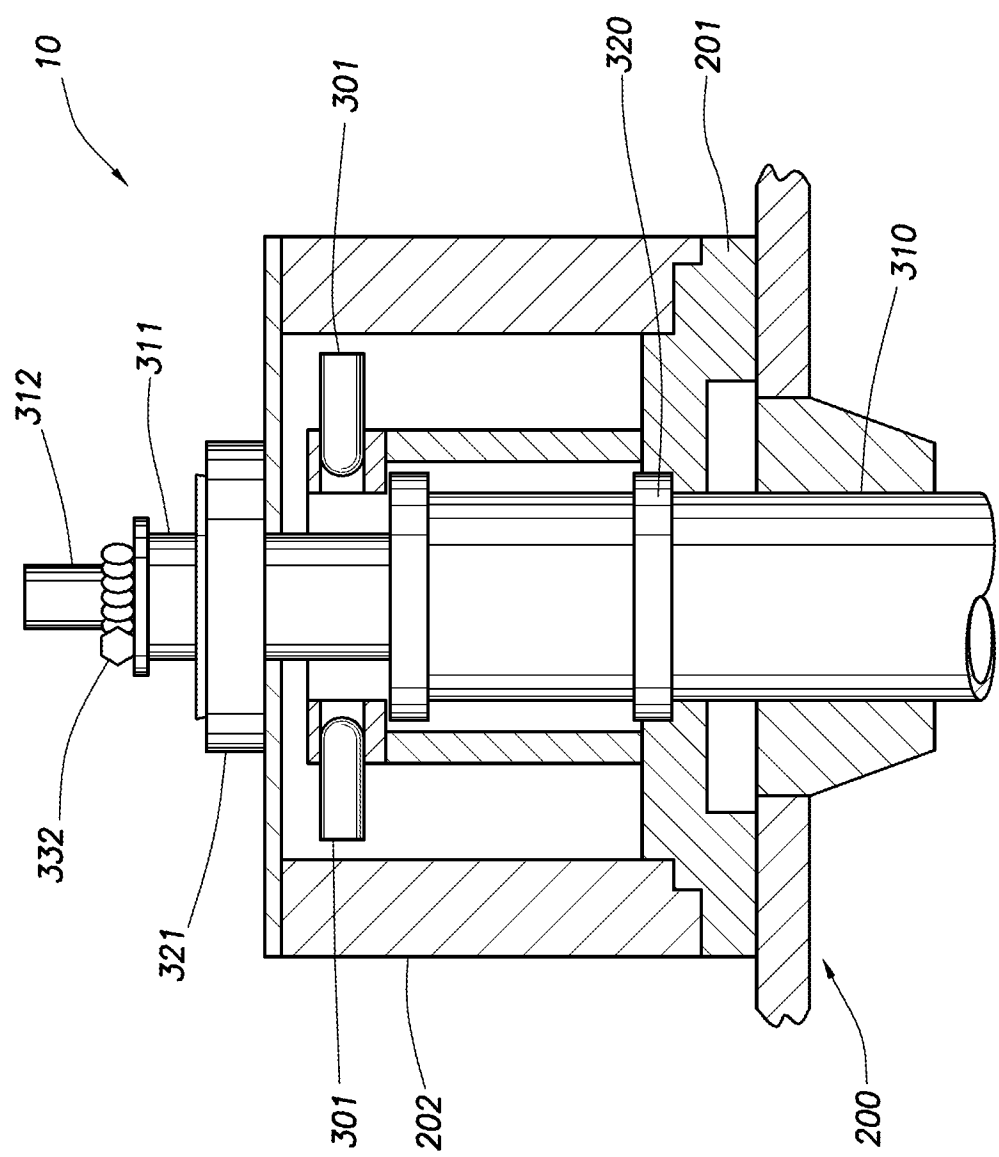


FIG.3A

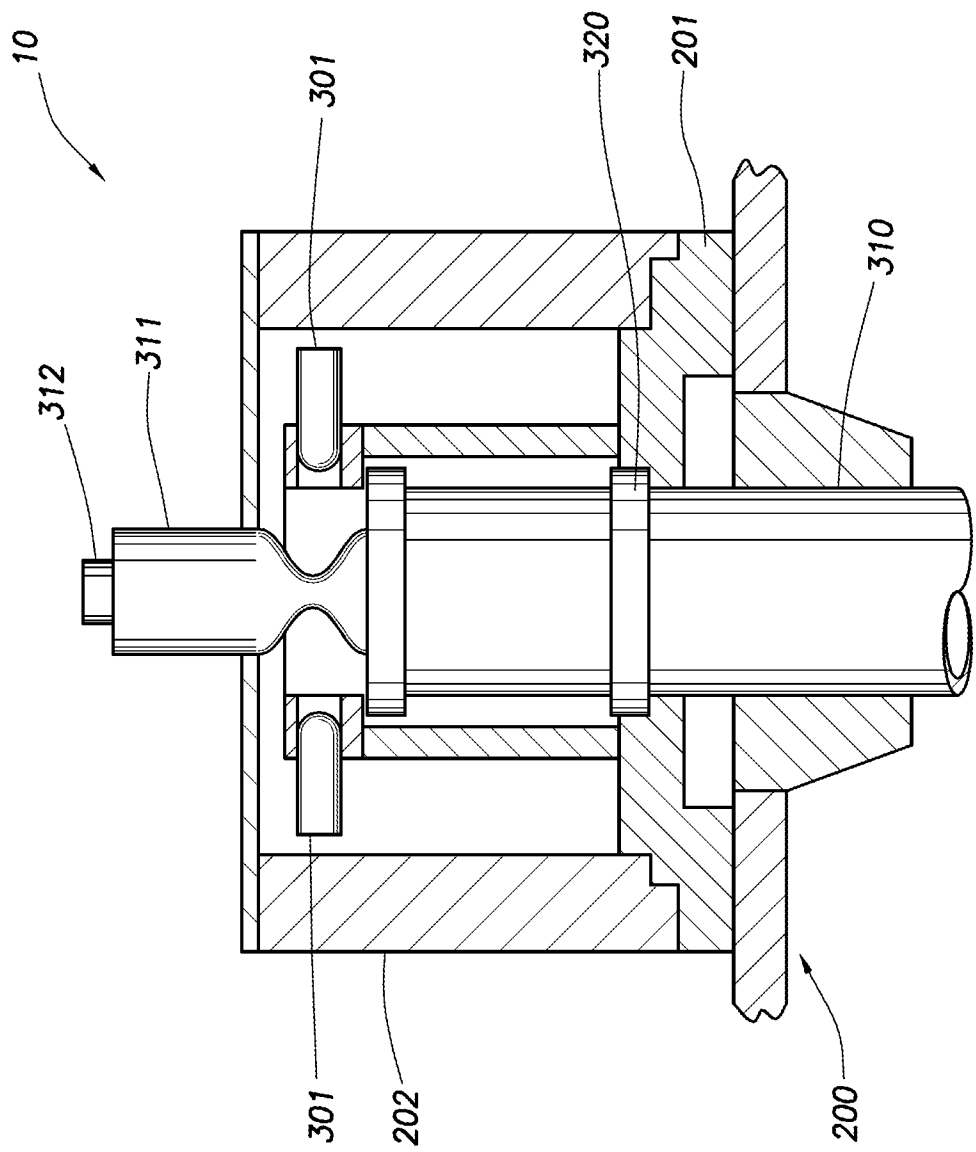


FIG.3B

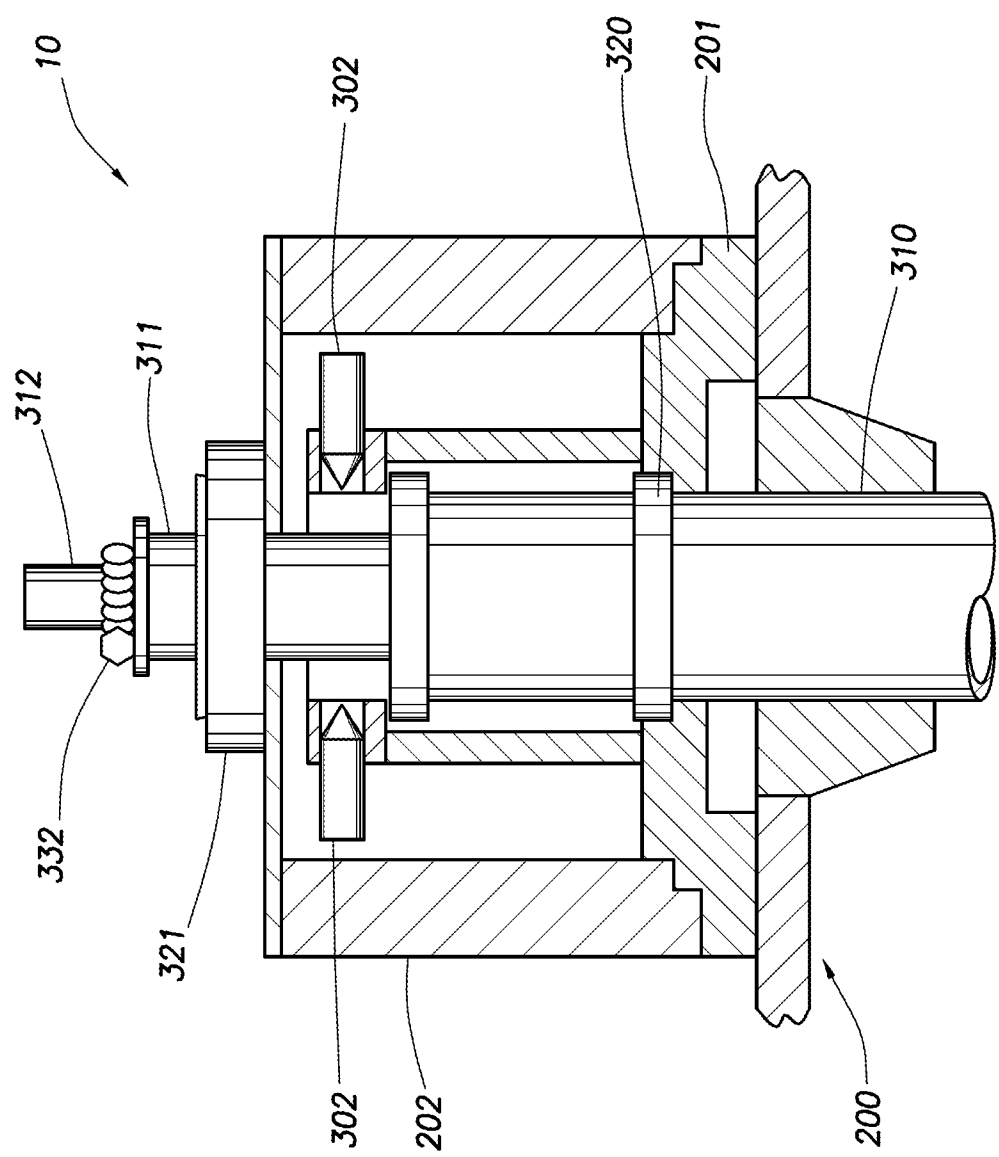


FIG. 4A

7/13

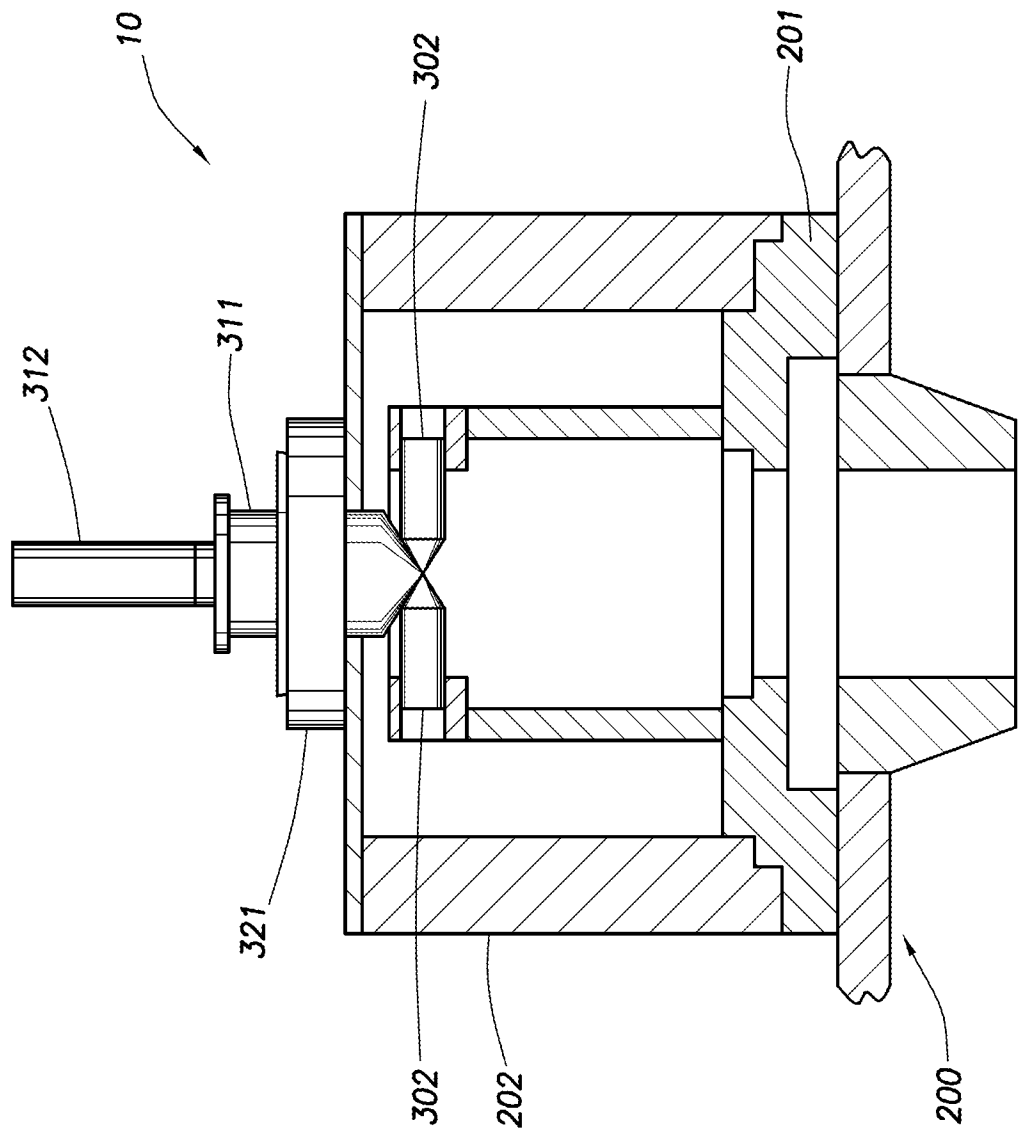


FIG.4B

8/13

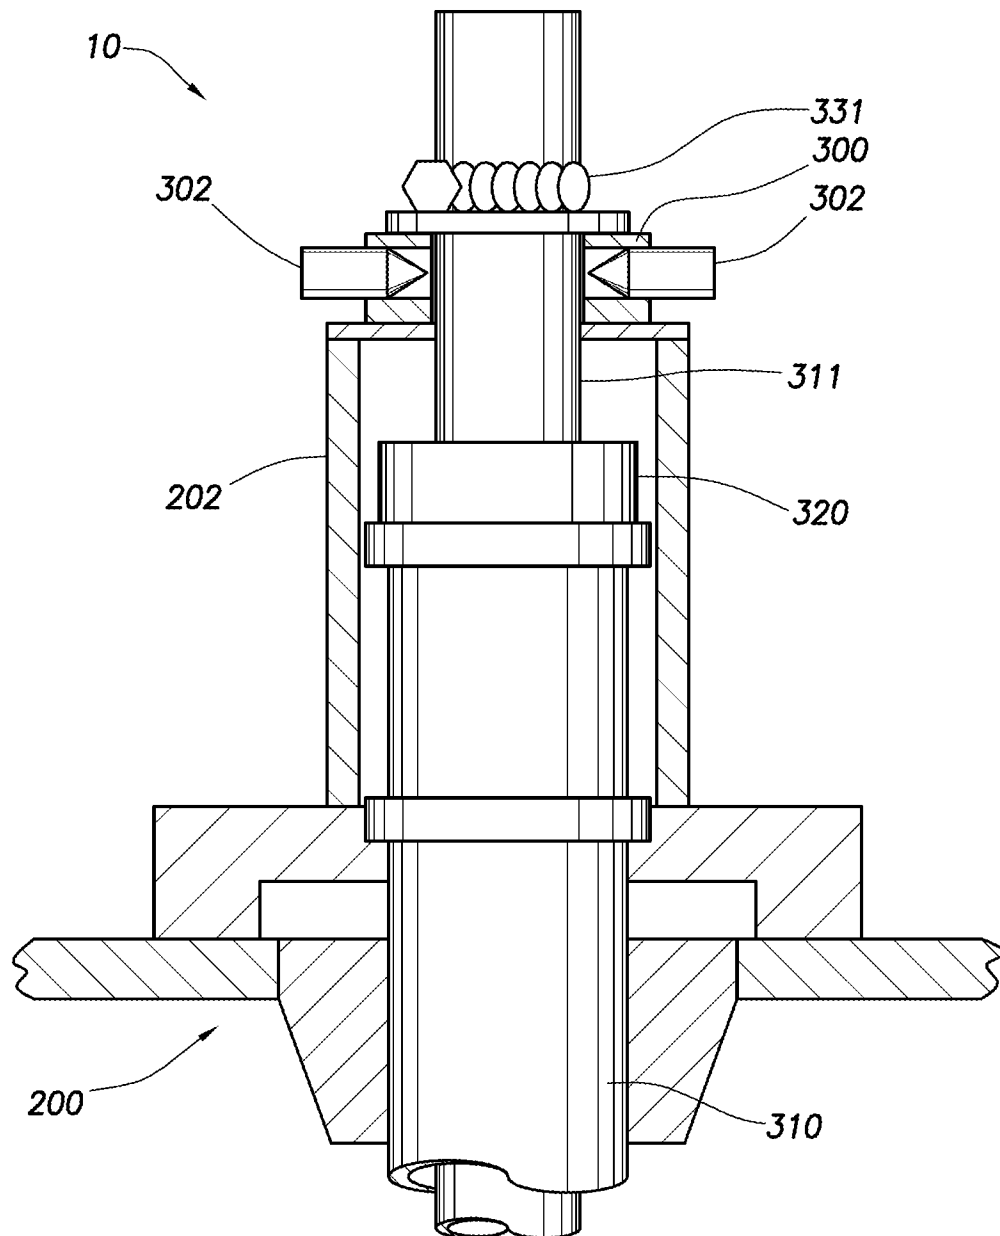


FIG.5A

9/13

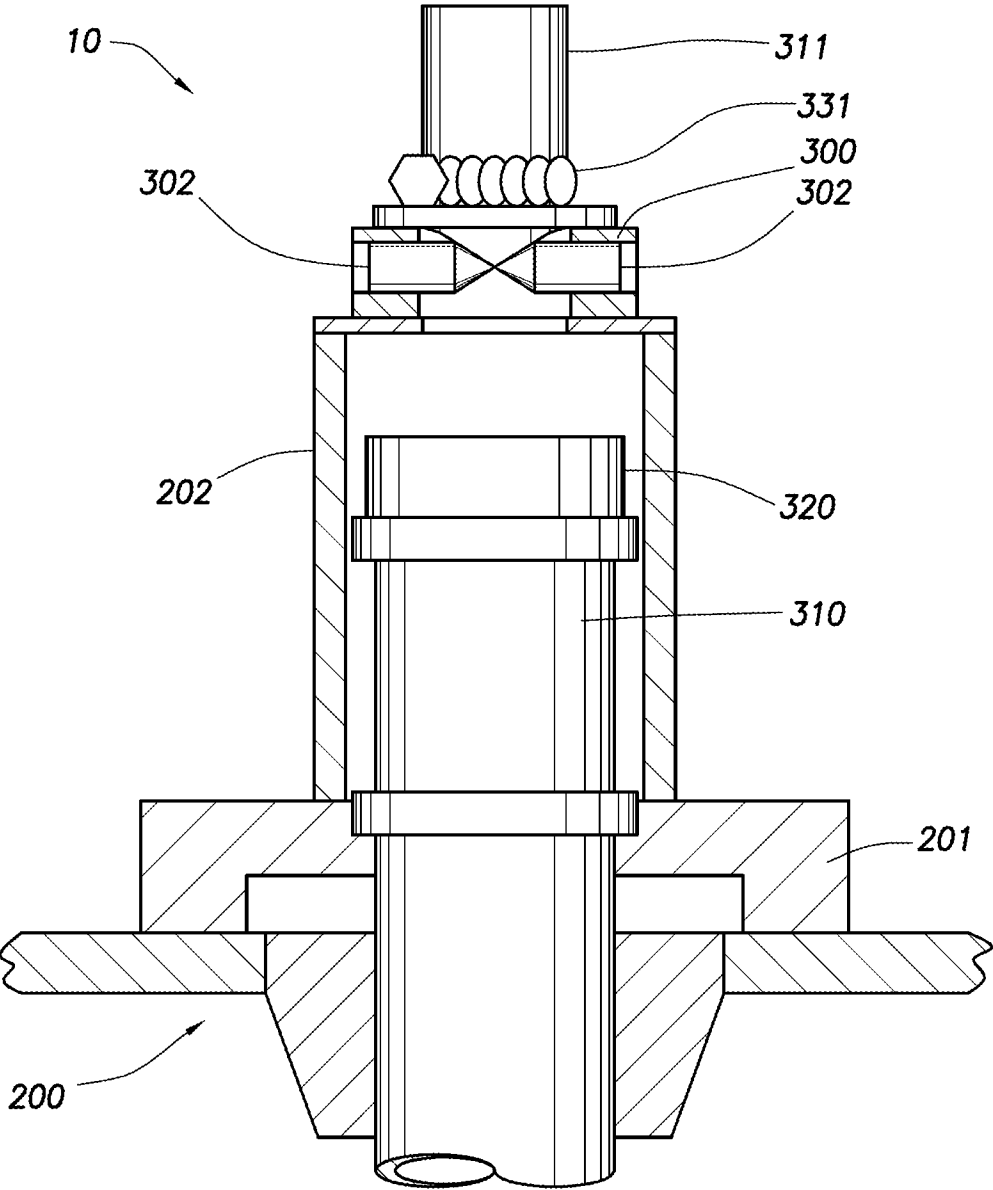


FIG.5B

10/13

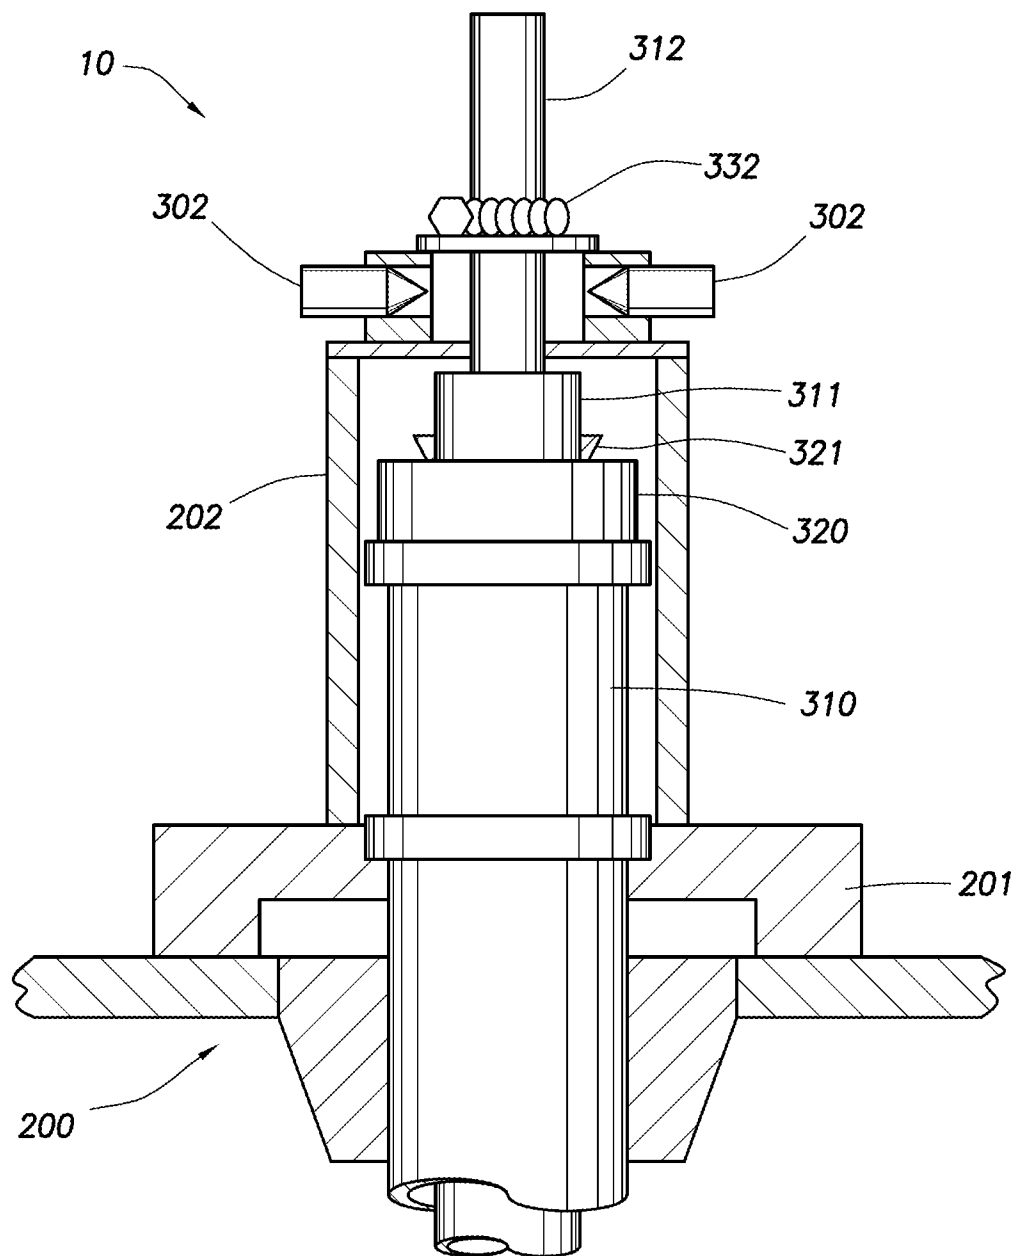


FIG.5C

11/13

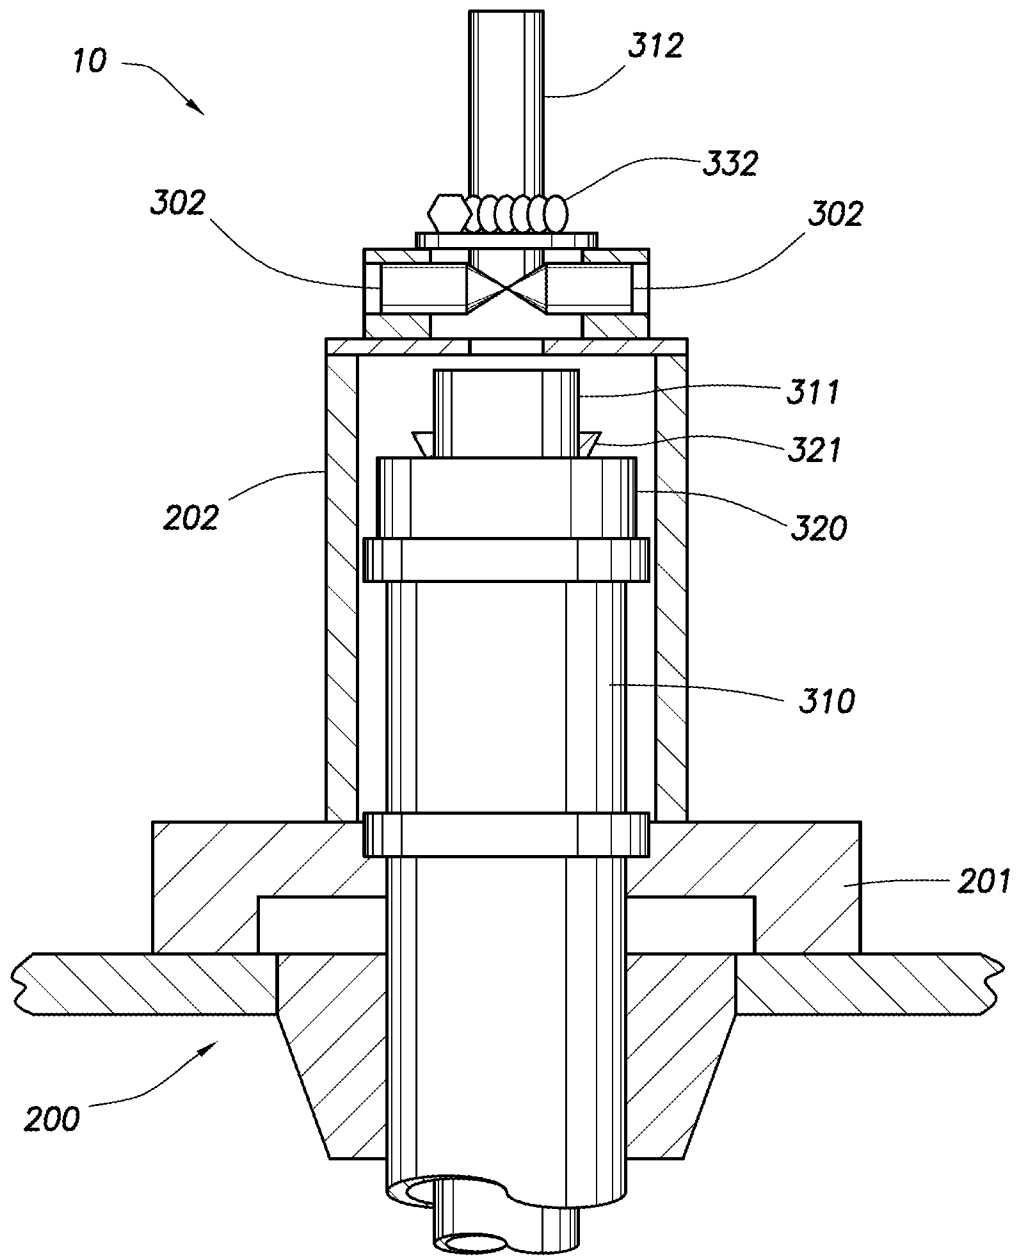


FIG.5D

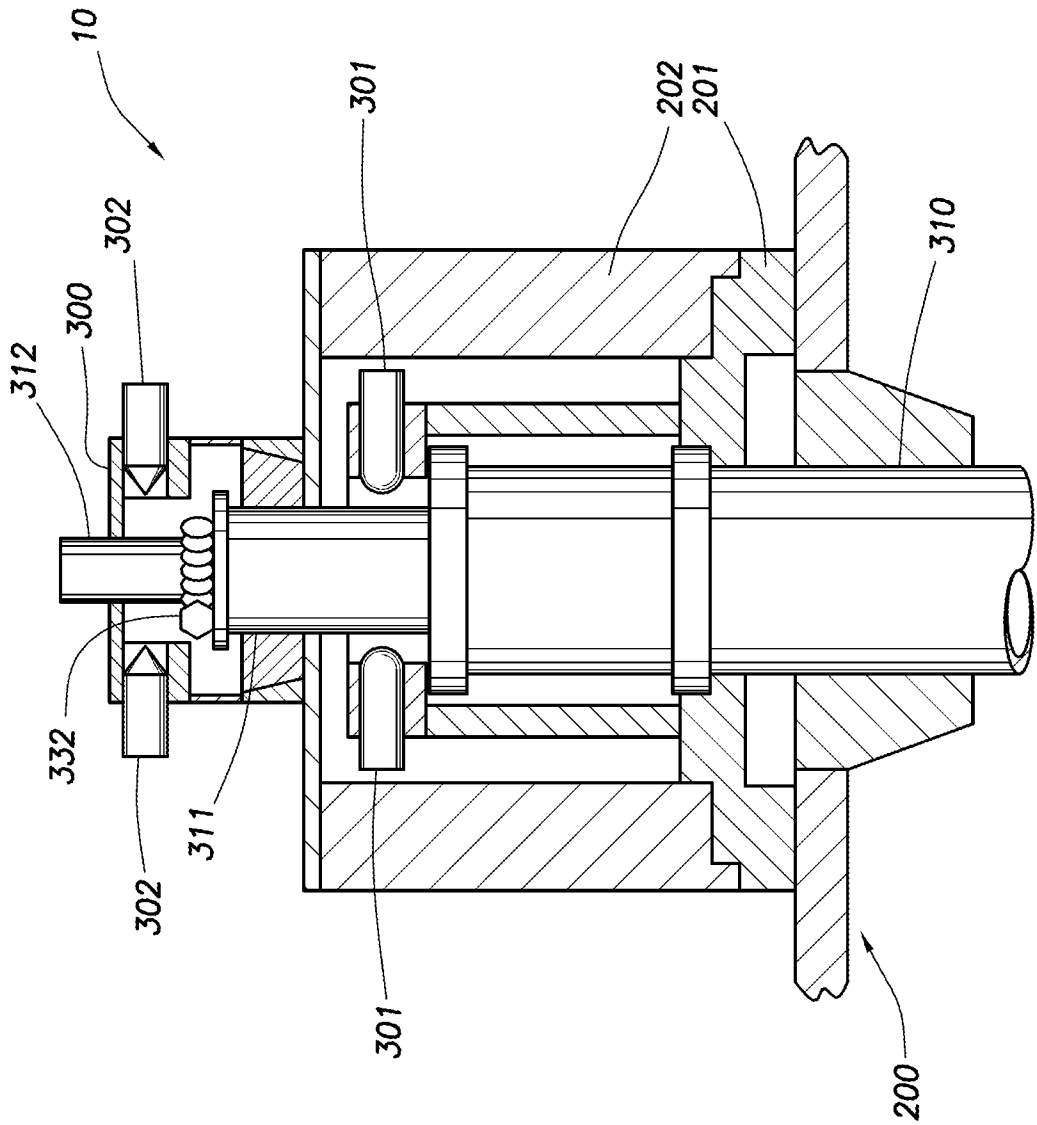


FIG.6A

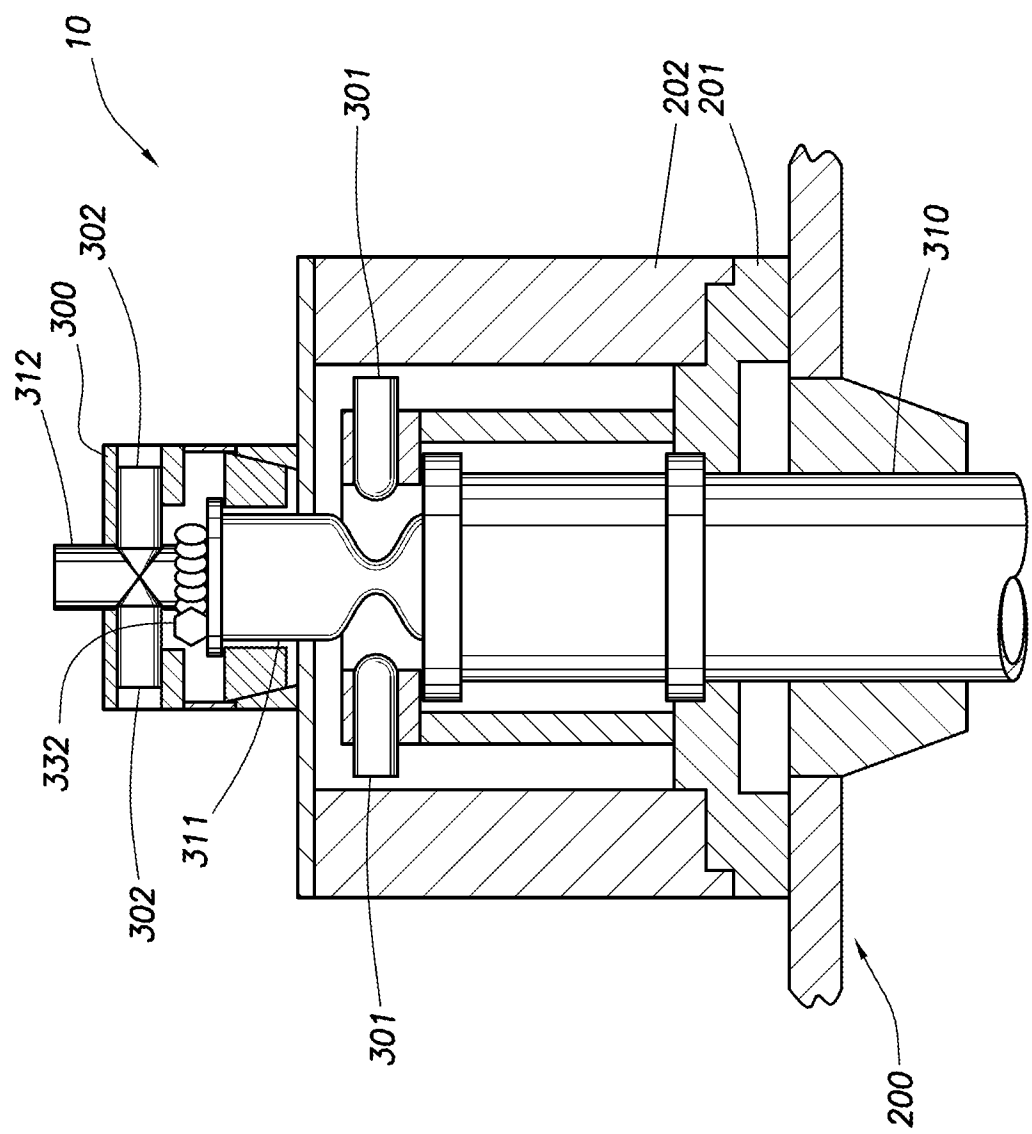


FIG.6B

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2011/048784**A. CLASSIFICATION OF SUBJECT MATTER*****E21B 33/06(2006.01)i***

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 33/06; E21B 23/02; E21B 43/14; E21B 17/06; E21B 23/00; F16L 37/14; E21B 29/04

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: tubing string, release, blowout preventer

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4886115 A (HENRY H. LEGGETT et al.) 12 December 1989 See the abstract, figures 1-5B, and claims 1-23	1-21
A	US 4175778 A (CARL W. NUNEZ et al.) 27 November 1979 See the abstract, figures 1-2, and claim 1	1-21
A	US 6186249 B1 (THOR BJORNSTAD) 13 February 2001 See the abstract, figures 1-3, and claims 1-4	1-21
A	US 6079494 A (JAMES R. LONGBOTTOM et al.) 27 June 2000 See the abstract, figures 1-7D, and claims 1-44	1-21



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

06 JANUARY 2012 (06.01.2012)

Date of mailing of the international search report

09 JANUARY 2012 (09.01.2012)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
Government Complex-Daejeon, 189 Cheongsa-ro,
Seo-gu, Daejeon 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

JUNG Sug Woo

Telephone No. 82-42-481-8443



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2011/048784

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4886115 A	12.12.1989	None	
US 4175778 A	27.11.1979	None	
US 6186249 B1	13.02.2001	GB 2335960 A WO 98-32946 A1	06.10.1999 30.07.1998
US 6079494 A	27.06.2000	AU 1998-83022 B2 AU 1998-83023 B2 CA 2246184 C CA 2246186 C CA 2521139 A1 CA 2521139 C EP 0900911 A2 EP 0900911 A3 EP 0900911 B1 EP 0900915 A2 EP 0900915 A3 EP 0900915 B1 EP 1536099 A1 US 5944109 A	11.04.2002 26.04.2001 08.01.2008 24.01.2006 03.03.1999 15.01.2008 10.03.1999 22.09.1999 30.06.2004 10.03.1999 22.09.1999 19.01.2005 01.06.2005 31.08.1999