

FORM 1

COMMONWEALTH OF AUSTRALIA

PATENTS ACT 1952

19749/88

APPLICATION FOR A STANDARD PATENT

I\We,

UNILEVER PLC

of

UNILEVER HOUSE
BLACKFRIARS
LONDON EC4
ENGLAND

597504

hereby apply for the grant of a standard patent for an invention entitled:

LIQUID FILLED PACKAGE HAVING
INTEGRAL SEALED APPLICATION BRUSH

which is described in the accompanying complete specification

Details of basic application(s):

Number of basic application	Name of Convention country in which basic application was filed	Date of basic application
77140	US	23 JUL 87

My/our address for service is care of GRIFFITH HACK & CO., Patent Attorneys, 601 St. Kilda Road, Melbourne 3004, Victoria, Australia.

DATED this 22nd day of July 1988

UNILEVER PLC

GRIFFITH HACK & CO.

TO: The Commissioner of Patents.

MO01324 22/07/88

APPLICATION ACCEPTED AND AMENDMENTS
ALLOWED 12.3.90

Forms 7 and 8

AUSTRALIAPatents Act 1952DECLARATION IN SUPPORT OF A CONVENTION OR NON-CONVENTION
APPLICATION FOR A PATENT OR PATENT OF ADDITIONName(s) of
Applicant(s)In support of the application made by UNILEVER PLC

Title

for a patent for an invention entitled
LIQUID FILLED PACKAGE HAVING INTEGRAL SEALED
APPLICATION BRUSHName(s) and
address(es)
of person(s)
making
declarationI/~~we~~, DILSHAD RAJAN
of Unilever House, Blackfriars, London EC4, England,

do solemnly and sincerely declare as follows:-

1. I am/~~we are the applicant(s) for the patent, or~~
~~am/are~~ authorised by the abovementioned applicant
to make this declaration on its behalf.
2. The basic application(s) as defined by Section 141
of the Act was/were made in the following country
or countries on the following date(s) by the
following applicant(s) namely:-

Country, filing date and name of Applicant(s) for the or each basic application	in <u>United States of America</u> on <u>23rd July 1987</u> 19__ by <u>Joseph P LA ROSA & Gina PISA</u> in _____ on _____ 19__ by _____ _____ _____
--	--
3. The said basic application(s) was/were the first
application(s) made in a Convention country in respect
of the invention the subject of the application.
4. The actual inventor(s) of the said invention is/are
Joseph P LA ROSA of 7 Cherokee Drive, Danbury, Connecticut
06811, USA and Gina PISA of 665 Warren Avenue, Thornwood,
New York 10594, USA
5. The facts upon which the applicant(s) is/~~are~~ entitled
to make this application are as follows:-
the applicant is the assignee of Chesebrough-Pond's Inc.
33 Benedict Place, P O Box 6000, Greenwich, CT 06836-6000, USA
which latter company is the assignee of the actual inventors.

Name(s) and
address(es)
of the or
each actual
inventorSee reverse
side of this
form for
guidance in
completing
this partDECLARED at London, England this 19th day of July 1988 1Rajan

(12) PATENT ABRIDGMENT (11) Document No. AU-B-19749/88
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 597504

(54) Title
LIQUID FILLED PACKAGE HAVING INTEGRAL SEALED APPLICATION BRUSH

International Patent Classification(s)
(51)⁴ A45D 034/04 A45D 040/26

(21) Application No. : 19749/88 (22) Application Date : 22.07.88

(30) Priority Data

(31) Number (32) Date (33) Country
077140 23.07.87 US UNITED STATES OF AMERICA

(43) Publication Date : 27.01.89

(44) Publication Date of Accepted Application : 31.05.90

(71) Applicant(s)
UNILEVER PLC

(72) Inventor(s)
JOSEPH P. LA ROSA

(74) Attorney or Agent
GRIFFITH HACK & CO. MELBOURNE

(56) Prior Art Documents
EP 14791
EP 209884
EP 260528

(57) Claim

1. A filled dispenser package with an integral sealed applicator brush comprising a generally flat pillow-shaped reservoir section formed from sheet plastics material having a longitudinal overlapping seam and containing the contents to be dispensed, an outlet at one end of the reservoir communicating in an airtight fluid manner with one end of a brush having an axial open bore therethrough in which the contents can flow for ultimate application to a surface by that portion of the brush which is remote from the outlet of the reservoir and a cover portion detachably connected to the reservoir to cover and seal the brush from the air, the reservoir being closed at both ends by a fin-seal.

AUSTRALIA
PATENTS ACT 1952

597504

Form 10

COMPLETE SPECIFICATION


(ORIGINAL)

FOR OFFICE USE

Short Title:

Int. Cl:

Application Number:
Lodged:

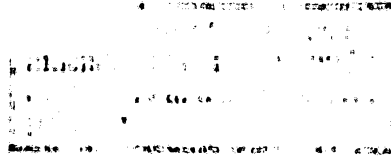

Complete Specification-Lodged:
Accepted:
Lapsed:
Published:

Priority:

Related Art:

TO BE COMPLETED BY APPLICANT

Name of Applicant:

UNILEVER PLC

Address of Applicant: UNILEVER HOUSE
BLACKFRIARS
LONDON EC4
ENGLAND

Actual Inventor:

Address for Service: GRIFFITH HACK & CO.,
601 St. Kilda Road,
Melbourne, Victoria 3004,
Australia.

Complete Specification for the invention entitled:
LIQUID FILLED PACKAGE HAVING
INTEGRAL SEALED APPLICATION BRUSH

The following statement is a full description of this invention
including the best method of performing it known to me:-

LIQUID FILLED PACKAGE HAVING
INTEGRAL, SEALED APPLICATION BRUSH

- 5 The present invention relates to a liquid filled dispenser package having an integral, sealed application brush. The package is suitable for use as a disposable sampler package intended to dispense liquid or flowable paste like products such as toothpaste therefrom in a single
- 10 application and is particularly but not exclusively suitable for containing and dispensing an air hardenable liquid such as nail varnish.

- 15 It has been proposed in DE.3122237 to provide a sampler package for e.g. nail varnish having a substantially rectangular base part having a deep drawn zone forming the reservoir for the contents, the deep drawn zone connecting with a second narrower and shallower zone in which a brush is located, the brush having a hollow stem located in the
- 20 second zone, a line of weakness in the second zone at the junction of the bristles of the brush and the stem to enabling the bristles to be uncovered, the entire base part being covered with a cover sealed thereto all round the edges.

The dispenser package of the present invention comprises a pouch having a reservoir section containing the contents to be dispensed, an outlet at one end of the reservoir in airtight fluid communication with one end of a brush
5 having an axial open bore therethrough in which the contents can flow for ultimate application to a surface by that portion of the brush which is remote from the outlet of the reservoir and a cover portion detachably connected to the pouch to cover and seal the brush from the air,
10 characterised in that the pouch comprises a generally flat pillow-shaped reservoir section formed from sheet plastics material having a longitudinal overlapping seam and fin-seals at the two opposite ends.

15 There is thus provided a single use package which can be used as a sampler package and which can be economically manufactured directly from flat sheet material on high speed production machines in a single manufacturing process. The finished package is less bulky than that
20 hitherto proposed and the absence of longitudinal fin-seals along the length of the pouch makes the package easier to pack and distribute and more attractive to the consumer. Moreover the absence of the longitudinal fin-seals makes the package more convenient to carry e.g.
25 in a consumer's personal handbag.

The package can be formed by a process including manipulating the plastic sheet material around a mandrel. The sheet material can be presented to the mandrel as two
30 sheets, which are overlapped and joined together to form two longitudinal seams but preferably a single sheet of material is employed which is overlapped and joined together with a single longitudinal seam. After having formed a tube in this way the fin-seal is formed at one

end of the tube to enclose and retain the brush in position, the reservoir of the pouch is filled and the opposite end of the pouch closed with a second fin-seal.

5 The cover portion is preferably formed integrally within a fin-seal of the pouch and connected to the pouch by a narrow neck portion communicating with the reservoir outlet and within which the brush is located. A weakening of the connection between the cover portion and the neck
10 portion can be formed by the edges of the cover portion extending substantially normal to the neck portion, the cover being readily detachable from the pouch along a line extending across the neck portion aligned with said edges of the cover portion.

15 The pouch preferably comprises a heat sealable plastics material, most conveniently a material that can be dielectrically sealed using radio frequency sealing.

20 The pouch is particularly suitable for use as a sampler package for nail varnish, for which purpose a three layer plastic laminate of ethylene-vinyl acetate, nylon and ethylene-vinyl acetate is both dielectrically sealable and has the necessary barrier properties to minimise solvent
25 permeation.

The present invention will now be further described with reference to the accompanying drawings which form a portion of the present Specification wherein:

30

Fig.1 is a perspective view showing the sampler package with the brush covered and sealed by the cover;

Fig.2 is a view similar to that of Fig.1 showing the cover removed;

5 Fig.3 is a cross-sectional view of the article shown in Fig.2 from the side taken along line 3-3; and

10 Fig.4 is a cross-sectional view of the article shown in Fig.2 taken along line 4-4 in Fig.2 in the direction of the arrows.

Referring to Fig.1 there is shown a liquid filled sampler package according to the present invention which comprises a flexible, generally flat pouch 11 having a generally flattened pillow-shaped reservoir section 12 filled with a suitable liquid or paste like flowable product 12a which may be an air hardenable liquid such as, nail polish, which is to be dispensed from the reservoir. The reservoir 12 has an outlet 13 at one end which is in airtight and fluid communication with one end of a brush 14. The outlet 13 communicates with a bore section 16 disposed in a neck portion 17 formed by a fin-seal at that end of the reservoir. The neck portion 17 narrows in width away from the reservoir to meet a flat cover portion 15, the bore section continuing into the cover portion as shown at 18. One end of the brush is secured in the bore section 16 of the neck portion of the pouch with the bristles extending into the bore 18 of the cover portion. The area of the cover portion 15 surrounding the bore 18 is effectively a continuation of the fin-seal at that end of the reservoir and seals the brush and reservoir from contact with the air. The edges 19 of the cover portion which meet the neck portion 17 extend substantially normal to the neck portion so that the junction between the cover

15
20
25
30

portion and the neck forms a weakening, the cover being readily detachable along a line extending across the neck portion aligned with those edges of the cover portion.

- 5 The opposite end of the pouch is also sealed with a fin-seal 20.

10 As shown in best detail in Fig.4, the brush 14 comprises a peripheral bristle section 14a and an axial open section 14b inside the bristle section which allows for the contents 12a to pass through the centre of the brush until it reaches the outer end of the brush which is remote from the point of attachment of the brush to the pouch 11. This internal travel of the contents within an open bore 15 in the brush aids in insulating the contents from contact with air until the material is applied which can be important if the content is an air hardenable liquid.

20 A brush of the type described above can be formed by using various procedures. One is to insert a pin-like instrument into a bundle of bristles which are then heated to fuse the bristles together around the pin which is then removed. A second means for forming such a brush is to bond the bristles to a permanent sleeve or holder for the 25 bristles with the sleeve or holder forming the conduit for the air hardenable liquid to be dispensed through the brush. Another means for forming such a brush is to take a piece of solid tubing and insert it into the bundle of fibres.

30

The package components comprising pouch 11 and cover 15 are preferably formed of a plastic which can be dielectrically sealed using radio frequency sealing technology known to persons of ordinary skill in the art.

A three layer plastic laminate of ethylene-vinyl acetate, nylon, and ethylene-vinyl acetate is preferred for good barrier properties to cut down on solvent permeability when the product contained in the pouch 11 contains a volatile solvent (such as, nail polish). The pouch 11 and cover 15 are preferably formed from a single plastic sheet which is appropriately manipulated over a mandrel and overlapped and joined to form a longitudinal seam (not shown) to yield the shape shown in the drawings with the heat sealing of the two opposed sides by fin-seals 17 and 20 yielding the structure shown in Fig.1. Alternatively two sheets of plastic material can be used which are overlapped and joined to form two longitudinal seams.

15 The brush 14 is placed in appropriate communication with the intended outlet opening 13 prior to the ultimate sealing operation and, after the sealing has occurred, the brush lies in the bore sections 16 and 18 extending across a portion of both pouch 11 and cover 15 in sealed relationship from the air. This manufacturing operation can be carried out at high rates of throughput on a form, filling and sealing machine. The finished package is substantially flat and has the minimum of projections which makes it economical to pack and distribute and is convenient for a person to carry.

Once the over 15 has been torn from the pouch, the exposed brush 14 allows a person to appropriately squeeze the reservoir section 12 of the pouch 11 to dispense the product 12a from the pouch 11 through opening 13 and channel 16 holding the brush 14. The contents thus flow into the brush and can be applied therewith as required. Thus the package is suitable for containing and dispensing e.g. nail polish or, if necessary with a different shaped brush, a toothpaste.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A filled dispenser package with an integral sealed applicator brush comprising a generally flat pillow-shaped reservoir section formed from sheet plastics material having a longitudinal overlapping seam and containing the contents to be dispensed, an outlet at one end of the reservoir communicating in an airtight fluid manner with one end of a brush having an axial open bore therethrough in which the contents can flow for ultimate application to a surface by that portion of the brush which is remote from the outlet of the reservoir and a cover portion detachably connected to the reservoir to cover and seal the brush from the air, the reservoir being closed at both ends by a fin-seal.

2. A package according to Claim 1 in which the cover portion is detachably connected to the reservoir by a narrow neck portion and is detachable from the reservoir along a line extending across the neck portion aligned with edges of the cover portion extending substantially normal to the neck portion.

3. A package according to Claim 1 or Claim 2 in which the reservoir is formed from a single sheet of plastics material.

4. A package according to Claim 3 in which the plastics material is a heat sealable plastics laminate.

5. A package according to Claim 4 in which the reservoir is filled with nail polish.

DATED THIS 14TH DAY OF FEBRUARY 1990

UNILEVER PLC

By its Patent Attorneys:

GRIFFITH HACK & CO.

Fellows Institute of Patent
Attorneys of Australia.



FIG.1

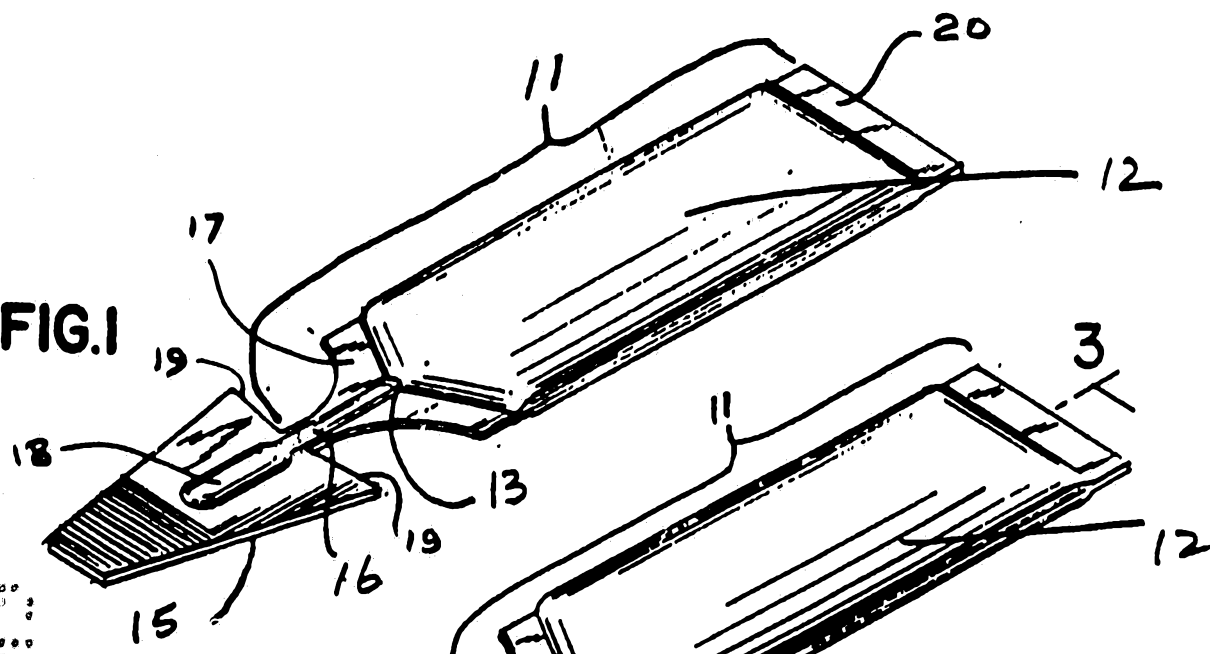


FIG.2

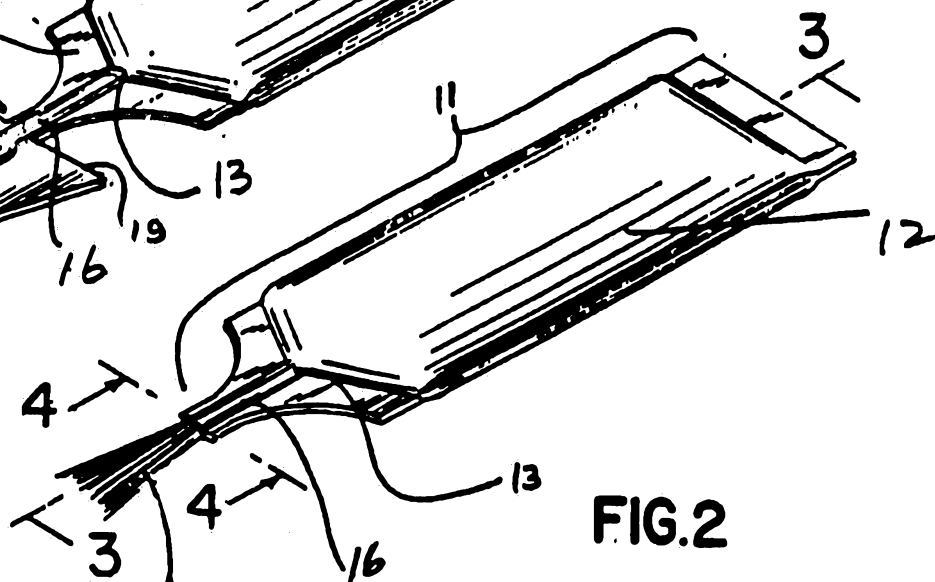


FIG.3

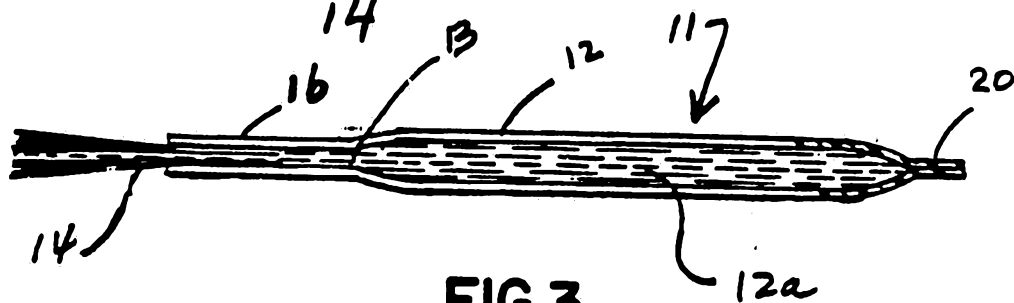


FIG.4

