



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 :  A63B 69/36		A1	(11) International Publication Number: <b>WO 00/44450</b>
			(43) International Publication Date: 3 August 2000 (03.08.00)
(21) International Application Number: PCT/US00/02163		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 28 January 2000 (28.01.00)			
(30) Priority Data: 60/117,824 29 January 1999 (29.01.99) US			
(71) Applicant (for all designated States except US): ORTHOPEDIC SYSTEMS INC. [US/US]; 30031 Ahern Avenue, Union City, CA 94587-1234 (US).			
(72) Inventors; and		Published	
(75) Inventors/Applicants (for US only): STIVERS, Keith [US/US]; Orthopedic Systems Inc., 30031 Ahern Avenue, Union City, CA 94587-1234 (US). EPSTEIN, Allan [US/US]; Orthopedic Systems Inc., 30031 Ahern Avenue, Union City, CA 94587-1234 (US). LAMB, Steve, R. [US/US]; 2210 Caballo Ranchero Court, Diablo, CA 94528 (US).		With international search report. With amended claims.	
(74) Agents: SMITH, Andrew, V. et al.; Limbach & Limbach L.L.P., 2001 Ferry Building, San Francisco, CA 94111-4262 (US).			
<p><b>(54) Title:</b> GOLF BALL FLIGHT MONITORING SYSTEM</p> <p><b>(57) Abstract</b></p> <p>A golf flight path and swing monitoring apparatus includes a first and second spaced-apart and preferably linear arrays of photosensors. The sensors each detect and discriminate when and whether a golf club head is located over them. A computer running a software program is configured for calculating the swing path, club head speed and club head angle at impact with a ball based on the monitored light signals of the sensors. Multiple temporally successive images of the ball after impact are captured for comparison preferably using a computer processor. The golf ball has a stripe around its surface that is apparent within each image notwithstanding the rotated position of the ball. Linear and circumferential extrapolations are calculated by the computer, and then the initial backspin, sidespin and three-dimensional velocity of the golf ball are calculated based on the images of the ball and the stripe, taking into account the diameters of the images and the curvature and position of the stripe, and the extrapolations. The sensors are used to trigger the shuttering of the camera and flashlamps used to capture the images. An impact image can also be captured and the relative position of the club head to the ball at impact observed and evaluated. The energy transfer efficiency of the impact between the club head and ball may also be determined.</p>			

***FOR THE PURPOSES OF INFORMATION ONLY***

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

<b>AL</b>	Albania	<b>ES</b>	Spain	<b>LS</b>	Lesotho	<b>SI</b>	Slovenia
<b>AM</b>	Armenia	<b>FI</b>	Finland	<b>LT</b>	Lithuania	<b>SK</b>	Slovakia
<b>AT</b>	Austria	<b>FR</b>	France	<b>LU</b>	Luxembourg	<b>SN</b>	Senegal
<b>AU</b>	Australia	<b>GA</b>	Gabon	<b>LV</b>	Latvia	<b>SZ</b>	Swaziland
<b>AZ</b>	Azerbaijan	<b>GB</b>	United Kingdom	<b>MC</b>	Monaco	<b>TD</b>	Chad
<b>BA</b>	Bosnia and Herzegovina	<b>GE</b>	Georgia	<b>MD</b>	Republic of Moldova	<b>TG</b>	Togo
<b>BB</b>	Barbados	<b>GH</b>	Ghana	<b>MG</b>	Madagascar	<b>TJ</b>	Tajikistan
<b>BE</b>	Belgium	<b>GN</b>	Guinea	<b>MK</b>	The former Yugoslav Republic of Macedonia	<b>TM</b>	Turkmenistan
<b>BF</b>	Burkina Faso	<b>GR</b>	Greece	<b>ML</b>	Mali	<b>TR</b>	Turkey
<b>BG</b>	Bulgaria	<b>HU</b>	Hungary	<b>MN</b>	Mongolia	<b>TT</b>	Trinidad and Tobago
<b>BJ</b>	Benin	<b>IE</b>	Ireland	<b>MR</b>	Mauritania	<b>UA</b>	Ukraine
<b>BR</b>	Brazil	<b>IL</b>	Israel	<b>MW</b>	Malawi	<b>UG</b>	Uganda
<b>BY</b>	Belarus	<b>IS</b>	Iceland	<b>MX</b>	Mexico	<b>US</b>	United States of America
<b>CA</b>	Canada	<b>IT</b>	Italy	<b>NE</b>	Niger	<b>UZ</b>	Uzbekistan
<b>CF</b>	Central African Republic	<b>JP</b>	Japan	<b>NL</b>	Netherlands	<b>VN</b>	Viet Nam
<b>CG</b>	Congo	<b>KE</b>	Kenya	<b>NO</b>	Norway	<b>YU</b>	Yugoslavia
<b>CH</b>	Switzerland	<b>KG</b>	Kyrgyzstan	<b>NZ</b>	New Zealand	<b>ZW</b>	Zimbabwe
<b>CI</b>	Côte d'Ivoire	<b>KP</b>	Democratic People's Republic of Korea	<b>PL</b>	Poland		
<b>CM</b>	Cameroon	<b>KR</b>	Republic of Korea	<b>PT</b>	Portugal		
<b>CN</b>	China	<b>KZ</b>	Kazakhstan	<b>RO</b>	Romania		
<b>CU</b>	Cuba	<b>LC</b>	Saint Lucia	<b>RU</b>	Russian Federation		
<b>CZ</b>	Czech Republic	<b>LI</b>	Liechtenstein	<b>SD</b>	Sudan		
<b>DE</b>	Germany	<b>LK</b>	Sri Lanka	<b>SE</b>	Sweden		
<b>DK</b>	Denmark	<b>LR</b>	Liberia	<b>SG</b>	Singapore		
<b>EE</b>	Estonia						

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE  
APPLICATION FOR PATENT

TITLE: Golf Ball Flight Monitoring System

ATTY DOCKET: OSI-2300

Background of the Invention

**1. Field of the Invention**

The invention relates to a method and system for monitoring the flight of a golf ball after impact with a golf club head, and particularly to computer-controlled estimation of golf ball flight, impact timing and transfer efficiency characteristics.

**2. Discussion of the Related Art**

Golf swing and golf ball flight monitoring have been used as tools for golf instruction and for testing golf equipment such as golf clubs and golf balls for many years. Such details as club head angle and club speed at impact with the ball, as well as club take-away and downswing path, are known to be crucial in determining ultimately important ball flight characteristics, such as distance, direction, backspin and ball flight curvature after impact. However, a golf swing is simply too fast in real time for clear human observation of its many subtle features.

High speed cameras and/or other sensors have been used to sense and record data about the golf swing and/or initial ball flight characteristics. The data is often displayed for slow speed analysis of a golfer's form during the swing by an instructor and/or the golfer him or herself. The position of the golfer's shoulders, hips, legs and/or head, as well as his or her arms and hands, throughout the golf swing have been captured on high speed still, video and television cameras either in a series of still frames or in videos or movies replayable in slow motion. Some such techniques are described, e.g., at U.S. patents no. 4,713,686, 5,11,410 and 5,210,603.

Besides capturing the data described above of the golfer's form, data of the path of the golf club head during the swing and initial characteristics of the golf ball in flight after impact with the club head are often used. These latter data are more often used for determining total ball flight characteristics such as distance, direction and curvature, rather than the golfer's form, and are arguably more relevant factors than form for determining the performance and effectiveness of a golfer's swing. Moreover, equipment such as the golf club and golf ball being used can be tested using these latter data, whereas the golfer's form really doesn't affect such performance of the golfer's equipment. Computer processors running software algorithms are often used for calculating or more of the above-mentioned features or others of the complete ball flight from the sensed and recorded data.

A series of United States patents assigned to Acushnet Company, makers of Titleist™ golf equipment show and describe various techniques and equipment for testing and determining golf club and golf ball performance using measured pre-impact and post-impact characteristics of the golf club and golf ball. These patents include U.S. patents no. 4,063,259, 4,136,387, 4,158,853, and 5,471,383.

For example, a pair of light source-photodetector pairs are positioned as described in the '259 patent at spaced-apart locations alongside the plane of the golfer's swing. Light emitted by each light source is received by its corresponding photodetector unless an object breaks the line of the emitted light to the detector. As the golf club head nears the golf ball in a test method according to the '259 patent, the club head swings through the line of sight of a first detector to the emitted light from its corresponding light source. When this happens a signal is sent to a camera shutter to open. Just before the club head impacts the golf ball, a second line of sight of a second detector and its corresponding light source is broken. At this time, a second signal causes a xenon lamp to flash such that the reflected light is captured by the camera whose shutter was previously opened.

Next, a microphone captures the sound of impact of the golf club head with the golf ball. This acoustic signal is amplified and used as a trigger for a second xenon lamp to flash such that a post impact image of the golf ball is captured by the camera as shutter remains open. The same amplified acoustic signal is sent through a delay and is used as a

trigger for a third xenon lamp to flash such that another image post-impact image of the golf ball in flight is captured by the camera. Shortly thereafter the shutter of the camera is closed, and a still frame having three images is stored on a film.

The use of a microphone to detect an acoustic signal requires setting up and maintaining of the microphone, as well as precise positioning and calibration separate from the optical components of the system. Also, the sound of impact of the particular golf ball and club at the test station where the microphone is being used has to be distinguished from other club-ball impacts going on in the vicinity of the microphone as well as from other sounds emanating from and around the test area. It is desired to have a golf ball flight monitoring system that does not use an acoustic photoflash trigger, and instead preferably uses all photosensitive equipment.

The film including the three temporally successive images of the golf ball reveals some useful initial characteristics of the flight of the golf ball. For example, the initial launch angle and velocity can be determined from the center of gravity positions of the successive images of the golf ball, and the known time duration between the capturing of the second and third images on the film, respectively. A mark placed on the ball prior to performing the test can be used, as described at the '259 patent, to reveal the amount of backspin initially imparted to the ball by the club head. This initial backspin is determined based on how much the mark is observed to have rotated in the plane of the film from the first to the

second and from the second to the third images of the ball captured on the film.

The small single mark described and shown in the '259 patent may not be visible if side spin causes the mark to rotate to the "dark" side of the ball, i.e., away from the camera side of the swing path. It is also difficult to distinguish the backspin from the sidespin imparted to the ball using the small single mark.

Lynch et al. were not concerned with sidespin in their description in the '259 patent because a mechanical golfer was used that presumably did not impart any sidespin to the ball at impact. Also, the mechanical golfer was presumed to hit the ball straight ahead with each test swing so that the initial direction of the golf ball was not considered as a factor in any of the tests described in the '259 patent. Moreover, it is understood that the '259 patent is drawn to equipment testing and not to analyzing swing characteristics of a golfer. Thus, such ball flight characteristics as the amount of fade or draw (or hook or slice, as the case may be) that a golfer is achieving due to the sidespin the golfer is imparting at impact, or the initial direction of the ball struck by the golfer, are not addressed in the '259 patent. It is desired to have a ball flight monitoring system and method that does determine ball flight characteristics based in part on the initial horizontal direction of the golf ball's flight and the initially imparted sidespin on the ball, in addition to the initial vertical flight conditions and backspin on the ball.

Each of the '387, '853 and '383 patents describes the use of one or more highly reflective marks on the golf ball for determining initial post-impact spin characteristics of the golf ball. Using subsequent images of the one or more spots, each of these patents sets forth some description of how to determine the complete spin characteristics of the golf ball, and not simply the backspin as discussed above with respect to the '259 patent. However, the one or more spots may again not be visible to the camera if they are rotated to the dark side of the ball when the image is captured on film.

The '387 and '853 patents disclose to position three cameras or photosensors each at ninety degree spaced locations around the golfer for detection of the mark or marks wherever they may turn around the golf ball. The three photosensors cannot be combined to achieve a single planar image of the initial flight of the ball and the data captured by the three photosensors is processed according to a complex algorithm that factors the rotationally spaced locations of the sensors. Also, the angular spacings of the sensors has to be very accurate or the calculated spin characteristics of the ball will be unreliable. It is desired to have a method and system for determining the complete initial spin characteristics of the golf ball without having to sense marks on the ball in more than a single observation plane.

The '383 patent sets forth a method for determining the total spin imparted to the golf ball using six highly reflective marks or spots on the ball and capturing their relative motions at successive temporal points

within a single film frame. Data of the relative positions of the six marks as captured on the film is converted to data directly related to the total spin on the ball using a complex algorithm as described in the '383 patent. However, any one or all of the marks could again be rotated during a real golf swing to the dark side of the ball in which case the calculations would fail because the input data would be incomplete.

Gobush et al. are again concerned in the '383 patent with equipment testing, and not golf swing analysis, and thus the mechanical golfer used in the tests described in the '383 patent never imparts an amount of sidespin to the ball sufficient to cause any of the marks to rotate to the dark side of the ball before all of the camera images are captured. It is desired to have a system and techniques for determining total spin imparted to a golf ball notwithstanding the degree of sidespin on the ball.

The field of golf swing analysis is also understood in the present invention to be lacking systems and techniques that measure and/or determine or calculate and utilize data of the golf club head prior to impact with the ball in conjunction with initial flight characteristics. Such pre-impact club head data is desired, e.g., for determining energy transfer efficiency between the club and ball, whether any sidespin or horizontal ball directional characteristics are imparted by club head angle or swing path characteristics, and for obviating the need for acoustic sensing of impact for triggering image capture. It is also recognized in the present invention that such a desired system and techniques would be useful for

golf swing analysis as well as for testing equipment, including such testing for determining the unique equipment specifications of particular golfers depending on their individual swing characteristics.

It is therefore an object of the invention to provide a golf ball flight and golf swing monitoring system and technique wherein pre-impact swing plane direction and head angle characteristics of the take away and downswing of the golf club are measured and analyzed.

It is a further object of the invention to have a system and technique for determining the total initial spin imparted to a golf ball, including backspin and sidespin, and also preferably the three-dimensional initial flight direction of the golf ball after impact with a golf club using a single frame including multiple temporally successive images.

It is also an object of the invention to have a golf ball flight and golf swing monitoring system and technique that combines pre-impact swing characteristics with initial flight conditions of the golf ball to determine transfer efficiency characteristics.

It is another object of the invention to provide a system and technique for monitoring and analyzing initial ball flight characteristics using a trigger for precisely timing the capture of temporally successive images.

### Summary of the Invention

In accord with the above objects, a first aspect of the invention includes an apparatus for monitoring characteristics of a golf swing path and/or club head angle. The apparatus includes first and second arrays of photosensors. Each array includes multiple sensors arranged at an angle to the swing path. Preferably, the sensors are arranged substantially orthogonally to the swing path. The first and second arrays are spaced-apart from each other substantially in a direction along the swing path. The sensors each receive a light signal unless the club head is located over the sensor wherein the club head blocks the light signal.

A processor running a software program is configured for calculating the swing path and/or club head angle based on the monitored light signals of the sensors of the first and second arrays operated during a golf swing. The club head speed may be calculated based on the time between the blocking of light signals for sensors in the first and second arrays. The swing path and/or club head angle may be calculated based on which sensors of one or both arrays are blocked and on the timing between the blocking of the sensors of at least one array.

In a second aspect of the invention, multiple temporally successive images of a golf ball after impact with a golf club are captured for comparison preferably using a computer processor. The golf ball has a continuous and preferably linear or substantially linear marking on its surface that at least halfway circumambulates the golf ball such that the marking is apparent within each image. The backspin imparted to the golf

ball by the impact with the golf club head is then calculable based on a comparison of the positions of the markings between two or more of the images. Preferably, a linear estimation of the markings at each image is first calculated and the backspin calculated based on the angle between the markings on the two or more images. The sidespin is preferably calculated based on the curvature of at least one of the markings.

In a third aspect of the invention, a photosensor is positioned a known distance before the impact position of the golf club with the ball. When a light signal received by the photosensor is blocked by the golf club, a trigger signal is sent to a lamp that flashes a predetermined time after receiving the trigger signal for capturing an image of the ball after impact by a camera detector. Preferably, two spaced-apart sensors are positioned before the impact position and the timing between the successive blocking of the two sensors is used to calculate the club speed prior to impact. The timing of the flash of the lamp is determined based on this timing between the successive blockings of the two sensors such that the ball is optimally positioned within the viewing range of the camera.

In a fourth aspect of the invention, multiple images of the golf ball after impact with the golf club are captured by a camera preferably as described above. The computer processor determines the diameter of two or more images of the golf ball. Based on the diameters of the two or more images, the processor determines the three-dimensional velocity of the ball including the initial horizontal direction of the flight of the ball.

Brief Description of the Drawings

Fig. 1a schematically shows a perspective view of a ball flight monitoring system including an impact zone analyzer arranged on a hitting mat.

Fig. 1b schematically shows preferred electrical connections for the system of Fig. 1a.

Fig. 1c schematically shows an overhead view of the impact zone analyzer of Fig. 1a.

Fig. 2 shows a display view illustrating golf club take away and downswing paths and club head angle determined based on data obtained from sensors of the impact zone analyzer of Fig. 1.

Fig. 3a shows a display view of multiple temporally successive images of a golf ball having a marking utilizing principles of the present invention.

Fig. 3b shows a display view of multiple temporally successive images of the golf ball having the marking of Fig. 3a, and software generated linear and circumferential extrapolations based on the images.

Fig. 4a shows an overhead view representing total golf ball flight characteristics calculated based on the images and extrapolations shown in Fig. 3b.

Fig. 4b shows a side view representing total golf ball flight characteristics calculated based on the images and extrapolations shown in Fig. 3b.

Detailed Description of the Preferred Embodiment

Fig. 1a schematically shows a perspective view of a ball flight monitoring system including an impact zone analyzer 2 arranged on a hitting mat 4. The impact zone analyzer 2 is imbedded within the hitting mat 4 such that the surface of the analyzer 2 is substantially coplanar with that of the hitting mat 4. The analyzer 2 is connected with a computer processor 6 such that data signals may be sent to the computer 6 from the analyzer 2. Although a direct connection 7 is shown between the analyzer 2 and the computer 6, the analyzer 2 may be indirectly connected to the computer 6 through ball flight capture device or system 22, described below.

The analyzer has a first row 8 and a second row 10 of sensors 12 located behind a golf ball 14 on a tee 16. Preferably, each row 8, 10 has around twelve sensors 12. The sensors 12 are preferably photosensors such as light sensitive diodes or CCDs. The golf ball 14, of course, does not have to be located on the tee 16. The analyzer 2 is preferably conventionally connected to the computer 6 such that data representing the amount of light that each sensor 12 receives throughout the duration of a test golf swing may be received by the computer 6 from electronic circuitry (not shown). The circuitry may be internal to the analyzer 2 or external to the analyzer 2 such as within the ball flight capture device 22 that is connected to the analyzer 2, or otherwise. Although not shown,

preferably an overhead lighting arrangement illuminates the hitting mat and especially the first and second rows 8 and 10 of sensors 12.

A directional arrow 18 and footprints 20 are merely shown in Fig. 1a to give the reader perspective as to where a golfer would be standing during a test swing and what direction the golf ball would generally be heading after impact with a golf club head of a golf club being swung by the golfer.

The ball flight capture device 22 is located in front of the ball 14 on the tee 16 across from where the ball 14 will be located in the air a short time after impact with the golf club head. The device 22 includes a camera 24 and one or more flash lamps, and preferably three flash lamps shown in Fig. 1a as a first flash lamp 26, a second flash lamp 28, and a third flash lamp 30. The device 22 is connected to the computer 6 and preferably to the analyzer 2, as shown. Each of the device 22 and the analyzer 2 may be connected to the computer either directly or through other connections such as from the ball capture device 22 through the analyzer 2 to the computer 6, or vice-versa.

Fig. 1b schematically shows preferred electrical connections associated with the ball flight monitoring system 100 of the present invention. The ball capture device 22 has a cable connection labeled "CPA cable" 32 which extends to the analyzer 2 on the hitting mat 4. Three cable connections to the computer 6 from the ball flight capture device 22 are labeled "cable 1" 36, "cable 2" 38 and "cable 3" 34. The computer 6 runs a software program specifically designed for processing

input data from cables 34, 36 and 38, and may be otherwise a conventional personal computer 6 including typical peripheral components as shown.

Fig. 1c schematically shows an overhead view of the impact zone analyzer 2 including the ball 14 on a tee 16 prior to impact with a golf club head from the right and a first row 8 and a second row 10 of sensors are also visible in Fig. 1c. Each of the sensors 12, the circuitry of the analyzer 2 and the software running on the computer 6 (Figs. 1a-1b) are preferably configured for distinguishing between when a golf club head is over the sensor 12 and when the golf club head is not over the sensor 12. This is done by detecting when the overhead light is shining on the sensors 12 and when a shadow is over the sensors 12 due to the presence of the club head. That is, when the golf club head is not over a particular sensor 12, then light from the overhead source is shining directly onto the sensor 12 yielding, e.g., a positive detection of the light by the particular sensor 12. When the golf club head is over a particular sensor 12, then light from the overhead source is blocked from directly shining onto the sensor 12 yielding, e.g., a negative detection of light from the overhead source by the particular sensor 12, or the detection (by not detecting the direct light) of the shadow.

The swing path of the golf club and the angle of the club head just before impact can be monitored using the first and second rows 8, 10 of sensors 12. That is, based on the temporal order and/or duration or degree of blocking of the individual sensors 12 during a test golf swing,

the take away and downswing paths and the club head angle can be monitored and displayed for evaluation. For example, if the center portion of the club head is sensed as going over the sensor 12c and then the sensor 12a, the swing is monitored as being somewhat inside out and the impact with the ball maybe somewhat off the toe of the club, whereas if the center portion of the club head is sensed as going over the sensor 12d followed by sensor 12b, then the impact would be monitored as being of the heel of the club. Also, if the sensor 12a were blocked before the sensor 12b of the second row 10 during the downswing, then the club head angle would be detected as being somewhat open at the second row 10 of sensors 12, whereas if the sensor 12b were detected as being blocked before the sensor 12a, then the club head angle would be detected as being somewhat closed at the second row 10.

Advantageously, the particular head angle and particular swing path can be determined as well, and not just the general features described in the general terms used in the above examples. The flashlamps 26, 28 and 30 and the camera 24 shown in Fig. 1a are included in the embodiment of Fig. 1d, and are discussed in detail below.

Fig. 1d illustrates an alternative ball flight monitoring system to the system including the analyzer 2 illustrated at Fig. 1a. The alternative system does not include the analyzer 2 of the system of Fig. 1a, but does include the computer 6 and the ball flight capture device 22 described above. Preferably two club sensing devices 39a and 39b for determining club head speed and for triggering or initiating a process leading to the

triggering of the camera 24 and/or the flash lamps 26, 28 and 30 is provided in this alternative embodiment.

The sensors 39a and 39b are configured to detect when the club head crosses in front of them, such as by crossing the imaginary lines L1 and L2 shown in Fig. 1d for illustrative purposes. The sensors 39a and 39b may be photo or motion sensitive or otherwise for detecting the precise time when the club crosses the imaginary lines L1 and L2. At least one of the sensors 39a or 39b is preferably used for triggering the camera 24 and lamps 26, 28 and 30. The system used input from sensors 39a and 39b in determining the club head speed by analyzing the time difference between when the imaginary lines L1 and L2 are crossed by the club head. The club speed is in turn used to estimate the time until the ball will pass into the image field of the camera 24. Using this estimated time, the system will calculate when to shutter the camera 24 and to flash the lamps 26, 28 and 30 to capture images of the ball with the camera. Alternatively, a default or average timing is used from the receipt of the trigger signal by the computer 6 and/or ball flight capture device 22 for shuttering and flashing.

In one method of use, the club speed may be determined during a calibration swing and that same determined value used for subsequent swings. Alternatively, a new club speed may be determined for each swing. In a third alternative method, an average or default club speed may be used for all test swings, in which case only one of the sensors 39a or 39b is used simply for triggering. The head angle and take away

and downswing paths that are advantageously determined in the way described above in accord with the system of Fig. 1a are not so determined in this alternative embodiment.

The alternative system illustrated at Fig. 1d may be advantageously used for golf swing evaluations at any arbitrary hitting position, such as at a typical driving range hitting mat or a grassy or sandy area. Thus, a golf ball 14 sitting on a real grassy or sandy lie, or on a tee 16, may be impacted by a golf club and the resulting ball flight evaluated using the system shown at Fig. 1d. In addition, the system of Fig. 1d is more portable for moving around a practice area or golf course.

Fig. 2 shows a display view illustrating a golf club take away path 40, a downswing path 42 and a club head angle 44 determined based on data obtained from the first and second rows 8, 10 of sensors 12 of a preferred impact zone analyzer 2 overlayed in the display, in accord with using the system shown at Fig. 1a in accord with the present invention. The take away path 40 and downswing path 42 are preferably the paths of the center of gravity of the club head as it goes back during the take away portion, and comes through during the downswing portion, respectively, of a test swing. The paths 40, 42 could also be the paths 40, 42 of another point on the club head other than the center of gravity such as a point nearer the heel or toe of the club head. The paths 40, 42 are determined based on which ones and in what order and/or for what duration the individual sensors 12 of the first and second rows 8 and 10

were blocked during the take away and downswing portions of the test swing.

The head angle 44 illustrated in the display is that of the club head at the second row 10 nearest the impact point with the ball 14. The distance between the second row 10 and the ball 14 may be closer than is represented by any of Figs. 1a-1c or 2, such that the head angle 44 at the second row 10 very nearly represents the ultimately important head angle 44 at impact. On that point, none of the distances in the figures of this application are necessarily drawn to scale.

The software may estimate the head angle at impact from the head angle at the second row and/or at the first row, and may use another estimate for the rate of closing of the head from the second row to the impact point to make the estimation. For example, although the head appears to be slightly open at the second row 10 in Fig. 2, the head 44 is likely somewhat less open at impact, depending on the skill level of the golfer performing the test swing. In practice, the second row 10 of sensors 12 is so close to the impact position that the head angle at the second row 10 of sensors 12 is at least almost exactly the head angle at impact.

Fig. 3a shows a display view of three temporally successive images 46, 48 and 50 of a golf ball 14 during flight after impact with a golf club head, wherein each golf ball image 46, 48 and 50 shows an image on the golf ball 14 of a marking 52a, 52b and 52c, respectively, in accord with the present invention. Although three images 46, 48 and 50 are shown,

two or more than three images may be captured and used for determining initial flight conditions of the ball 14. The computer 6 determines kinematic properties of the ball in flight based on these images by photogrammetry. The image capture timing is determined based on the club head speed determined by the analyzer 2, preferably from a calibration swing.

The actual marking on the ball 14 is preferably, but not necessarily, circumferentially drawn around the entire ball 14 such as to separate the ball 14 into two hemispheres like a meridian and to form a closed loop. The marking is more specifically preferably at least halfway circumambulatory of the ball 14, but need not be closed around the entire ball 14. The marking is preferably long enough that it may be within the camera view no matter what the rotational position of the ball is when its image is captured.

More than one marking may be provided. The two or more markings may be off center such that for each marking the two areas separated by the marking are not equal. The degree of equality or inequality of the two areas is however known in each case and programmed into the software running on the computer 6 of the ball flight monitor system of the present invention.

The three images of Fig. 3a are exemplary of those captured by the camera 24 of the ball capture device 22 discussed above, each due to the flashing of one of the lamps 26, 28 and 30. By comparing and contrasting two of or preferably all three of the images 46, 48 and 50

using the software running on the computer 6 and the known timing between the capturing of the images, initial ball flight characteristics such as horizontal and vertical velocity, including speed and direction, and total spin, including backspin and sidespin, can be determined. Analysis and computation by the processor running the particular software routines programmed into it in accord with the present invention can then reveal the total ball flight characteristics such as total distance and flight trajectory.

Fig. 3b shows a display view of the multiple temporally successive images 46, 48 and 50 of the golf ball 16 including the marking images 52a, 52b and 52c as shown and described with respect to Fig. 3a. In addition, Fig. 3b shows software generated linear extrapolations 54a, 54b and 54c of the marking images 52a, 52b and 52c, respectively. Also, Fig. 3b shows circumferential extrapolations 56a, 56b and 56c based on the two-dimensional captured perimeters of the images 46, 48 and 50, respectively, in accord with the present invention. A calibration routine is preferably used that allows the computer to recognize the general shape and size within predetermined ranges of the images 46, 48, 50 of the ball 14 after the images 46, 48, 50 are captured.

The linear extrapolations 54a, 54b and 54c of the marking images 52a, 52b and 52c are performed by the computer 6 from the curved marking images 52a, 52b and 52c illustrated at Figs. 3a-3b. This curvature is caused at least in part by sidespin on the ball 14 and/or the location of the ball 16 at the times each image was captured relative to

the camera exposure aperture in the vertical plane of the field of view shown at Fig. 3b, and the fact that the surface of the actual ball 14 is curved. The software takes into account each of these factors in making the linear extrapolations 54a, 54b and 54c.

Once the linear extrapolations 54a-54c are calculated, then the initial backspin on the ball is calculated by first comparing and contrasting the linear extrapolations 54a-54c. Qualitatively speaking, the initial backspin may be determined in accord with the present invention based on angular differences between the linear extrapolations 54a-54c and known time differences between the capturing of the images 46, 48 and 50.

The circumferential extrapolations 56a-56c allow the computer to determine the diameter of each image 46, 48, 50. Although the actual diameter of the ball 14 does not change, at least after the ball resumes its spherical shape after being deformed at impact, each image diameter depends on how near to the camera that the ball is when each image 46, 48, 50 is captured. For example, a larger image diameter means the ball 14 was closer to the camera when the image 46, 48 or 50 was captured. By analyzing one or more, preferably at least two or all three, of these image diameters, the computer 6 can advantageously calculate the horizontal direction that the ball 14 is initially heading in.

The curvatures of the actual markings 52a-52c is also used advantageously to determine the sidespin on the ball 14. The rotated positions of the markings 52a-52c as well as the curvatures at those

positions allows the computer 6 to precisely determine the sidespin. Advantageously, based on the sidespin so determined, the trajectory of the ball flight, especially as the ball curves from left to right, may be determined with precision. Thus, the combination of the determinations made by the computer 6 based on the images 46, 48, 50, including the extrapolations 54a-54c and 56a-56c, and the position and curvature determination of the marking images, allows the computer to factor the initial backspin and sidespin and initial vertical and horizontal velocities of the ball 14 into the calculation of the total ball flight characteristics.

Another feature may be added to the any of the above embodiments. That is, an additional image may be captured by the system. The additional image is captured at the impact timing of the club head with the ball. The additional image would include an image of the ball as well as the club head, and particularly the relationship between the position of the ball with the club head at the impact time.

The additional image may be one captured with the use of an additional flashlamp, or one of the flashlamps described above for use with one of the images captured during the ball flight may be used to capture the impact image. In the latter case, one fewer images will be captured of the ball 14 during flight. For the embodiments described above using three images, the images of the ball 14 in flight would then be two, and one skilled in the art would realize that two is enough to determine initial ball flight conditions.

The ball flight capture device 22 may be modified to capture this additional image at the time of impact. The modification may be simply to move the camera 24 so that the impact position is within the viewing range of the camera 24. The viewing range may also be widened to include the impact position. The impact timing is estimated preferably using a club head speed calculated in a calibration swing or also may be calculated during the swing at issue or using a default club head speed. After the club head passes one or both of the rows 8, 10 or one or both of the sensors 39a, 39b, the time until impact being known based on the club head speed and distance remaining until impact, the first flash is produced by one of the flashlamps 26, 28 or 30, preferably flashlamp 26, at the time of the impact and the image captured.

Advantageously, the position of the club head with respect to the ball and/or the surface of the ground at impact are captured for analysis. It may be observed from the captured image at impact whether the club head is "toe up", "toe down" or even at impact. It may also be observed whether the ball is struck at the center or nearer the toe or heel of the club head at impact. In addition, it may be observed how open or closed the face of the club is at impact, and it may also be observed what the loft of the club is at impact. It may also be observed whether the ball was impacted "thin" or "fat" from the captured image of the impact.

Fig. 4a shows an overhead view representing total golf ball flight characteristics calculated based on the images and extrapolations shown and described above, particularly with respect to Fig. 3b. Three

horizontal flight trajectories are shown in Fig. 4a that were calculated from three different test swings. The horizontal axis is the "distance" in yards and the vertical axis is the left to right distance.

As can be observed, the ball started out moving in a direction right of straightaway along flight path A, but then "drew", or moved right to left due to counterclockwise spin (using the perspective of Fig. 4a) imparted to the ball at impact. The swing that was calculated by the computer 6 based on initial flight conditions to produce flight path A, and determined in accord with the present invention, caused the ball to land about 250 yards out and only about 5 yards right of straight away. The ball traveling along flight path B started out a little less right of straight away than that for flight path A, had a similar draw, and landed about 5 yards to the left of the flight path A ball. The ball traveling along flight path C started even less right of straight away than that for flight path B, and a little more draw such that the ball was calculated to land about 15 yards left of straight away, again about 250 yards down the fairway.

Fig. 4b shows a side view representing total golf ball flight characteristics calculated based on the images and extrapolations described above, particularly with respect to Fig. 3b. The horizontal axis again shows the distance down the fairway that the ball was calculated to travel in the air. This time, the vertical axis shows the height of the golf ball as it traveled along its flight path. Again, three paths D-F are shown in Fig. 4b.

The golf swing that was calculated by the computer 6 to cause the ball to travel along flight path D was shown to rise to about 140 feet before beginning its downward ascent to land about 250 yards down the fairway. The flight paths E and F has a maximum calculated altitude for the respective balls to be 100 and 70 yards, respectively, while each ball was calculated to land around 250 yards down the fairway.

It is emphasized that the flight paths shown and described with respect to Figs. 4a and 4b are only examples to show the kinds of calculations and displays that the present invention can do. Again, the total initial spin including backspin and side spin and the total initial velocity including components in three dimensions are advantageously determined and used to calculate the flight paths of Figs. 4a and 4b. The aerodynamic lift caused by spin and aerodynamic drag may be used as inputs to figure the total flight characteristics of the ball. Other factors may be inputs for the computer to use in the calculations such as wind, air density or altitude, various club and ball parameters such as club speed and loft, ball cover hardness or durometer reading, ball core spin density, relative impact positions of the club head with the ball, weather conditions such as rain, etc. As noted, the relative impact positions and club speed can be determined in accord with the present invention.

Another parameter that may be advantageously calculated in accord with the present invention is the energy transfer efficiency of the impact of the club head with the ball. That is, the club head speed and initial velocity and spin of the ball may be determined in accord with the

present invention. Thus, the efficiency can be calculated by subtracting the energy that a ball would have if a perfectly elastic collision occurred between the club head and ball, and the actual energy that the ball is observed to have in the form of translational and rotational kinetic energy minus work done against gravity to reach the image position or positions used in the calculation. This efficiency determination can be advantageously used in consideration of the quality of the equipment, i.e., the ball and club, that are used during the test swing.

What is claimed is:

1. An apparatus for monitoring a swing path and/or a golf club head angle at or near an impact location with a golf ball during a golf swing, comprising:
  - a first array of sensors arranged at an angle to the plane of the golf swing and proximate to the impact location;
  - a second array of sensors also arranged at an angle to the swing plane and spaced apart from the first array behind the impact position along the swing path; and
  - a processor for receiving signals indicative of a temporal profile of which sensors the golf club head is over for the duration of the swing.
2. The apparatus of Claim 1, wherein said array is substantially orthogonal to said swing plane.
3. The apparatus of Claim 1, the processor further for recreating the swing path of the club head as the club head moved between the first and second arrays during the swing based on said temporal profile.
4. The apparatus of any of Claims 2 or 3, wherein the swing path includes the take away swing path as the club head moved from the first array to the second array during the swing.

5. The apparatus of any of Claims 2 or 3, wherein the swing path includes the downswing path as the club head moved from the second array to the first array towards the impact location during the swing.

6. The apparatus of any of Claims 1 or 2, the processor further for recreating the club head angle as the club head moved across the first array toward the impact location based on said received signals.

7. An apparatus for monitoring a golf club head angle at or near an impact location of the club head with a golf ball during a golf swing, comprising:

an array of sensors arranged at an angle to the plane of the golf swing; and

a processor for receiving signals indicative of a temporal profile of which sensors the golf club head is over for the duration of the swing.

8. The apparatus of Claim 7, wherein said array is substantially orthogonal to said swing path.

9. The apparatus of any of Claims 7 or 8, wherein the array is located proximate to the impact location.

10. The apparatus of any of Claims 7 or 8, the processor for recreating the club head angle as the club head was sensed over the array based on said temporal profile.

11. The apparatus of any of Claims 1 or 7, further comprising an image capture device including a camera for capturing two or more images of the golf ball after impact with the golf club head, the processor further for determining one or more dynamic parameters of the golf ball based on said two or more images and for calculating one or more flight parameters of a total flight path of said golf ball based on said one or more dynamic parameters.

12. The apparatus of Claim 11, wherein said golf ball includes a marking that is at least partially in view of the camera for any rotational position of the golf ball.

13. The apparatus of Claim 12, wherein said marking is substantially a straight line at least halfway circumambulatory of the surface of the golf ball.

14. The apparatus of Claim 12, wherein said marking is a closed loop around the surface of the golf ball.

15. The apparatus of Claim 13, wherein said marking separates substantially equal hemispheres of the golf ball.

16. The apparatus of Claim 12, wherein said marking separates substantially equal hemispheres of the golf ball.

17. The apparatus of Claim 12, wherein said processor calculates a linear extrapolation of said marking for each of said images.

18. The apparatus of Claim 17, wherein said processor calculates backspin on said ball based on a comparison of at least two of said linear extrapolations.

19. The apparatus of Claim 18, wherein said processor calculates sidespin on said ball based in part on curvatures of said marking on said images.

20. The apparatus of Claim 17, wherein said processor calculates a circumferential extrapolation of two or more of said images.

21. The apparatus of Claim 12, wherein said processor calculates sidespin on said ball based in part on curvatures of said marking on said images.

22. The apparatus of Claim 21, wherein said processor calculates a circumferential extrapolation of two or more of said images.

23. The apparatus of Claim 22, wherein said processor calculates three-dimensions of velocity based in part on a comparison of diameters of two or more of said circumferential extrapolations.

24. The apparatus of Claim 23, wherein said processor calculates sidespin based in part on curvatures of said marking on said images.

25. The apparatus of Claim 11, wherein said one or more dynamic parameters are selected from the group of dynamic parameters consisting of backspin, sidespin and three-dimensions of velocity.

26. The apparatus of Claim 11, wherein said one or more dynamic parameters are determined based on at least one of the diameters of said images, the curvatures of the markings on said images, and linear extrapolations of the markings on said images.

27. The apparatus of Claim 11, wherein said one or more dynamic parameters include at least one of three-dimensional velocity, sidespin, and backspin.

28. The apparatus of Claim 11, wherein said one or more parameters include sidespin.

29. The apparatus of Claim 11, wherein said one or more parameters include three dimensions of velocity.

30. An apparatus for determining one or more dynamic parameters of a golf ball after impact with a golf club head based on two or more images of said golf ball captured after said impact and for calculating one or more parameters of a total flight path of said golf ball based on said one or more dynamic parameters, comprising:

an image capture device including a camera for capturing two or more images of the golf ball after impact with the golf club head; and a processor connected with said image capture device, wherein said golf ball has a marking that is at least halfway circumambulatory of the surface of said golf ball such that said marking is at least partially within the view of said camera for any rotational position of said golf ball when said images are taken.

31. The apparatus of Claim 30, wherein said marking is a closed loop around the surface of the golf ball.

32. The apparatus of Claim 31, wherein said marking separates substantially equal hemispheres of the golf ball.

33. The apparatus of Claim 30, wherein said marking separates substantially equal hemispheres of the golf ball.

34. The apparatus of Claim 30, wherein said processor calculates a linear extrapolation of said marking for each of said images.

35. The apparatus of Claim 34, wherein said processor calculates backspin on said ball based on a comparison of at least two of said linear extrapolations.

36. The apparatus of Claim 35, wherein said processor calculates sidespin on said ball based in part on curvatures of said marking on said images.

37. The apparatus of Claim 30, wherein said processor calculates a circumferential extrapolation of two or more of said images.

38. The apparatus of Claim 37, wherein said processor calculates sidespin on said ball based in part on curvatures of said marking on said images.

39. The apparatus of Claim 36, wherein said processor calculates a circumferential extrapolation of two or more of said images.

40. The apparatus of Claim 39, wherein said processor calculates three-dimensions of velocity based in part on a comparison of diameters of two or more of said circumferential extrapolations.

41. The apparatus of Claim 30, wherein said processor calculates sidespin based in part on curvatures of said marking on said images.

42. The apparatus of Claim 30, wherein said one or more parameters are selected from the group of parameters consisting of backspin, sidespin and three-dimensions of velocity.

43. The apparatus of Claim 30, wherein said one or more dynamic parameters are determined based on at least one of the diameters of said images, the curvatures of the markings on said images, and linear extrapolations of the markings on said images.

44. The apparatus of Claim 30, wherein said one or more dynamic parameters include at least one of three-dimensional velocity, sidespin, and backspin.

45. The apparatus of Claim 30, wherein said one or more parameters include sidespin.

46. The apparatus of Claim 30, wherein said one or more parameters include three dimensions of velocity.

47. An apparatus for determining one or more dynamic parameters of a golf ball after impact with a golf club head based on two or more images of said golf ball captured after said impact and for calculating one or more parameters of a total flight path of said golf ball based on said one or more dynamic parameters, comprising:

an image capture device including a camera for capturing two or more images of the golf ball after impact with the golf club head; and a processor connected with said image capture device for determining and comparing diameters of said two or more images and calculating a horizontal velocity component based on said diameter determination and comparison.

48. An apparatus for determining one or more dynamic parameters of a golf ball after impact with a golf club head based on two or more images of said golf ball captured after said impact and for calculating one or more parameters of a total flight path of said golf ball based on said one or more dynamic parameters, comprising:

a first and a second sensors spaced-apart along a golf swing path for detecting a golf club head at two different points during a downswing portion of a golf swing;

an image capture device including a camera for capturing two or more images of the golf ball after impact with the golf club head; and a processor for receiving signals indicative of when the golf club is detected by each of the two sensors and estimating when the golf ball will be within a view of said camera for capturing said one or more images.

49. An apparatus for determining one or more dynamic parameters of a golf ball after impact with a golf club head based on two or more images of said golf ball captured after said impact and for calculating one or more parameters of a total flight path of said golf ball based on said one or more dynamic parameters, comprising:
  - a first and a second sensors spaced-apart along a golf swing path for detecting a golf club head at two different points during a downswing portion of a golf swing;
  - an image capture device including a camera for capturing two or more images of the golf ball after impact with the golf club head; and a processor for receiving signals indicative of when the golf club is detected by each of the two sensors, calculating the speed of the club head during the downswing, calculating the total energy of the golf ball based on said two or more images and calculating the transfer efficiency of the club head to the golf ball at impact based at least in part on said club head speed and said total energy of said golf ball.

50. The apparatus of Claim 49, wherein said total energy includes total kinetic energy from three-dimensional translational speed and total rotational energy from backspin and sidespin.

51. The apparatus of Claim 50, wherein said total energy includes work done against gravitational potential since the time of impact.

52. The apparatus of any of Claims 47-49, wherein said golf ball has a marking that is at least halfway circumambulatory of the surface of said golf ball such that said marking is at least partially within the view of said camera for any rotational position of said golf ball when said images are taken.

53. The apparatus of Claim 52, wherein said marking is substantially a straight line within the plane of the surface of the ball.

54. The apparatus of Claim 52, wherein sidespin on said golf ball is determined based on curvatures of said marking in said images.

55. The apparatus of Claim 52, wherein said processor calculates linear extrapolations of said markings in said images and determines backspin based on a comparison of said linear extrapolations.

56. The apparatus of any of Claims 30 or 47-49, wherein said apparatus also captures an image of said golf ball and said golf club at impact such that the relative orientation of said club with respect to said ball may be evaluated.

57. The apparatus of Claim 11, wherein said apparatus also captures an image of said golf ball and said golf club at impact such that the relative orientation of said club with respect to said ball may be evaluated.

58. An apparatus for determining one or more dynamic parameters of a golf ball after impact with a golf club head based on two or more images of said golf ball captured after said impact and for calculating one or more parameters of a total flight path of said golf ball based on said one or more dynamic parameters, comprising:  
an image capture device including a camera for capturing two or more images of the golf ball after impact with the golf club head; and  
a processor connected with said image capture device,  
wherein said golf ball has a marking that is at least halfway circumambulatory of the surface of said golf ball such that said marking is at least partially within the view of said camera for any rotational position of said golf ball when said images are taken, and  
wherein said processor determines one or more initial flight conditions of said ball based on an automatic determination of relative

characteristics of at least one of said marking and diameters of said images.

59. The apparatus of Claim 58, wherein said marking is a closed loop around the surface of the golf ball.

60. The apparatus of Claim 59, wherein said marking separates substantially equal hemispheres of the golf ball.

61. The apparatus of Claim 58, wherein said marking separates substantially equal hemispheres of the golf ball.

62. The apparatus of Claim 58, wherein said processor calculates a linear extrapolation of said marking for each of said images.

63. The apparatus of Claim 62, wherein said processor calculates backspin on said ball based on a comparison of at least two of said linear extrapolations.

64. The apparatus of Claim 63, wherein said processor calculates sidespin on said ball based in part on curvatures of said marking on said images.

65. The apparatus of Claim 58, wherein said processor calculates a circumferential extrapolation of two or more of said images.

66. The apparatus of Claim 65, wherein said processor calculates sidespin on said ball based in part on curvatures of said marking on said images.

67. The apparatus of Claim 64, wherein said processor calculates a circumferential extrapolation of two or more of said images.

68. The apparatus of Claim 67, wherein said processor calculates three-dimensions of velocity based in part on a comparison of diameters of two or more of said circumferential extrapolations.

69. The apparatus of Claim 58, wherein said processor calculates sidespin based in part on curvatures of said marking on said images.

70. The apparatus of Claim 58, wherein said one or more parameters are selected from the group of parameters consisting of backspin, sidespin and three-dimensions of velocity.

71. The apparatus of Claim 58, wherein said one or more dynamic parameters are determined based on at least one of the diameters of

said images, the curvatures of the markings on said images, and linear extrapolations of the markings on said images.

72. The apparatus of Claim 58, wherein said one or more dynamic parameters include at least one of three-dimensional velocity, sidespin, and backspin.

73. The apparatus of Claim 58, wherein said one or more parameters include sidespin.

74. The apparatus of Claim 58, wherein said one or more parameters include three dimensions of velocity.

75. The apparatus of Claim 58, wherein said characteristics include the relative orientations of said markings on said images.

76. The apparatus of Claim 58, wherein said characteristics include the relative sizes of the diameters of said images.

77. The apparatus of Claim 58, wherein said conditions include three-dimensional velocity of said ball.

78. The apparatus of Claim 58, wherein said conditions include sidespin of said ball.

79. The apparatus of Claim 58, wherein said conditions include backspin and sidespin of said ball.

**AMENDED CLAIMS**

[received by the International Bureau on 23 June 2000 (23.06.00) ;  
original claims 1 – 79 replaced by new claims 1 – 82 (19 pages)]

1. An apparatus for monitoring a swing path and/or a golf club head angle at or near an impact location with a golf ball during a golf swing, comprising:
  - a first array of sensors arranged at an angle to the plane of the golf swing and proximate to the impact location;
  - a second array of sensors also arranged at an angle to the swing plane and spaced apart from the first array behind the impact position along the swing path;
  - an image capture device including a camera for capturing two or more images of the golf ball after impact with the golf club head; and
  - a processor for receiving signals indicative of a temporal profile of which sensors the golf club head is over for the duration of the swing and for determining one or more dynamic parameters of the golf ball based on said two or more images and for calculating one or more flight parameters of a total flight path of said golf ball based on said one or more dynamic parameters.
2. The apparatus of Claim 1, wherein said first and second arrays include a plurality of sensors arranged substantially linearly and orthogonal to said swing plane.

3. The apparatus of any of Claims 1 or 2, the processor further for recreating the swing path of the club head as the club head moved between the first and second arrays during the swing based on said temporal profile.
4. The apparatus of Claim 3, wherein the swing path includes the take away swing path as the club head moved from the first array to the second array during the swing and the downswing path as the club head moved from the second array to the first array towards the impact location during the swing.
5. The apparatus of any of Claims 1 or 2, the processor further for recreating the club head angle as the club head moved across the first array toward the impact location based on said received signals.
6. The apparatus of Claim 5, wherein the first array includes a back sensor that is positioned just behind the substantially linearly arranged sensors in the first array along the swing path for determining the club head angle.
7. An apparatus for monitoring a golf club head angle at or near an impact location of the club head with a golf ball during a golf swing, comprising:
  - an array of sensors arranged at an angle to the plane of the golf swing;

an image capture device including a camera for capturing two or more images of the golf ball after impact with the golf club head; and a processor for receiving signals indicative of a temporal profile of which sensors the golf club head is over for the duration of the swing and for determining one or more dynamic parameters of the golf ball based on said two or more images and for calculating one or more flight parameters of a total flight path of said golf ball based on said one or more dynamic parameters.

8. The apparatus of Claim 7, wherein said array includes a plurality of sensors arranged substantially linearly and orthogonal to said swing path.

9. The apparatus of Claim 8, wherein said array further includes a back sensor behind said plurality of substantially linearly arranged sensors.

10. The apparatus of any of Claims 7-9, the processor for recreating the club head angle as the club head was sensed over the array based on said temporal profile.

11. The apparatus of any of Claims 1 or 7, wherein said golf ball includes a marking that is at least partially in view of the camera for any rotational position of the golf ball.

12. The apparatus of Claim 11, wherein said marking is substantially a straight line at least halfway circumambulatory of the surface of the golf ball.
13. The apparatus of Claim 11, wherein said marking is a closed loop around the surface of the golf ball.
14. The apparatus of Claim 13, wherein said marking separates substantially equal hemispheres of the golf ball.
15. The apparatus of Claim 12, wherein said marking separates substantially equal hemispheres of the golf ball.
16. The apparatus of Claim 12, wherein said processor automatically finds said marking and calculates a linear extrapolation of said marking for each of said images.
17. The apparatus of Claim 16, wherein said processor calculates backspin on said ball based on a comparison of at least two of said linear extrapolations.

18. The apparatus of Claim 17, wherein said processor calculates sidespin on said ball based at least in part on curvatures of said markings on said images.
19. The apparatus of Claim 16, wherein said processor automatically finds a perimeter of at least one image and calculates a circumferential extrapolation of said image.
20. The apparatus of Claim 19, wherein said processor determines diameters of said two or more images based on said circumferential extrapolations and calculates a three-dimensional velocity of said ball based in part on a comparison of said diameters.
21. The apparatus of Claim 19, wherein said processor calculates a diameter based on said circumferential extrapolation and calculates a three dimensional velocity of said ball based in part on said diameter.
22. The apparatus of Claim 12, wherein said processor automatically finds a perimeter of at least one image and calculates a circumferential extrapolation of said image.

23. The apparatus of Claim 22, wherein said processor determines diameters of said two or more images based on said circumferential extrapolations and calculates a three-dimensional velocity of said ball based in part on a comparison of said diameters.

24. The apparatus of Claim 22, wherein said processor calculates a diameter based on said circumferential extrapolation and calculates a three dimensional velocity of said ball based in part on said diameter.

25. The apparatus of Claim 12, wherein said processor calculates sidespin on said ball based in part on curvatures of said marking on said images.

26. The apparatus of Claim 25, wherein said processor calculates a circumferential extrapolation of two or more of said images.

27. The apparatus of Claim 26, wherein said processor calculates three-dimensions of velocity based in part on a comparison of diameters of two or more of said circumferential extrapolations.

28. The apparatus of Claim 27, wherein said processor calculates sidespin based in part on curvatures of said marking on said images.

29. The apparatus of Claim 11, wherein said one or more dynamic parameters are selected from the group of dynamic parameters consisting of backspin, sidespin and three-dimensional velocity.

30. The apparatus of Claim 12, wherein said one or more dynamic parameters are determined based on a diameter calculated based on an automatic circumferential extrapolation of at least one image, the curvature of the marking on at least one image, and automatic linear extrapolations of the markings on at least two images.

31. The apparatus of Claim 30, wherein said one or more dynamic parameters include at least one of three-dimensional velocity, sidespin, and backspin.

32. The apparatus of Claim 11, wherein said one or more parameters include sidespin.

33. The apparatus of Claim 11, wherein said one or more parameters include three dimensional velocity.

34. An apparatus for determining one or more dynamic parameters of a golf ball after impact with a golf club head based on two or more images

of said golf ball captured after said impact and for calculating one or more parameters of a total flight path of said golf ball based on said one or more dynamic parameters, comprising:

an image capture device including a camera for capturing two or more images of the golf ball after impact with the golf club head; and

a processor connected with said image capture device,

wherein said golf ball has a marking that is at least halfway circumambulatory of the surface of said golf ball such that said marking is at least partially within the view of said camera for any rotational position of said golf ball when said images are taken, and

wherein said processor determines one or more dynamic parameters of said ball based on an automatic determination of at least one characteristic of at least one of said marking, a three-dimensional position of one or more of said images and a diameter of one or more of said images.

35. The apparatus of Claim 34, further comprising one or more sensors for triggering the capturing of the images by the camera.

36. The apparatus of Claim 35, wherein the one or more sensors are one or more photosensors that sense the club head as the club head moves past the one or more sensors during a downswing prior to impact with the ball.

37. The apparatus of any of Claims 34 or 35, wherein said marking is a closed loop around the surface of the golf ball.

38. The apparatus of Claim 37, wherein said marking separates substantially equal hemispheres of the golf ball.

39. The apparatus of any of Claims 34 or 35, wherein said marking separates substantially equal hemispheres of the golf ball.

40. The apparatus of any of Claims 34 or 35, wherein said processor automatically finds said marking and calculates a linear extrapolation of said marking for each of said images.

41. The apparatus of Claim 40, wherein said processor calculates backspin on said ball based on a comparison of at least two of said linear extrapolations.

42. The apparatus of Claim 41, wherein said processor calculates sidespin on said ball based at least in part on curvatures of said markings on said images.

43. The apparatus of Claim 40, wherein said processor automatically finds a perimeter of at least one image and calculates a circumferential extrapolation of said image.

44. The apparatus of Claim 43, wherein said processor determines diameters of said two or more images based on said circumferential extrapolations and calculates a three-dimensional velocity of said ball based in part on a comparison of said diameters.

45. The apparatus of Claim 43, wherein said processor calculates a diameter based on said circumferential extrapolation and calculates a three dimensional velocity of said ball based in part on said diameter.

46. The apparatus of any of Claims 34 or 35, wherein said processor automatically finds a perimeter of at least one image and calculates a circumferential extrapolation of said image.

47. The apparatus of Claim 46, wherein said processor determines diameters of said two or more images based on said circumferential extrapolations and calculates a three-dimensional velocity of said ball based in part on a comparison of said diameters.

48. The apparatus of Claim 46, wherein said processor calculates a diameter based on said circumferential extrapolation and calculates a three dimensional velocity of said ball based in part on said diameter.

49. The apparatus of any of Claims 34 or 35, wherein said processor calculates sidespin on said ball based in part on curvatures of said marking on said images.

50. The apparatus of Claim 49, wherein said processor calculates a circumferential extrapolation of two or more of said images.

51. The apparatus of Claim 50, wherein said processor calculates three-dimensions of velocity based in part on a comparison of diameters of two or more of said circumferential extrapolations.

52. The apparatus of Claim 51, wherein said processor calculates sidespin based in part on curvatures of said marking on said images.

53. The apparatus of any of Claims 34 or 35, wherein said one or more dynamic parameters are selected from the group of dynamic parameters consisting of backspin, sidespin and three-dimensional velocity.

54. The apparatus of any of Claims 34 or 35, wherein said one or more dynamic parameters are determined based on a diameter calculated based on an automatic circumferential extrapolation of at least one image, the curvature of the marking on at least one image, and automatic linear extrapolations of the markings on at least two images.

55. The apparatus of Claim 54, wherein said one or more dynamic parameters include at least one of three-dimensional velocity, sidespin, and backspin.

56. The apparatus of any of Claims 34 or 35, wherein said one or more dynamic parameters include sidespin.

57. The apparatus of any of Claims 34 or 35, wherein said one or more dynamic parameters include three-dimensional velocity.

58. The apparatus of Claim 34, further comprising two sensors, said processor for receiving signals indicative of when the golf club is detected by each of the two sensors and estimating when the golf ball will be within a view of said camera for capturing said one or more images based on the received signals.

59. The apparatus of any of Claims 35-36, wherein said one or more sensors include at least two sensors, wherein said processor receives signals indicative of when the golf club is detected by each of the at least two sensors and estimates when the golf ball will be within a view of said camera for capturing said one or more images based on the received signals.

60. An apparatus for determining one or more dynamic parameters of a golf ball after impact with a golf club head based on two or more images of said golf ball captured after said impact and for calculating one or more parameters of a total flight path of said golf ball based on said one or more dynamic parameters, comprising:

an image capture device including a camera for capturing two or more images of the golf ball after impact with the golf club head; and  
a processor connected with said image capture device for automatically determining and comparing three-dimensional spatial positions of said two or more images and calculating a three-dimensional velocity based in part on said three-dimensional spatial position determination and comparison.

61. The apparatus of Claim 60, wherein said processor automatically determines circumferential extrapolations of perimeters of said images from which said three-dimensional spatial positions are determined.

62. The apparatus of Claim 60, wherein said three-dimensional spatial positions are determined based at least in part on a determination of diameters of said images.

63. The apparatus of Claim 62, wherein said processor automatically determines circumferential extrapolations of perimeters of said images from which said diameters are determined.

64. An apparatus for determining one or more dynamic parameters of a golf ball after impact with a golf club head based on one or more images of said golf ball captured after said impact and for calculating one or more parameters of a total flight path of said golf ball based on said one or more dynamic parameters, comprising:  
an image capture device including a camera for capturing one or more images of the golf ball after impact with the golf club head; and  
a processor connected with said image capture device for determining a three-dimensional spatial position of the geometric center of at least one

image and calculating a three-dimensional velocity based in part on said three-dimensional spatial position determination.

65. The apparatus of Claim 64, wherein said processor automatically determines a circumferential extrapolation of a perimeter of said image from which said three-dimensional spatial position is determined.

66. The apparatus of Claim 65, wherein said processor automatically determines the diameter of said image based on said circumferential extrapolation, and determines said three-dimensional spatial position based on said diameter determination.

67. The apparatus of any of Claims 64-66, wherein said three-dimensional velocity is also based at least in part on a timing from a timing of impact to a timing of capturing of said image.

68. The apparatus of Claim 67, wherein said three-dimensional velocity is also based on a three-dimensional spatial position of said ball at said impact location.

69. An apparatus for determining one or more dynamic parameters of a golf ball after impact with a golf club head based on two or more images

of said golf ball captured after said impact and for calculating one or more parameters of a total flight path of said golf ball based on said one or more dynamic parameters, comprising:

    a first and a second sensors spaced-apart along a golf swing path for detecting a golf club head at two different points during a downswing portion of a golf swing;

    an image capture device including a camera for capturing one or more images of the golf ball after impact with the golf club head; and

    a processor for receiving signals indicative of when the golf club is detected by each of the two sensors and estimating when the golf ball will be within a view of said camera for capturing said one or more images.

70. The apparatus of Claim 69, at least one of said sensors further for triggering the capturing of the images by the camera.

71. The apparatus of any of Claims 69 or 70, wherein the one or more sensors are one or more photosensors that sense the club head as the club head moves past the one or more sensors during a downswing prior to impact with the ball.

72. The apparatus of Claim 70, wherein said at least one of said sensors

triggers a shuttering of said camera.

73. The apparatus of any of Claims 70 or 72, wherein said at least one of

said sensor triggers a flashing of one or more flashlamps of said camera.

74. An apparatus for determining one or more dynamic parameters of a

golf ball after impact with a golf club head based on two or more images

of said golf ball captured after said impact and for calculating one or

more parameters of a total flight path of said golf ball based on said one

or more dynamic parameters, comprising:

a first and a second sensors spaced-apart along a golf swing path for detecting a golf club head at two different points during a downswing portion of a golf swing;

an image capture device including a camera for capturing two or more images of the golf ball after impact with the golf club head; and

a processor for receiving signals indicative of when the golf club is detected by each of the two sensors, calculating the speed of the club head during the downswing, calculating one or more dynamic parameters of the golf ball based on said two or more images and calculating the transfer efficiency of the club head to the golf ball at impact based at

least in part on said club head speed and said one or more dynamic parameters of said golf ball.

75. The apparatus of Claim 74, wherein said one or more dynamic parameters include three-dimensional velocity, backspin and sidespin.

76. The apparatus of Claim 74, wherein said transfer efficiency is determined relative to other transfer efficiencies determined for other impacts of other golf swings.

77. The apparatus of any of Claims 60, 64, 69 or 74, wherein said golf ball has a marking that is at least halfway circumambulatory of the surface of said golf ball such that said marking is at least partially within the view of said camera for any rotational position of said golf ball when said images are taken.

77. The apparatus of Claim 77, wherein said marking is substantially a straight line within the plane of the surface of the ball.

78. The apparatus of Claim 77, wherein sidespin on said golf ball is determined based on curvatures of said marking in said images.

79. The apparatus of Claim 77, wherein said processor automatically finds said markings and calculates linear extrapolations of said markings in said images and determines backspin based on a comparison of said linear extrapolations.

80. The apparatus of Claim 77, wherein said processor automatically determines a circumferential extrapolation of at least one image, calculates a three-dimensional spatial position from said circumferential extrapolation and determines a three-dimensional velocity based at least in part on said three-dimensional spatial position.

81. The apparatus of Claim 80, wherein said processor calculates a diameter of said at least one image from said circumferential extrapolation and calculates said three-dimensional extrapolation based in part on said diameter.

82. The apparatus of any of Claims 1, 7, 34, 60, 64, 69 or 74, wherein said apparatus also captures an image of said golf ball and said golf club at impact such that the relative orientation of said club with respect to said ball may be evaluated.

1/5

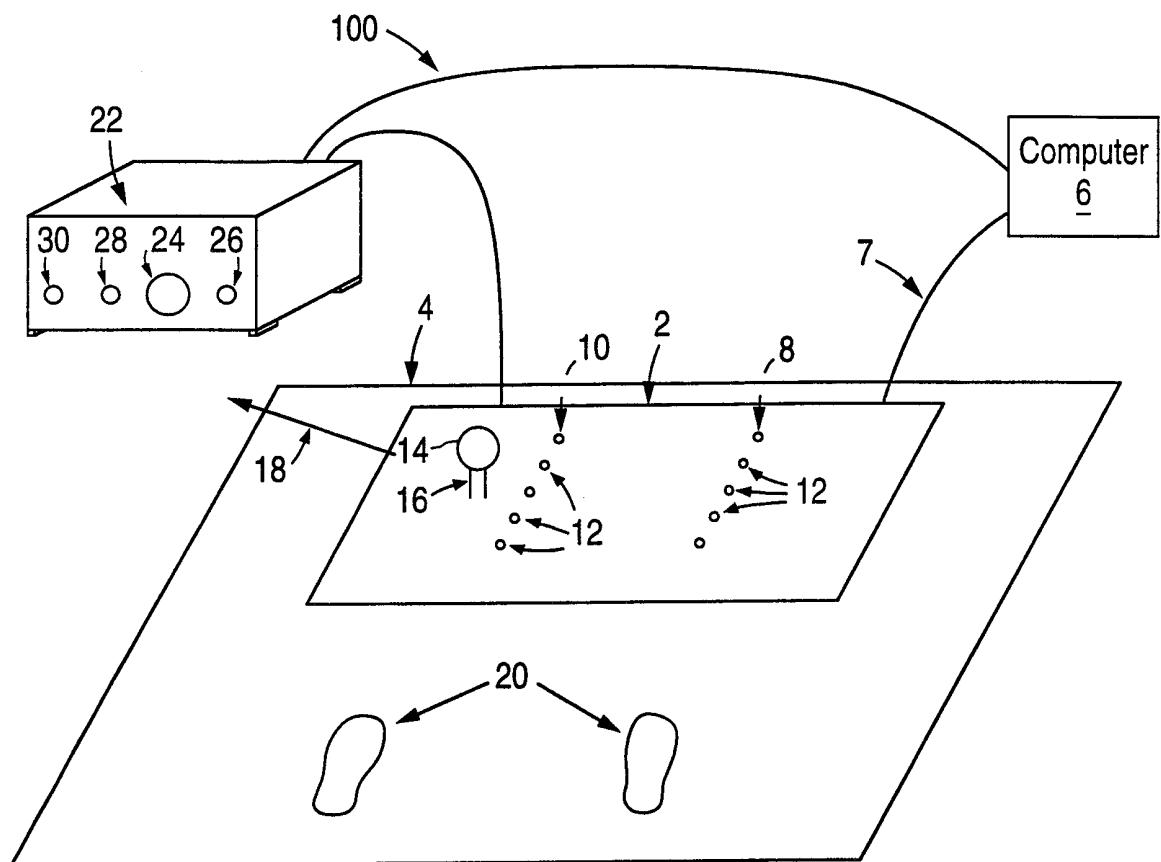


FIG. 1a

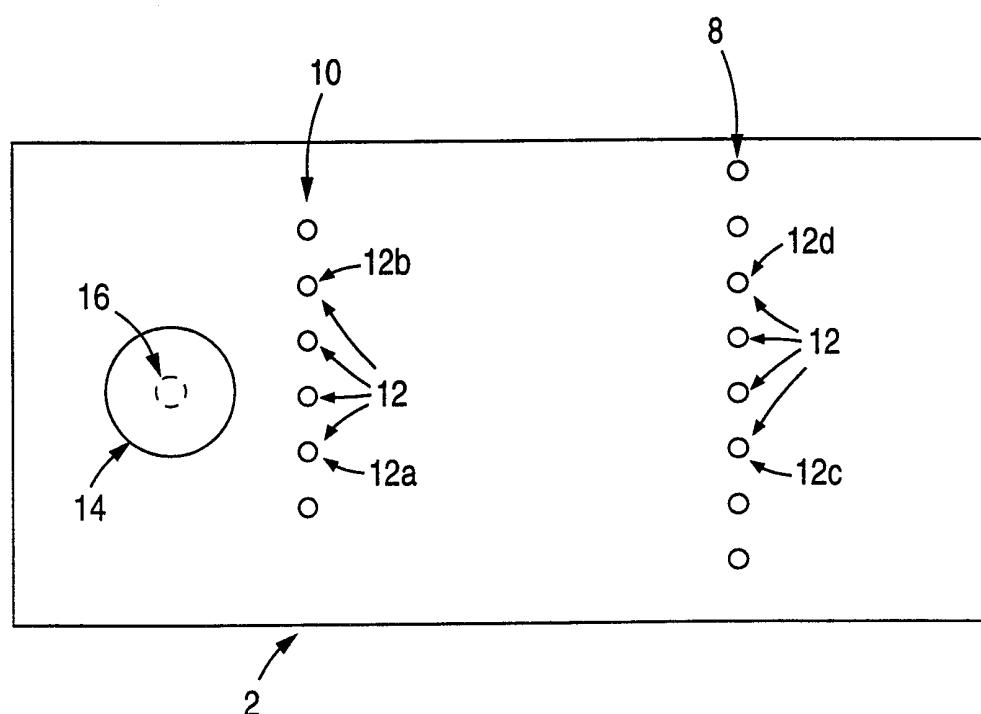
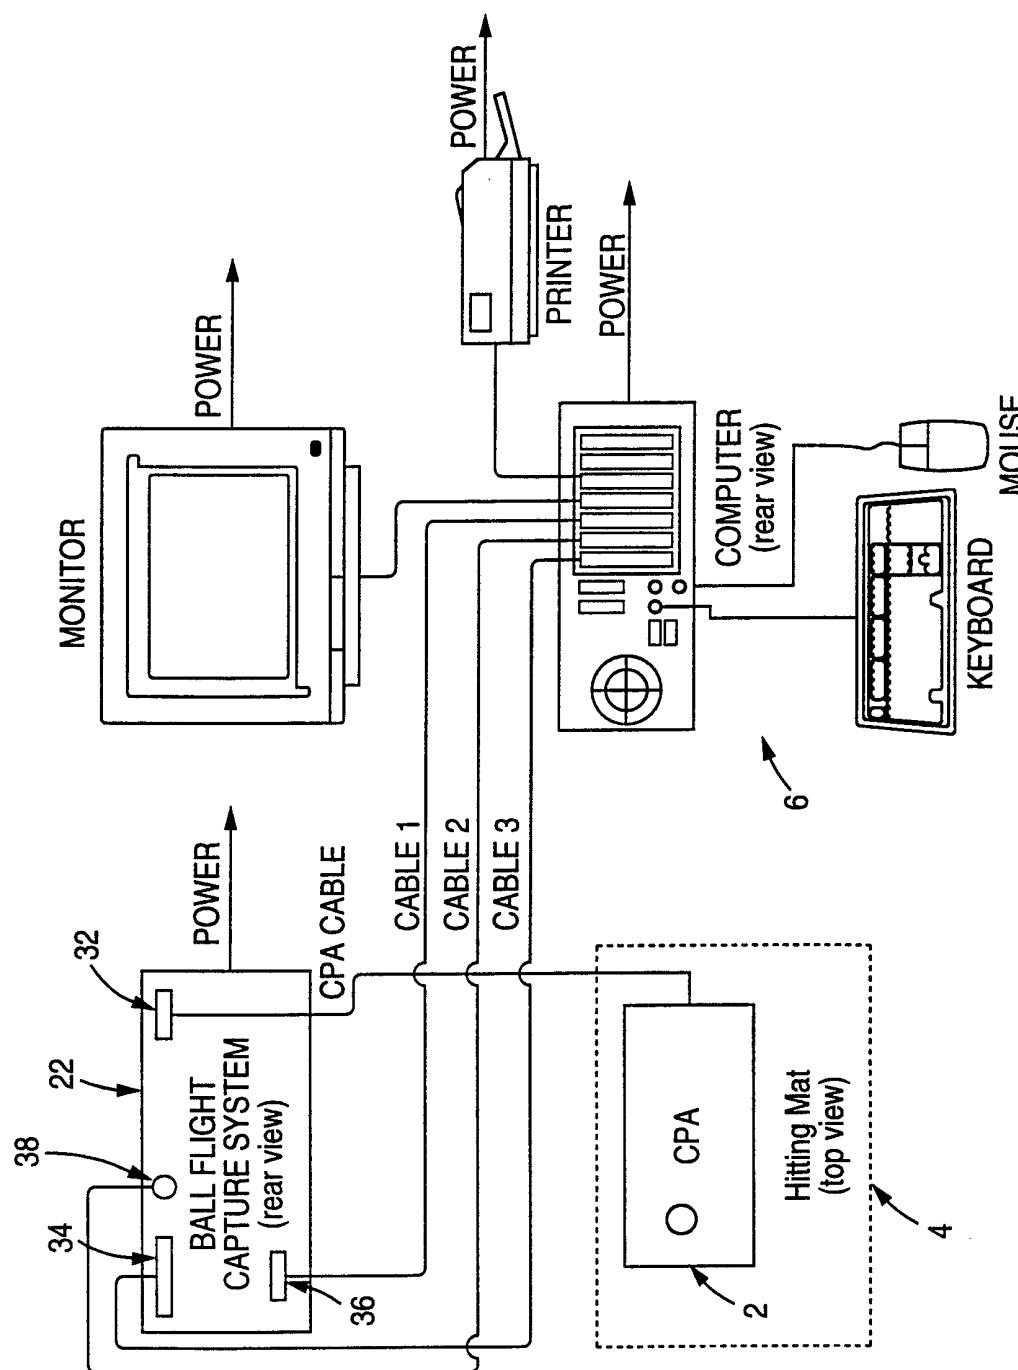
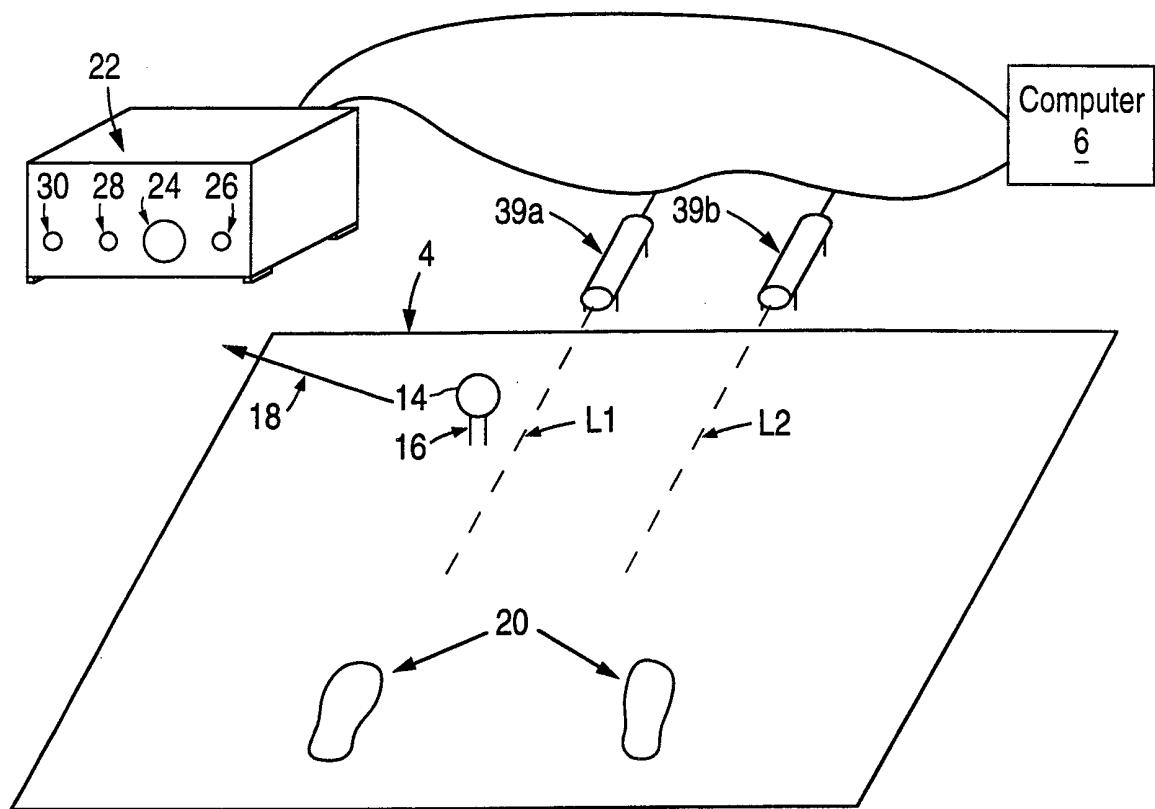
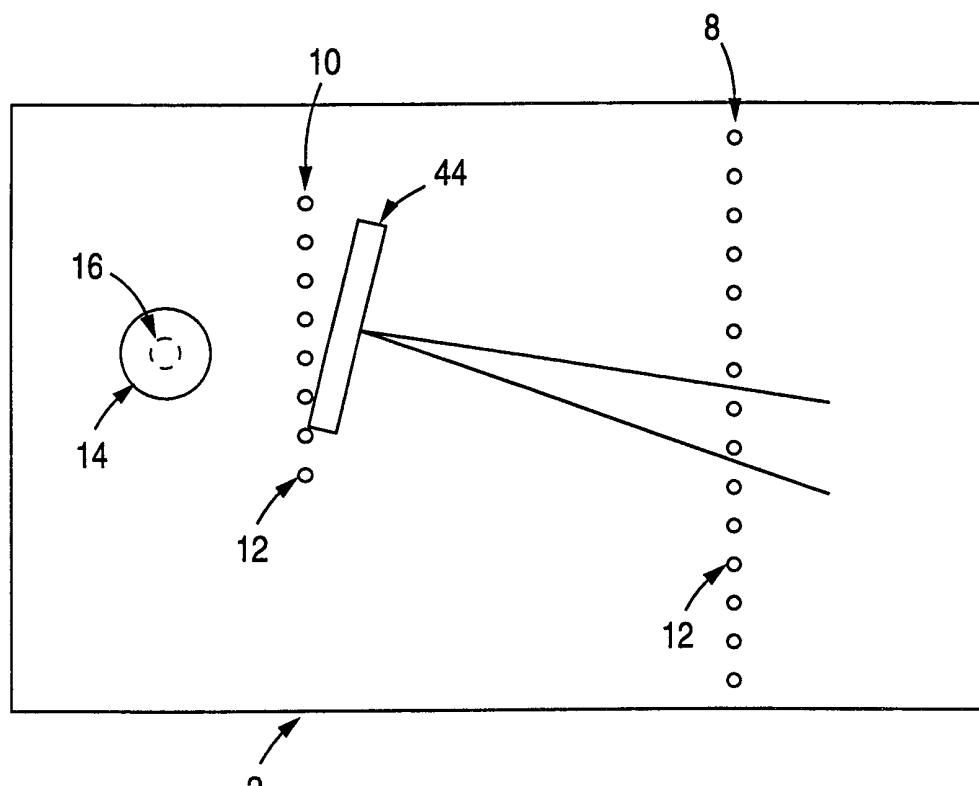




FIG. 1c

**FIG. 1b**



3/5

**FIG. 1d****FIG. 2**

4/5

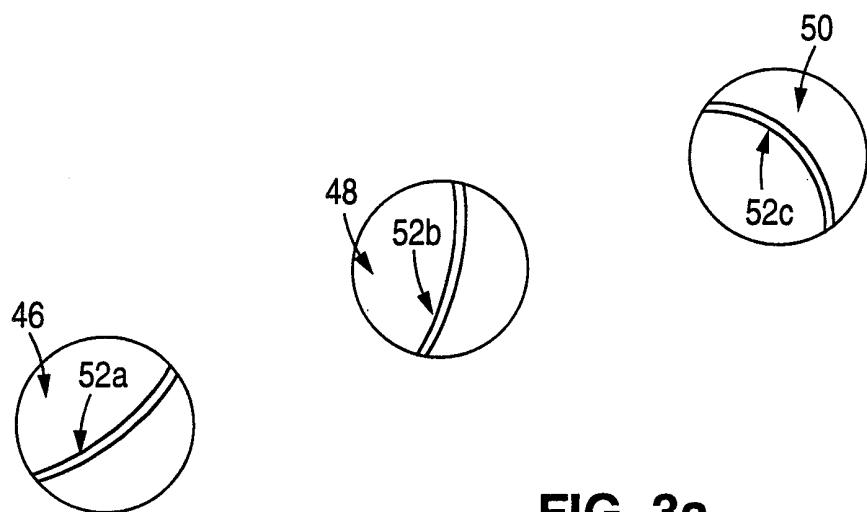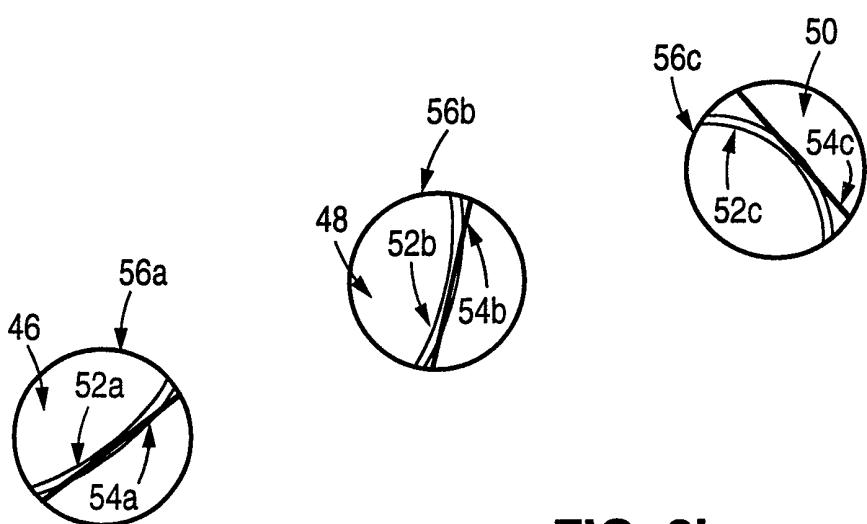**FIG. 3a****FIG. 3b**

5/5

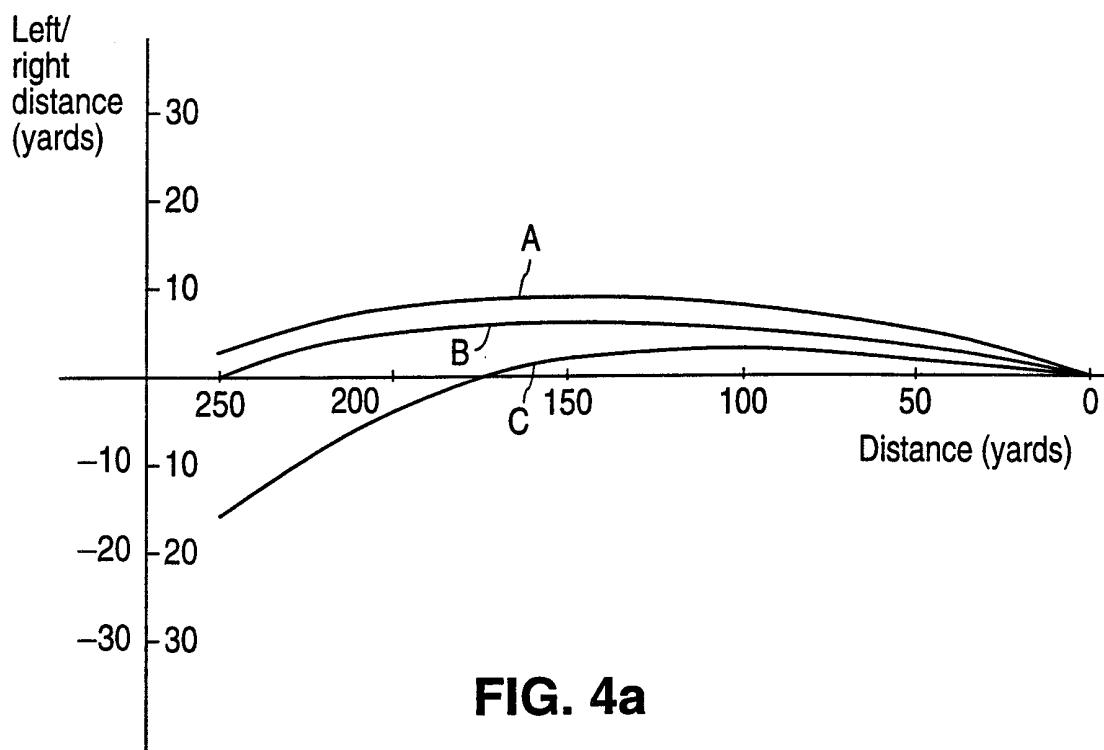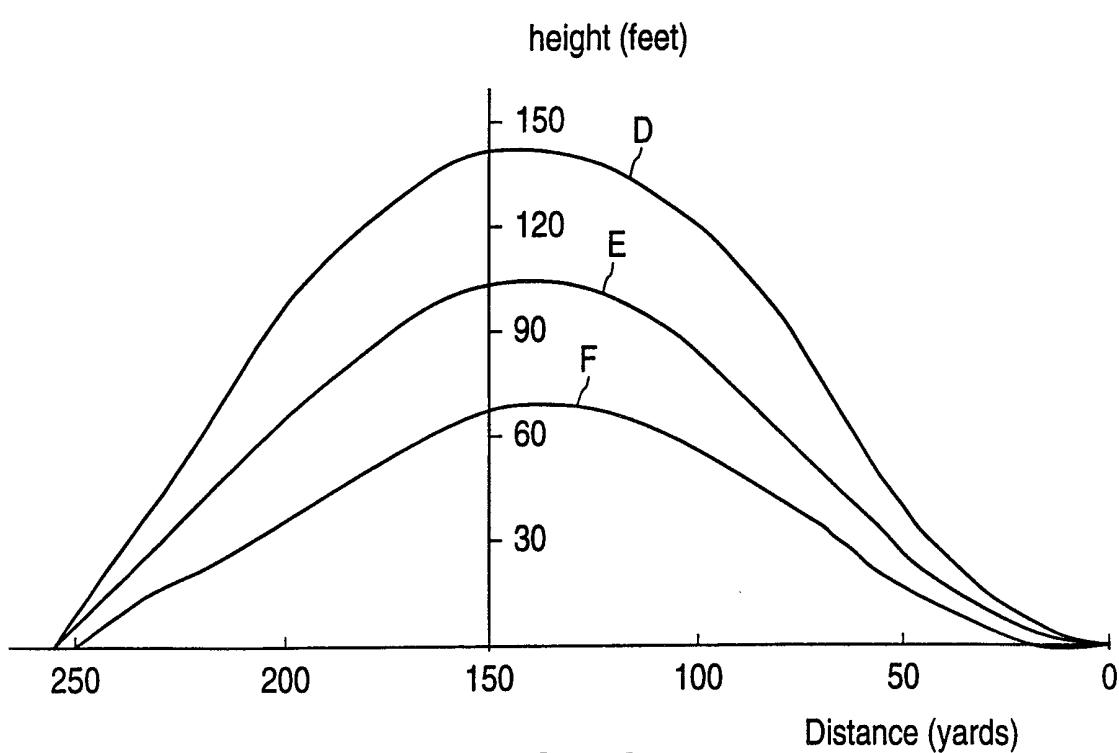**FIG. 4a****FIG. 4b**

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/02163

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A63B69/36

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A63B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 472 205 A (BOUTON) 5 December 1995 (1995-12-05) column 2, line 49 - line 56 column 3, line 2 - line 14 column 4, line 48 - line 52 column 5, line 62 -column 6, line 11 abstract; figures 1,2,6A-7A,9,13	1,2,7-9
Y	-----	11,12, 25, 27-29, 56,58, 70, 72-75, 77-79
X	EP 0 340 936 A (SYNTRONIX SYSTEMS LIMITED) 8 November 1989 (1989-11-08) abstract -----	1,7 -/-

 Further documents are listed in the continuation of box C. Patent family members are listed in annex.

## \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

30 May 2000

Date of mailing of the international search report

07/06/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Sedy, R

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/02163

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 471 383 A (DAYS CHARLES ET AL) 28 November 1995 (1995-11-28) cited in the application column 12, line 56 -column 13, line 6 column 13, line 22 - line 29 claim 1; figures 1,2,4	30,42, 44-46
Y		11,12, 25, 27-29, 48,49, 56,58, 70, 72-75, 77-79
A	---	46,47, 50,51
X	US 4 542 906 A (TAKASE ET AL.) 24 September 1985 (1985-09-24) column 1, line 50 -column 2, line 18 column 3, line 15 - line 46 column 18, line 60 - line 63 figures 1,11	1,7,9
Y	US 4 375 887 A (LYNCH ET AL.) 8 March 1983 (1983-03-08) column 2, line 55 - line 65 figure 1	48,49
A	WO 97 45177 A (SMITH EARL F) 4 December 1997 (1997-12-04) figure 8	3,6
A	US 5 614 823 A (KATAYAMA HIROYUKI ET AL.) 25 March 1997 (1997-03-25) abstract; figure 4	6,10
A	US 5 651 741 A (MASUTANI YUTAKA ET AL) 29 July 1997 (1997-07-29)  figure 5	13-16, 31-33, 52,53, 59-61
	-----	

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/02163

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 5472205	A	05-12-1995	AU WO US	2905795 A 9535141 A 5718639 A		15-01-1996 28-12-1995 17-02-1998
EP 340936	A	08-11-1989	CA AT AU AU DE JP JP JP	1281412 A 77965 T 615051 B 3325889 A 68902006 D 2013482 A 2018362 C 7008302 B		12-03-1991 15-07-1992 19-09-1991 02-11-1989 13-08-1992 17-01-1990 19-02-1996 01-02-1995
US 5471383	A	28-11-1995	CA EP JP CA DE EP JP JP AU CA EP JP JP NZ ZA	2158704 A 0704715 A 8278169 A 2123858 A 69423384 D 0625716 A 2879881 B 7043152 A 663148 B 2087485 A 0554978 A 2950450 B 6052316 A 245692 A 9300388 A		31-03-1996 03-04-1996 22-10-1996 19-11-1994 20-04-2000 23-11-1994 05-04-1999 10-02-1995 28-09-1995 23-07-1993 11-08-1993 20-09-1999 25-02-1994 26-07-1995 23-08-1993
US 4542906	A	24-09-1985	JP JP JP JP JP JP GB	59141965 A 59044280 A 1485827 C 59044282 A 63029551 B 59046982 A 2127301 A, B		14-08-1984 12-03-1984 14-03-1989 12-03-1984 14-06-1988 16-03-1984 11-04-1984
US 4375887	A	08-03-1983	AU US AU AU AU CA CA GB GB GB JP	517069 B 4063259 A 501384 B 1864976 A 4634179 A 1086347 A 1117562 A 1556862 A 1556861 A 1556863 A 52054539 A		09-07-1981 13-12-1977 21-06-1979 20-04-1978 06-09-1979 23-09-1980 02-02-1982 28-11-1979 28-11-1979 28-11-1979 04-05-1977
WO 9745177	A	04-12-1997	AU EP	3225497 A 0910443 A		05-01-1998 28-04-1999
US 5614823	A	25-03-1997	JP GB	7286838 A 2288545 A, B		31-10-1995 25-10-1995
US 5651741	A	29-07-1997	JP	9028832 A		04-02-1997