

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(10) International Publication Number

WO 2020/232550 A1

(43) International Publication Date
26 November 2020 (26.11.2020)

(51) International Patent Classification:
A42B 3/10 (2006.01) A42C 2/00 (2006.01)

(21) International Application Number:
PCT/CA2020/050683

(22) International Filing Date:
21 May 2020 (21.05.2020)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/851,080 21 May 2019 (21.05.2019) US
62/969,307 03 February 2020 (03.02.2020) US

(71) Applicant: BAUER HOCKEY LTD. [CA/CA]; 60 rue Jean-Paul Cayer, Blainville, Quebec J7C 0N9 (CA).

(72) Inventors: LAPERRIERE, Jean-francois; 413 rue du Clos-du-Marquis, Prevost, Quebec J0R 1T0 (CA). KRICK, Thierry; 51rue de Bienville, RR3, Coteau-du-Lac, Quebec J0P 1B0 (CA). DUROCHER, Jacques; 1240 avens des Melezes, Saint-Jerome, Quebec J7Z 6T9 (CA).

(74) Agent: SMART & BIGGAR LLP; 3300-1000 rue de la Gauchetiere Quest, Montreal, Quebec H3B 4W5 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: HELMETS COMPRISING ADDITIVELY-MANUFACTURED COMPONENTS

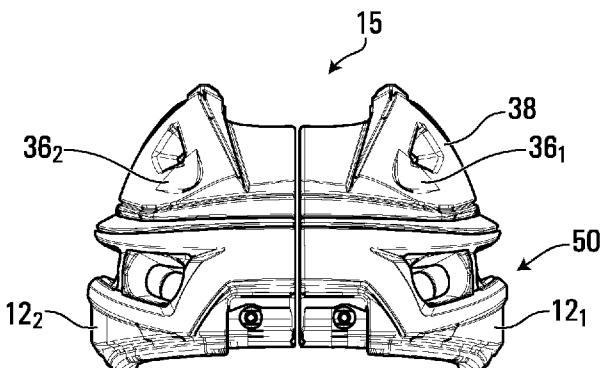


FIG. 16

(57) Abstract: A helmet comprising one or more additively-manufactured components designed to enhance performance and use of the helmet, such as: impact protection, including for managing different types of impacts; fit and comfort; adjustability; and/or other aspects of the helmet. Methods of additively-manufacturing components for such helmets are also provided, including methods involving expandable materials and the expansion of post-additively manufactured expandable components.

Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*

HELMETS COMPRISING ADDITIVELY-MANUFACTURED COMPONENTS

CROSS-REFERENCE TO RELATED APPLICATIONS

5

This application claims the benefit of United States Provisional Patent Application No. 62/851,080 filed May 21, 2019 and United States Provisional Patent Application No. 62/969,307 filed February 3, 2020, the entire contents of which are incorporated by reference herein.

10

FIELD

This disclosure relates generally to helmets (e.g., for playing hockey, lacrosse or other sports, etc.) and, more particularly, to helmets including components made by additive manufacturing.

15

BACKGROUND

Helmets are worn in sports and other activities (e.g., motorcycling, industrial work, military activities, etc.) to protect their wearers against head injuries. To that end, 20 helmets typically comprise a rigid outer shell and inner padding to absorb energy when impacted.

For example, in hockey, a player wears a helmet to protect against head injuries from impacts that occur during a game.

25

Hockey helmets are often desired to be lightweight and have various properties, such as strength, impact resistance, linear and rotational impact protection, breathability, compactness, comfort, etc., which can sometimes be conflicting, require tradeoffs, or not be readily feasible, for cost, material limitations, manufacturability, and/or other 30 reasons. Similar issues often arise in other sports, such as lacrosse.

For these and other reasons, there is a need to improve manufacturability, performance and use of helmets in aspects such as impact protection, fit and comfort and adjustability.

5

SUMMARY

According to various aspects, this disclosure relates to a helmet comprising one or more additively-manufactured components designed to enhance performance and use of the helmet, such as: impact protection, including for managing different types of impacts; fit 10 and comfort; adjustability; and/or other aspects of the helmet.

For example, according to one aspect, this disclosure relates to a helmet comprising: a shell comprising shell members movable relative to one another; a liner disposed within the shell; and an adjustment system operable to adjust a fit of the helmet on a user's head by moving the shell members relative to one another, wherein: the helmet comprises an additively-manufactured component; and at least part of the additively-manufactured component moves when the adjustment system is operated to adjust the fit of the helmet.

20 According to another aspect, this disclosure relates to a helmet comprising: a shell; and a liner disposed within the shell, wherein: the helmet comprises an additively-manufactured component; at least part of the additively-manufactured component is disposed in a lateral side portion of the helmet; and a thickness of the additively-manufactured component at the lateral side portion of the helmet is no more than 22 25 mm.

According to another aspect, this disclosure relates to a helmet comprising: a shell; and a liner disposed within the shell, wherein: the helmet comprises an additively-manufactured component comprising a plurality of distinct zones structurally different 30 from one another.

According to another aspect, this disclosure relates to a helmet comprising: a shell; and a liner disposed within the shell, wherein: the helmet comprises an additively-manufactured component; a first portion of the additively-manufactured component is configured to protect more against linear impact components than rotational impact components; and a second part of the additively-manufactured component is configured to protect more against rotational impact components than linear impact components.

According to another aspect, this disclosure relates to a helmet comprising: a shell; and a liner disposed within the shell, wherein: the helmet comprises an additively-manufactured component; a first portion of the additively-manufactured component is configured to protect more against higher-energy impacts than lower-energy impacts; and a second part of the additively-manufactured component is configured to protect more against lower-energy impacts than higher-energy impacts.

15 According to another aspect, this disclosure relates to a helmet comprising: a shell; and a liner disposed within the shell, wherein the helmet comprises a plurality of additively-manufactured components with different functions additively-manufactured integrally with one another.

20 According to another aspect, this disclosure relates to a helmet comprising: a shell; and a liner disposed within the shell, wherein the helmet comprises an additively-manufactured component and a non-additively-manufactured component received by the additively-manufactured component.

25 According to another aspect, this disclosure relates to a helmet comprising: a shell; and a liner disposed within the shell, wherein the helmet comprises an additively-manufactured component and a sensor associated with the additively-manufactured component.

30 According to another aspect, this disclosure relates to a method of making a helmet, the helmet comprising: a shell including shell members movable relative to one another; a

liner disposed within the shell; and an adjustment system operable to adjust a fit of the helmet on a user's head by moving the shell members relative to one another, the method comprising: providing feedstock; and additively manufacturing a component of the helmet using the feedstock.

5

According to another aspect, this disclosure relates to a method of making a helmet, the helmet comprising a shell and a liner disposed within the shell, the method comprising: providing feedstock; and additively manufacturing a component of the helmet using the feedstock, wherein at least part of the additively-manufactured component is disposed 10 in a lateral side portion of the helmet; and a thickness of the additively-manufactured component at the lateral side portion of the helmet is no more than 22 mm.

According to another aspect, this disclosure relates to a method of making a helmet, the helmet comprising a shell and a liner disposed within the shell, the method comprising: 15 providing feedstock; and additively manufacturing a component of the helmet using the feedstock, wherein the additively-manufactured component comprises a plurality of distinct zones structurally different from one another.

According to another aspect, this disclosure relates to a method of making a helmet, the 20 helmet comprising a shell and a liner disposed within the shell, the method comprising: providing feedstock; and additively manufacturing a component of the helmet using the feedstock, wherein: a first part of the additively-manufactured component is configured to protect more against linear impact components than rotational impact components; and a second part of the additively-manufactured component is configured to protect 25 more against rotational impact components than linear impact components.

According to another aspect, this disclosure relates to a method of making a helmet, the helmet comprising a shell and a liner disposed within the shell, the method comprising: providing feedstock; and additively manufacturing a component of the helmet using the 30 feedstock, wherein: a first part of the additively-manufactured component is configured to protect more against higher-energy impacts than lower-energy impacts; and a second

part of the additively-manufactured component is configured to protect more against lower-energy impacts than higher-energy impacts.

According to another aspect, this disclosure relates to a method of making a helmet, the 5 helmet comprising a shell and a liner disposed within the shell, the method comprising: providing feedstock; and additively manufacturing a plurality of components of the helmet that have different functions integrally with one another, using the feedstock.

According to another aspect, this disclosure relates to a helmet comprising: a shell; and 10 a liner disposed within the shell, wherein the liner comprises an additively-manufactured component and a non-additively-manufactured component.

According to another aspect, this disclosure relates to a helmet comprising: a shell; and a liner disposed within the shell, wherein the liner comprises an additively-manufactured 15 component having formed therein an air channel.

According to another aspect, this disclosure relates to a helmet comprising: a shell; and a liner disposed within the shell, wherein the liner comprises an additively-manufactured component and a liquid crystal elastomer component.

20 According to another aspect, this disclosure relates to a component for a helmet, the component comprising a 3D-printed portion, the component including expandable material expanded to define the component.

25 According to another aspect, this disclosure relates to a helmet comprising a component according to the above aspect.

According to another aspect, this disclosure relates to a component for a helmet, the component comprising a 3D-printed portion, the component including expandable 30 material expanded from an initial shape to an expanded shape that is a scaled-up version of the initial shape.

According to another aspect, this disclosure relates to a method of making a component of a helmet, the method comprising: providing expandable material; 3D printing a 3D-printed portion of the component; and expanding the expandable material to define the component.

According to another aspect, this disclosure relates to a helmet comprising a component made by the method according to the above aspect.

According to another aspect, this disclosure relates to a component for a helmet, the component comprising 3D-printed expandable material expanded after being 3D printed.

According to another aspect, this disclosure relates to a helmet comprising a component according to the above aspect.

According to another aspect, this disclosure relates to a method of making a component of a helmet, the method comprising: providing expandable material; 3D printing the expandable material to create 3D-printed expandable material; and expanding the 3D-printed expandable material to define the component.

According to another aspect, this disclosure relates to a helmet comprising a component made by the method according to the above aspect.

25

BRIEF DESCRIPTION OF DRAWINGS

A detailed description of embodiments is provided below, by way of example only, with reference to drawings accompanying this description, in which:

30 Figure 1 shows an embodiment of a helmet for protecting a user's head and comprising additively-manufactured components;

Figure 2 shows a front view of the helmet;

Figures 3 and 4 show rear perspective views of the helmet;

5

Figures 5 and 6 show examples of a faceguard that may be provided on the helmet;

Figures 7 and 8 show the head of a user;

10 Figure 9 shows internal dimensions of a head-receiving cavity of the helmet;

Figures 10 to 13 show operation of an example of an adjustment mechanism of the helmet;

15 Figures 14 and 15 show an example of shell members of an outer shell of the helmet;

Figures 16 to 20 show an example of a plurality of additively-manufactured components constituting a plurality of pads of an inner liner of the helmet;

20 Figures 21A to 21C show examples of linear acceleration at a center of gravity of a headform caused by a linear impact on a helmet at three energy levels according to hockey STAR methodology;

25 Figures 22A and 22B show examples of stress-strain curves for additively manufactured components comprising a pad of an inner liner of a helmet;

Figure 23 shows an example of an additively-manufactured lattice structure that may be used in an additively-manufactured component;

30 Figure 24A shows an example of a unit cell occupying a voxel that may be used to form a an additively-manufactured component;

Figure 24B shows another example of a mesh or shell style unit cell that may be used to form an additively-manufactured component;

5 Figures 24C, 24D, 24E and 24F shows further examples of unit cells that may be used to form an additively-manufactured component;

Figures 25A, 25B, 25C, 25D, 25E, 25F and 25G show examples how a volume occupied by an additively-manufactured component may be populated with different
10 combinations of unit cells;

Figure 26 shows examples of lattice and non-lattice “skins” that may be formed on a lattice structure in order to provide an outer surface for the lattice structure;

15 Figure 27 shows a side view of an example of an additively-manufactured component constituting a front pad member of the inner lining of the helmet;

Figures 28A and 28B show an example of an additively-manufactured component comprising a two-dimensional (2D) lattice structure;

20 Figure 29 shows an example of an additively-manufactured component comprising a three-dimensional (3D) lattice structure;

Figures 30A, 30B and 30C show another example of an additively-manufactured component comprising a 3D lattice structure;

Figure 31 shows yet another example of an additively-manufactured component comprising a 3D lattice structure;

30 Figure 32 shows still another example of an additively-manufactured component comprising a 3D lattice structure;

Figure 33 shows an example of an additively-manufactured component constituting a shoulder cap member of shoulder padding for a hockey or lacrosse player;

5 Figures 34A, 34B and 34C show an example of an additively-manufactured component constituting an occipital pad member of the inner lining of a hockey helmet;

Figures 35A, 35B, 35C and 35D show examples of additively-manufactured components comprising a plurality of distinct zones structurally different from one 10 another;

Figure 36 shows examples of additively-manufactured components comprising lattice structures utilizing the same unit cell but different voxel sizes;

15 Figures 37A and 37B show another example of an additively-manufactured component constituting an occipital pad member of the inner lining of a hockey helmet;

Figure 38 shows examples of additively-manufactured components comprising lattice structures utilizing the same unit cell but different elongated member sizes;

20 Figures 39A and 39B show an example of pads of a helmet in an open position and a closed position, respectively;

Figure 40 shows an example of a precursor of a post-molded expandable component 25 being expanded to form the post-molded expandable component;

Figure 41 is a block diagram representing an example of an expandable material of the post-molded expandable component;

30 Figure 42 shows an example of an expansion agent of the expandable material of the post-molded expandable component;

Figure 43 shows a cross-sectional view of a sport helmet with inner padding that includes additively-manufactured components integrated into post-molded expandable components;

5

Figure 44 shows an example of a precursor of a post-additively manufactured expandable component being expanded to form the post-additively manufactured expandable component;

10 Figure 45 shows a schematic of an example of a binder jetting system for forming a precursor of a post-additively-manufactured expandable component;

Figure 46 shows an exploded view of an example of inner padding for a sport helmet in which the comfort pads include additively manufactured components;

15

Figure 47 shows a cross-sectional view of a portion of the inner padding of Figure 46;

Figures 48A and 48B show examples of a liquid crystal elastomer material in compressed and uncompressed states;

20

Figure 49 shows an example of inner padding for a sport helmet that includes liquid crystal elastomer components;

25 Figure 50 shows an example of an additively manufactured component with a lattice structure in which liquid crystal elastomer components have been incorporated;

Figure 51 shows a cross-sectional view of a sport helmet with inner padding that includes air channels integrally formed within additively manufactured components of the inner padding;

30

Figure 52 shows an example of additively-manufactured components constituting a chin cup and a face mask of a helmet;

5 Figures 53A, 53B and 53C show an example of an additively-manufactured component constituting a face mask of a helmet for a hockey goalie; and

Figure 54 shows an embodiment of a lacrosse helmet comprising additively-manufactured components.

10 It is to be expressly understood that the description and drawings are only for purposes of illustrating certain embodiments and are an aid for understanding. They are not intended to be and should not be limiting.

DETAILED DESCRIPTION OF EMBODIMENTS

15

Figures 1 to 4 show an embodiment of a helmet 10 for protecting a user's head and comprising additively-manufactured components 121-12A in accordance with an embodiment of the invention.

20 Each of the additively-manufactured components 121-12A of the helmet **10** is a part of the helmet 10 that is additively manufactured, i.e., made by additive manufacturing, also known as 3D printing, in which material **50** thereof initially provided as feedstock (e.g., powder, liquid, filaments, fibers, and/or other suitable feedstock), which can be referred to as 3D-printed material **50**, is added by a machine (i.e., a 3D printer) that is computer-controlled (e.g., using a digital 3D model such as a computer-aided design (CAD) model that may have been generated by a 3D scan of the intended wearer's head) to create it in its three-dimensional form (e.g., layer by layer, or by continuous liquid interface production from a pool of liquid, or by applying continuous fibers, or in any other way, normally moldlessly, i.e., without any mold). This is in contrast to subtractive manufacturing (e.g., machining) where material is removed and molding where material is introduced into a mold's cavity.

25

30

Any 3D-printing technology may be used to make the additively-manufactured components 12I-12A of the helmet 10. For instance, in some embodiments, one or more of the following additive manufacturing technologies may be used individually or in combination: material extrusion technologies, such as fused deposition modeling (FDM); vat photopolymerization technologies, such as stereolithography (SLA), digital light processing (DLP), continuous digital light processing (CDLP) or continuous liquid interface production (CLIP) with digital light synthesis (DLS); powder bed fusion technologies, such as multi-jet fusion (MJF), selective laser sintering (SLS), direct metal laser sintering/selective laser melting (DMLS/SLM), or electron beam melting (EBM); material jetting technologies, such as material jetting (MJ), nanoparticle jetting (NPJ) or drop on demand (DOD); binder jetting (BJ) technologies; sheet lamination technologies, such as laminated object manufacturing (LOM); material extrusion technologies, such as continuous-fiber 3D printing or fused deposition modeling (FDM), and/or any other suitable 3D-printing technology. Non-limiting examples of suitable 3D-printing technologies may include those available from Carbon (www.carbon3d.com), EOS (<https://www.eos.info/en>), HP (<https://www8.hp.com/ca/en/printers/3d-printers.html>), Arevo (<https://arevo.com>), and Continuous Composites (<https://www.continuouscomposites.com/>).

20

As further discussed later, in this embodiment, the additively-manufactured components 12I-12A of the helmet 10, which may be referred to as "AM" components, are designed to enhance performance and use of the helmet 10, such as: impact protection, including for managing different types of impacts; fit and comfort; adjustability; and/or other aspects of the helmet 10.

In this embodiment, the helmet 10 is an athletic helmet for protecting the head of the user who is engaging in a sport or other athletic activity against impacts. More particularly, in this embodiment, the helmet 10 is a hockey helmet for protecting the head of the user, who is a hockey player, against impacts (e.g., from a puck or ball, a hockey stick, a board, ice or another playing surface, etc., with another player, etc.).

The helmet 10 comprises an outer shell 11 and a liner 15 to protect the player's head. In this example, the helmet 10 also comprises a chinstrap 16 for securing the helmet 10 to the player's head. The helmet 10 may also comprise a faceguard 14 (as shown in 5 Figures 5 and 6) to protect at least part of the player's face (e.g., a grid (sometimes referred to as a "cage") and a chin cup 112 as shown in Figure 5 or a visor (sometimes referred to as a "shield") as shown in Figure 6).

The helmet 10 defines a cavity 13 for receiving the player's head. In response to an 10 impact, the helmet 10 absorbs energy from the impact to protect the player's head. The helmet 10 protects various regions of the player's head. As shown in Figures 7 and 8, the player's head comprises a front region FR, a top region TR, left and right side regions LS, RS, a back region BR, and an occipital region OR. The front region FR includes a forehead and a front top part of the player's head and generally corresponds 15 to a frontal bone region of the player's head. The left and right side regions LS, RS are approximately located above the player's ears. The back region BR is opposite the front region FR and includes a rear upper part of the player's head. The occipital region OR substantially corresponds to a region around and under the head's occipital protuberance.

20

The helmet 10 comprises an external surface 18 and an internal surface 20 that contacts the player's head when the helmet 10 is worn. The helmet 10 has a front-back axis FBA, a left-right axis LRA, and a vertical axis VA which are respectively generally parallel to a dorsoventral axis, a dextrosinistral axis, and a cephalocaudal axis of the 25 player when the helmet 10 is worn and which respectively define a front-back direction, a lateral direction, and a vertical direction of the helmet 10. Since they are generally oriented longitudinally and transversally of the helmet 10, the front-back axis FBA and the left-right axis LRA can also be referred to as a longitudinal axis and a transversal axis, respectively, while the front-back direction and the lateral direction can also be 30 referred to a longitudinal direction and a transversal direction, respectfully.

The outer shell 11 provides strength and rigidity to the helmet 10. To that end, the outer shell 11 typically comprises a rigid material 27. For example, in various embodiments, the rigid material 27 of the outer shell 11 may be a thermoplastic material such as polyethylene (PE), polyamide (nylon), or polycarbonate, a thermosetting resin, or any other suitable material. The outer shell 11 includes an inner surface 17 facing the inner liner 15 and an outer surface 19 opposite the inner surface 17. The outer surface 19 of the outer shell 11 constitutes at least part of the external surface 18 of the helmet 10. In some embodiments, the outer shell 11 or at least portions thereof may be manufactured via additive manufacturing and portions thereof may have differing properties. For example, portions of the outer shell 11 may be additively manufactured such that they differ in terms of rigidity (e.g., to save on weight in areas of the helmet in which rigidity is less crucial and/or to intentionally provide flexibility in certain areas of the shell in order to provide impact cushioning via the shell).

In this embodiment, the outer shell 11 comprises shell members 22, 24 that are connected to one another. In this example, the shell member 22 comprises a top portion 21 for facing at least part of the top region TR of the player's head, a front portion 23 for facing at least part of the front region FR of the player's head, and left and right lateral side portions 25L, 25R extending rearwardly from the front portion 23 for facing at least part of the left and right side regions LS, RS of the player's head, respectively. The shell member 24 comprises a top portion 29 for facing at least part of the top region TR of the player's head, a back portion 31 for facing at least part of the back region BR of the player's head, an occipital portion 33 for facing at least part of the occipital region OR of the player's head, and left and right lateral side portions 35L, 35R extending forwardly from the back portion 31 for facing at least part of the left and right side regions LS, RS of the player's head, respectively.

In this embodiment, the helmet 10 is adjustable to adjust how it fits on the player's head. To that end, the helmet 10 comprises an adjustment mechanism 40 for adjusting a fit of the helmet 10 on the player's head. The adjustment mechanism 40 may allow the fit of the helmet 10 to be adjusted by adjusting one or more internal dimensions of the cavity

13 of the helmet 10, such as a front-back internal dimension FBD of the cavity 13 in the front-back direction of the helmet 10 and/or a left-right internal dimension LRD of the cavity 13 in the left-right direction of the helmet 10, as shown in Figure 9.

5 More particularly, in this embodiment, the adjustment mechanism 40 is configured such that the outer shell 11 and the inner liner 15 are adjustable to adjust the fit of the helmet 10 on the player's head. To that end, in this embodiment, the shell members 22, 24 are movable relative to one another to adjust the fit of the helmet 10 on the player's head. In this example, relative movement of the shell members 22, 24 for adjustment purposes is
10 in the front-back direction of the helmet 10 such that the front-back internal dimension FBD of the cavity 13 of the helmet 10 is adjusted. This is shown in Figures 10 to 13 in which the shell member 24 is moved relative to the shell member 22 from a first position, which is shown in Figure 10 and which corresponds to a minimum size of the helmet 10, to a second position, which is shown in Figure 11 and which corresponds to an intermediate size of the helmet 10, and to a third position, which is shown in Figures
15 12 and 13 and which corresponds to a maximum size of the helmet 10.

In this example of implementation, the adjustment mechanism 40 comprises an actuator 41 that can be moved (in this case pivoted) by the player between a locked position, in
20 which the actuator 41 engages a locking part 45 (as best shown in Figures 14 and 15) of the shell member 22 and thereby locks the shell members 22, 24 relative to one another, and a release position, in which the actuator 41 is disengaged from the locking part 45 of the shell member 22 and thereby permits the shell members 22, 24 to move relative to one another so as to adjust the size of the helmet 10. The adjustment mechanism 40 may be implemented in any other suitably way in other embodiments.
25

For instance, in some cases, the shock-absorbing material may include a polymeric foam (e.g., expanded polypropylene (EPP) foam, expanded polyethylene (EPE) foam, expanded polymeric microspheres (e.g., ExpanceL™ microspheres commercialized by
30 Akzo Nobel), or any other suitable polymeric foam material) and/or a polymeric structure comprising one or more polymeric materials. Any other material with suitable impact

energy absorption may be used in other embodiments. For example, in some embodiments, the shock-absorbing material may include liquid crystal elastomer (LCE) components, as discussed in further detail later on with reference to Figures 46 to 48. Additionally or alternatively, in some embodiments, the inner liner 15 may comprise an array of shock absorbers that are configured to deform when the helmet 10 is impacted. For instance, in some cases, the array of shock absorbers may include an array of compressible cells that can compress when the helmet 10 is impacted. Examples of this are described in U.S. Patent 7,677,538 and U.S. Patent Application Publication 2010/0258988, which are incorporated by reference herein.

10

The liner 15 may be connected to the outer shell 11 in any suitable way. For example, in some embodiments, the inner liner 15 may be fastened to the outer shell 11 by one or more fasteners such as mechanical fasteners (e.g., tacks, staples, rivets, screws, stitches, etc.), an adhesive, or any other suitable fastener. In some embodiments, the liner 15 and/or the outer shell 11 may be manufactured via additive manufacturing such that they incorporate corresponding mating elements that are configured to securely engage one another, potentially without the need for other fastening means to fasten the liner 15 to the outer shell 11. In other embodiments, at least a portion of the liner 15 and at least a portion of the outer shell 11 may be additively manufactured as a unitary structure. For example, a rear portion of the liner 15 may be additively-manufactured together with the rear shell member 24 and/or a front portion of the liner 15 may be additively-manufactured together with the front portion 23 of the front shell member 22.

In this embodiment, the liner 15 comprises a plurality of pads 36I -36A, 37I -37C disposed between the outer shell 11 and the player's head when the helmet 10 is worn. In this example, respective ones of the pads 36I -36A, 37I -37C are movable relative to one another and with the shell members 22, 24 to allow adjustment of the fit of the helmet 10 using the adjustment mechanism 40.

30 In this example, the pads 36I -36A are responsible for absorbing at least a bulk of the impact energy transmitted to the inner liner 15 when the helmet 10 is impacted and can

therefore be referred to as “absorption” pads. In this embodiment, the pad **36i** is for facing at least part of the front region FR and left side region LS of the player’s head, the pad **362** is for facing at least part of the front region FR and right side region RS of the player’s head, the pad **363** is for facing at least part of the back region BR and left side region LS of the player’s head, the pad **364** is for facing at least part of the back region BR and right side region RS of the player’s head. Another pad, (not shown in Figures 16 to **20**) is for facing at least part of the top region TR and back region BR of the player’s head. The shell member **22** overlays the pads **36i**, **362** while the shell member **24** overlays the pads **363**, **364**.

10

In this embodiment, the pads **37i-37c** are responsible to provide comfort to the player’s head and can therefore be referred to as “comfort” pads. The comfort pads **37i-37c** may comprise any suitable soft material providing comfort to the player. For example, in some embodiments, the comfort pads **37i-37c** may comprise polymeric foam such as polyvinyl chloride (PVC) foam, polyurethane foam (e.g., PORON XRD foam commercialized by Rogers Corporation), vinyl nitrile foam or any other suitable polymeric foam material and/or a polymeric structure comprising one or more polymeric materials. In some embodiments, given ones of the comfort pads **37i-37c** may be secured (e.g., adhered, fastened, etc.) to respective ones of the absorption pads **36i-36A**. In other embodiments, given ones of the comfort pads **37i-37c** may be mounted such that they are movable relative to the absorption pads **36i-36A**. For example, in some embodiments, one or more of the comfort pads **37i-37c** may be part of a floating liner as described in U.S. Patent Application Publication **2013/0025032**, which, for instance, may be implemented as the SUSPEND-TECH™ liner member found in the BAUER™ RE-AKT™ and RE-AKT **100™** helmets made available by Bauer Hockey, Inc. The comfort pads **37i-37c** may assist in absorption of energy from impacts, in particular, low-energy impacts.

In this embodiment, the liner 15 comprises respective ones of the AM components **12i-12A** of the helmet 10. More particularly, in this embodiment, respective ones of the pads **36i-36A** comprise respective ones of the AM components **12i-12A** of the helmet 10. In

some embodiments, one or more other components of the helmet 10, such as the outer shell 11, comfort pads 37i-37c, face guard 14 and/or chin cup 112 may also or instead be AM components.

- 5 A pad 36x comprising an AM component 12x of the helmet 10 may be configured to enhance performance and use of the helmet 10, such as: impact protection, including for managing different types of impacts; fit and comfort; adjustability; and/or other aspects of the helmet 10.
- 10 For example, in some embodiments, the AM component 12x comprised by the pad 36x may be configured to provide multi-impact protection for repeated and different types of impacts, including linear and rotational impacts, which may be at different energy levels, such as high-energy, mid-energy, and low-energy impacts, as experienced during hockey.

15

The AM component 12x comprised by the pad 36x may provide such multi-impact protection while remaining relatively thin, i.e., a thickness T_c of the AM component 12x comprised by the pad 36x is relatively small, so that a thickness T_h of the helmet 10 at the AM component 12x, which can be referred to as an “offset” of the helmet 10 at that 20 location, is relatively small.

As an example, in some embodiments, at least part of the AM component 12x comprised by the pad 36x may be disposed in a given one of the lateral side portions 25L, 25R of the helmet 10 and the thickness T_c of the AM component 12x comprised by the pad 36x at that given one of the lateral side portions 25L, 25R of the helmet 10 may be no more than 22 mm, in some cases no more than 20 mm, in some cases no more than 18 mm, and in some cases no more than 16 mm (e.g., 15 mm or less). This may allow the offset of the helmet 10 at the lateral side portions 25L, 25R of the helmet 10 to be small, which may be highly desirable.

25
30

In other examples, in some embodiments, at least part of the AM component 12x comprised by the pad 36x may be disposed in a given one of the front portion 23 and the back portion 31 of the helmet 10 and the thickness T_c of the AM component 12x comprised by the pad 36x at that given one of the front portion 23 and the back portion 31 of the helmet 10 may be no more than 22 mm, in some cases no more than 20 mm, in some cases no more than 18 mm, and in some cases no more than 16 mm (e.g., 15 mm or less). In some cases, the thickness T_c of the AM component 12x comprised by the pad 36x at that given one of the front portion 23 and the back portion 31 of the helmet 10 may be thicker than the thickness T_c of the AM component 12x or another one of the AM components 12I-12A at a given one of the lateral side portions 44L, 44R of the helmet 10.

For instance, in some embodiments, the AM component 12x comprised by the pad 36x may be configured such that, when the helmet 10 is impacted where the AM component 12x is located in accordance with hockey STAR methodology, linear acceleration at a center of gravity of a headform on which the helmet 10 is worn is no more than a value indicated by curves L1-L3 shown in Figures 21A-21 C for impacts at three energy levels (10 Joules, 40 Joules and 60 Joules, respectively) according to hockey STAR methodology for the thickness T_c of the AM component 12x where impacted.

In some embodiments, the AM component 12x comprised by the pad 36x may be configured such that, when the helmet 10 is impacted where the AM component 12x is located in accordance with hockey STAR methodology, the linear acceleration at the center of gravity of the headform on which the helmet 10 is worn may be no more than 120%, in some cases no more than 110%, and in some cases no more than 105% of the value indicated by the curves L1-L3 for impacts at three energy levels according to hockey STAR methodology for the thickness T_c of the AM component 12x where impacted. For example, the values indicated by the upper bound curves L1_{Upper}-L3_{Upper} shown in Figures 21A-21 C are 20% higher than those of the curves L1-L3.

30

In some embodiments, the AM component 12x comprised by the pad 36x may be configured such that, when the helmet 10 is impacted where the AM component 12x is located in accordance with hockey STAR methodology, the linear acceleration at the center of gravity of the headform on which the helmet 10 is worn may be no more than 5 90%, in some cases no more than 80%, and in some cases no more than 70% of the value indicated by the curves L1-L3 for impacts at three energy levels according to hockey STAR methodology for the thickness T_c of the AM component 12x where impacted. For example, the values indicated by the lower bound curves L1lower-L3lower shown in Figures 21A-21 C are 30% lower than those of the curves L1-L3.

10

The hockey STAR methodology is a testing protocol described in a paper entitled "Fockey STAR: A Methodology for Assessing the Biomechanical Performance of Fockey Helmets", by B. Rowson et al., Department of Biomedical Engineering and Mechanics, Virginia Tech, 313 Kelly Flail, 325 Stanger Street, Blacksburg, VA 24061 , 15 USA, published online on March 30, 2015 and incorporated by reference herein.

The AM component 12x comprised by the pad 36x may be designed to have properties of interest in this regard.

20 For example, in some embodiments, the AM component 12x comprised by the pad 36x may be configured in order to provide a desired stiffness. The stiffness of the AM component 12x may be measured by applying a compressive load to the AM component 12x, measuring a deflection of the AM component 12x where the compressive load is applied, and dividing the compressive load by the deflection.

25

As another example, in some embodiments, the AM component 12x comprised by the pad 36x may be configured in order to provide a desired resilience according to ASTM D2632-01 which measures resilience by vertical rebound.

30 As another example, in some embodiments, the AM component 12x comprised by the pad 36x may be configured such that, when the AM component 12x is loaded and

unloaded, e.g., as a result of a stress temporarily applied to the pad 36x from an impact on the helmet 10, the strain of the AM component 12x is no more than a value indicated by the unloading curve shown in Figure 22A for the unloading of the applied stress. In addition, or instead, in some embodiments, the AM component 12x comprised by the pad 36x may be configured such that when the AM component 12x is loaded and unloaded the stress required to realize a given strain on the loading curve may be higher or lower than that of the loading curve shown in Figure 22A, but the difference in stress between the loading and unloading curves at a given level of strain is at least as large as the difference between the loading and unloading curves shown in Figure 22A at the given level of strain. In general, the greater the area between the loading and unloading curves for an impact absorbing component, the greater the impact energy that is absorbed by that component. For example, an impact absorbing component having the same loading curve as shown in Figure 22B, but a lower unloading curve, as illustrated by a second dashed unloading curve in Figure 22B, would dissipate a greater amount of impact energy.

In this embodiment, the AM component 12x comprised by the pad 36x includes a lattice 140, an example of which is shown in Figure 23, which is additively-manufactured such that AM component 12x has an open structure. The lattice 140 can be designed and 3D-printed to impart properties and functions of the AM component 12x, such as those discussed above, while helping to minimize its weight.

The lattice 140 comprises a framework of structural members 141₁-141_E (best shown in Figure 24A) that intersect one another. In some embodiments, the structural members 141₁-141_E may be arranged in a regular arrangement repeating over the lattice 140. In some cases, the lattice 140 may be viewed as made up of unit cells 132i-132c each including a subset of the structural members 141₁-141_E that forms the regular arrangement repeating over the lattice 140. Each of these unit cells 132i-132c can be viewed as having a voxel (shown in dashed lines in Figures 23 and 24A), which refers to a notional three-dimensional space that it occupies. In other embodiments, the structural members 141₁-141_E may be arranged in different arrangements over the

lattice 140 (e.g., which do not necessarily repeat over the lattice 140, do not necessarily define unit cells, etc.).

5 The lattice 140, including its structural members 141₁-141_E, may be configured in any suitable way.

In this embodiment, the structural members 141₁-141_E are elongate members that intersect one another at nodes 142I -142N. The elongate members 141₁-141_E may sometimes be referred to as “beams” or “struts”. Each of the elongate members 141₁-141_E may be straight, curved, or partly straight and partly curved.

10 The 3D-printed material 50 constitutes the lattice 140. Specifically, the elongate members 141₁-141_E and the nodes 142I -142N of the lattice 140 include respective parts of the 3D-printed material created by the 3D-printer.

15 In this example of implementation, the 3D-printed material 50 includes polymeric material. For instance, in this embodiment, the 3D-printed material 50 may include polyamide (PA) 11, thermoplastic polyurethane (TPU) 30A to 95A (fused), polyurethane (PU) 30A to 95A (light cured, chemical cured), polyether ether ketone (PEEK), 20 polyetherketoneketone (PEKK), polypropylene (PP), silicone, rubber, gel and/or any other polymer.

25 In some embodiments, the AM components 12I-12A may comprise a plurality of materials different from one another. For example, a first one of the materials is a first polymeric material and a second one of the materials is a second polymeric material. In other embodiments, a first one of the materials may be a polymeric material and a second one of the materials may be a non-polymeric material.

30 In some embodiments, the structural members 141₁-141_E of the lattice 140 may be implemented in various other ways. For example, in some embodiments, the structural members 141₁-141_E may be planar members that intersect one another at vertices. For

example, such an embodiment of the lattice 140 may be realized using a different “mesh” or “shell” style unit cell, such as the unit cell 132i shown in Figure 24B, which includes planar members 141₁-141_E that intersect at vertices 142i-142v. The surfaces of the planar members 141₁-141_E may sometimes be referred to as “faces”. Each of the 5 planar members 141₁-141_E may be straight, curved, or partly straight and partly curved. In some embodiments, the structural members 141₁-141_E of the lattice 140 may have a hybrid construction that includes both elongate members and planar members. For example, such embodiments may include a mix of elongate member style unit cells, such as the unit cell 132i shown in Figure 24A, and mesh or shell style unit cells, such 10 as the unit cell 132i shown in Figure 24B. In some embodiments, the structural elements of a unit cell may include a combination of elongate member and surface/planar members. Figures 24C, 24D and 24E show further non-limiting examples of elongate member style unit cells and mesh or shell style unit cells that may be used individually and/or in combination to form additively-manufactured components 15 as disclosed herein. The example unit cells shown in Figure 24E are examples of cubic unit cells that are based on triply periodic minimal surfaces. A minimal surface is the surface of minimal area between any given boundaries. Minimal surfaces have a constant mean curvature of zero, which means that the sum of the principal curvatures at each point is zero. Triply periodic minimal surfaces have a crystalline structure, in that 20 they repeat themselves in three dimensions, and thus are said to be triply periodic.

A volume of material can be constructed by “voxelizing” the volume (dividing the volume into voxels of the same or different sizes), and populating the voxels with unit cell structures, such as those shown in Figures 24A-24E. For example, Figure 24F shows 25 three examples of volumes containing triply periodic surfaces implemented by 2x2x2 lattices of equal sized voxels populated with different unit cells from the examples shown in Figure 24D. The behavior or performance of an AM component that includes a voxelized volume of unit cells can be adapted by changing the structure, size or combination of unit cells that make up the AM component. Unit cells having different 30 structures (e.g., the body centered (BC) unit cell shown in Figure 24A vs. the Schwarz P unit cell shown in Figure 24E) may have different behaviors. Similarly, unit cells having

the same structure but different sizes may behave differently. Furthermore, implementing unit cells using the same structure but using different materials may result in different behaviors. Likewise, implementing an AM component using multiple different types of unit cells that differ in terms of structure, size and/or materials may 5 result in different behavior/performance. As such, it may be possible to achieve a desired performance of an AM component by adapting the structure, size, material and/or mix of the unit cells that are used within a given volume of the AM component. This concept is discussed in further detail below with reference to Figures 25A-25G.

10 Figure 25A shows four different cubic unit cells 300, 302, 304 and 306. Unit cells 300, 304 and 306 are of the same size, but exhibit different behaviors which are identified generically as Behavior A, Behavior B and Behavior C, respectively. For example, unit cells 300, 302 and 306 may differ in terms of structure and/or materials, and thereby provide different impact absorbency properties, such as resiliency, stiffness, modulus of 15 elasticity, etc.

Unit cells 300 and 302 are characterized by the same behavior, Behavior A, but unit cell 302 is smaller than the other three unit cells 300, 304 and 306. In particular, in this 20 example unit cell 302 is one eighth the volume of the other three unit cells 300, 304 and 306, such that a 2x2x2 lattice of unit cells 302 would have the same volume of each of the other three unit cells 300, 304 and 306. This is shown by way of example in Figure 25B, which shows that an AM component occupying a volume 310 may be implemented by either a 3x3x2 lattice of unit cells 300 or a 6x6x4 lattice of unit cells 302.

25 As noted above, the behavior of an AM component constituting a voxelized volume of unit cells may be changed by incorporating different unit cells within the volume. This is shown by way of example in Figures 25C-25G. Figure 25C shows that a smaller volume 310 within a larger volume 320 of an AM component may be implemented with a 3x3x2 lattice of unit cells 300 characterized by Behavior A, while the remainder of 30 volume 320 is implemented with unit cells 304 characterized by Behavior B. Such a combination of unit cells 300 and 304 may result in an overall behavior for the AM

component that is different than either Behavior A or Behavior B alone. Figure 25D shows an alternative example in which the smaller volume 310 is implemented with a 6x6x4 lattice of unit cells 302. Figure 25E shows another example of this concept, in which the voxelized volume 320 of unit cells shown in Figure 25C, which includes a mix 5 of unit cells 300 and 304, is located within an even larger voxelized volume 330 of an AM component. In this example, the remainder of the volume 330 of the AM component is implemented with unit cells 306 characterized by Behavior C. Figure 25F shows a profile of the cross-section of the AM component of Figure 25E along the line A-A. Figure 25G shows a profile of the cross-section of an alternative example in which 10 the smaller volume 310 within the volume 320 is implemented with a 6x6x4 lattice of unit cells 302 rather than a 3x3x2 lattice of unit cells 300.

Referring again to Figures 16 to 20, in some embodiments, an AM component 12x may include a non-lattice member connected to the lattice 140. For example, the non-lattice 15 member may be configured to be positioned between the lattice 140 and a user's head when the helmet is worn. In other embodiments, the non-lattice member may be positioned between the lattice 140 and the shell 11. In some embodiments, such a non-lattice member may be thinner than the lattice 140. In other embodiments, the non-lattice member may be bulkier than the lattice 140.

20 In the example of implementation shown in Figure 23, the lattice 140 of the AM component 12x comprised by the pad 36x may include outer surfaces or "skins" that provide interfaces to other components of the helmet and/or the user's head. The outer surfaces of the lattice 140 may be implemented with an open lattice skin 150 and/or 25 solid non-lattice skin 152.

Figure 26 shows examples of a lattice skin 150 and a solid non-lattice skin 152 that may be formed on the lattice 140 of Figure 23 in order to provide outer surfaces for the lattice 140. For example, the solid skin 152 may be used to provide an outer surface of the 30 AM component 12x comprised by the pad 36x to interface the pad 36x to the inner surface 17 of the outer shell 11 of the helmet 10.

Figure 27 shows a side view of an example of the AM component 12i constituting the front pad 36i of the inner lining 15 of the helmet 10. The AM component 12i includes the lattice 140 and the solid skin 152 which forms the outer surface 38 of the front pad 5 36i.

It is noted that the lattice 140 shown in Figures 23 and 26, which has a 3D structure, is merely one example of an additively-manufactured lattice that may be used in some 10 embodiments. Other 2D and 3D lattice structures, which may be based on unit cells such as those shown by way of non-limiting example in Figures 24A-24E, may be used in other embodiments.

Figures 28 to 34 show non-limiting examples of AM components incorporating lattices 15 that may be used in embodiments. Figures 28A and 28B show an example of an AM component comprising a 2D lattice structure. In this example of implementation, the lattice has a generally honeycomb pattern and the component includes fastening means for fastening the AM component to another component.

Figure 29 shows an example of an AM component comprising a 3D lattice structure 20 similar to that of the lattice 140 shown in Figures 21 and 25.

Figures 30A, 30B and 30C show another example of an AM component comprising a 3D lattice structure. In this example of implementation, the lattice has a solid non-lattice outer surface on two of its opposite sides and the AM component is configured so that it 25 is easily compressible by forces applied through its opposing solid sides.

Figures 31A and 31B show another example of an AM component comprising a 3D lattice structure. Figure 31B shows a profile of the cross-section of the AM component along the line B-B shown in Figure 31A. In this example of implementation, the 3D 30 lattice is formed by the vertices and edges of a quarter cubic honeycomb. In this example implementation, the 3D lattice contains four sets of parallel planes of points

and lines, each plane being a two dimensional kagome or trihexagonal lattice, and therefore this lattice structure may be referred to as a hyper-kagome lattice.

Figure 32 shows yet another example of an AM component comprising a 3D lattice structure. In this example of implementation, the 3D lattice forms a periodic minimal surface based on the Schwarz P (Primitive) unit cell example shown in Figure 24E, which results in a structure with a high surface-to-volume ratio and high porosity.

Figure 33 shows an example of an AM component constituting a shoulder cap member of shoulder pads for a hockey or lacrosse player. In this example of implementation, the AM component constituting the shoulder cap member comprises a 3D lattice structure that forms a triply periodic minimal surface based on a gyroid structure. Gyroid structures generally have exceptional strength properties at low densities, which means that structures such as shoulder caps, that have conventionally been made by molding, can potentially be made lighter while retaining a suitable level of structural integrity and resilience by utilizing additively-manufactured gyroid surface structures. In the example shoulder pad shown in Figure 33, an exterior facing portion of the shoulder pad has been formed as a closed surface to act as a bonding surface between the shoulder pad and a shell member (not shown). In some cases, a portion of an AM component that faces a wearer (e.g., an interior facing portion of the shoulder pad shown in Figure 33) may also or instead include such a closed surface for the purpose of providing better comfort to the wearer, such as in the case of the interior facing surface of the occipital pad discussed below with reference to Figures 34A-34C.

Figures 34A, 34B and 34C show an example of an AM component constituting an occipital pad member of the inner lining of a hockey helmet. In this example of implementation, the AM component constituting the occipital pad member is configured with generally opposing solid outer surfaces. For example, if such an occipital pad member were used in the helmet 10, one of the solid opposing outer surfaces of the pad member would faces a user's head and the opposite solid outer surface would faces the inner surface 17 of the outer shell 11 of the helmet 10. As shown in this example of

implementation, the outer surface of the pad that would face the user's head when the helmet is worn may be formed with one or more decorative structures or indicia. In this case, the numeral "150" has been formed in the outer surface of the occipital pad and would be visible to the wearer each time a helmet incorporating the occipital pad is 5 donned. Such decorative indicia may also or instead be incorporated in any of the other AM components 12x of the helmet 10 and may be customized for a particular model and/or user.

In some embodiments, the lattice 140 may include distinct zones 80i-80z that are 10 structurally different from one another and may be useful to manage different types of impacts, enhance comfort and/or fit, etc. Figures 35A, 35B, 35C and 35D show non-limiting examples of AM components that each includes a lattice 140 comprising a plurality of distinct zones 80i-80z that are structurally different from one another.

15 As an example, the lattice 140 of the AM component 12x comprised by the pad 36x may include distinct zones that differ in stiffness.

As another example, in some embodiments, the distinct zones 80i-80z of the lattice 140 may also or instead differ in resilience.

20 In a further example, in some embodiments, the distinct zones 80i-80z of the lattice 140 may also or instead be configured to protect against different types of impacts. For example, a first one of the distinct zones 80i of the lattice 140 is configured to protect more against rotational impact components than linear impact components; and a 25 second one of the distinct zones 80z of the lattice 140 is configured to protect more against linear impact components than rotational impact components.

In some embodiments, a first one of the distinct zones 80i of the lattice 140 is 30 configured to protect more against lower-energy impacts than higher-energy impacts; and a second one of the distinct zones 80z of the lattice 140 is configured to protect more against higher-energy impacts than lower-energy impacts.

In a further example, in some embodiments, a first one of the distinct zones 8O1 of the lattice 140 is less stiff in shear than a second one of the distinct zones 8O2 of the lattice 140. In such embodiments, the second one of the distinct zones 8O2 of the lattice 140 5 may be less stiff in compression than the first one of the distinct zones 8O1 of the lattice 140. In some embodiments, a stress-strain curve for an AM component having two or more distinct zones that differ in stiffness and/or compression has multiple “flex” zones in the loading portion of the stress-strain curve. An example of such a stress-strain curve is shown in Figure 22B. As shown in Figure 22B, the flex zones are regions of 10 the loading curve where a value of slope of the loading curve reaches zero and may temporarily turn negative before once again resuming a positive value.

In some embodiments, such as the one shown in Figure 35B, a density of the lattice 140 in a first one of the distinct zones 8O1 of the lattice 140 is greater than the density of 15 the lattice in a second one of the distinct zones 8O2 of the lattice 140. Different densities of a lattice can be achieved in a number of ways. For example, Figure 36 shows examples of lattices with different densities by virtue of using the same unit cell but different voxel sizes.

20 Figures 37A and 37B show front and back views, respectively, of another example of an AM component constituting an occipital pad member of the inner lining of a hockey helmet. In this example of implementation, the AM component constituting the occipital pad member is configured with a lattice structure that has a varying density by virtue of using varying voxel sizes in different regions of the lattice structure. As in the previous 25 example implementation of an occipital pad shown in Figures 34A-C, in the example implementation shown in Figure 37A the inner facing portion of the pad that would face the user's head when the helmet is worn is formed with a decorative indicia (i.e., the number “150”).

30 In some embodiments, a spacing of elongate members 141₁-141E of the lattice 140 in a first one of the distinct zones 8O1 of the lattice 140 is less than the spacing of elongate

members **1411-141E** of the lattice **140** in a second one of the distinct zones **8Q2** of the lattice **140**.

5 In some embodiments, elongate members **1411-141E** of the lattice **140** in a first one of the distinct zones **8Q1** of the lattice **140** are cross-sectionally larger than elongate members **1411-141E** of the lattice **140** in a second one of the distinct zones of the lattice. For example, Figure 38 shows examples of additively-manufactured components comprising lattice structures utilizing the same unit cell but different elongated member sizes.

10

In some embodiments, an orientation of elongate members **1411-141E** of the lattice **140** in a first one of the distinct zones **8Q1** of the lattice **140** is different from the orientation of elongate members **1411-141E** of the lattice **140** in a second one of the distinct zones **8Q2** of the lattice **140**.

15

In some embodiments, a material composition of the lattice **140** in a first one of the distinct zones **8Q1** of the lattice **140** is different from the material composition of the lattice **140** in a second one of the distinct zones **8Q2** of the lattice **140**.

20 In some embodiment, such as those shown in Figures 35C and 35D, the distinct zones **80i-80z** of the lattice **140** include at least three distinct zones **8Q1**, **8Q2**, **8Q3**.

In some embodiment, such as the one shown in Figure 35C, the distinct zones **80i-80z** of the lattice **140** are layers of the lattice **140** that are layered on one another.

25

In some embodiments, the distinct zones **80i-80z** of the lattice **140** may facilitate adjustment of the fit of the helmet. For example, in some embodiments, the AM component **12x** comprised by the pad **36x** may facilitate adjustment of the helmet **10** when operating the adjustment mechanism **40**. For example, in some embodiments, the AM component **12x** comprised by the pad **36x** may span adjacent ones of the shell members **22**, **24** of the outer shell **11** and comprise an adjustment area **60x** between a

portion **61x** of the AM component **12x** fastened to the shell member **22** and a portion **62x** of the AM component **12x** fastened to the shell member **24**, such that these portions **61x, 62x** of the AM component **12x** are movable relative to one another when the shell members **22, 24** are moved relative to one another. The adjustment area **60x** of the AM component **12x** may be less stiff than the portions **61x, 62x** of the AM component **12x** so that the adjustment area **60** flexes more than the portions **61, 62** to facilitate their relative movement during adjustment.

An example of such an embodiment is shown in Figures 39A and 39B, which show an example of the AM components **12i** and **12₅** comprised by the pad **36i** and **36₅** of the inner lining **15** of a helmet **10** in an open position and a closed position, respectively. For example, the AM component **12i** comprised by the pad **36i** spans the shell members **22, 24** of the outer shell **11** and comprises an adjustment area **60i** between a portion **61₁** of the AM component **12i** fastened to the front shell member **22** and a portion **62_i** of the AM component **12i** fastened to the rear shell member **24**, such that the portions **61₁, 62_i** of the AM component **12i** are movable relative to one another when the shell members **22, 24** are moved relative to one another. The adjustment area **60i** of the AM component **12i** is configured so that it is less stiff than the portions **61₁, 62_i** of the AM component **12i** so that the adjustment area **60i** flexes more than the portions **61₁, 62_i** to facilitate their relative movement during adjustment of the shell members **22, 24**. The adjustment areas of the AM components may have different structural components than the other areas of the AM components in order to provide the desired stiffness/flexibility, such as different material(s), a lesser density, lesser cross sectional size of elongate members, different unit cell(s) and/or different voxel size(s), as described above.

In some embodiments, a sensor may be associated with one or more of the AM components **12I-12A** of the helmet **10**. For example, the sensor may be sensitive to compression of the inner lining **15** and/or outer shell **11** of the helmet **10**. In some embodiments, the AM component comprises the sensor, e.g., the sensor may be additively manufactured together with the AM component.

In some embodiments, the helmet comprises an actuator, and the sensor is responsive to an event to cause the actuator to alter the AM component. For example, the AM component may comprise material that is deformable by applying an electric current/voltage, and the actuator may be an electronic actuator configured to apply such an electric current/voltage to the AM component responsive to control signaling from the sensor. In some embodiments, the additively-manufactured component comprises piezoelectric material implementing the sensor.

10 In some embodiments, one or more of the AM components **12I-12A** of the helmet **10** may be configured to receive a non-additively-manufactured component. For example, one or more of the AM components **12I-12A** may be formed with a void that is accessible from an outer surface of the AM component and is configured to receive a non-AM component. For example, the AM component may comprise a lattice, such as the lattice **140** described above, and the non-AM component may be received within the lattice. In some embodiments, the non-AM component may be configured as an insert that is removably mountable to the lattice. In some embodiments, the non-AM component may comprise foam, for example. In other embodiments, the non-AM component may comprise fiber-reinforced polymeric material. In some embodiments, 15 the non-AM component, when received in the AM component, serves to alter the shape and/or a functional property of the AM component, such as stiffness, rigidity, compressibility, etc.

20

In some embodiments, the non-AM component may comprise expandable material. For example, the AM component may be sacrificed when the non-AM component is expanded. In such embodiments, the AM component may function as a frame to contain and/or shape the expandable component, and is sacrificed when the non-AM component is expanded. In other embodiments, the AM component may be integrated with the expandable material of the expandable non-AM component so as to provide 25 structural support to the non-AM component once it is expanded. For example, referring again to Figures 18 to 20, the inner padding 15 of the helmet may include post-

5 molded expandable components 212 constituting the pads 36i to 36x. Integrating an AM component into a post-molded expandable component has many potential benefits, such as potentially improving resistance to breakage, and may also allow a wider range of grades of expandable material to be used. For example, the integration of an AM component may allow lighter and/or more expandable materials to be used.

10 Figure 40 shows an example of a precursor 212x* of a post-molded expandable component 212x being expanded to form the post-molded expandable component 212x constituting a pad 36x. In this example, the pad 36x corresponds to the right pad 364 that was shown previously in Figures 18 to 20. In this example of implementation, the post-molded expandable component 212x of the helmet 10 constituting the pad 36x comprises an expandable material 250 that is molded into a precursor 212x* which can then be expanded by a stimulus (e.g., heat or another stimulus) to an expanded shape that is a scaled-up version of an initial shape of the precursor 212x*. Thus, in this 15 example, a three-dimensional configuration of the initial shape of the precursor 212x* is such that, once the expandable material 250 is expanded, a three-dimensional configuration of the expanded shape of the post-molded expandable component 212x imparts a three-dimensional configuration of the pad 36x (e.g., including curved and/or angular parts of the pad 36x).

20 The post-molded expandable component 212x of the helmet 10 constituting the pad 36x is “expandable” in that it is capable of expanding and/or has been expanded by a substantial degree in response to a stimulus after being molded. That is, an expansion ratio of the post-molded expandable component 212x of the helmet 10 constituting the 25 pad 36x, which refers to a ratio of a volume of the post-molded expandable component 212x of the helmet 10 after the expandable material 250 has been expanded subsequently to having been molded into the precursor 212x* over a volume of the precursor 212x* into which the expandable material 250 is initially molded, may be significantly high. For example, in some embodiments, the expansion ratio of the post- 30 molded expandable component 212x of the helmet 10 constituting the pad 36x may be at least 2, in some cases at least 3, in some cases at least 5, in some cases at least 10,

in some cases at least 20, in some cases at least 30, in some cases at least 40 and in some cases even more (e.g., 45).

5 In such embodiments, the expandable material 250 can be any material capable of expanding after being molded. For example, the expandable material 250 may include a mixture of a polymeric substance 252 and an expansion agent 254 that allows the expandable material 250 to expand. Figure 41 is a block diagram representing an example of an expandable material of the post-molded expandable component. Once expanded into its final shape, the pad 36x may have desirable properties, such as being
10 more shock-absorbent than it if had been made entirely of the expansion agent 254 and/or being lighter than if it had been made entirely of the polymeric substance 252.

15 The polymeric substance 252 constitutes a substantial part of the expandable material 250 and substantially contributes to structural integrity of the pad 36x. For instance, in some embodiments, the polymeric substance 252 may constitute at least 40%, in some cases at least 50%, in some cases at least 60%, in some cases at least 70%, in some cases at least 80%, and in some cases at least 90% of the expandable material 250 by weight. In this example of implementation, the polymeric substance 252 may constitute between 50% and 90% of the expandable material 250 by weight.

20

In this embodiment, the polymeric substance 252 may be an elastomeric substance. For instance, the polymeric substance 252 may be a thermoplastic elastomer (TPE) or a thermoset elastomer (TSE).

25 More particularly, in this embodiment, the polymeric substance 252 comprises polyurethane. The polyurethane 252 may be composed of any suitable constituents such as isocyanates and polyols and possibly additives. For instance, in some embodiments, the polyurethane 252 may have a hardness in a scale of Shore 00, Shore A, Shore C or Shore D, or equivalent. For example, in some embodiments, the
30 hardness of the polyurethane 252 may be between Shore 5A and 95A or between

Shore D 40D to 93D. Any other suitable polyurethane may be used in other embodiments.

5 The polymeric substance 252 may comprise any other suitable polymer in other embodiments. For example, in some embodiments, the polymeric substance 252 may comprise silicon, rubber, ethylene-vinyl acetate (EVA) etc.

10 The expansion agent 254 is combined with the polyurethane 252 to enable expansion of the expandable material 250 to its final shape after it has been molded. A quantity of the expansion agent 254 allows the expandable material 250 to expand by a substantial degree after being molded. For instance, in some embodiments, the expansion agent 254 may constitute at least 10%, in some cases at least 20%, in some cases at least 30%, in some cases at least 40%, in some cases at least 50%, and in some cases at least 60%, of the expandable material 250 by weight and in some cases even more. In 15 this example of implementation, the expansion agent 254 may constitute between 15% and 50% of the expandable material 250 by weight. Controlling the quantity of the expansion agent 254 may allow control of the expansion ratio of the post-molded expandable component 212x.

20 In this embodiment, as shown in Figure 42, the expansion agent 254 comprises an amount of expandable microspheres 260I -260M. Each expandable microsphere 260i comprises a polymeric shell 262 expandable by a fluid encapsulated in an interior of the polymeric shell 262. In this example of implementation, the polymeric shell 262 of the expandable microsphere 260i is a thermoplastic shell. The fluid encapsulated in the 25 polymeric shell 262 is a liquid or gas (in this case a gas) able to expand the expandable microsphere 260i when heated during manufacturing of the pad 36x. In some embodiments, the expandable microspheres 260I -260M may be ExpanceTM microspheres commercialized by Akzo Nobel. In other embodiments, the expandable microspheres 260I -260M may be Dualite microspheres commercialized by Flenkel; 30 Advancell microspheres commercialized by Sekisui; Matsumoto Microsphere microspheres commercialized by Matsumoto Yushi Seiyaku Co; or KUREFIA

Microsphere microspheres commercialized by Kureha. Various other types of expandable microspheres may be used in other embodiments.

In this example of implementation, the expandable microspheres **260I-260M** include dry unexpanded (DU) microspheres when combined with the polymeric substance 252 to create the expandable material 250 before the expandable material 250 is molded and subsequently expanded. For instance, the dry unexpanded (DU) microspheres may be provided as a powder mixed with one or more liquid constituents of the polymeric substance 252.

10

The expandable microspheres **260I-260M** may be provided in various other forms in other embodiments. For example, in some embodiments, the expandable microspheres **260I-260M** may include dry expanded, wet and/or partially-expanded microspheres. For instance, wet unexpanded microspheres may be used to get better bonding with the polymeric substance 252. Partially-expanded microspheres may be used to employ less of the polymeric substance 252, mix with the polymeric substance 252 in semi-solid form, or reduce energy to be subsequently provided for expansion.

20

In some embodiments, the expandable microspheres **260I-260M** may constitute at least 10%, in some cases at least 20%, in some cases at least 30%, in some cases at least 40%, in some cases at least 50%, and in some cases at least 60% of the expandable material 250 by weight and in some cases even more. In this example of implementation, the expandable microspheres **260I-260M** may constitute between 15% and 50% of the expandable material 250 by weight.

25

The post-molded expandable component 212x of the helmet 10 constituting the pad 36x may have various desirable qualities.

30

For instance, in some embodiments, the pad 36x may be less dense and thus lighter than if it was entirely made of the polyurethane 252, yet be more shock-absorbent

and/or have other better mechanical properties than if it was entirely made of the expandable microspheres 260I -260M.

For example, in some embodiments, a density of the expandable material 250 of the pad 36x may be less than a density of the polyurethane 252 (alone). For instance, the density of the expandable material 250 of the pad 36x may be no more than 70%, in some cases no more than 60%, in some cases no more than 50%, in some cases no more than 40%, in some cases no more than 30%, in some cases no more than 20%, in some cases no more than 10%, and in some cases no more than 5% of the density of the polyurethane 252 and in some cases even less. For example, in some embodiments, the density of the expandable material 250 of the pad 36x may be between 2 to 75 times less than the density of the polyurethane 252 ,i.e., the density of the expandable material 250 of the pad 36x may be about 1% to 50% of the density of the polyurethane 252).

15

The density of the expandable material 250 of the pad 36x may have any suitable value. For instance, in some embodiments, the density of the expandable material 250 of the pad 36x may be no more than 0.7 g/cm³, in some cases no more than 0.4 g/cm³ , in some cases no more than 0.1 g/cm³ , in some cases no more than 0.080 g/cm³, in some cases no more than 0.050 g/cm³, in some cases no more than 0.030 g/cm³, and/or may be at least 0.010 g/cm³. In some examples of implementation, the density of the expandable material 250 may be between 0.015 g/cm³ and 0.080 g/cm³, in some cases between 0.030 g/cm³ and 0.070 g/cm³, and in some cases between 0.040 g/cm³ and 0.060 g/cm³.

25

As another example, in some embodiments, a stiffness of the expandable material 250 of the pad 36x may be different from (i.e., greater or less than) a stiffness of the expandable microspheres 260I -260M (alone). For instance, a modulus of elasticity (i.e., Young's modulus) of the expandable material 250 of the pad 36x may be greater or less than a modulus of elasticity of the expandable microspheres 260I -260M (alone). For instance, a difference between the modulus of elasticity of the expandable material 250

of the pad 36x and the modulus of elasticity of the expandable microspheres **260I -260M** may be at least 20%, in some cases at least 30%, in some cases at least 50%, and in some cases even more, measured based on a smaller one of the modulus of elasticity of the expandable material 250 of the pad 36x and the modulus of elasticity of the 5 expandable microspheres **260I -260M**. In some cases, the modulus of elasticity may be evaluated according to ASTM D-638 or ASTM D-412.

As another example, in some embodiments, a resilience of the expandable material 250 of the pad 36x may be less than a resilience of the expandable microspheres **260I -260M** 10 (alone). For instance, in some embodiments, the resilience of the expandable material 250 of the pad 36x may be no more than 70%, in some cases no more than 60%, in some cases no more than 50%, in some cases no more than 40%, in some cases no more than 30%, in some cases no more than 20%, and in some cases no more than 10% of the resilience of the expandable microspheres **260I -260M** according to ASTM 15 D2632-01 which measures resilience by vertical rebound. In some examples of implementation, the resilience of the expandable material 250 of the pad 36x may be between 20% and 60% of the resilience of the expandable microspheres **260I -260M**. Alternatively, in other embodiments, the resilience of the expandable material 250 of the pad 36x may be greater than the resilience of the expandable microspheres **260I -260M**.

20

The resilience of the expandable material 250 of the pad 36x may have any suitable value. For instance, in some embodiments, the resilience of the expandable material 250 of the pad 36x may be no more than 40%, in some cases no more than 30%, in some cases no more than 20%, in some cases no more than 10% and in some cases 25 even less (e.g., 5%), according to ASTM D2632-01, thereby making the pad 36x more shock-absorbent. In other embodiments, the resilience of the expandable material 50 of the pad 36x may be at least 60%, in some cases at least 70%, in some cases at least 80% and in some cases even more, according to ASTM D2632-01, thereby making the expandable material 250 provide more rebound.

30

As another example, in some embodiments, a tensile strength of the expandable material 250 of the pad 36x may be greater than a tensile strength of the expandable microspheres **260I-260M** (alone). For instance, in some embodiments, the tensile strength of the expandable material 250 of the pad 36x may be at least 120%, in some cases at least 150%, in some cases at least 200%, in some cases at least 300%, in some cases at least 400%, and in some cases at least 500% of the tensile strength of the expandable microspheres **260I-260M** according to ASTM D-638 or ASTM D-412, and in some cases even more.

10 The tensile strength of the expandable material 250 of the pad 36x may have any suitable value. For instance, in some embodiments, the tensile strength of the expandable material 250 of the pad 36x may be at least 0.9 MPa, in some cases at least 1 MPa, in some cases at least 1.2 MPa, in some cases at least 1.5 MPa and in some cases even more (e.g. 2 MPa or more).

15 As another example, in some embodiments, an elongation at break of the expandable material 250 of the pad 36x may be greater than an elongation at break of the expandable microspheres **260I-260M** (alone). For instance, in some embodiments, the elongation at break of the expandable material 250 of the pad 36x may be at least 120%, in some cases at least 150%, in some cases at least 200%, in some cases at least 300%, in some cases at least 400%, and in some cases at least 500% of the elongation at break of the expandable microspheres **260I-260M** according to ASTM D-638 or ASTM D-412, and in some cases even more.

20 25 The elongation at break of the expandable material 250 of the pad 36x may have any suitable value. For instance, in some embodiments, the elongation at break of the expandable material 250 of the pad 36x may be at least 20%, in some cases at least 30%, in some cases at least 50%, in some cases at least 75%, in some cases at least 100%, and in some cases even more (e.g. 150% or more).

With additional reference to Figure 40, in this example of implementation the post-molded expandable component 212x constituting the pad 36x includes an additively manufactured component 12x. For example, the precursor 212x* of the post-molded expandable component 212x may be molded around the additively manufactured component 12x. In some embodiments, the additively manufactured component 12x may include a lattice with an open structure. In such embodiments, the expandable material 250 may extend at least partially into/through the additively manufactured component 12x.

5

10 Figure 43 shows a cross-sectional view of a sport helmet 10 with inner padding 15 that includes additively manufactured components 12i-124 integrated into post-molded expandable components 212i-2124 constituting pads 36i-364. In this example of implementation, the additively manufactured component 12i-124 are made from additively manufactured material 50 and act as a reinforcing structure or armature for 15 the post-molded expandable components 212i-2124.

In some embodiments, an AM component may comprise expandable material. For example, rather than being molded and then expanded through a post-molded expansion process like the one discussed above with reference to Figures 40 to 43, an 20 expandable component may instead be additively manufactured by additively-manufacturing a precursor and then expanding the precursor into a post-additively-manufactured (post-AM) expandable component through a post-AM expansion process.

For example, referring again to Figures 18 to 20, the inner padding 15 of the helmet 10 25 may include post-AM expandable components 512 constituting the pads 36i to 36x. Utilizing post-AM expandable components has many potential benefits, such as potentially reducing the time required for the additive-manufacturing, because the physical size of the precursor is potentially many times smaller than that of the fully expanded component. For example, the additional time required to expand a post-AM 30 precursor into a post-AM expandable component may be more than offset by a reduction in time required to additively-manufacture the physically smaller precursor.

Furthermore, and the use of post-AM expandable components may also allow components to be made lighter/less dense for a given volume while still satisfying other desirable performance characteristics, such as impact absorption, resiliency, structural integrity, etc.

5

Figure 44 shows an example of a precursor 512x* of a post-AM expandable component 512x being expanded to form the post-AM expandable component 512x constituting a pad 36x. In this example, the pad 36x corresponds to the left and right pads 363 and 364 that were shown previously in Figures 18 to 20. In this example of implementation, 10 the post-AM expandable component 512x of the helmet 10 constituting the pad 36x comprises an expandable material 550 that is additively-manufactured into a precursor 512x* which can then be expanded by a stimulus (e.g., heat or another stimulus) to an expanded shape that is a scaled-up version of an initial shape of the precursor 512x*. Thus, in this example, a three-dimensional configuration of the initial shape of the 15 precursor 512x* is such that, once the expandable material 550 is expanded, a three-dimensional configuration of the expanded shape of the post-AM expandable component 512x imparts a three-dimensional configuration of the pad 36x (e.g., including curved and/or angular parts of the pad 36x).

20 The post-AM expandable component 512x of the helmet 10 constituting the pad 36x is “expandable” in that it is capable of expanding and/or has been expanded by a substantial degree in response to a stimulus after being additively-manufactured. That is, an expansion ratio of the post-AM expandable component 512x of the helmet 10 constituting the pad 36x, which refers to a ratio of a volume of the post-AM expandable 25 component 512x of the helmet 10 after the expandable material 550 has been expanded subsequently to having been additively-manufactured into the precursor 512x* over a volume of the precursor 512x* into which the expandable material 550 is initially additively-manufactured, may be significantly high. For example, in some embodiments, the expansion ratio of the post-AM expandable component 512x of the helmet 10 30 constituting the pad 36x may be at least 2, in some cases at least 3, in some cases at

least 5, in some cases at least 10, in some cases at least 20, in some cases at least 30, in some cases at least 40 and in some cases even more (e.g., 45).

5 In such embodiments, the expandable material 550 can be any material capable of expanding after being additively-manufactured. For example, the expandable material 550 may include a mixture of a polymeric substance and an expansion agent that allows the expandable material 550 to expand after an additive manufacturing step has been done to form the expandable material 550 into a precursor component. Once expanded 10 into its final shape, the pad 36x may have desirable properties, such as being more shock-absorbent than it if had been made entirely of the expansion agent and/or being lighter than if it had been made entirely of the polymeric substance.

15 In some embodiments, a polymeric substance may constitute a substantial part of the expandable material 550 and may substantially contribute to structural integrity of the pad 36x. For instance, in some embodiments, a polymeric substance may constitute at least 40%, in some cases at least 50%, in some cases at least 60%, in some cases at least 70%, in some cases at least 80%, and in some cases at least 90% of the expandable material 550 by weight.

20 In some embodiments, the expandable material 550 may comprise a polymeric substance that is elastomeric. For instance, the expandable material 550 may comprise a polymeric substance such as a thermoplastic elastomer (TPE) or a thermoset elastomer (TSE). In some embodiments, the polymeric substance may comprise polyurethane. The polyurethane may be composed of any suitable constituents such as 25 isocyanates and polyols and possibly additives. For instance, in some embodiments, the polyurethane may have a hardness in a scale of Shore 00, Shore A, Shore C or Shore D, or equivalent. For example, in some embodiments, the hardness of the polyurethane may be between Shore 5A and 95A or between Shore D 40D to 93D. Any other suitable polyurethane may be used in other embodiments.

In other embodiments, the expandable material 550 may comprise any other suitable polymer in other embodiments. For example, in some embodiments, the expandable material 550 may include a polymeric substance such as silicon, rubber, etc.

5 In some embodiments an expansion agent may be combined with a polymeric substance, such as polyurethane, to enable expansion of the expandable material 550 to its final shape after the precursor 512x* has been additively-manufactured.

A quantity of the expansion agent allows the expandable material 550 to expand by a 10 substantial degree after being additively-manufactured to form the precursor 512x*. For instance, in some embodiments, the expansion agent may constitute at least 10%, in some cases at least 20%, in some cases at least 30%, in some cases at least 40%, in some cases at least 50%, and in some cases at least 60%, of the expandable material 550 by weight and in some cases even more. Controlling the quantity of the expansion 15 agent may allow control of the expansion ratio of the post-AM expandable component 5 12x.

The post-AM expandable component 512x of the helmet 10 constituting the pad 36x may have various desirable qualities similar to the post-molded expandable component 20 212x described earlier.

In some embodiments, the combining of the polymeric substance and the expansion agent occurs during the additive-manufacturing process, and there is an intermediary polymerizing step to polymerize the polymeric substance and the expansion agent 25 before the further step of expansion of the precursor 512x* into the post-AM expandable component 512x. For example, the intermediate polymerizing step might involve applying heat, light or some other form of energy to the preliminary formed combination of the polymeric substance and the expansion agent in order to promote polymerization without causing expansion.

The additive manufacturing technology utilized in such embodiments could include any one or more of the additive manufacturing technologies discussed earlier. For instance, in one example of implementation, a vat photopolymerization AM technology, such as SLA, DLP or CDLP may be used to light-cure a mixture of a polymeric substance and an expansion agent. For example, in such embodiments, a planetary mixer or any other suitable mixer may be used to first mix the polymeric substance (e.g., polyurethane or acrylic) with the expansion agent (e.g., expandable microspheres, such as unexpanded Expancel, Dualite microspheres, Advancell microspheres, etc.), and then a SLA, DLP or CDLP type 3D printer may be used to light-cure the polymeric substance / expansion agent mixture to consolidate the material into a preliminary form. In such embodiments, final polymerization of the polymeric substance / expansion agent mixture may be done using a heat and/or light source that does not reach the expansion temperature of the expansion agent so that the temperature of the expandable material during the additive-manufacturing is lower than the expansion temperature of the expansion agent. For instance, in some embodiments where the expansion temperature of the expansion agent may be 70°C or more, the additive-manufacturing process may be carried out such that the temperature of the expandable material 550 being additively-manufactured into the precursor 512x* is less than 70°C (e.g., 40 °C). Once the polymerization step has been completed, the expansion phase may be activated by using a heat source to raise the temperature of the expandable material 550 above the expansion temperature of the expansion agent.

Other AM technologies may be used to additively-manufacture expandable components in other embodiments. For example, Figure 45 shows an example of a binder jetting 3D printer system 500 being used to additively manufacture a precursor 512x* of a post-AM expandable component 512x in accordance with another embodiment of the present disclosure. In binder jetting, a binder is selectively deposited onto a bed of powder to selectively bond areas together to form solid parts layer-by-layer. The binder jetting 3D printer system 500 includes a build platform 502, a recoating blade 506 and a binder nozzle carriage 508. In operation, the recoating blade 506 first spreads a bed or layer of powder expansion agent 504 (e.g., unexpanded Expancel, Dualite microspheres,

Advancell microspheres, etc.) over the build platform 502. Then, the binder jetting nozzle carriage 508, which includes jetting nozzles similar to the nozzles used in desktop inkjet 2D printers, is moved over the powder bed 504 and the nozzles are controlled to selectively deposit droplets of a binding agent (e.g., a polymeric substance such as polyurethane) that bonds the powder particles of the expansion agent together. When a layer is complete, the build platform 502 moves downwards and the recoating blade 506 spreads a new layer of powder expansion agent 504 to re-coat the powder bed. This process then repeats until the preliminary form of the precursor 512x* is complete. After printing, the preliminary form of the precursor 512x* may be removed from the powder bed and unbound, excess powder expansion agent may be removed via pressurized air. Similar to the previous vat photopolymerization example, the final polymerization or curing of the preliminary form of the precursor 512x* may be done using a heat source that does not reach the expansion temperature of the expansion agent. For instance, in some embodiments where the expansion temperature of the expansion agent may be 70°C or more, the preliminary form of the precursor 512x* may be cured in an oven at 50-60°C after being removed from the powder bed. Once the polymerization step has been completed and the precursor 512x* has been cured, the expansion phase may be activated by raising the temperature of the expandable material 550 above the expansion temperature of the expansion agent.

20

Referring again to the example embodiment of a sport helmet 10 shown in Figure 43, it is noted that, in addition to the inner padding 15, in this embodiment the helmet 10 also includes comfort pads 371 -374. In some embodiments, the comfort pads 371 -374 may also or instead include additively manufactured components. For example, in some embodiments, the additively manufactured components 12x of the helmet 10 may instead constitute the comfort pads 37x.

Figure 46 shows an exploded view of an example of inner padding 15 for a sport helmet in which the comfort pads 37x include additively manufactured components 12x. In particular, in this example of implementation, the inner padding 15 includes absorption pads 361 -36A, and additively manufactured components 12i-12K constituting comfort

pads **37i-37K**. In this example of implementation, the comfort pads **37i -37K** are made from an additively manufactured material **50**, which, in some embodiments, could be an expandable material **550** as described above. In contrast, the absorption pads **36i -36A** may be made from a more conventional non-additively manufactured material **350**, such 5 as EPP or ExpanceL.

In some embodiments, the comfort pads **37i -37K** are configured for low energy levels that reach a targeted 35 shore OO durometer or less. Since additively manufactured material **50** can be a solid material rather than a material with an open cell structure, 10 such as many conventional memory foams, implementing the comfort pads **37i -37K** with additively manufactured components **12i-12K** may address the water absorption problem that often occurs when materials with open cell structures are used for comfort padding parts in order to provide a desired level of comfort. For example, in some 15 embodiments a relatively low hardness and feel to provide a desired level of comfort could be achieved by using a relatively small mesh lattice structure with relatively thin elongate members.

Figure **47** shows a cross-sectional view of a portion of the inner padding of Figure **46** showing that the additively manufactured component **122** constituting the comfort pad 20 **372** lies between the wearer's head and the absorption pad **36i** when the helmet **10** is worn. In some embodiments the comfort pads **37i -37K** may be affixed to the absorption pads **36i -36A**. In other embodiments the comfort pads may be otherwise affixed to the helmet, but may be moveable relative to the absorption pads. In some embodiments, 25 the comfort pads may also or instead be moveable relative to one another, e.g., during adjustment of the fit of the helmet and/or as a result of deflection of the helmet due to an impact.

As noted above with reference to the example hockey helmet **10** shown in Figures I Q- 20, in some embodiments the shock-absorbing materials used in the liner **15** may 25 include liquid crystal elastomer (LCE) components in order to enhance their impact absorbing performance, e.g., to provide better impact energy dissipation. A mesogen is

a compound that displays liquid crystal properties. Mesogens can be described as disordered solids or ordered liquids because they arise from a unique state of matter that exhibits both solid-like and liquid-like properties called the liquid crystalline state. This liquid crystalline state is called the mesophase and occurs between the crystalline 5 solid state and the isotropic liquid state at distinct temperature ranges. LCEs are materials that are made up of slightly crosslinked liquid crystalline polymer networks. LCE materials combine the entropy elasticity of an elastomer with the self-organization of a liquid crystalline phase. In LCEs, the mesogens can either be part of the polymer chain (main-chain liquid crystalline elastomers) or they are attached via 10 an alkyl spacer (side-chain liquid crystalline elastomers).

Figure 48A shows an example of a main-chain LCE material 400 in which the mesogens 404 are part of polymer chains 402 that are slightly crosslinked at crosslinks 406. As shown in Figure 48A, when the LCE material 400 is uncompressed the 15 mesogenic groups 404 are generally aligned. When a compressive force is applied to the LCE material 400, as shown in Figure 48B, the mesogenic groups 404 are displaced out of alignment. The displacement of the mesogenic groups 404 serves to elastically dissipate the energy of the applied force and afterward return to substantially the same state as shown in Figure 48A. In this way, many LCE materials provide better impact 20 absorbing performance relative to conventional shock-absorbing materials such as polymeric foam

In some embodiments, one or more of the pads 36x of the liner 15 for a helmet 10 may have a hybrid structure that includes a combination of shock-absorbing materials, such 25 as non-AM LCE materials/components, AM LCE materials/components (e.g., 3D printed LCE components) and/or more conventional shock-absorbing materials/components (e.g., EPP foam, EPS foam, PORON XRD foam, etc.) that may be fabricated using non-AM and/or AM technologies. For example, Figure 49 shows an example of a pad 36x in which multiple column- or cylinder-shaped LCE components 400 are embedded 30 in a polymeric foam structure constituting the remainder of the pad 36x. The column-shaped LCE components 400 are arranged such that the elongated dimension of each

column extends in a direction that is generally radial to a wearer's head. Although the LCE components are cylindrical or column-shaped in this example, more generally LCE components or other shock-absorbing materials that are utilized in a hybrid structure may be any suitable shape, e.g., in some embodiments one or more of the shock-absorbing materials in a hybrid structure may be designed to provide optimized attenuation under impact (specific buckling, twisting, collapsing).

In this example shown in Figure 49, the pad 36x forms part of the side padding for a helmet and the LCE components 400 are located in a portion of the pad 36x that would face the wearer's temple region when the helmet is worn in order to enhance lateral impact absorption. In other embodiments, LCE components may also or instead be incorporated into padding that faces other portions of the wearer's head, such as the front region, top region, back region and/or occipital region. In some embodiments, the LCE components used in different regions of the helmet may be configured with different shapes, sizes and/or materials in order to provide different impact-absorbing properties in different regions.

In some embodiments, the additively manufactured components 12x constituting the pads 36x and/or the comfort pads 37x of the helmet 10 may have LCE components integrated into the pads. For example, Figure 50 shows an example of an AM component 12x that has a lattice structure into which a cluster of four column-shaped LCE components 400 have been embedded. The four LCE components 400 have been thinly outlined in Figure 50 in order to allow them to be more easily identified in the image. In some embodiments, the lattice structure of the AM component 12x may be formed from a shock-absorbing material that includes a polymeric foam and/or a polymeric structure comprising one or more polymeric materials, while the LCE components 400 may include any suitable LCE material. The column shape of the LCE components in this example is merely illustrative of one example shape that may be used in some embodiments. Differently shaped and/or sized LCE components may be used in other embodiments. In some embodiments, the spaces in the AM component 12x for receiving and retaining the LCE components 400 may be formed in the AM

component 12x during the additive manufacturing process. In other embodiments, the spaces may be created after the additive manufacturing process, e.g., by drilling or cutting into the AM component 12x to create the spaces.

5 One of the common problems that is encountered when designing helmet liner/padding parts is air channel integration. It is often desirable to provide a high level of ventilation, but conventional molding techniques that have traditionally been used to manufactured helmet liner/padding parts limit the types of structures that can practically be realized. The use of additively manufactured components with lattice structures to implement 10 liner/padding parts may solve some of these problems, because a lattice can be implemented as an open structure that permits air flow. However, in some embodiments, a desired level of ventilation may be achieved by also or instead using non-lattice additively manufactured components that have air channels formed in and/or on them that could not be practically mouldable by traditional molding. For example, in 15 some embodiments the additively manufactured components 12x constituting the pads 36x and/or the comfort pads 37x of the helmet 10 may have air channels integrated in the core of the pads.

Figure 51 shows a cross-sectional view of a sport helmet 10 with inner padding that 20 includes air channels 39 integrally formed within additively manufactured components 12i, 123, 124 constituting the absorption pads 36i, 363, 364 of the inner padding. The outer shell 11 of the helmet 10 may include apertures (not shown in Figure 51) that allow air in the air channels 39 to exit the helmet 10. Similarly, the absorption pads 36i, 363, 364 may include apertures (not shown in Figure 51) that permit heated air from the 25 interior of the helmet to pass into the air channels 39 in order eventually exit the helmet 10. For example, portions of the absorption pads 36i, 363, 364 nearest the wearer's head when the helmet is worn may have an open lattice structure to permit this air flow from the interior of the helmet into the air channels 39. In such embodiments, portions 30 of the absorption pads 36i, 363, 364 furthest from the wearer's head when the helmet 10 is worn, i.e., the portions of the absorption pads 36i, 363, 364 proximal the outer shell 11 may be manufactured with a solid non-lattice structure. In other embodiments, the

absorption pads 36i, 363, 364 may be wholly formed with a solid non-lattice structure. In other embodiments, the absorption pads 36i, 363, 364 may be wholly formed with a lattice structure. In such embodiments, the cross-sectional area of the air channels 39 may be greater than the cross-sectional area of spaces between elongate members of 5 the lattice structure itself.

While in many of the embodiments described above the inner liner 15 of the helmet 10 comprises the AM components 12i-1 2A, in other embodiments, another part of the helmet 10 may comprise one or more AM components such as the AM components 10 12i-12A. For instance, in some embodiments, as shown in Figure 52, when the helmet 10 comprises a faceguard 14, the faceguard 14 and/or a chin cup 112 mounted to the chin strap 16 of the helmet 10 to engage a chin of the user may comprise an AM component constructed using principles described here in respect of the AM components 12i-12A. A cage or visor faceguard 14 comprising an AM component may 15 have several advantages relative to a conventional faceguard. For example, a conventional cage faceguard is typically manufactured by welding together a plurality of elongate metal members to form a cage. In the conventional cage faceguard, the elongate metal members are welded together where they overlap. These welds are a potential point of failure. In contrast, as shown in Figure 52, in an additively-manufactured cage faceguard 14, the vertically oriented elongate members 113 may 20 directly intersect the horizontally oriented elongate members 117 at points of intersection 115. In addition, the use of additive-manufacturing makes it feasible to customize the positioning and/or profile of the elongate members 113, 115 of the faceguard 14. For example, the positioning of the elongate members 113, 115 may be 25 customized based on the eye positions of an intended user (e.g., pupillary distance, location of eyes relative to the top and/or sides of the head, etc.). Furthermore, the profiles of the elongate members 113, 115 of the faceguard may be tapered and/or shaped to minimize their impact on the user's field of vision. For example, portions of the elongate members 113, 115 that may fall within the user's field of vision may have 30 an ovoid cross-section, with a major axis of the ovoid oriented substantially parallel with the user's line of sight.

Figures 53A, 53B and 53C show another example of an additively-manufactured cage faceguard 14. In this example, the additively-manufactured cage faceguard 14 has been formed by 3D printing metal and is configured as a faceguard for a goalie mask.

5 Similar to the faceguard 14 shown in Figure 52, the example implementation of a faceguard 14 shown in Figures 53A-C includes elongate members 113 and 117 that merge into one another at points of intersection 115.

In some embodiments, at least part of the outer shell 11 may comprise an AM 10 component that is similar to the AM components 12I-12A. For instance, a given one of the front shell member 22 and the rear shell member 24 of the outer shell 11 may comprise an AM component.

Although in embodiments considered above the helmet 10 is a hockey helmet, in other 15 embodiments, the helmet 10 may be any other helmet usable by a player playing another type of contact sport (e.g., a “full-contact” sport) in which there are significant impact forces on the player due to player-to-player and/or player-to-object contact or any other type of sports, including athletic activities other than contact sports.

20 For example, in other embodiments, as shown in Figure 54, the helmet 10 may be a lacrosse helmet. The lacrosse helmet 10 comprises a chin piece 72 extending from the left lateral side portion 25L to the right lateral side portion 25R of the helmet 10 and configured to extend in front of a chin area of the user. The lacrosse helmet 10 also comprises the faceguard 14 which is connected to the shell 11 and the chin piece 72.

25

The lacrosse helmet 10 may be constructed according to principles discussed herein. For example, in some embodiments, the lacrosse helmet 10 may the additively-manufactured components 12I-12A, as discussed above. For instance, in some 30 embodiments, the additively-manufactured components 12I-12A may constitute at least part of the shell 11, at least part of the liner 15, at least part of the chin piece 72, and/or at least part of the faceguard 14, according to principles discussed herein.

In other embodiments, the helmet 10 may be a baseball/softball helmet or any other type of helmet.

5 While in many of the embodiments described above it is the inner liner 15 of a helmet 10 that comprises an AM component, in other embodiments, another part of the helmet 10 may comprise one or more AM components. For instance, referring again to Figure 5, in some embodiments when the helmet 10 comprises a faceguard 14, a chin cup 112 mounted to the chin strap 16 of the helmet 10 to engage a chin of the user may 10 comprise a post-AM expandable component constructed using principles described here in respect of the post-AM expandable component 512x described herein. In some embodiments, at least part of the outer shell 11 may comprise a post-AM expandable component that is similar to the post-AM expandable component 512x. For instance, a given one of the front shell member 22 and the rear shell member 24 of the outer shell 15 11 may comprise a post-AM expandable component.

Moreover, although in many of the embodiments described above the article of protective athletic gear comprising an AM component is a helmet, in other embodiments, the article of protective athletic gear may be any other article of 20 protective athletic gear comprising one or more AM components. For example, with reference again to Figure 33, in some embodiments the example implementation of an additively manufactured shoulder pad shown in Figure 33 may be constructed as a post-AM expandable component using principles described herein in respect of the post-AM expandable component 512x.

25

Certain additional elements that may be needed for operation of some embodiments have not been described or illustrated as they are assumed to be within the purview of those of ordinary skill in the art. Moreover, certain embodiments may be free of, may lack and/or may function without any element that is not specifically disclosed herein.

30

Any feature of any embodiment discussed herein may be combined with any feature of any other embodiment discussed herein in some examples of implementation.

In case of any discrepancy, inconsistency, or other difference between terms used
5 herein and terms used in any document incorporated by reference herein, meanings of the terms used herein are to prevail and be used.

Although various embodiments and examples have been presented, this was for purposes of describing, but should not be limiting. Various modifications and
10 enhancements will become apparent to those of ordinary skill and are within a scope of this disclosure.

CLAIMS

1. A helmet comprising:

- a shell comprising shell members movable relative to one another;
- a liner disposed within the shell; and
- an adjustment system operable to adjust a fit of the helmet on a user's head by moving the shell members relative to one another;

5 wherein: the helmet comprises an additively-manufactured component; and at least part of the additively-manufactured component moves when the adjustment system
10 is operated to adjust the fit of the helmet.

2. The helmet of claim 1, wherein: at least part of the additively-manufactured component is disposed in a lateral side portion of the helmet; and a thickness of the additively-manufactured component at the lateral side portion of the helmet is no
15 more than 22 mm.

3. The helmet of claim 2, wherein the thickness of the additively-manufactured component at the lateral side portion of the helmet is no more than 20 mm.

20 4. The helmet of claim 2, wherein the thickness of the additively-manufactured component at the lateral side portion of the helmet is no more than 18 mm.

5. The helmet of claim 2, wherein the thickness of the additively-manufactured component at the lateral side portion of the helmet is no more than 16 mm.

25 6. The helmet of claim 1, wherein when the helmet is impacted where the additively-manufactured component is located in accordance with hockey STAR methodology, linear acceleration at a center of gravity of a headform on which the helmet is worn is no more than a value indicated by curves L1_upper-L3_upper shown in Figures 21A-
30 21C for impacts at three energy levels according to hockey STAR methodology for a thickness of the additively-manufactured component where impacted.

7. The helmet of claim 6, when the helmet is impacted where the additively-manufactured component is located in accordance with hockey STAR methodology, linear acceleration at a center of gravity of a headform on which the helmet is worn is no more than a value indicated by curves L1-L3 shown in Figures 21A-21 C for impacts at three energy levels according to hockey STAR methodology for a thickness of the additively-manufactured component where impacted.

5

8. The helmet of claim 7, wherein when the helmet is impacted where the additively-manufactured component is located in accordance with hockey STAR methodology, the linear acceleration at the center of gravity of the headform on which the helmet is worn is no more than 90% of the value indicated by curves L1-L3 shown in Figures 21A-21 C for impacts at three energy levels according to hockey STAR methodology for the thickness of the additively-manufactured component where impacted.

10

9. The helmet of claim 7, wherein when the helmet is impacted where the additively-manufactured component is located in accordance with hockey STAR methodology, the linear acceleration at the center of gravity of the headform on which the helmet is worn is no more than 80% of the value indicated by curves L1-L3 shown in Figures 21A-21 C for impacts at three energy levels according to hockey STAR methodology for the thickness of the additively-manufactured component where impacted.

15

20

10. The helmet of claim 6, wherein when the helmet is impacted where the additively-manufactured component is located in accordance with hockey STAR methodology, the linear acceleration at the center of gravity of the headform on which the helmet is worn is no more than a value indicated by curves L1 lower-L3i upper shown in Figures 21A-21 C for impacts at three energy levels according to hockey STAR methodology for the thickness of the additively-manufactured component where impacted.

25

30

11. The helmet of claim 1, wherein when a stress applied to the additively-manufactured component is unloaded, strain of the additively-manufactured component is no more than a value indicated by the Unloading curve shown in Figure 22A for the unloading of the applied stress.

5

12. The helmet of claim 1, wherein the additively-manufactured component comprises a plurality of distinct zones structurally different from one another.

13. The helmet of claim 12, wherein the distinct zones of the additively-manufactured component differ in stiffness.

14. The helmet of claim 13, wherein a ratio of the stiffness of a first one of the distinct zones of the additively-manufactured component over the stiffness of a second one of the distinct zones of the additively-manufactured component is at least 20%.

15

15. The helmet of claim 13, wherein a ratio of the stiffness of a first one of the distinct zones of the additively-manufactured component over the stiffness of a second one of the distinct zones of the additively-manufactured component is at least 30%.

20 16. The helmet of claim 12, wherein the distinct zones of the additively-manufactured component differ in resilience.

25 17. The helmet of claim 16, wherein a ratio of the resilience of a first one of the distinct zones of the additively-manufactured component over the resilience of a second one of the distinct zones of the additively-manufactured component is at least 110%.

30 18. The helmet of claim 16, wherein a ratio of the resilience of a first one of the distinct zones of the additively-manufactured component over the resilience of a second one of the distinct zones of the additively-manufactured component is at least 120%.

19. The helmet of claim 12, wherein the distinct zones of the additively-manufactured component are configured to protect against different types of impacts.
- 5 20. The helmet of claim 19, wherein: a first one of the distinct zones of the additively-manufactured component is configured to protect more against linear impact components than rotational impact components; and a second one of the distinct zones of the additively-manufactured component is configured to protect more against rotational impact components than linear impact components.
- 10
- 15 21. The helmet of claim 19, wherein: a first one of the distinct zones of the additively-manufactured component is configured to protect more against higher-energy impacts than lower-energy impacts; and a second one of the distinct zones of the additively-manufactured component is configured to protect more against lower-energy impacts than higher-energy impacts.
22. The helmet of claim 12, wherein a first one of the distinct zones of the additively-manufactured component is less stiff in shear than a second one of the distinct zones of the additively-manufactured component.
- 20
23. The helmet of claim 23, wherein the second one of the distinct zones of the additively-manufactured component is less stiff in compression than the first one of the distinct zones of the additively-manufactured component.
- 25 24. The helmet of claim 22, wherein a ratio of a stiffness in shear of the first one of the distinct zones of the additively-manufactured component over the stiffness in shear of the second one of the distinct zones of the additively-manufactured component is no more than 90%.
- 30 25. The helmet of claim 22, wherein a ratio of a stiffness in shear of the first one of the distinct zones of the additively-manufactured component over the stiffness in shear

of the second one of the distinct zones of the additively-manufactured component is no more than 70%.

26. The helmet of claim 23, wherein a ratio of a stiffness in compression of the first one
5 of the distinct zones of the additively-manufactured component over the stiffness in compression of the second one of the distinct zones of the additively-manufactured component is at least 110%.
27. The helmet of claim 23, wherein a ratio of a stiffness in compression of the first one
10 of the distinct zones of the additively-manufactured component over the stiffness in compression of the second one of the distinct zones of the additively-manufactured component is at least than 120%.
28. The helmet of claim 12, wherein the distinct zones of the additively-manufactured
15 component include at least three distinct zones.
29. The helmet of claim 12, wherein the distinct zones of the additively-manufactured component are layers of the additively-manufactured component that are layered on one another.
- 20 30. The helmet of claim 12, wherein at least one of the distinct zones of the additively-manufactured component comprises a hybrid combination of structural members that includes elongate members and planar members.
- 25 31. The helmet of claim 1, wherein the additively-manufactured component comprises a lattice.
32. The helmet of claim 31, wherein the lattice comprises a plurality of distinct zones structurally different from one another.
- 30 33. The helmet of claim 32, wherein the distinct zones of the lattice differ in stiffness.

34. The helmet of claim 33, wherein a ratio of the stiffness of a first one of the distinct zones of the lattice over the stiffness of a second one of the distinct zones of the lattice is at least 110%.

5

35. The helmet of claim 33, wherein a ratio of the stiffness of a first one of the distinct zones of the lattice over the stiffness of a second one of the distinct zones of the lattice is at least 120%.

10 36. The helmet of claim 32, wherein the distinct zones of the lattice differ in resilience.

37. The helmet of claim 35, wherein a ratio of the resilience of a first one of the distinct zones of the lattice over the resilience of a second one of the distinct zones of the lattice is at least 110%.

15

38. The helmet of claim 35, wherein a ratio of the resilience of a first one of the distinct zones of the lattice over the resilience of a second one of the distinct zones of the lattice is at least 120%.

20 39. The helmet of claim 32, wherein the distinct zones of the lattice are configured to protect against different types of impacts.

40. The helmet of claim 32, wherein: a first one of the distinct zones of the lattice is configured to protect more against linear impact components than rotational impact components; and a second one of the distinct zones of the lattice is configured to protect more against rotational impact components than linear impact components.

25

41. The helmet of claim 32, wherein: a first one of the distinct zones of the lattice is configured to protect more against higher-energy impacts than lower-energy impacts; and a second one of the distinct zones of the lattice is configured to protect more against lower-energy impacts than higher-energy impacts.

30

42. The helmet of claim 32, wherein a first one of the distinct zones of the lattice is less stiff in shear than a second one of the distinct zones of the lattice.
- 5 43. The helmet of claim 42, wherein the second one of the distinct zones of the lattice is less stiff in compression than the first one of the distinct zones of the lattice.
- 10 44. The helmet of claim 42, wherein a ratio of a stiffness in shear of the first one of the distinct zones of the lattice over the stiffness in shear of the second one of the distinct zones of the lattice is no more than 90%.
45. The helmet of claim 42, wherein a ratio of a stiffness in shear of the first one of the distinct zones of the lattice over the stiffness in shear of the second one of the distinct zones of the lattice is no more than 70%.
- 15 46. The helmet of claim 43, wherein a ratio of a stiffness in compression of the first one of the distinct zones of the lattice over the stiffness in compression of the second one of the distinct zones of the lattice is at least 110%.
- 20 47. The helmet of claim 43, wherein a ratio of a stiffness in compression of the first one of the distinct zones of the lattice over the stiffness in compression of the second one of the distinct zones of the lattice is at least 120%.
- 25 48. The helmet of claim 32, wherein a density of the lattice in a first one of the distinct zones of the lattice is greater than the density of the lattice in a second one of the distinct zones of the lattice.
- 30 49. The helmet of claim 32, wherein a spacing of elongate members of the lattice in a first one of the distinct zones of the lattice is less than the spacing of elongate members of the lattice in a second one of the distinct zones of the lattice.

50. The helmet of claim 32, wherein elongate members of the lattice in a first one of the distinct zones of the lattice are cross-sectionally larger than elongate members of the lattice in a second one of the distinct zones of the lattice.
- 5 51. The helmet of claim 32, wherein an orientation of elongate members of the lattice in a first one of the distinct zones of the lattice is different from the orientation of elongate members of the lattice in a second one of the distinct zones of the lattice.
- 10 52. The helmet of claim 32, wherein a material composition of the lattice in a first one of the distinct zones of the lattice is different from the material composition of the lattice in a second one of the distinct zones of the lattice.
53. The helmet of claim 32, wherein the distinct zones of the lattice include at least three distinct zones.
- 15 54. The helmet of claim 32, wherein the distinct zones of the lattice are layers of the lattice that are layered on one another.
- 20 55. The helmet of claim 32, wherein at least one of the distinct zones of the lattice comprises a hybrid combination of structural members that includes elongate members and planar members.
56. The helmet of claim 1, wherein the liner comprises the additively-manufactured component.
- 25 57. The helmet of claim 1, wherein the shell comprises the additively-manufactured component.
58. The helmet of claim 1, wherein: the additively-manufactured component is a first additively-manufactured component; the helmet comprising a second additively-manufactured component.

59. The helmet of claim 58, wherein the liner comprises the first additively-manufactured component and the second additively-manufactured component.

5 60. The helmet of claim 58, wherein the liner comprises the first additively-manufactured component and the shell comprises the second additively-manufactured component.

10 61. The helmet of claim 1, wherein the additively-manufactured component comprises a plurality of materials different from one another.

62. The helmet of claim 61, wherein a first one of the materials is a first polymeric material and a second one of the materials is a second polymeric material.

15 63. The helmet of claim 61, wherein a first one of the materials is a polymeric material and a second one of the materials is a non-polymeric material.

64. The helmet of claim 61, wherein a first one of the materials is a polymeric material and a second one of the materials is a liquid crystal elastomer material.

20 65. The helmet of claim 31, wherein the additively-manufactured component comprises a non-lattice member connected to the lattice.

66. The helmet of claim 65, wherein the non-lattice member is configured to be positioned between the lattice and a user's head when the helmet is worn.

25 67. The helmet of claim 65, wherein the non-lattice member is positioned between the lattice and the shell.

30 68. The helmet of claim 65, wherein the non-lattice member is thinner than the lattice.

69. The helmet of claim 65, wherein the non-lattice member is bulkier than the lattice.
70. The helmet of claim 65, wherein the non-lattice member is a thin member.
- 5 71. The helmet of claim 64, wherein the non-lattice member is a covering that covers at least part of the lattice and constitutes at least part of a surface of the additively-manufactured component.
- 10 72. The helmet of claim 1, further comprising a liquid crystal elastomer component connected to the additively-manufactured component.
73. The helmet of claim 72, wherein the liquid crystal elastomer component is integrated into the liner.
- 15 74. The helmet of claim 72, wherein the liquid crystal elastomer component extends through the additively-manufactured component.
75. The helmet of claim 72, wherein the liquid crystal elastomer component is an elongate member with a direction of elongation extending in a direction that is generally radial with respect to a wearer's head when the helmet is worn.
- 20 76. The helmet of claim 75, wherein the liquid crystal elastomer component is generally column-shaped.
77. The helmet of claim 72, wherein the liquid crystal elastomer component is a first liquid crystal elastomer component; the helmet comprising at least one other liquid crystal elastomer component such that the helmet comprises a plurality of liquid crystal elastomer components.
- 25 78. The helmet of claim 77, wherein the helmet comprises: a first plurality of liquid crystal elastomer components located in an area proximal a right temple region of a

wearer's head when the helmet is worn; and a second plurality of liquid crystal elastomer components located in an area proximal a left temple region of the wearer's head when the helmet is worn.

5 79. The helmet of claim 76, wherein the liquid crystal elastomer components reside at selected locations around a wearer's head when the helmet is worn.

80. The helmet of claim 79, wherein clusters of the liquid crystal elastomer components are disposed in selected locations around the wearer's head when the helmet is
10 worn.

81. A helmet comprising:

- a shell; and
- a liner disposed within the shell;

15 wherein: the helmet comprises an additively-manufactured component; at least part of the additively-manufactured component is disposed in a lateral side portion of the helmet; and a thickness of the additively-manufactured component at the lateral side portion of the helmet is no more than 22 mm.

20 82. The helmet of claim 81 further comprising a liquid crystal elastomer component connected to the additively-manufactured component at the lateral side portion of the helmet.

25 83. The helmet of claim 82, wherein the liquid crystal elastomer component is an elongate member with a direction of elongation extending in a direction that is generally radial with respect to a wearer's head when the helmet is worn.

84. The helmet of claim 83, wherein the liquid crystal elastomer component is generally column-shaped.

85. The helmet of claim 82, wherein the liquid crystal elastomer component is a first liquid crystal elastomer component; the helmet comprising at least one other liquid crystal elastomer component such that the helmet comprises a plurality of liquid crystal elastomer components disposed at the lateral side portion of the helmet.

5

86. A helmet comprising:

- a shell; and
- a liner disposed within the shell;

wherein: the helmet comprises an additively-manufactured component comprising a plurality of distinct zones structurally different from one another.

10

87. A helmet comprising:

- a shell; and
- a liner disposed within the shell;

15 wherein: the helmet comprises an additively-manufactured component; a first portion of the additively-manufactured component is configured to protect more against linear impact components than rotational impact components; and a second part of the additively-manufactured component is configured to protect more against rotational impact components than linear impact components.

20

88. A helmet comprising:

- a shell; and
- a liner disposed within the shell;

25 wherein: the helmet comprises an additively-manufactured component; a first portion of the additively-manufactured component is configured to protect more against higher-energy impacts than lower-energy impacts; and a second part of the additively-manufactured component is configured to protect more against lower-energy impacts than higher-energy impacts.

30 89. A helmet comprising:

- a shell; and

- a liner disposed within the shell;

wherein the helmet comprises a plurality of additively-manufactured components with different functions additively-manufactured integrally with one another.

5 90. The helmet of claim 89, wherein a first one of the additively-manufactured components is movable relative to a second one of the additively-manufactured components.

10 91. The helmet of claim 90, comprising an adjustment system that comprises the first one of the additively-manufactured components and the second one of the additively-manufactured components.

15 92. The helmet of claim 89, wherein the shell includes a first one of the additively-manufactured components and the liner includes a second one of the additively-manufactured components.

93. A helmet comprising:

- a shell; and
- a liner disposed within the shell;

20 wherein the helmet comprises an additively-manufactured component and a non-additively-manufactured component received by the additively-manufactured component.

25 94. The helmet of claim 93, wherein the additively-manufactured component comprises a lattice.

95. The helmet of claim 94, wherein the non-additively-manufactured component is received within the lattice.

30 96. The helmet of claim 94, wherein the non-additively-manufactured component comprises foam.

97. The helmet of claim 94, wherein the non-additively-manufactured component comprises fiber-reinforced polymeric material.

5 98. The helmet of claim 94, wherein the non-additively-manufactured component comprises liquid crystal elastomer material.

99. The helmet of claim 94, wherein the non-additively-manufactured component comprises an insert removably mountable to the lattice.

10

100. A helmet comprising:

- a shell; and
- a liner disposed within the shell;

wherein the helmet comprises an additively-manufactured component and a sensor associated with the additively-manufactured component.

15

101. The helmet of claim 100, wherein: the helmet comprises an actuator; and the sensor is responsive to an event to cause the actuator to alter the additively-manufactured component.

20

102. The helmet of claim 100, wherein the additively-manufactured component comprises the sensor.

25

103. The helmet of claim 102, wherein the additively-manufactured component comprises piezoelectric material implementing the sensor.

30

104. A method of making a helmet, the helmet comprising: a shell including shell members movable relative to one another; a liner disposed within the shell; and an adjustment system operable to adjust a fit of the helmet on a user's head by moving the shell members relative to one another, the method comprising:

- providing feedstock; and

- additively manufacturing a component of the helmet using the feedstock.

105. A method of making a helmet, the helmet comprising a shell and a liner disposed within the shell, the method comprising:

5

- providing feedstock; and
- additively manufacturing a component of the helmet using the feedstock;

wherein at least part of the additively-manufactured component is disposed in a lateral side portion of the helmet; and a thickness of the additively-manufactured component at the lateral side portion of the helmet is no more than 22 mm.

10

106. A method of making a helmet, the helmet comprising a shell and a liner disposed within the shell, the method comprising:

- providing feedstock; and
- additively manufacturing a component of the helmet using the feedstock;

15 wherein the additively-manufactured component comprises a plurality of distinct zones structurally different from one another.

107. A method of making a helmet, the helmet comprising a shell and a liner disposed within the shell, the method comprising:

20

- providing feedstock; and
- additively manufacturing a component of the helmet using the feedstock;

wherein: a first part of the additively-manufactured component is configured to protect more against linear impact components than rotational impact components; and a second part of the additively-manufactured component is configured to protect more against rotational impact components than linear impact components.

25

108. A method of making a helmet, the helmet comprising a shell and a liner disposed within the shell, the method comprising:

30

- providing feedstock; and
- additively manufacturing a component of the helmet using the feedstock;

wherein: a first part of the additively-manufactured component is configured to protect more against higher-energy impacts than lower-energy impacts; and a second part of the additively-manufactured component is configured to protect more against lower-energy impacts than higher-energy impacts.

5

109. A method of making a helmet, the helmet comprising a shell and a liner disposed within the shell, the method comprising:

- providing feedstock; and
- additively manufacturing a plurality of components of the helmet that have different functions integrally with one another, using the feedstock.

10

110. A helmet comprising:

- a shell; and
- a liner disposed within the shell;

15 wherein the liner comprises an additively-manufactured component and a non-additively-manufactured component.

111. The helmet of claim 110, wherein the non-additively-manufactured component comprises liquid crystal elastomer material.

20

112. The helmet of claim 110, wherein the non-additively-manufactured component comprises a non-additively-manufactured absorption pad and the additively manufactured component comprises an additively-manufactured comfort pad overlying the non-additively-manufactured absorption pad.

25

113. The helmet of claim 112, wherein the non-additively-manufactured absorption pad comprises molded foam.

114. The helmet of claim 112, wherein the additively-manufactured comfort pad

30 comprises a lattice.

115. A helmet comprising:

- a shell; and
- a liner disposed within the shell;

wherein the liner comprises an additively-manufactured component having formed
5 therein an air channel.

116. The helmet of claim 115, wherein the additively-manufactured component having
a closed non-lattice structure.

10 117. The helmet of claim 115, wherein the additively-manufactured component
comprises an open lattice structure, wherein a cross-sectional area of the air
channel through the lattice structure is greater than any cross-sectional area
between elongate members within the lattice structure.

15 118. A helmet comprising:

- a shell; and
- a liner disposed within the shell;

wherein the liner comprises an additively-manufactured component and a liquid
crystal elastomer component.

20

119. The helmet of claim 118, wherein the liquid crystal elastomer component is an
elongate member with a direction of elongation extending in a direction that is
generally radial with respect to a wearer's head when the helmet is worn.

25 120. The helmet of claim 119, wherein the liquid crystal elastomer component is
generally column-shaped.

121. The helmet of claim 118, wherein the liquid crystal elastomer component is a first
liquid crystal elastomer component; the helmet comprising at least one other liquid
30 crystal elastomer component such that the helmet comprises a plurality of liquid

crystal elastomer components disposed at selected locations around a wearer's head when the helmet is worn.

122. A component for a helmet, the component comprising a 3D-printed portion, the
5 component including expandable material expanded to define the component.
123. The component of claim 122, wherein the 3D-printed portion comprises a 3D-printed lattice.
- 10 124. The component of claim 123, wherein the 3D-printed lattice comprises elongate members intersecting one another at nodes.
125. The component of claim 123, wherein the 3D-printed lattice comprises planar members intersecting one another at vertices.
15
126. The component of claim 123, wherein the 3D-printed portion comprises a 3D-printed non-lattice member connected to the 3D-printed lattice.
127. The component of claim 126, wherein the 3D-printed non-lattice member
20 comprises a skin.
128. The component of claim 123, wherein the 3D-printed lattice includes distinct zones that are structurally different.
- 25 129. The component of claim 128, wherein respective ones of the distinct zones of the 3D-printed lattice differ in stiffness.
130. The component of claim 128, wherein respective ones of the distinct zones of the 3D-printed lattice differ in density.
30

131. The component of claim 122, wherein the expandable material comprises a polymeric substance and an expansion agent.

132. The component of claim 131, wherein the component is more shock-absorbent
5 than if the component had been made entirely of the expansion agent and lighter than if the component had been made entirely of the polymeric substance.

133. The component of claim 131, wherein the expansion agent constitutes at least 10% of the expandable material by weight.

10 134. The component of claim 131, wherein the expansion agent constitutes at least 40% of the expandable material by weight.

135. The component of claim 131, wherein the expansion agent comprises
15 expandable microspheres.

136. The component of claim 131, wherein the expandable microspheres constitute at least 10% of the expandable material by weight.

20 137. The component of claim 131, wherein the expandable microspheres constitute at least 20% of the expandable material by weight.

138. The component of claim 131, wherein the expandable microspheres constitute at least 40% of the expandable material by weight.

25 139. The component of claim 131, wherein the polymeric substance is elastomeric.

140. The component of claim 131, wherein the polymeric substance is polyurethane.

30 141. The component of claim 122, wherein an expansion ratio of the component is at least 5.

142. The component of claim 122, wherein an expansion ratio of the component is at least 10.

5 143. The component of claim 122, wherein the expandable material expanded in response to heat.

10 144. The component of claim 131, wherein: the expandable material is formed into an initial shape and expanded to an expanded shape that is a scaled-up version of the initial shape and that defines the component; and a temperature of the expandable material during forming into the initial shape is lower than an expansion temperature of the expansion agent.

15 145. The component of claim 144, wherein the expandable material is expanded to the expanded shape a plurality of hours after forming into the initial shape.

146. The component of claim 122, wherein the expandable material is distinct from the 3D-printed portion.

20 147. The component of claim 122, wherein the expandable material is combined with the 3D-printed portion.

25 148. The component of claim 122, wherein: the expandable material is molded into an initial shape subsequent to 3D printing of the 3D-printed portion; and the expandable material is expanded from the initial shape to an expanded shape to define the component.

149. The component of claim 122, wherein the expandable material is molded about the 3D-printed portion.

150. The component of claim 122, wherein the expandable material extends into the 3D-printed portion.

151. The component of claim 150, wherein: the 3D-printed portion comprises a 3D-
5 printed lattice; and the expandable material extends into the 3D-printed lattice.

152. The component of claim 122, wherein the 3D-printed portion comprises the expandable material such that the expandable material is 3D-printed expandable material.

10

153. The component of claim 122, wherein the component is a pad.

154. The component of claim 122, wherein the 3D-printed portion is 3D printed using one of fused deposition modeling (FDM), digital light processing (DLP), continuous liquid interface production (CLIP) with digital light synthesis (DLS), multi-jet fusion (MJF), stereolithography (SLA), selective laser sintering (SLS), material jetting (MJ), and binder jetting (BJ).

155. A helmet comprising the component of claim 122.

20

156. A component for a helmet, the component comprising a 3D-printed portion, the component including expandable material expanded from an initial shape to an expanded shape that is a scaled-up version of the initial shape.

25 157. A method of making a component of a helmet, the method comprising:
- providing expandable material;
- 3D printing a 3D-printed portion of the component; and
- expanding the expandable material to define the component.

30 158. The method of claim 157, wherein the 3D-printed portion comprises a 3D-printed lattice.

159. The method of claim 158, wherein the 3D-printed lattice comprises elongate members intersecting one another at nodes.

5 160. The method of claim 158, wherein the 3D-printed lattice comprises planar members intersecting one another at vertices.

161. The method of claim 158, wherein the 3D-printed portion comprises a 3D-printed non-lattice member connected to the 3D-printed lattice.

10

162. The method of claim 161, wherein the 3D-printed non-lattice member comprises a skin.

163. The method of claim 158, wherein the 3D-printed lattice includes distinct zones
15 that are structurally different.

164. The method of claim 163, wherein respective ones of the distinct zones of the 3D-printed lattice differ in stiffness.

20 165. The method of claim 163, wherein respective ones of the distinct zones of the 3D-printed lattice differ in density.

166. The method of claim 157, wherein the expandable material comprises a polymeric substance and an expansion agent.

25

167. The method of claim 166, wherein the component is more shock-absorbent than if the component had been made entirely of the expansion agent and lighter than if the component had been made entirely of the polymeric substance.

30 168. The method of claim 166, wherein the expansion agent constitutes at least 10% of the expandable material by weight.

169. The method of claim 166, wherein the expansion agent constitutes at least 40% of the expandable material by weight.

5 170. The method of claim 166, wherein the expansion agent comprises expandable microspheres.

171. The method of claim 170, wherein the expandable microspheres constitute at least 10% of the expandable material by weight.

10

172. The method of claim 170, wherein the expandable microspheres constitute at least 20% of the expandable material by weight.

173. The method of claim 170, wherein the expandable microspheres constitute at 15 least 40% of the expandable material by weight.

174. The method of claim 166, wherein the polymeric substance is elastomeric.

175. The method of claim 166, wherein the polymeric substance is polyurethane.

20

176. The method of claim 157, wherein an expansion ratio of the component is at least 5.

25 177. The method of claim 157, wherein an expansion ratio of the component is at least 10.

178. The method of claim 157, wherein expanding the expandable material comprises heating the expandable material.

30 179. The method of claim 166, wherein: the expandable material is formed into an initial shape and expanded to an expanded shape that is a scaled-up version of the

initial shape and that defines the component; and a temperature of the expandable material during forming into the initial shape is lower than an expansion temperature of the expansion agent.

5 180. The method of claim 179, wherein the expandable material is expanded to the expanded shape a plurality of hours after forming into the initial shape.

181. The method of claim 157, wherein the expandable material is distinct from the 3D-printed portion.

10

182. The method of claim 157, wherein the expandable material is combined with the 3D-printed portion.

183. The method of claim 157, comprising molding the expandable material into an 15 initial shape subsequent to 3D printing the 3D-printed portion, wherein expanding the expandable material to define the component comprises expanding the expandable material from the initial shape to an expanded shape.

184. The method of claim 157, comprising molding the expandable material about the 20 3D-printed portion.

185. The method of claim 157, wherein the expandable material extends into the 3D-printed portion.

25 186. The method of claim 157, wherein: the 3D-printed portion comprises a 3D-printed lattice; and the expandable material extends into the 3D-printed lattice.

187. The method of claim 157, wherein 3D printing the 3D-printed portion comprises 30 3D printing the expandable material such that the 3D-printed portion comprises 3D-printed expandable material.

188. The method of claim 157, wherein the component is a pad.

189. The method of claim 157, wherein 3D printing the 3D-printed portion comprises using one of fused deposition modeling (FDM), digital light processing (DLP),
5 continuous liquid interface production (CLIP) with digital light synthesis (DLS), multi-jet fusion (MJF), stereolithography (SLA), selective laser sintering (SLS), material jetting (MJ), and binder jetting (BJ).

190. A helmet comprising the component made by the method of claim 157.

10 191. A component for a helmet, the component comprising 3D-printed expandable material expanded after being 3D printed.

192. The component of claim 191, comprising a 3D-printed lattice including at least
15 part of the 3D-printed expandable material.

193. The component of claim 192, wherein the 3D-printed lattice comprises elongate members intersecting one another at nodes.

20 194. The component of claim 192, wherein the 3D-printed lattice comprises planar members intersecting one another at vertices.

195. The component of claim 192, comprising a 3D-printed non-lattice member including at least part of the 3D-printed expandable material and connected to the
25 3D-printed lattice.

196. The component of claim 195, wherein the 3D-printed non-lattice member comprises a skin.

30 197. The component of claim 192, wherein the 3D-printed lattice includes distinct zones that are structurally different.

198. The component of claim 197, wherein respective ones of the distinct zones of the 3D-printed lattice differ in stiffness.

5 199. The component of claim 197, wherein respective ones of the distinct zones of the 3D-printed lattice differ in density.

200. The component of claim 191, wherein the 3D-printed expandable material comprises a polymeric substance and an expansion agent.

10 201. The component of claim 200, wherein the component is more shock-absorbent than if the component had been made entirely of the expansion agent and lighter than if the component had been made entirely of the polymeric substance.

15 202. The component of claim 200, wherein the expansion agent constitutes at least 10% of the expandable material by weight.

203. The component of claim 200, wherein the expansion agent constitutes at least 40% of the expandable material by weight.

20 204. The component of claim 200, wherein the expansion agent comprises expandable microspheres.

205. The component of claim 204, wherein the expandable microspheres constitute at least 10% of the expandable material by weight.

25 206. The component of claim 204, wherein the expandable microspheres constitute at least 20% of the expandable material by weight.

30 207. The component of claim 204, wherein the expandable microspheres constitute at least 40% of the expandable material by weight.

208. The component of claim 200, wherein the polymeric substance is elastomeric.

209. The component of claim 200, wherein the polymeric substance is polyurethane.

5

210. The component of claim 191, wherein an expansion ratio of the component is at least 5.

211. The component of claim 191, wherein an expansion ratio of the component is at 10 least 10.

212. The component of claim 191, wherein the 3D-printed expandable material expanded in response to heat.

15 213. The component of claim 191, wherein: the 3D-printed expandable material is 3D-printed into an initial shape and expanded to an expanded shape that is a scaled-up version of the initial shape and that defines the component; and a temperature of the 3D-printed expandable material during 3D printing into the initial shape is lower than an expansion temperature of the expansion agent.

20

214. The component of claim 213, wherein the 3D-printed expandable material is expanded to the expanded shape a plurality of hours after being 3D printed into the initial shape.

25 215. The component of claim 191, wherein the component is a pad.

216. The component of claim 191, wherein the 3D-printed expandable material is 3D printed using one of fused deposition modeling (FDM), digital light processing (DLP), continuous liquid interface production (CLIP) with digital light synthesis 30 (DLS), multi-jet fusion (MJF), stereolithography (SLA), selective laser sintering (SLS), material jetting (MJ), and binder jetting (BJ).

217. A helmet comprising the component of claim 191.

218. A method of making a component of a helmet, the method comprising:

5 - providing expandable material;
- 3D printing the expandable material to create 3D-printed expandable material; and
- expanding the 3D-printed expandable material to define the component.

10 219. The method of claim 218, wherein the component comprises a 3D-printed lattice including at least part of the 3D-printed expandable material.

220. The method of claim 219, wherein the 3D-printed lattice comprises elongate members intersecting one another at nodes.

15

221. The method of claim 219, wherein the 3D-printed lattice comprises planar members intersecting one another at vertices.

222. The method of claim 219, wherein the component comprises a 3D-printed non-lattice member including at least part of the 3D-printed expandable material and connected to the 3D-printed lattice.

223. The method of claim 222, wherein the 3D-printed non-lattice member comprises a skin.

25

224. The method of claim 219, wherein the 3D-printed lattice includes distinct zones that are structurally different.

225. The method of claim 224, wherein respective ones of the distinct zones of the 3D-printed lattice differ in stiffness.

226. The method of claim 224, wherein respective ones of the distinct zones of the 3D-printed lattice differ in density.

227. The method of claim 218, wherein the expandable material comprises a 5 polymeric substance and an expansion agent.

228. The method of claim 227, wherein the component is more shock-absorbent than if the component had been made entirely of the expansion agent and lighter than if the component had been made entirely of the polymeric substance.

10

229. The method of claim 227, wherein the expansion agent constitutes at least 10% of the expandable material by weight.

230. The method of claim 227, wherein the expansion agent constitutes at least 40% 15 of the expandable material by weight.

231. The method of claim 227, wherein the expansion agent comprises expandable microspheres.

20 232. The method of claim 231, wherein the expandable microspheres constitute at least 10% of the expandable material by weight.

233. The method of claim 231, wherein the expandable microspheres constitute at least 20% of the expandable material by weight.

25

234. The method of claim 231, wherein the expandable microspheres constitute at least 40% of the expandable material by weight.

235. The method of claim 227, wherein the polymeric substance is elastomeric.

30

236. The method of claim 227, wherein the polymeric substance is polyurethane.

237. The method of claim 218, wherein an expansion ratio of the component is at least 5.

5 238. The method of claim 218, wherein an expansion ratio of the component is at least 10.

239. The method of claim 218, wherein expanding the 3D-printed expandable material to define the component comprises heating the 3D-printed expandable material.

10

240. The method of claim 227, wherein: 3D printing the expandable material comprises 3D printing the expandable material into an initial shape; expanding the 3D-printed expandable material comprises expanding the 3D-printed expandable material from the initial shape to an expanded shape that is a scaled-up version of the initial shape and that defines the component; and a temperature of the expandable material during 3D printing into the initial shape is lower than an expansion temperature of the expansion agent.

15 241. The method of claim 240, wherein the 3D-printed expandable material is expanded to the expanded shape a plurality of hours after being 3D printed into the initial shape.


242. The method of claim 218, wherein the component is a pad.

25 243. The method of claim 218, wherein 3D printing the expandable material comprises using one of fused deposition modeling (FDM), digital light processing (DLP), continuous liquid interface production (CLIP) with digital light synthesis (DLS), multi-jet fusion (MJF), stereolithography (SLA), selective laser sintering (SLS), material jetting (MJ), and binder jetting (BJ).


30

244. A helmet comprising the component made by the method of claim 218.



1/62

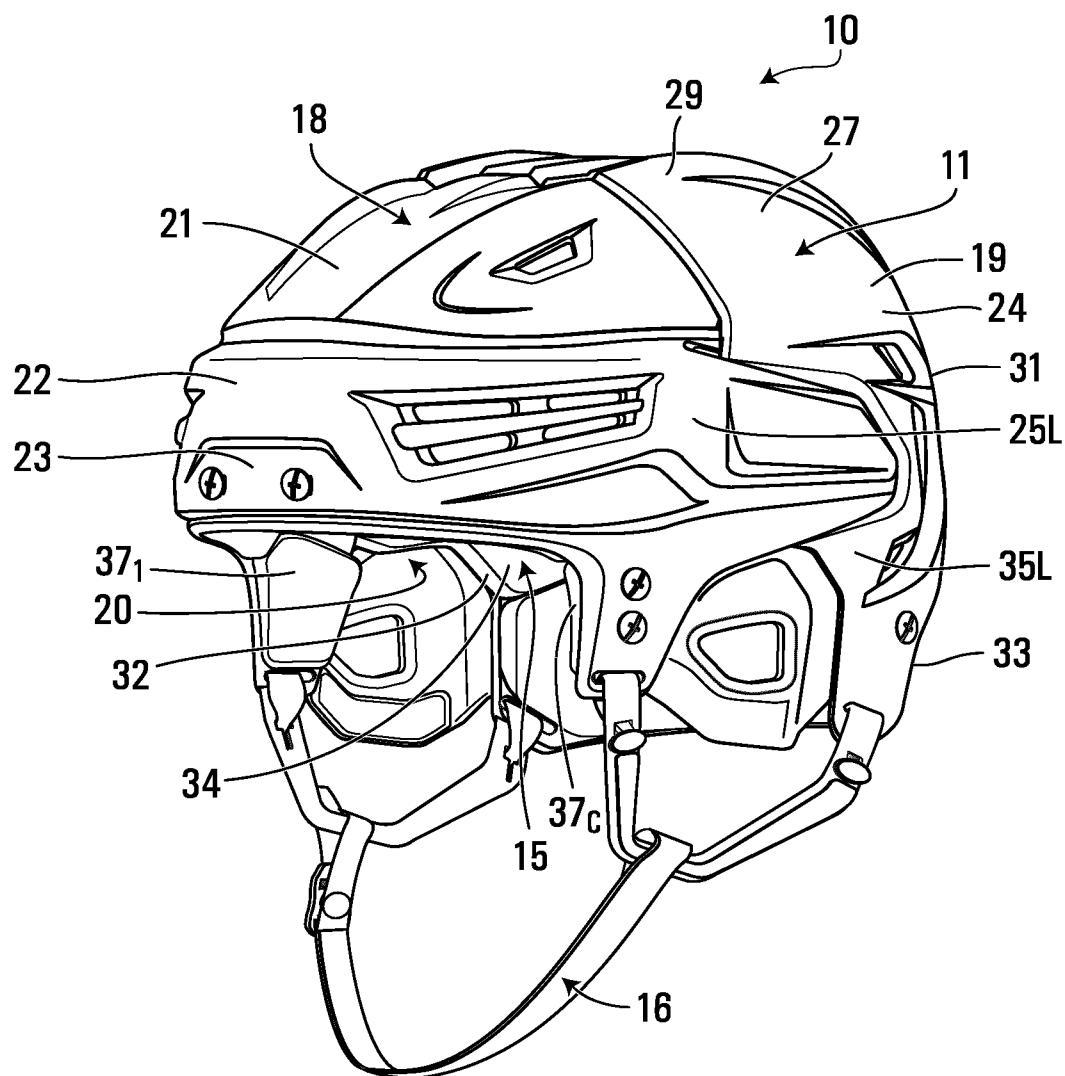**FIG. 1**


2/62

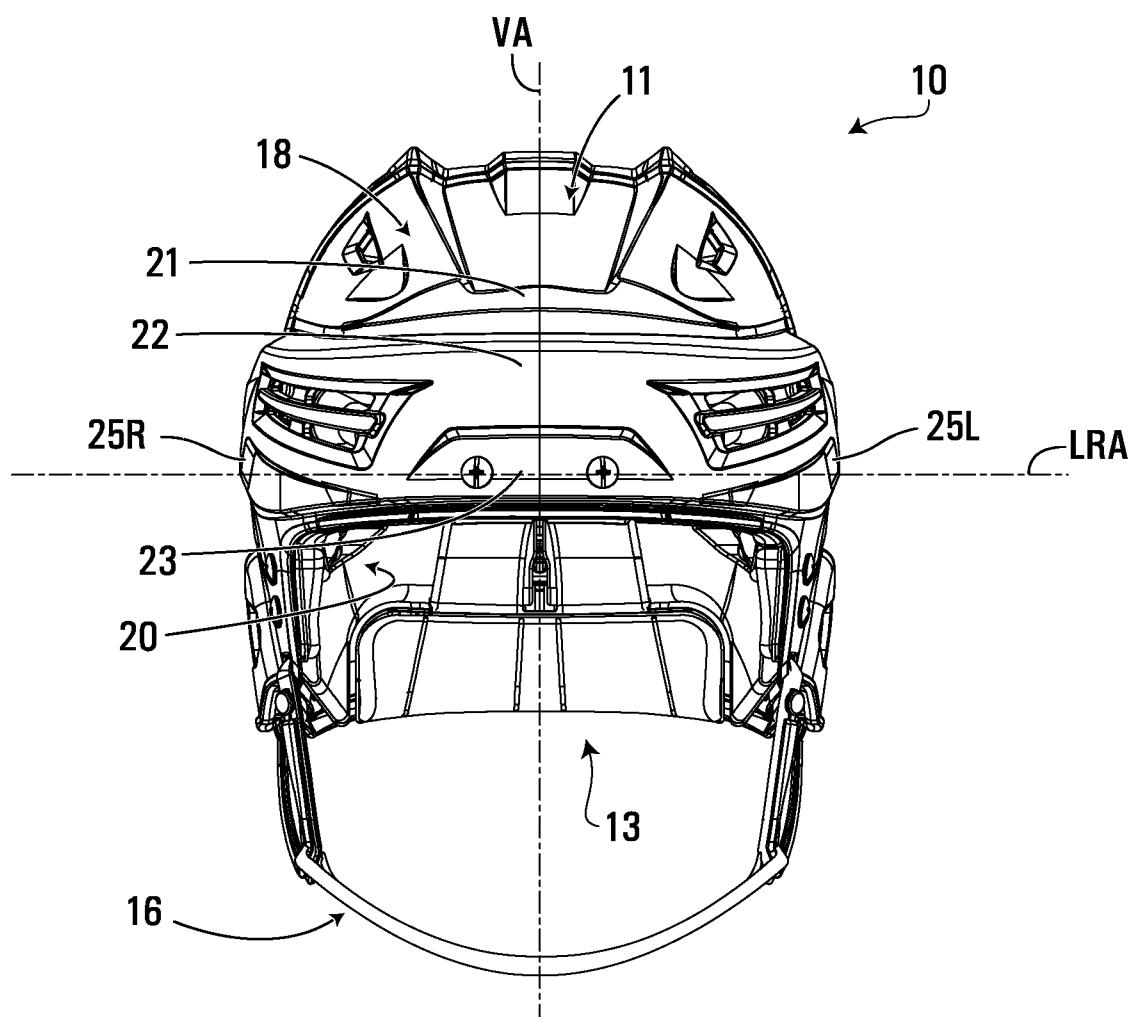**FIG. 2**


3/62

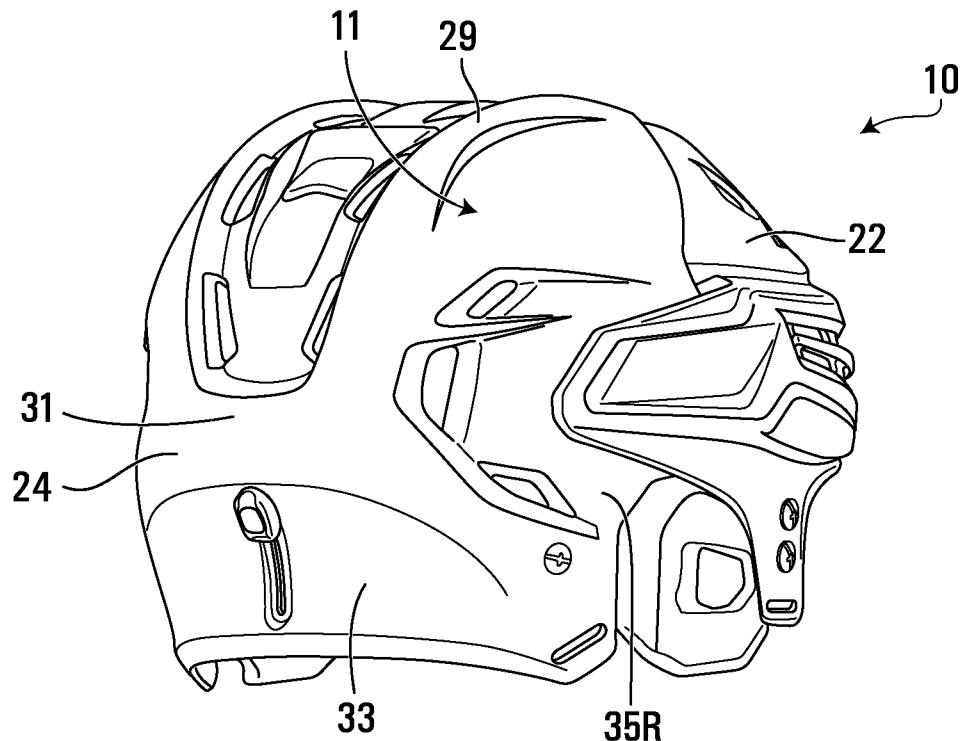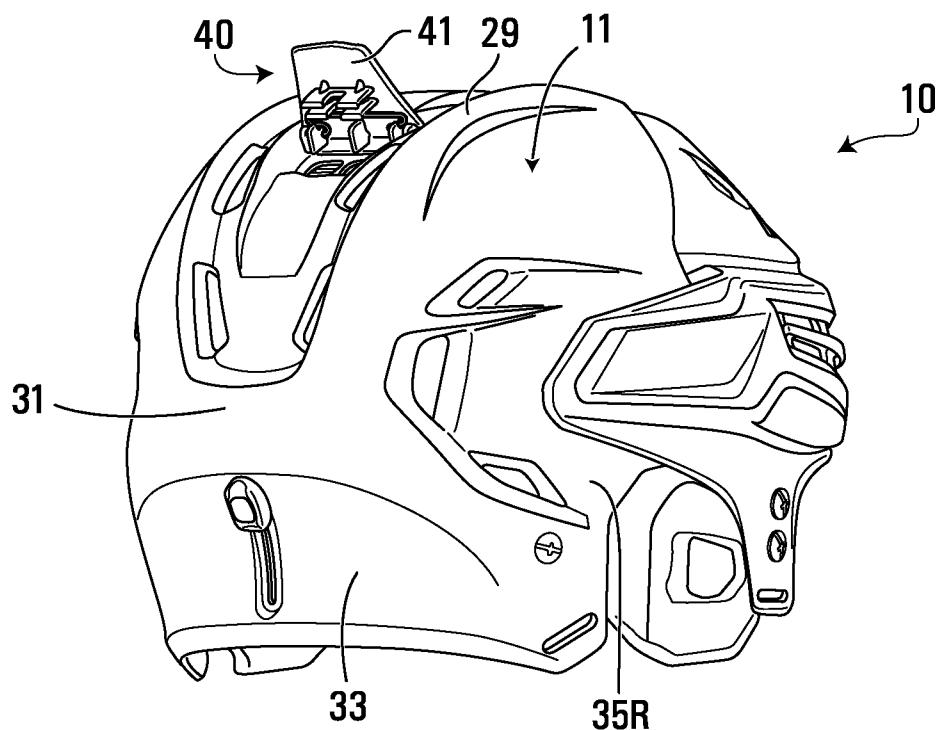**FIG. 3****FIG. 4**



4/62

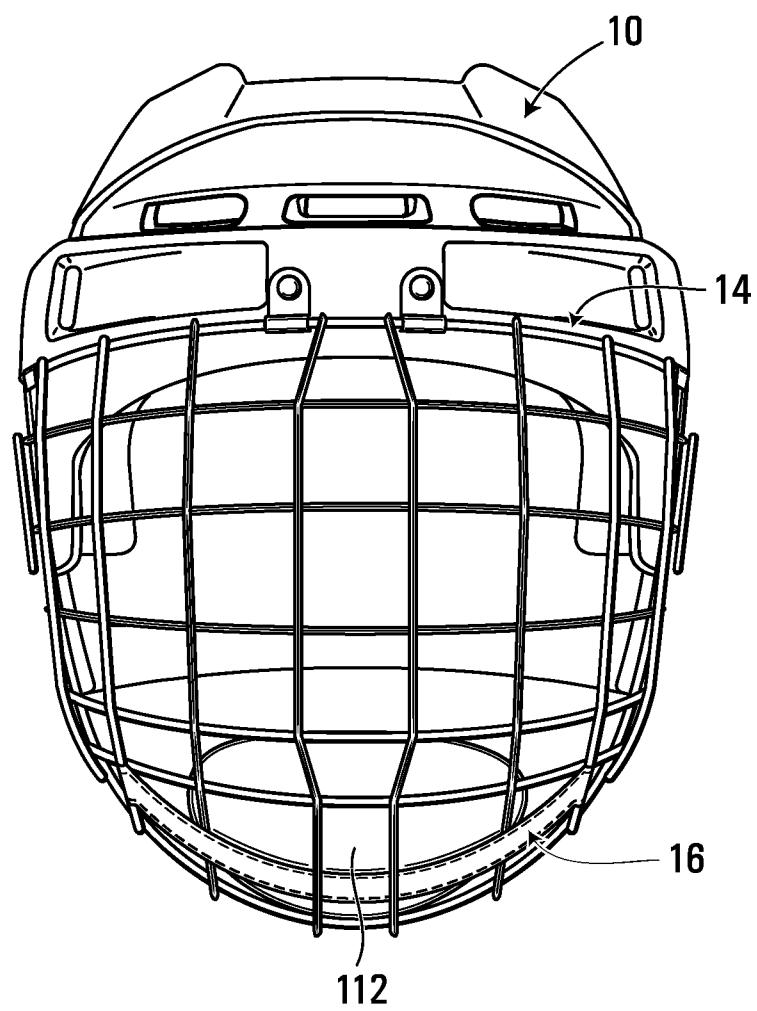**FIG. 5**


5/62

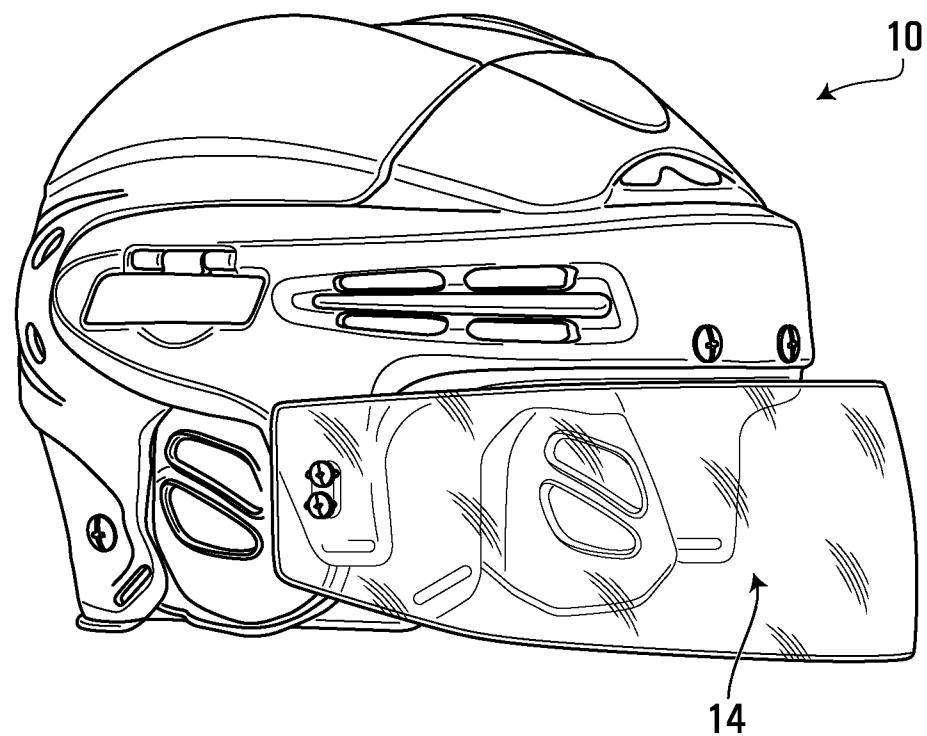**FIG. 6**



6/62

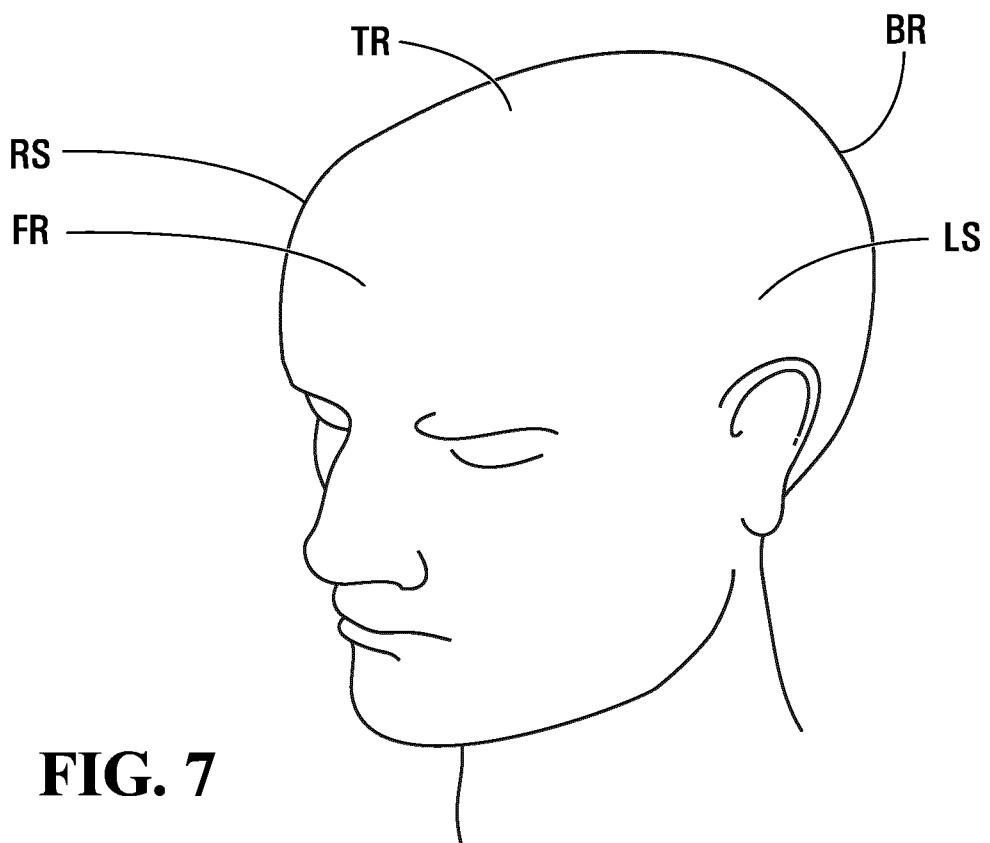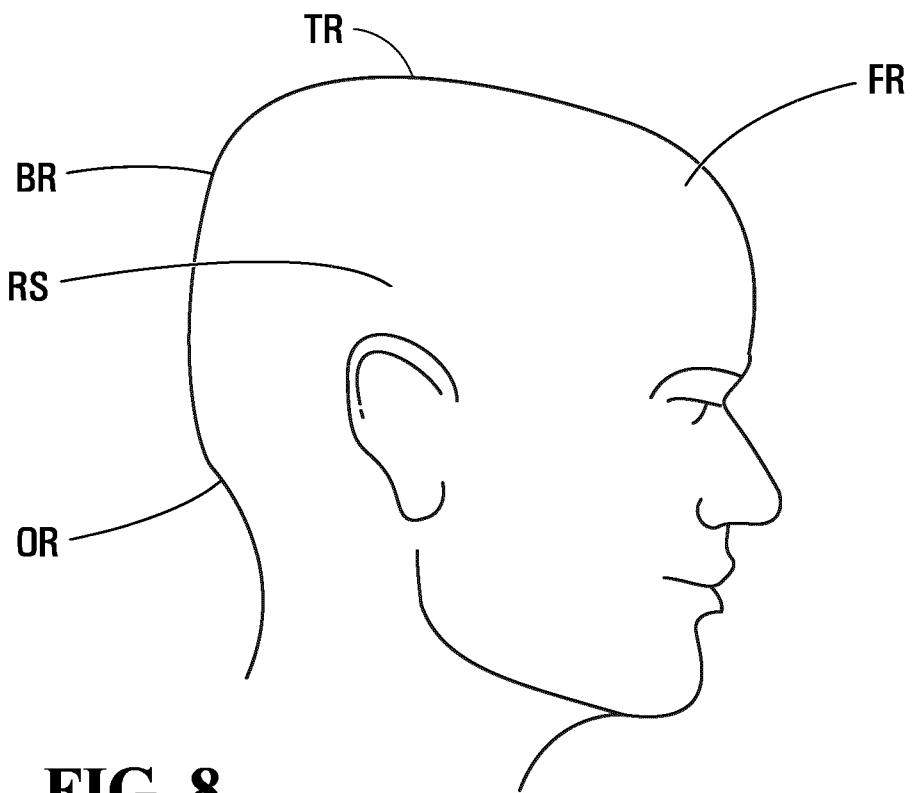**FIG. 7****FIG. 8**



7/62

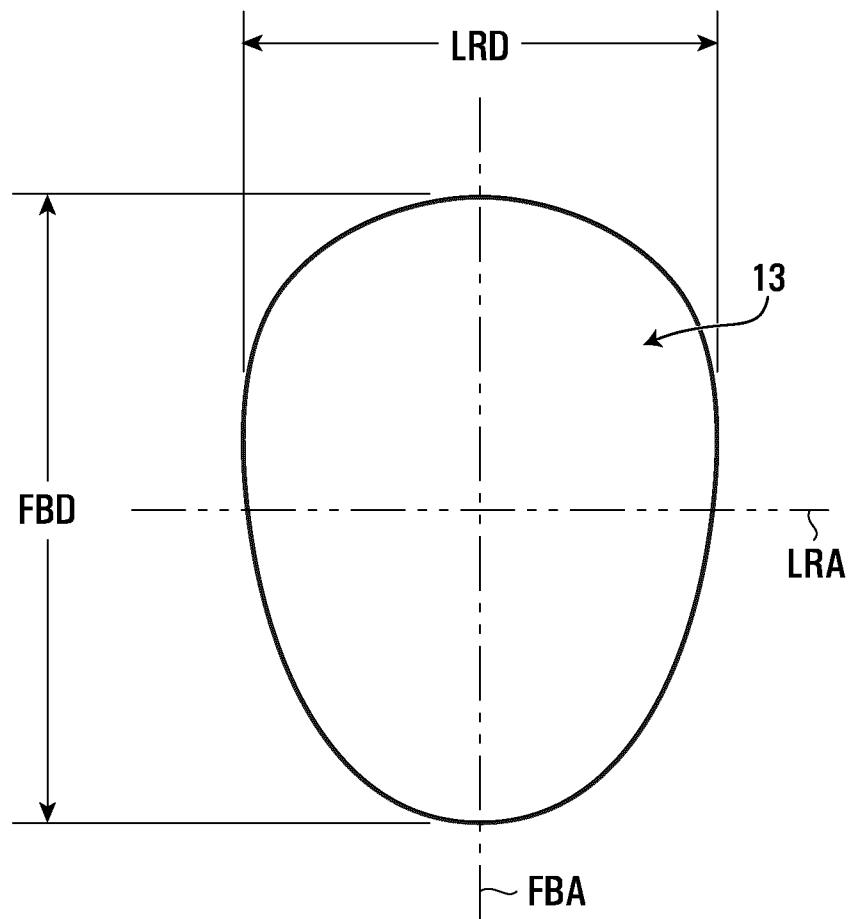**FIG. 9**



8/62

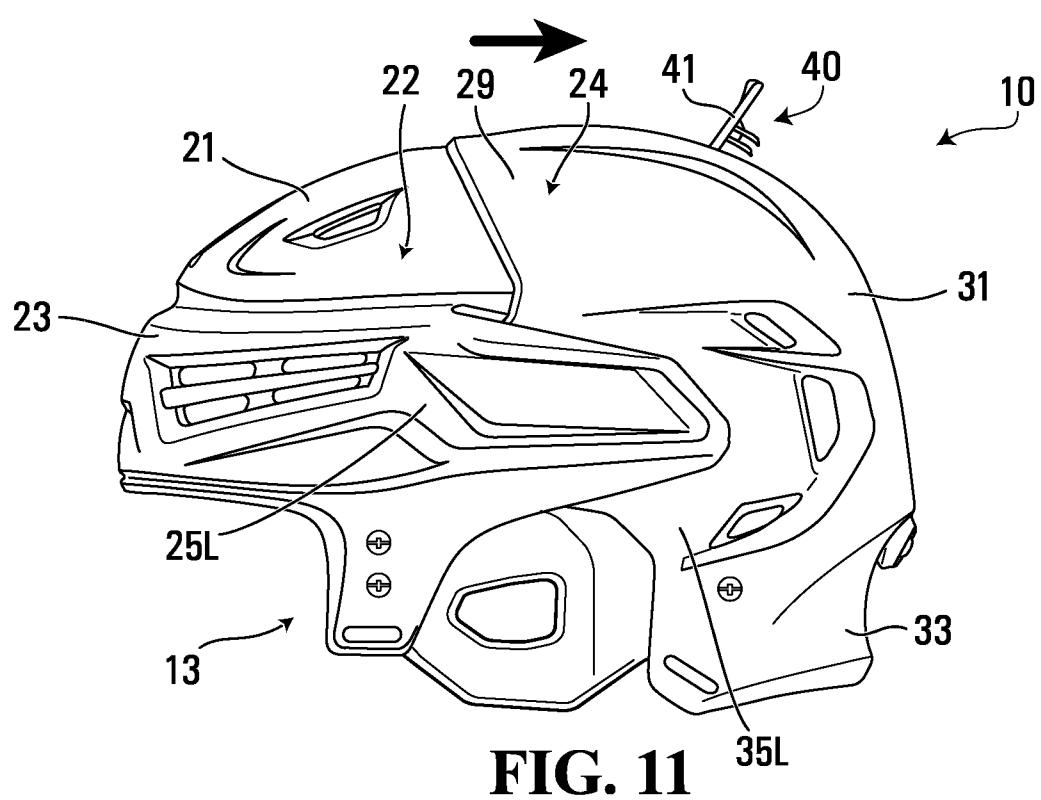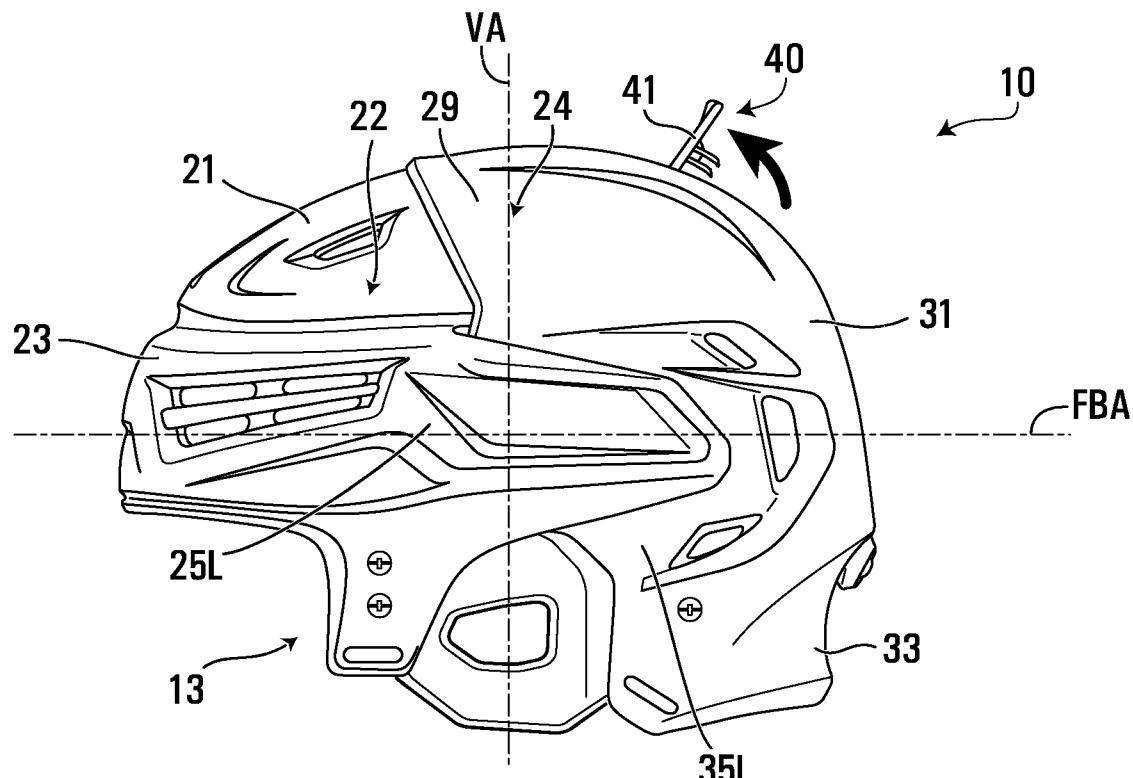



9/62

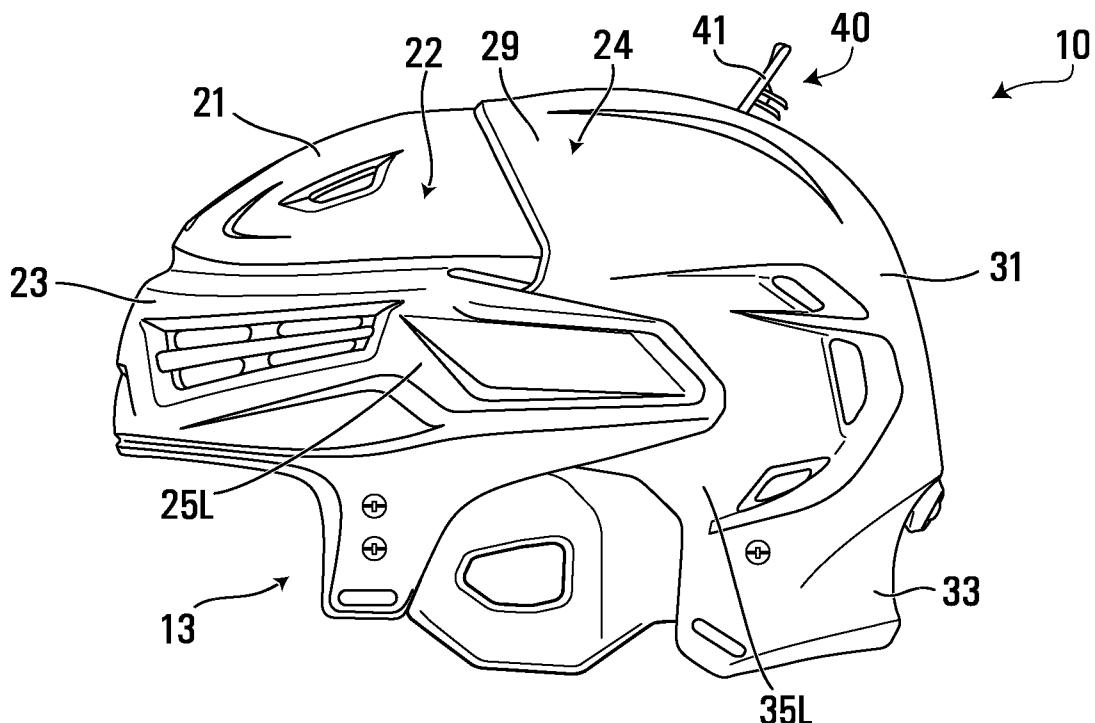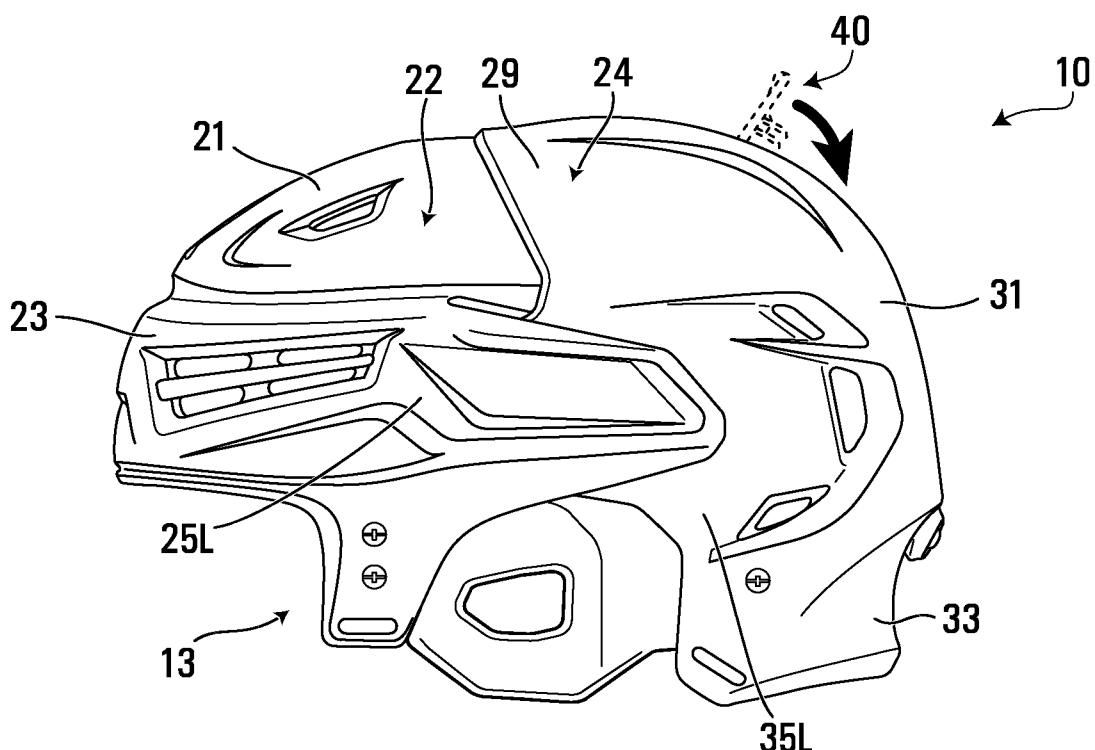**FIG. 12****FIG. 13**



10/62

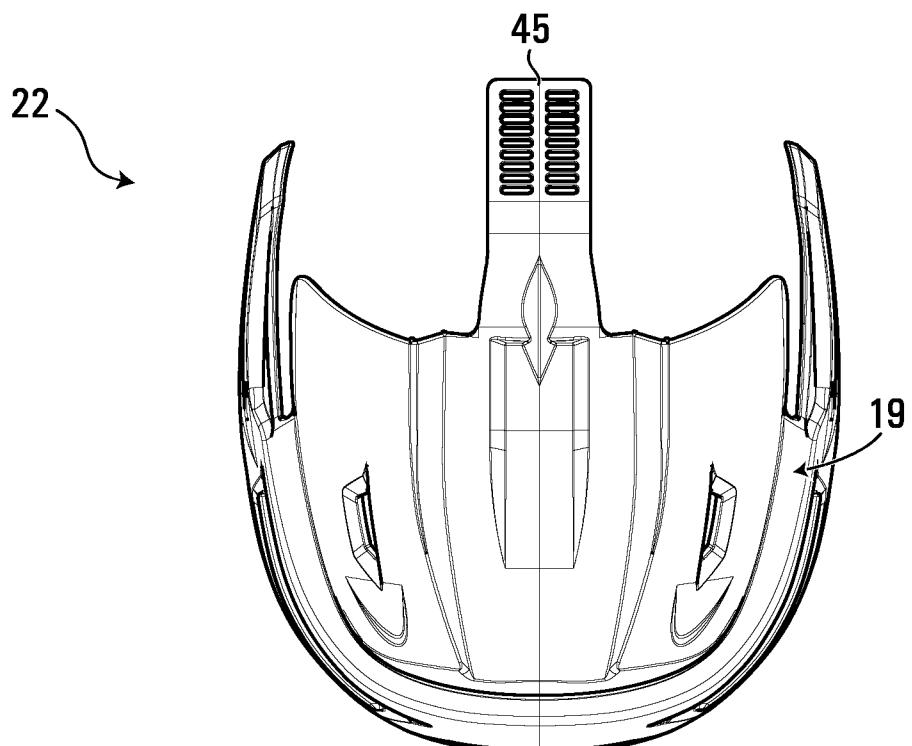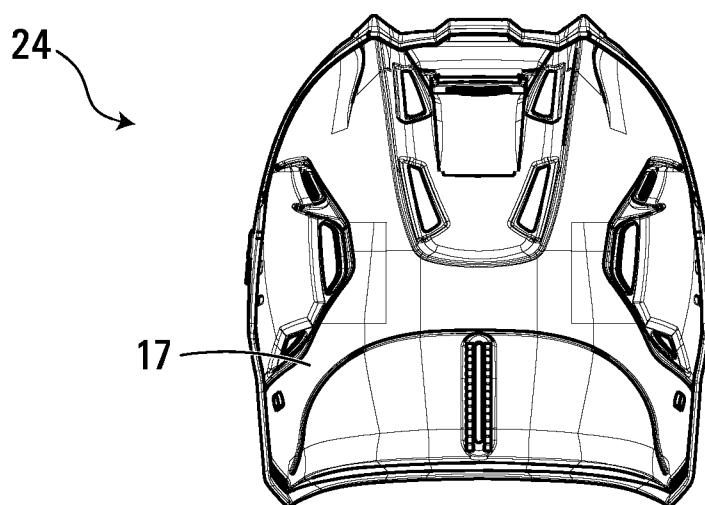**FIG. 14****FIG. 15**


11/62

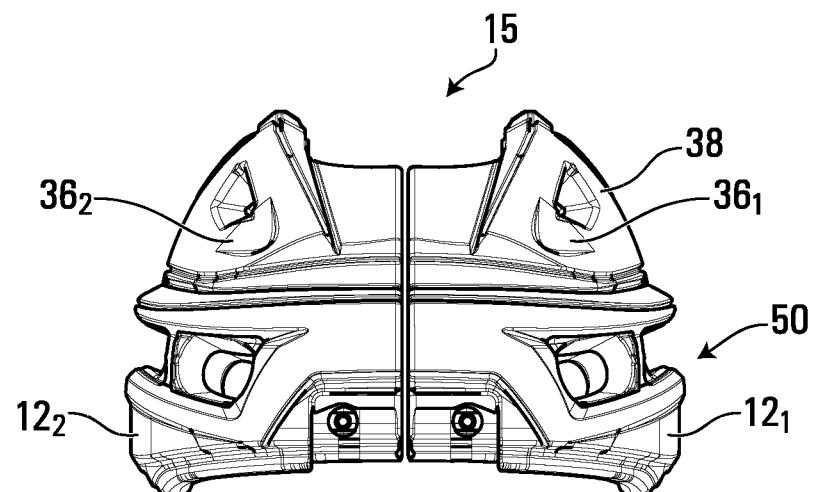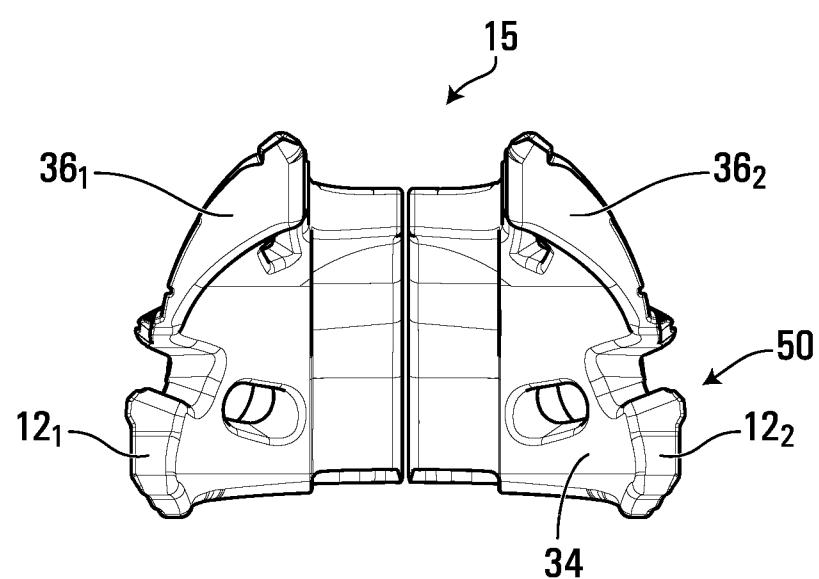**FIG. 16****FIG. 17**



12/62

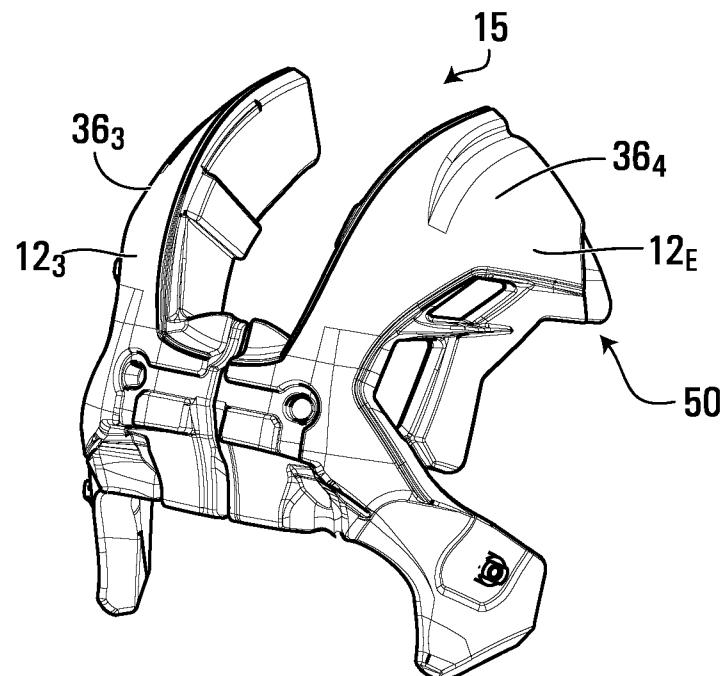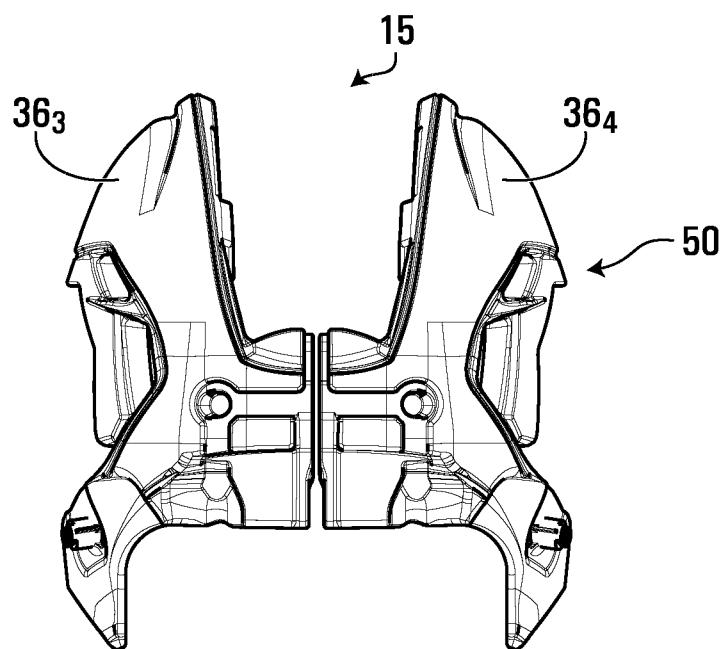**FIG. 18****FIG. 19**


13/62

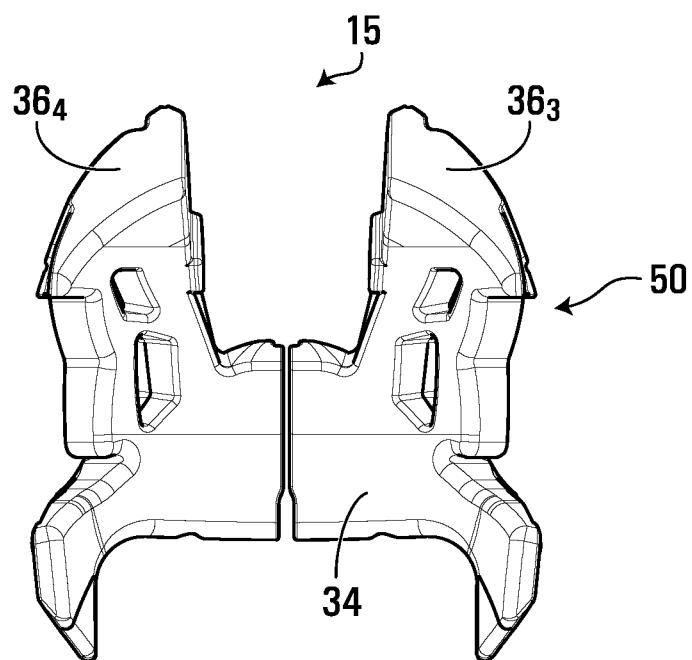**FIG. 20**


14/62

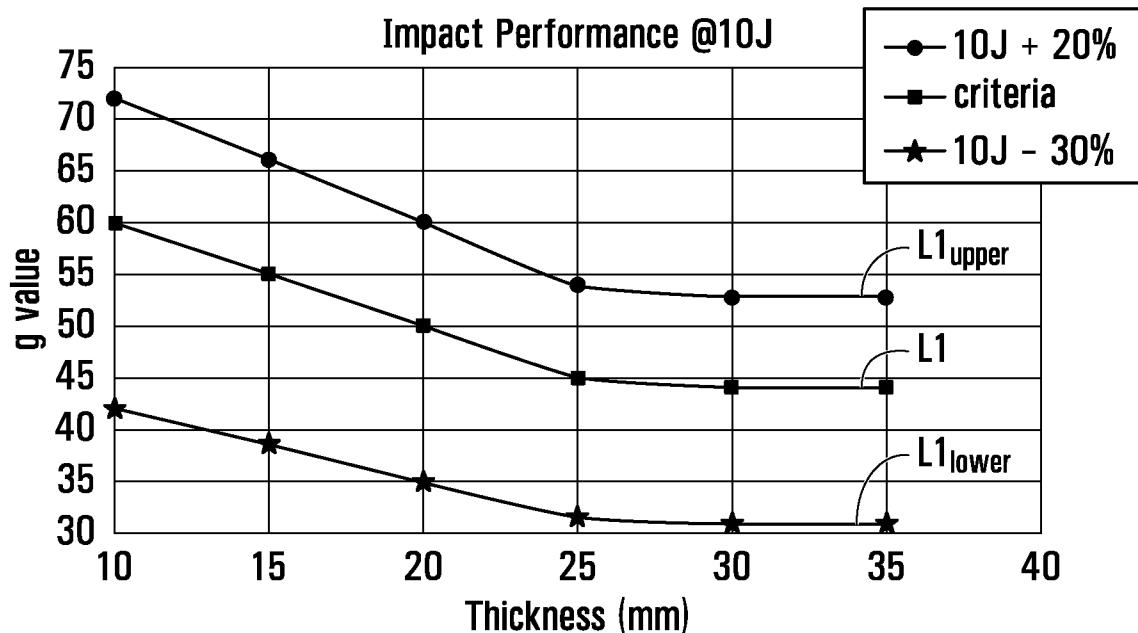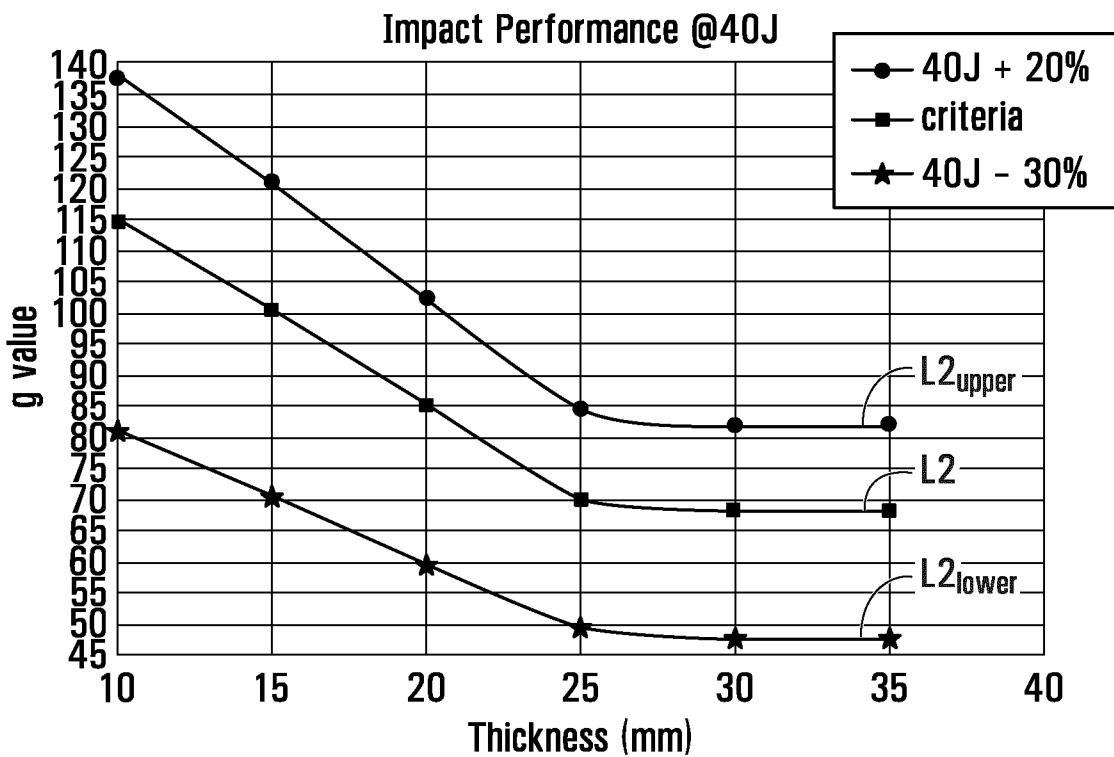**FIG. 21A****FIG. 21B**


15/62

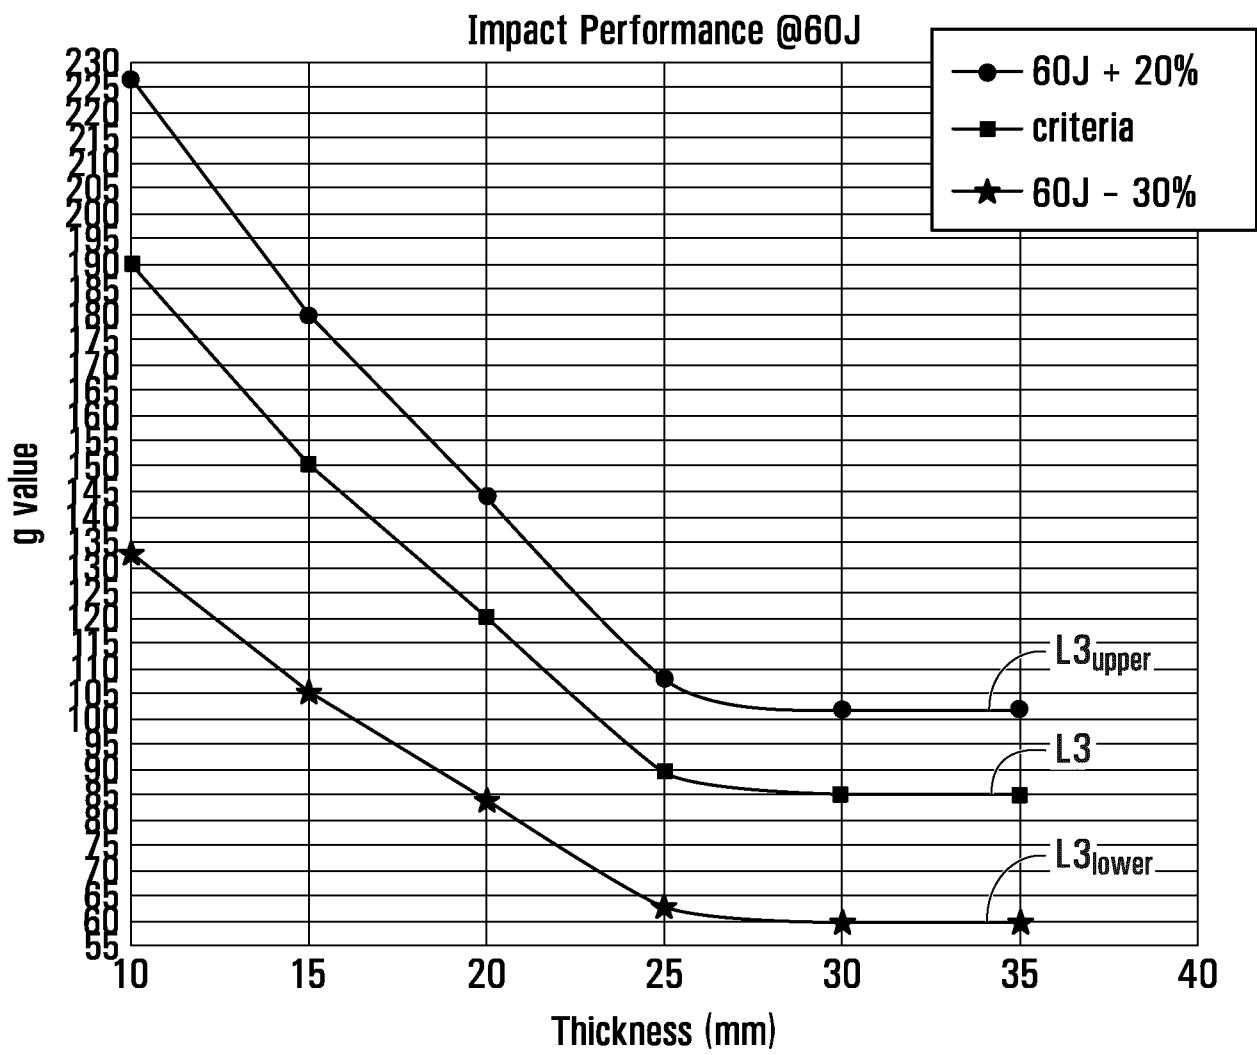
**FIG. 21C**

16/62


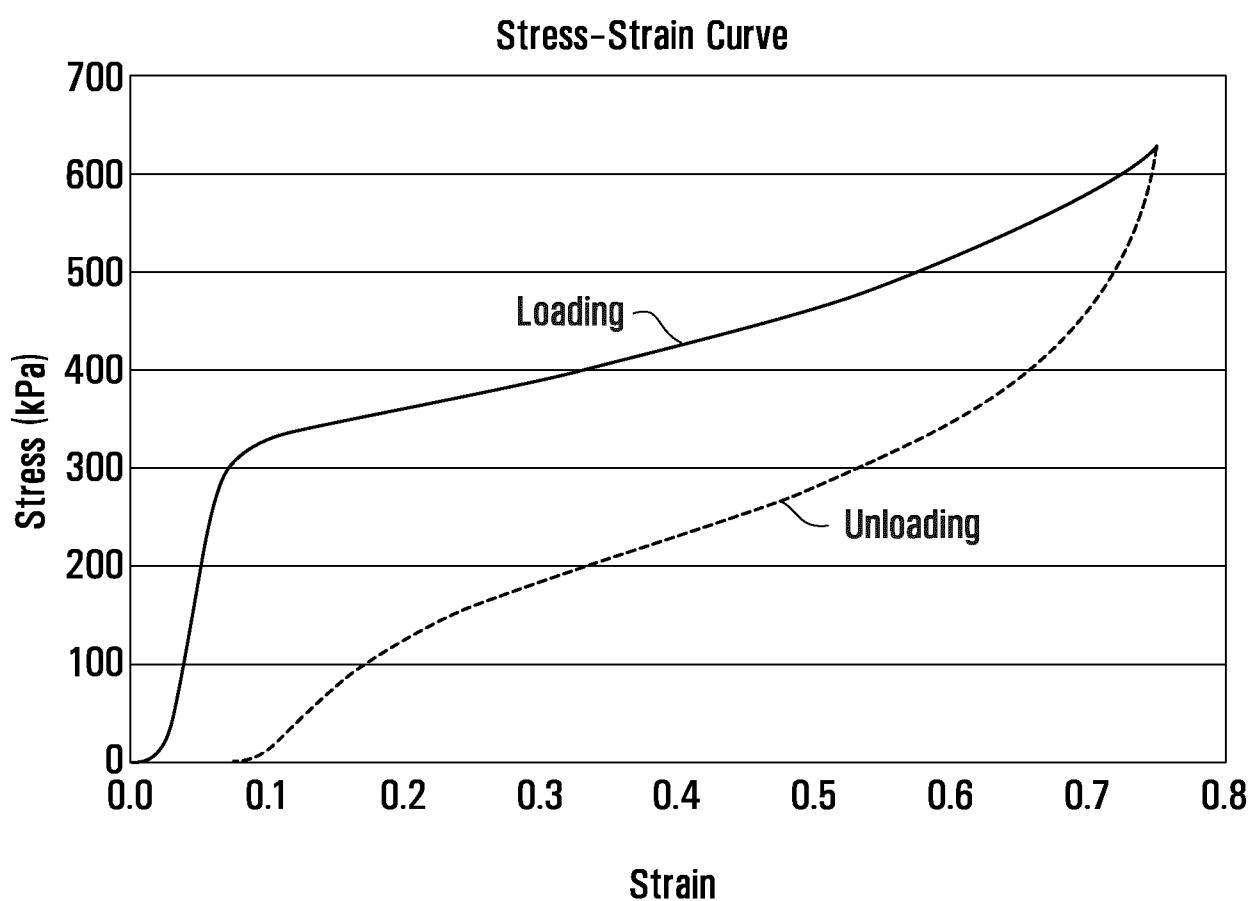
**FIG. 22A**

17/62

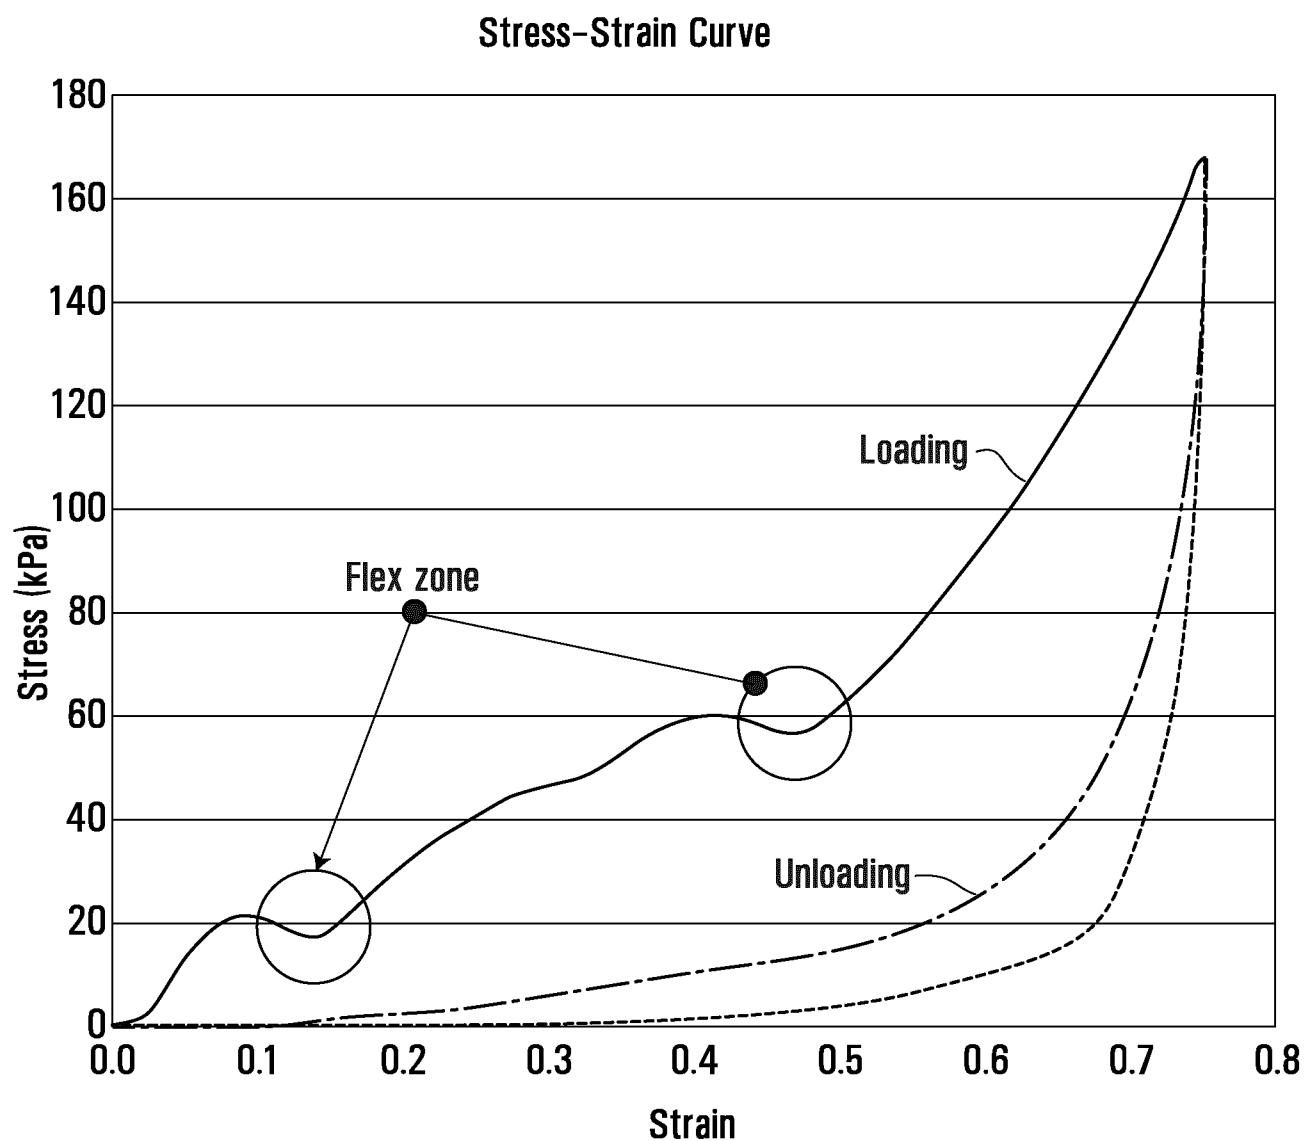
**FIG. 22B**

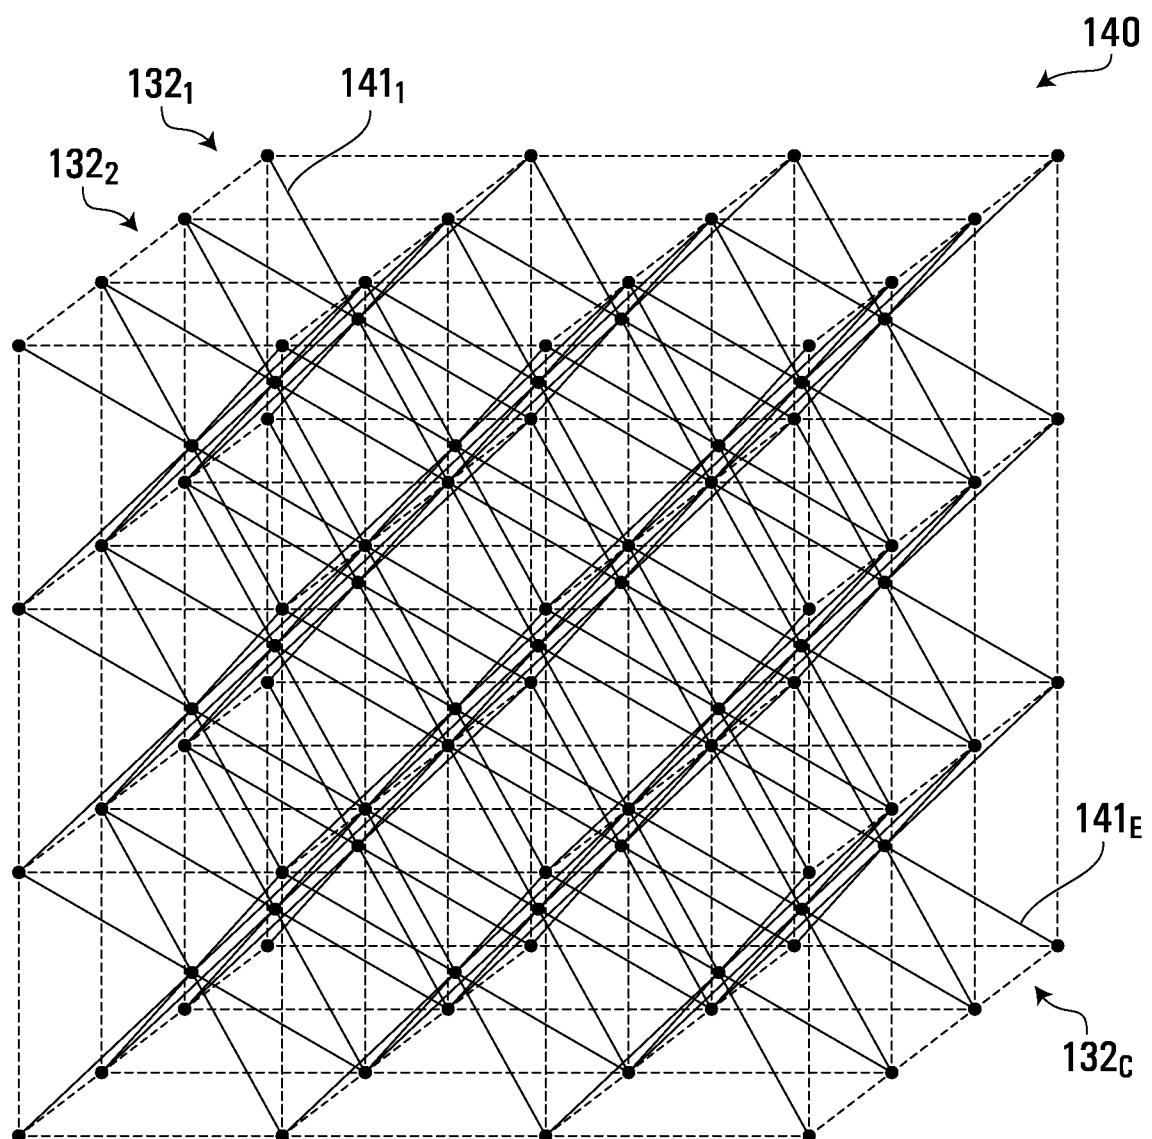**FIG. 23**


19/62

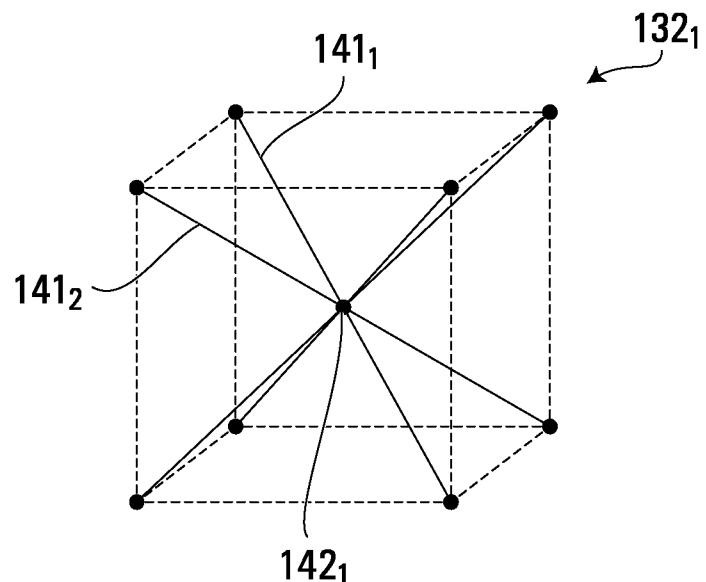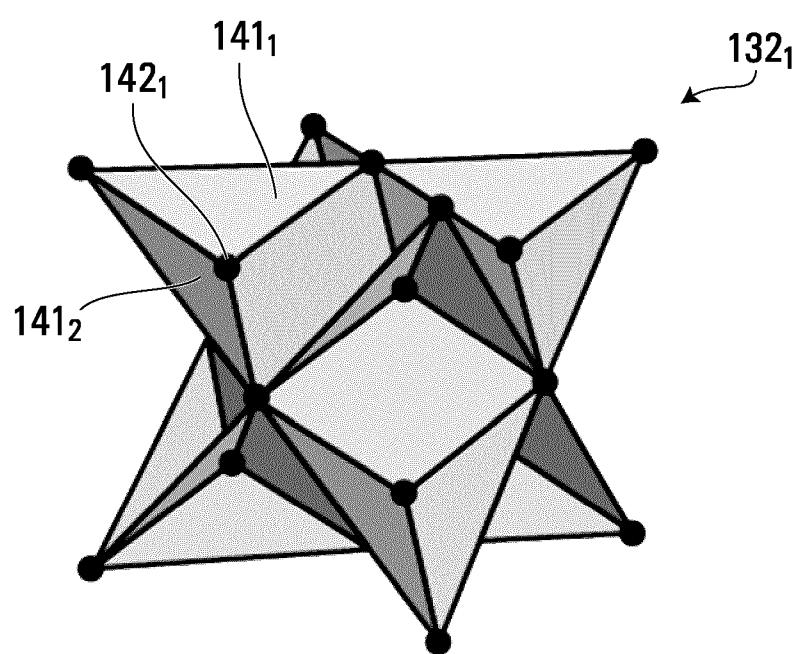**FIG. 24A****FIG. 24B**


20/62

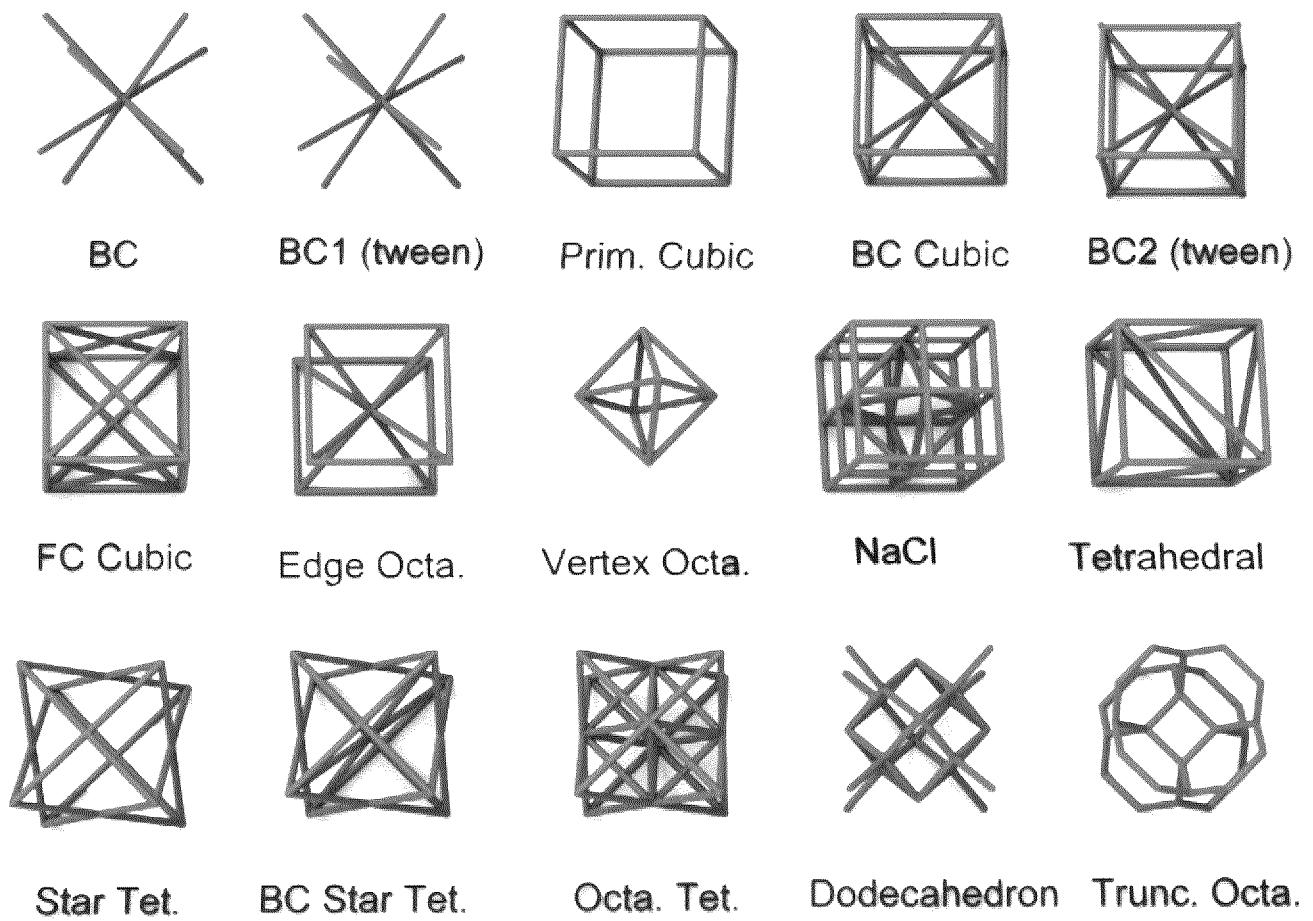**FIG. 24C**


21/62




Octa. (shell)




Dodeca. (shell)




Trunc. Octa. (shell)



Cubic Center




Cubic Face




Gyroid (shell)

FIG. 24D


22/62




**Schwarz D
(Diamond)**

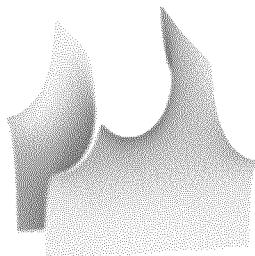


**Scherk's
Surface 1**

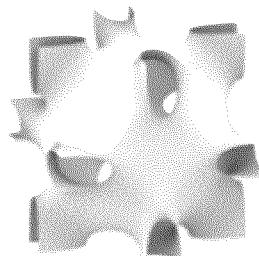


Neovius

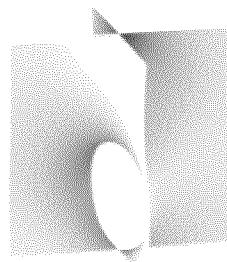


**Scherk's
Tower**

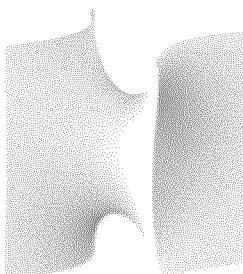


**Scherk's
Surface 2**

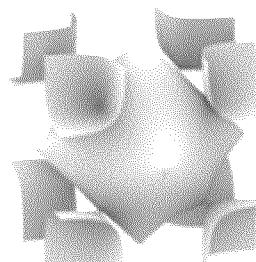


**Schoen's
IWP**

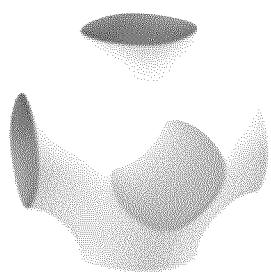

**Schwarz P
(Primitive)**

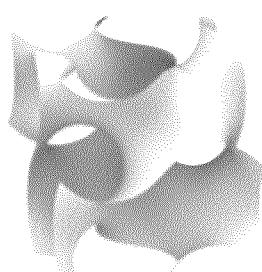


**Schoen's
Gyroid**

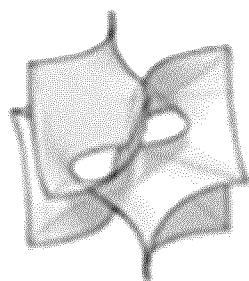


**Schoen's PA
Batwing**

FIG. 24E


23/62

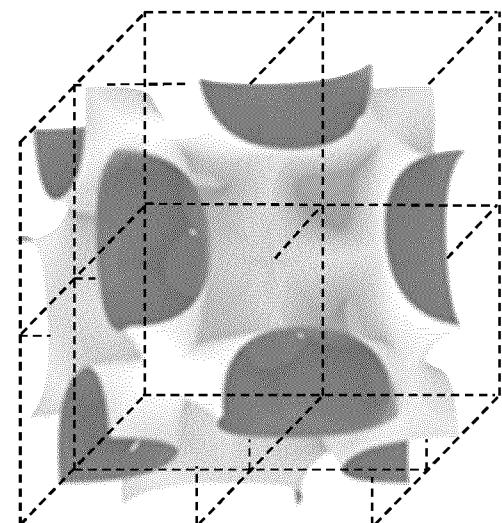

Schoen's PA Batwing
Surface

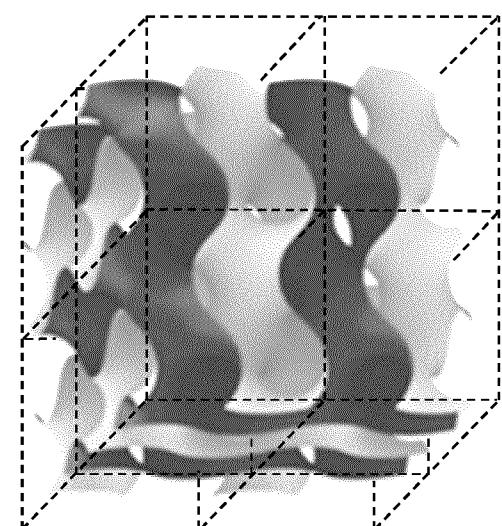

Schoen's Gyroid
Surface

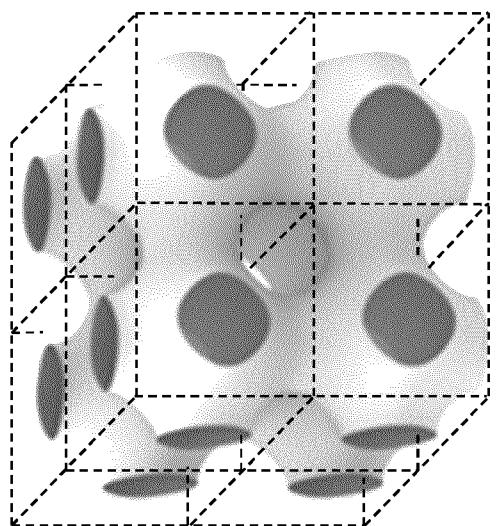

Schwarz P
Surface

FIG. 24F

24/62

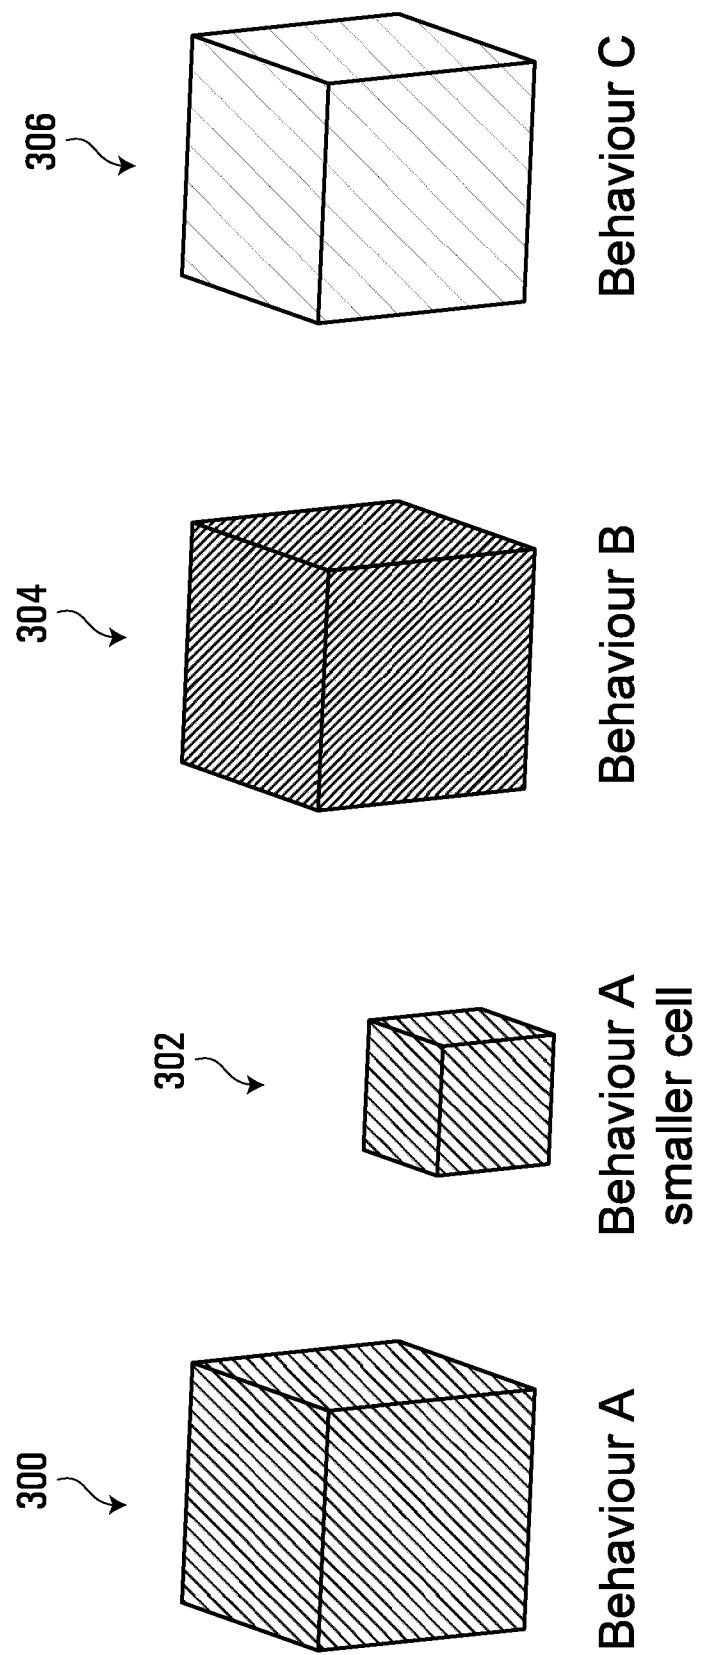


FIG. 25A

25/62

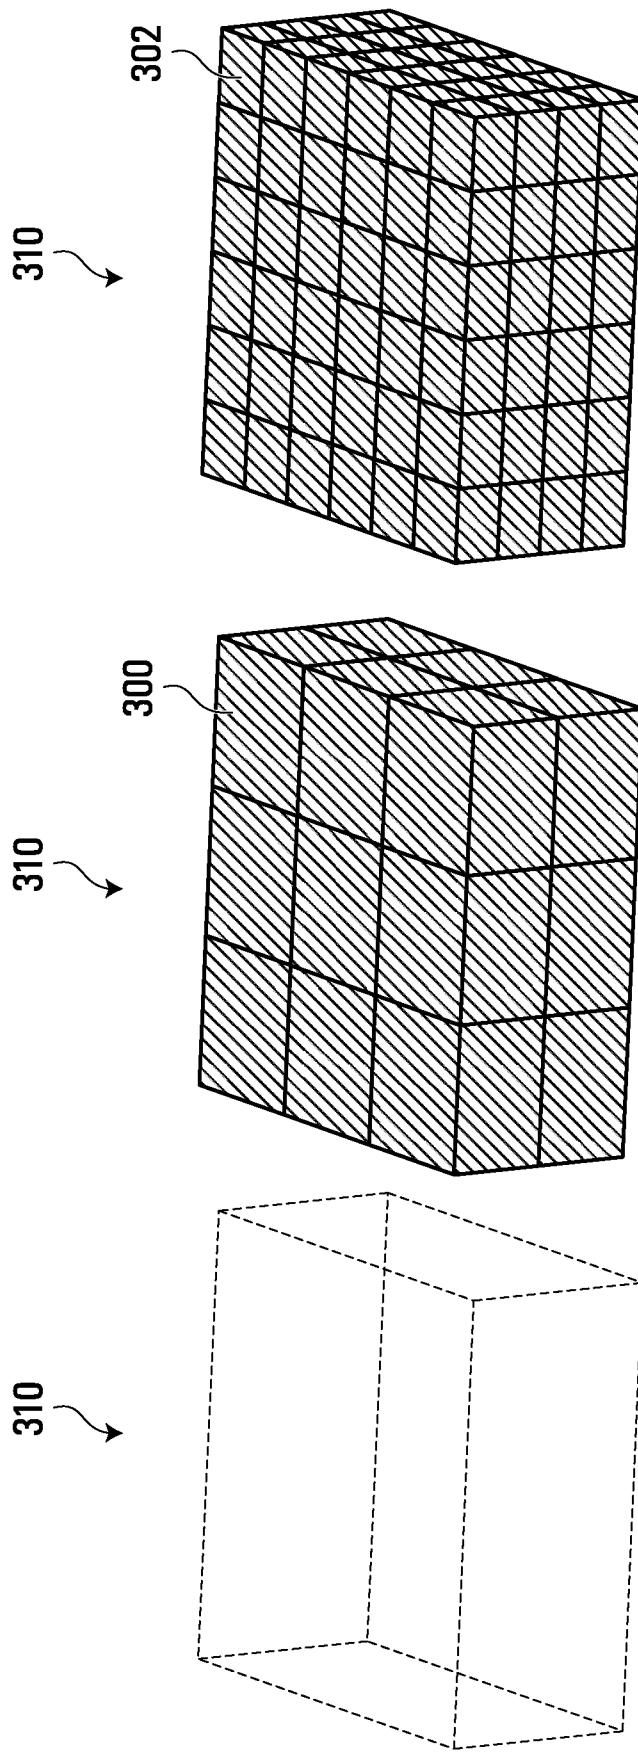


FIG. 25B

26/62

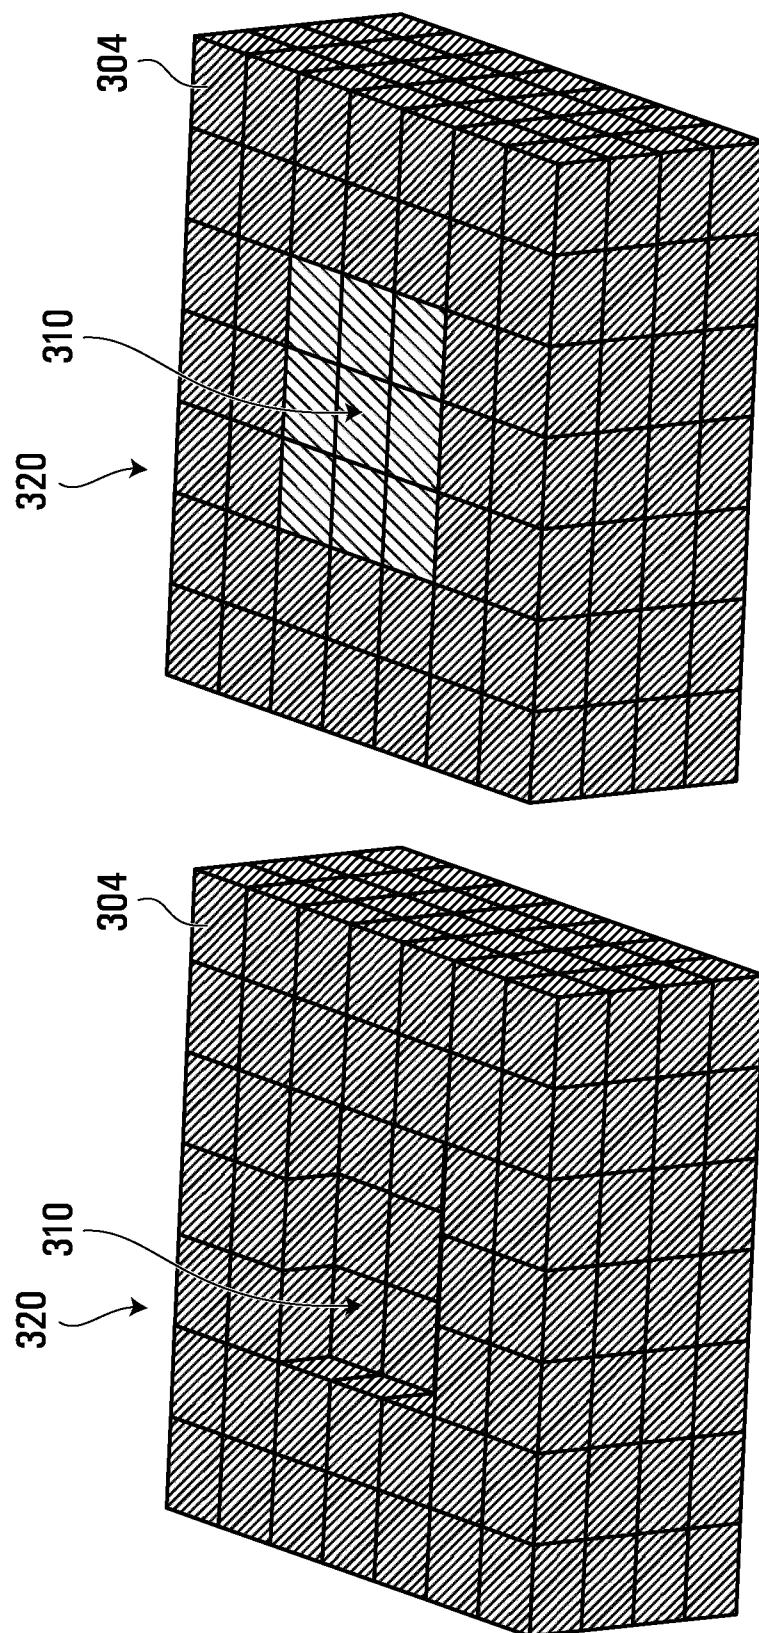
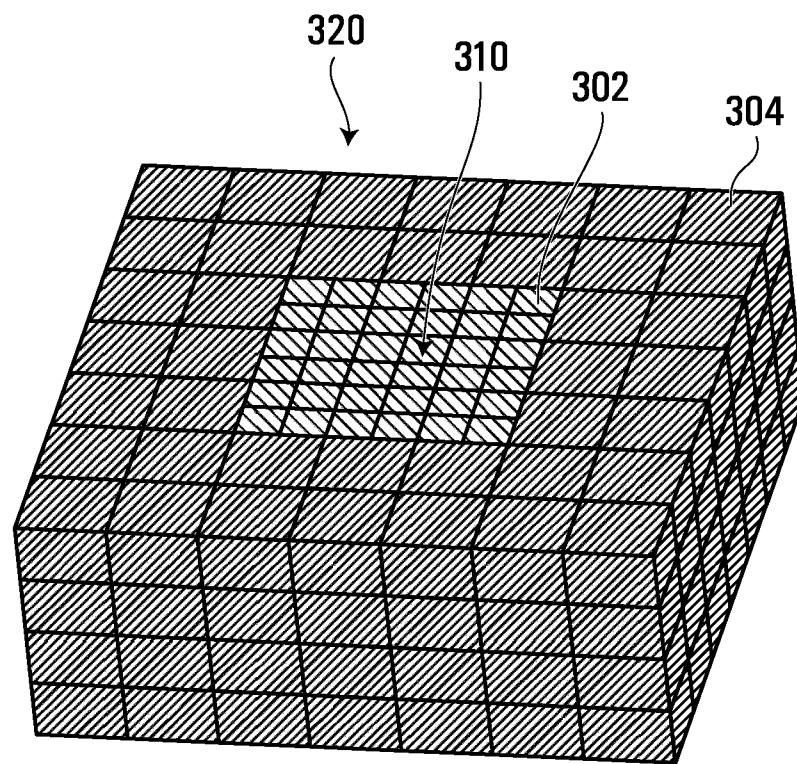


FIG. 25C

27/62

**FIG. 25D**

28/62

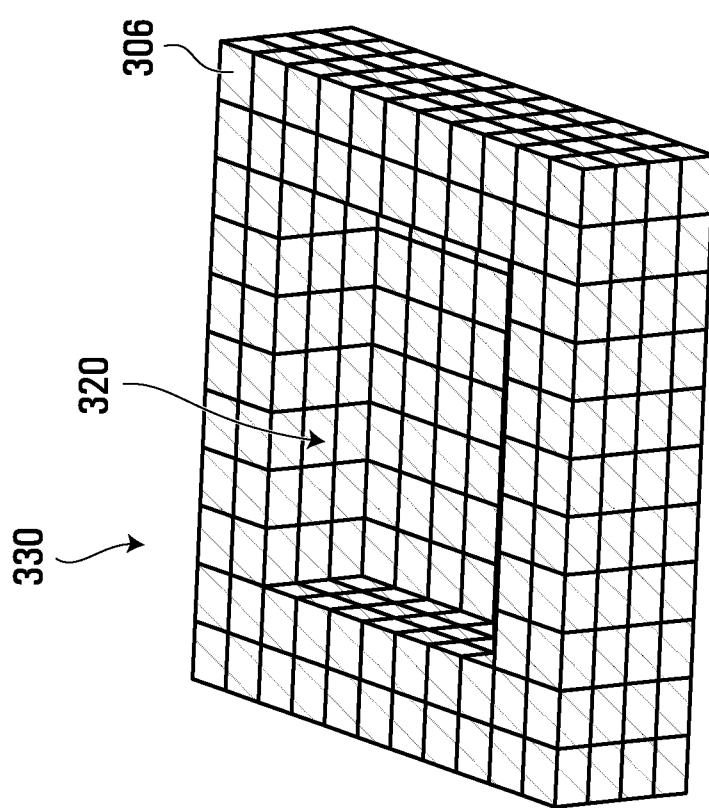
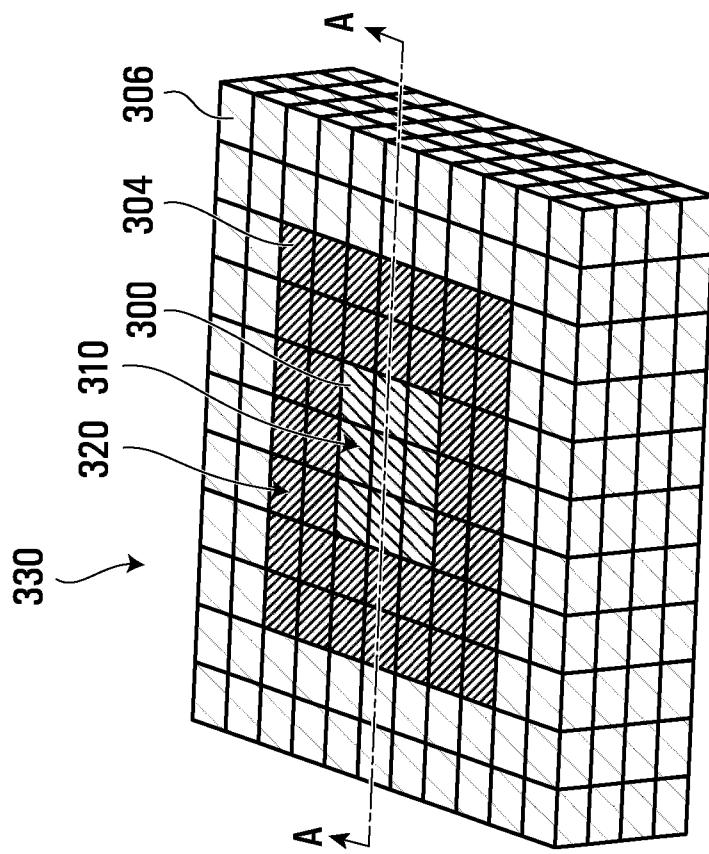
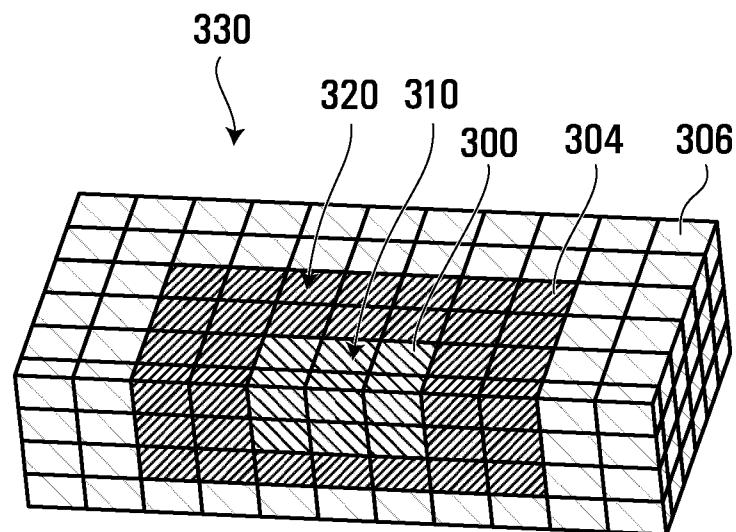
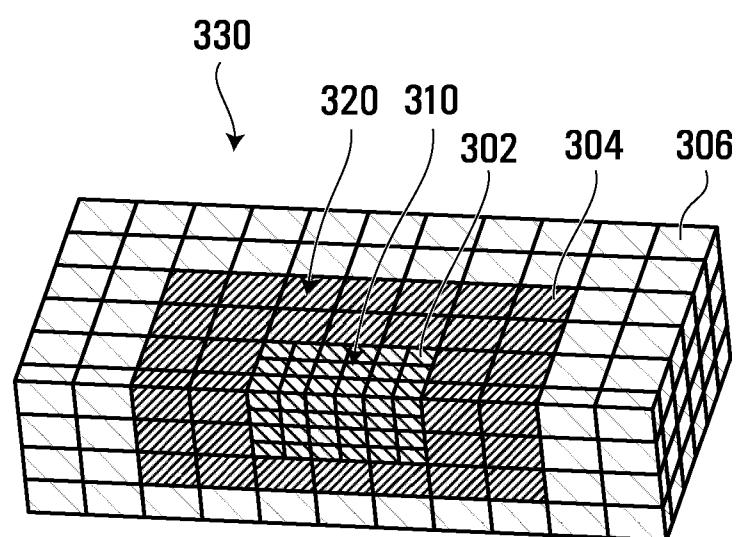
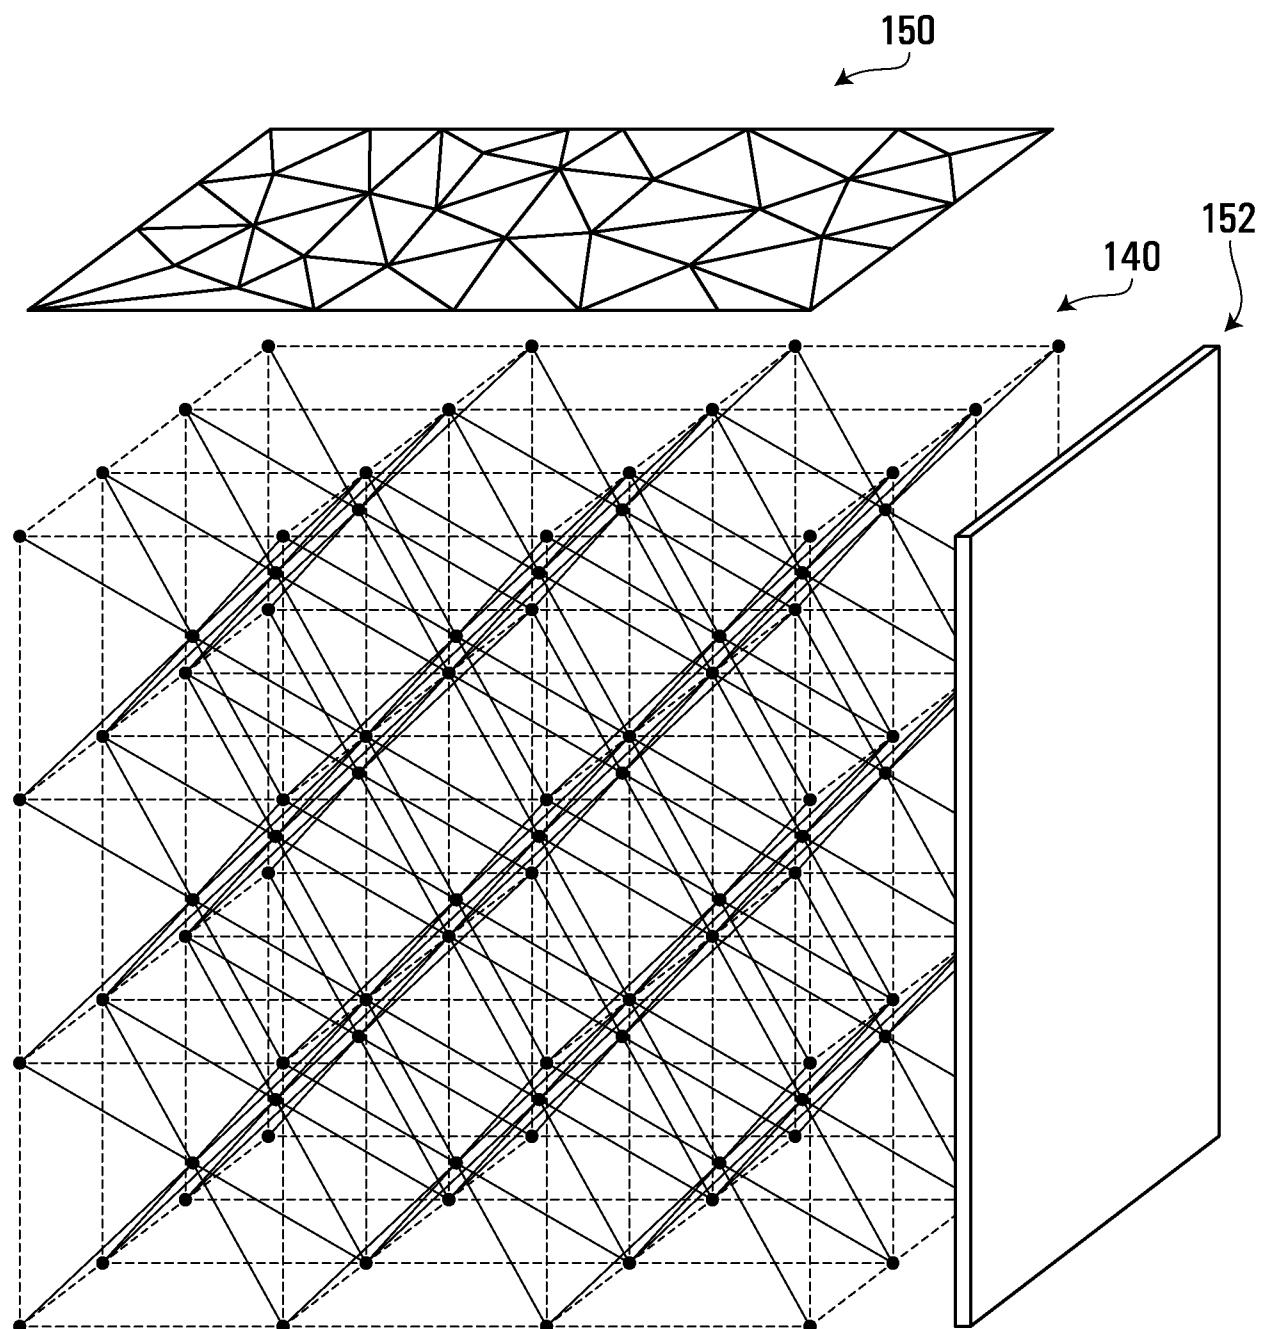


FIG. 25E

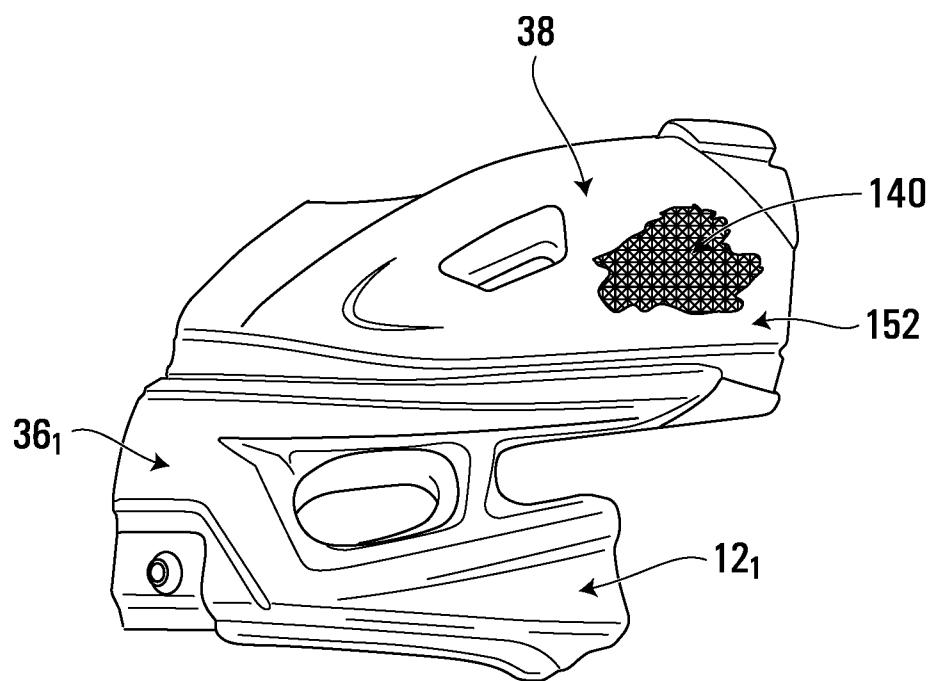
29/62

**FIG. 25F****FIG. 25G**

30/62

**FIG. 26**

31/62

**FIG. 27**

32/62

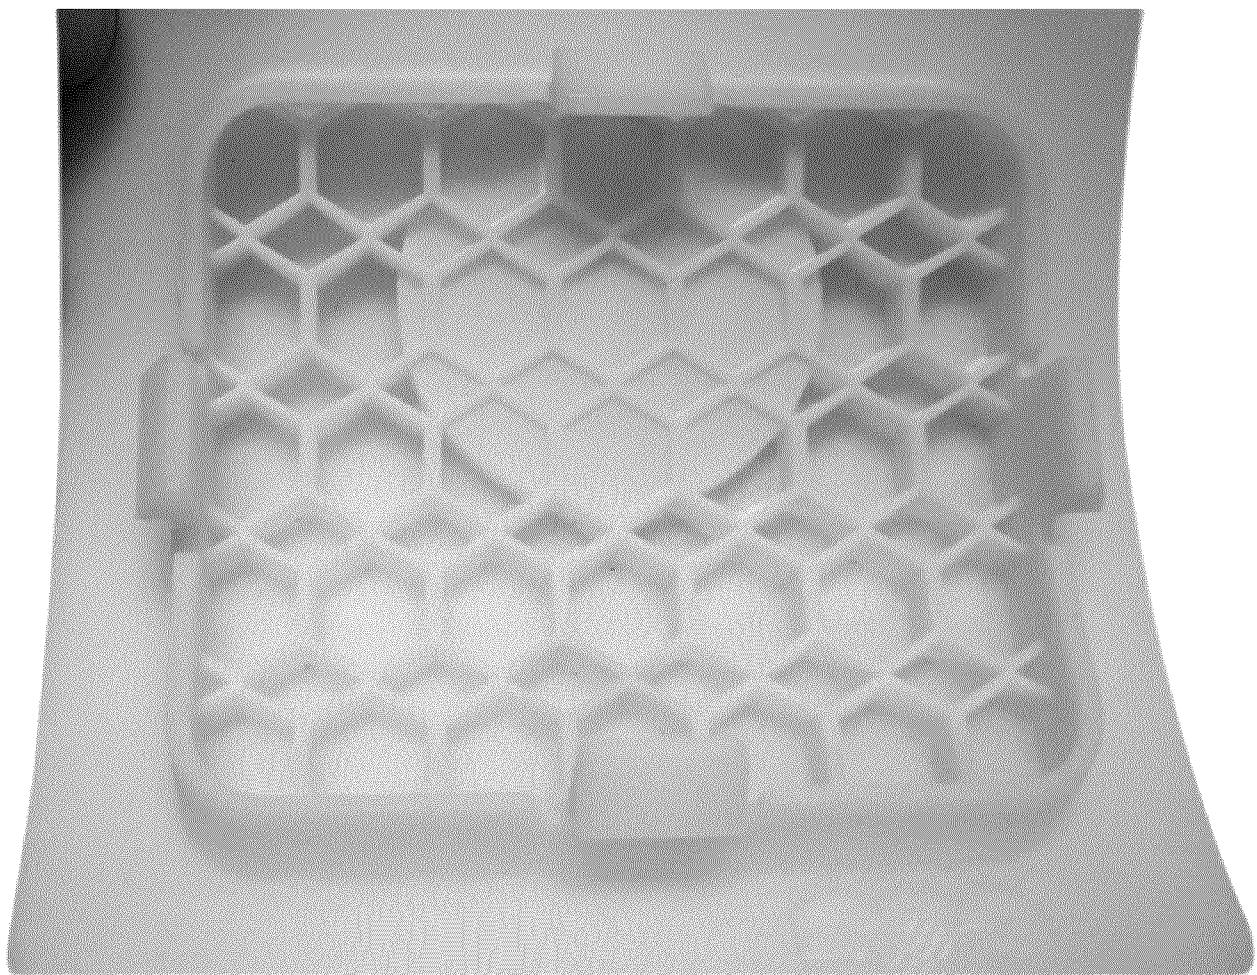


FIG. 28A

33/62

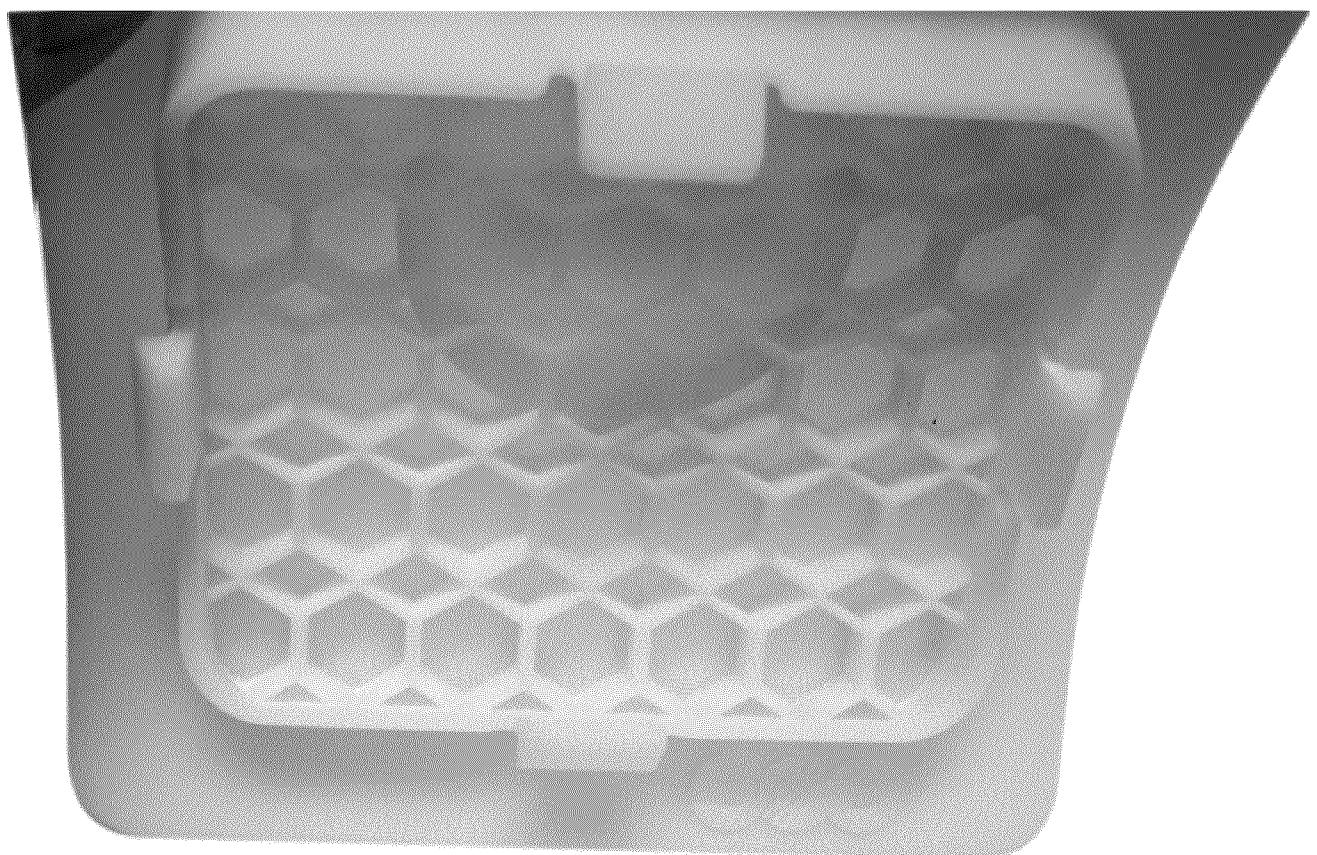


FIG. 28B

34/62

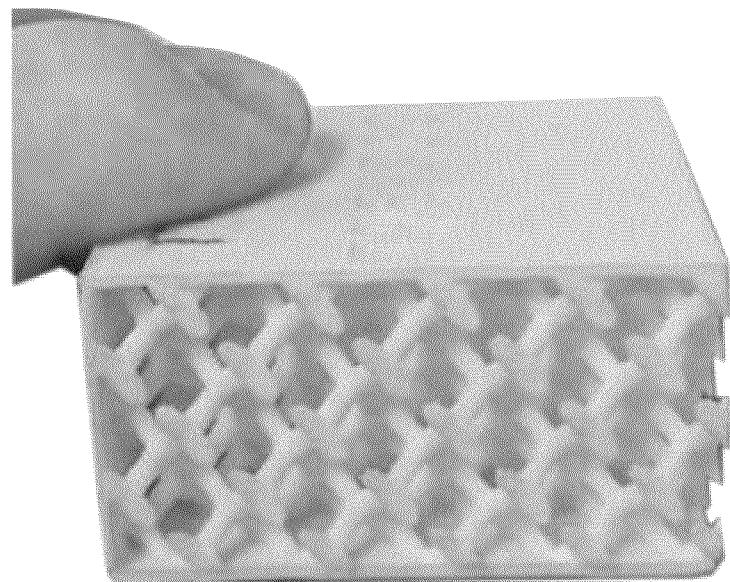


FIG. 29

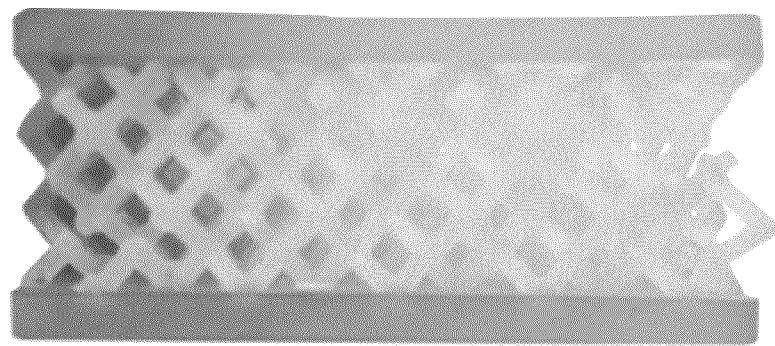


FIG. 30A

35/62

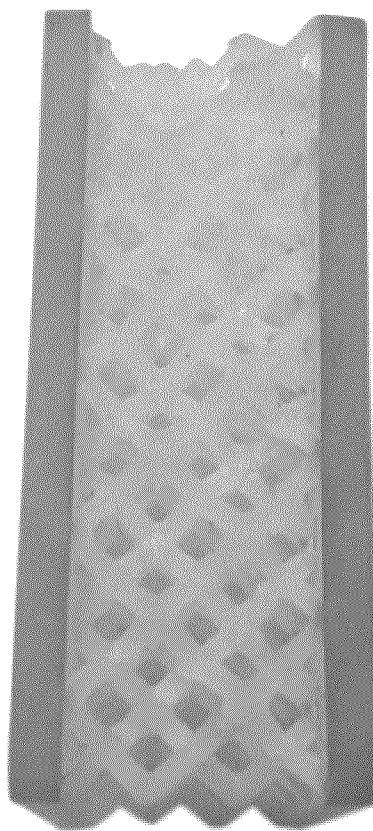


FIG. 30B

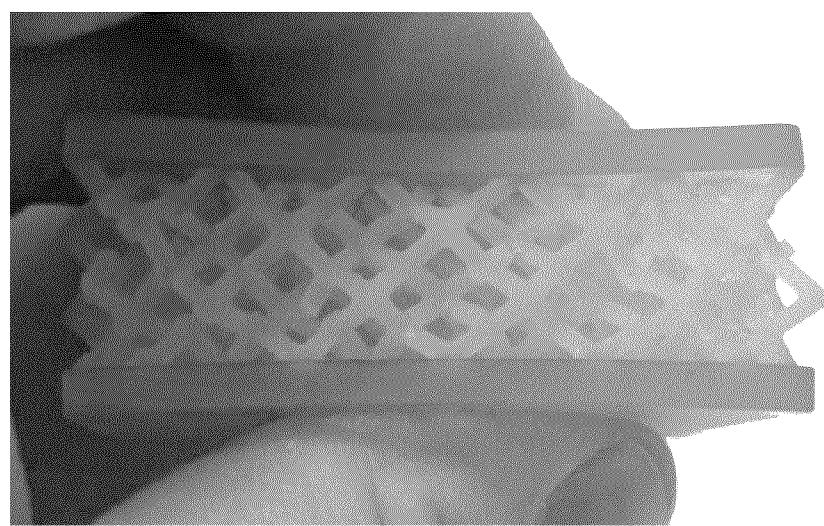
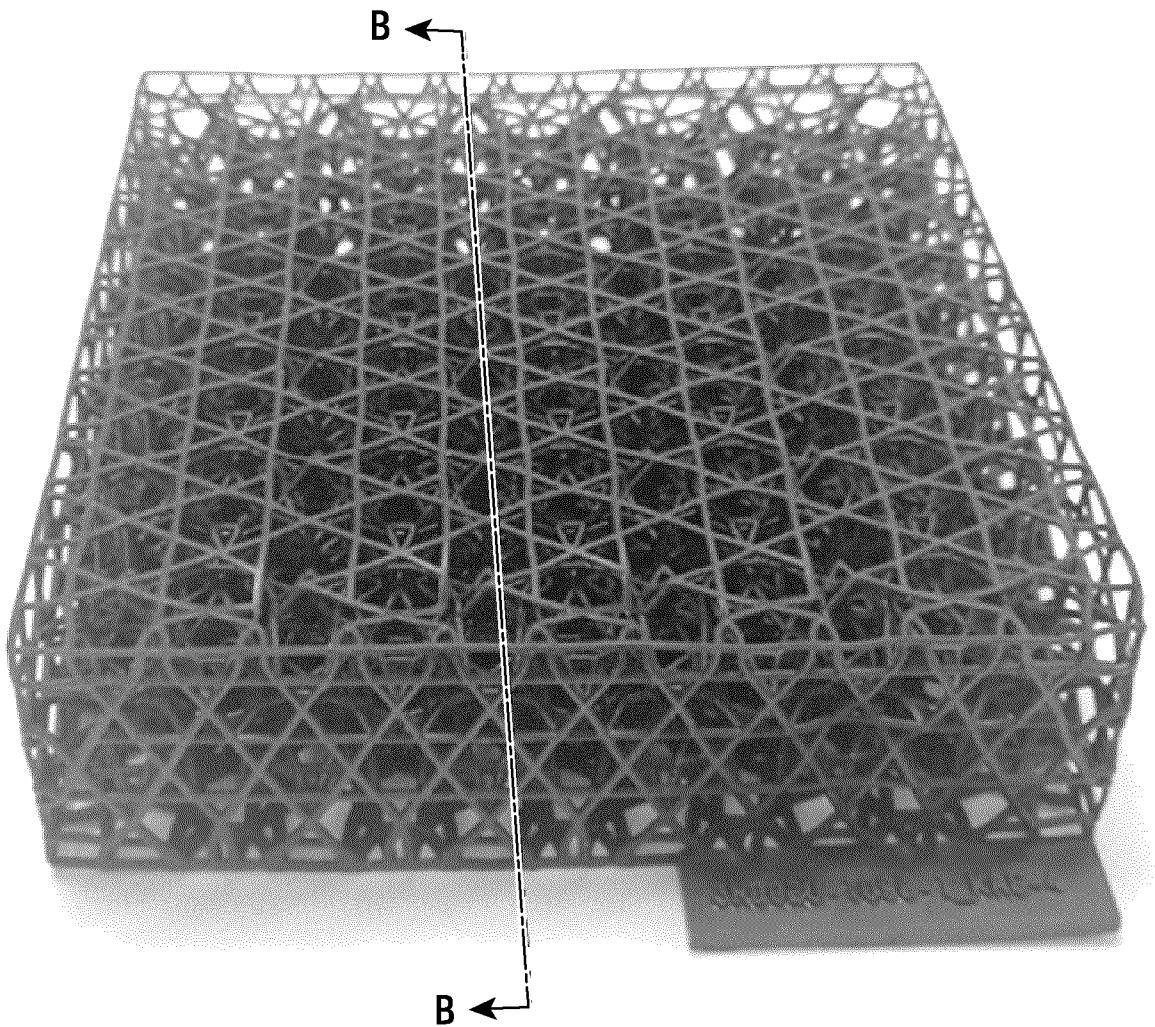


FIG. 30C

36/62

**FIG. 31A**

37/62

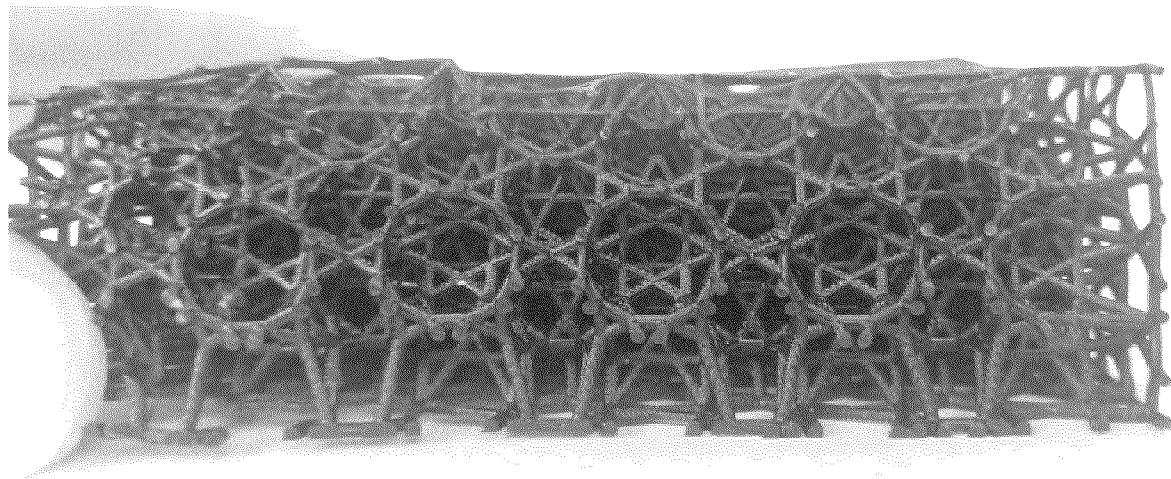


FIG. 31B

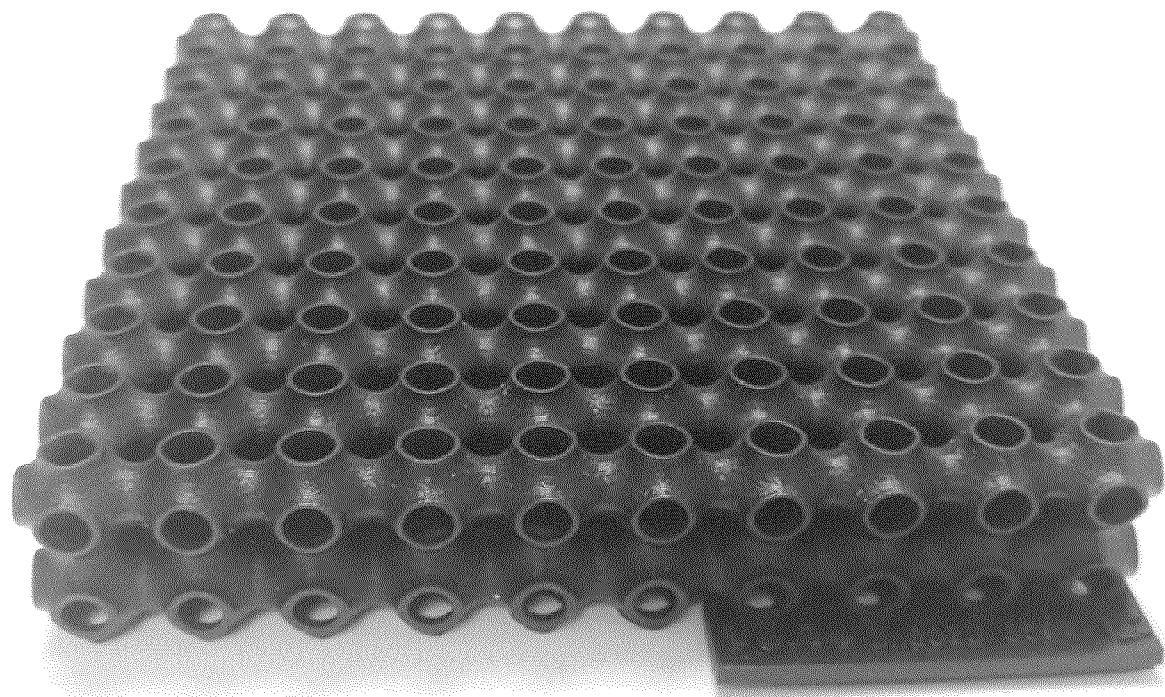


FIG. 32

38/62



FIG. 33

39/62

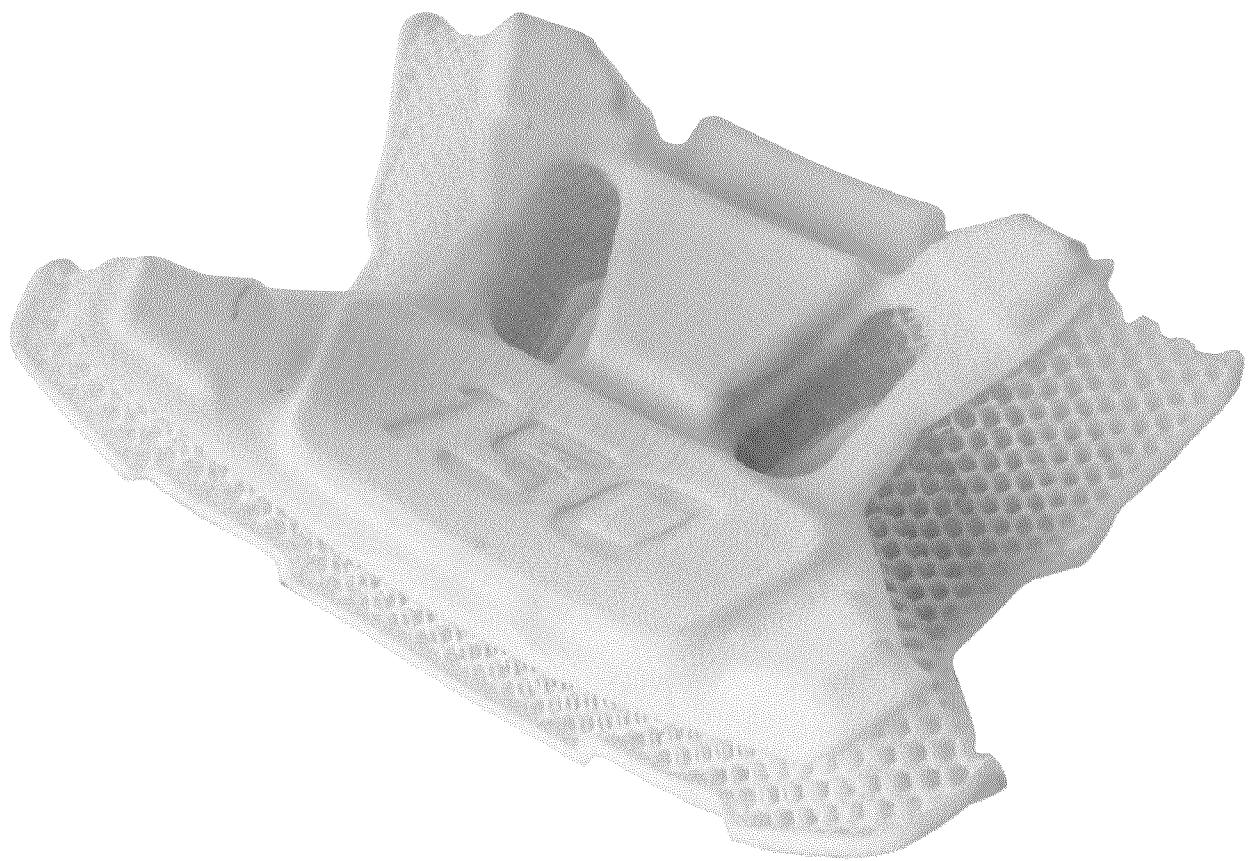


FIG. 34A

40/62

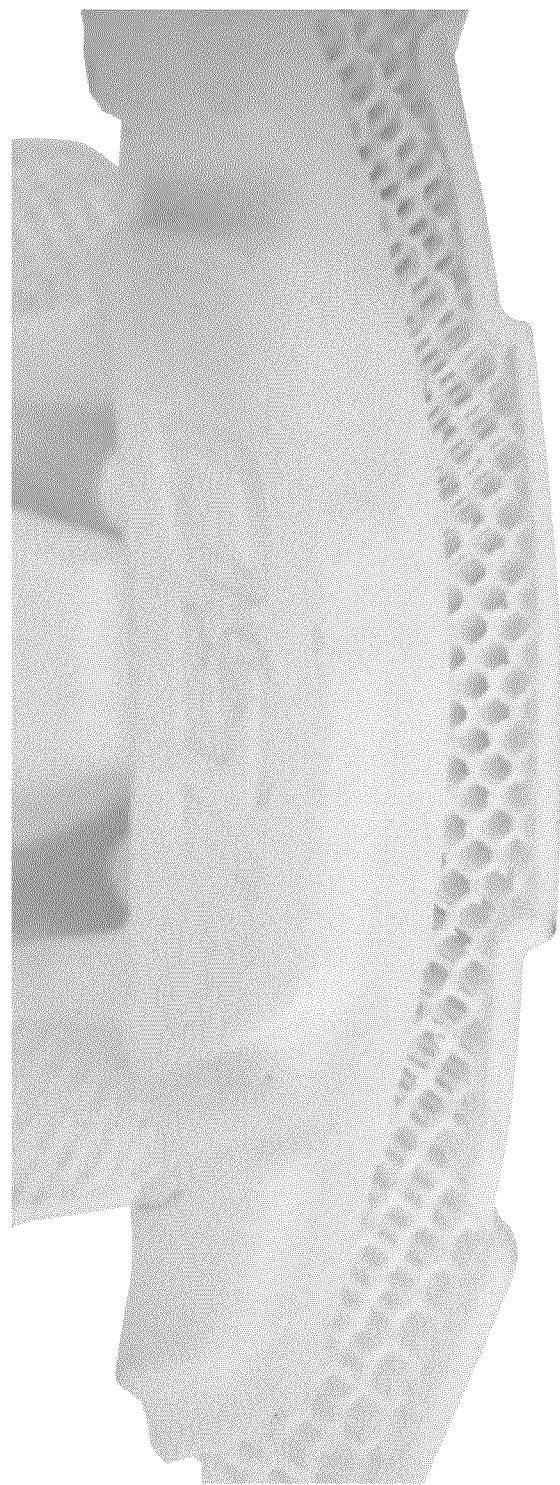




FIG. 34B

41/62




FIG. 34C


42/62

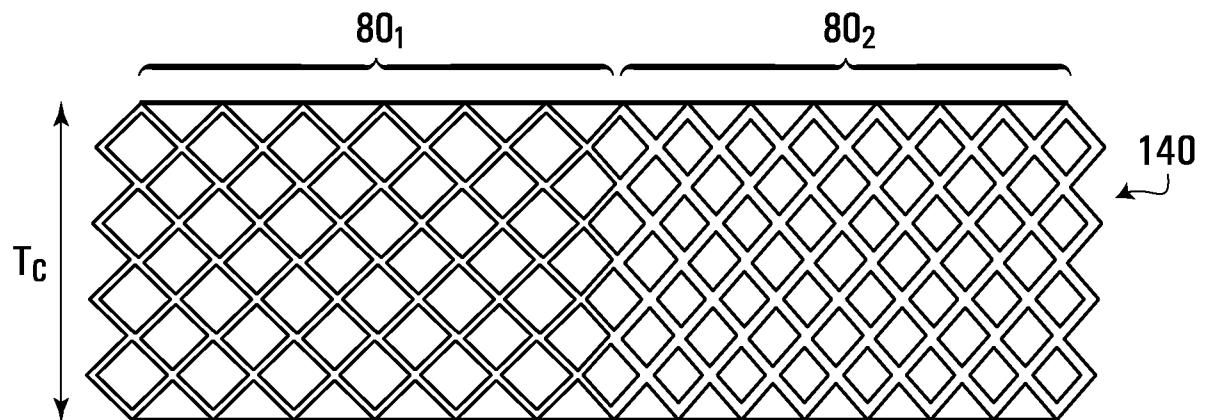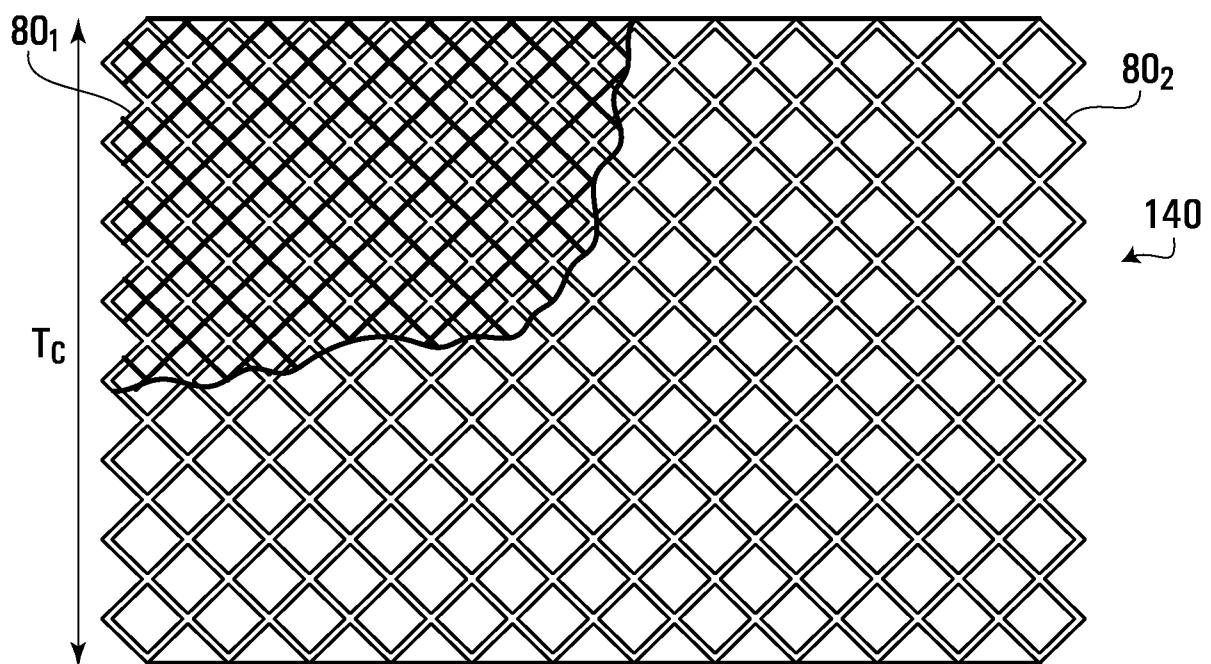**FIG. 35A****FIG. 35B**

43/62

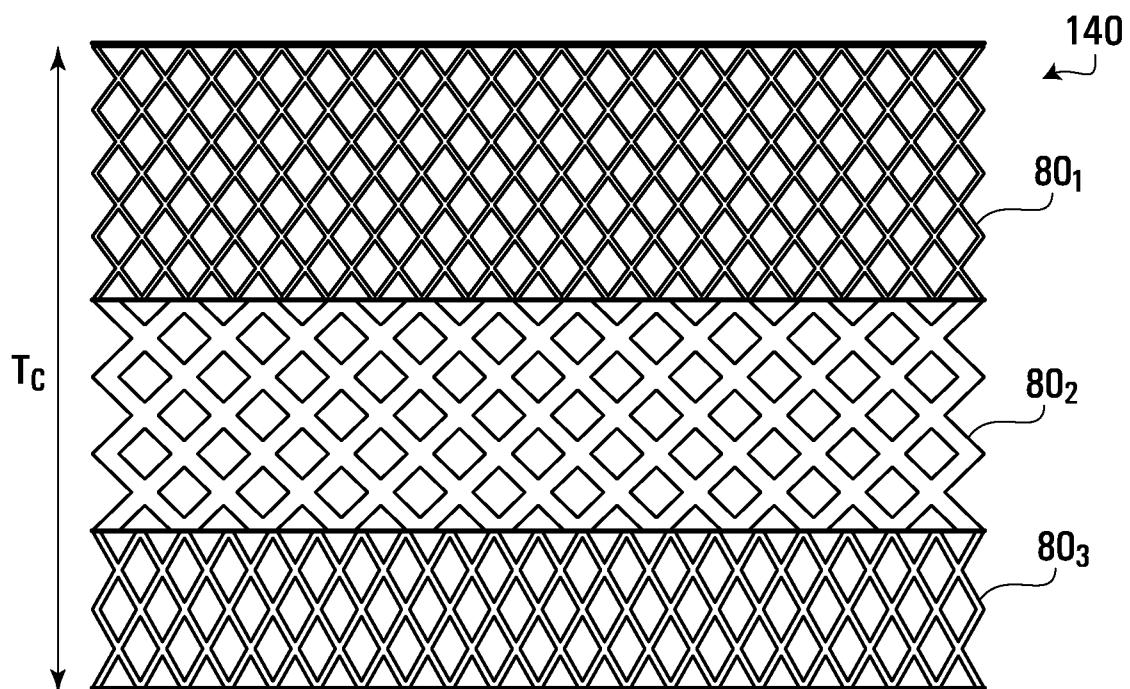**FIG. 35C**

44/62

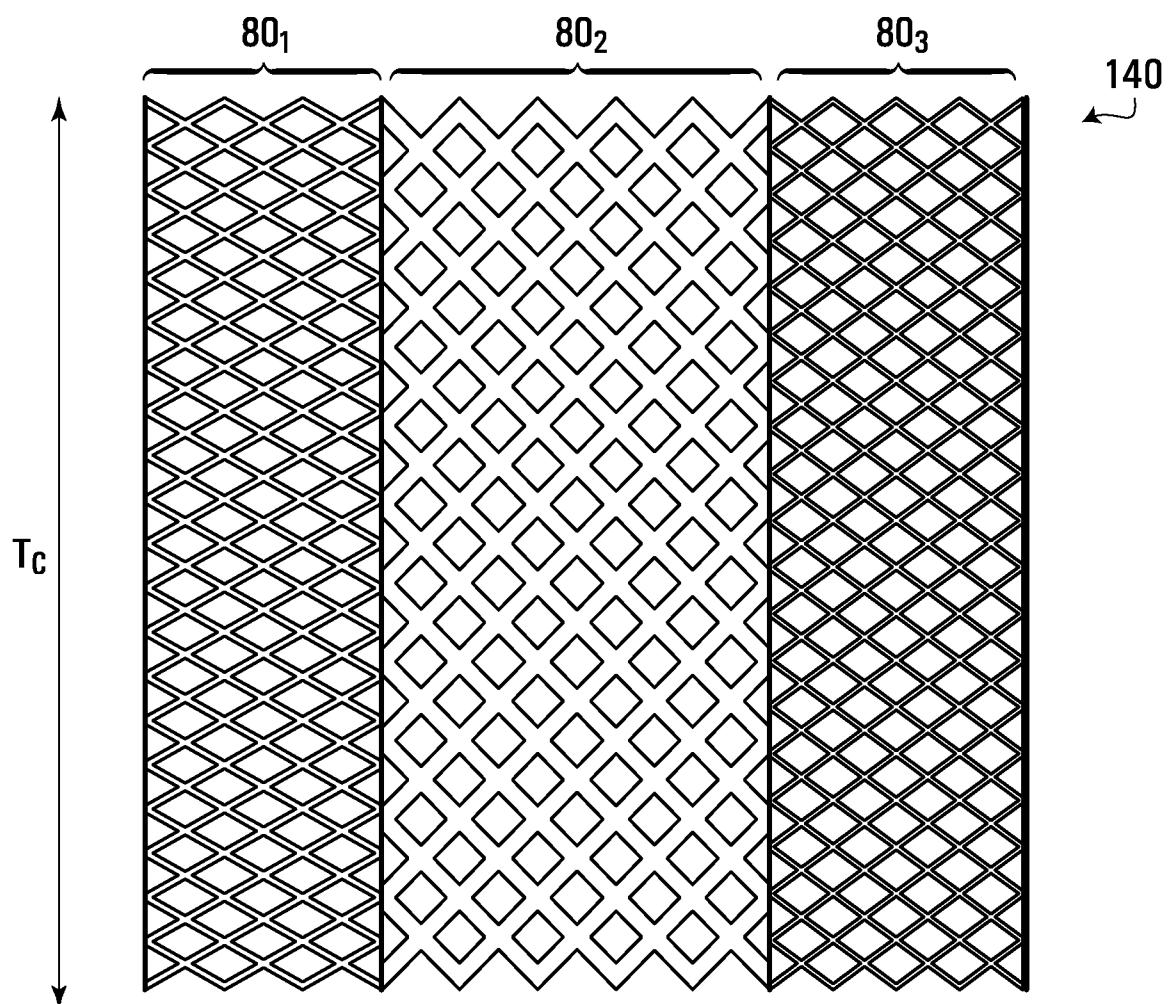**FIG. 35D**

45/62

THIS FIGURE IS ON SCALE

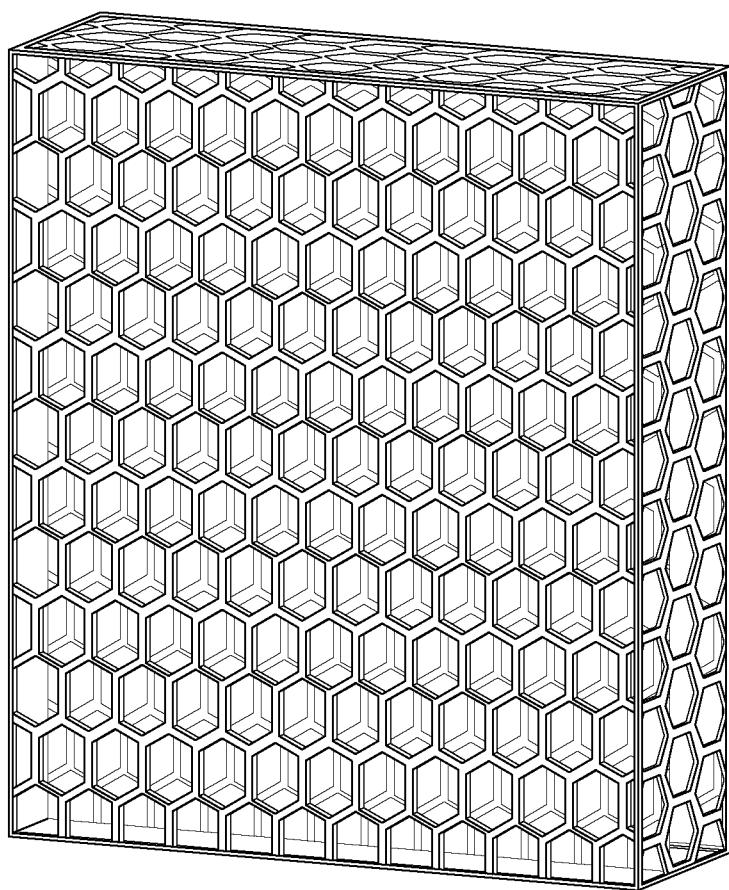
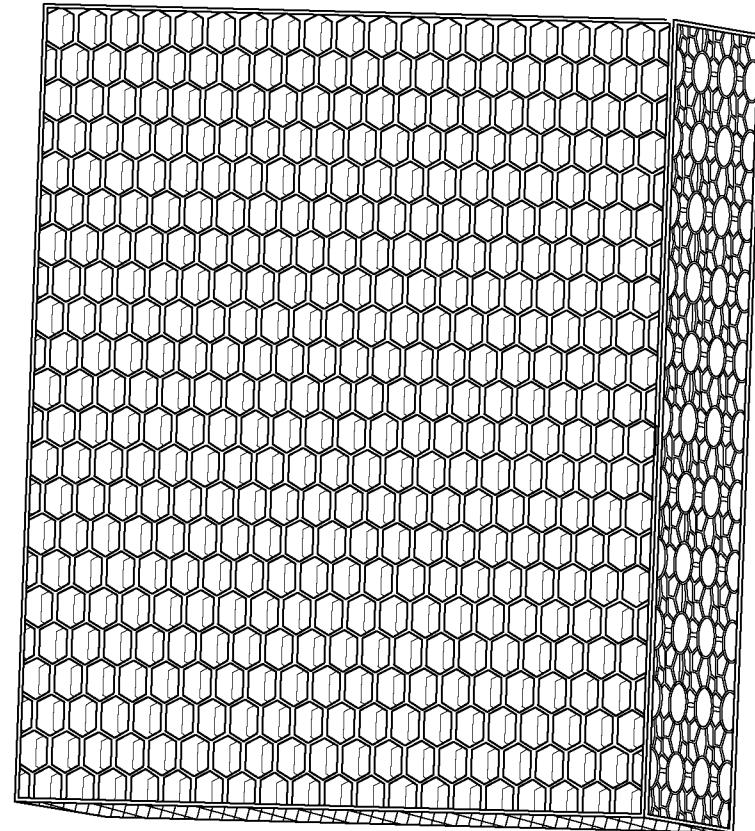


FIG. 36

46/62


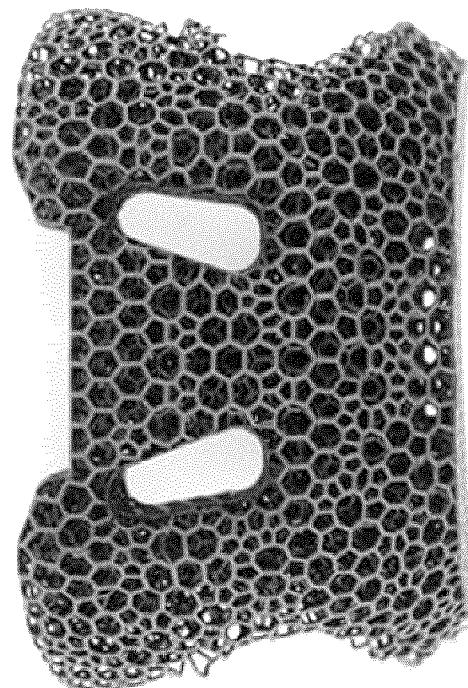


FIG. 37B



FIG. 37A

47/62

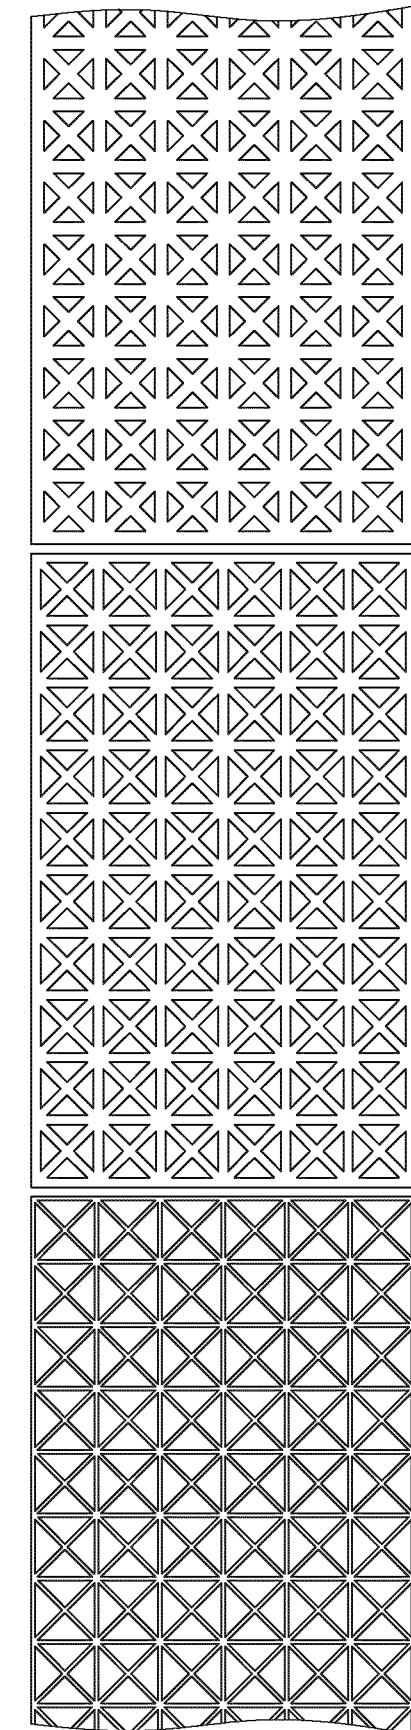

THIS FIGURE IS ON SCALE

FIG. 38

48/62

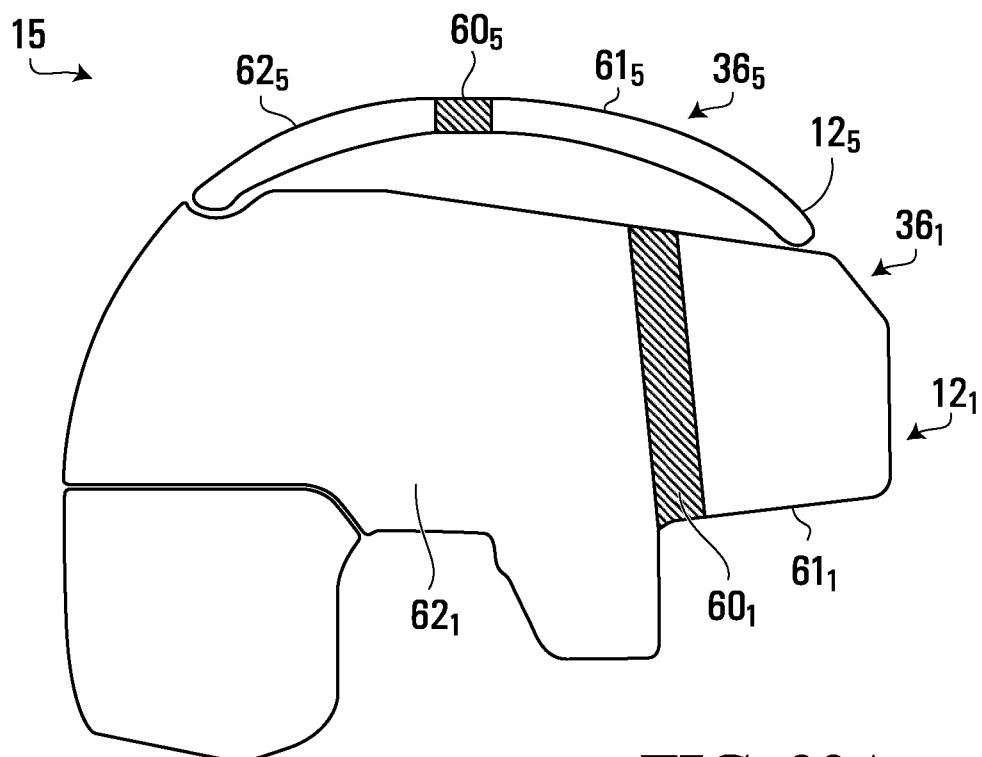


FIG. 39A

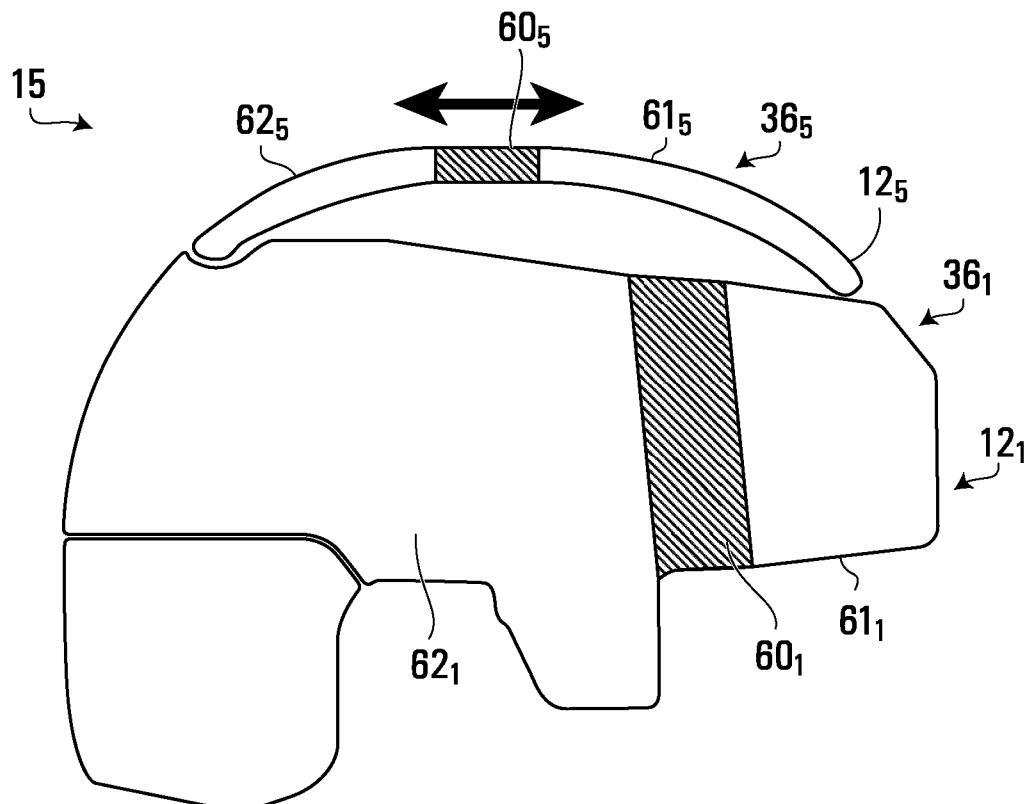
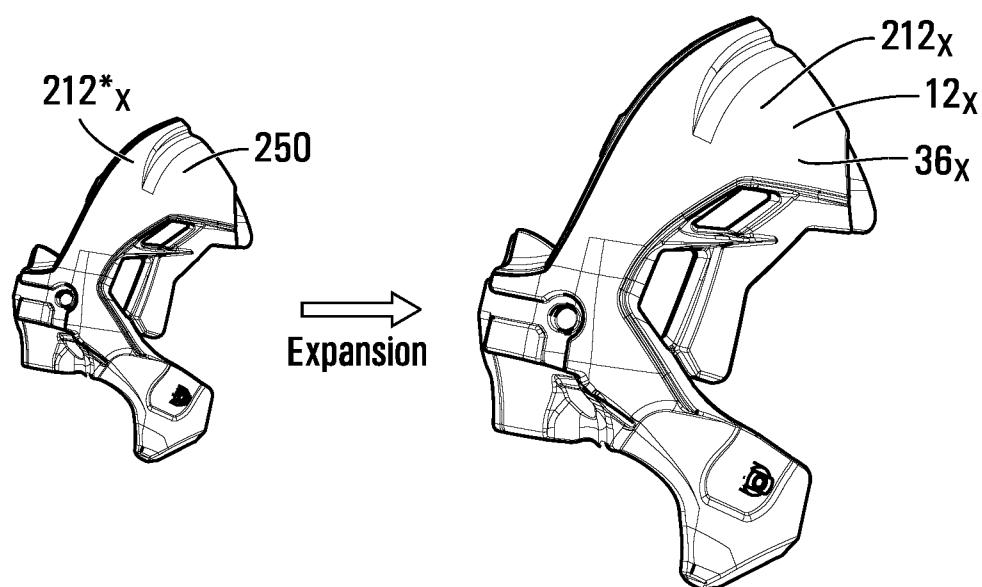
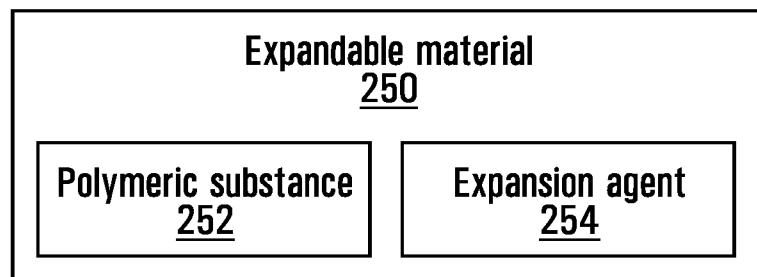
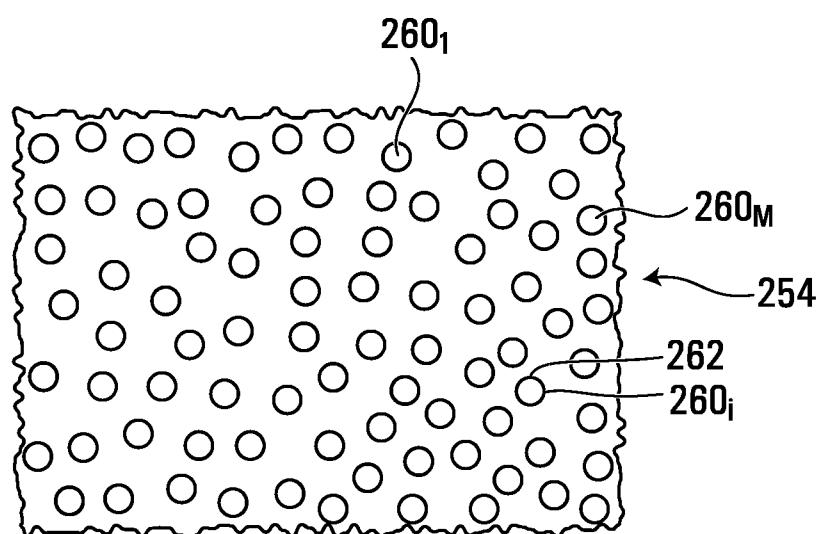


FIG. 39B

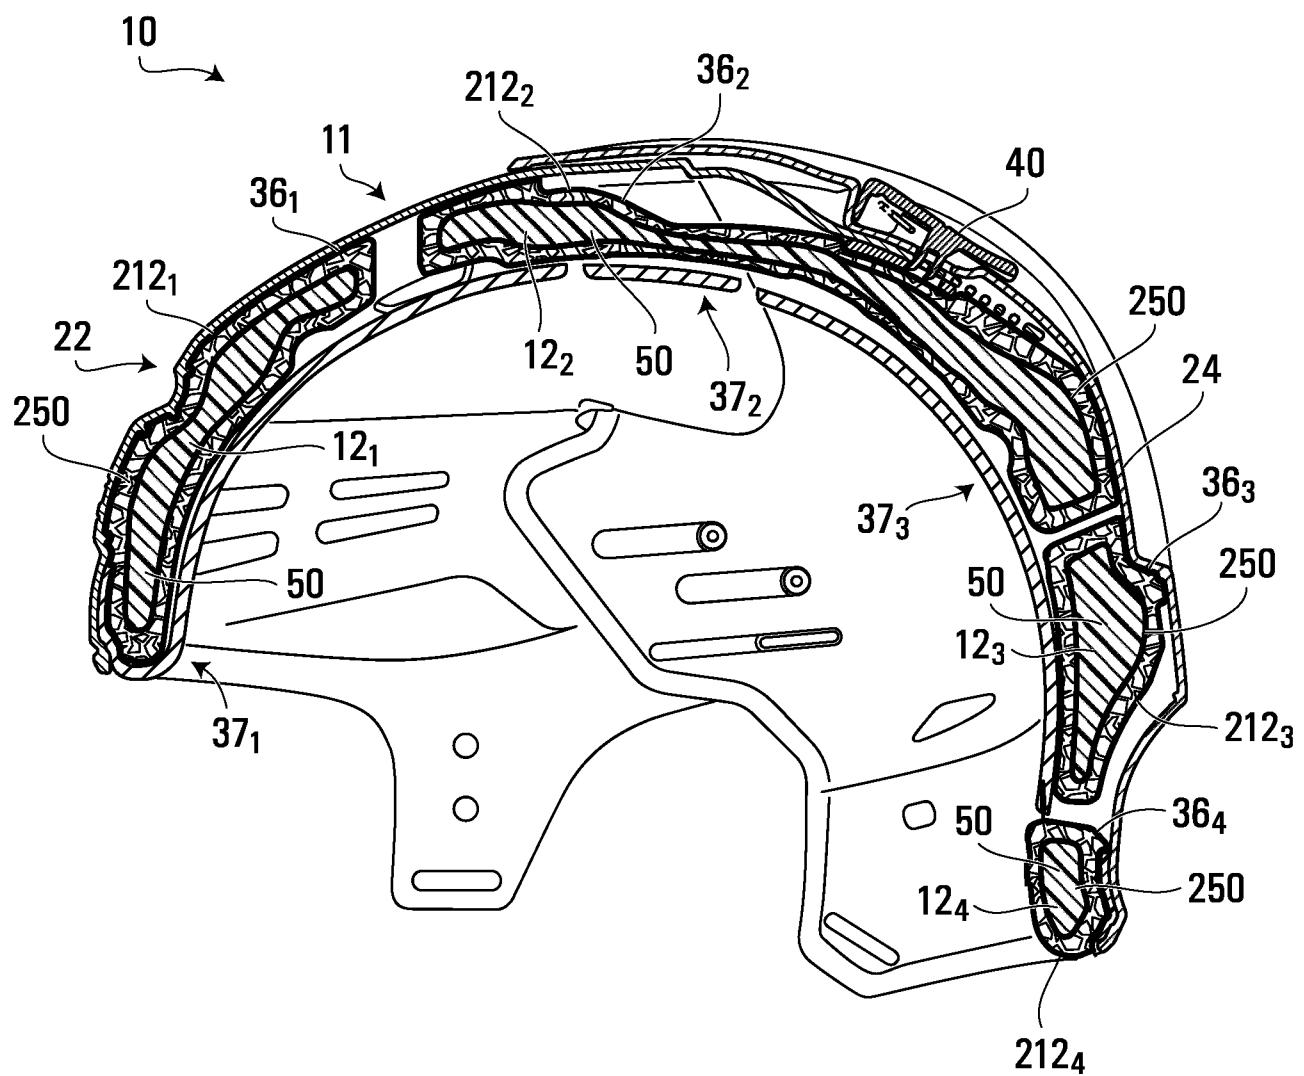
49/62

**FIG. 40**

50/62

**FIG. 41****FIG. 42**

51/62

**FIG. 43**

52/62



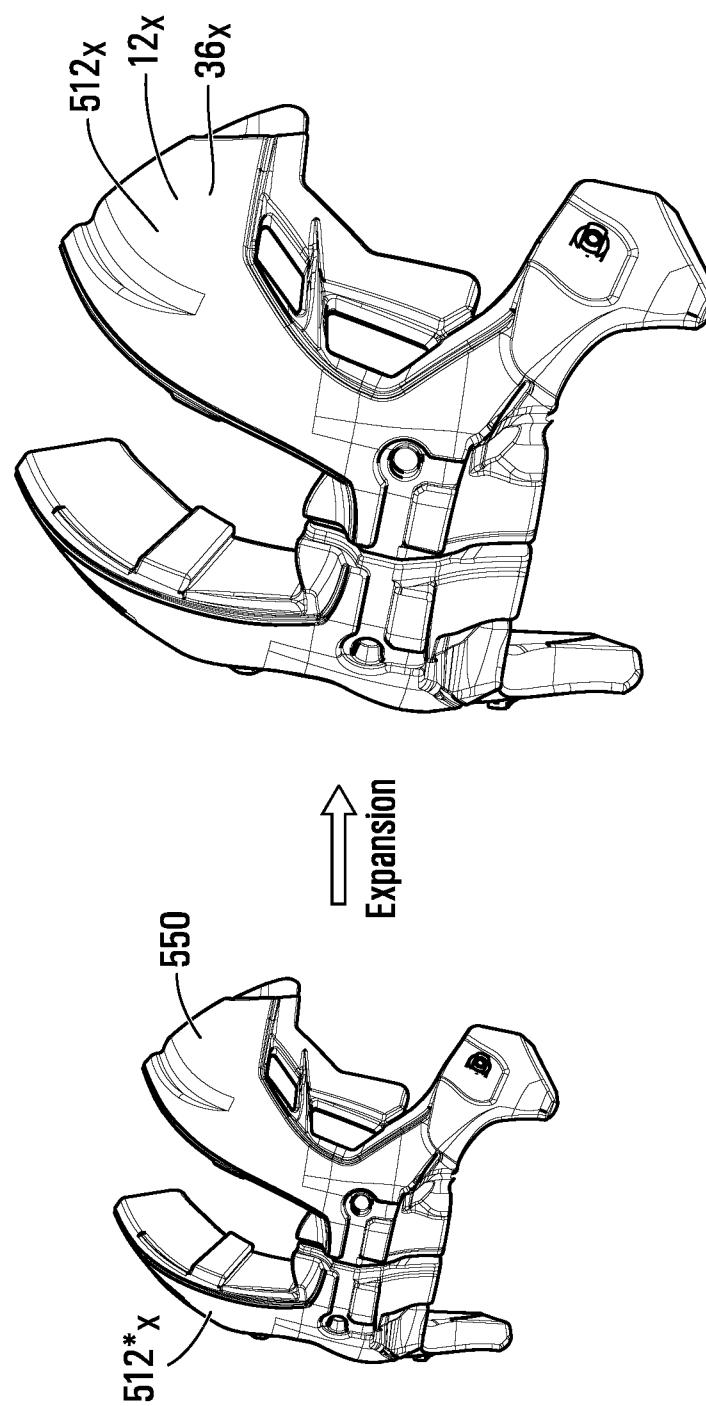


FIG. 44


53/62

**FIG. 45**



54/62

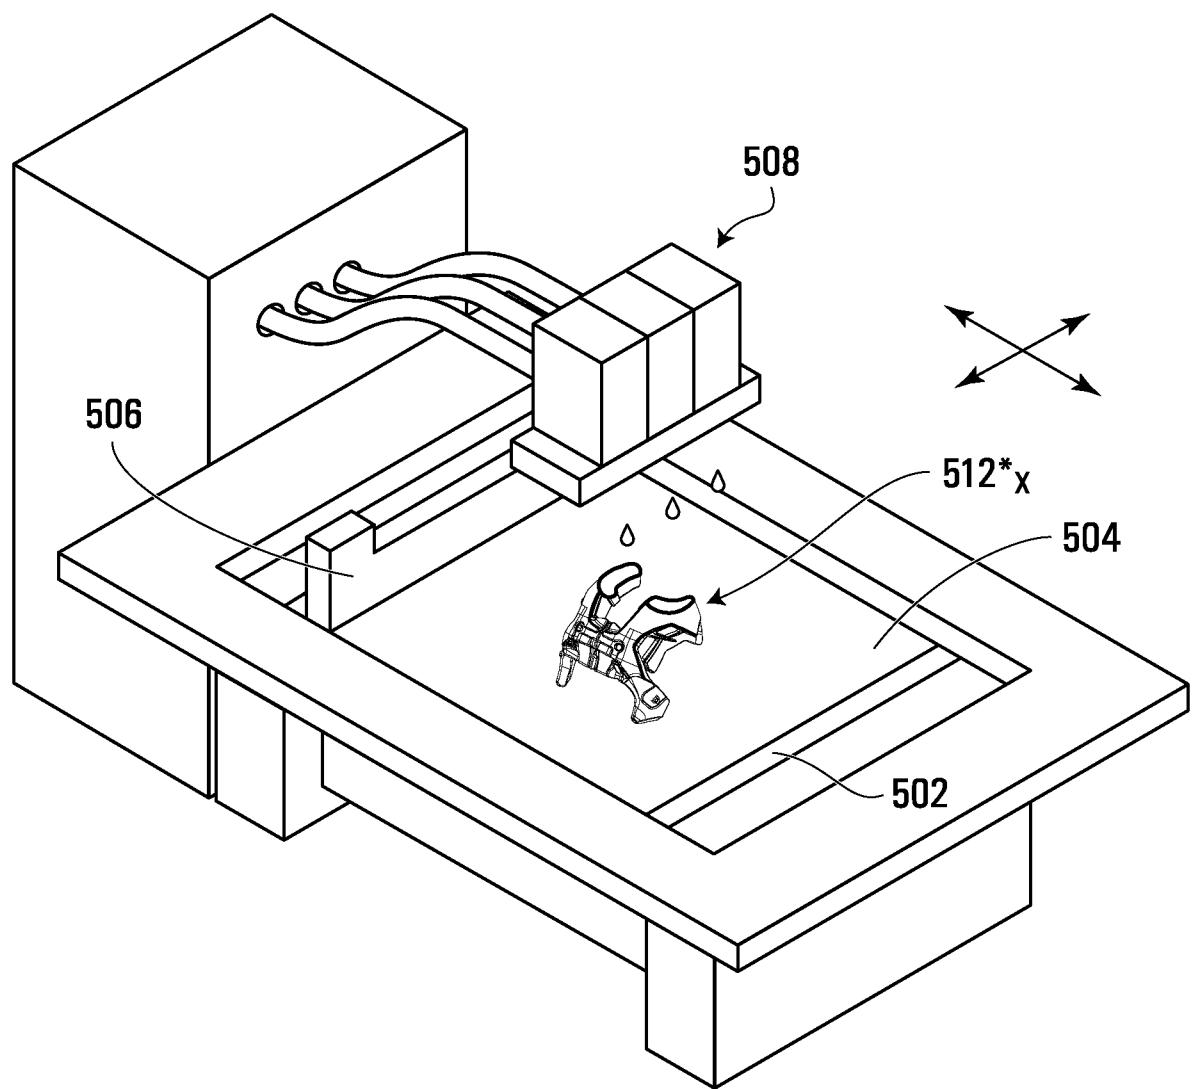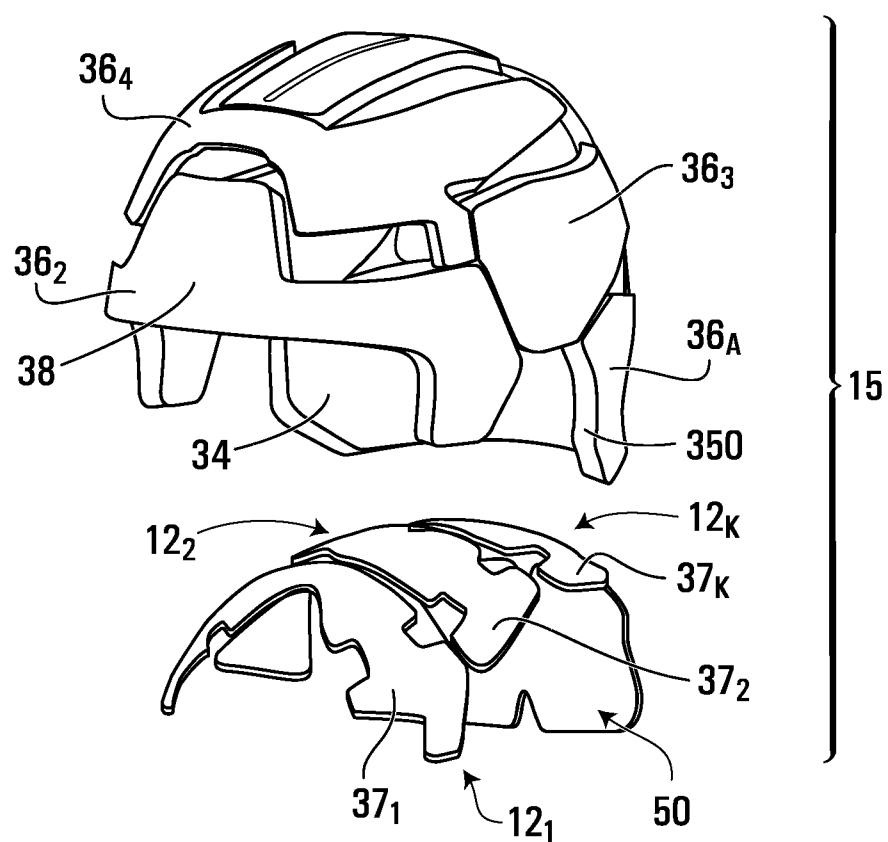


55/62

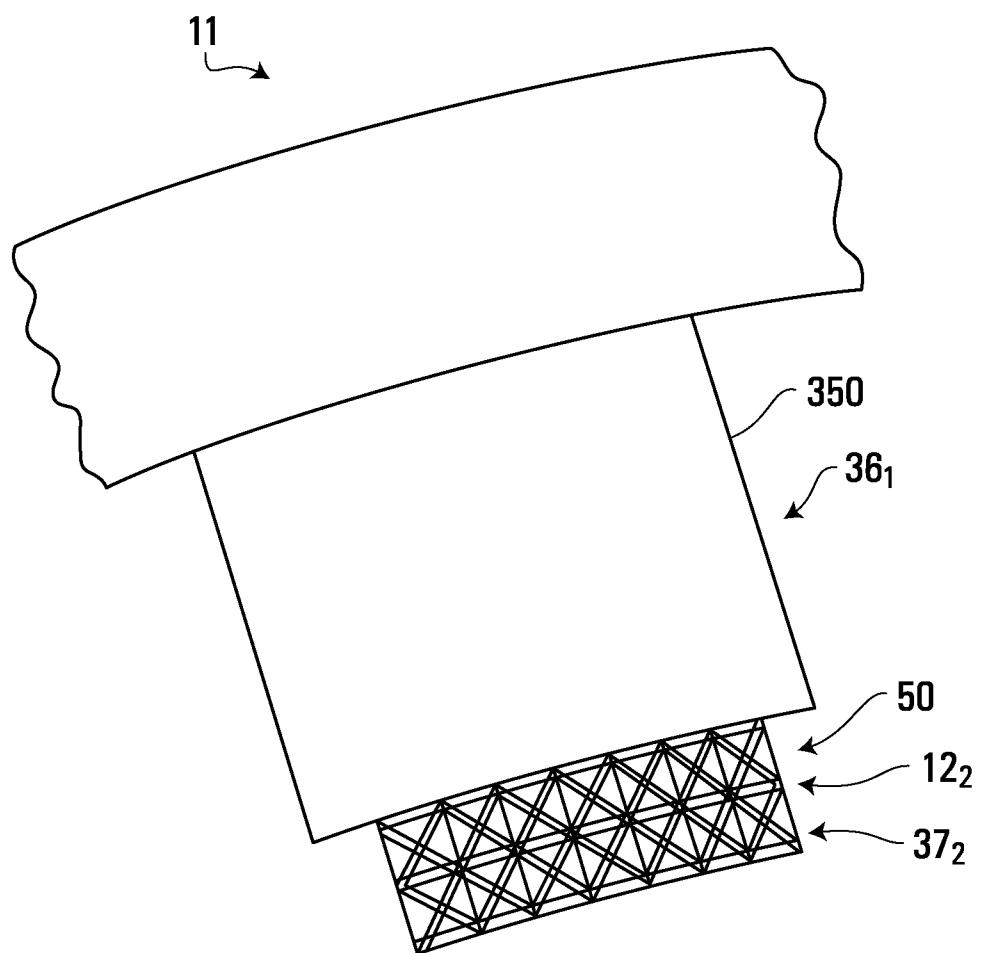**FIG. 47**


56/62

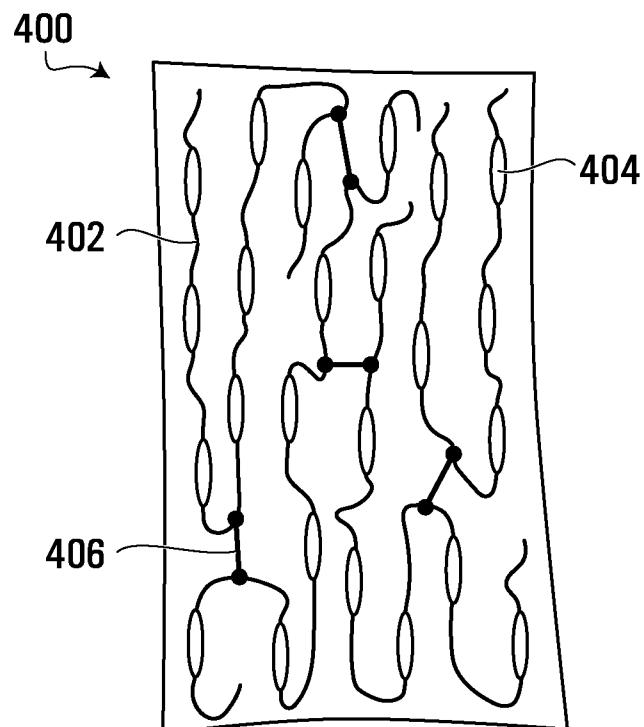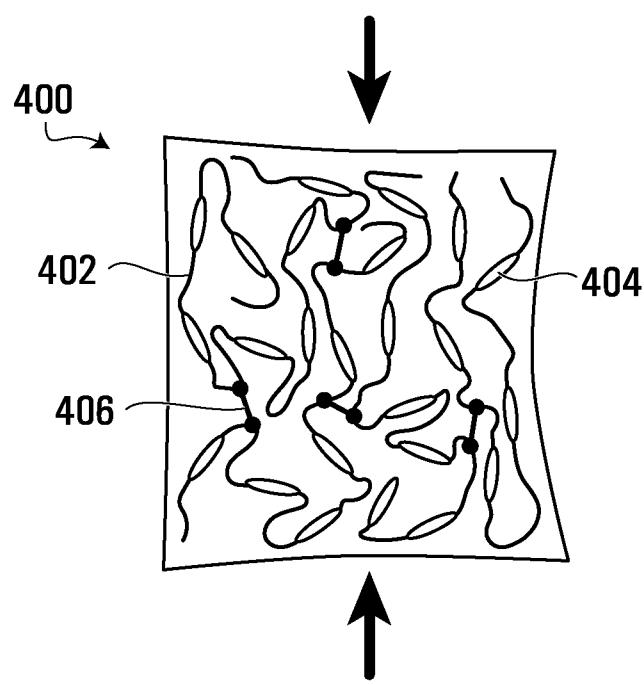
**FIG. 48A****FIG. 48B**

57/62


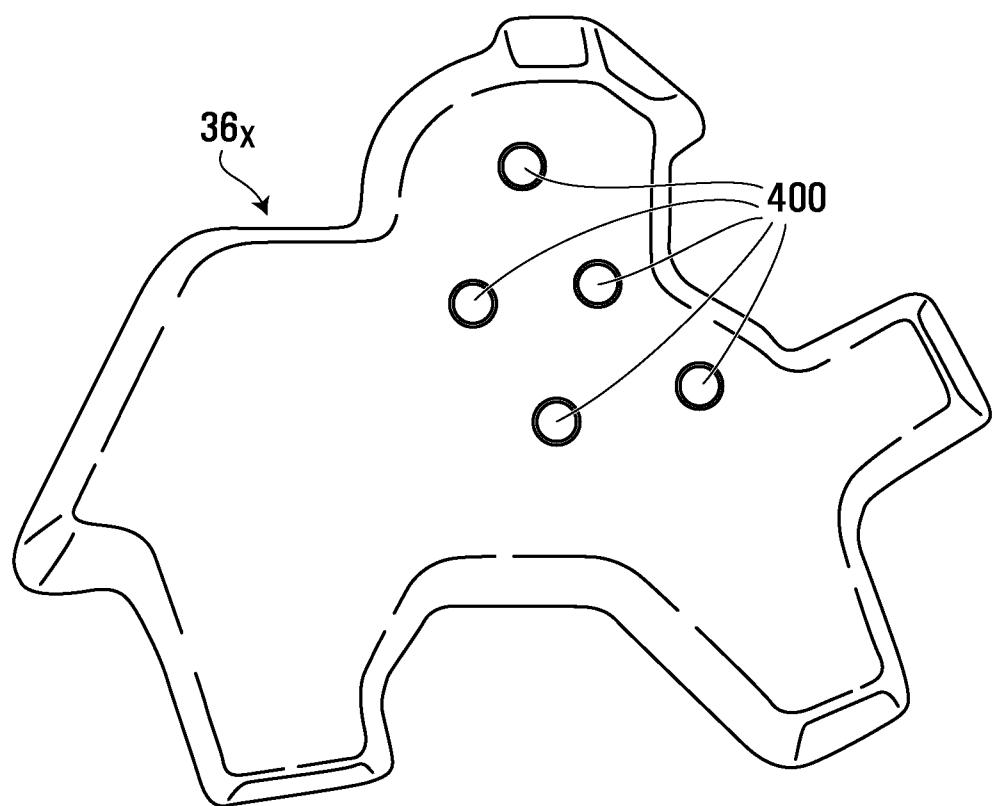
**FIG. 49**

58/62


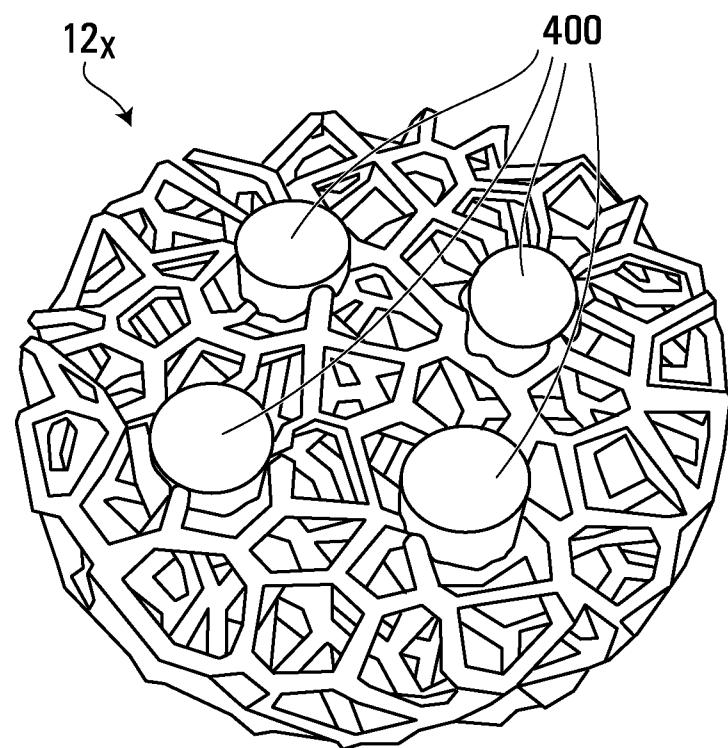
**FIG. 50**

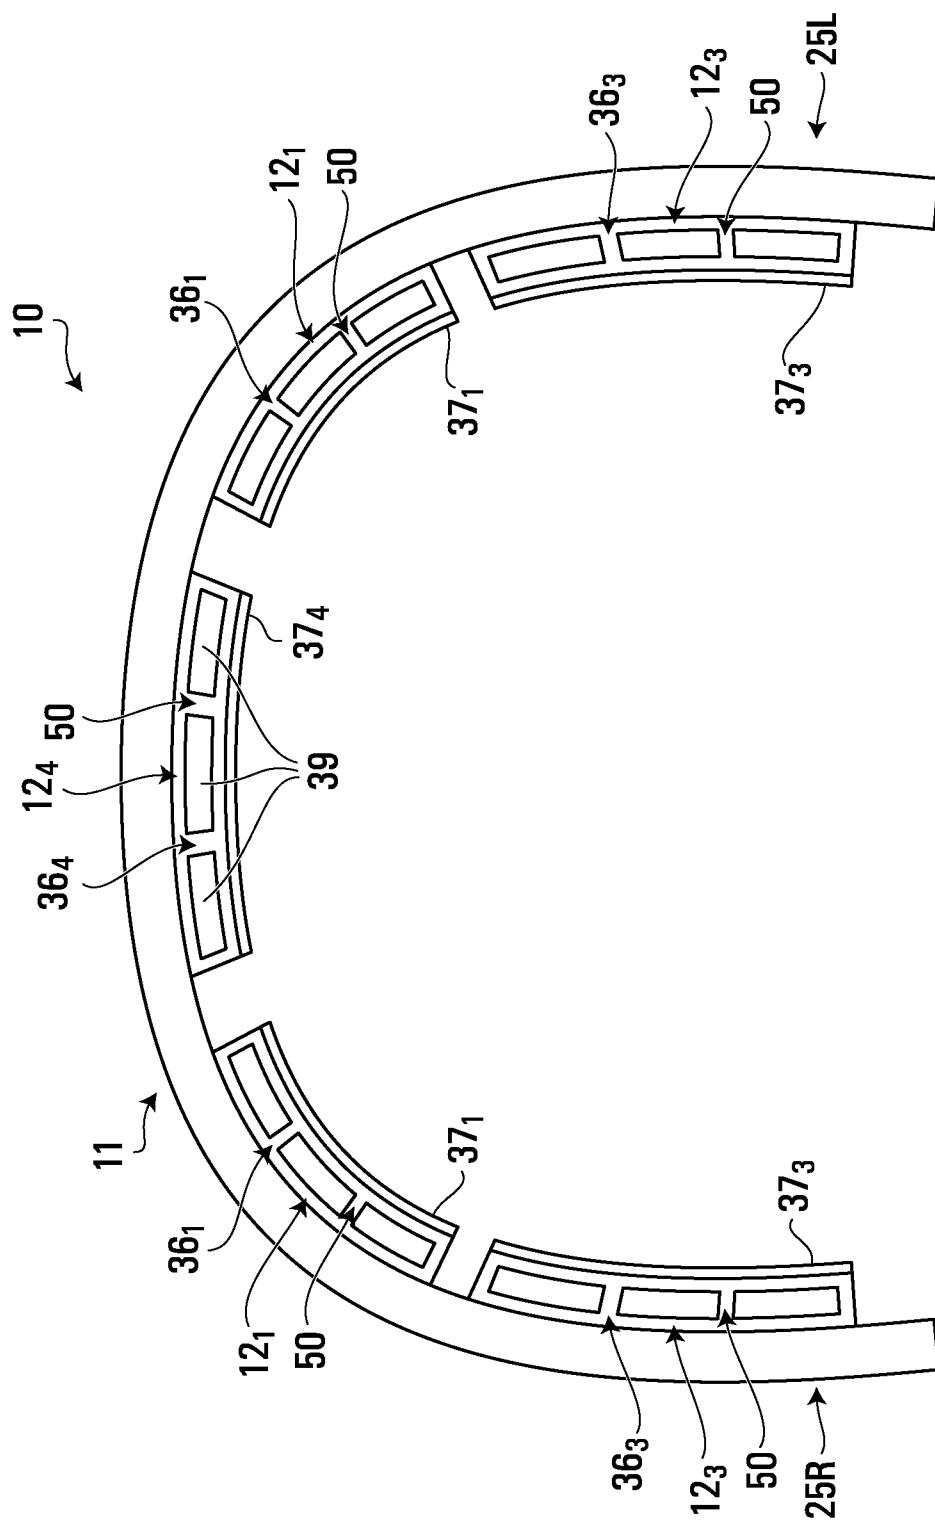**FIG. 51**


60/62

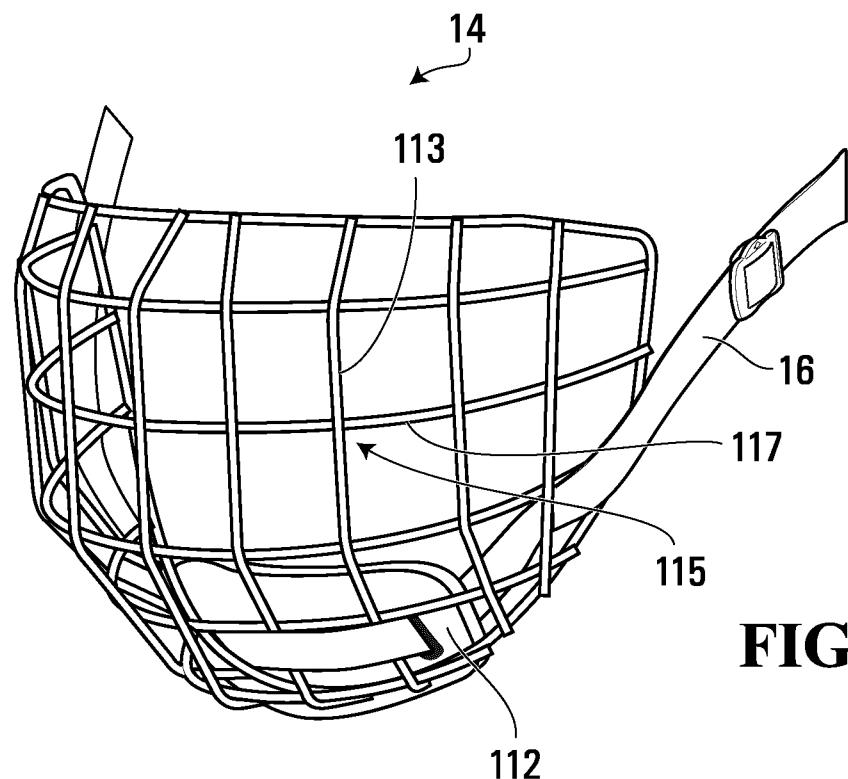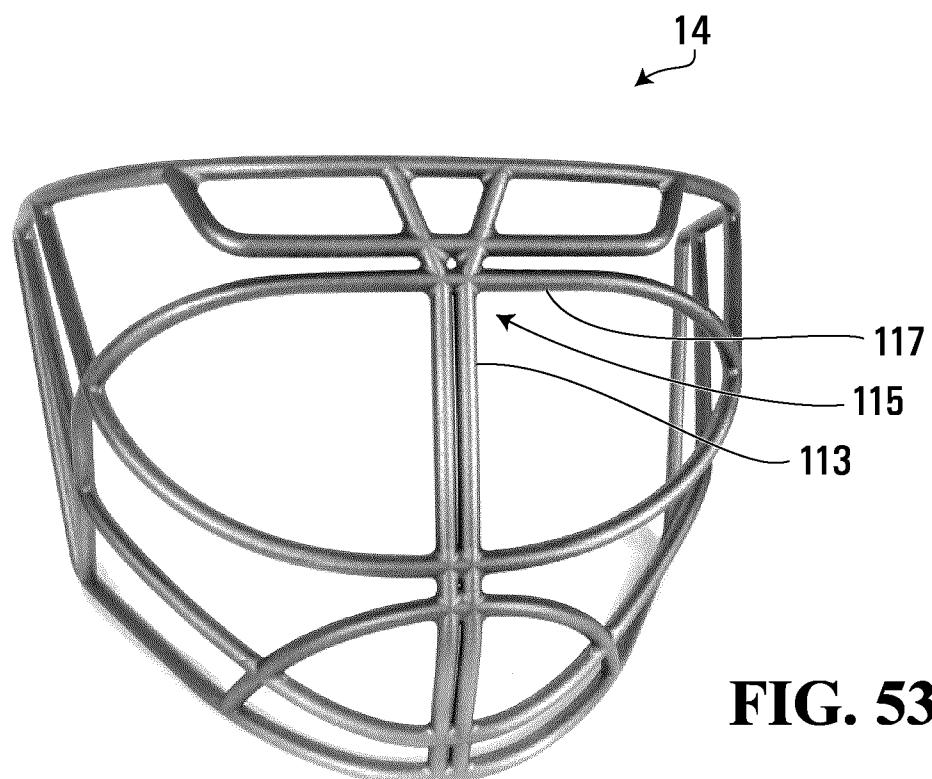**FIG. 52****FIG. 53A**

61/62

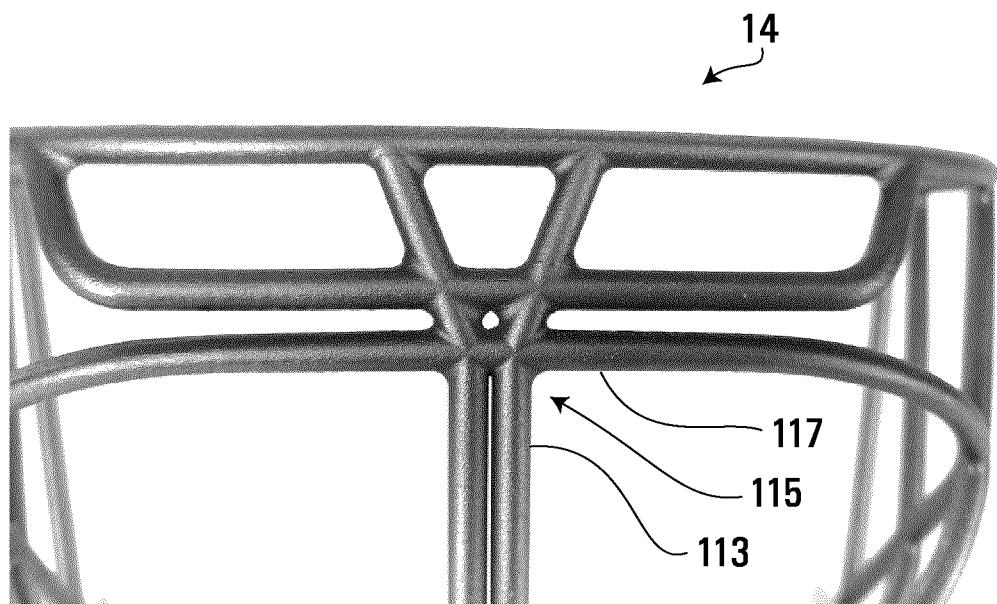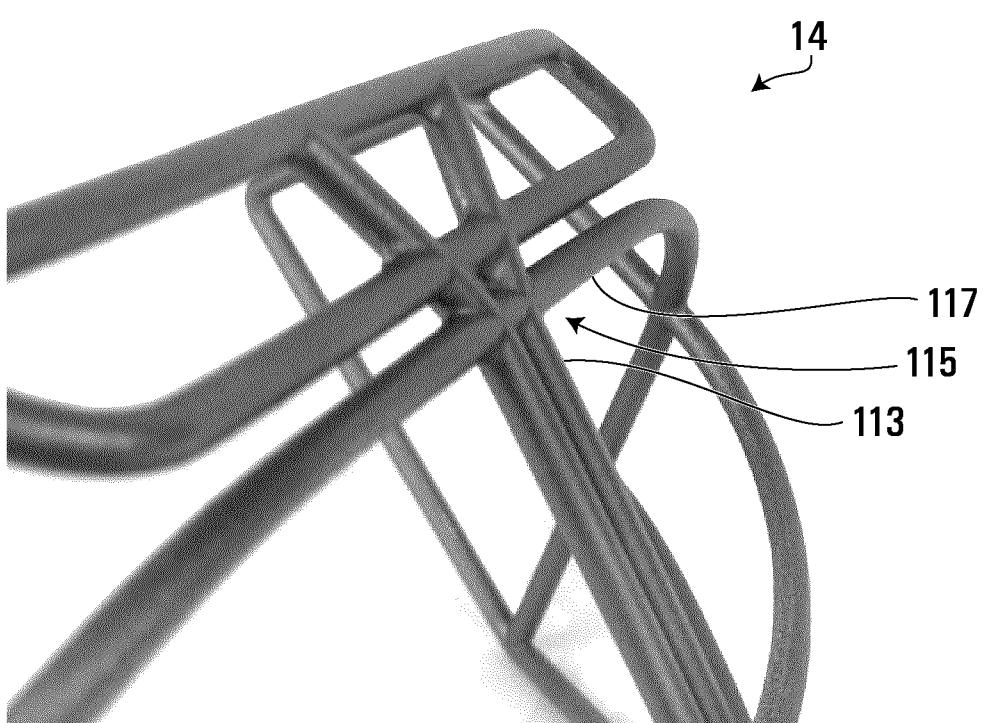**FIG. 53B****FIG. 53C**

62/62

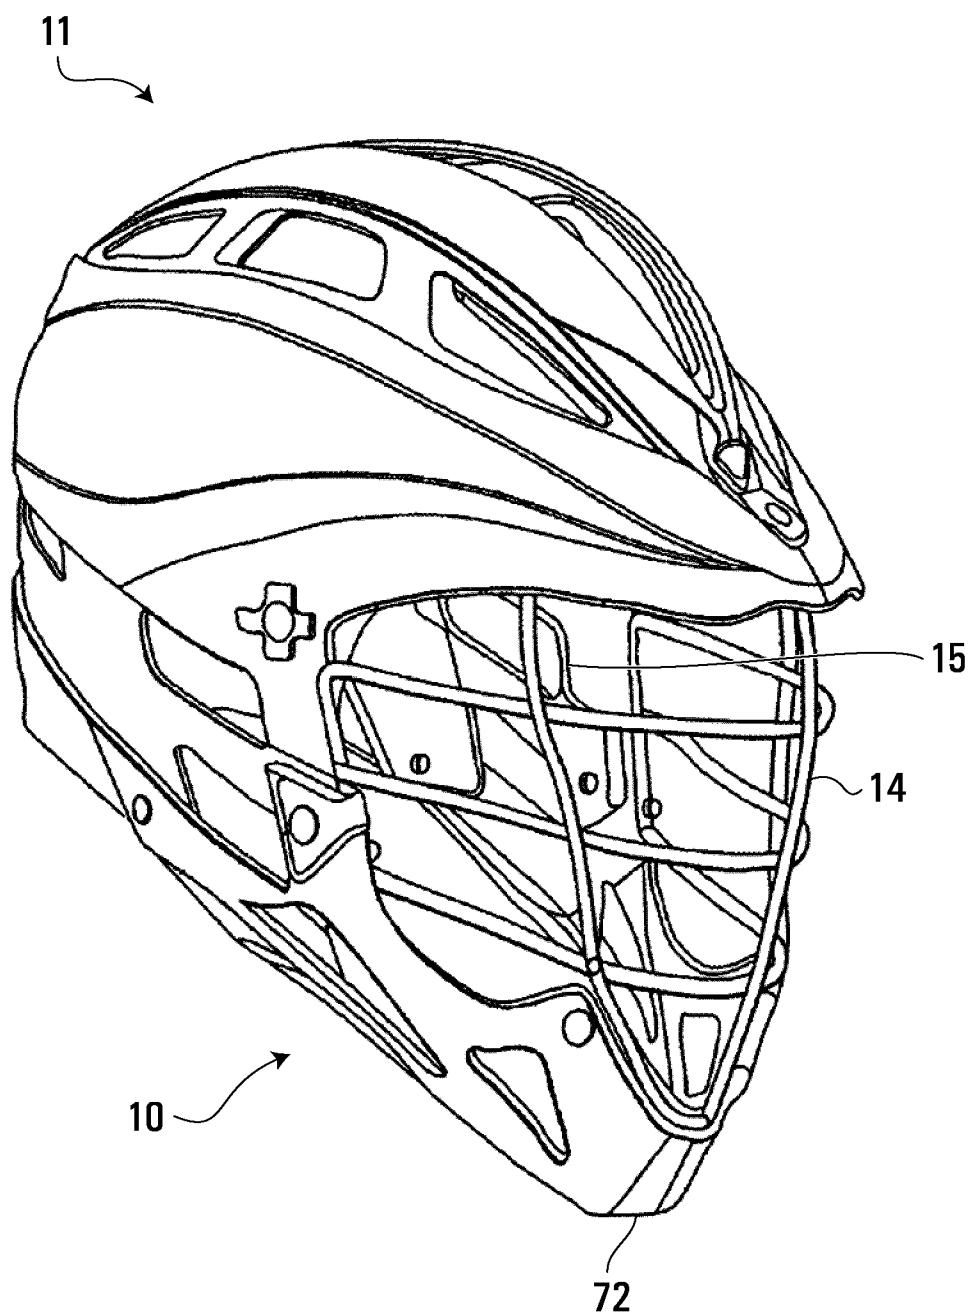**FIG. 54**

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2020/050683

A. CLASSIFICATION OF SUBJECT MATTER
IPC: **A42B 3/10** (2006.01), **A42C 2/00** (2006.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC: **A42B 3/10** (2006.01), **A42C 2/00** (2006.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used)

Canadian Patents Database, Questel-Orbit, GoogleScholar

- Search terms used: helmet, additive manufacturing, 3D printing/three-dimensional printing, component, liner, pad, insert, adjustment, expandable material and similar terms.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	WO2018072017A1 (BOUTIN, G.) 26 April 2018 (26-04-2018) *Figs. 1A-24; page 9, lines 3-14; page 18, lines 14-29*	81-92, 105-109, 115-121 1-80, 93-99, 104, 110-114, 122-244
X	US20170273386A1 (KUO, C.-C. et al.) 28 September 2017 (28-09-2017) *Figs. 1-5; paragraph [0024]*	100-103
Y	WO2017136941A1 (KRICK, T. et al.) 17 August 2017 (17-08-2017) *Whole document*	1-80, 104
Y	WO2017136890A1 (BRYANT, M. et al.) 17 August 2017 (17-08-2017) *Fig. 1, 2A-2C; paragraphs [00109] and [00110]*	93-99, 110-114
Y	WO2016209872A1 (HOCKER, T. et al.) 29 December 2016 (29-12-2016) *Whole document*	122-244

Further documents are listed in the continuation of Box C.

See patent family annex.

* “A” document defining the general state of the art which is not considered to be of particular relevance	“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
“D” document cited by the applicant in the international application	“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
“E” earlier application or patent but published on or after the international filing date	“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	“&” document member of the same patent family
“O” document referring to an oral disclosure, use, exhibition or other means	
“P” document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
11 August 2020 (11-08-2020)

Date of mailing of the international search report
20 August 2020 (20-08-2020)

Name and mailing address of the ISA/CA
Canadian Intellectual Property Office
Place du Portage I, C114 - 1st Floor, Box PCT
50 Victoria Street
Gatineau, Quebec K1A 0C9

Authorized officer

Catherine Soucy (819) 639-7903

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2020/050683

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US20180027916A1 (SMALLWOOD, I.) 01 February 2018 (01-02-2018) *Figs. 1-9; paragraph [0119]*	1-244
A	WO2017062945A1 (SZALKOWSKI, R. M. et al.) 13 April 2017 (13-04-2017) *Figs. 1-13; paragraph [0034]*	1-244

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2020/050683

Box No. II**Observations where certain claims were found unsearchable (Continuation of item 2 of the first sheet)**

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claim Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. Claim Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. Claim Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III**Observations where unity of invention is lacking (Continuation of item 3 of first sheet)**

This International Searching Authority found multiple inventions in this international application, as follows:

The claims are directed to a plurality of inventive concepts as follows:

Group A - Claims 1-121 are directed to a helmet and method of making a helmet comprising a shell, a liner and an additively-manufactured component; and

Group B - Claims 122-244 are directed to a component for a helmet and a method of making said component, the component comprising a 3D-printed portion and expandable material expanded to define the component.

The claims must be limited to one inventive concept as set out in PCT Rule 13.

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claim Nos.:

4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claim Nos.:

Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CA2020/050683

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
WO2018072017A1	26 April 2018 (26-04-2018)	CA3040596A1 EP3525612A1 EP3525612A4 US2019231018A1	26 April 2018 (26-04-2018) 21 August 2019 (21-08-2019) 05 August 2020 (05-08-2020) 01 August 2019 (01-08-2019)
US2017273386A1	28 September 2017 (28-09-2017)	US10390578B2 CN107224025A TW1581838B TW201733645A	27 August 2019 (27-08-2019) 03 October 2017 (03-10-2017) 11 May 2017 (11-05-2017) 01 October 2017 (01-10-2017)
WO2017136941A1	17 August 2017 (17-08-2017)	CA3014381A1 US2019048165A1 US2020255618A1	17 August 2017 (17-08-2017) 14 February 2019 (14-02-2019) 13 August 2020 (13-08-2020)
WO2017136890A1	17 August 2017 (17-08-2017)	WO2017136890A9 AU2017218459A1 BR112018016326A2 CN109414085A EP3413738A1 EP3413738A4 JP2019504940A KR20180110096A SG11201806773VA US2019045875A1	02 November 2017 (02-11-2017) 27 September 2018 (27-09-2018) 18 December 2018 (18-12-2018) 01 March 2019 (01-03-2019) 19 December 2018 (19-12-2018) 25 September 2019 (25-09-2019) 21 February 2019 (21-02-2019) 08 October 2018 (08-10-2018) 27 September 2018 (27-09-2018) 14 February 2019 (14-02-2019)
WO2016209872A1	29 December 2016 (29-12-2016)	None	
US2018027916A1	01 February 2018 (01-02-2018)	EP3284361A2 EP3284361A3 EP3284361B1 GB201613127D0 GB2552547A	21 February 2018 (21-02-2018) 06 June 2018 (06-06-2018) 24 June 2020 (24-06-2020) 14 September 2016 (14-09-2016) 31 January 2018 (31-01-2018)
WO2017062945A1	13 April 2017 (13-04-2017)	EP3358979A1 US2018279711A1	15 August 2018 (15-08-2018) 04 October 2018 (04-10-2018)