

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
27 October 2005 (27.10.2005)


PCT

(10) International Publication Number
WO 2005/101166 A1

- (51) International Patent Classification⁷: **G06F 1/20**, H05K 7/20, H01L 23/34
- (21) International Application Number: PCT/US2005/012079
- (22) International Filing Date: 8 April 2005 (08.04.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 10/822,958 12 April 2004 (12.04.2004) US
- (71) Applicant (for all designated States except US): **NVIDIA CORPORATION** [US/US]; 2701 San Tomas Expressway, Santa Clara, CA 95050 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **STEFANOSKI, Zoran** [MK/US]; 436 Laurel Street, Menlo Park, CA 94025 (US). **KIM, Jeong, H.** [US/US]; 27457 Green Hazel Road, Hayward, CA 94544 (US).
- (74) Agent: **PATTERSON, William, B.**; Moser, Patterson & Sheridan, L.L.P., 3040 Post Oak Boulevard, Suite 1500, Houston, Texas 77056 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SYSTEM FOR EFFICIENTLY COOLING A PROCESSOR

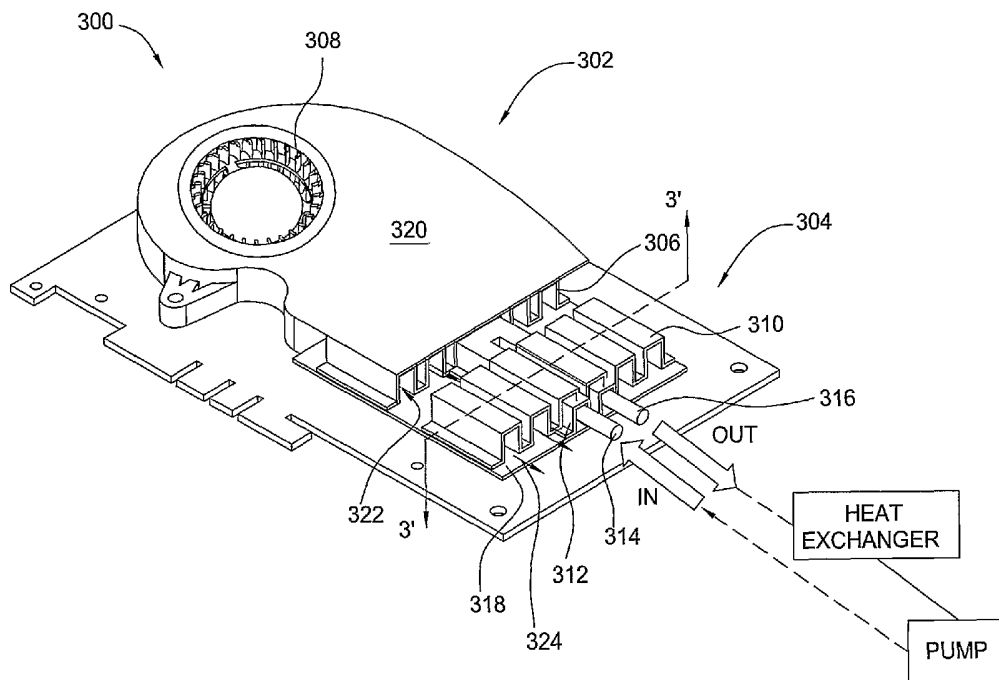

(57) Abstract: One embodiment of a system for efficiently cooling a processor includes an active hybrid heat transport module (304) adapted to be integrated with a fansink (302). The hybrid heat transport module (304) comprises both a fluid channel (312) and an air channel (310) adapted for transporting heat. The hybrid heat transport module (304) and the fansink (302) may be used alone or in combination to dissipate heat from the processor.



Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

SYSTEM FOR EFFICIENTLY COOLING A PROCESSOR

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] This invention relates generally to computer hardware and more particularly
5 to a system for efficiently cooling a processor.

2. Description of the Background Art

[0002] FIG. 1 is an isometric view illustrating a prior art system 100 used to cool a processor (not shown). As shown, system 100 characteristically includes a heat sink assembly 104, which further includes a fan 106, walls 109 and a bottom plate 111. Typically, system 100 is thermally coupled to a processor, for example using thermal adhesive having thermal properties that facilitate transferring heat generated by the processor to bottom plate 111 of heat sink assembly 104. System 100 may also include a heat sink lid (not shown), which, among other things, prevents particles and other contaminants from entering fan 106 and air blown from fan 106 from escaping system 100. Heat sink lid 102, together with walls 109 and bottom plate 111 of heat sink assembly 104, define a plurality of air channels 108.

[0003] Fan 106 is configured to force air through air channels 108 such that the heat generated by the processor transfers to the air as the air passes over bottom plate 111. The heated air then exits heat sink assembly 104, as depicted by flow lines 114, thereby dissipating the heat generated by the processor into the external environment. This process cools the processor and, among other things, prevents the processor from burning up during operation. Persons skilled in the art will understand that air channels 108 typically are configured to direct air blown from fan 106, over bottom plate 111, to the external environment in a manner that most efficiently removes heat from the processor.

[0004] One drawback of using system 100 to cool a processor is that a sound wave produced when fan 106 forces air through an air channel 108 oftentimes establishes a standing wave within air channel 108. As persons skilled in the art will understand, this phenomenon substantially increases the noise level of the

airflow through air channel 108 because the resulting standing wave produced by the interference between an incident sound wave and a reflected sound wave has an amplitude at the antinodes that is substantially greater than the amplitude of incident sound wave. The increased noise is particularly annoying to persons who use computers and other electronic devices that include a system similar to system 100.

[0005] One method for reducing airflow noise while cooling a processor is to implement a fluid-based cooling system, in which heat generated by the processor transfers to a heat transfer fluid (such as water) being quickly circulated close to the processor. However, typical fluid cooling systems are driven by large pumps, which are prone to frequent failure and tend to consume a great deal of power. Moreover, such systems tend to use large quantities of fluid, circulating at a high flow rate, and therefore must be frequently replenished or replaced.

[0006] Thus, there is a need in the art for a system for efficiently cooling a processor.

SUMMARY OF THE INVENTION

[0007] One embodiment of a system for efficiently cooling a processor includes an active hybrid heat transport module adapted to be integrated with a fansink. The hybrid heat transport module comprises both a fluid channel and an air channel adapted for transporting heat. The hybrid heat transport module and the fansink may be used alone or in combination to dissipate heat from the processor.

[0008] One advantage of the disclosed system is that, among other things, the system produces less airflow noise during operation.

[0009] A second advantage of the disclosed system is that it is more reliable than conventional fluid cooling systems.

[0010] A third advantage of the disclosed system is that it dissipates heat more effectively and more efficiently than conventional fan- or fluid-based cooling systems

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] FIG. 1 is an isometric view illustrating a prior art system used to cool a processor.

5 [0012] FIG. 2 is schematic diagram illustrating a computing device adapted for use with a system for cooling a processor, according to one embodiment of the present invention.

[0013] FIG. 3 is an isometric view illustrating an improved system for cooling a processor, according to one embodiment of the present invention.

10 [0014] FIG. 4 is an exploded view of a portion of the cooling system illustrated in FIG. 3;

[0015] FIG. 5 is a cross sectional view of a portion of the cooling system illustrated in FIG. 3; and

[0016] FIG. 6 is a flow diagram illustrating a method for controlling the cooling system illustrated in FIG. 3, according to one embodiment of the invention.

15 DETAILED DESCRIPTION OF THE INVENTION

[0017] FIG. 2 is schematic diagram illustrating a computing device 200 adapted for use with a system 218 for cooling a processor, according to one embodiment of the present invention. Computing device 200 may be any type of computing device, including, without limitation, a desktop computer, a server, a laptop computer, a
20 palm-sized computer, a personal digital assistant (PDA), a tablet computer, a gaming console, a cellular telephone, a computer-based simulator and the like.

[0018] As shown, computing device 200 includes a housing 201, within which a motherboard 204 resides. Mounted on motherboard 204 are a central processing unit (CPU) 206, a processor cooler 208 for cooling CPU 206, a system fan 210 for
25 removing heat from computing device 200, and one or more peripheral component interface (PCI) cards 212, each interfaced with a slot located in the back part of housing 201. Motherboard 204 further incorporates a graphics card 202 that enables computing device 200 to rapidly process graphics related data for graphics

intensive application, such as gaming applications. Graphics card 202 comprises a printed circuit board (PCB) upon which a plurality of circuit components (not shown), such as memory chips and the like, are mounted. In addition, graphics card 200 includes a graphics processing unit (GPU) 216, mounted to one face of graphics card 202, for processing graphics related data. Generally, cooling system 218 is configured for coupling to GPU 216 in lieu of a conventional cooling system, such as cooling system 100 of FIG. 1.

[0019] FIG. 3 is an isometric view illustrating an improved system 300 for cooling a processor, according to one embodiment of the present invention. Similar to system 218 of FIG. 2, cooling system 300 may be adapted for use in any type of appropriate computing device. As shown, cooling system 300 may include, without limitation, a fansink 302 and a hybrid heat transport module 304. As described in further detail below, fansink 302 and hybrid heat transport module 304 may operate independently or in combination to dissipate heat from a processor.

[0020] In one embodiment, fansink 302 is configured in a manner similar to cooling system 100 of FIG. 1 and includes, without limitation, a fan 308, walls 306 and a bottom plate 318. In one embodiment, system 100 also includes a heat sink lid 320, which, among other things, prevents particles and other contaminants from entering fan 308 and air blown from fan 308 from escaping system 300. Heat sink lid 320, together with walls 306 and bottom plate 318 of fansink 302, define a plurality of air channels 322.

[0021] Hybrid heat transport module 304 is adapted to be integrated with fansink 302. In one embodiment, hybrid heat transport module 304 is thermally coupled to a portion of bottom plate 318 and includes, without limitation, a fluid channel 312, an inlet 314, an outlet 316 and a plurality of air channels 310. Hybrid heat transport module 304 is coupled to a pump, which is adapted for circulating a heat transfer fluid (e.g., water or any other suitable heat conducting fluid) through a closed loop, including fluid channel 312. In one embodiment, the pump circulates fluid from hybrid heat transport module 304 through a heat exchanger prior to supplying the fluid back to hybrid heat transport module 304. Inlet 314 and outlet 316 are configured for respectively supplying and removing the heat transfer fluid to fluid

channel 312.

[0022] In one embodiment, air channels 310 are adapted for coupling to air channels 322 and for transporting forced air from fan 308. In one embodiment, air channels 310 are positioned over and around fluid channel 312, so that fluid channel 312 is substantially enclosed within air channels 310. In alternative
5 embodiment, fluid channel 312 and air channels 310 may be positioned in any relative orientation that provides good heat dissipation. Those skilled in the art will recognize that hybrid heat transport module 304 may be implemented to transfer heat via air channels 310, fluid channel 312, or both in combination.

10 [0023] In one embodiment, fansink 302 dissipates heat in a manner similar to system 100 illustrated in FIG. 1. Fan 308 is configured to force air through air channels 322 and air channels 310 such that the heat generated by the processor transfers to the air as the air passes over bottom plate 318. The heated air then exits system 300, as depicted by flow lines 324, thereby dissipating the heat
15 generated by the processor into the external environment.

[0024] In one embodiment, the pump circulates the heat transfer fluid through fluid channel 312 of hybrid heat transport module 304, and heat generated by the processor transfers to the circulating heat transfer fluid as well as to air in air channels 310. Fluid channel 312 is adapted for transporting heat transfer fluid
20 through a downstream heat exchanger, which dissipates heat from the heat transfer fluid into an outside environment.

[0025] Persons skilled in the art will recognize that system 300, including fansink 302 and hybrid heat transport module 304, may be used to cool any type of processor. For example, in one embodiment, the processor comprises a graphics
25 processing unit. In an alternative embodiment, the processor may comprise a central processing unit. In yet another alternative embodiment, the processor may comprise an application-specific integrated circuit (ASIC). In another embodiment, system 300 may be sized to cool a memory chip in addition to the processor.

[0026] FIG. 4 is an exploded view of a portion of cooling system 300. In one
30 embodiment, bottom plate 318 includes a trench 402 sized for coupling to and

sealing fluid channels 312. In one embodiment, the surface of trench 402 is textured to increase the heat transfer surface area of bottom plate 318, as described in further detail below, and to transfer heat from bottom plate 318 to the heat transfer fluid flowing through fluid channel 312. For example, trench 402 may
5 further include a plurality of pins 404 extending upward from bottom plate 318. The density and geometric shape of pins 404 may vary, so long as pins 404 are capable of effectively transferring heat from bottom plate 318 to the heat transfer fluid flowing around pins 404.

[0027] FIG. 5 is a cross sectional view of hybrid heat transport module 304, taken
10 along sectional line 3--3' of FIG. 3. As illustrated, hybrid heat transport module 304 is configured to dissipate heat from a processor via fluid channel 312 and/or air channels 310. As described above, air channels 310 may be configured to interface to air channels 322 of fansink 302, so that even when the pump is not activated to circulate fluid through fluid channel 312, air channels 310 will operate
15 to increase the heat transfer surface area of system 300 (e.g., by effectively extending air channels 322), thereby enabling heat to be dissipated more efficiently.

[0028] Fansink 302 and hybrid heat transport module 304 may be implemented independently or in combination to dissipate heat from a processor, in order to
20 dissipate heat from the processor in the most efficient manner. For example, fansink 302 may be implemented to dissipate a majority of the generated heat, hybrid fluid heat transport module 304 may be implemented to dissipate a smaller quantity of heat, and the proportions of heat dissipated by fansink 302 and hybrid heat transport module 304 may be dynamically adjusted. Alternatively, one of
25 fansink 302 and hybrid heat transport module 304 may be implemented as a primary means for heat dissipation, while the other mechanism is implemented on an as-needed basis to dissipate excess heat.

[0029] FIG. 6 is a flow diagram illustrating a method 600 for controlling cooling system 300, for example for implementation by a control unit coupled to cooling
30 system 300, according to one embodiment of the invention. In the illustrated embodiment, the method 600 implements fansink 302 as a primary means for heat

dissipation, while hybrid heat transport module 304 is implemented on as as-needed basis. Method 600 is initialized at step 602 and proceeds to step 604, where method 600 monitors the temperature of the processor, for example by means of a thermal diode or other sensor positioned proximate to the processor.

- 5 Method 600 then proceeds to step 606 and determines whether the temperature of the processor has reached a predetermined threshold temperature at which a secondary heat dissipation mechanism (e.g., hybrid heat transport module 304) should be implemented.

- 10 [0030] If method 600 determines at step 606 that the processor temperature has not reached the threshold temperature, method 600 returns to step 604 and continues to monitor the processor temperature. Alternatively, if method 600 determines at step 606 that the threshold temperature has been reached or exceeded, method 600 proceeds to step 608 and turns on the pump of hybrid heat transport module 304, in order to engage the secondary heat dissipation mechanism. Method 600 then determines at step 610 whether the implementation of hybrid heat transport module 304 has cooled the processor to a predetermined desired temperature (e.g., an ideal operating temperature).

- 20 [0031] If method 600 determines at step 610 that the processor has been cooled to the desired temperature, method 600 proceeds to step 612 and turns off the pump of hybrid heat transport module 304, effectively shutting off hybrid heat transport module 304 so that the processor continues to be cooled by the primary heat dissipation mechanism (e.g., fansink 302). Method 600 then returns to step 604 and continues to monitor the temperature of the processor. Alternatively, if method 600 determines at step 610 that the processor has not yet been cooled to the desired temperature, method 600 returns to step 608 and continues to run the pump of hybrid heat transport module 304 until the processor is cooled to the desired temperature.

- 30 [0032] Cooling system 300 offers several advantages over conventional cooling systems, such as cooling system 100 of FIG. 1. First, using fansink 302 in conjunction with hybrid heat transport module 304 results in a more reliable cooling system, because the pump of hybrid heat transport module 304 may be

implemented on a limited or as-needed basis. The life of the pump is thereby extended, because the pump is not constantly operating at maximum power. For example, in one embodiment, the life of a typical pump may be extended by approximately fifty percent. Alternatively, cooling system 300 may incorporate a pump that is significantly smaller than a pump typically incorporated in a fluid-based cooling system. Moreover, in the event of failure, fansink 302 may operate as a backup to fluid heat transport module 304, and vice versa.

[0033] Also, because hybrid heat transport module 304 may be implemented on a limited or as-needed basis (e.g., as opposed to being a primary heat dissipation means), the amount of heat transfer fluid and the flow rate of the fluid through fluid channel 312 may be reduced compared to a conventional fluid-based cooling system. Thus, cooling system 300 requires less maintenance (e.g., frequent replenishment of fluid reservoirs) than conventional fluid-based cooling systems, and the pump consumes less power.

[0034] In addition, because cooling system 300 relies less on fansink 302 to dissipate heat (e.g., when hybrid heat transport module 304 is implemented either alone or in conjunction with fansink 302), an amplitude at the antinodes of interfering sound waves established within air channel 322 is smaller. Thus, the noise level of the airflow through air channel 322 may be substantially decreased.

[0035] Moreover, using hybrid heat transport module 304 in conjunction with fansink 302 increases the heat flow rate, (dQ/dT) , of cooling system 300, which enables cooling system 300 to transfer heat away from the processor more efficiently than conventional cooling systems. One reason for this increase is that the heat transfer area, A , of cooling system 300 can be substantially larger than that of conventional cooling systems, owing to the incorporation of air channels 310 and pins 404. Even if hybrid heat transport module 304 is not active (e.g., the pump is not activated), the configuration of hybrid heat transport module 304 will increase the heat transfer surface area over which air forced by fan 308 travels, as the forced air will travel through both channels 322 and channels 310.

[0036] Heat flow rate (dQ/dT) is calculated according to the following equation:

$$(dQ/dT) = hA(T_{\text{sink}} - T_{\text{air}}) \quad (\text{EQN. 1})$$

where h is the heat transfer coefficient of cooling system 300, T_{sink} is the temperature of the heat exchanging elements (e.g., air channels 322, air channels 310 and pins 404) and T_{air} is the temperature of the air flowing through the heat
 5 exchanging elements. As discussed above, since A is much larger for cooling system 300 than for a conventional cooling system (and ΔT is approximately the same), the heat flow rate (dQ/dT) is substantially increased when using cooling system 300.

[0037] The increased heat flow rate (dQ/dT) further results in cooling system 300
 10 having an improved heat transfer efficiency, Θ_{sa} , relative to conventional cooling systems. As persons skilled in the art will recognize, heat transfer efficiency, Θ_{sa} , may be calculated according to the following equation:

$$\Theta_{\text{sa}} = (T_{\text{sink}} - T_{\text{air}})/(dQ/dT) (\text{°C/watt}) \quad (\text{EQN. 2})$$

where a smaller value for Θ_{sa} indicates increased efficiency and therefore is more
 15 desirable. Again, the larger heat transfer area, A , causes cooling system 300 to have greater heat flow rate (dQ/dT), and, consequently, an improved efficiency as well (as evidenced by the smaller value of Θ_{sa}).

[0038] Simulations comparing improved cooling system 300 with a conventional cooling system show that improved cooling system 300 can cool a processor to
 20 temperatures that are upwards of twenty-two percent lower than temperatures achieved with the conventional cooling system, without substantially increasing power consumption.

[0039] The location of cooling system 300, fansink 302 and hybrid heat transport module 304, as well as the size and shape of the components, may be dictated by
 25 other board mounted components, as well as by accelerated graphics processor (AGP) -specified envelope constraints. Moreover, those skilled in the art will appreciate that the cooling system described herein may be implemented in both ATX motherboard configurations (wherein a graphics card is orientated so that the GPU faces downward relative to the computing device, as illustrated in FIG. 2) and
 30 BTX configurations (wherein a graphics card is orientated so that the GPU faces

upward relative to the computing device). Therefore, the cooling system of the present invention may be implemented as a single-slot cooling solution, *e.g.*, wherein the size of the cooling system does not require space on the motherboard that may be allocated to other components, such as PCI cards.

- 5 [0040] Thus, the present invention represents a significant advancement in the field of processor cooling. By implementing a hybrid heat transport module in conjunction with a fansink, a system used to cool a cooling system will produce less airflow noise in operation than systems that incorporate conventional heat sink lids and will cool a processor more effectively and efficiently. Moreover, by
10 implementing the hybrid heat transport module on a limited basis, the life of a pump used to drive a portion of the hybrid heat transport module can be significantly extended.

- [0041] Although the invention has been described above with reference to specific embodiments, persons skilled in the art will understand that various modifications
15 and changes may be made thereto without departing from the broader spirit and scope of the invention as set forth in the appended claims. The foregoing description and drawings are, accordingly, to be regarded in an illustrative rather than a restrictive sense.

WHAT IS CLAIMED IS:

1. A system for cooling a processor, the system comprising
a hybrid module configured to be thermally coupled to the processor and to a
fansink, the hybrid module comprising:
 - 5 an air channel adapted for removing heat from the processor; and
a fluid channel adapted for further removing heat from the processor.
2. The system of claim 1, wherein the fluid channel is a closed loop channel.
- 10 3. The system of claim 1, wherein the hybrid module is coupled to a pump
adapted for circulating the heat transfer fluid through the fluid channel.
4. The system of claim 3, wherein the heat transfer fluid in the fluid channel
transports heat from the processor to a heat exchanger.
- 15 5. The system of claim 1, wherein a bottom plate of the fluid channel is
textured.
6. The system of claim 5, wherein the texture of the bottom plate comprises a
20 plurality of pins extending upward into the fluid channel.
7. The system of claim 1, wherein the hybrid module is adapted for dissipating
heat from the processor through air, through a fluid, or through both air and fluid.

8. The system of claim 1, further comprising a thermal adhesive disposed on a bottom plate of the hybrid module for thermally coupling the hybrid module to the processor.
- 5 9. The system of claim 1, wherein the fansink comprises:
a fan; and
an air channel
wherein the fansink is configured to be thermally coupled to the processor.
- 10 10. The system of claim 9, wherein the fansink is configured to force air through the air channel.
11. The system of claim 9, wherein the fansink and the hybrid module are adapted for simultaneous operation.
- 15 12. The system of claim 9, wherein the fansink and the hybrid module are adapted for independent operation.
13. The system of claim 1, wherein the processor comprises a graphics
20 processing unit.
14. The system of claim 1, wherein the processor comprises a central processing unit.

15. The system of claim 1, wherein the processor comprises an application-specific integrated circuit.
16. The system of claim 1, wherein the system is sized to cool a memory chip in
5 addition to the processor.
17. A method for cooling a processor, the method comprising the steps of:
continually cooling the processor using forced air to remove heat from the
processor;
10 monitoring a temperature of the processor; and
circulating a heat transfer fluid in a fluid channel to further remove heat from
the processor when the processor reaches a threshold temperature.
18. The method of claim 17, further comprising the step of ceasing to circulate
15 the heat transfer fluid when the processor is cooled to a desired temperature.
19. The method of claim 17, wherein the heat transfer fluid is circulated by
turning on a pump.
20. The method of claim 18, further comprising the step of transporting the heat
20 transfer fluid through a heat exchanger.

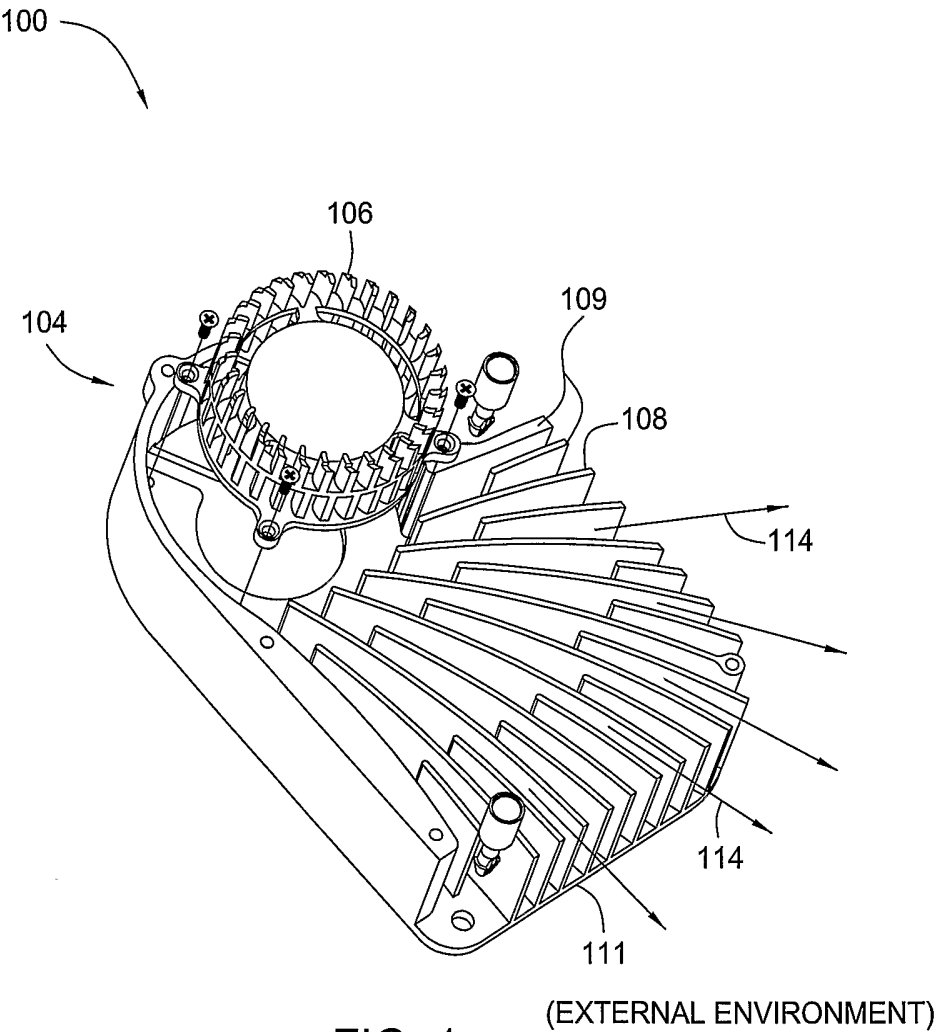


FIG. 1
(PRIOR ART)

2/6


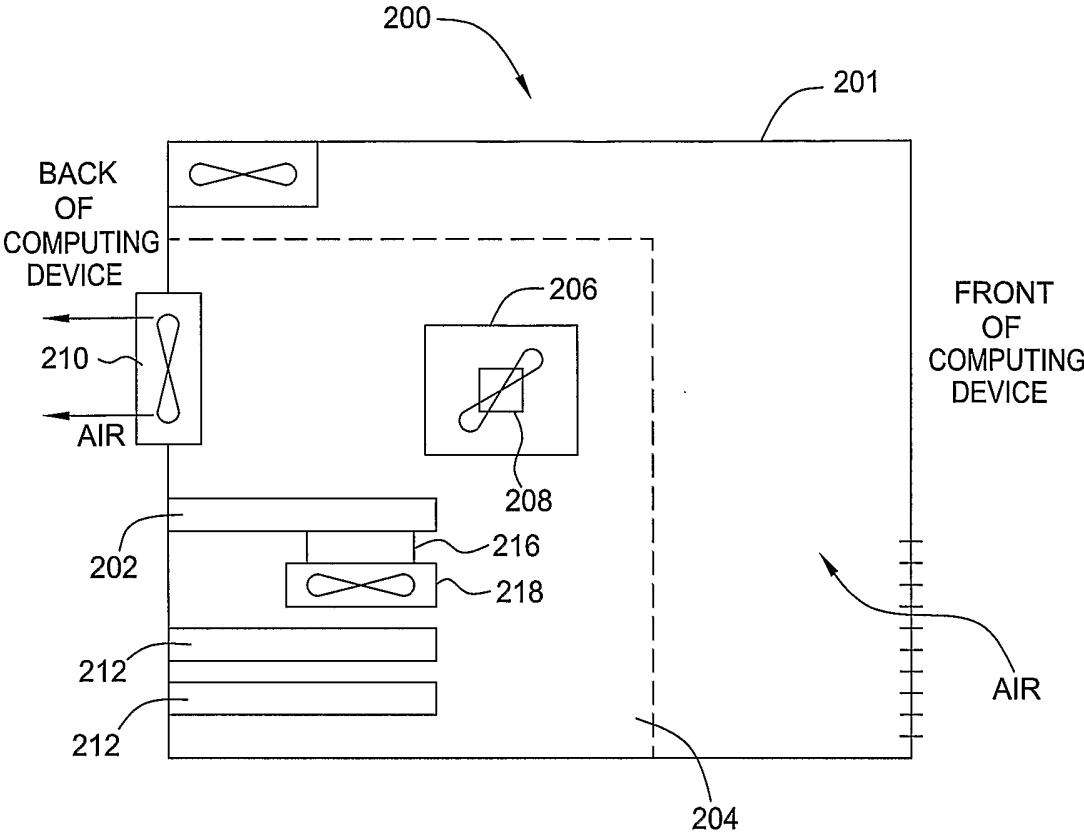


FIG. 2

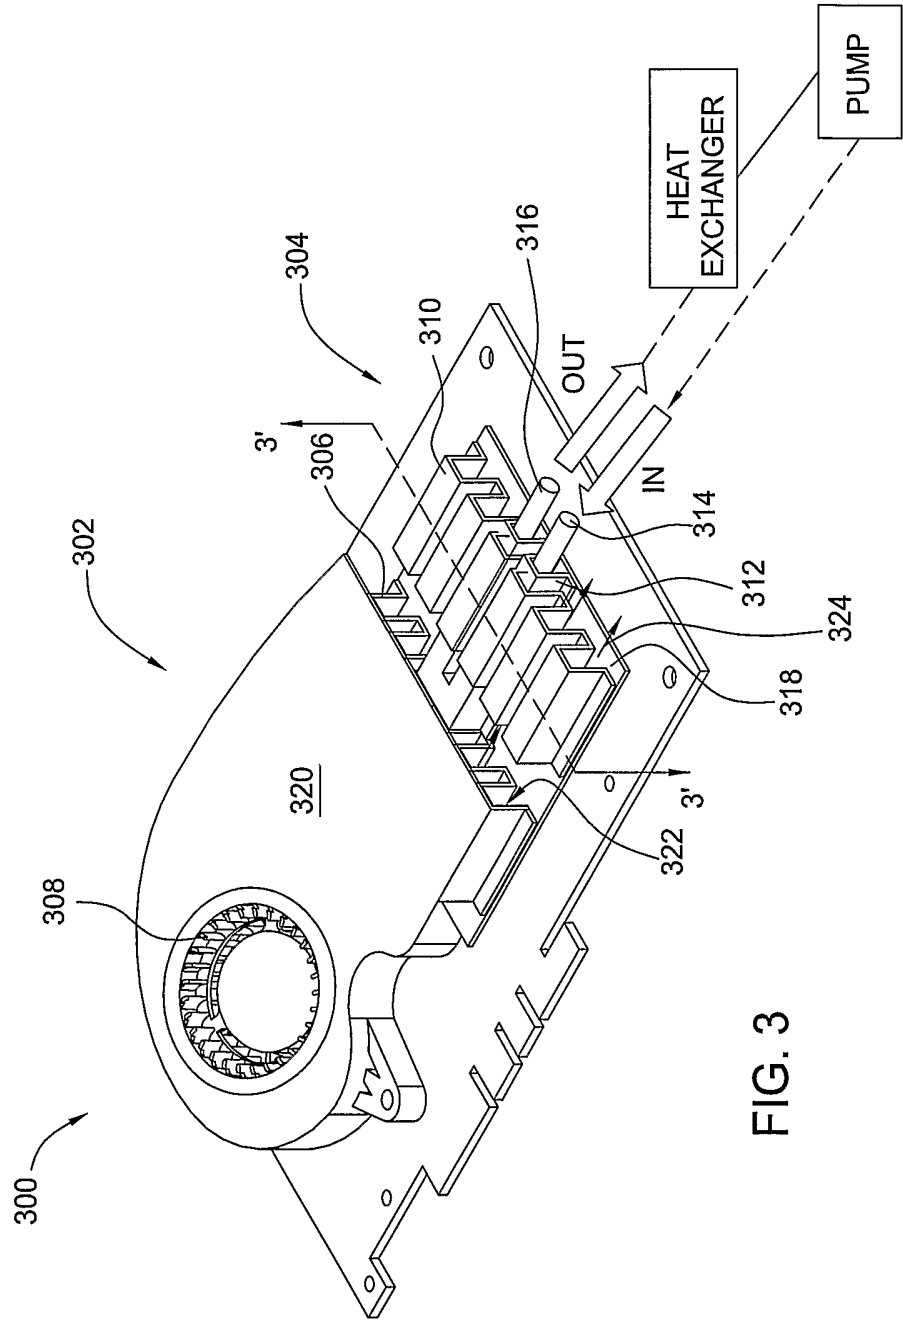

4/6

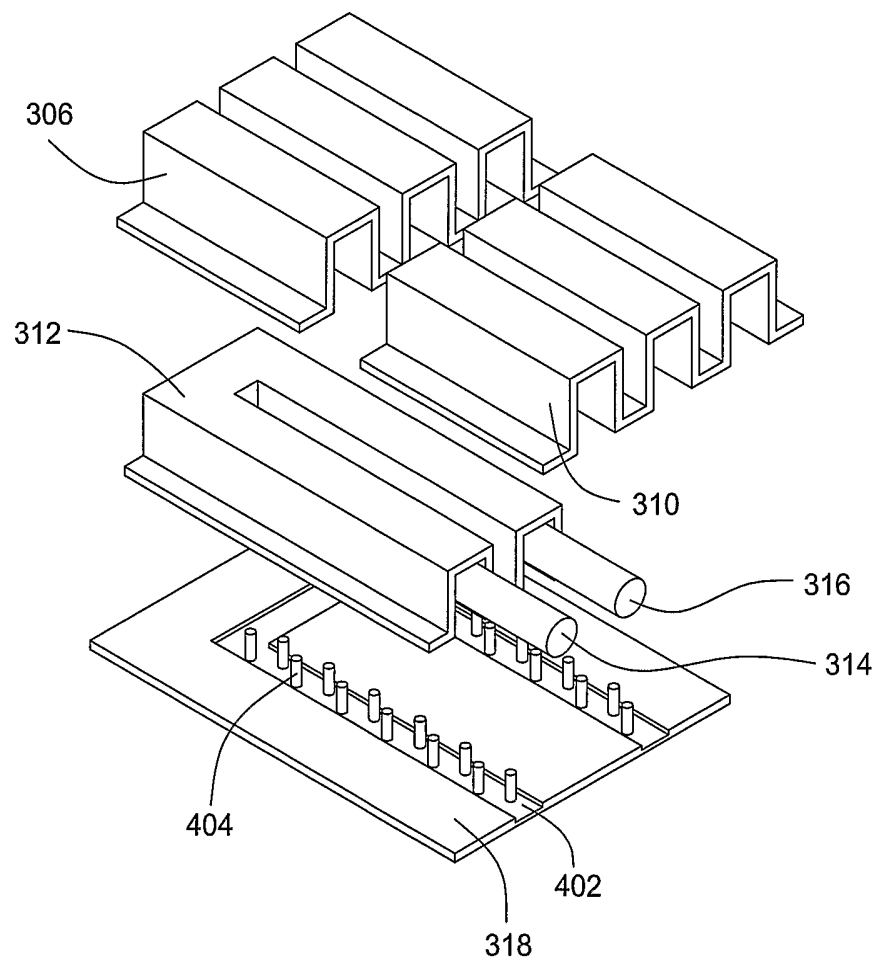


FIG. 4

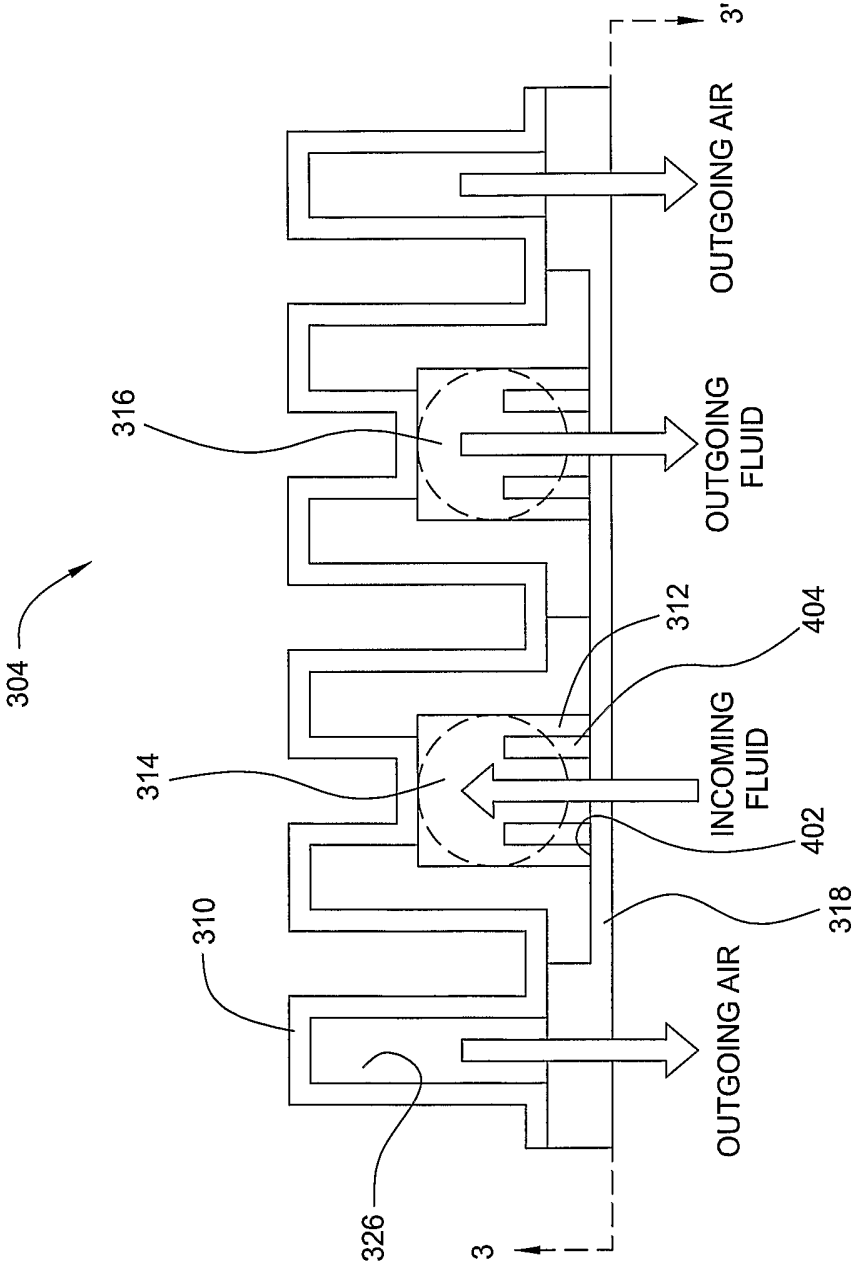


FIG. 5

6/6

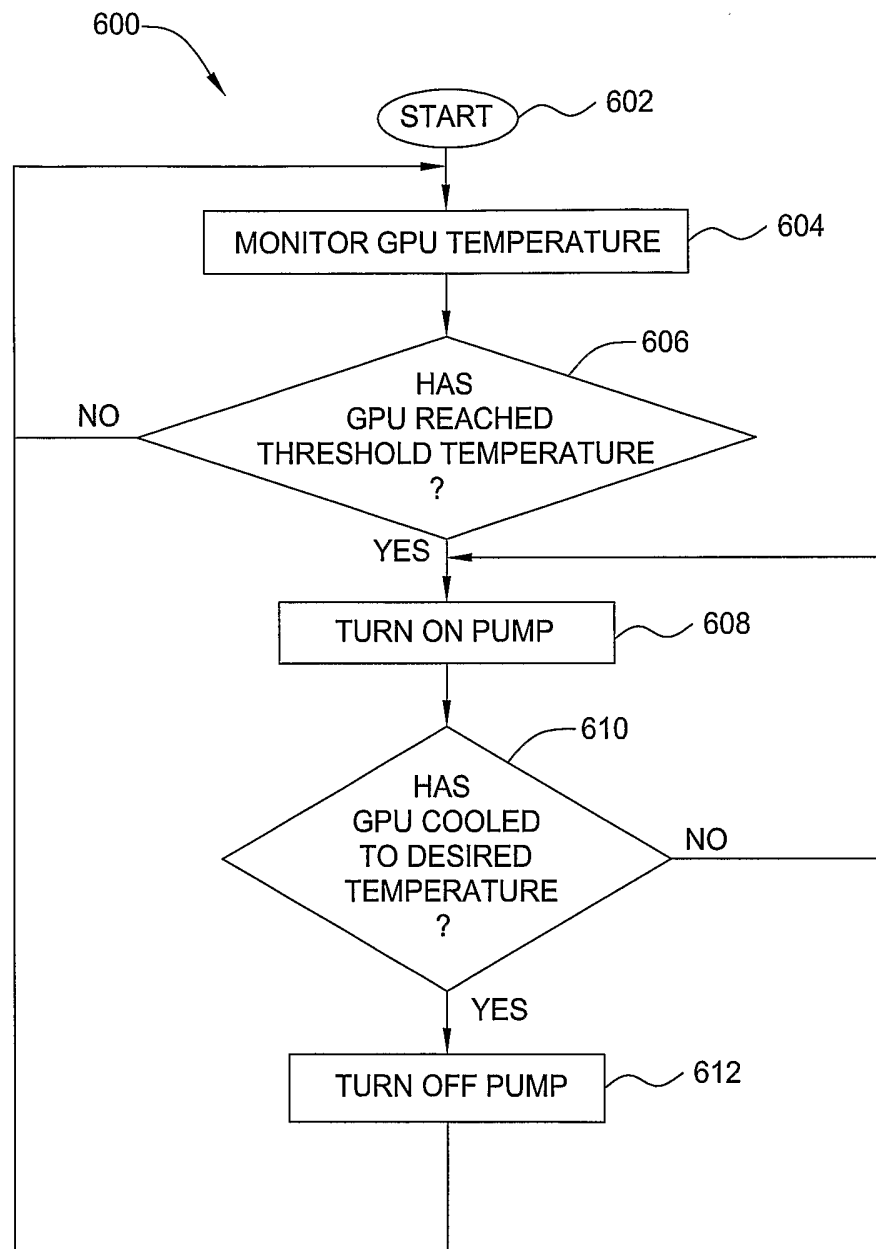


FIG. 6

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2005/012079

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G06F1/20 H05K7/20 H01L23/34

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06F H05K H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, IBM-TDB

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 343 478 B1 (CHANG) 5 February 2002 (2002-02-05) column 1, line 41 - column 2, line 47; figures 3A-4	1-20
A	US 6 333 852 B1 (LIN) 25 December 2001 (2001-12-25) column 2, line 8 - line 41; figures 1,2	1,9,10, 14
A	US 2003/128514 A1 (INOUE) 10 July 2003 (2003-07-10) paragraph '0030! - paragraph '0045!	1,9,10, 13,14
A	EP 0 542 478 A (AT&T) 19 May 1993 (1993-05-19) column 3, line 6 - column 4, line 29; figures 3-5	1,5,6
	----- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

30 September 2005

Date of mailing of the international search report

07/10/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Taylor, P

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2005/012079

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 671 177 B1 (HAN) 30 December 2003 (2003-12-30) column 3, line 8 - column 4, line 54; figure 1.4 -----	1,9,10, 13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US2005/012079

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 6343478	B1	05-02-2002	TW	540982 Y	01-07-2003
US 6333852	B1	25-12-2001	DE	20015931 U1	04-01-2001
			FR	2815732 A3	26-04-2002
US 2003128514	A1	10-07-2003	NONE		
EP 0542478	A	19-05-1993	CA	2076774 A1	13-05-1993
			DE	69208822 D1	11-04-1996
			DE	69208822 T2	25-07-1996
			JP	5043550 U	11-06-1993
			KR	9514051 B1	20-11-1995
			US	5158136 A	27-10-1992
US 6671177	B1	30-12-2003	AU	2002351258 A1	25-05-2004
			WO	2004040952 A1	13-05-2004