

ORGANISATION AFRICAINE DE LA PROPRIETE INTELLECTUELLE  
(O.A.P.I.)

(19)



(11) N°

11698

(51) Inter. Cl. 7

F16L 1/19, 1/20  
B63B 35/03, 35/04

BREVET D'INVENTION

(21) Numéro de dépôt : 1200000366

(22) Date de dépôt : 22.11.1999

(30) Priorité(s) : FR  
30.04.1999 N° 99/05508

(24) Délivré le : 22.03.2002

(45) Publié le : 13 JAN 2005

(73) Titulaire(s) :

Société dite : COFLEXIP  
23, avenue de Neuilly  
75116 PARIS (FR)

(72) Inventeur(s) :

1- DE VARAX Hervé  
1, rue Ferdinand Duval  
75004 PARIS (FR)  
2- CRUICKSHANK John Duncan (GB)

(74) Mandataire : CABINET CAZENAVE  
B.P. 500  
YAOUNDE - Cameroun

(54) Titre : Vessel for laying rigid pipes at great depth.

(57) Abrégé :

This vessel for laying rigid tubular pipes has two vertical wheels (10) for storing tubular pipe wound with plastic deformation, an inclinable laying davit arranged approximately above a moon pool (2), an arched chute for deflecting the pipe at the top of the davit, pipe-straightening means and tensioners; the two adjacent wheels (10) face approximately towards the davit, their mid-planes (11) intersecting in the vertical longitudinal mid-plane (XX) of the vessel.

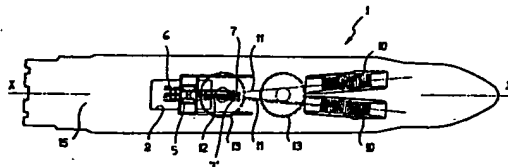


FIG. 2

## Vessel for laying rigid pipes at great depth

The present invention relates to a vessel for laying underwater rigid tubular pipes and flexible pipes intended, in particular, for offshore oil production.

The person skilled in the art makes a distinction between flexible pipes and rigid pipes. Specifications API 17B and 17J by the American Petroleum Institute can be referred to for a definition of flexible pipes, and specification API 17A can be referred to for a definition of rigid pipes; it is simply recalled that flexible pipes have a minimum bend radius without damage (often termed MBR) which is relatively small (for example a few metres) as opposed to rigid pipes whose minimum bend radius without plastic deformation is relatively large (for example several tens of metres). Furthermore, for the purpose of the description below, the general term flexible pipes will be used to encompass not only flexible tubular pipes in their strictest sense, but also flexible risers, umbilicals and flexible cables that a laying vessel may have to lay.

Laying systems for rigid pipes are described in API 17A and for flexible pipes are described in API 17B.

In the case of rigid pipes, a distinction is made between two types of laying, depending on whether the sections of pipe are welded at sea (stove piping) or welded on land (reeled pipe).

The first type of laying itself has three main subdivisions, S-lay, J-lay and G-lay.

According to the S-lay technique, the sections of pipe are assembled horizontally on the deck of the vessel and they are made to follow an S-shaped path with a very large radius of curvature so as to prevent any

plastic deformation. The pipe leaves the vessel at a very oblique angle, with the aid of an inclined trough known as a stinger. This technique is suited only to shallow and moderate laying depths because otherwise  
5 the weight of the string of pipe already laid would run the risk of bending and plastically deforming the pipe at the point where it leaves the stinger. This is why other techniques have had to be developed for greater depths of water.

10

According to the J-lay technique, the sections of pipe are assembled on a vertical or very slightly inclined davit on the laying vessel, the sections thus being welded together in the direction in which the pipe is  
15 laid, which avoids any plastic deformation at this stage, the assembled pipe then being immersed to a great depth, still without plastic deformation. Examples are illustrated in document US 5 464 307 A or in French application 98/00148 in the name of the  
20 applicant company.

According to the G-lay technique, illustrated, for example, in document GB 2 287 518 A, sections of pipe are assembled horizontally on the deck of the vessel as  
25 in the S-lay technique; the pipe formed is sent towards the bow of the vessel then is returned aft by a large wheel which introduces plastic deformation into the pipe, after which this pipe passes through straighteners and a series of multi-track caterpillar  
30 tensioners and is then dropped into the water with a certain inclination which can be chosen according to the depth of water so as to avoid plastically deforming the pipe in the submerged part. According to one alternative form disclosed in document GB 2 296 956 A,  
35 the pipe, previously assembled from sections on the deck, is sent over an arched chute placed at the top of an inclinable ramp equipped with tensioners or clamping jaws; the two inflexions that the pipe undergoes lead

to plastic deformation of the pipe and make it necessary to employ straighteners. The rate of laying using the G-lay technique is relatively slow.

- 5 The second type of laying for rigid pipes, using sections welded together on land, comprises the so-called reeled pipe system illustrated, for example, in document GB 2 025 566 A, where the pipe, which has been welded together as a long length (in excess of 1 km for  
10 example) on the dockside and wound with plastic deformation onto a vertical reel (which may be as much as 15 to 20 m in diameter) located on the laying vessel, is unwound from the reel, again with plastic deformation, and passes through a straightener-reeler  
15 before being taken up by the tracked-caterpillar conveyors of an inclinable laying ramp provided in a zone where the pipe enters the water at the stern of the vessel and the inclination of which is chosen according to the laying depth. This technique does,  
20 however, have limitations in terms of the depth achieved; now, at the present time, the sea beds being exploited are often at depths in excess of 2000 m, which demands that a considerable length of rigid pipe be carried on board, this being something of which  
25 existing vessels are incapable.

In the case of flexible pipes, a distinction is also made between two types of laying: the horizontal laying system (HLS), the application of which is soon limited  
30 to shallow laying depths; and the vertical laying system (VLS). Document FR 2 660 402 A in the name of the applicant company discloses such VLS-type laying from the central well (moon pool) of a laying vessel. The pipe is unwound from a storage basket and sent over  
35 a chute which guides it in a circular arc (termed, in common parlance, a "camembert") located at the top of a vertical derrick of modest height surmounting the moon pool and supporting two multi-track caterpillar

tensioners which clamp and move the pipe along continuously. This system is well suited to flexible pipes (even though the depths reached are currently about 1700 m), that is to say the pipes which can adopt  
5 a fairly pronounced curvature both in the storage basket and over the return chute and on the intermediate portions of the catenary-curve-shaped part. By contrast, this system is not suitable for rigid pipes which cannot withstand such curvatures or  
10 in which such curvatures lead to permanent deformation.

As can thus be seen, the current laying ships are not suited to the laying of rigid and flexible pipes. A ship for laying reeled rigid pipe can be used for  
15 laying flexible pipe but this means of laying is not optimized for the laying of flexible pipe (the radius of curvature given to the flexible pipe during laying is far greater than the minimum bend radius of the flexible pipe). It is also possible to use the system  
20 described in French patent application 98/00148, but the J-lay davit has to be modified for laying the flexible pipe. Admittedly, there are some laying ships (for example SEAWAY FALCON and MAXITA) which can lay both rigid and flexible pipes, but the laying means on  
25 this type of ship are independent (there is one davit for laying rigid pipe and another for laying flexible pipe).

The object of the invention is to propose a vessel for  
30 laying reeled rigid pipe which allows laying at very great depths (particularly 2500 m and over) without running into the limitations hitherto encountered. Another object is to propose a vessel capable of combining the reeled pipe system with the system (VLS)  
35 used for laying flexible pipe by sharing the same laying means, and even that of the rigid-pipe J-lay system.

The objective of the invention is achieved using a vessel for laying rigid tubular pipes, of the type comprising means of storing tubular pipe wound with plastic deformation on vertical reels, an inclinable laying davit arranged approximately over a zone at which the pipe enters the water, an arched chute for deflecting the pipe at the top of the davit, and pipe-straightening means and tensioners arranged on the davit, characterized in that the storage means are in the form of two adjacent vertical wheels of very large dimensions facing approximately towards the davit, the mid-planes of the wheels intersecting in the vertical longitudinal mid-plane of the vessel.

The invention solves the problem of increasing the capacity of the vessel for storing wound rigid pipe in an original way; rather than increasing the dimensions of a single storage wheel in proportions which would make it difficult to control (for example, a wheel weighing 500 tonnes presents problems of rotational inertia and demands substantial reeling means), the invention proposes to arrange two adjacent storage wheels in a particular orientation, which makes it possible not only to control the problems of rotational inertia, but also to dispense with reeling means for unwinding the wound rigid pipe especially if, as is preferred, the deflecting chute can itself be directed towards one or other of the wheels; for this purpose, the top of the davit is mounted in such a way as to allow sufficient pivoting to each side of the longitudinal mid-plane of the vessel, for example by about  $15^\circ$ , and to do so when the davit is vertical or inclined by an angle which may be as much as  $60^\circ$  to the horizontal. The pivoting top of the davit contains the straightening means (preferably at three points) so that the straightening of the unwound rigid pipe always occurs in a correct orientation without introducing additional false twist due to the angular position of

the vertical storage wheels (that is to say plastic deformation in a plane different from the normal plane of curvature of the wound pipe).

- 5 The mid-planes of the wheels ideally intersect at the point where the rigid pipe enters the straightening means of the davit. As this davit is of variable inclination (between  $60^\circ$  and  $90^\circ$ ), it may be envisaged for the angular position of the wheels to be adjustable according to the laying angle, using appropriate means for supporting and orientating the hubs of the wheels. In a simplified version, the wheels are given a fixed orientation corresponding to the ideal position for an average laying angle ( $75^\circ$ ) which, in one exemplary configuration, amounts to making the mid-planes of the wheels intersect forward of the zone at which the pipe enters the water, approximately in the region of the top of the deflecting chute (when the davit is in a vertical position). In practice, the wheels then make an angle of about  $5^\circ$  with respect to the mid-plane of the vessel.

In addition to the advantages already mentioned, the fact of having two storage wheels makes it possible to halve the time taken, on the quayside, to load the wheels and makes it possible to store different pipes on each of the wheels, for example pipes of different diameters.

- 30 According to the invention, the zone at which the pipe enters the water is a moon pool located roughly at the centre of the vessel. At the moon pool there is an independent table comprising a clamp. This clamp is able to hold the string of pipe while accessories are affixed to the pipes or while two sections of pipe are being connected. This clamp can also be used as a static clamp for J-laying. For this purpose, a special-purpose ramp for J-laying is attached to the davit; the

5   aft deck is used for preparing sections of rigid pipe; J-laying is carried out using a mobile carriage mounted on the special-purpose ramp and operated by the abandonment and recovery winch, and using the static clamp.

Naturally, the vessel also has a well for the passage of an underwater laying robot.

10   To allow the vessel the desired multi-functionality, flexible-pipe storage baskets are provided on the vessel, and the davit also has, at its upper end, a chute for flexible pipe. The davit can therefore be used for laying flexible pipe using the VLS technique.  
15   Furthermore, enough space is provided at the laying table at the base of the davit for affixing various accessories (vertebras, buoys, etc.). The stern of the vessel is also large enough to accommodate a great deal of tackle and equipment needed for preparing the pipes.  
20

The invention will be clearly understood and other features and advantages of the invention will emerge from reading the description which follows, which is given with reference to the appended drawings in which:

25   Figure 1 is a side view with partial cutaway of a laying vessel according to the invention,  
Figure 2 is a very simplified view from above of the vessel of Figure 1, looking essentially at  
30   the upper deck.

The laying vessel 1, about 230 m long, comprises, in its sternmost third, a central moon pool 2 above which there rises a laying davit 3 articulated at its base at  
35   4 (near the upper deck) in such a way that it can adopt positions which are inclined towards the bow of the vessel, such as the position depicted in dotted line in Figure 1, using a rack-and-pinion system 20.

The davit 3, which rises to some 50 m, has an upper module 5 about 15 m tall which can turn with respect to the lower part, about the axis of the davit 3. Mounted  
5 on this module 5 are, on the one hand, a small chute 6 for guiding the flexible pipe and, on the other hand, a large arched chute 7 for deflecting a rigid pipe. The large chute 7, about 11 m long, is supported by a bracket 21 resting on the upper module 5 and is  
10 designed to lead the unwound rigid pipe into a three-point straightening assembly 8 arranged in the pivoting upper module 5 of the davit, which three-point assembly is followed, in the downstream direction, by a group of two four-track-caterpillar tensioners 9. From the  
15 moment it enters the straightening device, the pipe is oriented in the laying direction.

Forward of the moon pool 2, by about 80 m, are two large vertical wheels 10, with a capacity of 2500  
20 tonnes, formed of a hub measuring about 20 m and of cheeks about 31 m in diameter, for a width of slightly more than 5 m. The wheels are mounted so that they can rotate in a conventional way on spherical roller bearings and are driven by rack-and-pinion systems.  
25 According to the invention, the wheels are arranged symmetrically with respect to the longitudinal axis XX of the vessel, and face towards the davit 3, ideally at the point where the rigid pipe enters the three-point straightening device 8 of the davit. In the  
30 configuration shown in the drawing, the wheels are of fixed orientation and the lines 11 of their respective mid-planes intersect on the longitudinal axis XX of the vessel, forward of the moon pool 2, at a point 12 which is close to the foot of the projection of the top of  
35 the large chute 7 of the davit 3 when vertical.

Two baskets 13 of vertical axes, for storing flexible pipe or umbilical, with a capacity of 1500 tonnes

(outside diameter of about 17 m) are also provided on the vessel 1, between the moon pool 2 and the wheels 10. Flexible-pipe return devices 22 are provided above the baskets to allow the flexible pipe to be wound into the baskets from the deck and unwound from the baskets 13 towards the deck and the guide chute 6.

The rigid pipe 14 stored on one or other of the wheels 10 can be unwound from the wheel as shown in chain line in Figure 1, the pipe passing over the large chute 7 then into the straighteners 8 and into the tensioners 9, after which it passes through the moon pool to join the laid string of pipe. The possibility of rotating the top 5 of the davit allows the large chute 7 and the three-point straightener 8 to be directed towards that one of the two wheels which is paying out, and this makes it possible to avoid imparting detrimental twist to the unwound pipe. Figure 2 diagrammatically shows the davit (depicted as vertical) with its upper module 5 and the chute 7 in the central position and, in chain line referenced 7', depicts the same chute after the upper module has pivoted towards one of the wheels 10 (the lower one in the drawing).

Solid line 14' shows the rigid pipe being reeled onto one or other of the wheels 10 from the stern 15 of the vessel, when the vessel is dockside or even by assembly actually on deck, on account of the vast amount of space available. The pipe 14' passes over a reeling tensioner 16 located forward of the moon pool 2 and allowing the pipe to be wound uniformly onto the wheel. The tensioner 16 is mounted so that it can pivot in a heightwise direction so that it can adapt to the variable angle that the pipe 14' makes as it is gradually reeled onto the wheel 10.

## CLAIMS

1. Vessel for laying rigid tubular pipes (14), of the  
5 type comprising means (10) of storing tubular pipe  
wound with plastic deformation on vertical reels,  
an inclinable laying davit (3) arranged  
approximately over a zone (2) at which the pipe  
enters the water, an arched chute (7) for  
10 deflecting the pipe at the top of the davit (3),  
and pipe-straightening means (8) and tensioners  
(9) arranged on the davit (3), characterized in  
that the storage means are in the form of two  
adjacent wheels (10) facing approximately towards  
15 the davit (3), the mid-planes of the wheels (10)  
intersecting in the vertical longitudinal mid-  
plane of the vessel.
2. Vessel according to Claim 1, characterized in that  
20 the deflecting chute (7) can be directed towards  
one or other of the wheels (10).
3. Vessel according to Claim 2, characterized in that  
the deflecting chute (7) and the straightening  
25 means (8) are mounted on an upper module (5) of  
the davit capable of pivoting about the axis of  
the davit (3).
4. Vessel according to one of Claims 1 to 3,  
30 characterized in that the mid-planes of the wheels  
(10) intersect near the point where the rigid pipe  
enters the straightening means (8) of the davit.
5. Vessel according to any one of Claims 1 to 3,  
35 characterized in that the mid-planes of the wheels  
(10) intersect forward of the water-entering zone  
(2), preferably in the region of the top of the

chute (7) when the davit is in a vertical position.

- 5 6. Vessel according to any one of Claims 1 to 5, characterized in that the wheels (10) form an angle of about 5° to the longitudinal axis of the vessel.
- 10 7. Vessel according to any one of Claims 1 to 3, characterized in that means are provided for supporting and orientating the wheels (10) so as to allow the angular position of the wheels (10) to be adjusted.
- 15 8. Vessel according to any one of Claims 1 to 7, characterized in that the water-entering zone is a moon pool (2).
- 20 9. Vessel according to any one of Claims 1 to 8, characterized in that baskets (13) for storing flexible pipe are also provided, and in that the davit (3) comprises a flexible-pipe return chute (6).

ORIGINAL

11 pages

Société dite : COFLEXIP

PAR PROCURATION

CABINET  
CAZENAVE  
BREVETS - MARQUES  
DESSINS ET MODELES  
R.P. 500 YAOUNDE CAMEROON  
TEL. 21 32 89 Fax 20 64 14

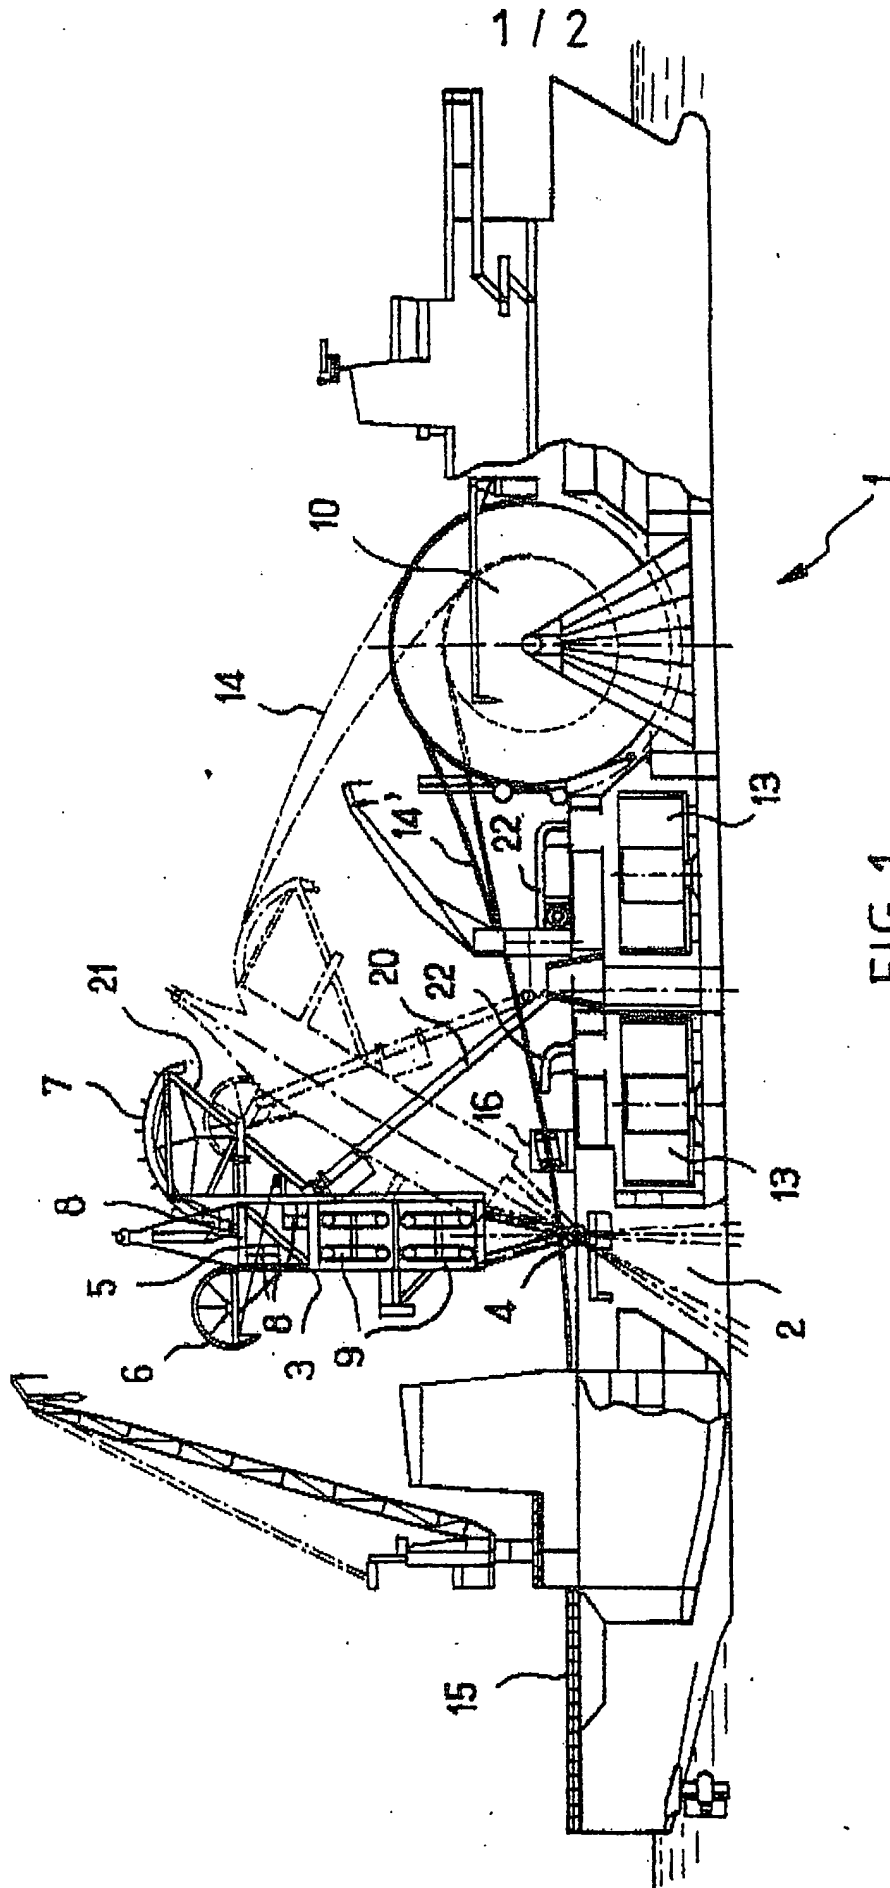


FIG. 1

