



US010892446B2

(12) **United States Patent**  
Lee et al.

(10) **Patent No.:** US 10,892,446 B2  
(45) **Date of Patent:** Jan. 12, 2021

(54) **RECHARGEABLE BATTERY AND MANUFACTURING METHOD THEREOF**

(71) Applicant: **SAMSUNG SDI CO., LTD.**, Yongin-si (KR)

(72) Inventors: **Jongha Lee**, Yongin-si (KR); **Junsun Yong**, Yongin-si (KR)

(73) Assignee: **Samsung SDI Co., Ltd.**, Yongin-Si (KR)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 915 days.

(21) Appl. No.: **14/824,314**

(22) Filed: **Aug. 12, 2015**

(65) **Prior Publication Data**

US 2016/0049618 A1 Feb. 18, 2016

(30) **Foreign Application Priority Data**

Aug. 13, 2014 (KR) ..... 10-2014-0104862

(51) **Int. Cl.**

**H01M 2/02** (2006.01)  
**H01M 10/0525** (2010.01)  
**H01M 2/26** (2006.01)  
**H01M 2/04** (2006.01)  
**H01M 2/30** (2006.01)  
**H01M 2/06** (2006.01)

(52) **U.S. Cl.**

CPC ..... **H01M 2/0202** (2013.01); **H01M 2/021** (2013.01); **H01M 2/0404** (2013.01); **H01M 2/06** (2013.01); **H01M 2/263** (2013.01); **H01M 2/30** (2013.01); **H01M 10/0525** (2013.01); **H01M 2220/30** (2013.01)

(58) **Field of Classification Search**

CPC ..... H01M 10/0525; H01M 2220/30; H01M 2/0202; H01M 2/021; H01M 2/0404; H01M 2/06; H01M 2/263; H01M 2/30  
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,972,185 B2 7/2011 Kim  
8,501,346 B2 8/2013 Byun et al.  
9,252,401 B2 2/2016 Kim

(Continued)

FOREIGN PATENT DOCUMENTS

EP 2 230 705 A1 9/2010  
EP 2 388 844 A1 11/2011

(Continued)

OTHER PUBLICATIONS

Extended European Search Report dated Jan. 7, 2016 in Corresponding European Patent Application No. 15180827.6.

(Continued)


*Primary Examiner* — Lingwen R Zeng

(74) *Attorney, Agent, or Firm* — Lee IP Law, PC

(57) **ABSTRACT**

A secondary battery includes an electrode assembly, a can, a cap plate, an insulating plate, and a terminal plate. The electrode assembly is in the can. The cap plate seals an opening of the can and includes a first hole. The insulating plate is on a lower surface of the cap plate and includes a second terminal through hole. The terminal plate is on a lower surface of the insulating plate and includes a third terminal through hole and at least one protrusion adjacent the third terminal through hole.

**8 Claims, 6 Drawing Sheets**

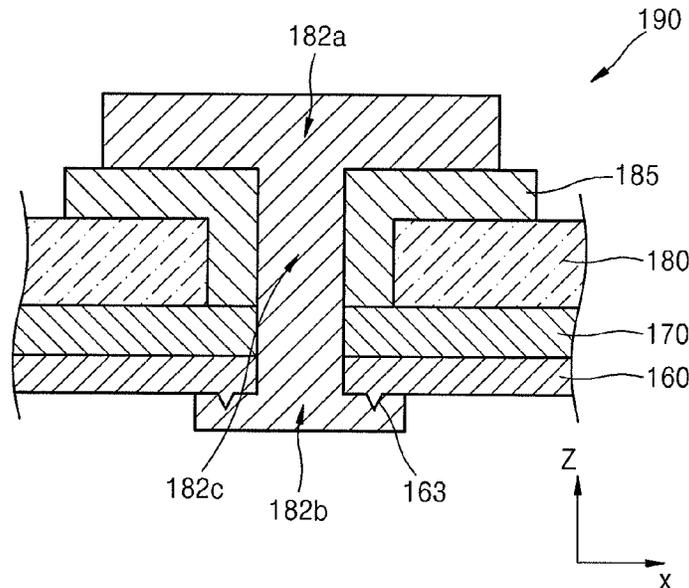

(56)

**References Cited**

U.S. PATENT DOCUMENTS

2001/0004505 A1\* 6/2001 Kim ..... H01M 10/0587  
429/180  
2006/0093907 A1\* 5/2006 Jeon ..... H01M 2/0404  
429/180  
2007/0154783 A1 7/2007 Jeon  
2007/0154802 A1\* 7/2007 Uh ..... H01M 2/0404  
429/180  
2008/0160393 A1 7/2008 Kim et al.  
2009/0202901 A1\* 8/2009 Okuda ..... H01M 2/0426  
429/175  
2014/0017555 A1 1/2014 Yun  
2014/0242440 A1 8/2014 Yamada et al.

FOREIGN PATENT DOCUMENTS

EP 2 495 784 A2 9/2012  
KR 10-2007-0006091 A 1/2007  
KR 10-0719728 B1 5/2007  
KR 10-2008-0072132 A 8/2008  
KR 10-2010-0105340 A 9/2010  
KR 10-2012-0100477 A 9/2012  
KR 10-2011-0128084 A 8/2013  
KR 10-2014-0008236 A 1/2014

OTHER PUBLICATIONS

European Office Action dated May 17, 2019.  
Korean Office action dated Oct. 29, 2020.

\* cited by examiner

FIG. 1

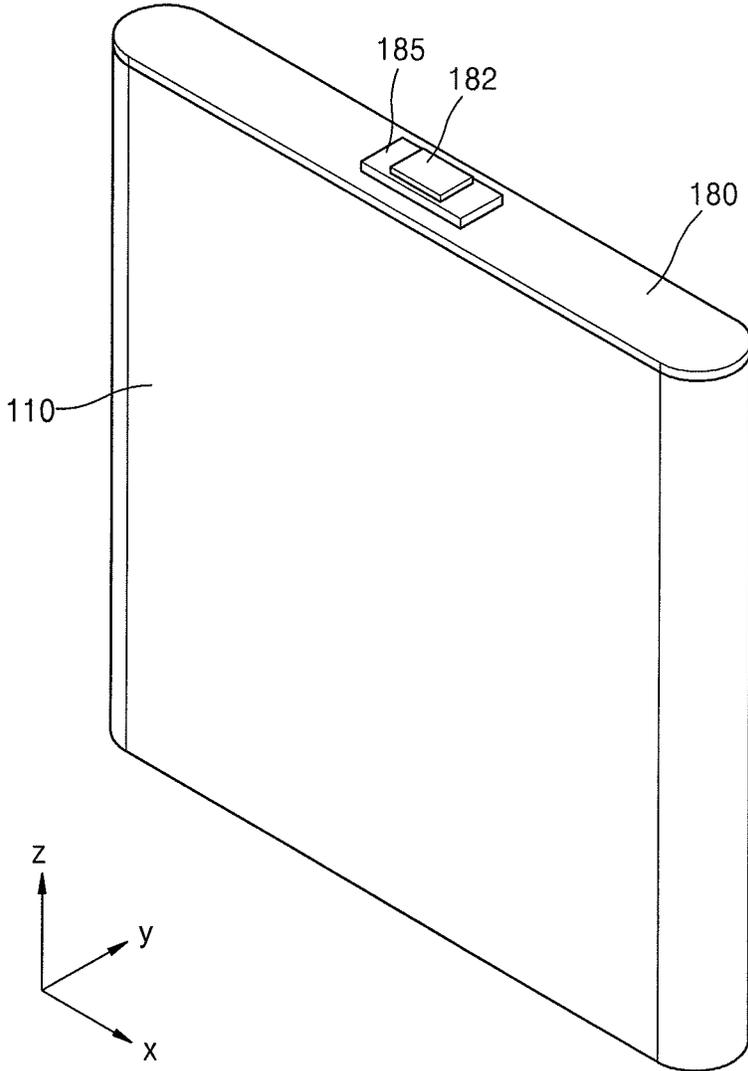




FIG. 3

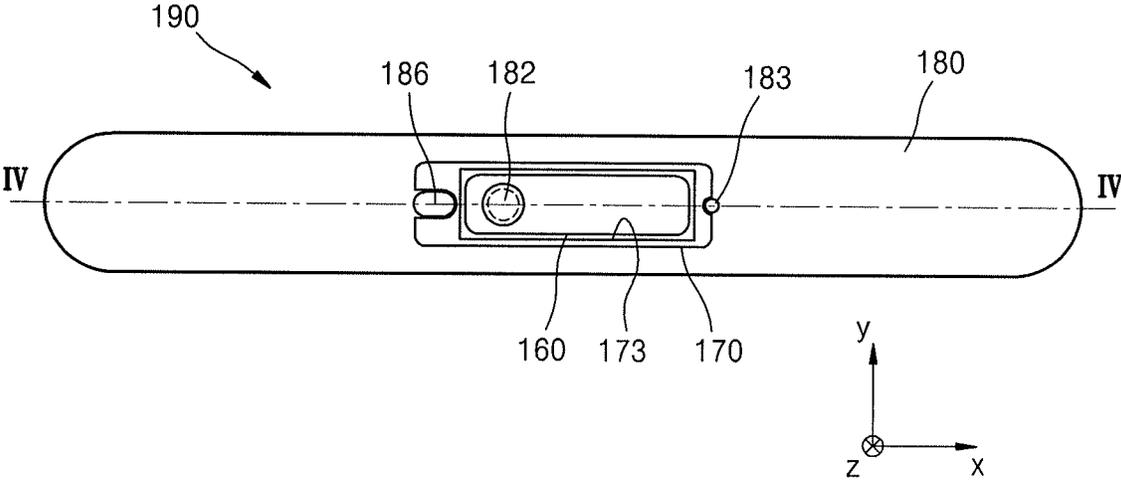


FIG. 4

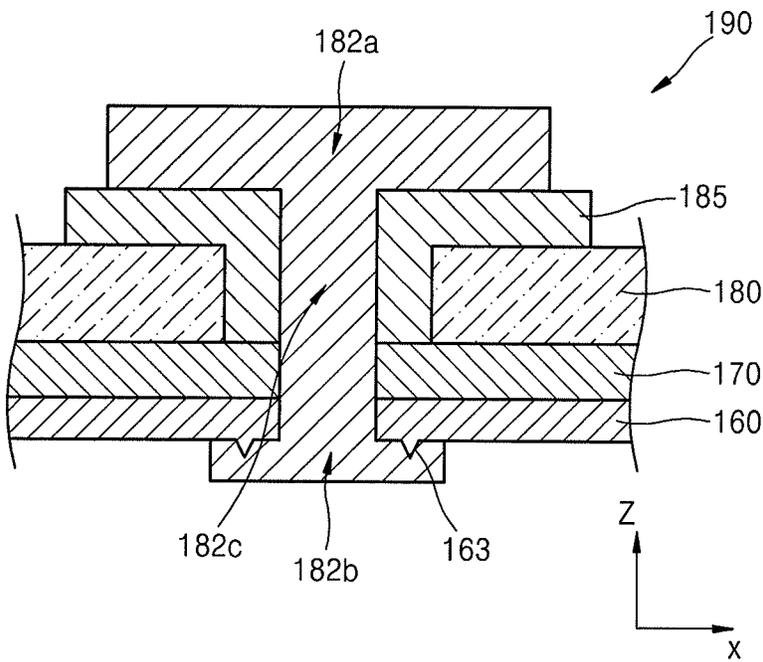


FIG. 5

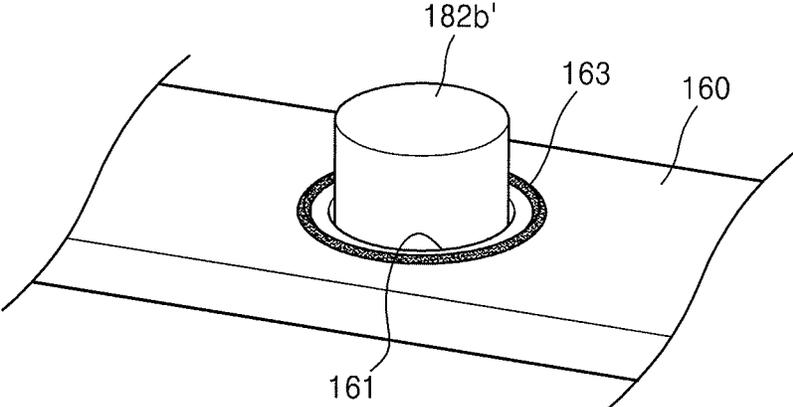


FIG. 6

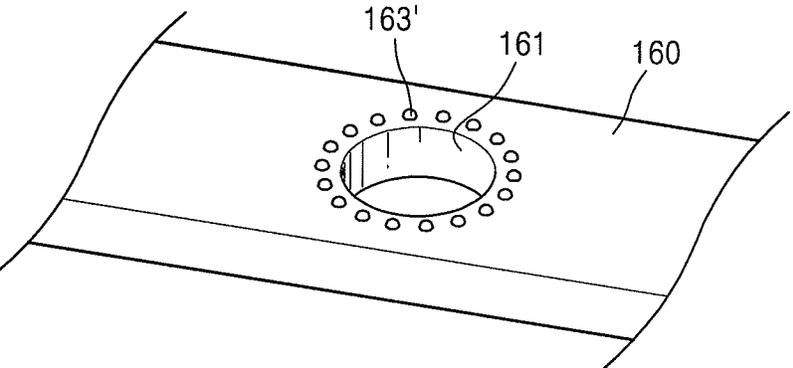


FIG. 7


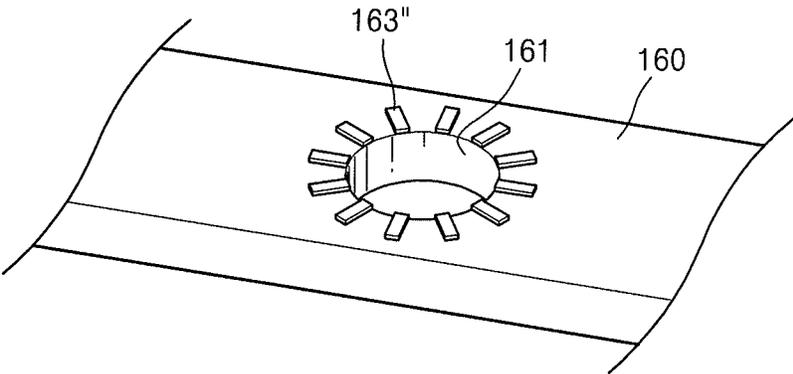


FIG. 8

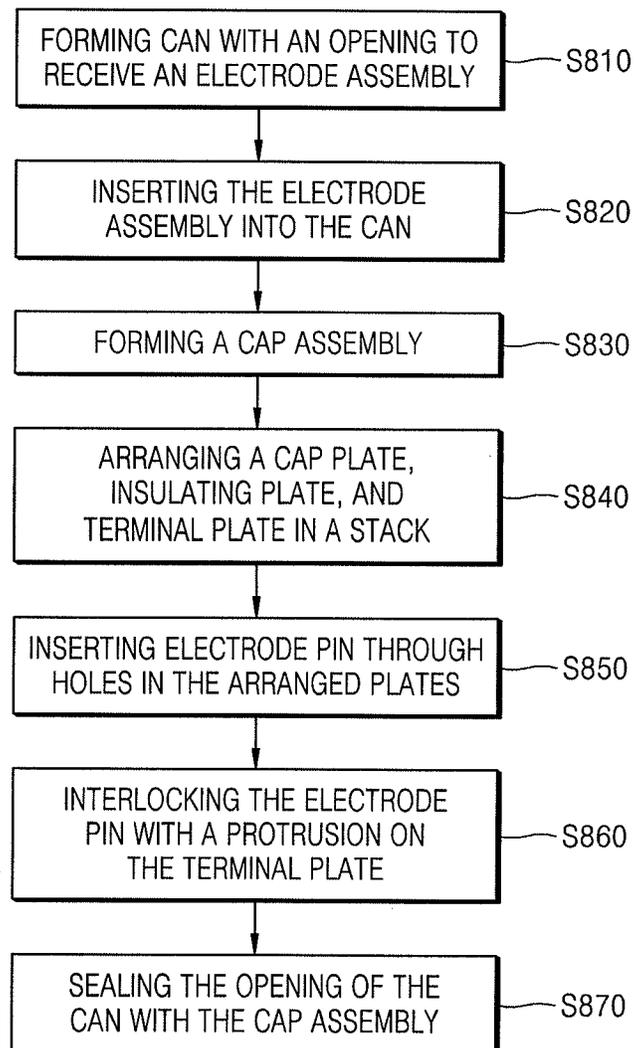

1

## RECHARGEABLE BATTERY AND MANUFACTURING METHOD THEREOF

### CROSS-REFERENCE TO RELATED APPLICATION

Korean Patent Application No. 10-2014-0104862, filed on Aug. 13, 2014, and entitled: "Rechargeable Battery and Manufacturing Method Thereof," is incorporated by reference herein in its entirety.

### BACKGROUND

#### 1. Field

One or more embodiments described herein relate to a rechargeable battery and a method for manufacturing a rechargeable battery.

#### 2. Description of the Related Art

With the development of wireless Internet and communication technologies, battery-operated portable electronic devices which do not use a separate power supply have been developed. Examples of these devices include small, easy-to-carry portable computers used for business or personal reasons.

A secondary battery may be employed in the portable computer to allow computer to be used anywhere, regardless of the availability of power supplies. Such a secondary battery may include a plurality of unit batteries that are repeatedly charged and discharged in order to supply enough power.

### SUMMARY

In accordance with one embodiment, a secondary battery includes an electrode assembly including a separator between a first electrode plate and a second electrode plate; a can including the electrode assembly and an opening; a cap plate to seal the opening of the can and including a first terminal through hole; an insulating plate on a lower surface of the cap plate and including a second terminal through hole; and a terminal plate on a lower surface of the insulating plate and including a third terminal through hole and at least one protrusion adjacent the third terminal through hole.

The terminal plate may include a first surface which includes the at least one protrusion and a second surface which contacts the insulating plate, and the first surface may be opposite to the second surface. The electrode pin may be on an upper surface of the cap plate and may be inserted into the first, second, and third terminal through holes. The electrode pin may include an upper portion on the upper surface of the cap plate, a lower portion on a lower surface of the terminal plate, and a connecting portion to connect the upper portion and the lower portion. The lower portion of the electrode pin may interlock with the at least one protrusion of the terminal plate.

The at least one protrusion may have a substantially circular shape and surrounds the third terminal through hole. The at least one protrusion may include a plurality of protrusions adjacent the third terminal through hole. The protrusions may be radially arranged relative to the third terminal through hole.

In accordance with another embodiment, a method for manufacturing a secondary battery includes inserting an electrode assembly into a can; forming a cap assembly by (a) arranging a cap plate, an insulating plate on a lower surface of the cap plate, and a terminal plate on a lower surface of the insulating plate in a stack, and (b) inserting an electrode

2

pin into terminal through holes in the cap plate, the insulating plate, and the terminal plate; and sealing the can with the cap assembly, wherein at least one protrusion is located on a surface of the terminal plate and is adjacent one of the terminal through holes.

The electrode pin may include a metallic material, and the method may include forming an end of the electrode pin by a spinning method, wherein (b) includes inserting the end of the electrode pin into the terminal through holes of the cap assembly based on malleability of the metallic material. Also, (b) may include interlocking the end of the electrode pin with the at least one protrusion of the terminal plate.

In accordance with another embodiment, a cap assembly for a battery includes a cap plate including a first hole; an insulating plate on the cap plate and including a second hole; and a terminal plate on the insulating plate and including a third hole and at least one protrusion adjacent the third hole, wherein the at least one protrusion has a first shape to be coupled to a second shape of an electrode pin. The first shape may be complementary to the second shape.

The first, second, and third holes may have first diameters to accommodate the electrode pin, which may have a second diameter less than each of the first diameters. The at least one protrusion may include a plurality of protrusions to be coupled to the second shape of the electrode pin. The plurality of protrusions may have the first shape. The cap plate may include at least one anchor to fix a position of the insulating plate. The insulating plate may include a recess which includes the at least one anchor. The cap assembly may include a gasket in at least one of the first, second, or third holes. The at least one protrusion may surround the third hole.

### BRIEF DESCRIPTION OF THE DRAWINGS

Features will become apparent to those of skill in the art by describing in detail exemplary embodiments with reference to the attached drawings in which:

FIG. 1 illustrates an embodiment of a secondary battery; FIG. 2 illustrates an exploded view of the secondary battery;

FIG. 3 illustrates an embodiment of a cap assembly; FIG. 4 illustrates the cap assembly along section line VI-VI' in FIG. 3;

FIGS. 5 to 7 illustrate enlarged portions of embodiments of a terminal plate; and

FIG. 8 illustrates a method for manufacturing a secondary battery.

### DETAILED DESCRIPTION

Example embodiments are described more fully herein-after with reference to the accompanying drawings; however, they may be embodied in different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey exemplary implementations to those skilled in the art. In the drawings, the dimensions of layers and regions may be exaggerated for clarity of illustration. Like reference numerals refer to like elements throughout.

FIG. 1 illustrates an embodiment of a secondary battery 100, FIG. 2 illustrates an exploded view of the secondary battery 100, and FIG. 3 illustrates a bottom view of a cap assembly 190 of the secondary battery 100.

Referring to FIGS. 1 to 3, the secondary battery 100 includes a can 110, an electrode assembly 130, an insulating

case **150**, and a cap assembly **190**. The secondary battery **100** may be rechargeable and may be, for example, a lithium-ion battery.

The can **110** has an opening **OP** on one side thereof and has an internal space surrounded by a side wall. The electrode assembly **130** is inserted through the opening **OP**. Thus, the can **110** may house the electrode assembly **130**.

The can **110** has a predetermined shape and an upper portion thereof is open. The predetermined shape may be, for example, a hexahedron shape. In other embodiments, the can **110** may have another shape. The can **110** may be formed of aluminum (Al) or Al alloy. After the electrode assembly **130** is inserted into the can **110** via the opening **OP**, the opening **OP** may be sealed by the cap assembly **190**.

The cap assembly **190** includes a terminal plate **160**, an insulating plate **170**, a cap plate **180**, and electrode pin **182** which is inserted into the terminal plate **160**, the insulating plate **170**, and the cap plate **180**. The cap plate **180** may be formed, for example, of metallic materials such as Al or Al alloy, which may be the same as the can **110**. The cap plate **180** and the can **110** may be joined, for example, by laser welding to form an internal airtight coupling.

The electrode assembly **130** may include a first electrode layer **131**, a second electrode layer **132**, and a separator **133** between the first electrode layer **131** and the second electrode layer **132**. The electrode assembly **130** may have a structure in which a plurality of first electrode layers **131**, second electrode layers **132**, and separators **133** are stacked, or a jelly-roll structure in which the first electrode layer **131**, the second electrode layer **132**, and the separator **133** are wrapped. A case where the electrode assembly **130** has a jelly-roll structure is described for illustrative purposes.

The first electrode layer **131** may be any one of an anode film or a cathode film. When the first electrode layer **131** is an anode film, the second electrode layer **132** is a cathode film. Conversely, when the first electrode layer **131** is a cathode film, the second electrode layer **132** is an anode film. That is, the first electrode layer **131** and the second electrode layer **132** have polarities which are electrically different from each other. The polarities are not limited to certain polarities. A case where the first electrode layer **131** is an anode film and the second electrode layer **132** is a cathode film is described for illustrative purposes.

The first electrode layer **131** may include a first metal collector and a first active material portion on which a first active material is spread. The first active material may be spread on a portion or an entire surface of the first metal collector. Likewise, the second electrode layer **132** may include a second metal collector and a second active material portion on which a second active material is spread. The second active material may be spread on a portion or an entire surface of the second metal collector.

The first electrode layer **131** is the anode film, the first metal collector is an anode collector, and the first active material portion may be an anode active material portion. The second electrode layer **132** is the cathode film, the second metal collector is a cathode collector, and the second active material portion may be a cathode active material portion. Materials and structures of the anode collector, the anode active material portion, the cathode collector, and the cathode active material portion may include various predetermined materials.

The separator **133** may be a porous polymer film, or may be woven fabrics or non-woven fabrics including polymer fibers. Also, the separator **133** may include ceramic particles and may be formed of a polymer solid electrolyte. For example, the separator **133** may be formed of polyethylene

(PE), polypropylene (PP), etc. The separator **133** may be used as a separate film or formed as a non-conductive porous layer on the first electrode layer **131** or the second electrode layer **132**.

The separator **133** electrically separates the first electrode layer **131** and the second electrode layer **132**. The separator **133** may have a shape identical or complementary to a shape of the first electrode layer **131** or the second electrode layer **132**, or may have a different shape.

The electrode plates include a first electrode plate **134** and a second electrode plate **135** having different properties. The electrode plates **134** and **135** electrically connect the electrode assembly **130** to an external device. The first electrode plate **134** is electrically connected to the first electrode layer **131**, thus having an anode. The second electrode plate **135** is electrically connected to the second electrode layer **132**, thus having a cathode.

The insulating case **150** is between the electrode assembly **130** and the cap assembly **190**, and electrically insulates the electrode assembly **130** from the cap assembly **190**. The insulating case **150** is inside the opening **OP** of the can **110**, which houses the electrode assembly **130**.

Also, supports **156** may be formed at ends of the insulating case **150**. The insulating case **150** may be stably disposed in the can **110** using the supports **156**. FIG. 2 shows that the supports **156** are formed at the ends of the insulating case **150**, but the supports **156** may extend along a circumference of the insulating case **150** in another embodiment.

Because the insulating case **150** electrically insulates the electrode assembly **130** from the cap assembly **190**, the insulating case **150** may be formed, for instance, of insulative polymer resins. Examples of insulative polymer resins include but are not limited to PP, PE, polyimide (PI), polyphenylenesulfide (PPS), polyethersulfone (PES), and polyphenyleneoxide (PPO).

The cap assembly **190** may include a cap plate **180**, an insulating plate **170**, a terminal plate **160**, and an electrode pin **182**. The cap plate **180** seals the opening **OP** of the can **110** and protects the electrode assembly **130** inside the can **110**. The shape of the cap plate **180** may be the same as the opening **OP** of the can **110**.

The electrode pin **182** may be arranged on the cap plate **180**. In this case, a gasket **185** may be between the electrode pin **182** and the cap plate **180** to prevent a short between the electrode pin **182** and the cap plate **180**. The gasket **185** may include an insulative material to prevent an electrical short between the electrode pin **182** and the cap plate **180**.

The electrode pin **182** is arranged at a predetermined location on the cap plate **180**. The predetermined location may be, for example, the center of the cap plate **180**. Based on the electrode pin **182**, an anchor **183** is on one end of the cap plate **180**, and an electrolyte injection hole **184** may be at another end of the cap plate **180**. In another embodiment, the electrode pin **182** may be located at a location different from the center of the cap plate **180**.

The electrode pin **182** may be electrically connected to the second electrode plate **135**, via a first terminal through hole **181** arranged at the center of the cap plate **180**. For example, the first electrode plate **134** is electrically connected to the cap plate **180**, and the second electrode plate **135** is electrically connected to the electrode pin **182**. Because the first electrode plate **134** and the second electrode plate **135** have different polarities, the cap plate **180** and the electrode pin **182** (which are respectively connected to the first electrode plate **134** and the second electrode plate **135**) also have different polarities. For example, the cap plate **180** may have a positive polarity, and the electrode pin **182** may have a

negative polarity. Therefore, the gasket **185** is between the cap plate **180** and the electrode pin **182** to prevent a short between the cap plate **180** and the electrode pin **182**.

The electrolyte injection hole **184** (used to inject electrolyte into the sealed can **110**) may be formed and be sealed by a sealing cap after the electrolyte is injected.

The terminal plate **160** and the insulating plate **170** may be on a lower surface of the cap plate **180**. The insulating plate **170** may be on the lower surface of the cap plate **180** and may be formed of an insulative material, which, for example, is the same as the material from which the gasket **185** is made.

A second terminal through hole **171**, in which the electrode pin **182** is inserted, is formed at a location corresponding to the first terminal through hole **181** of the cap plate **180**. An accommodation groove **173**, having a size corresponding to a size of the terminal plate **160**, is formed in a lower surface of the insulating plate **170** in order to accommodate the terminal plate **160**.

The terminal plate **160** includes a conductive material (e.g., nickel (Ni)) and is coupled to the lower surface of the insulating plate **170**. As a result, an electrical path may be formed between the electrode pin **182** and the second electrode plate **135**. One side of the terminal plate **160** electrically contacts the second electrode plate **135**. Another side of the terminal plate **160** may electrically contact the electrode pin **182**. For example, a third terminal through hole **161**, in which the electrode pin **182** is inserted, is at a location corresponding to the first terminal through hole **181** of the cap plate **180**. Because the electrode pin **182** is insulated by the gasket **185** and is coupled via the first terminal through hole **181** of the cap plate **180**, the terminal plate **160** is electrically insulated from the cap plate **180** and then electrically connected to the electrode pin **182**.

In one embodiment, the cap plate **180** may include a first anchor **183** and a second anchor **186**, protruding from the lower surface of the cap plate **180**, to fix the terminal plate **160** and the insulating plate **170**. Because the anchors **183** and **186** fix the position of the terminal plate **160** and/or the insulating plate **170**, an electrical short may be prevented. In another embodiment, only one of the anchors may be included for fixing the position of the terminal plate **160** and/or the insulating plate **170** for preventing a short.

FIG. 4 is a cross-sectional view illustrating a portion taken along a line VI-VI in FIG. 3. In particular, FIG. 4 illustrates an enlarged cross-section of the cap assembly **190** including the terminal plate **160**, the insulating plate **170**, and the cap plate **180**, which are arranged based on the electrode pin **182**.

Referring to FIG. 4, the cap assembly **190** includes the terminal plate **160**, the insulating plate **170**, the cap plate **180**, and the electrode pin **182**. The cap plate **180** has the first terminal through hole **181**, the insulating plate **170** has the second terminal through hole **171**, and the terminal plate **160** has the third terminal through hole **161**. The electrode pin **182** is inserted into the first terminal through hole **181**, the second terminal through hole **171**, and the third terminal through hole **161**.

A protrusion **163** may be formed on a neighboring or adjacent portion of the third terminal through hole **161** of the terminal plate **160**. Because one surface of the terminal plate **160** contacts the insulating plate **170**, the protrusion **163** may be on the other surface of the terminal plate **160**. For example, the protrusion **163** may be on a surface opposite to the surface on which the terminal plate **160** contacts the insulating plate **170**.

Further, as illustrated in FIG. 4, the electrode pin **182** (which is inserted into the first terminal through hole **181**, the second terminal through hole **171**, and the third terminal through hole **161**) includes an upper portion **182a** on the upper surface of the cap plate **180**, a lower portion **182b** on the lower surface of the terminal plate **160**, and a connecting portion **182c** coupled between the upper portion **182a** and the lower portion **182b**. The upper portion **182a** of the electrode pin **182** contacts the upper surface of the cap plate **180**. The lower portion **182b** of the electrode pin **182** contacts the lower surface of the terminal plate **160**. The upper portion **182a** of the electrode pin **182** may be on the upper surface of the cap plate **180**, with the gasket **185** interposed therebetween. As described above, because the cap plate **180** and the electrode pin **182** are formed of metallic materials and have different polarities, the gasket **185** is arranged to prevent an electrical short on the surface on which the upper portion **182a** of the electrode pin **182** contacts the upper surface of the cap plate **180**.

The protrusion **163** may be on the lower surface of the terminal plate **160**, at a location where the lower surface of the terminal plate **160** contacts the lower portion **182b** of the electrode pin **182**. Therefore, the lower portion **182b** of the electrode pin **182** is arranged to interlock with the protrusion **163** of the terminal plate **160**. Adhesion between the lower portion **182b** of the electrode pin **182** and the terminal plate **160** may be greatly improved due to the protrusion **163** formed on the terminal plate **160**. A contact resistance problem between the surface of the lower portion **182b** of the electrode pin **182** (which contacts the lower surface of the terminal plate **160**) may be solved, thereby improving reliability of the secondary battery.

FIGS. 5 to 7 illustrate different embodiments of the terminal plate **160** of the secondary battery **100** in FIG. 1.

Referring to FIG. 5, the protrusion **163** on the lower surface of the terminal plate **160** has a predetermined (e.g., circular) shape and surrounds the third terminal through hole **161** of the terminal plate **160**.

Referring to FIG. 6, a plurality of protrusions **163'** may be on the terminal plate **160** and may surround an adjacent or neighboring portion of the third terminal through hole **161** of the terminal plate **160**.

Referring to FIG. 7, protrusions **163''** on the lower surface of the terminal plate **160** may be radially arranged based on the third terminal through hole **161** of the terminal plate **160**.

Due to the aforementioned protrusions on the terminal plate **160**, adhesion between the lower portion **182b** of the electrode pin **182** and the terminal plate **160** may be greatly improved. Also, a contact resistance problem, on the surface on which the lower portion **182b** of the electrode pin **182** and the terminal plate **160** are formed, may be solved, thereby improving reliability of the secondary battery.

FIG. 8 illustrates operations included in a method for manufacturing a secondary battery, which, for example, may be the secondary battery in FIGS. 1 to 7. The method includes forming a can **110** having a predetermined shape (e.g., similar to a hexahedron) and an opening OP on a side of the can **110** (**S810**). The can **110** is formed to include, for example, metallic materials (e.g., Al or Al alloy) to secure sufficient strength.

Then, an electrode assembly **130** is housed in the can **110** (**S820**). The electrode assembly **130** may include a first electrode layer **131**, a second electrode layer **132**, and a separator **133** between the first electrode layer **131** and the second electrode layer **132**. The electrode assembly **130** may have a structure in which first multiple electrode layers **131**, second electrode layers **132**, and separators **133** are stacked,

or a jelly-roll structure in which the first electrode layer **131**, the second electrode layer **132**, and the separator **133** are wrapped.

A cap assembly **190** may be formed to include a cap plate **180**, an insulating plate **170**, a terminal plate **160**, and an electrode pin **182** (**S830**). Formation of the cap assembly may include arranging the insulating plate **170** on a lower surface of the cap plate **180**, and the terminal plate **160** on a lower surface of the insulating plate **170** (**S840**). Then, the electrode pin **182** may be inserted into terminal through holes **181**, **171**, and **161** respectively formed in the cap plate **180**, the insulating plate **170**, and the terminal plate **160** (**S850**).

Referring to FIG. 5, the electrode pin **182** is formed of metallic materials which have ductility and malleability. An end of the electrode pin **182**, which is inserted into the terminal plate **160** using the malleability of the metallic materials, may be formed, for example, by a spinning method. An end portion **182b'** of the electrode pin **182**, which is formed by the spinning method, may contact a surface on a neighboring portion of the terminal through hole **161** of the terminal plate **160**.

A protrusion **163** is formed on a surface of the terminal plate **160**, at a location where the end portion **182b'** of the electrode pin **182** contacts the surface of the terminal plate **160**. The protrusion **163** is formed on the surface of the terminal plate **160**. The surface is opposite to a surface of the terminal plate **160** which contacts the insulating plate **170**.

The protrusion **163** may be formed on the neighboring portion of the terminal through hole **161** of the terminal plate **160**. The end portion **182b'** of the electrode pin **182**, which extends during spin coating due to the malleability of the metallic materials and which contacts the neighboring portion of the terminal through hole **161** of the terminal plate **160**, may interlock with the protrusion **163** (**S860**).

After the cap assembly **190** is formed, the opening OP of the can **110** may be sealed using the cap assembly **190** (**S870**). A part on which the cap assembly **190** and the can **110** contact may be sealed, for example, by laser welding to form an internal airtight coupling.

Due to the protrusion **163** formed on the terminal plate **160** of the secondary battery **110**, adhesion between the lower portion **182b** of the electrode pin **182** and the terminal plate **160** may be improved. As a result, a contact resistance problem on the surface on which the lower portion **182b** of the electrode pin **182** and the terminal plate **160** are formed may be solved, thereby improving reliability of the secondary battery.

Example embodiments have been disclosed herein, and although specific terms are employed, they are used and are to be interpreted in a generic and descriptive sense only and not for purpose of limitation. In some instances, as would be apparent to one of skill in the art as of the filing of the present application, features, characteristics, and/or elements described in connection with a particular embodiment may be used singly or in combination with features, characteristics, and/or elements described in connection with other embodiments unless otherwise indicated. Accordingly, it will be understood by those of skill in the art that various changes in form and details may be made without departing from the spirit and scope of the present invention as set forth in the following claims.

What is claimed is:

1. A secondary battery, comprising:
  - an electrode assembly including a separator between a first electrode plate and a second electrode plate;

a can housing the electrode assembly and including an opening;

a cap plate to seal the opening of the can and including a first terminal through hole;

an insulating plate on a lower surface of the cap plate and including a second terminal through hole;

a terminal plate on a lower surface of the insulating plate and including a third terminal through hole and a protrusion adjacent the third terminal through hole, the protrusion having a base at a surface the terminal plate and a distal surface spaced apart from the surface of the terminal plate, the distal surface having a continuous circular shape that surrounds the third terminal through hole, and

an electrode pin on an upper surface of the cap plate and inserted into the first, second, and third terminal through holes, and having a metallic material which has malleability, wherein:

the third terminal through hole has a continuous circular shape that surrounds the electrode pin,

the electrode pin includes an upper portion on the upper surface of the cap plate, an end portion, and a connecting portion that connects the upper portion and the end portion,

the connecting portion of the electrode pin has a cylindrical shape that is fully filled inside,

the end portion of the electrode pin directly contacts the surface of the terminal plate and the protrusion, and is formed from an end of the fully-filled connecting portion by a spinning method using the malleability of the metallic material such that the end portion continuously contacts the continuous circular shape of the distal surface of the protrusion,

the cap plate includes a first anchor and a second anchor protruding from the lower surface of the cap plate to fix a position of the insulating plate, the second anchor being larger than the first anchor and being positioned closer to the electrode pin than the first anchor,

the insulating plate includes a first recess at one end and a second recess at another end which receive the first anchor and the second anchor, respectively, and

the insulating plate includes an accommodation groove which has a size corresponding to a size of the terminal plate, and is formed in a lower surface of the insulating plate in order to accommodate the terminal plate.

2. The secondary battery as claimed in claim 1, wherein: the terminal plate includes a first surface which includes the protrusion and a second surface which contacts the insulating plate, and

the first surface is opposite to the second surface.

3. The secondary battery as claimed in claim 1, wherein the end portion of the electrode pin interlocks with the protrusion of the terminal plate.

4. A method for manufacturing a secondary battery, the method comprising:

inserting an electrode assembly into a can;

forming a cap assembly; and

sealing the can with the cap assembly,

wherein forming the cap assembly includes:

(a) arranging a cap plate, an insulating plate on a lower surface of the cap plate, and a terminal plate on a lower surface of the insulating plate in a stack, the cap plate, the insulating plate, and the terminal plate each having a terminal through hole to receive an electrode pin, wherein the cap plate includes a first anchor and a second anchor protruding from the lower surface of the cap plate to fix a position of the insulating plate, the

second anchor being larger than the first anchor and being positioned closer to the electrode pin than the first anchor, wherein:

a protrusion is located on a surface of the terminal plate, the protrusion having a base at the surface the terminal plate and a distal surface spaced apart from the surface of the terminal plate, the distal surface having a continuous circular shape that surrounds the terminal through hole in the terminal plate, and the terminal through hole in the terminal plate has a continuous circular shape that surrounds the electrode pin,

(b) inserting the electrode pin into the terminal through holes in the cap plate, the insulating plate, and the terminal plate, wherein:

the electrode pin include a metallic material, the electrode pin includes an upper portion on an upper surface of the cap plate, an end portion, and a connecting portion that connects the upper portion and the end portion,

the connecting portion of the electrode pin has a cylindrical shape that is fully filled inside; and

(c) interlocking the end portion of the electrode pin with the protrusion of the terminal plate by a spinning method based on malleability of the metallic material, the end portion being formed from an end of the fully-filled connecting portion, and being formed such that the end portion continuously contacts the continuous circular shape of the distal surface of the protrusion,

wherein the insulating plate includes an accommodation groove which has a size corresponding to a size of the terminal plate, and is formed in a lower surface of the insulating plate in order to accommodate the terminal plate.

5. A secondary battery, comprising:

a can housing an electrode assembly; and

a cap assembly coupled to the can and including:

a cap plate including a first hole;

an insulating plate on the cap plate and including a second hole;

a terminal plate on the insulating plate and including a third hole and a protrusion adjacent the third hole, wherein the protrusion has a first shape, and the pro-

trusion has a base at a surface the terminal plate and a distal surface spaced apart from the surface of the terminal plate, the distal surface having a continuous circular shape that surrounds the third hole; and

an electrode pin inserted into the first, second, and third holes, the electrode pin having a metallic material which has malleability, wherein:

the third hole has a continuous circular shape that surrounds the electrode pin,

the electrode pin includes an upper portion on an upper surface of the cap plate, an end portion, and a connecting portion that connects the upper portion and the end portion,

the connecting portion of the electrode pin has a cylindrical shape that is fully filled inside,

the end portion of the electrode pin directly and continuously contacts the surface of the terminal plate and the continuous circular shape of the distal surface of the protrusion, and is formed from an end of the fully-filled connecting portion to have a second shape coupled to the first shape of the protrusion by a spinning method using the malleability of the metallic material,

the cap plate includes a first anchor and a second anchor protruding from a lower surface of the cap plate to fix a position of the insulating plate, the second anchor being larger than the first anchor and being positioned closer to the electrode pin than the first anchor,

the insulating plate includes a first recess at one end and a second recess at another end which receive the first anchor and the second anchor, respectively, and

the insulating plate includes an accommodation groove which has a size corresponding to a size of the terminal plate, and is formed in a lower surface of the insulating plate in order to accommodate the terminal plate.

6. The secondary battery as claimed in claim 5, wherein the first shape is complementary to the second shape.

7. The secondary battery as claimed in claim 6, wherein the first, second, and third holes have first diameters to accommodate the electrode pin, which has a second diameter less than each of the first diameters.

8. The secondary battery as claimed in claim 5, further comprising:

a gasket in at least one of the first, second, or third holes.

\* \* \* \* \*