

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 July 2009 (30.07.2009)

PCT

(10) International Publication Number
WO 2009/092691 A1

(51) International Patent Classification:
C08L 23/10 (2006.01) *C08K 5/00* (2006.01)
C08K 3/00 (2006.01)

(74) Agent: LUX, Berthold; Elisenhof, Elisenstrasse 3, 80335 Munich (DE).

(21) International Application Number:
PCT/EP2009/050555

(22) International Filing Date: 19 January 2009 (19.01.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
08150670.1 25 January 2008 (25.01.2008) EP
08161364.8 29 July 2008 (29.07.2008) EP

(71) Applicant (for all designated States except US): Borealis AG [AT/AT]; IZD Tower, Wagramerstrasse 17-19, A-1220 Vienna (AT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): LEDERER, Klaus [AT/AT]; Roemerstrasse 18, A-4020 Linz (AT). KASTNER, Erwin [AT/AT]; Weilgunystrasse 14, A-4040 Linz (AT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

(54) Title: LOW-STICKY ADDITIVE PACKAGE FOR AUTOMOTIVE INTERIOR APPLICATIONS

(57) Abstract: Composition comprising polypropylene and (a) at least one phenolic antioxidant (A) (b) at least one hindered amine light stabilizer (B) (c) at least one slip agent (C) being a fatty acid amide, (d) a bisphenol A epoxy resin with an average molecular weight (Mw) below 2000 g/mol (D), and (e) talc (E).



Low-sticky additive package for automotive interior applications

The present invention relates to a new (extruded) polypropylene composition suitable for automotive interior as well as to its use.

5

Polypropylene is the material of choice for articles in the automotive interior as it is - general speaking - resistant against many environmental influences. However such material used in automotive interior must fulfil in particular UV-stability, long term heat resistance as well as scratch resistance which cannot be achieved by the pure
10 polymer material itself, like polypropylene. To satisfy such requirements the polymer used must therefore be blended with different additives. Over the last years the standard requirements for UV-stability, long term heat resistance and scratch resistance have been steadily tightened. As a consequence thereof the amounts of additives have been increased to satisfy the ambitious desires of the automotive industry. However with
15 increase of additives to improve for instance the scratch resistance or the long term heat resistance other important properties are negatively influenced. For instance with the incorporation of the above mentioned additives the material shows undesired stickiness, especially after storage at elevated temperatures and/or after UV-exposure.

20

Accordingly the object of the present invention is to provide an (extruded) composition which does not show any stickiness problems, in particular when stored for 90 hours and 500 hours respectively, at elevated temperatures, like 90 °C, and/or under UV-exposure. Of course the other desired properties for materials used in the
25 automotive interior, like UV-stability, long term heat resistance as well as scratch resistance must be kept on a high level.

The finding of the present invention is to provide an (extruded) polypropylene composition in which a certain amount of phenolic antioxidants and UV-stabilizers
30 are replaced by a bisphenol A epoxy resin.

- 2 -

Thus the present invention is directed to a composition, preferably an extruded composition, comprising polypropylene and

- (a) at least one phenolic antioxidant (A)
- (b) at least one hindered amine light stabilizer (B)
- 5 (c) at least one slip agent (C) being a fatty acid amide,
- (d) a bisphenol A epoxy resin with an average molecular weight (M_w) below 2000 g/mol (D),
- (e) talc (E), and
- (f) optionally at least one phosphorous antioxidant (F)

10

The term “extruded composition” or the term “extruded polypropylene composition” throughout the present application shall indicate that the composition is not a dry blend of polypropylene and its additives but that the polypropylene and the additives after dry blending are extruded by an extruder and optionally pelletized.

15

Preferably the composition, more preferably the extruded composition, as defined in the instant invention does not comprise, i.e. is free of, polyorganosiloxane.

Additionally it is appreciated that the composition, preferably the extruded composition, according to the instant invention does not comprise, i.e. is free of,

20 distearylthiodipropionate and/or zinc stearate.

Alternatively and preferably the invention is directed to a composition, preferably an extruded composition, comprising polypropylene, talc (E), preferably 50000 to 400000 ppm talc (E), and

- 25 (a) 400 to 2400 ppm of phenolic antioxidant(s) (A)
- (b) 1000 to 2500 ppm of hindered amine light stabilizer(s) (B)
- (c) 1000 to 2000 ppm of slip agent(s) (C) being a fatty acid amide(s),

- 3 -

- (d) 2000 to 3000 ppm of a bisphenol A epoxy resin with an average molecular weight (M_w) below 2000 g/mol (D), and
- (e) optionally 500 to 1500 ppm of phosphorous antioxidant(s) (F) based on said (extruded) composition,
- 5 wherein optionally said (extruded) composition does not comprise, i.e. is free of, at least one member of the group consisting of polyorganosiloxane distearylthiodipropionate and zinc stearate.

It is in particular appreciated that the composition, preferably the extruded
10 composition, as defined in the previous paragraph does not comprise, i.e. is free of, polyorganosiloxane. Yet more preferably the composition, preferably the extruded composition, as defined in the previous paragraph does not comprise, i.e. is free of, polyorganosiloxane, distearylthiodipropionate and zinc stearate. It is especially appreciated that the composition, preferably the extruded composition, as defined
15 herein consists of the polypropylene and the additives (A) to (F) as defined in the instant invention.

As usual 1 ppm of additive corresponds to 1 mg additive in 1 kg (extruded) composition.

20

Surprisingly it has been found out that the above defined (extruded) compositions do not show any stickiness problems even when stored for 90 to 500 hours at elevated temperatures (90 °C) and/or under UV-exposure (see table 4). Contrarily, additive packages known in the art based on polypropylene and comprising the standard
25 mixtures of UV-stabilisers, antioxidants and slip agents clearly show the detrimental stickiness behaviour in particular when stored for 90 to 500 hours at elevated temperatures (90 °C) and/or under UV-exposure. Additionally the inventive (extruded) composition shows excellent UV-stability, long term heat resistance as

- 4 -

well as excellent scratch resistance. Thus the improvement of the stickiness behaviour is not paid with loss of the other important properties required by the automotive industry.

5 In the following both alternatives as defined above are described in more detail.


The first requirement is that the polypropylene composition, preferably the extruded polypropylene composition, must comprise at least one phenolic antioxidant (A).

However it is preferred that the inventive polypropylene composition, preferably the
10 inventive extruded polypropylene composition, comprises only one phenolic antioxidant (A).

The term “phenolic antioxidant” as used in the instant invention stands for any compound capable of slowing or preventing the oxidation of the polymer component,
15 i.e. the polypropylene. Additionally such a phenolic antioxidant must of course comprise a phenolic residue.

Better results can be achieved in case the phenolic antioxidant(s) (A) is(are) sterically hindered. “Sterically hindered” according to this invention means that the
20 hydroxyl group (HO-) of the phenolic residue is surrounded by sterical alkyl residues.

Accordingly the phenolic antioxidant(s) (A) comprise(s) preferably the residue of formula (I)



- 5 -

wherein

R₁ is (CH₃)₃C-, CH₃- or H, preferably (CH₃)₃C-, and

A₁ constitutes the remaining part of the phenolic antioxidant (A).

- 5 Preferably A₁ is in para-position to the hydroxyl-group.

Additionally the phenolic antioxidant shall preferably exceed a specific molecular weight. Accordingly the phenolic antioxidant(s) (A) has(have) preferably a molecular weight (M_w) of more than 785 g/mol, more preferably more than 1100
10 g/mol. On the other hand the molecular weight should be not too high, i.e. not higher than 1300 g/mol. A preferred range is from 785 to 1300 g/mol, more preferably from 1000 to 1300 g/mol, yet more preferably from 1100 to 1300 g/mol.

Further the phenolic antioxidant(s) (A) can be additionally defined by the amount of
15 phenolic residues, in particular by the amount of phenolic residues of formula (I). Accordingly the phenolic antioxidant(s) (A) may comprise(s) 1, 2, 4 or more phenolic residue(s), preferably 1, 2, 4 or more phenolic residue(s) of formula (I).

Moreover the antioxidant(s) (A) comprise mainly only carbon atoms, hydrogen
20 atoms and minor amounts of O-atoms, mainly caused due to the hydroxyl group (HO-) of the phenolic residue. However the antioxidant(s) (A) may comprise additionally minor amounts of N, S and P atoms. Preferably the antioxidant(s) (A) is(are) constituted by C, H, O, N and S atoms only, more preferably the antioxidant(s) (A) is(are) constituted by C, H and O only.


25

As stated above the phenolic antioxidant(s) (A) shall have a rather high molecular weight. A high molecular weight is an indicator for several phenolic residues. Thus it

- 6 -

is in particular appreciated that the phenolic antioxidant(s) (A) has(have) 4 or more, especially 4, phenolic residue(s), like the phenolic residue of formula (I).

As especially suitable phenolic antioxidant(s) (A) have been recognized compounds
 5 comprising at least one residue of formula (II)

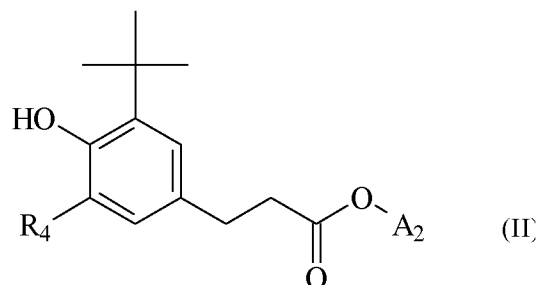

wherein

R₄ is (CH₃)₃C-, CH₃-, or H, preferably (CH₃)₃C-, and

A₂ constitutes the remaining part of the phenolic antioxidant (A).

10

It has been found out that the stickiness problems are mainly caused by the phenolic antioxidants as well as to some extent by the amine hindered UV-stabilizers, in particular low molecular weight amine hindered UV-stabilizers. This finding is somewhat surprising as there exists a prejudice in the literature that the slip agents (C)

15


are the main causer for the stickiness problems. Slip agents normally migrate continuously from the interior of the polymer material to its surface and guarantee thereby a permanent scratch resistance. Accordingly the slip agents have been regarded as the main causer of the stickiness problems. Now it has been discovered that also the special phenolic antioxidants and to some extent also specific UV-

20

stabilizers influence significantly the stickiness behaviour of the polymer material.

- 7 -

Accordingly to avoid any stickiness problems, in particular at elevated temperatures and/or UV-exposure, it is preferred that the phenolic antioxidant(s) (A) does(do) not comprise the moiety of formula (III)




5 wherein

R₂ is selected from the group consisting of -CH₂-R₃₁, -CH₂-CH₂-R₃₂, -CH₂-CH₂-CH₂-R₃₃ and -CH₂-CH₂-CH₂-CH₂-R₃₄, preferably R₂ is -CH₂-R₃₁, and

R₃₁, R₃₂, R₃₃ and R₃₄ can be independently any organic residue with the proviso that at least one of the R₃₁, R₃₂, R₃₃ and R₃₄ is a phenolic residue, preferably a phenolic

10 residue of formula (I).


As stated above some phenolic antioxidants (A) should be avoided as they contribute to the stickiness phenomena at elevated temperatures. Thus the inventive polypropylene composition, preferably the inventive extruded polypropylene composition, is preferably free of phenolic antioxidants (A) which comprise the moiety of formula (IV)



wherein R is any residue which may comprise a phenolic moiety.

20 Especially the phenolic antioxidant (A) of formula (V)

- 8 -

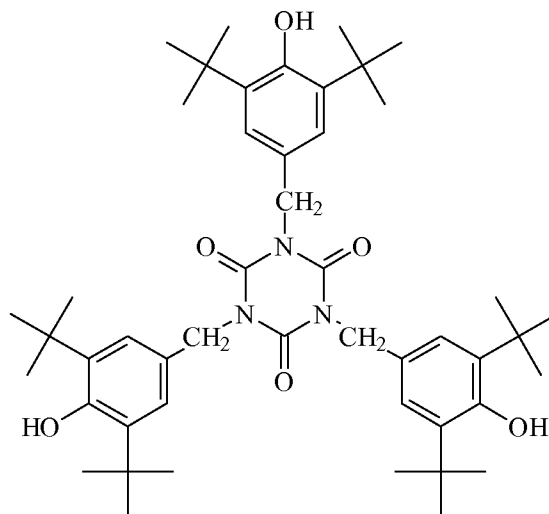

shall be not part of the inventive (extruded) polypropylene composition.

- Considering the above requirements the phenolic antioxidant(s) (A) is(are) selected
- 5 from the group consisting of
- 2,6-di-tert-butyl-4-methylphenol (CAS no. 128-37-0; 220 g/mol),
- pentaerythrityl-tetrakis (3-(3,5-di-tert-butyl-4-hydroxyphenyl) propionate (CAS no. 6683-19-8; 1178 g/mol),
- octadecyl 3-(3',5'-di-tert-butyl-4-hydroxyphenyl)propionate (CAS no. 2082-79-3;
- 10 531 g/mol)
- 1,3, 5-trimethyl-2,4,6-tris-(3,5-di-tert-butyl-4-hydroxybenzyl) benzene (CAS no. 1709-70-2; 775 g/mol),
- 2,2'-thiodiethylenebis (3,5-di-tert.-butyl-4-hydroxyphenyl) propionate (CAS no. 41484-35-9; 643 g/mol),
- 15 calcium bis(ethyl 3,5-di-tert-butyl-4-hydroxybenzylphosphonate) (CAS no. 65140-91-2; 695 g/mol),
- bis(3,3-bis(3'-tert-butyl-4'-hydroxyphenyl)butanic acid) glycolester (CAS no. 32509-66-3; 794 g/mol),
- 4,4'-thiobis(2-tert-butyl-5-methylphenol) (CAS no. 96-69-5; 358 g/mol),

- 2,2'-methylene-bis-(6-(1-methyl-cyclohexyl)-para-cresol) (CAS no. 77-62-3; 637 g/mol),
- 3,3'-bis(3,5-di-tert-butyl-4-hydroxyphenyl)-N,N'-hexamethylenedipropionamide (CAS no. 23128-74-7; 637 g/mol),
- 5 2,5,7,8-tetramethyl-2-(4',8',12'-trimethyltridecyl)-chroman-6-ol (CAS no. 10191-41-0; 431 g/mol),
- 2,2-ethylidenebis (4,6-di-tert-butylphenol) (CAS no. 35958-30-6; 439 g/mol),
- 1,1,3-tris(2-methyl-4-hydroxy-5'-tert-butylphenyl) butane (CAS no. 1843-03-4; 545 g/mol),
- 10 3,9-bis(1,1-dimethyl-2-(beta-(3-tert-butyl-4-hydroxy-5-methylphenyl)propionyloxy)ethyl)-2,4,8,10-tetraoxaspiro[5.5]undecane (CAS no. 90498-90-1; 741 g/mol),
- 1,6-hexanediyl-bis(3,5-bis(1,1 dimethylethyl)-4-hydroxybenzene)propanoate) (CAS no. 35074-77-2; 639 g/mol),
- 15 2,6-di-tert-butyl-4-nonylphenol (CAS no. 4306-88-1; 280 g/mol),
- 4,4'-butylidenebis(6-tert-butyl-3-methylphenol (CAS no. 85-60-9; 383 g/mol);
- 2,2'-methylene bis(6-tert-butyl-4-methylphenol) (CAS no. 119-47-1; 341 g/mol),
- triethylenglycol-bis-(3-tert-butyl-4-hydroxy-5-methylphenyl) propionate (CAS no. 36443-68-2; 587 g/mol),
- 20 a mixture of C13 to C15 linear and branched alkyl esters of 3-(3',5'-di-t-butyl-4'-hydroxyphenyl) propionic acid (CAS no. 171090-93-0; 485 g/mol),
- 6,6'-di-tert-butyl-2,2'-thiodip-cresol (CAS no. 90-66-4; 359 g/mol),
- diethyl-(3,5-di-tert-butyl-4-hydroxybenzyl) phosphate (CAS no. 976-56-7; 356 g/mol),
- 25 4,6-bis (octylthiomethyl)-o-cresol (CAS no. 110553-27-0; 425 g/mol),
- benzenepropanoic acid, 3,5-bis(1,1-dimehtyl-ethyl)-4-hydroxy-, C7-C9-branched and linear alkyl esters (CAS no. 125643-61-0; 399 g/mol),

- 10 -


1,1,3-tris[2-methyl-4-[3-(3,5-di-tert-butyl-4-hydroxyphenyl)propionyloxy]-5-tert-butylphenyl]butane (CAS no. 180002-86-2; M_w 1326 g/mol),
 mixed styrenated phenols (M_w ca 320 g/mol; CAS no. 61788-44-1; ca. 320 g/mol),
 butylated, octylated phenols (M_w ca 340 g/mol; CAS no. 68610-06-0; ca 340 g/mol),
 5 and
 butylated reaction product of p-cresol and dicyclopentadiene (CAS no. 68610-51-5; M_w 700 to 800 g/mol).

More preferably the phenolic antioxidant(s) (A) is(are) selected from the group
 10 consisting of
 pentaerythrityl-tetrakis (3-(3,5-di-tert-butyl-4-hydroxyphenyl) propionate (CAS no. 6683-19-8; 1178 g/mol),
 octadecyl 3-(3',5'-di-tert-butyl-4-hydroxyphenyl)propionate (CAS no. 2082-79-3; 531 g/mol)
 15 bis(3,3-bis(3'-tert-butyl-4'-hydroxyphenyl)butanic acid) glycolester (CAS no. 32509-66-3; 794 g/mol),
 3,3'-bis(3,5-di-tert-butyl-4-hydroxyphenyl)-N,N'-hexamethylenedipropionamide (CAS no. 23128-74-7; 637 g/mol),
 3,9-bis(1,1-dimethyl-2-(beta-(3-tert-butyl-4-hydroxy-5-
 20 methylphenyl)propionyloxy)ethyl)-2,4,8,10-tetraoxaspiro[5.5]undecane (CAS no. 90498-90-1; 741 g/mol),
 1,6-hexanediyl-bis(3,5-bis(1,1 dimethylethyl)-4-hydroxybenzene)propanoate) (CAS no. 35074-77-2; 639 g/mol),
 triethylenglycol-bis-(3-tert-butyl-4-hydroxy-5-methylphenyl) propionate (CAS no.
 25 36443-68-2; 587 g/mol),
 a mixture of C13 to C15 linear and branched alkyl esters of 3-(3',5'-di-t-butyl-4'-hydroxyphenyl) propionic acid (CAS no. 171090-93-0; 485 g/mol), and

- 11 -

benzenepropanoic acid, 3,5-bis(1,1-dimethyl-ethyl)-4-hydroxy-, C7-C9-branched and linear alkyl esters (CAS no. 125643-61-0; 399 g/mol),

The most preferred phenolic antioxidant (A) is pentaerythrityl-tetrakis (3-(3,5-di-tert-butyl-4-hydroxyphenyl) propionate (CAS no. 6683-19-8; 1178 g/mol) having the formula (VI)

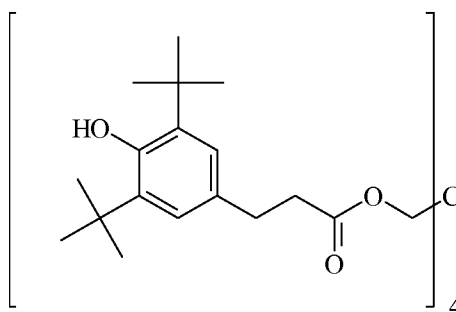

The present polypropylene composition, preferably the present extruded polypropylene composition, can additionally to the phenolic antioxidants (A) comprise one or more phosphorous antioxidant (F). More preferably the polypropylene composition, yet more preferably the extruded polypropylene composition, comprises only one type of phosphorous antioxidant (F). Preferred phosphorous antioxidants (F) are selected from the group consisting of

tris-(2,4-di-tert-butylphenyl) phosphite (CAS no. 31570-04-4; 647 g/mol),

tetrakis-(2,4-di-tert-butylphenyl)-4,4'-biphenylen-di-phosphonite (CAS no. 38613-77-3; 991 g/mol),

bis-(2,4-di-tert-butylphenyl)-pentaerythrityl-di-phosphite (CAS no. 26741-53-7; 604 g/mol),

di-stearyl- pentaerythrityl-di-phosphite (CAS no. 3806-34-6; M_w 733 g/mol),

tris-nonylphenyl phosphite (CAS no. 26523-78-4; 689 g/mol),

bis(2,6-di-tert-butyl-4-methylphenyl)pentaerythrityl-di-phosphite (CAS no. 80693-00-1; 633 g/mol),

- 12 -

- 2,2'-methylenebis (4,6-di-tert-butylphenyl) octyl-phosphite (CAS no. 126050-54-2; 583 g/mol),
- 1,1,3-tris (2-methyl-4-ditridecyl phosphite-5-tert-butylphenyl) butane (CAS no. 68958-97-4; 1831 g/mol),
- 5 4,4'-butylidenebis (3-methyl-6-tert-butylphenyl-di-tridecyl) phosphite (CAS no. 13003-12-8; 1240 g/mol),
- bis-(2,4-dicumylphenyl)pentaerythritol diposphite (CAS no. 154862-43-8; 852 g/mol),
- bis(2-methyl-4,6-bis(1,1-dimethylethyl) phenyl) phosphorous acid ethylester (CAS
- 10 no. 145650-60-8; 514 g/mol),
- 2,2',2''-nitrido triethyl-tris(3,3',5,5'-tetra-tert-butyl-1,1'-biphenyl-2,2'-diyl)phosphite) (CAS no. 80410-33-9; 1465 g/mol)
- 2,4,6-tris(tert-butyl)phenyl-2-butyl-2-ethyl-1,3-propandiolphosphit (CAS no. 161717-32-4, 450 g/mol),
- 15 2,2'-ethyliden-bis(4,6-di-tert-butylphenyl)fluorophosphonit (CAS no. 118337-09-0; 487 g/mol),
- 6-(3-(3-tert-butyl-4-hydroxy-5-methylphenyl)propoxy)-2,4,8,10-tetra-tert-butyl dibenz[d,f][1.3.2]dioxaphosphepin (CAS no. 203255-81-6; 660 g/mol),
- tetrakis-(2,4-di-tert-butyl-5-methylphenyl)-4,4'-biphenylen-di-phosphite (CAS no.
- 20 147192-62-9; 1092 g/mol), and
- 1,3-bis-(diphenylphosphino)-2,2-dimethylpropane (CAS no. 80326-98-3; 440.5 g/mol).


Especially suitable are organic phosphites, in particular those as defined in the above

25 list, as phosphorous antioxidants (F).

The most preferred phosphorous antioxidant (F) is tris-(2,4-di-tert-butylphenyl) phosphite (CAS no. 31570-04-4; 647 g/mol).

- 13 -

As a further requirement the inventive polypropylene composition, preferably the inventive extruded polypropylene composition, must comprise at least one hindered amine light stabilizer (B). Hindered amine light stabilizers (HALS) are known in the art. Preferably such hindered amine light stabilizers are 2,6-alkyl-piperidine derivatives in particular 2,2,6,6-tetramethyl-piperidine derivatives. Especially suitable are hindered amine light stabilizers (B) of the formula (VII)



wherein U constitutes the remaining part of the hindered amine light stabilizer (B).

10

The hindered amine light stabilizers (B) do not absorb UV radiation, but act to inhibit degradation of the polypropylene. They slow down the photochemically initiated degradation reactions, to some extent in a similar way to antioxidants.

15 The hindered amine light stabilizers (B) show a high efficiency and longevity due to a cyclic process wherein the hindered amine light stabilizers (B) are regenerated rather than consumed during the stabilization process. Accordingly, one advantage of the hindered amine light stabilizers (B) is that significant levels of stabilization are achieved at relatively low concentrations.

20

Accordingly the hindered amine light stabilizer(s) (B) is(are) preferably selected from the group consisting of
bis-(2,2,6,6-tetramethyl-4-piperidyl) sebacate (CAS no. 52829-07-9; 481 g/mol),
bis-(1,2,2,6,6-pentamethyl-4-piperidyl) sebacate (CAS no. 41556-26-7; 509 g/mol),

- tetrakis (2,2,6,6-tetramethyl-4-piperidyl)-1,2,3,4-butane tetracarboxylate (CAS no. 64022-61-3; 792 g/mol),
- tetrakis (1,2,2,6,6-pentamethyl-4-piperidyl)-1,2,3,4-butane tetracarboxylate (CAS no. 91788-83-9; 847 g/mol),
- 5 1,2,3-tris (1,2,2,6,6-pentamethyl-4-piperidyl)-4-tridecyl butane-1,2,3,4-tetracarboxylate (CAS no. 84696-72-0; ca. 900 g/mol),
- 1,2,3-tris (2,2,6,6-tetramethyl-4-piperidyl)-4-tridecyl butane-1,2,3,4-tetracarboxylate (CAS no. 84696-71-9; ca. 900 g/mol),
- 2,2,4,4-tetramethyl-7-oxa-3,20-diaza-dispiro(5.1.11.2)-heneicosane-21-on (CAS no. 64338-16-5; 364 g/mol),
- 10 di-(1,2,2,6,6-pentamethylpiperidin-4-yl) p-methoxybenzylidenemalonate (CAS no. 147783-69-5; 528 g/mol),
- N,N'-bisformyl-N,N'-bis-(2,2,6,6-tetramethyl-4-piperidiny)-hexamethyldiamine (CAS no. 124172-53-8; 450 g/mol),
- 15 dimethyl succinate polymer with 4-hydroxy-2,2,6,6-tetramethyl-1-piperidin ethanol (CAS no. 65447-77-0; $M_w > 2500$ g/mol),
- poly((6-((1,1,3,3-tetramethylbutyl)amino)-1,3,5-triazin-2,4-diyl)-(2,2,6,6-tetramethyl-4-piperidyl)imino)-hexamethylen-((2,2,6,6-tetramethyl-4-piperidyl)imino)) (CAS no. 71878-19-8; $M_w > 2500$ g/mol),
- 20 1,3,5-triazine-2,4,6-triamine, N_5N''' -1,2-ethanediylbis[N-[3-[[4,6-bis[butyl(1,2,2,6,6-pentamethyl-4-piperidiny)amino]-1,3,5-triazin-2-yl]amino]propyl]-N',N''-dibutyl-N',N''-bis(1,2,2,6,6-pentamethyl-4-piperidiny)- (CAS no. 106990-43-6; 2286 g/mol),
- bis-(1-octyloxy-2,2,6,6-tetramethyl-4-piperidiny) sebacate (CAS no. 129757-67-1; M_w 737 g/mol),
- 25 1,6-hexanediamine, N,N'-bis(2,2,6,6-tetramethyl-4-piperidiny)-polymer with 2,4,6-trichloro-1,3,5-triazine, reaction products with N-butyl-1-butanamine and N-butyl-2,2,6,6-tetramethyl-4-piperidinamine (CAS no. 192268-64-7; M_w 2600 - 3400 g/mol),

- bis(1,2,2,6,6-pentamethyl-4-piperidiny)-(3,5-bis(1,1-dimethylethyl)-4-hydroxyphenylmethyl) propandioate (CAS no. 63843-89-0; 685 g/mol),
 2,9,11,13,15,22,24,26,27,28,-decaazatricyclo(21.3.1.110.14)octacosa-
 1(27),10,12,14(28),23,25-hexaene-12,25-diamine, N,N'-bis(1,1,3,3-
 5 tetramethylbutyl)-2,9,15,22-tetrakis(2,2,6,6-tetramethyl-4-piperidiny) (CAS no. 86168-95-8; > 320 g/mol),
 poly((6-morpholino-s-triazine-2,4-diyl)(2,2,6,6-tetramethyl-4-piperidyl)imino)hexamethylene(2,2,6,6-tetramethyl-4-piperidyl)imino)) (CAS no 82451-48-7, M_w 1600 g/mol),
 10 poly((6-morpholino-s-triazine-2,4-diyl)(2,2,6,6-tetramethyl-4-piperidyl)imino)hexamethylene(1,2,2,6,6-pentamethyl-4-piperidyl)imino)) (CAS no 193098-40-7; M_w ca. 1700 g/mol),
 polymer of 2,2,4,4-tetramethyl-7-oxa-3,20-diaza-20-(2,3-epoxy-propyl)-dispiro-(5.1.11.2)-heneicosane-21-one and epichlorohydrin (CAS no. 292483-55-4; M_w ca.
 15 1500 g/mol),
 1,3-propanediamine, N,N''-1,2-ethanediylbis-, polymer with 2,4,6-trichloro-1,3,5-triazine, reaction products with N-butyl-2,2,6,6-tetramethyl-4-piperidinamine (CAS no. 136504-96-6; M_w ca. 3000 g/mol),
 1,2,3,4-butanetetracarboxylic acid, polymer with beta, beta, beta', beta'-tetramethyl-
 20 2,4,8,10-tetraoxospiro(5.5) undecane-3,9-diethanol, 1,2,2,6,6-pentamethyl-4-piperidiny ester (CAS no. 101357-36-2; M_w ca. 2000 g/mol)
 2,4,8,10-tetraoxospiro(5.5) undecane-3,9-diethanol, beta, beta, beta', beta'-tetramethyl-, polymer with 1,2,3,4-butanetetracarboxylic acid, 2,2,6,6-tetramethyl-4-piperidiny ester (CAS no. 101357-37-3, M_w ca. 1900 g/mol)
 25 polymethylpropyl-3-oxy-4(2,2,6,6-tetramethyl)piperidiny)siloxane (CAS no 182635-99-0)
 N(2,2,6,6-tetramethyl-4-piperidyl)-maleinimid, C_{20} : C_{24} -olefin-copolymer (CAS no. 152261-33-1; M_w ca. 3500 g/mol), and

- 16 -

4-(3-(3,5-di-*t*-butyl-4-hydroxyphenyl)propionyloxy)-1-(2-(3-(3,5-di-*t*-butyl-4-hydroxy)propionyloxy)ethyl)-2,2,6,6-tetramethylpiperidine (CAS no. 73754-27-5; 772 g/mol).


- 5 Especially preferred the hindered amine light stabilizer(s) (B) is(are) selected from the group consisting of
 - bis-(2,2,6,6-tetramethyl-4-piperidyl) sebacate (CAS no. 52829-07-9; 481 g/mol),
 - bis-(1,2,2,6,6-pentamethyl-4-piperidyl) sebacate (CAS no. 41556-26-7; 509 g/mol),
 - tetrakis (2,2,6,6-tetramethyl-4-piperidyl)-1,2,3,4-butane tetracarboxylate (CAS no.
 - 10 64022-61-3; 792 g/mol),
 - tetrakis (1,2,2,6,6-pentamethyl-4-piperidyl)-1,2,3,4-butane tetracarboxylate (CAS no. 91788-83-9; 847 g/mol),
 - 1,2,3-tris (1,2,2,6,6-pentamethyl-4-piperidyl)-4-tridecyl butane-1,2,3,4-tetracarboxylate (CAS no. 84696-72-0; ca. 900 g/mol),
 - 15 1,2,3-tris (2,2,6,6-tetramethyl-4-piperidyl)-4-tridecyl butane-1,2,3,4-tetracarboxylate (CAS no. 84696-71-9; ca. 900 g/mol),
 - N,N'*-bisformyl-*N,N'*-bis-(2,2,6,6-tetramethyl-4-piperidiny)-hexamethyldiamine (CAS no. 124172-53-8; 450 g/mol),
 - 1,3,5-triazine-2,4,6-triamine, N_5N''' -1,2-ethanediylbis[*N*-[3-[[4,6-bis[butyl(1,2,2,6,6-pentamethyl-4-piperidiny)amino]-1,3,5-triazin-2-yl]amino]propyl]-*N',N''*-dibutyl-
 - 20 *N',N''*-bis(1,2,2,6,6-pentamethyl-4-piperidiny)- (CAS no. 106990-43-6; 2286 g/mol),
 - and
 - bis-(1-octyloxy-2,2,6,6-tetramethyl-4-piperidiny) sebacate (CAS no. 129757-67-1; 737 g/mol).

25


The most preferred hindered amine light stabilizer(s) (B) is(are) 1,3,5-triazine-2,4,6-triamine, N_5N''' -1,2-ethanediylbis[*N*-[3-[[4,6-bis[butyl(1,2,2,6,6-pentamethyl-4-piperidiny)amino]-1,3,5-triazin-2-yl]amino]propyl]-*N',N''*-dibutyl-*N',N''*-

- 17 -

bis(1,2,2,6,6-pentamethyl-4-piperidiny)- (CAS no. 106990-43-6; 2286 g/mol) of formula (VIII)

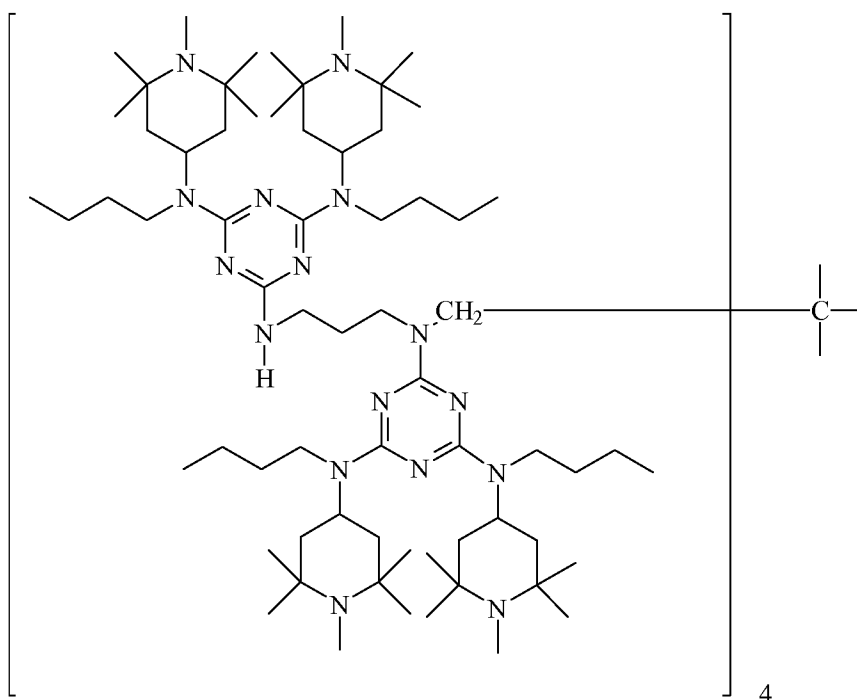

poly((6-((1,1,3,3-tetramethylbutyl)amino)-1,3,5-triazin-2,4-diyl)-(2,2,6,6-tetramethyl-4-piperidyl)imino)-hexamethylen-((2,2,6,6-tetramethyl-4-piperidyl)imino)) (CAS no. 71878-19-8; $M_w > 2500$ g/mol), and
 5 bis-(2,2,6,6-tetramethyl-4-piperidyl) sebacate (CAS no. 52829-07-9; 481 g/mol) of formula (IX)

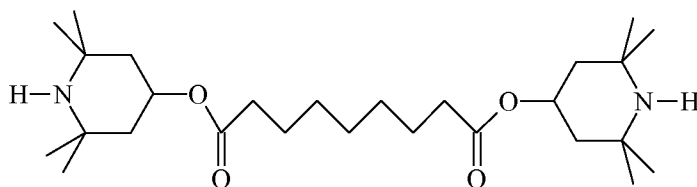

10

It has been further discovered that especially good results are achievable in case the hindered amine stabilizers (B) have a rather high molecular weight, i.e. a M_w higher than 1000 g/mol, more preferably higher than 2000 g/mol. Accordingly hindered

amine stabilizers (B) of the above mentioned list with a M_w higher than 1000 g/mol, more preferably higher than 2000 g/mol are especially preferred. Thus 1,3,5-triazine-2,4,6-triamine, N_5N''' -1,2-ethanediyldis[N-[3-[[4,6-bis[butyl(1,2,2,6,6-pentamethyl-4-piperidinyl)amino]-1,3,5-triazin-2-yl]amino]propyl]-N',N''-dibutyl-N',N''-

- 5 bis(1,2,2,6,6-pentamethyl-4-piperidinyl)- (CAS no. 106990-43-6; 2286 g/mol) of formula (VIII) and poly(((6-((1,1,3,3-tetramethylbutyl)amino)-1,3,5-triazin-2,4-diyl)-(2,2,6,6-tetramethyl-4-piperidyl)imino)-hexamethylen-((2,2,6,6-tetramethyl-4-piperidyl)imino)) (CAS no. 71878-19-8; $M_w > 2500$ g/mol) are especially suitable as hindered amine light stabilizers (B).

10

As stated above the inventive polypropylene composition, preferably the inventive extruded polypropylene composition, comprises at least one hindered amine light stabilizer (B) as defined above. Preferably however the present invention comprises one or two different hindered amine light stabilizers (B).

15

Accordingly in one embodiment, which is in particular preferred, the inventive polypropylene composition, preferably the inventive extruded polypropylene composition, comprises only one hindered amine light stabilizer (B). In such a case it is preferred that the inventive polypropylene composition, preferably the inventive

20 extruded polypropylene composition, comprises a hindered amine light stabilizer (B') with rather high molecular weight, i.e. a M_w higher than 1000 g/mol, more preferably higher than 2000 g/mol. In addition it is preferred that such hindered amine light stabilizer (B') comprises at least four residues, preferably at least 8 residues, more preferably 16 residues, of the formula (VII). One preferred example

25 of such a hindered amine light stabilizer (B') is the compound of formula (VIII).

However as stated above the inventive polypropylene composition, preferably the inventive extruded polypropylene composition, may comprises two different

hindered amine light stabilizer (B), preferably wherein at least one of the hindered amine light stabilizers (B) is a hindered amine light stabilizer (B') as defined in the previous paragraph. More preferably the inventive polypropylene composition, preferably the inventive extruded polypropylene composition, comprises at least one
5 hindered amine light stabilizer (B') as defined in the previous paragraph and at least one further hindered amine light stabilizer (B''), wherein the hindered amine light stabilizers (B'') has a lower molecular weight than the hindered amine light stabilizer (B'), i.e. a M_w below 1000 g/mol, more preferably below 700 g/mol, yet more preferably below 500 g/mol. Additionally it is appreciated that the hindered amine
10 light stabilizer (B') has a more residues of formula (VII) than the hindered amine light stabilizer (B'').

The hindered amine light stabilizer (B'') is a 2,6 alkyl piperidine derivative in particular a 2,2,6,6-tetramethyl piperidine derivative or a 1,2,2,6,6-pentamethyl
15 piperidine derivative (formula VII). However it is in particular appreciated that the hindered amine light stabilizer (B'') is a 2,2,6,6-tetramethyl piperidine derivative, like bis-(2,2,6,6-tetramethyl-4-piperidyl) sebacate (CAS no. 52829-07-9; M_w 481 g/mol) (formula (X))

20 In case in which the inventive polypropylene composition, preferably the inventive extruded polypropylene composition, comprises two hindered amine light stabilizer (B), i.e. the hindered amine light stabilizers (B') and (B''), the weight ratio of the hindered amine light stabilizer (B') to the hindered amine light stabilizer (B'')
[B'/B''] is at least 2.0 : 1.0, more preferably at least 2.5 : 1.0, yet more preferably
25 2.6 : 1.0.

In any case the amount of the hindered amine light stabilizer (B'') within the inventive extruded composition shall not exceed 500 ppm, more preferably shall not

- 20 -

exceed 300 ppm. It is in particular preferred, as stated above, that the inventive polypropylene composition, preferably the inventive extruded polypropylene composition, comprises as hindered amine light stabilizer (B) only the hindered amine light stabilizer (B').

5

As further requirement the inventive polypropylene composition, preferably the inventive extruded polypropylene composition, must comprise at least one slip agent (C) being a fatty acid amide. More preferably the inventive polypropylene composition, preferably the inventive extruded polypropylene composition, comprises only one slip agent (C). Preferred types of slip agents (C) are unsaturated fatty acid amides. The amount of carbons of the fatty acids is preferably in the range of C10 to C25 carbon atoms.

10

Accordingly the slip agent(s) (C) is(are) preferably selected from the group consisting of

15

cis-13-docosenoic amide (CAS no. 112-84-5; M_w 337.6 g/mol),

cis-9,10 octadecenoamide (CAS no. 301-02-0; M_w 281.5 g/mol)

octadecanoylamide (CAS no. 124-26-5; M_w 283.5 g/mol),

behenamide (CAS no. 3061-75-4; M_w 339.5 g/mol),

20

N,N'-ethylene-bis-stearamide (CAS no. 110-30-5; M_w 588 g/mol),

N-octadecyl-13-docosenamide (CAS no. 10094-45-8; M_w 590 g/mol), and

oleylpalmitamide (CAS no. 16260-09-6; M_w 503 g/mol)

Especially suitable is(are) cis-13-docosenoic amide (CAS no. 112-84-5; M_w 337.6

25

g/mol) and/or cis-9,10 octadecenoamide (CAS no. 301-02-0; M_w 281.5 g/mol).

A further essential requirement of the present invention is the use of a specific epoxy resin (D). The specific selection of the epoxy resin (D) enables to reduce the amount

- of antioxidants and to some extent also the hindered amine light stabilizers and therewith the amount of the main causers in the (extruded) polypropylene composition of the stickiness problems at elevated temperatures and/or UV-exposure. Accordingly the inventive polypropylene composition, preferably the
- 5 inventive extruded polypropylene composition, comprises a bisphenol A epoxy resin being a condensation product of 2,2-bis(p-glycidyloxyphenyl) propane with 2,2-bis(p-hydroxyphenyl) propane. Preferably such a bisphenol A epoxy resin has an average molecular weight (M_w) below 2000 g/mol (D). More preferably the epoxy resin (D) has an average molecular weight (M_w) in the range of 1100 to 2000 g/mol.
- 10 The most preferred bisphenol A epoxy resin is that one with the CAS no. 25036-25-3 (M_w 1100 to 1500 g/mol). In a preferred embodiment the inventive polypropylene composition, preferably the inventive extruded polypropylene composition, comprises only the bisphenol A epoxy resin (D) as defined in this paragraph but no other types of epoxy resins.
- 15
- In addition to the above mentioned components the inventive polypropylene composition, preferably the inventive extruded polypropylene composition, must comprise talc (E). Talc (E) is a mineral composed of hydrated magnesium silicate. Preferably the talc (E) according to this invention has a particle size (d50%) of below
- 20 3.0 μm (d50% indicates that 50 wt-% of the talc has a particle size below 3.0 μm) and/or
- a particle size (d98%) of below 15.0 μm (d98% indicates that 98 wt-% of the talc has a particle size below 15.0 μm), more preferably a particle size (d50%) of below 2.0 μm and/or
- 25 a particle size (d98%) of below 10.0 μm , yet more preferably more preferably a particle size (d50%) of below 1.0 μm and/or a particle size (d98%) of below 5.0 μm .

To obtain especially good results the components of the inventive polypropylene composition, preferably the inventive extruded polypropylene composition, should be present in specific amounts.

- 5 For instance it is preferred that the weight ratio of the bisphenol A epoxy resin (D) to the talc (E) is 1.0 : 60, more preferably 1.0 : 64.

Additionally the inventive polypropylene composition, preferably the inventive extruded polypropylene composition, can comprise 50000 to 400000 ppm, preferably
 10 100000 to 300000 ppm, yet more preferably of 140000 to 200000 ppm, of talc (E).

Accordingly it is appreciated that the inventive polypropylene composition, preferably the inventive extruded polypropylene composition, comprises

- (a) 400 to 2400 ppm, more preferably 800 to 2100 ppm, of phenolic
 15 antioxidant(s) (A), preferably pentaerythrityl-tetrakis (3-(3,5-di-tert-butyl-4-hydroxyphenyl) propionate (CAS no. 6683-19-8; M_w 1178 g/mol),
- (b) 800 to 2500 ppm, more preferably 900 to 2000 ppm, yet more preferably 1200 to 1600 ppm, of hindered amine light stabilizer(s) (B') with M_w higher than 1000 g/mol, more preferably higher than 2000 g/mol, like 1,3,5-triazine-
 20 2,4,6-triamine, N_5N''' -1,2-ethanediylbis[N-[3-[[4,6-bis[butyl(1,2,2,6,6-pentamethyl-4-piperidiny]amino)-1,3,5-triazin-2-yl]amino]propyl]-N',N''-dibutyl-N',N''-bis(1,2,2,6,6-pentamethyl-4-piperidiny]- (CAS no. 106990-43-6; M_w 2286 g/mol) of formula (VIII) and/or poly((6-((1,1,3,3-tetramethylbutyl)amino)-1,3,5-triazin-2,4-diyl)-(2,2,6,6-tetramethyl-4-piperidyl)imino)-hexamethylen-((2,2,6,6-tetramethyl-4-piperidyl)imino))
 25 (CAS no. 71878-19-8; M_w >2500 g/mol),
- (c) optional below 500 ppm, more preferably free of, hindered amine light stabilizers (B'') with a M_w below 1000 g/mol, more preferably below 700

- 23 -

- g/mol, yet more preferably below 500 g/mol, like bis-(2,2,6,6-tetramethyl-4-piperidyl) sebacate (CAS no. 52829-07-9; M_w 481 g/mol),
- (d) 1000 to 2000 ppm, more preferably 1200 to 1600 ppm, of slip agent (C) being a fatty acid amide, preferably cis-13-docosenoic amide (CAS no. 112-84-5; M_w 337.6 g/mol) and/or cis-9,10 Octadecenoamide (CAS no. 301-02-0; M_w 281.5 g/mol), more preferably cis-9,10 Octadecenoamide (CAS no. 301-02-0; M_w 281.5 g/mol),
- (e) 2000 to 3000 ppm, more preferably 2200 to 2600 ppm, of bisphenol A epoxy resin with an average molecular weight (M_w) below 2000 g/mol (D), preferably bisphenol A epoxy resin with the CAS no. 25036-25-3 (M_w 1100 to 1500 g/mol),
- (f) 50000 to 400000 ppm, preferably 100000 to 300000 ppm, yet more preferably of 140000 to 200000 ppm, of talc (E), and
- (g) optionally 500 to 1500 ppm, more preferably 800 to 1100 ppm, of phosphorous antioxidant(s) (F), preferably tris-(2,4-di-tert-butylphenyl) phosphite (CAS no. 31570-04-4; M_w 647 g/mol),
- based on said (extruded) polypropylene composition.

In a preferred embodiment the inventive polypropylene composition, preferably the inventive extruded polypropylene composition, as defined in the previous paragraph does not comprise, i.e. is free of, polyorganosiloxane. Yet more preferably the inventive polypropylene composition, preferably the inventive extruded polypropylene composition, as defined in the previous paragraph does not comprise, i.e. is free of, polyorganosiloxane, distearylthiodipropionate and zinc stearate.

The polypropylene used in the inventive polypropylene composition, preferably the inventive extruded polypropylene composition, can be any polypropylene, in particular polypropylenes suitable for the automotive interior. Accordingly a

preferred polypropylene is a heterophasic propylene copolymer. Heterophasic polypropylene systems are well known in the art and are systems in particular obtained in an at least two step process resulting in a multiphase structure comprising a propylene matrix and inclusions therein comprising amorphous elastomer. Such systems can be easily tailored for the automotive requirements by setting the comonomer content in the matrix and in the elastomeric phase respectively. Such a heterophasic propylene copolymer may have an MFR₂ in the range of 8.0 to 20.0 g/10min, more preferably in the range of 9.0 to 15.0 g/10min. Typically such a heterophasic propylene copolymer has a rubber phase being a propylene-ethylene rubber (EPR). The total comonomer, preferably ethylene, content is in the range of 10 to 30 wt.-% based on the total heterophasic propylene copolymer. The amount of xylene solubles may be in the range of 20 to 35 wt.-%, preferably 25 to 30 wt.-%.

In addition to the heterophasic propylene copolymer the polypropylene according to this invention may comprise further polymer components like a (isotactic) propylene homopolymer, preferably with an MFR₂ (230 °C) in the range of 10.0 to 30.0 g/10min, more preferably in the range of 15.0 to 25.0 g/10min, and/or a high density polyethylene (HDPE), preferably a high density polyethylene (HDPE) with a density of 0.962 to 0.966 g/cm³, like 0.964 g/cm³. The high density polyethylene (HDPE) may have an MFR₂ (190 °C) of 7.0 to 12 g/10min, more preferably of 7.5 to 8.5 g/10min, like 8 g/10min.

Preferably the polypropylene according to this invention is a mixture of a heterophasic propylene copolymer and a high density polyethylene (HDPE). Optionally also an (isotactic) propylene homopolymer is present.

Preferably the polypropylene is present in the inventive polypropylene composition, preferably the inventive extruded polypropylene composition, in the amount of at

- 25 -

least 60.0 wt.-% , more preferably at least 70.0 wt.-%, yet more preferably at least 75.0 wt.-%, still more preferably of at least 80.0 wt.-%.

In case the polypropylene is a polymer mixture in which at least one polymer
5 component is a heterophasic propylene copolymer, like one as defined above, it is preferred that the inventive polypropylene composition, more preferably the extruded composition, comprises at least 55.0 wt.-%, more preferably at least 60.0 wt.-%, of said heterophasic propylene copolymer. Additionally said mixture may comprise up to 15.0 wt.-%, like 11.5 to 12.5 wt.-% of an (isotactic) propylene homopolymer
10 and/or up to 13.0 wt.-%, like 9.5 to 10.5 wt.-%, of a high density polyethylene (HDPE).

Of course the present invention may comprise further additives like pigments, for instance in the form of a master batch. However it shall preferably not contain such
15 additives which are explicitly excluded by this invention.

The inventive polypropylene composition, preferably the inventive extruded polypropylene composition, is preferably obtained by mixing the polymer and the additives as mentioned in the instant invention to form a blend and extruding the
20 blend, preferably with a twin-screw extruder is used, like the twin-screw extruder ZSK40, to form preferably a strand. Even more preferred the (extruded) composition is pelletelized, preferably by pelletizing the extruded strand using well-known conventional techniques and apparatus. Accordingly the present invention is in particular directed to pellets of the extruded polypropylene composition according to
25 this invention.

The present invention is additionally directed to the use of a bisphenol A epoxy resin with an average molecular weight (M_w) below 2000 g/mol (D) for the regulation of

- 26 -

stickiness, in particular to reduce the stickiness, of (extruded) compositions comprising

- (a) polypropylene,
- (b) at least one, preferably one, phenolic antioxidant (A),
- 5 (c) at least one hindered amine light stabilizer (B),
- (d) optionally at least one, preferably one, slip agent (C) being a fatty acid amide,
- (e) talc (E), and
- (f) optionally at least one phosphorous antioxidant (F).

- 10 The term “reducing stickiness” throughout the present invention shall indicate that (extruded) compositions (or articles) comprising the bisphenol A epoxy resin (D) have reduced stickiness (as defined in the example section) compared to (extruded) compositions (or articles) comprising the same components but no bisphenol A epoxy resin (D).

15

Concerning the preferred embodiments of the bisphenol A epoxy resin (D), the polypropylene, the phenolic antioxidant (A), the hindered amine light stabilizer (B), the slip agent (C), the talc (E) and the phosphorous antioxidant (F) it is referred to the definitions made above. Thus amounts of additives to be used in the (extruded)

- 20 composition are the same as defined above. This applies in particular to the used amounts of the bisphenol A epoxy resin (D) to regulate, in particular to reduce, the stickiness of (extruded) compositions. It is especially preferred that the bisphenol A epoxy resin (D) as defined in the instant invention is used for (extruded) composition as defined herein, in particular to those compositions being free of
- 25 polyorganosiloxane, distearylthiodipropionate and zinc stearate.

The present invention has in particular discovered that surprisingly the phenolic antioxidants (A) and the hindered amine light stabilizers (B) in an (extruded)

- 27 -

polypropylene composition comprising additionally talc (E) and optionally a slip agent (C) being a fatty acid amide contribute to the stickiness problems at elevated temperatures and/or UV-exposure. The present invention has further discovered that bisphenol A epoxy resin (D) can partially replace the phenolic antioxidants (A) and the hindered amine light stabilizers (B) without compromising other important properties like scratch resistance and long term heat resistance and on the other hand such a replacement significantly contributes to the reduction of stickiness.

Accordingly the present invention is preferably directed to the use of a bisphenol A epoxy resin with an average molecular weight (M_w) below 2000 g/mol (D) for the regulation of stickiness, in particular to reduce the stickiness, of (extruded) compositions comprising

- (a) polypropylene,
- (b) at least one, preferably one, phenolic antioxidant (A),
- (c) at least one hindered amine light stabilizer (B),
- 15 (d) optionally at least one, preferably one, slip agent (C) being a fatty acid amide,
- (e) talc (E), and
- (f) optionally at least one phosphorous antioxidant (F),

by partially replacing the phenolic antioxidant (A) and/or the hindered amine light stabilizer (B) by the bisphenol A epoxy resin (D). "Partially replacing" means that the amount of phenolic antioxidant (A) and/or the hindered amine light stabilizer (B) can be lowered in an (extruded) composition in which bisphenol A epoxy resin (D) is present compared to a composition containing no bisphenol A epoxy resin (D).

Accordingly in a specific preferred embodiment the present invention is directed to the use of a bisphenol A epoxy resin with an average molecular weight (M_w) below 2000 g/mol (D) for the regulation of stickiness, in particular to reduce the stickiness, of (extruded) compositions comprising

- (a) polypropylene,

- 28 -

- (b) at least one, preferably one, phenolic antioxidant (A),
 - (c) at least one hindered amine light stabilizer (B),
 - (d) optionally at least one, preferably one, slip agent (C) being a fatty acid amide,
 - (e) talc (E), and
- 5 (f) optionally at least one phosphorous antioxidant (F),
- by partially replacing the phenolic antioxidant (A) and/or the hindered amine light stabilizer (B) by the bisphenol A epoxy resin (D). "Partially replacing" means that the amount of phenolic antioxidant (A) and/or the hindered amine light stabilizer (B) can be lowered in an (extruded) composition in which bisphenol A epoxy resin (D) is
- 10 present compared to a composition containing no bisphenol A epoxy resin (D). Accordingly by using bisphenol A epoxy resin (D) the amount of phenolic antioxidant (A) and/or the hindered amine light stabilizer (B) is lowered by at least 30 wt.-%, more preferably by at least 40 wt.-%, in the (extruded) composition compared to an composition comprising the same components but no bisphenol A
- 15 epoxy resin (D).

- It is in particular appreciated that the use of the bisphenol A epoxy resin (D) regulates the stickiness, in particular to reduce the stickiness, of (extruded) compositions by keeping the long term heat resistance constant, wherein the
- 20 (extruded) compositions comprise
- (a) polypropylene,
 - (b) at least one, preferably one, phenolic antioxidant (A),
 - (c) at least one hindered amine light stabilizer (B),
 - (d) optionally at least one, preferably one, slip agent (C) being a fatty acid amide,
- 25 (e) talc (E), and
- (f) optionally at least one phosphorous antioxidant (F).

- 29 -

- The present invention is additionally directed to the use of the inventive (extruded) polypropylene composition, in particular to the use of pellets of the inventive (extruded) polypropylene composition, to regulate the stickiness, preferably to reduce the stickiness, of articles, in particular of moulded articles, made out of it. A
- 5 preferred use of the inventive (extruded) polypropylene composition, i.e. of the pellets of the inventive (extruded) polypropylene composition, is to regulate the stickiness, preferably to reduce the stickiness, of covering elements, like covering elements for vehicles.
- 10 Furthermore the present invention is directed to automotive articles, preferably automotive interior articles, like dashboards, door claddings, armrests or other interior trims, comprising the (extruded) polypropylene composition as defined herein.
- 15 The present invention is further described by way of examples.

EXAMPLES

1. The following definitions of terms and determination of methods apply for the above general description of the invention as well as to the below examples
5 unless otherwise defined.

Mw, Mn, MWD

Mw/Mn/MWD are measured by Gel Permeation Chromatography (GPC) according to the following method:

- 10 The weight average molecular weight (Mw) and the molecular weight distribution (MWD = Mw/Mn wherein Mn is the number average molecular weight and Mw is the weight average molecular weight) is measured by a method based on ISO 16014-1:2003 and ISO 16014-4:2003. A Waters Alliance GPCV 2000 instrument, equipped with refractive index detector and online viscosimeter is used with 3 x TSK-gel
15 columns (GMHXL-HT) from TosoHaas and 1,2,4-trichlorobenzene (TCB, stabilized with 200 mg/L 2,6-Di tert butyl-4-methyl-phenol) as solvent at 145 °C and at a constant flow rate of 1 mL/min. 216.5 µL of sample solution are injected per analysis. The column set is calibrated using relative calibration with 19 narrow
20 MWD polystyrene (PS) standards in the range of 0.5 kg/mol to 11 500 kg/mol and a set of well characterized broad polypropylene standards. All samples are prepared by dissolving 5 to 10 mg of polymer in 10 mL (at 160 °C) of stabilized TCB (same as mobile phase) and keeping for 3 hours with continuous shaking prior sampling in into the GPC instrument.

- 25 **MFR₂ (230 °C)** is measured according to ISO 1133 (230 °C, 2.16 kg load).

MFR₂ (190 °C) is measured according to ISO 1133 (190 °C, 2.16 kg load).

Ethylene content, in particular of the matrix, i.e. polypropylene (A), is measured with Fourier transform infrared spectroscopy (FTIR) calibrated with ^{13}C -NMR.

When measuring the ethylene content in polypropylene, a thin film of the sample (thickness about 250 μm was prepared by hot-pressing. The area of absorption peaks

5 720 and 733 cm^{-1} was measured with Perkin Elmer FTIR 1600 spectrometer. The method was calibrated by ethylene content data measured by ^{13}C -NMR.

The xylene solubles (XS, wt.-%): Content of Xylene solubles (XS) is determined at 23 °C according ISO 6427.

10

Stickiness performance:

This testing method is being used to measure and define the surface stickiness of materials being used in automotive interior grades.

15

Test method:

Three plaques (not smaller than 100x50x4 mm, smooth surface on at least one side) or cut plaques from final parts shall be stored under specific conditions and
20 afterwards undergo finger-testing as explained below (see Table 2).

Testing conditions may be either oven testing at 90 °C for a period of 90 h and 500 h respectively or alternatively artificial weathering (UV testing) at conditions as described in table 1.

25

Table 1: Test conditions artificial weathering

black-panel-temperature	100+/-3°C
chamber temperature	65+/-3°C
rel. humidity	20+/-10%
radiation intensity	60 W/m ²
filter system	3 UV-Special Suprax
period of storage	5 x 72 h

As an apparatus XENO 1200 CPS (Co. HERAEUS) is used.

5

Finger tests (gentle pushing and lifting) shall be made on the warm parts (smooth surface) one minute after removal from oven. The tester's hands shall be dry and clean. After touching a sticky specimen the tester must wash hands to not influence the following tests. The test shall be carried out by 3 persons on 3 different plaques.

- 10 The impression of finger testing shall be classified on the following stickiness index (see Table 2). The final stickiness index shall be calculated from the average of all three testers.

Table 2: Stickiness Index:

15

1	Not sticky
2	Almost not sticky
3	Minor stickiness, not disturbing
4	Sticky (plate does not stick on finger when being lifted)
5	Very sticky (plate sticks on finger when being lifted)

UV-stability

UV Stability was measured using the testing device XENO 1200 CPS (Co. HERAEUS).

5

For this method a minimum of 3 specimens not smaller than 60 x 60 x 3 mm were put into an apparatus as specified below. The specimens may be injection moulded according ISO/DIS 1873-2 or alternatively be cut from part. Specimens shall be tested according conditions as listed below (table 3).

10

For evaluating the specimens after UV exposure, the grey scale (according DIN EN 20 105-A02) shall be measured. To pass the test, greyscale values not smaller than 4 must be measured.

15 Apparatus: XENO 1200 CPS (Co. HERAEUS)

Table 3: Test conditions artificial weathering

black-panel-temperature	90+/-2 °C
chamber temperature	50+/-2 °C
rel. humidity	20+/-10 %
radiation intensity	75 W/m ²
filter system	3 UV-Special Suprax
period of storage	1500 h

20

Long term heat resistance

For this method a minimum of 3 specimens with size of 60 x 60 x 3 mm were put into a forced draught oven (dauerumlufte ofen) (Co. HERAEUS) at a temperature of
5 150 °C (+/-1). The specimens may be injection moulded according ISO/DIS 1873-2 or alternatively be cut from part.

Specimens must withstand at least 400 h of heat exposure without showing the for PP typical degradation appearance.

10

Scratch resistance

To determine the scratch resistance a Cross Hatch Cutter Model 42Op, manufactured by Erichsen, was used.

15

For the tests, plaques of 70x70x4 mm size were cut from a moulded grained (grain parameters: average grain size = 1mm, grain depth = 0,12 mm, conicity = 6°) plaque of size 140x200x4 mm. The minimum period between injection moulding of specimens and scratch-testing was 7 days

20

For testing the specimens must be clamped in a suitable apparatus as described above. Scratches are applied at a force of 10 N using a cylindrical metal pen with a ball shaped end (radius=0,5mm +/- 0,01). A cutting speed of 1000 mm/min is used.

25 A minimum of 20 scratches parallel to each other are brought up at a load of 10 N with a distance of 2 mm. The application of the scratches is repeated perpendicular to each other, so that the result is a scratching screen. The scratching direction shall be unidirectional.

- 35 -

The scratch resistance is reported as the difference of the luminance ΔL of the unscratched from the scratched areas. ΔL values can be measured using a spectrophotometer that fulfils the requirements to DIN 5033.

5

Measured ΔL Values must be below a maximum of 1.5.

A detailed test description of the test method can be found in the article "Evaluation of scratch resistance in multiphase PP blends" by Thomas Koch and Doris Machl,
10 published in POLYMER TESTING 26 (2007), p. 927-936.

2. Preparation of examples

The components are injection moulded using the machines ES 1050/250 HL (Co. ENGEL). The melt temperature is 240 °C, tool temperature 30 °C; injection time 2 s,
5 cycle time 1 min, dwell pressure time 20 s at 50 bar, cooling time 25 s.

The propylene copolymer is a heterophasic propylene copolymer having an MFR (230 °C/2.16 kg) of 11.5 g/10min and a total ethylene content of 16.0 wt.-%. The xylene solubles are in the range of 27.5 to 30.5 wt.-%.

The propylene homopolymer is the commercial product HF 955 MO of Borealis
10 (MFR (230 °C/2.16 kg) 20 g/10min; density 920 kg/m³).

The HDPE is the commercial product MG 9641 of Borealis (MFR (190 °C/2.16 kg) 8 g/10min; density 964 kg/m³).

Table 4: Properties of the examples

		CEX 1	CEX 2	IEX 3	IEX 4	CEX 5	CEX 6
PP Copolym.	[wt.-%]	ca. 58 ¹	ca. 58 ¹	ca. 58 ¹	ca. 58 ¹	ca. 58 ¹	ca. 58 ¹
PP Homopol.	[wt.-%]	12.0	12.0	12.0	12.0	12.0	12.0
HDPE	[wt.-%]	10.0	10.0	10.0	10.0	10.0	10.0
talc	[wt.-%]	15.0	15.0	15.0	15.0	15	15.0
AO 106	[ppm]	2500	0	0	0	0	0
AO 101	[ppm]	600	3500	2000	500	2000	500
AO 200	[ppm]	1500	2000	1000	1000	1000	1000
OT 700	[ppm]	0	0	2500	2500	0	0
UV 200	[ppm]	1000	1000	500	0	500	0
UV 222	[ppm]	900	900	1500	1500	1500	1500
SA 110	[ppm]	1500	1500	1500	1500	1500	1500
CMB	[wt.-%]	4.0	4.0	4.0	4.0	4.0	4.0
Stickiness	[1-6] *	5.0	4.5	2.5	2.0	2.5	2.0
UV-stability	Grey scale ***	4	4,5	5	4,5	4,5	4
Long term heat resistance	[h] ****	> 400	> 400	> 400	> 400	< 400	< 400
Scratch resistance	ΔL **	1,15	0,82	1,04	0,95	0,57	0,73

¹ “ca. 58” indicates that the propylene copolymer constitutes the rest of the composition up to 100 wt.-%.

* Stickiness Index: see table 1

** ΔL describes the change of the color impression at the scratched place of the sample ($\Delta L=0$ indicates no change of color; values below $\Delta L \leq 1.5$ are required by the automotive industry)

*** Gray scale according to DIN EN 20105-A02.

**** required is > 400h

- 38 -

- AO 106: 1,3,5-tris (3',5'-di-tert-butyl-4'-hydroxybenzyl)-isocyanurate (CAS no. 27676-62-6; 784 g/mol)
- AO 101: pentaerythrityl-tetrakis (3-(3,5-di-tert-butyl-4-hydroxyphenyl) propionate (CAS no. 6683-19-8; 1178 g/mol)
- 5 AO 200: tris-(2,4-di-tert-butylphenyl) phosphite (CAS no. 31570-04-4; 647 g/mol)
- OT 700: bisphenol A epoxy resin with the CAS no. 25036-25-3 (M_w 1100 to 1500 g/mol)
- 10 UV 200: bis-(2,2,6,6-tetramethyl-4-piperidyl) sebacate (CAS no. 52829-07-9; 481 g/mol)
- UV 222: 1,3,5-triazine-2,4,6-triamine, N_5N''' -1,2-ethanediylbis[N-[3-[[4,6-bis[butyl(1,2,2,6,6-pentamethyl-4-piperidiny)amino]-1,3,5-triazin-2-yl]amino]propyl]-N',N''-dibutyl-N',N''-bis(1,2,2,6,6-pentamethyl-4-piperidiny)- (CAS no. 106990-43-6; 2286 g/mol)
- 15 SA 110: cis-9,10 Octadecenoamide (CAS no. 301-02-0; 281.5 g/mol)
- CMB: colour master batch (40 wt.-% pigments, 40 wt.-% polyethylene, 20 wt.-% polypropylene)

C L A I M S

1. Composition comprising polypropylene and
 - (a) at least one, preferably one, phenolic antioxidant (A)
 - 5 (b) at least one hindered amine light stabilizer (B)
 - (c) at least one, preferably one, slip agent (C) being a fatty acid amide,
 - (b) a bisphenol A epoxy resin with an average molecular weight (M_w) below 2000 g/mol (D),
 - (c) talc (E), and,
 - 10 (d) optionally at least one phosphorous antioxidant (F)
2. Composition according to claim 1, wherein the composition is an extruded composition.
- 15 3. Composition according to claim 1 or 2, wherein said composition does not comprise polyorganosiloxane.
4. Composition according anyone of the preceding claims, wherein said composition does not comprise distearylthiodipropionate and/or zinc stearate.
- 20 5. Composition according anyone of the preceding claims, wherein said composition comprises
 - (a) 400 to 2400 ppm of phenolic antioxidant(s) (A)
 - (b) 1000 to 2500 ppm of hindered amine light stabilizer(s) (B)
 - 25 (c) 1000 to 2000 ppm of slip agent(s) (C) being a fatty acid amide(s),
 - (d) 2000 to 3000 ppm of a bisphenol A epoxy resin with an average molecular weight (M_w) below 2000 g/mol (D),
 - (e) 50000 to 400000 ppm talc (E), and
 - (f) optionally 500 to 1500 ppm of phosphorous antioxidant(s) (E)
 - 30 based on said composition.


6. Composition according anyone of the preceding claims, wherein weight ratio of the bisphenol A epoxy resin (D) to the talc (E) is 1.0 : 60, more preferably 1.0 : 64.

5 7. Composition according to anyone of the preceding claims, wherein the composition comprises only one phenolic antioxidant (A).

8. Composition according to anyone of the preceding claims, wherein the phenolic antioxidant(s) (A) is(are) sterically hindered.

10

9. Composition according to anyone of the preceding claims, wherein the phenolic antioxidant(s) (A) comprise(s) the residue of formula (I)



wherein


15 R_1 is $(CH_3)_3C-$, CH_3- or H, preferably $(CH_3)_3C-$, and

A_1 constitutes the remaining part of the phenolic antioxidant (A).

10. Composition according to anyone of the preceding claims, wherein the phenolic antioxidant(s) (A) has(have) a molecular weight (M_w) of more than
20 785 g/mol.

11. Composition according to anyone of the preceding claims, wherein the phenolic antioxidant(s) (A) comprise(s) 1, 2, 4 or more phenolic residue(s), preferably 1, 2, 4 or more phenolic residue(s) of formula (I) as defined in
25 claim 9 or 10.


12. Composition according anyone of the preceding claims, wherein the phenolic antioxidant(s) (A) does(do) not comprise the moiety of formula (III)



5 wherein

R₂ is selected from the group consisting of -CH₂-R₃₁, -CH₂-CH₂-R₃₂, -CH₂-CH₂-CH₂-R₃₃ and -CH₂-CH₂-CH₂-CH₂-R₃₄, preferably R₂ is -CH₂-R₃₁, and R₃₁, R₃₂, R₃₃ and R₃₄ can be independently any organic residue with the proviso that at least one of the R₃₁, R₃₂, R₃₃ and R₃₄ is a phenolic moiety, preferably a phenolic residue as defined in claim 9.

13. Composition according to anyone of the preceding claims, wherein the phenolic antioxidant(s) (A) comprise(s) at least one residue of formula (II)

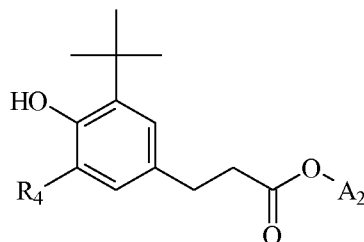


15 wherein


R₄ is (CH₃)₃C-, CH₃-, or H, preferably (CH₃)₃C-, and A₂ constitutes the remaining part of the phenolic antioxidant (A).

14. Composition according anyone of the preceding claims, wherein the phenolic antioxidant (A) is of formula (VI)

20

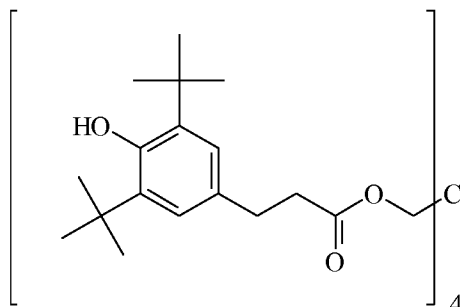


15. Composition according to anyone of the preceding claims, wherein the
 5 composition is free of phenolic antioxidants (A) comprising the moiety of
 formula (IV)




wherein R is any residue which may comprise a phenolic moiety.

- 10 16. Composition according anyone of the preceding claims, wherein said
 composition is free of the phenolic antioxidant (A) of formula (V)

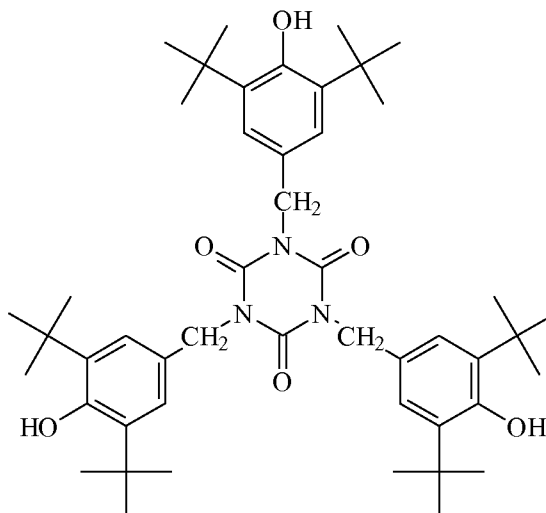

17. Composition according anyone of the preceding claims, wherein the hindered amine light stabilizer(s) (B) comprise(s) at least one residue of the formula (VII)




wherein U constitutes the remaining part of the hindered amine light stabilizer(s) (B).

18. Composition according to anyone of the preceding claims, wherein the composition comprises at least one hindered amine light stabilizers (B') with a M_w higher than 1000 g/mol, more preferably higher than 2000 g/mol.
19. Composition according to anyone of the preceding claims, wherein the composition comprises two different hindered amine light stabilizers (B),


preferably wherein one of the hindered amine light stabilizers (B) comprises at least one residue of the formula (VII) as defined in claim 17.

- 5 20. Composition according to anyone of the preceding claims, wherein the composition comprise at least one hindered amine light stabilizer (B') comprising at least four residues, preferably at least 8 residues, more preferably 16 residues, of the formula (VII) as defined in claim 17.
- 10 21. Composition according to any one of the preceding claims, wherein the composition comprise not more than 500 ppm of hindered amine light stabilizer(s) (B'') with a M_w below 1000 g/mol, more preferably below 700 g/mol.
- 15 22. Composition according to anyone of the preceding claims, wherein the composition comprise at least one hindered amine light stabilizer (B') as defined in claim 20 and at least one further hindered amine light stabilizer (B''), wherein hindered amine light stabilizer (B') has more residues of formula (VII) as defined in claim 17 than the hindered amine light stabilizer (B'').
- 20 23. Composition according anyone of the preceding claims, wherein the weight ratio of the hindered amine light stabilizer (B') to the hindered amine light stabilizer (B'') (B'/B'') is at least 2.0 : 1.0, more preferably at least 2.5 : 1.0.
- 25 24. Composition according anyone of the preceding claims, wherein the composition comprises only the hindered amine light stabilizer (B').
25. Composition according anyone of the preceding claims, wherein
 (a) the hindered amine light stabilizer (B') is defined by formula (VIII)

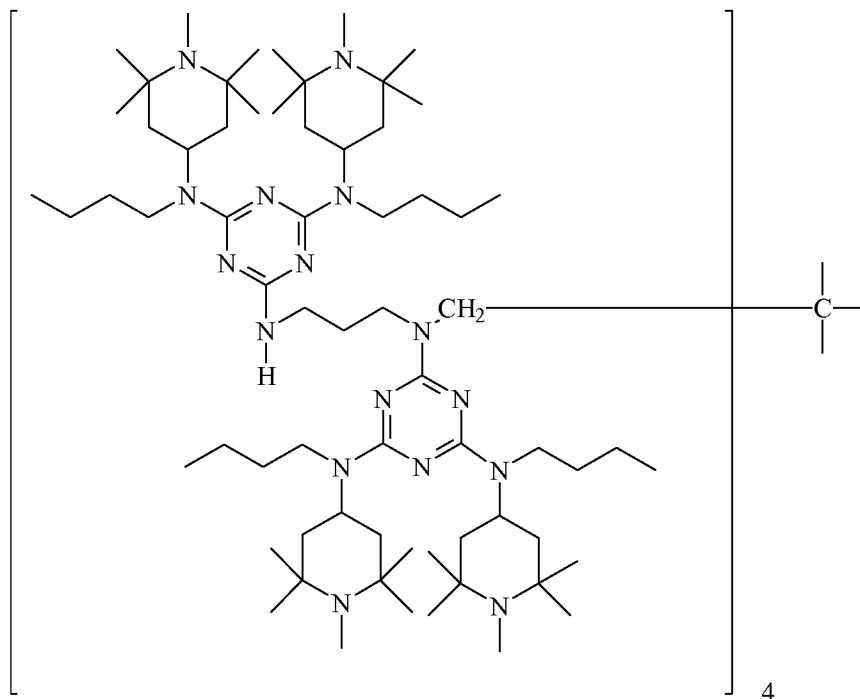

and/or

(b) the hindered amine light stabilizer (B'') is defined by formula (IX)

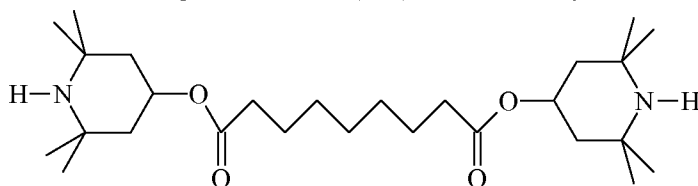

5

26. Composition according to any one of the preceding claims, wherein at least one slip agent (C), preferably all slip agents (C), is(are) an unsaturated fatty acid amide(s).

10

27. Composition according to any one of the preceding claims, wherein the slip agent(s) (C) being (a) fatty acid amide(s) comprise(s) C10 to C25 carbon atoms.

15

28. Composition according to any one of the preceding claims, wherein the composition comprises only one slip agent (C).

29. Composition according to any one of the preceding claims, wherein the slip agent (C) is cis-13-docosenoic amide (CAS no. 112-84-5; M_w 337.6 g/mol) and/or cis-9,10 octadecenoamide.

5

30. Composition according anyone of the preceding claims, wherein the bisphenol A epoxy resin (D) has an average molecular weight (M_w) in the range of 1100 to 2000 g/mol.

10

31. Composition according anyone of the preceding claims, wherein the bisphenol A epoxy resin (D) is condensation product of 2,2-bis(p-glycidyloxyphenyl) propane with 2,2-bis(p-hydroxyphenyl) propane.

15

32. Composition according to anyone of the preceding claims, wherein the bisphenol A epoxy resin (D) has the CAS-number 25036-25-3.

33. Automotive article comprising a composition according to anyone of the preceding claims.

20

34. Use of a bisphenol A epoxy resin with an average molecular weight (M_w) below 2000 g/mol (D) for the regulation of stickiness, in particular to reduce the stickiness, of an (extruded) composition comprising

25

- (a) polypropylene,
- (b) at least one, preferably one, phenolic antioxidant (A),
- (c) at least one hindered amine light stabilizer (B),
- (d) optionally at least one, preferably one, slip agent (C) being a fatty acid amide,
- (e) talc (E), and
- (f) optionally at least one phosphorous antioxidant (F).

30

35. Use of according to claim 34, wherein the bisphenol A epoxy resin (D) regulates the stickiness by keeping the long term heat resistance constant.
36. Use of according to claim 33 or 35, wherein the amount of phenolic antioxidant (A) and/or the hindered amine light stabilizer (B) is lowered by at least 30 wt.-% in an (extruded) composition by using bisphenol A epoxy resin (D) compared to an (extruded) composition comprising the same components but no bisphenol A epoxy resin (D).
37. Use according to anyone of the claims 33 to 36, wherein
- (a) the compositions is a composition as defined in any one of the claims 1 to 29 but without bisphenol A epoxy resin (D), and
 - (b) the bisphenol A epoxy resin (D) is an epoxy resin as defined in anyone of the claims 1, 30 to 32.
38. Use of a composition of anyone of the preceding claims 1 to 32 to regulate the stickiness of articles, in particular covering elements for vehicles.

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2009/050555

A. CLASSIFICATION OF SUBJECT MATTER

INV. C08L23/10 C08K3/00 C08K5/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C08L C08K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 93/03095 A (ICI PLC [GB]) 18 February 1993 (1993-02-18) claims 1-18; examples 1-6	1-38
X	WO 94/18267 A (ICI PLC [GB]; GRASMEDE JOHN RUSSELL [GB]; LINDSAY CHRISTOPHER IAN [GB] 18 August 1994 (1994-08-18) claims 1-20; examples 1,2,4	1-38
X	EP 0 426 315 A (UBE INDUSTRIES [JP]) 8 May 1991 (1991-05-08) column 2, lines 15-20	1-38
A	WO 2006/003127 A (CIBA SC HOLDING AG [CH]; SHARMA ASHUTOSH H [US]) 12 January 2006 (2006-01-12) the whole document	1

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

24 February 2009

Date of mailing of the international search report

03/03/2009

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Knutzen-Mies, Karen

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2009/050555

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9303095	A	18-02-1993	AT 201429 T	15-06-2001
			AU 667821 B2	18-04-1996
			AU 2362892 A	02-03-1993
			DE 69231838 D1	28-06-2001
			DE 69231838 T2	06-09-2001
			DK 596932 T3	30-07-2001
			EP 0596932 A1	18-05-1994
			ES 2157205 T3	16-08-2001
			GR 3035946 T3	31-08-2001
			JP 6509378 T	20-10-1994
WO 9418267	A	18-08-1994	AT 161026 T	15-12-1997
			AU 7106894 A	29-08-1994
			DE 69407269 D1	22-01-1998
			DE 69407269 T2	02-04-1998
			EP 0682679 A1	22-11-1995
			JP 3322880 B2	09-09-2002
			JP 8506373 T	09-07-1996
			US 5585420 A	17-12-1996
EP 0426315	A	08-05-1991	CA 2027215 A1	25-04-1991
			JP 3137146 A	11-06-1991
WO 2006003127	A	12-01-2006	AT 397038 T	15-06-2008
			AU 2005259262 A1	12-01-2006
			BR PI0513147 A	29-04-2008
			CA 2573027 A1	12-01-2006
			CN 1997703 A	11-07-2007
			EP 1776416 A1	25-04-2007
			ES 2307190 T3	16-11-2008
			JP 2008505993 T	28-02-2008
			KR 20070038979 A	11-04-2007